

VEVOR[®]

TOUGH TOOLS, HALF PRICE

1" Air Impact Wrench(Pinless Hammer) OPERATING MANUAL

Model No.:LZ999

We continue to be committed to provide you tools with competitive price. "Save Half", "Half Price" or any other similar expressions used by us only represents an estimate of savings you might benefit from buying certain tools with us compared to the major top brands and does not necessarily mean to cover all categories of tools offered by us. You are kindly reminded to verify carefully when you are placing an order with us if you are actually saving half in comparison with the top major brands.

VEVOR[®]

1" Air Impact Wrench(Twin Hammer) OPERATING MANUAL

Model No.:LZ999



NEED HELP? CONTACT US!

Have product questions? Need technical support? Please feel free to contact us:

 CustomerService@vevor.com

This is the original instruction, please read all manual instructions carefully before operating. VEVOR reserves clear interpretation of our user manual. The appearance of the product shall be subject to the product you received. Please forgive us that we won't inform you again if there are any technology or software updates on our product.

IMPORTANT:

Upon receipt of the product, read and follow all safety rules, operating instructions before first use it. And retain this manual for future reference.

TECHNICAL DATA

| | |
|------------------------------|---------------------|
| Square drive..... | 1" |
| Free Speed..... | 3,000rpm |
| Working torque..... | 5760 N.m |
| Max torque..... | 6336 N.m |
| Avg. air consumption..... | 9.5cfm |
| Operating pressure | 90psi(6.3bar) |
| Air hose | 1/2"ID |
| Weight..... | 21.3kgs |
| Vibration in the handle..... | 2.8m/s ² |

IMPORTANT SAFETY RULES

1. When using the tool always wear safety goggles, an appropriate face mask or respiratory equipment.
2. Always ensure machine is switched off before connecting to air supply.
3. Disconnect any machine from the air supply before changing blades or discs, and before servicing any type of machine.
4. Always keep your air tool clean and lubricated. Daily lubrication is essential to avoid internal corrosion and possible failure.
5. Do not wear watches, rings bracelets or loose clothing when using air tools.
6. Using only light weight coil hoses from a tool to the wall or compressor coupling. Do not fit quick change couplings onto the machine as vibration

can cause the coupling to fail.

7. Do not overload the machine. Allow the tool to operate at its optimum speed for maximum efficiency.

8. Do not increase the air pressure above the manufacturers recommended level, as excessive overload can cause the machine casing to split. Also this creates excessive wear on moving parts and possible failure.

9. In the interests of safety and possible damage to the machine/operator, always ensure that the machine has stopped before putting it down after use.

10. Always ensure that the work piece is firmly secured leaving both hands free to control the machine.

11. Always ensure that the accessories such as blades, discs, sockets, etc. are designed for use with the machine. Also correctly and securely fastened before connecting the machine to the air supply.

OPERATING INSTRUCTION

Description

Durable twin hammer impact wrench mechanism, Pressure-feed lubrication, Adjustable power regulator, Variable speed, High Torque, Side exhaust, Sheer power and performance features to tackle the toughest jobs with ease and proven durability and economy.

Air supply

1. Ensure wrench air valve (or trigger) is in the “off” position before connecting to the air supply.

2. You will require an air pressure of 90psi, and an air flow according to specification.

3. **WARNING!** Ensure the air supply is clean and does not exceed 90psi while operating the wrench. Too high an air pressure and unclean air will shorten the product life due to excessive wear, and may be dangerous causing damage or personal injury.

4. Drain the air tank daily. Water in the air line will damage the wrench.
5. Clean air inlet filter weekly.
6. Line pressure should be increased to compensate for unusually long air hoses (over 8 metres). The hose diameter should be 3/8" I.D.
7. Keep hose away from heat, oil and sharp edges. Check hose for wear, and make certain that all connections are secure.

Lubrication

An automatic in-line filter-regulator-lubricator is recommended (Fig4) as it increases tool life and keeps the tool in sustained operation. The in-line lubricator should be regularly checked and filled with air tool oil.

Proper adjustment of the in-line lubricator is performed by placing a sheet of paper next to the exhaust ports and holding the throttle open approximately 30 seconds. The lubricator is properly set when a light stain of oil collects on the paper. Excessive amounts of oil should be avoided.

In the event that it becomes necessary to store the tool for an extended period of time (overnight, weekend, etc.), it should receive a generous amount of lubrication at that time. The tool should be run for approximately 30 seconds to ensure oil has been evenly distributed throughout the tool. The tool should be stored in a clean and dry environment.


- It is most important that the tool be properly lubricated by keeping the air line lubricator filled and correctly adjusted. Without proper lubrication the tool will not work properly and parts will wear prematurely.
- Use the proper lubricant in the air line lubricator. The lubricator should be of low air flow or changing air flow type, and should be kept filled to the correct level. Use only recommended lubricants, specially made for pneumatic applications. Substitutes may harm the rubber compounds in the tools O-rings and other rubber parts.

IMPORTANT!!!

If a filter/regulator/lubricator is not installed on the air system, air operated tools should be lubricated at least once a day or after 2 hours work with 2

to 6 drops of oil, depending on the work environment, directly through the male fitting in the tool housing.

Fig 4.

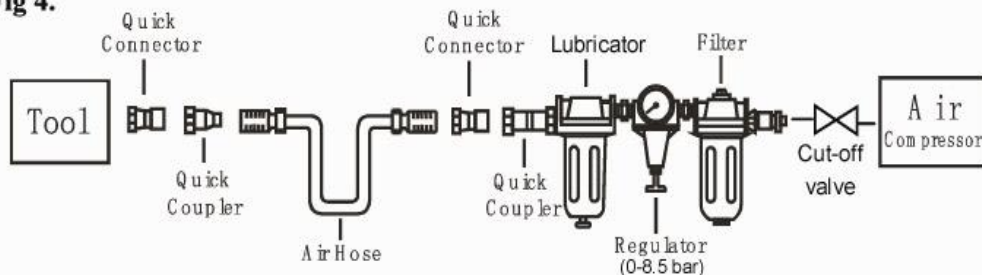

Loading and operation


⚠ WARNING: Ensure you read, understand and apply safety instructions before use.

1. Only use impact sockets which are specifically designed for use with a impact wrench.
2. Connect the wrench to the air hose .
3. Place the socket over the subject nut and depress the trigger to operate the wrench.
4. To change direction push the button at the top of the handle. Direction of .R. for reverse and “F” for forward
5. The flow of air may be regulated by adjusting flow valve at the base of the handle.

DO NOT use any additional force upon the wrench in order to remove a nut.

DO NOT allow wrench to free run for an extended period of time as this will shorten its life.


MAINTENANCE

 **WARNING:** Disconnect wrench from air supply before changing accessories, servicing or performing maintenance. *Replace or repair damaged parts. Use genuine parts only. Non-authorized parts may be dangerous*

1. Lubricate the air wrench daily with a few drops of air tool oil dripped into the air inlet
2. DO NOT use worn, or damaged sockets.
3. Loss of power or erratic action may be due to the following:
 - a) Excessive drain on the air line. Moisture or restriction in the air pipe. Incorrect size or type of hose connectors. To remedy check the air supply and follow instructions .
 - b) Grit or gum deposits in the wrench may also reduce performance. If your model has an air strainer (located in the area of the air inlet), remove the strainer and clean it..
4. When not in use, disconnect from air supply, clean wrench and store in a safe, dry, childproof location.

TROUBLE SHOOTING


The following form lists the common operating system with problem and solutions. Please read the form carefully and follow it.

 **WARNING:** If any of the following symptoms appears during your operating, stop using the tool immediately, or serious personal injury could result. Only a qualified persons or an authorized service center can perform repairs or replacement of tool.

Disconnect tool from air supply before attempting repair or adjustment. When replacing O-rings or Cylinder, lubricate with air tool oil before assembly.

| PROBLEMS | POSSIBLE CAUSES | REMEDIES |
|---|---|--|
| Tool runs at normal speed but loses under load | <ul style="list-style-type: none"> ■ Motor parts worn. ■ Cam clutch worn or sticking due to lack of lubricant. | <ul style="list-style-type: none"> ■ Lubricating clutch housing. ■ Check for excess clutch oil. Clutch cases need only be half full. Overfilling can cause drag on high speed clutch parts, ie. a typical oiled/lubricated wrench requires 1/2 ounce of oil. <p>GREASE LUBRICATED:NOTE: Heat usually indicates insufficient grease in chamber. Severe operating conditions may require more frequent lubrication.</p> |
| Tool runs slowly. Air flows slightly from exhaust | <ul style="list-style-type: none"> ■ Motor parts jammed with dirt particles ■ Power regulator in closed position ■ Air flow blocked by dirt. | <ul style="list-style-type: none"> ■ Check air inlet filter for blockage. ■ Pour air tool lubricating oil into air inlet as per instructions. ■ Operate tool in short bursts quickly reversing rotation back and forth where applicable. ■ Repeat above as needed. |
| Tools will not run. Air flows freely from exhaust | <ul style="list-style-type: none"> ■ One or more motor vanes stuck due to material build up. | <ul style="list-style-type: none"> ■ Pour air tool lubricating tool into air inlet. ■ Operate tool in short bursts of forward and/or reverse rotation where applicable. ■ Tap motor housing gently with plastic mallet. ■ Disconnect supply. Free motor by rotating drive shank manually where applicable |
| Tool will not shut off | <ul style="list-style-type: none"> ■ 'O' rings throttle valve dislodged from seat inlet valve. | <ul style="list-style-type: none"> ■ Replace 'O' ring. |

Note: Repairs should be carried out by a qualified person.

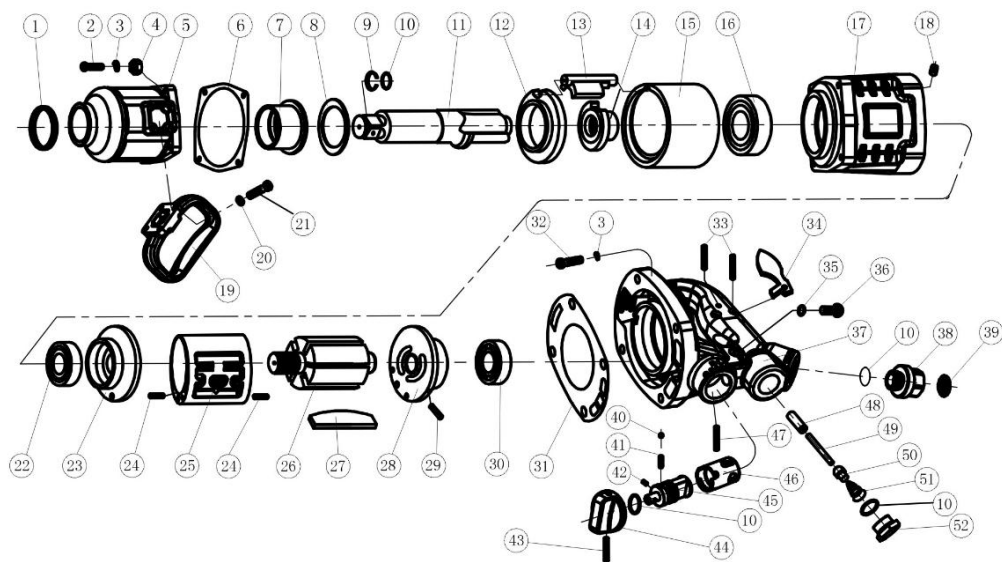

| No. | Description | Qty | No. | Description | Qty |
|-----|---------------------|-----|-----|-----------------|-----|
| 1 | oil seal | 1 | 14 | hammer cage | 1 |
| 2 | screw | 1 | 15 | hammer frame | 1 |
| 3 | spring washer | 1 | 16 | bearing | 1 |
| 4 | hex flange nut | 1 | 17 | housing | 1 |
| 5 | front motor housing | 1 | 18 | Screw cover | 1 |
| 6 | hammer case gasket | 1 | 19 | handle | 1 |
| 7 | bushing | 1 | 20 | spring washer | 1 |
| 8 | retainer washer | 1 | 21 | screw | 1 |
| 9 | anvil ring | 1 | 22 | front bearing | 1 |
| 10 | O-ring | 1 | 23 | front end plate | 1 |
| 11 | anvil | 1 | 24 | cylinder pin | 1 |
| 12 | hammer frame lining | 1 | 25 | cylinder | 1 |
| 13 | hammer | 1 | 26 | rotor | 1 |

| No. | Description | Qty | No. | Description | Qty |
|-----|-------------------|-----|-----|-----------------------|-----|
| 27 | rotor blade | 2 | 40 | steel ball | 1 |
| 28 | Rear end plate | 6 | 41 | spring | 1 |
| 29 | End plate pin | 1 | 42 | knob limit pin | 1 |
| 30 | End plate | 1 | 43 | knob pin | 1 |
| 31 | Rear cover gasket | 1 | 44 | knob | 1 |
| 32 | screw | 1 | 45 | reverse knob | 1 |
| 33 | trigger pin | 4 | 46 | reverse valve bushing | 1 |
| 34 | trigger | 1 | 47 | reverse valve pin | 1 |
| 35 | O-ring | 1 | 48 | Air inlet bushing | 1 |
| 36 | screw | 1 | 49 | air inlet pin | 4 |
| 37 | rear cover | 1 | 50 | air closer | 4 |
| 38 | air inlet | 2 | 51 | spring | 4 |
| 39 | filter | 1 | 52 | screw plug | 12 |

Importer: WAITCHX

Address: 250 bis boulevard Saint-Germain 75007 Paris

Importer: FREE MOOD LTD

Address: 2 Holywell Lane, London, England, EC2A 3ET



EUREP UK LTD

UNIT 2264, 100 OCK STREET, ABINGDON
OXFORDSHIRE ENGLAND OX14 5DH



EUREP GmbH

Unterlettenweg 1a, 85051
Ingolstadt, Germany

Manufacturer: Taizhou Lizhou Pneumatic Tools Co.,Ltd

Address: Building 13, No.68 Minhe Road, Zeguo Town, Wenling City,
Zhejiang Province, China. 317523

Made In China

VEVOR[®]

TOUGH TOOLS, HALF PRICE

Support and E-Warranty Certificate

<https://www.vevor.com/support>

Made In China