


# INSTALLATION GUIDE

# Smart Garage

AGS001




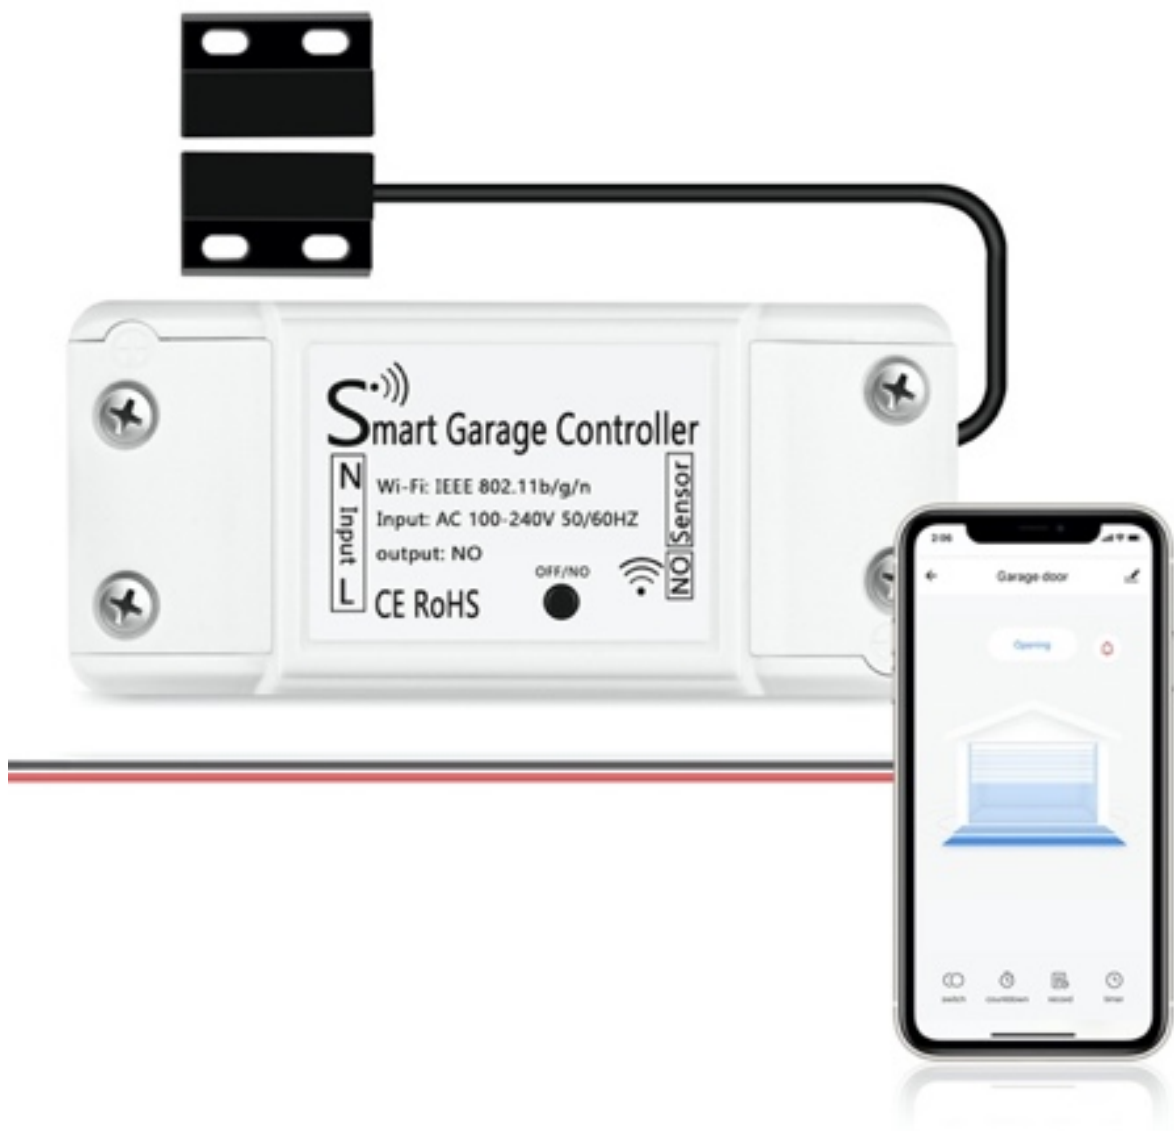




# WARNING

## TO PREVENT SERIOUS INJURY FROM YOUR MOVING GARAGE DOOR OR GATES:

- ✓ DO NOT let children use Smart Garage Door Opener product and app without adult supervision.
- ✓ ONLY operate your Smart Garage Door Opener device when you are in clear view of your garage or gate, and you have verified that there are no objects are obstructing the operation of the door.
- ✓ ALWAYS wait for garage door or gate to be completely closed.


## WHAT'S IN THE BOX

	
Smart Garage Controller	3M Sticker
	
Wire Holders	Zip Ties
	
Sensor Mounting Bracket	Screws / Blots / Nuts

# COMPATIBILITY CHECK

## Verify the Smart Garage Door Controller works with your garage door

1. Look for your garage door on the included "Garage Door Compatibility Guide".
  - Garage door openers with **yellow / purple** learn buttons will likely **NOT** work.
2. Manually ensure your garage door opener is compatible with the Smart Garage Door Controller.
  - Follow the wires from the wall mounted garage controller to your garage door opener.
  - Where the wall mounted garage door controller wires connect to the opener, use a needle nose plier or paperclip to touch the two garage door terminals together.

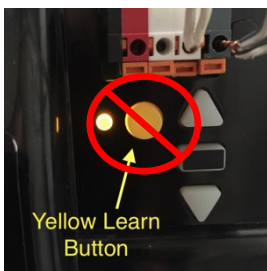


- *If the garage door opens or closes, the Smart Garage Door Controller is compatible with your garage door opener; these will be the terminals the Smart Garage Door Controller will plug into.*

# INSTALLATION

## 1. *Check your Wi-Fi*

- Check the Wi-Fi signal in the garage, where the **Smart Garage Controller** will be mounted 4 to 5 feet away from the garage door opener.

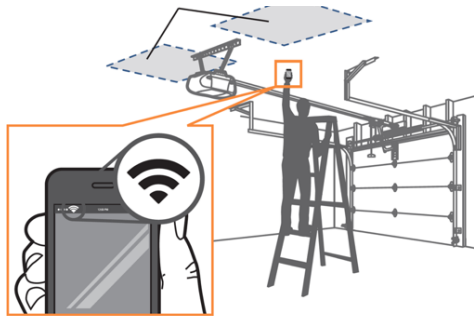

## 2. *Power up your device*

- Find a convenient location and power the **Smart Garage Controller** by plugging it in. The blue LED will start blinking.



## 3. *Download the APP*

- Install “**Smart Life**” app on your mobile phone from Apple app store or Google Play store.





# Add Controller Device in the APP

1. Launch the app and tap the Plus ( + ) in the top right corner to add a door sensor device.
2. 3. 4. Select **Add manually, Electrician, then Garage Door Opener.**

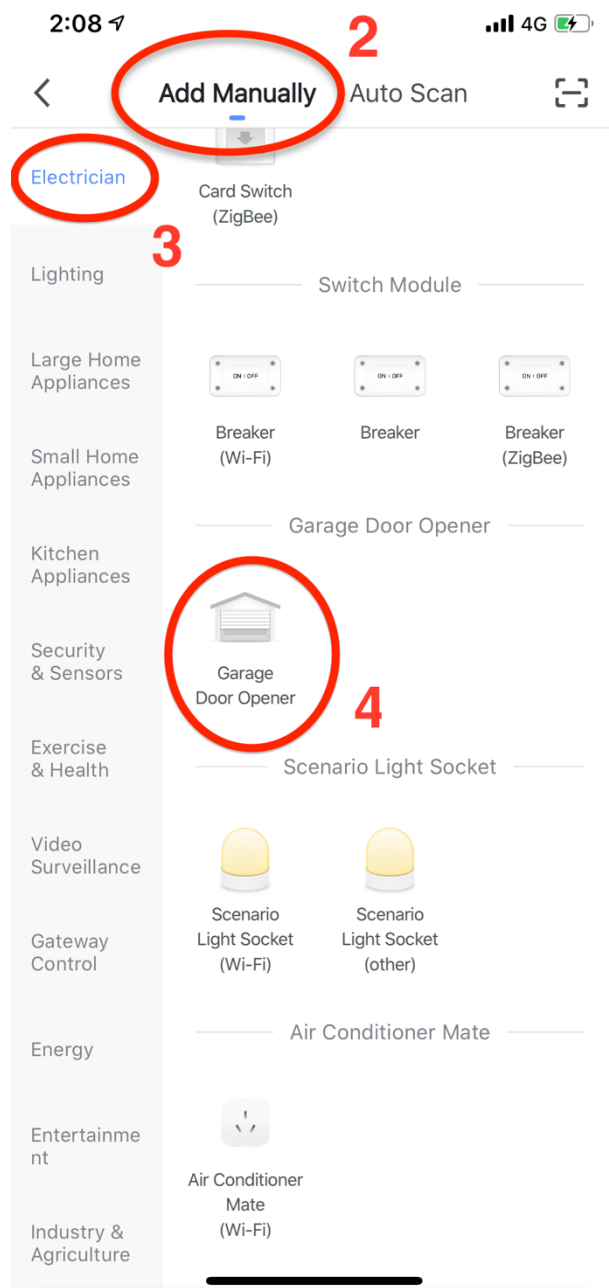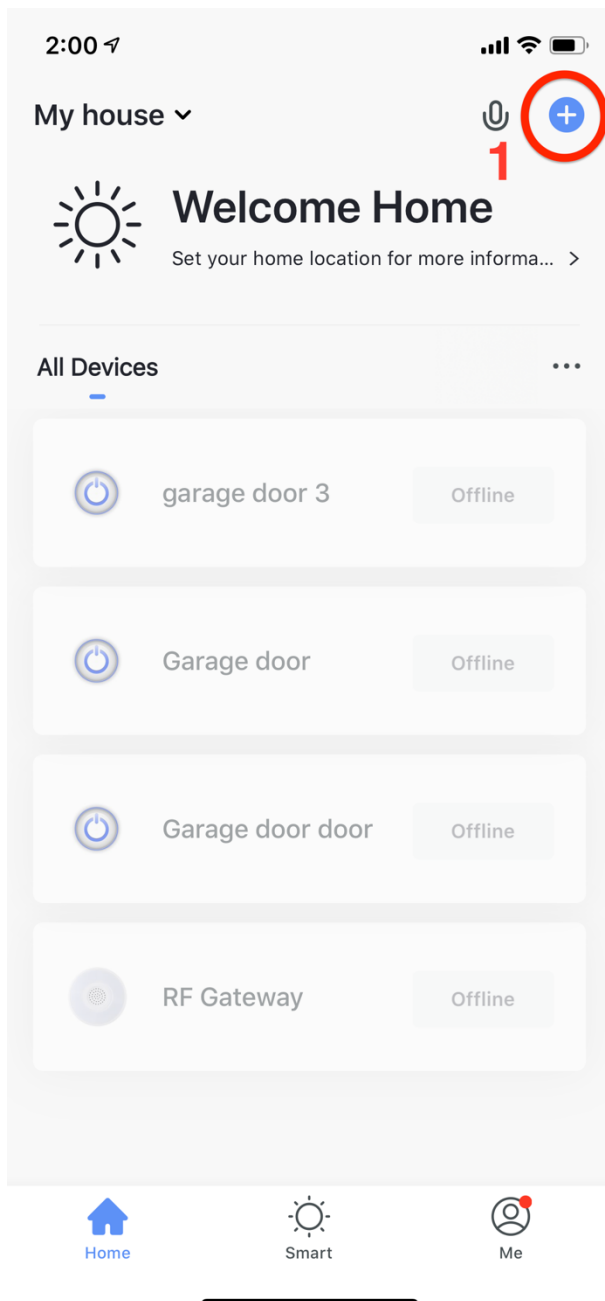

## Add Controller Device in the APP



5. Choose your Wi-Fi network and Enter the password. Then tap **Next**.
6. **IMPORTANT !!!** Press and hold the ON/OFF button on the Controller Device until **the light is SLOWLY blinking (2s/time)**.
  - Tap the **"EZ Mode"** on the top right corner, change to **"AP Mode"**.
  - Select **"Confirm indicator slowly blink"** at the bottom, tap **Next**.

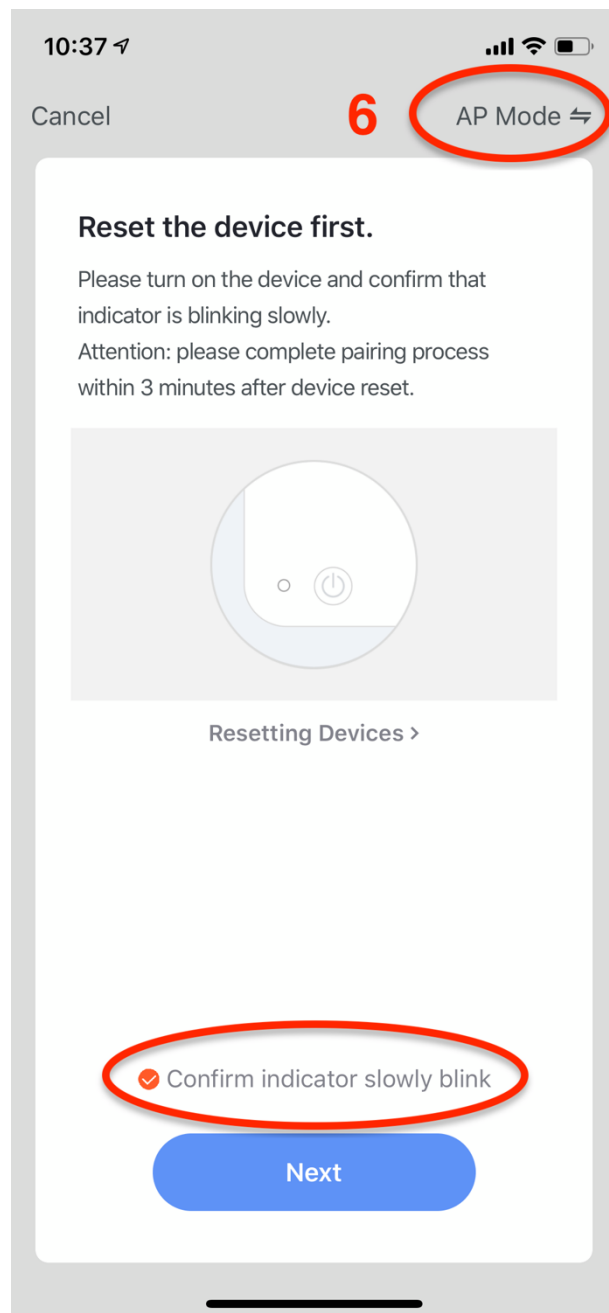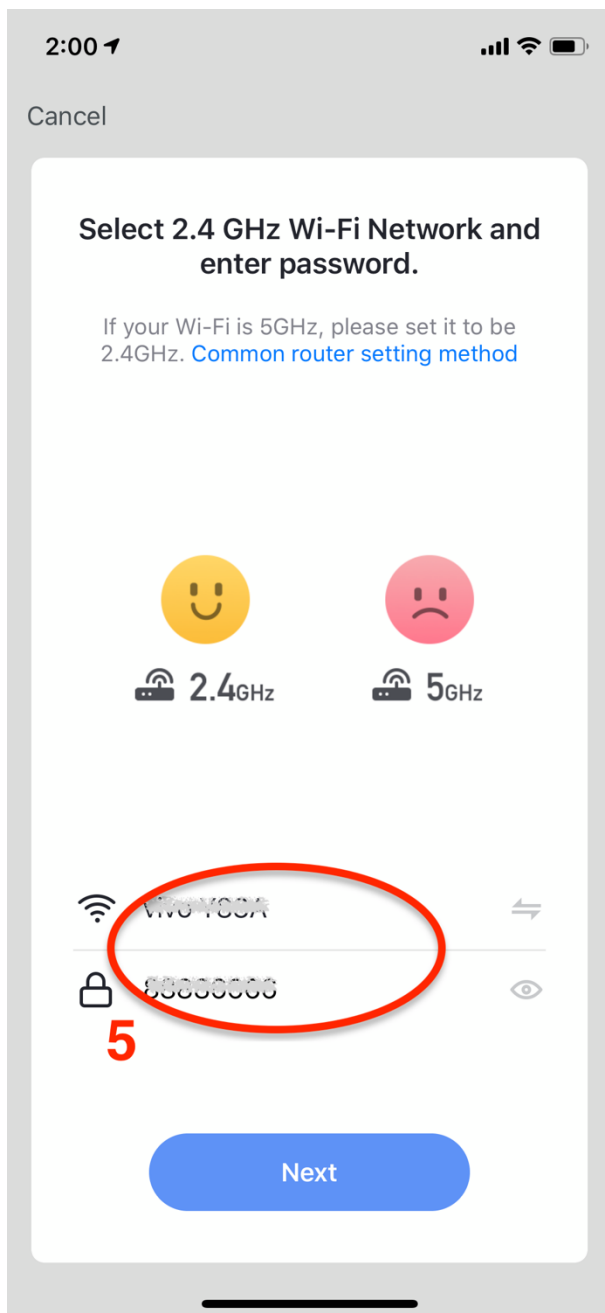

# Add Controller Device in the APP



7. Tab **Go to Connect**.

8. Select **WLAN** on your mobile phone setting.

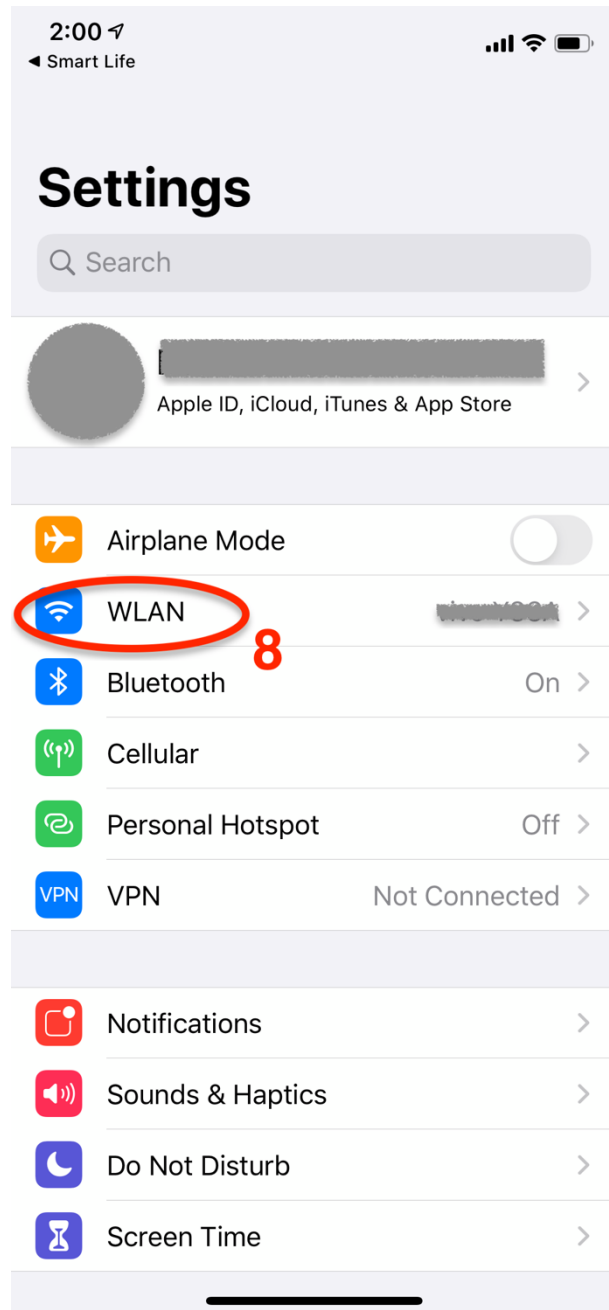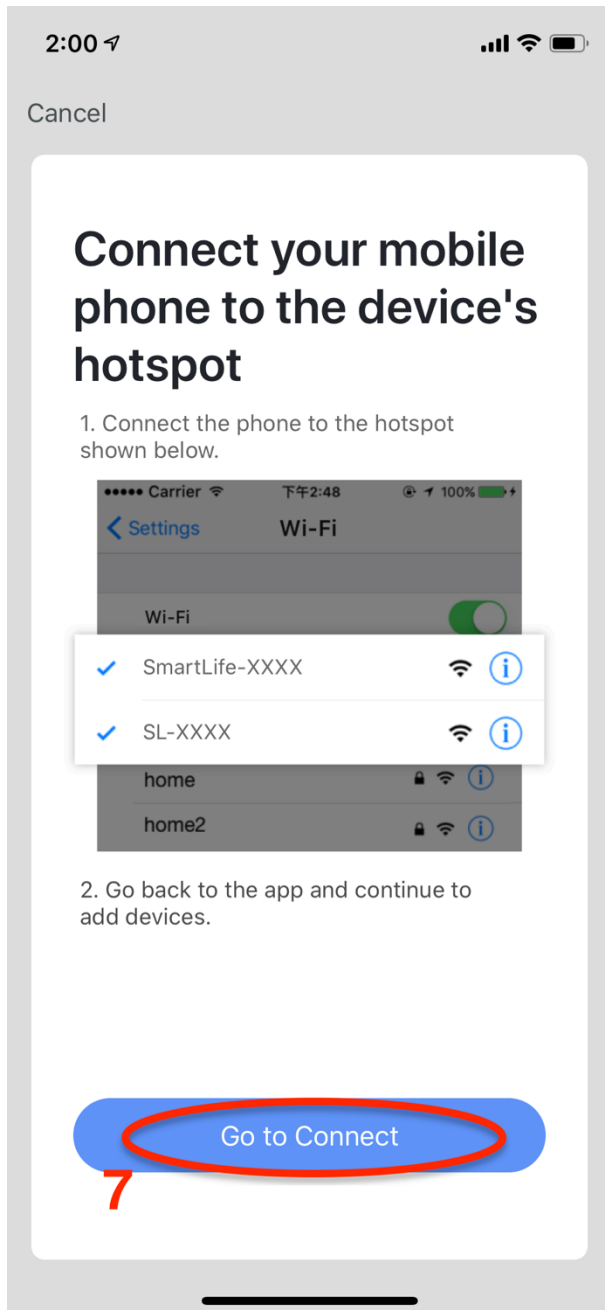

# Add Controller Device in the APP



9. Choose **SmartLife-XXXX** network on the WLAN setting.
10. Switch back to Smart Life app when WLAN is successfully connected to **SmartLife-XXXX** network.

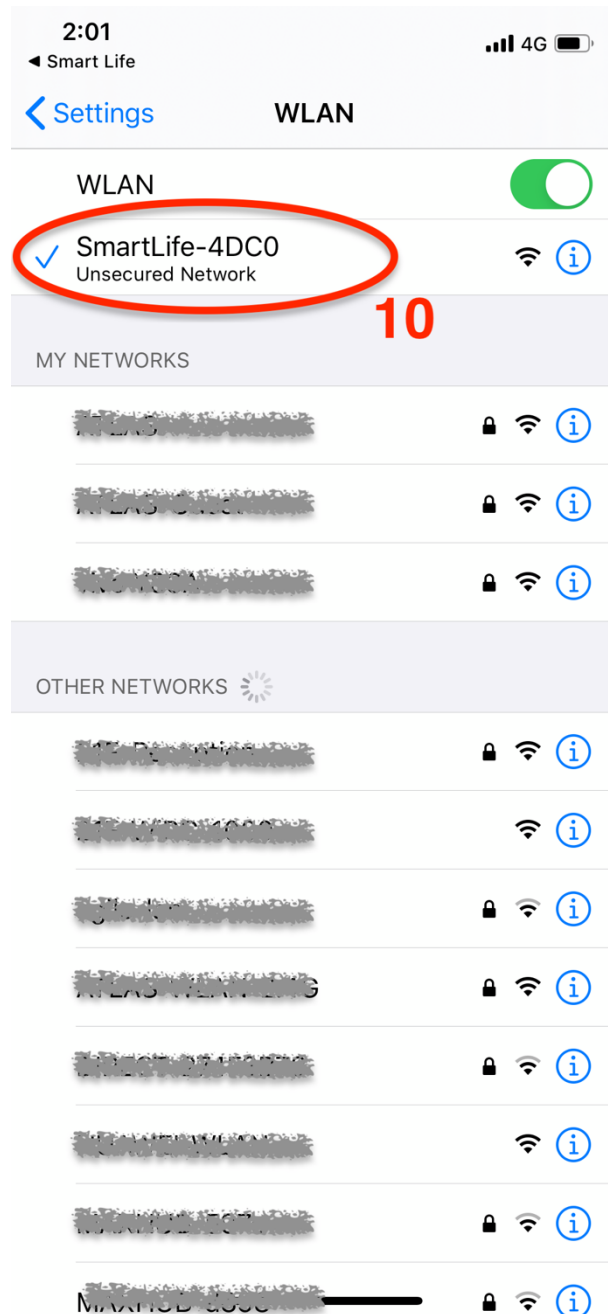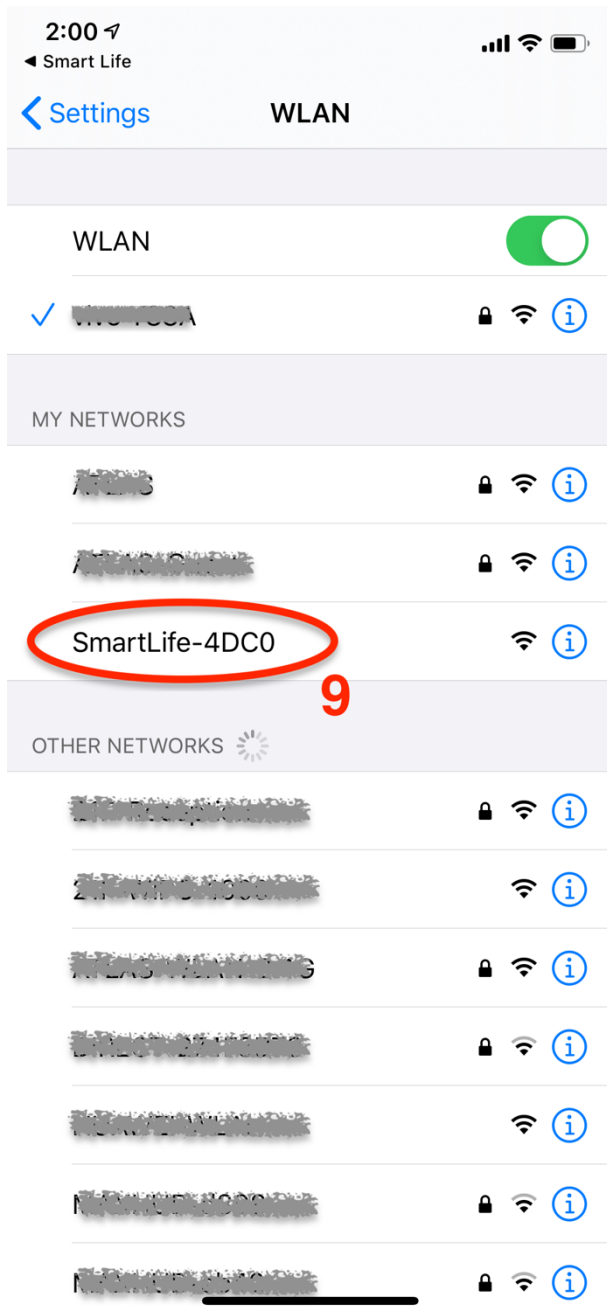



## Add Controller Device in the APP


11. It will show **Adding device** on the Smart Life App.
12. Now your Controller Device is successfully added. Tab **Done**.

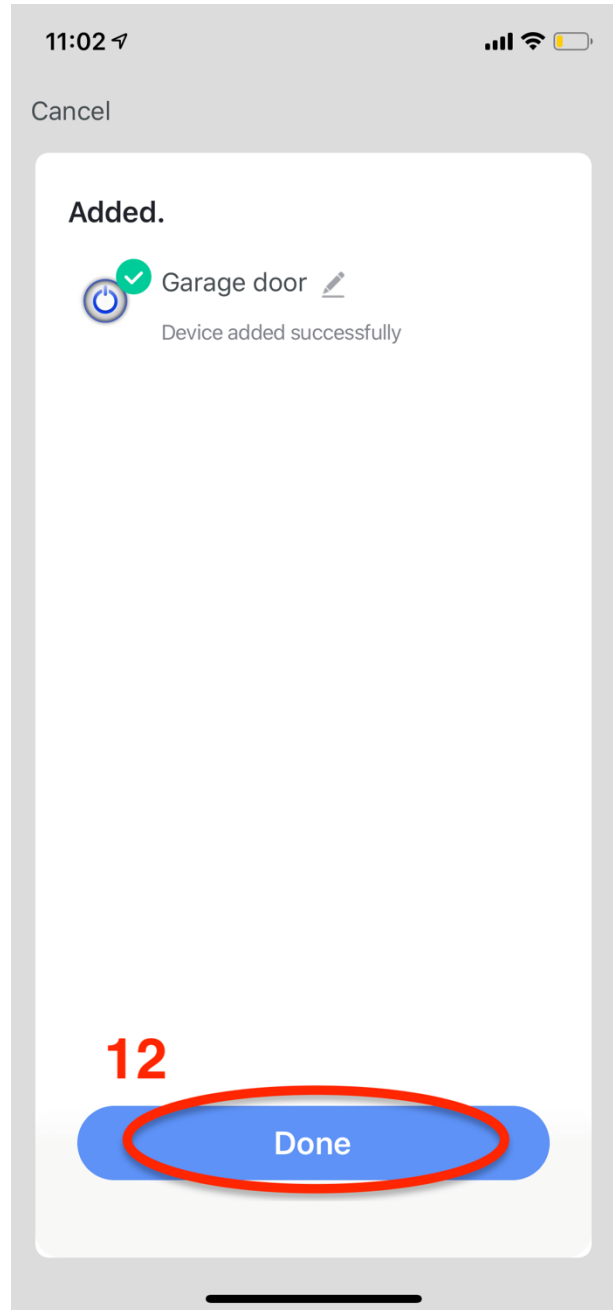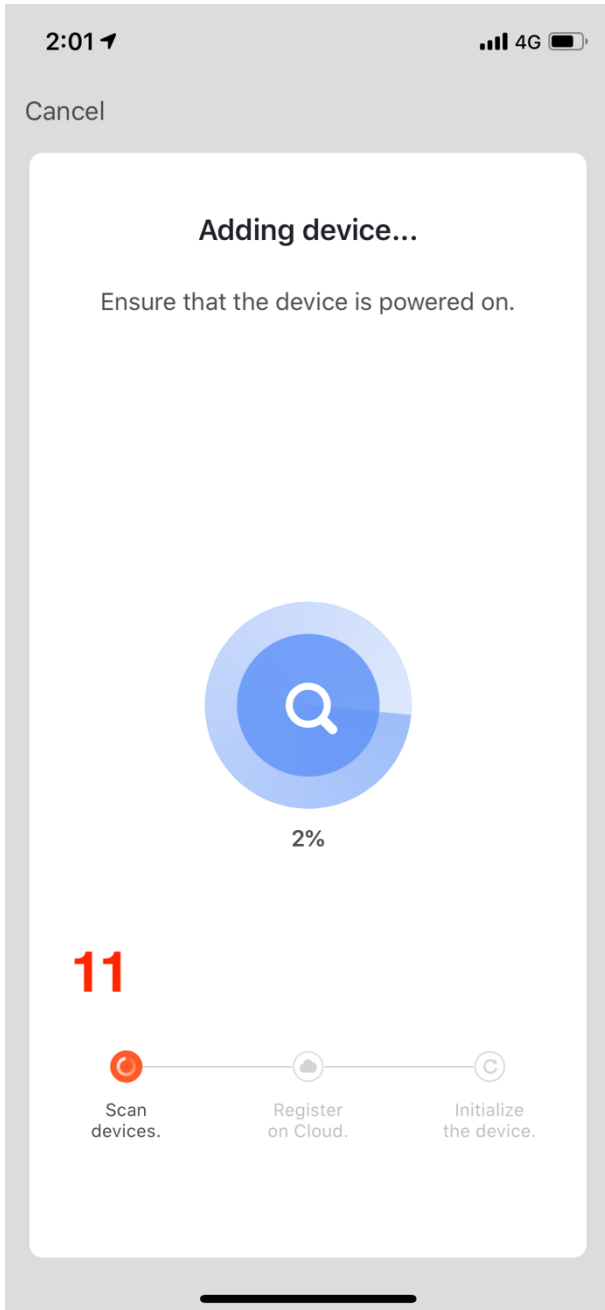

# Install the Controller Device to the garage opener


## 1. STEP 1 : Connect Controller to Opener

- Locate the 2 exposed wires coming out of the **Controller**.
- Insert the 2 exposed wires into the terminals on the back of your **Garage Door Opener**.

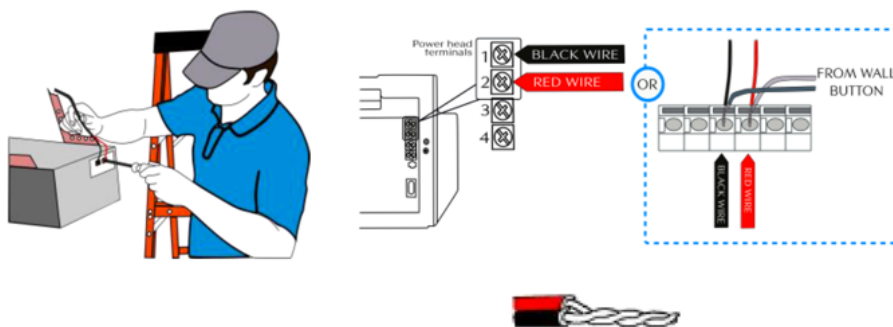

## 2. STEP 2 : Install the Sensor

- The sensor has 2 parts. Both sensor parts must be mounted parallel to each other, and they must be 3 – 15 mm apart, not touching.
- Mount the sensor with wire on the **garage frame wall**, and mount the sensor without wire on the **top of garage door**.

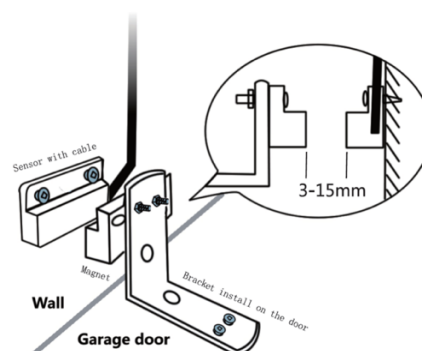

# Installation Overview

