


ComPact NSX100-250

MicroLogic 2.2/5.2/6.2 Trip Units
Déclencheurs MicroLogic 2.2/5.2/6.2
Unidades de control MicroLogic 2.2/5.2/6.2
MicroLogic 2.2/5.2/6.2 脱扣单元

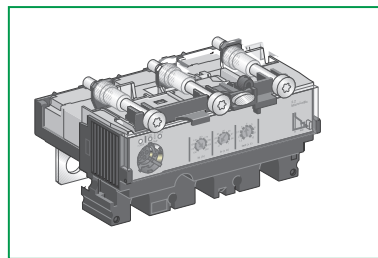

Schneider
Electric

GHD16045AA-11

www.se.com



PLEASE NOTE

- Electrical equipment should be installed, operated, serviced, and maintained only by qualified personnel.
- No responsibility is assumed by Schneider Electric for any consequences arising out of the use of this material.

REMARQUE IMPORTANTE

- L'installation, l'utilisation, la réparation et la maintenance des équipements électriques doivent être assurées uniquement par du personnel qualifié.
- Schneider Electric décline toute responsabilité quant aux conséquences de l'utilisation de ce matériel.

TENGA EN CUENTA



- La instalación, manejo, puesta en servicio y mantenimiento de equipos eléctricos deberán ser realizados sólo por personal cualificado.
- Schneider Electric no se hace responsable de ninguna de las consecuencias del uso de este material.

请注意



- 电气设备的安装、操作、维修和维护工作仅限于合格人员执行。
- Schneider Electric不承担由于使用本资料所引起的任何后果。









MicroLogic 2.2










MicroLogic 5.2 / 6.2





MicroLogic
5.2E / 6.2E 3P+N


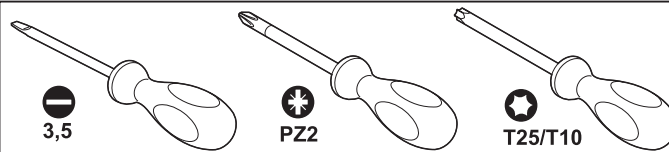



MicroLogic
2.2

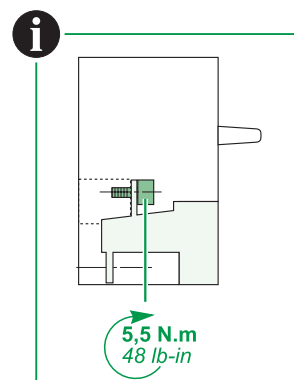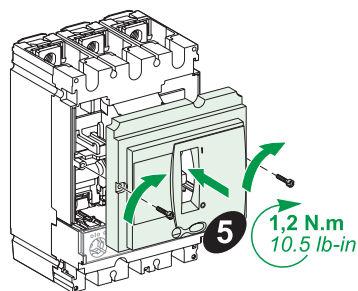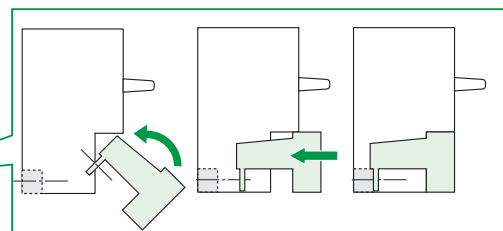






MicroLogic
5.2 / 6.2

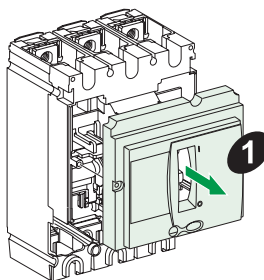


LV429451

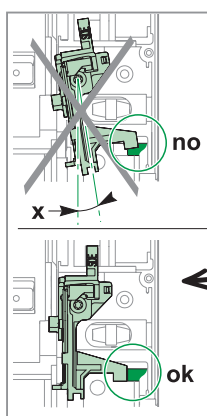

0,9 N.m
8 lb-in



MicroLogic 3P
5.2 / 6.2


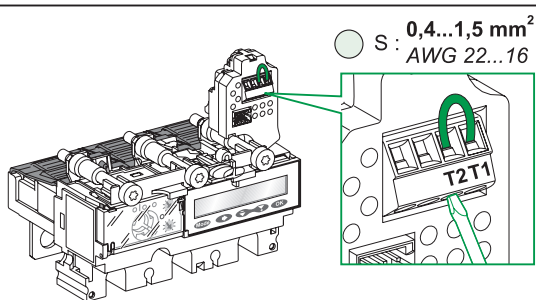


S: 0,4...1,5 mm²
AWG 22...16



with ENCT




LV429521 (25-100 A)
LV430563 (150-250 A)







MicroLogic
5.2E / 6.2E




Click!

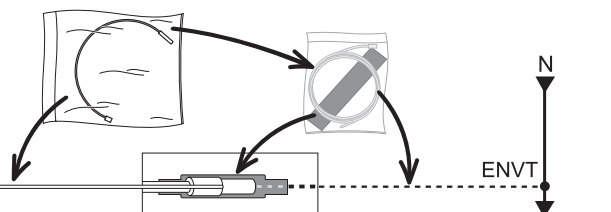


N
ENVT

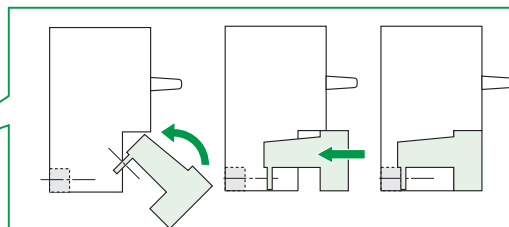


i




5,5 N.m
48 lb-in



5




6




1,2 N.m
10.5 lb-in

7




0





1


2




3






Click!
Tripped

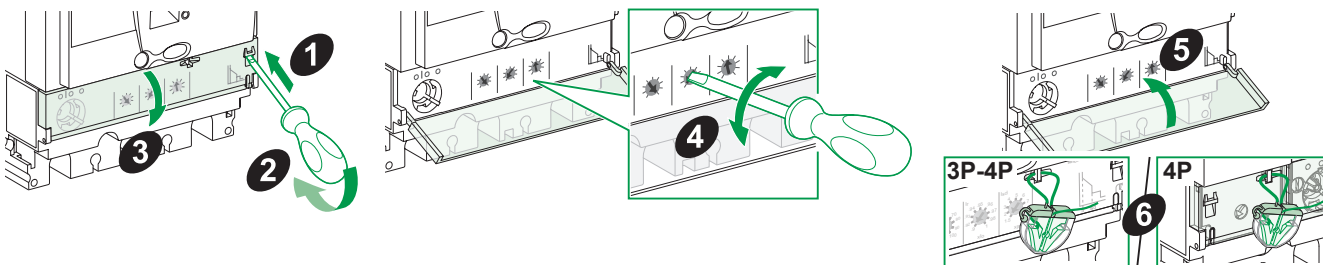


Ir, Isd

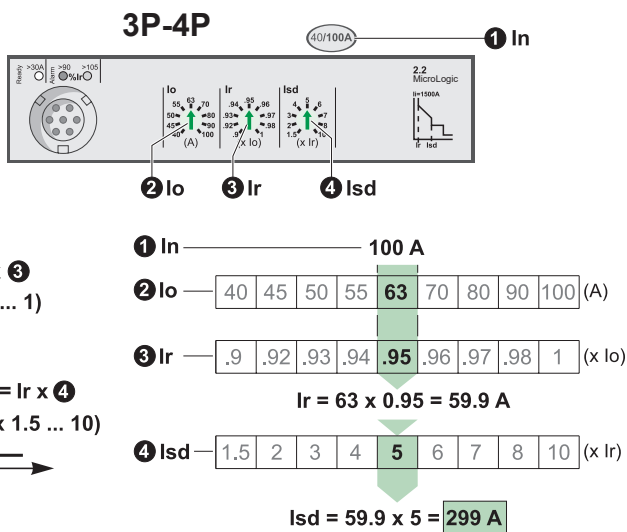


4P

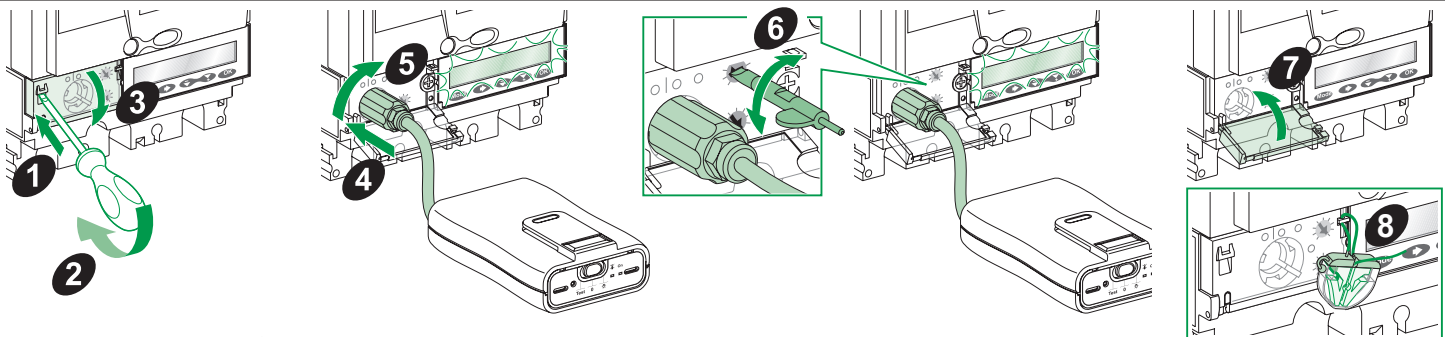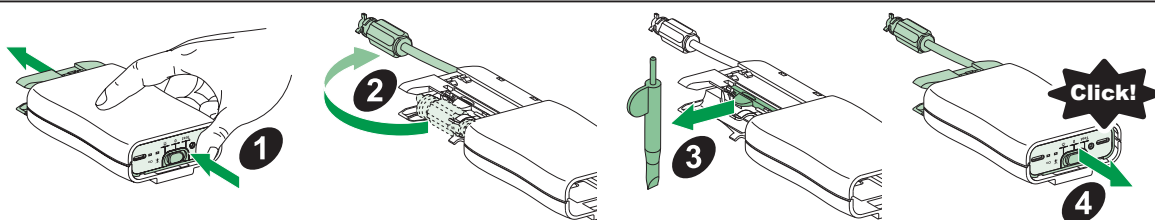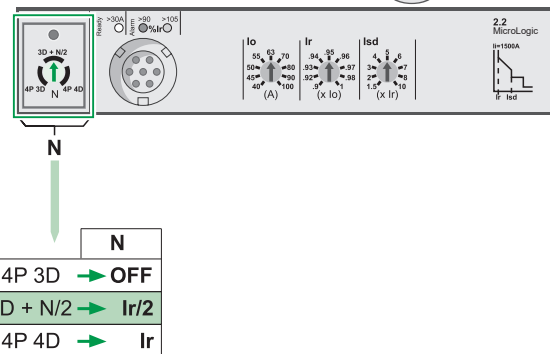

Ir, Isd

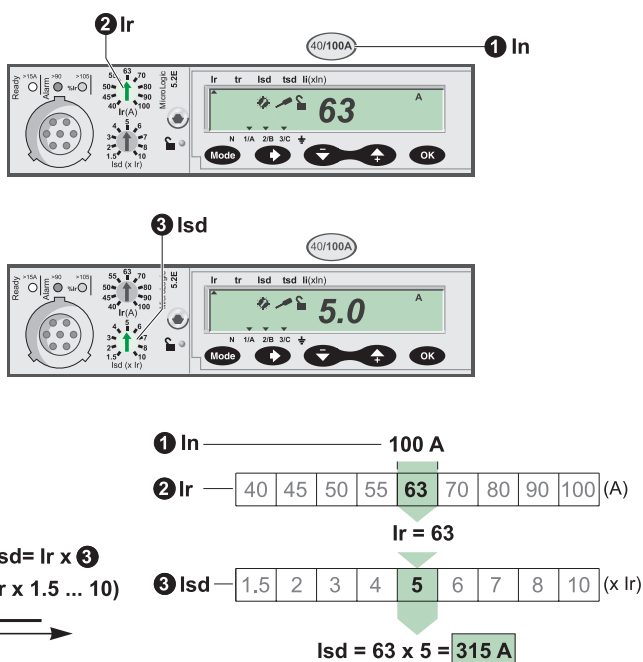

Ir, Ig













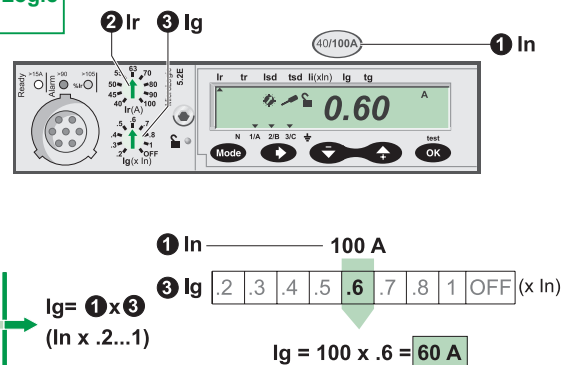




5.2 Ir, tr, lsd, tsd, li

6.2 Ir, tr, lsd, tsd li, lg, tg

tr @ 6 Ir

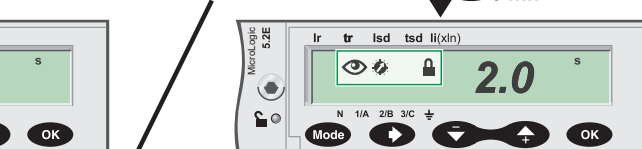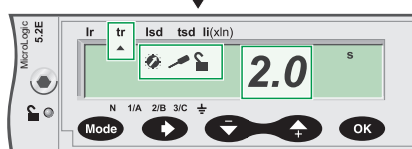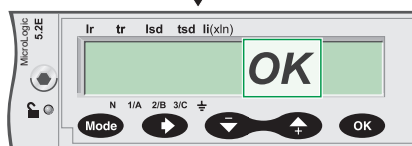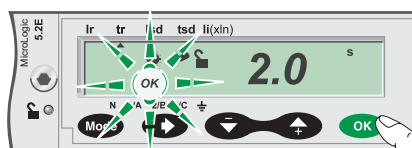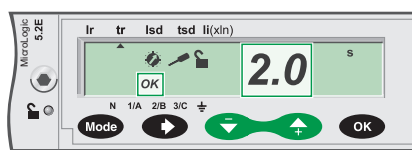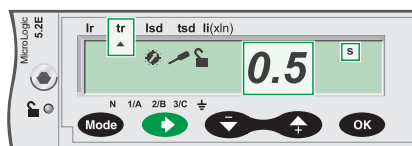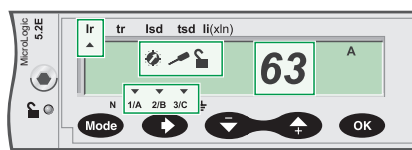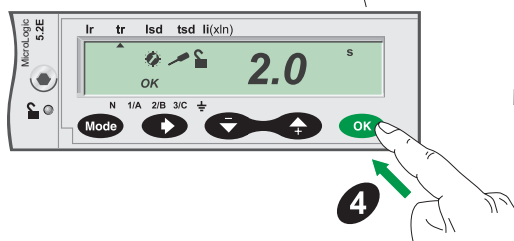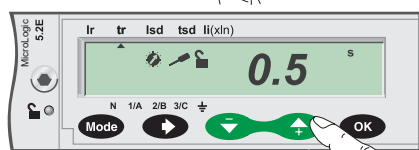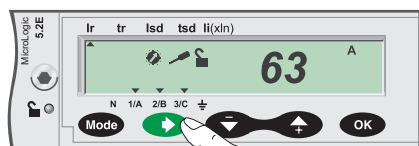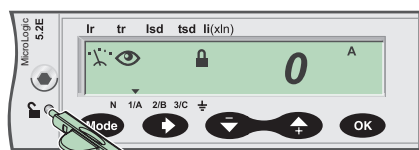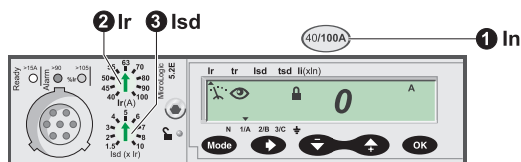

MicroLogic User Guide

DOCA0141EN
DOCA0141FR
DOCA0141ES
DOCA0141ZH

Schneider Electric Industries SAS

35 rue Joseph Monier

CS 30323

F - 92506 Rueil Malmaison Cedex

www.se.com



Printed on recycled paper.

Schneider Electric Limited

Stafford Park 5

Telford, TF3 3BL

United Kingdom

www.se.com/uk

