




WW-RGB30K25-3085S-DMX



### Available Models<sup>1</sup>

#### Single CCT White

- ☐ WW-30K20-3085S
- ☐ WW-40K20-3085S
- ☐ WW-50K20-3085S

#### RGBW (DMX512 Compatible)

- ☐ WW-RGB30K25-3085S-DMX
- ☐ WW-RGB40K25-3085S-DMX
- ☐ WW-RGB50K25-3085S-DMX

### Part Number Breakdown

Example: WW-RGB30K25-3085S-DMX

Series	CCT/Color	Wattage	Beam Angle	Finish	Control Type
WW [Wall Washer]	30K [3000K]	20 [20 W]	3085 [30° x 85°]	S [Silver Gray]	blank [none]
	40K [4000K]				
	50K [5000K]				
	RGB30K [RGB + 3000K]	25 [25 W]			DMX [DMX512]
	RGB40K [RGB + 4000K]				
	RGB50K [RGB + 5000K]				

### Description

Illuminate interior and exterior walls and surfaces using the linear LED wall washer. The wall washer is constructed for exterior applications with corrosion-resistant aluminum housing and a non-yellowing tempered glass lens. It is also IP66 waterproof. A 30° x 85° beam angle delivers a focused beam ideal for accenting walls and displays. The wall washer produces up to 1,600 lumens of light. Use a DMX controller with RGBW options to mix full RGB color, producing up to 16 million colors. Link up to 30 lights together using interconnect cables (sold separately).

### Features

- Durable aluminum construction with a tempered glass lens
- IP66 waterproof construction for exterior applications
- Plug-and-play operation
- Link up to 30 fixtures together

### Product Details

- Wall Washer Input Cable required for operation
- A controller is required for DMX operation (RGBW options)
- Aluminum housing and tempered glass lens
- IP66 waterproof rating
- 120-277 VAC

### Certifications and Compliances

- Certified by UL - UL 1598 (IFAM)



### Applications

- Accent Lighting
- Displays
- Wall Washing

### Warranty

- 5-year warranty



## Wall Wash Series

### Linear LED Wall Washer Specifications

#### Accessories

##### Single CCT White

- ☐ 6ft Input Cable - 3-Pin to 5-15P (WW-IC6)
- ☐ 6ft 3-Pin Interconnect Cable (WW-DC6)
- ☐ 1ft 3-Pin Interconnect Cable (WW-DC1)
- ☐ End Cap for 3-Pin Connector (WW-EC)

##### Mounting

- ☐ Extended Mounting Arm (WW-EA)
- ☐ Adjustable Mounting Bracket (WW-HBS)

##### RGBW

- ☐ 6ft Input Cable - 3-Pin to 5-15P (WW-DMXIC6-RGB)
- ☐ 15ft 6-Pin Interconnect Cable (WW-DMX-DC15)
- ☐ 6ft 6-Pin Interconnect Cable (WW-DMX-DC6)
- ☐ 1ft 6-Pin Interconnect Cable (WW-DMX-DC1)
- ☐ DMX Terminator for 6-Pin Connector (WW-TR)

#### Specifications

Model WW-		30K20-3085S	40K20-3085S	50K20-3085S
Lumens		1500	1600	1600
Color/CCT		3000K	4000K	5000K
Wattage		20W		
Current Draw	120 VAC	167mA		
	277 VAC	72mA		
I/O Connectors		3-Pin (waterproof)		

Model WW-		RGB30K25-3085S-DMX	RGB40K25-3085S-DMX	RGB50K25-3085S-DMX
Lumens (max)		1125	1125	1125
Color/CCT		RGB + 3000K	RGB + 4000K	RGB + 5000K
Wattage		25W		
Current	120 VAC	208mA		
Draw	277 VAC	90mA		
I/O Connectors		6-Pin (waterproof)		

Series	
Operating Voltage	120-277 VAC
CRI	80+
Beam Angle	30° x 85°
Distribution	NEMA 5 x 7
Surge Protection	4kV
IP Rating	IP66
Environmental Rating	Suitable for Wet Locations, Waterproof
Max Run	30
Rated Life (L70)	50000 hours
Ambient Operating Temperature	-40 to 50°C (-40 to 122°F)




## Wall Wash Series

### Linear LED Wall Washer Specifications

#### Dimensional Drawings

##### WW-xK20-3085S

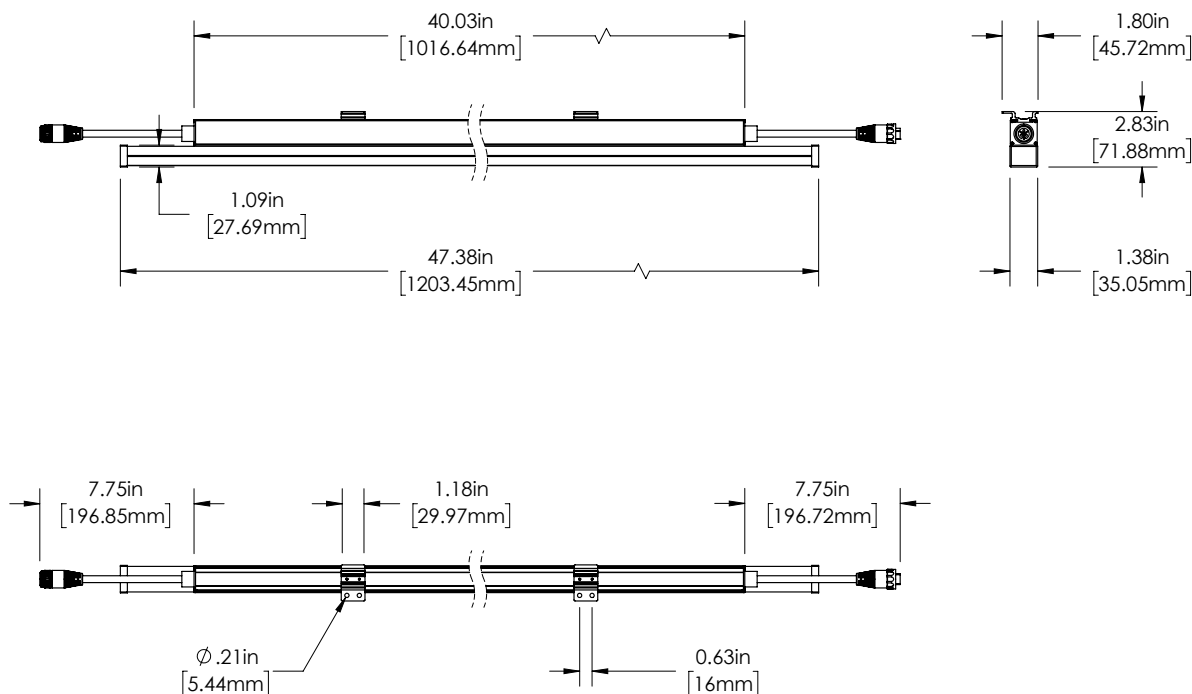

##### WW-RGB30K25-3085S-DMX

