



5" IC REMODEL HOUSING IC20R LEDT24

COMPATIBLE WITH
5RLD SERIES



Project: _____

Fixture Type: _____

Location: _____

Contact/Phone: _____

PRODUCT DESCRIPTION

IC Air-Loc® Remodel Housing for use with Juno retrofit LED trim modules • Energy efficient, sealed housing • IC Remodel Housing for remodel application where back side of ceiling is not accessible • Installs through an opening in the ceiling from below • Secured in place by factory installed remodel springs • Can be completely covered with insulation • Fully sealed housing stops exfiltration of air, reducing heating and air cooling costs without the use of additional gaskets.

PRODUCT SPECIFICATIONS

Electrical Connections Features non-screw base 120V plug-in connector • Compatible with Juno retrofit LED trim modules

Labels U.L. listed for U.S. and Canada for through-branch wiring and damp locations. • Meets high efficacy requirements of California T24.

Testing All reports are based on published industry procedures; field performance may differ from laboratory performance.



Specifications subject to change without notice.

INSTALLATION

Junction Box Pre-wired junction box, UL listed/CSA certified for through-branch wiring maximum 4 No. 12 AWG 90° C branch circuit conductors (2 in, 2 out) • Junction box provided with removable access plate, (5) 1/2" knockouts, (4) Non-metallic sheathed cable connectors and ground wire • Knockouts equipped with pryout slots.

Housing IC housing, .032" aluminum sealed for Air-Loc Compliance • Remodel springs accommodate up to 1 1/8" ceiling thickness.

DIMENSIONS

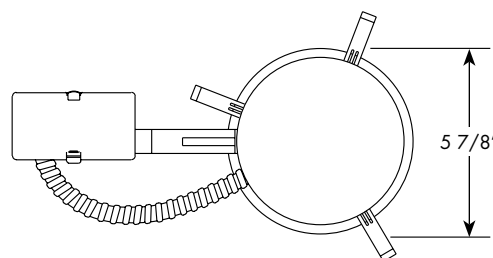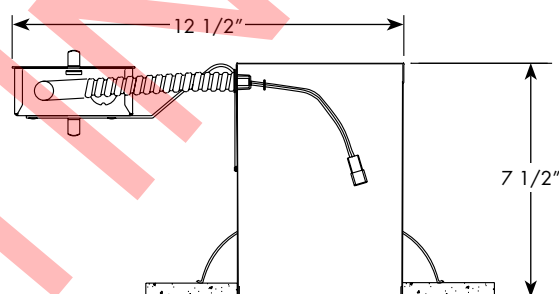

5 1/2" CEILING CUTOUT

PRODUCT CODES

Catalog Number	Input Voltage
IC20R LEDT24 5" Incandescent Remodel IC Housing, 4" Quick Connect Housing	120V

Housing and trim can be ordered together or separate, but will always ship separately.

COMPATIBLE LED MODULES

Catalog Number	
5RLD G4 07LM 27K 90CRI 120 FRPC WWH M6	5" Juno Retrofit Downlight, Generation 4, 700 Nominal Lumens, 2700K, 90+ CRI, 120V, Forward/Reverse Phase Cut, White with White Trim Ring
5RLD G4 07LM 30K 90CRI 120 FRPC WWH M6	5" Juno Retrofit Downlight, Generation 4, 700 Nominal Lumens, 3000K, 90+ CRI, 120V, Forward/Reverse Phase Cut, White with White Trim Ring

Housing and trim can be ordered together or separate, but will always ship separately.