



## 100 W power supply with 4 RJ45 outputs

Cat. No(s): 0 776 39L



0 776 39L




### 1. USE

100 W mobile power supply with RJ45 outputs. Allows up to 4 wireless chargers to be installed in furniture.  
Suitable for large installations with multiple chargers (4 wireless chargers maximum).  
Installation from one line in the panel (tap-off possible for 4 - 8 - 12 - 16 chargers) or by creating a power supply cord.

### 2. RANGE

| Description                                                                                                                    | Matte black |
|--------------------------------------------------------------------------------------------------------------------------------|-------------|
| 100 W mobile power supply to be wired up.<br>Supplied with 4 RJ45 cords (1 m) for charger distribution in a star or in series. | 0 776 39L   |

### 3. DIMENSIONS (mm)

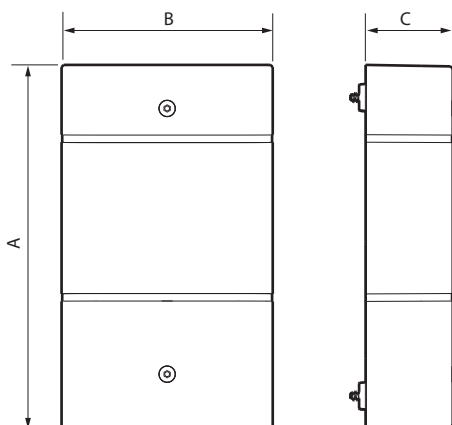


| A   | B  | C  |
|-----|----|----|
| 167 | 97 | 43 |

### 4. CONNECTION

Number of terminals: 4  
Type of terminal: cage  
Terminal capacity: 2 x 2.5 mm<sup>2</sup>  
Stripping length: 6 mm

### 4. CONNECTION (continued)

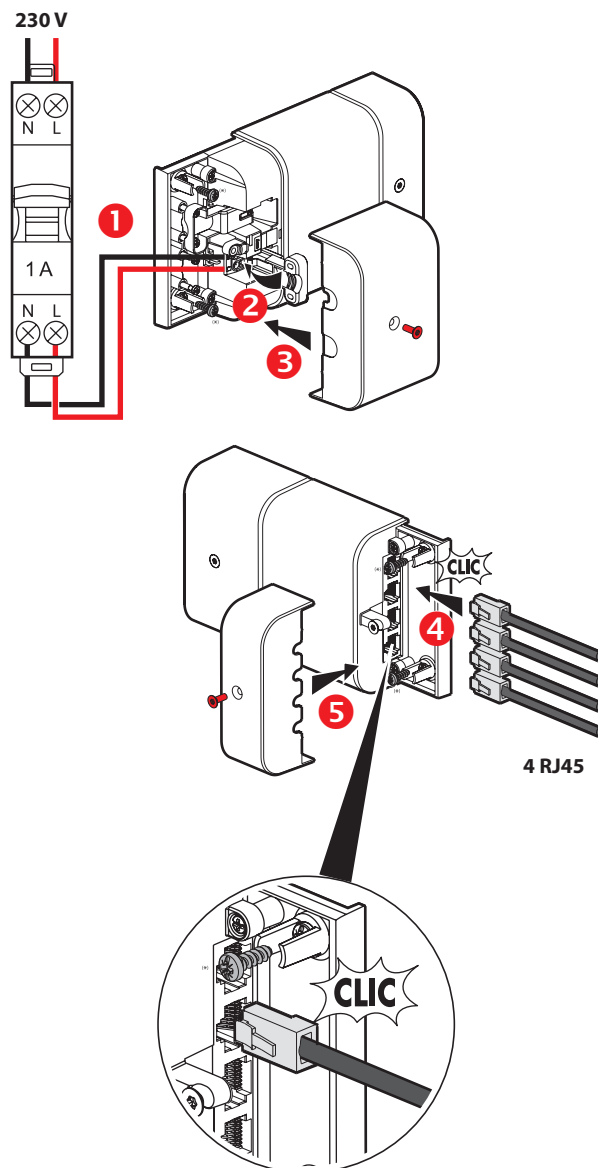

(\*) 4 mm Ø screws not supplied

## 5. TECHNICAL CHARACTERISTICS

### ■ 5.1 Mechanical characteristics

Protection against impacts: IK04

Protection against solid bodies/liquids: IP21

### ■ 5.2 Material characteristics

Matt black PC RAL 9017

Pins: brass

Halogen-free

UV-resistant

Self-extinguishing:

850°C/30 s for insulating components holding live parts in place.

650°C/30 s for other insulating components.

### ■ 5.3 Electrical characteristics

#### • 100 W power supply:

|                                      |                  |
|--------------------------------------|------------------|
| Nominal input voltage                | 110-240 V~       |
| Nominal input frequency              | 50/60 Hz         |
| Nominal input current                | 1.5 A            |
| Nominal output current               | 2.08 A           |
| Output power                         | 100.0 W          |
| Nominal output voltage               | 48.0 V=          |
| Maximum power consumption on standby | 0.15 W           |
| Average energy efficiency            | > 80%            |
| Protection class                     | II - Low voltage |

#### • RJ45 sockets:

"PoE" remote power supply compatible up to 100 W (IEEE 802.3af, IEEE 802.3at, IEEE 802.3bt)

### ■ 5.4 Climate characteristics

Usage temperature: 0°C to +40°C

Storage temperature: -20°C to +70°C

## 6. CARE

Surface cleaning with a cloth.

Do not use acetone, tar-removing cleaning agents or trichloroethylene.

**Caution:** Always test before using special cleaning products.

## 7. STANDARDS AND APPROVALS

Compliant with installation and manufacturing standards.

See e-catalogue.