



ViVOpay™ VP5300 User Manual



80152500-001 Rev. X

24 June 2025

ID TECH
10721 Walker Street, Cypress, CA 90630
Voice: (714) 761-6368 Fax: (714) 761-8880

Copyright© 2025 International Technologies and Systems Corporation. All rights reserved.

ID TECH
10721 Walker Street
Cypress, CA 90630 USA

This document, as well as the hardware and software it describes, is furnished under license and may only be used in accordance with the terms of such license. The content of this paper is furnished for informational use, subject to change without notice, and not to be construed as a commitment by ID TECH. ID TECH assumes no responsibility or liability for any errors or inaccuracies that may appear in this document.

Except as permitted by such license, no part of this publication may be reproduced or transmitted by electronic, mechanical, recorded, or any other method, or translated into another language or language form without the express written consent of ID TECH. ID TECH is a registered trademark of International Technologies and Systems Corporation. ViVOpay and Value through Innovation are trademarks of International Technologies and Systems Corporation. Other trademarks are the property of the respective owner.

Warranty Disclaimer: The services and hardware are provided "as is" and "as-available," and the use of these services and hardware are at the user's own risk. ID TECH does not make, and hereby disclaims, any and all other express or implied warranties, including, but not limited to warranties of merchantability, title, fitness for a particular purpose, and any warranties arising from any course of dealing, usage, or trade practice. ID TECH does not warrant that the services or hardware will be uninterrupted, error-free, or completely secure.

Revision History

Date	Revision	Changes	Author
04/07/2021	P	Reimplemented Revision History log Updated Current Draw table with L80 specs	CB
06/30/2021		Added section about L100 removal detection sensor	CB
09/28/2022	R	Added North American Hazardous Location Approval section Updated Power Consumption statistics Added enclosure requirement information to Installation Notes	CB
08/14/2023	S	Updated external links.	CB
07/02/2024	T	Added Avoiding Device Tamper Issues section.	CB
09/27/2024	U	Updated Diagnostic LED Status table.	CB
02/13/2025	W	Updated mounting diagrams.	CB
06/24/2025	X	Updated Decommissioning PCI-Certified Devices section.	CB

Table of Contents

1. OVERVIEW	6
1.1. Features	6
1.2. VP5300: Approvals	8
2. VP5300 SPECIFICATIONS	9
3. VP5300 ELECTRICAL REQUIREMENTS	11
3.1. Power Consumption	11
3.2. Current Draw	11
3.3. Low-Power Modes	12
4. VP5300 3-VIEW DRAWING	13
5. NFC ANTENNA 3-VIEW	14
6. VP5300 INSTALLATION	15
6.1. Parts List	15
6.2. Installing the Reader	15
6.2.1. VP5300 Mounting Assembly	16
6.2.2. Reader Drainage Holes	16
6.3. Mounting the VP5300 External NFC Antenna	17
6.3.1. VP5300 External NFC Antenna Mounting Assembly	17
6.3.2. External NFC Antenna Mounting Instructions	18
6.3.3. Recommended Mounting Locations	21
6.3.4. Flush-Mounting the Antenna	21
6.4. Attaching the Cables from the Antenna to the VP5300	22
6.5. Connecting to Power	22
6.6. Connecting to the Host Port	23
6.7. VP5300 External Cable Pin Assignments: RS-232	23
6.8. VP5300 External Cable Pin Assignments: USB	23
6.9. Engaging the Removal Detection Switch for Testing	24
6.10. Installation Notes	25
6.11. 24-Hour Device Reboot	25
7. LED MANAGEMENT	26
7.1. Diagnostic LED Status	27
7.2. L100 and L80 Diagnostic Messages	29
7.3. Tamper and Failed Self-Check Indicators	30
7.4. Avoiding Device Tamper Issues	31
7.4.1. Device Handling Best Practices	31
7.4.2. ID TECH Support	31
8. USING THE VP5300 TO MAKE A CONTACTLESS PURCHASE	32
8.1. Presenting Proximity Cards or NFC Phones	32
9. PAIRING WITH PIN PAD	33
9.1. Setting up the L100 or L80	33
9.2. Setting up the VP5300	34
9.3. Pair the Devices	36
9.3.1. Enabling SmartPIN L100 Devices	38
9.3.2. Enabling SmartPIN L80 Devices	39
9.1. L100 Removal Detection and Paired Readers	39
10. IMPLEMENTING WHITELISTS	40

11. RF INTERFERENCE	40
12. UPDATING VP5300 FIRMWARE.....	42
13. DECOMMISSIONING PCI-CERTIFIED DEVICES	44
14. TROUBLESHOOTING	44
14.1. A Note About Encryption	44
16. FCC REGULATORY COMPLIANCE NOTICES CLASS B EQUIPMENT	46
17. NORTH AMERICAN HAZARDOUS LOCATION APPROVAL	46
18. IC COMPLIANCE WARNING.....	46
19. CAUTIONS AND WARNINGS	48

1. Overview

ID TECH's VP5300 is a compact, ruggedized insert-style credit card reader designed to support MSR (magstripe) and contact EMV, plus contactless EMV (when the device is mated with the VP5300's NFC antenna).

The VP5300 is designed to deliver MSR, EMV, and NFC (contactless) payment acceptance with SRED security and reliability in unattended payment scenarios, such as Parking, Fueling, ATM, Ticketing, and Payment Kiosks (among others). When paired with the ID TECH SmartPIN L100 PCI-certified PIN pad and the optional NFC antenna, the VP5300 accepts all payment options from Chip-PIN to NFC/mobile wallet solutions.

The VP5300 leads the industry in low power consumption and ruggedness, with its metal bezel and IK10 and IP65 ratings to ensure long life in demanding conditions. The VP5300 is certified to the latest payment standards of EMV (Level 1 and Level 2) and PCI (5.x) and offers easy integration of payments into self-serve kiosk and unattended environments.



VP5300



NFC Antenna



SmartPIN L100

1.1. Features

The VP5300 supports the following features:

- Contactless: ISO/IEC 14443 Type A and B
- ISO 18092 (peer-to-peer communication)
- Can pair with an external PIN pad (SmartPIN L100), as well as an application controller and optional contactless antenna, all powered off one connection
- PCI-PTS 5.x certification with SRED
- Tamper responsive (with automatic zeroization of keys in the event of tamper)
- MSR reads up to 3 tracks of data (Bi-Directional), with JIS-I and JIS-II support
- ICC reader with landing contact
- Contact and Contactless EMV Level 1 certified
 - Contact EMV Level 2 certified, using ID TECH's proven Common Kernel
 - All major Contactless kernels supported
- State-of-the-art encryption support
 - Triple DES
 - AES
 - TransArmor RSA

- Support for DUKPT key management of data and/or MAC keys
- TR34 Remote Key Injection Protocol
- Mechanical front switch
- 2 User-accessible SAMs (**Note:** the VP5300 SAMs only support a 3V power supply)
- Metallic bezel meets IK 10 impact rating
- Dedicated communication (USB/RS232) and Ethernet port
- Able to use a 9-24VDC power source support (up to 45V current spike protection)
- LAN with network function 2 colored LEDs for link state and speed indication
- Low power Sleep Mode and Stop Mode
- Audio feedback for MSR, contact EMV, and contactless transactions
- RoHS 2, and REACH compliance
- 1-year manufacturer's warranty
- Mobile wallets:
 - Apple Pay
 - Apple VAS
 - Android Pay
 - Google Pay Smart Tap 2.1

This document assumes that users are familiar with their host systems and all related functions.

1.2. VP5300: Approvals

Item	Regulation & Class
CE	EN55032/EN55035, Class- B
FCC	Part 15, Class-B
RoHS	Compliant
UL	Compliance with UL regulation
REACH	Compliance with REACH regulation
USB IF	Compliance with USB IF regulation
IC	Compliance with IC regulation
EMV	Contact L1 & L2 / Contactless L1
PCI	PCI PTS 5.X Certified
Contactless Technology	Specification Compliance
American Express	American Express® ExpressPay 3.1
Discover	Discover® DPAS 1.0 Zip 3.1.2
MasterCard	MasterCard® MChip 3.1.1
Visa	Visa VCPS 2.2
Interac	Interac 1.5d
UPI	qUICS 1.02 v1.1
JCB	JCB (pending)

2. VP5300 Specifications

Physical	
VP5300 Dimensions	136.2 mm from back of mounting surface x 102.8 mm flange width x 72.6 mm flange height (LxWxH)
NFC Antenna Bezel Dimensions	65mm x 54mm x 14.5mm (LxWxH), plus 15.5mm-deep M4 studs protruding from the back of the unit
Structure Material	Plastic, PC UL 94V-0
Housing Color	Black
Weight	0.7 kg
Bezel	Metallic, stainless steel look Water drain feature allows liquids to drain
Cable management	Cables and connectors should be recessed from the case's rear surface and facing backwards
Electrical	
Voltage Requirement	12V DC (minimum) recommended to 24V maximum
Environmental	
Operating Temperature	-25° C to 65° C (-13° F to 158° F), max change of 10° C per hour
Storage Temperature	-40° C to 80° C (-40° F to 185° F)
Operating Humidity	10% to 95% non-condensing
Storage Humidity	10% to 95% non-condensing, duration 3 months
Transit Humidity	5% to 95% non-condensing, duration 1 week
Operating Environment	Water resistant for indoor and outdoor use
IK Rating	IK 10
IP Rating	IP 65
ESD¹ (Device)	Contact ±6kV
	Air discharge ±12kV
ESD (Mag head only)	Contact ±6kV
	Air discharge ±12kV
Durability and Reliability	
Magnetic Head	1,000,000 swipes minimum
Rail	1,000,000 swipes minimum
Smartcard connector	1,000,000 cycles minimum
Impact Resistance	Pass IK 10 testing
Ingress Resistance	Pass IP 65 rating
NFC Antenna Hardware Specifications	
MTBF	466,000 hours
Receiver Subcarrier Data	ISO 14443-2 Type A: Modified Manchester ISO 14443-2 Type

¹ **Note:** Cables and connectors must be fully isolated with insulating material to prevent ESD discharge.

	B: NRZ-L, BPSK ISO 18092 ISO 21481 (PCD & NFC)
Typical Read Range	4-6 cm (1.5 to 2.3 inches)
NFC Antenna Electrical Specifications	
Reader Input Voltage	Supplied by the VP5300 <500mA (@9VDCIN)
Working Current Rated power	<3.8W
Maximum field strength	2.6 dBuA/m at 3 m

3. VP5300 Electrical Requirements

Voltage requirement: 7.5VDC (minimum) to 45 VDC, 4.5 W maximum (9VDC recommended).

3.1. Power Consumption

- Stop Mode (without NFC) $\leq 85\mu\text{A}$
- Stop Mode (with NFC) $\leq 85\mu\text{A}$

3.2. Current Draw

VP5300 OPERATING MODE:	12VDC	9VDC
Normal	83mA	115mA
Normal+MSR	86mA	120mA
Normal+ContactLess	190mA	264mA
Normal+Contact EMV	85mA	125mA
Normal+Lan Connection	120mA	165mA
Normal+L100	150mA	200mA
Normal+Contactless+L100	245mA	357mA
Normal+Contactless+L100+ Lan connection	285mA	410mA
Normal+Contactless+L100+Lan connection +BuzzerX2	325mA	470mA
Normal+L80	123mA	156mA
Normal+Contactless+L80	231mA	305mA
Normal+Contactless+L80+ Lan connection	254mA	334mA
Normal+Contactless+L80+Lan connection +BuzzerX2	275mA	352mA
Sleep Mode, NFC off	47 μA	88 μA
Sleep Mode, NFC on	490 μA	500 μA
Stop Mode, NFC off	42 μA	83 μA
Stop Mode, NFC on	560 μA	490 μA


Battery: The unit contains a small lithium battery to power the Real Time Clock and certain anti-tamper features. This battery has a shelf life of five years. The battery is not user-replaceable. Do not attempt to open the VP5300 for any reason; this will trigger the anti-tamper features, causing the unit to become inoperable. If battery replacement is required, return the VP5300 to ID TECH. Contact support@idtechproducts.com for more information.

3.3. Low-Power Modes

The VP5300 has two low-power modes: Sleep Mode and Stop Mode. Power management is at the discretion of the application developer and set with firmware command F0-03 (which is described in the *NEO Interface Developers Guide*, available on request). Note that using the F0-03 command to control the unit's power state is limited to RS-232 operation and is not available in USB mode. Also note that when the VP5300 has been put in Stop Mode with the F0-03 command, waking up the unit causes a warm reboot, which can take 5 seconds or more. Waking the unit up from Sleep Mode does not cause a reboot.


The VP5300 can be awakened in RS-232 mode from Sleep Mode or Stop Mode by sending the device any command. In USB mode, establishing the USB connection wakes up the device.

4. VP5300 3-View Drawing

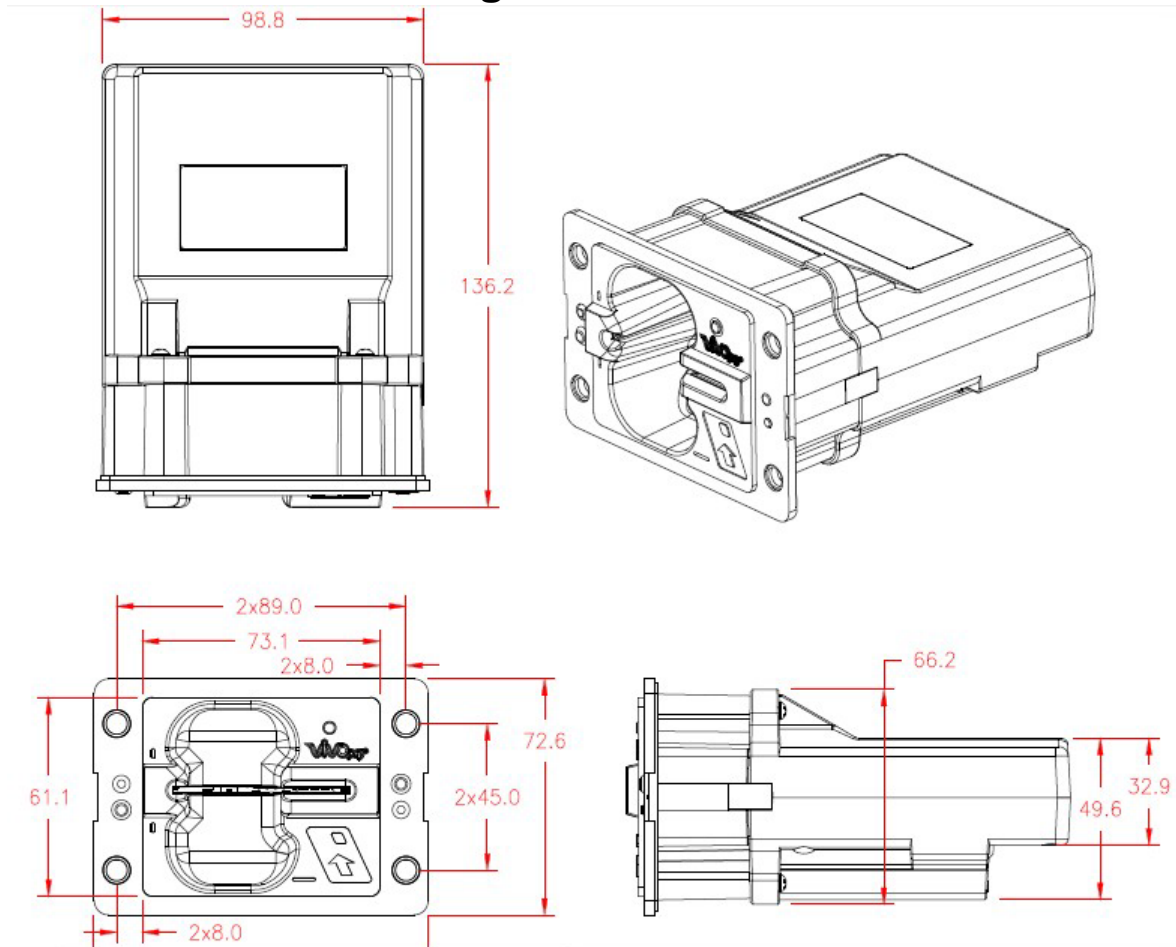

5. NFC Antenna 3-View

Antenna mounting details:

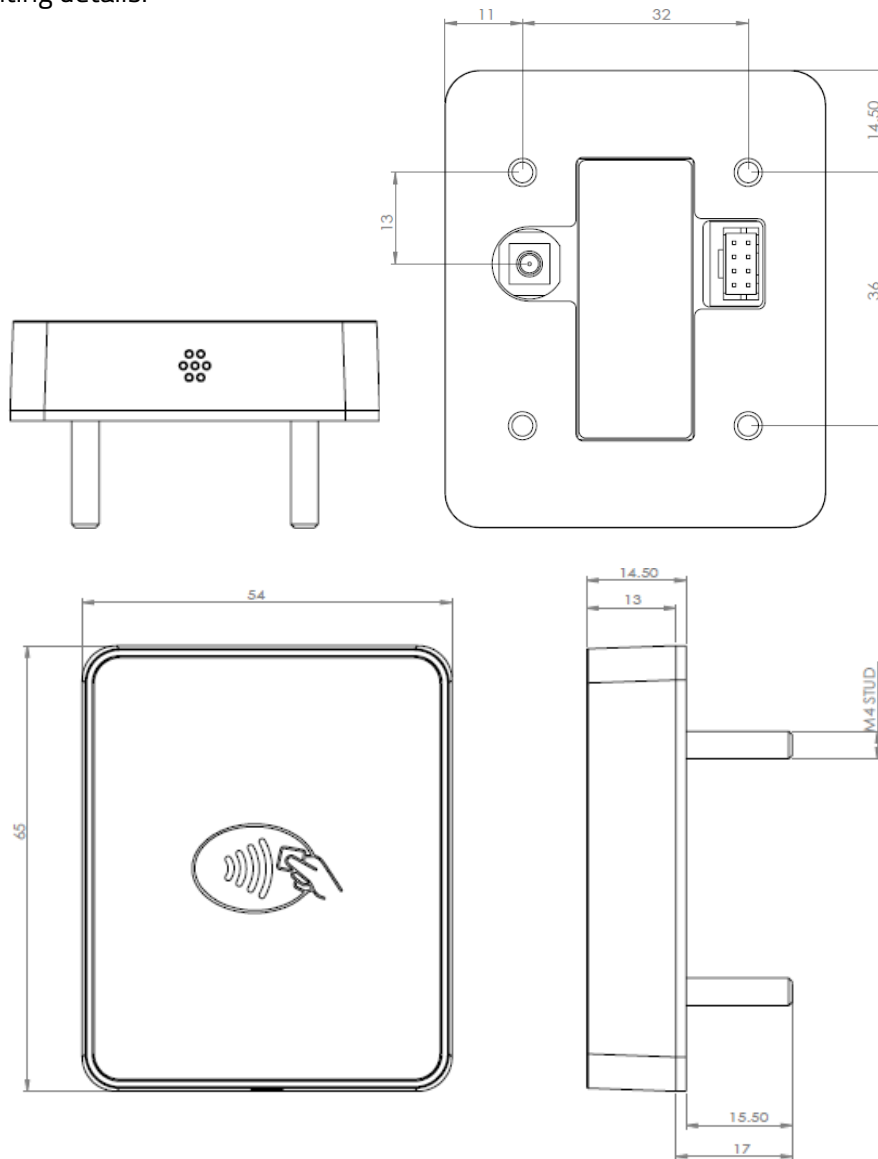

6. VP5300 Installation

This section provides information on how to install the VP5300 in an enclosure.

Note that the unit may be installed edgewise (vertically), or in a horizontal manner. It can also be bolted to a surface, or custom-mounted flush with a surface. In the latter case, be sure to allow a 3mm (minimum) cutout clearance around the edge of the metal face flange (assuming the enclosure is metallic), to maintain good NFC performance. Do not tightly flush-mount the unit to a metal enclosure. Test NFC performance thoroughly to be sure no interference or signal attenuation occurs.

6.1. Parts List

Make sure you have the following items before you start evaluation and testing:

- VP5300 Demo unit
- L100 or L80 Demo unit
- NFC Antenna
- USB Cable
- RS232 Cable
- VP5300-L100 or -L80 cable
- Power plug with EUR, AUS, UK
- Mounting Brackets (801592239-001) x3 - 1 for the VP5300, 2 for the L100 or L80


6.2. Installing the Reader

Refer to the VP5300 3-view drawing. Verify that power cords can physically reach the unit. Then proceed to:

- Locate, mark, and drill holes for the four main mounting points of the unit, spaced 89 mm apart lengthwise (on center), and spaced 45 mm apart (on center) along the short axis. Use a #12 drill.
- Secure the unit to the enclosure with bolts or screws of appropriate depth. Note that the anti-tamper nubs, located behind the mounting gasket on the unit's right side (when viewed head-on; the side nearest the molded-in ViVOpay logo), must be depressed when the unit is mounted. Ensure that the gasket is compressed to a degree necessary to ensure anti-tamper nub depression (and to protect against unnecessary moisture ingress).

6.2.1. VP5300 Mounting Assembly

The diagram below shows the mounting assembly for the VP5300 reader.

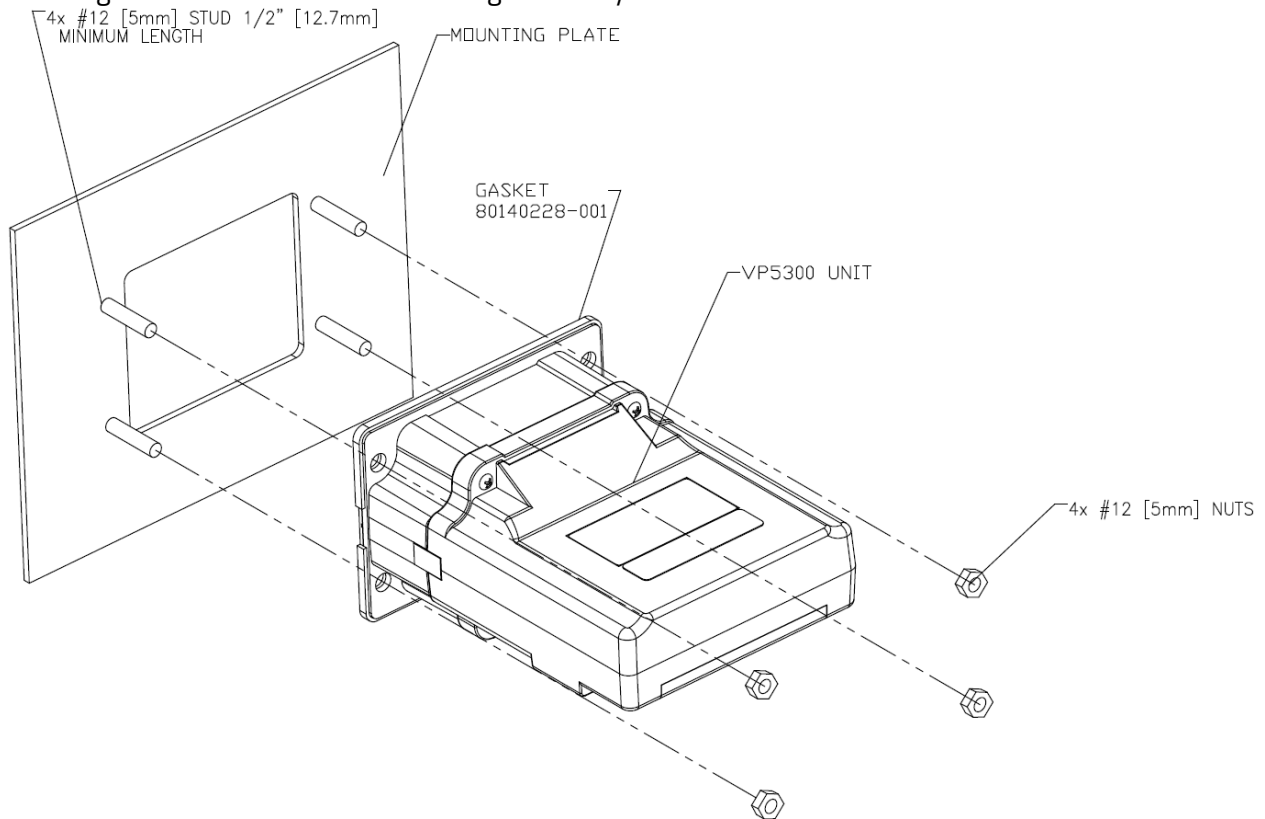

6.2.2. Reader Drainage Holes

VP5300 readers have three drainage holes, shown below. When mounting, make sure to keep the drainage holes exposed to allow liquid to drain from the reader.



6.3. Mounting the VP5300 External NFC Antenna


Refer to the VP5300 Antenna 3-view drawing. If you are using the VP5300's contactless capability, you will need to install the optional NFC antenna and its cabling.

Use the following instructions to mount the antenna on the exterior of a kiosk.

Note: Product installers should experiment with and verify the orientation of the NFC Antenna before marking and drilling mounting holes, ensuring that the antenna is far enough away from the main body of the VP5300 so that insertion of a "tap card" in the unit's contact-EMV slot does not trigger an unwanted NFC interaction.

6.3.1. VP5300 External NFC Antenna Mounting Assembly


The diagram below shows the mounting assembly for the VP5300 external NFC antenna.

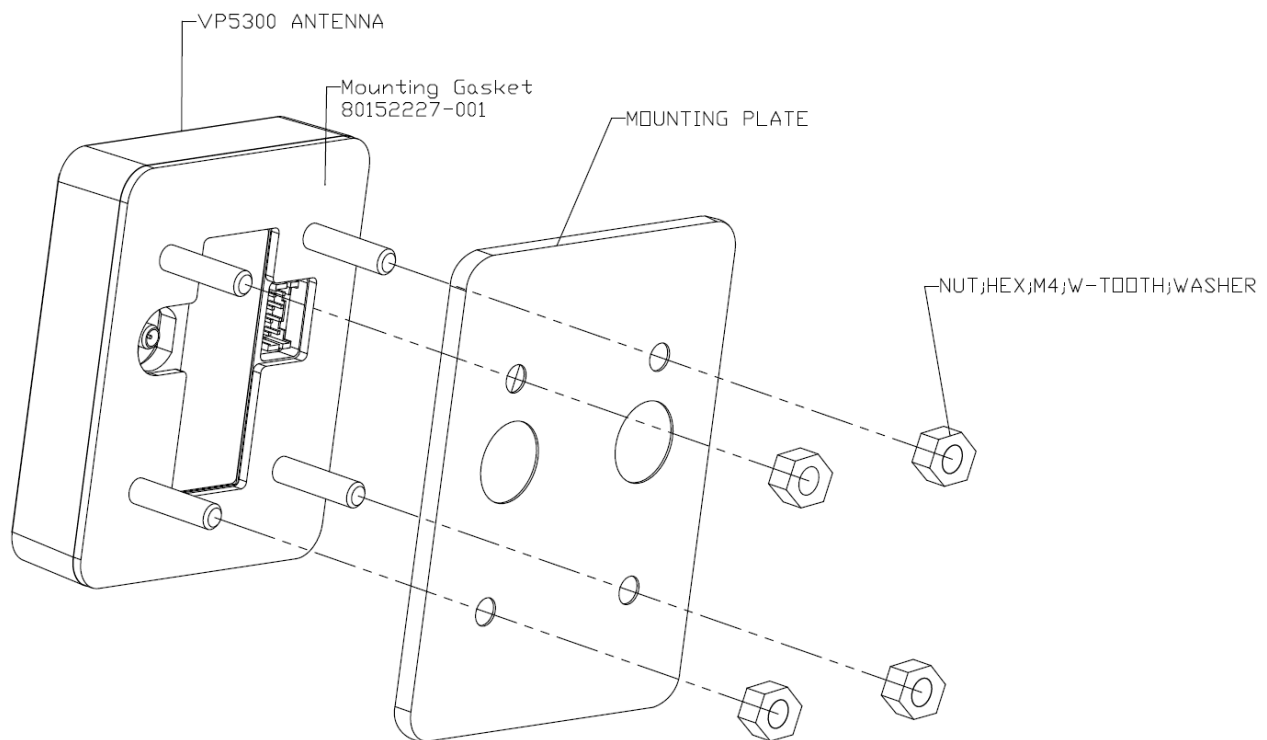

6.3.2. External NFC Antenna Mounting Instructions

Important: Mark holes in such a way as to ensure that the NFC Antenna is oriented with the LEDs at the top.

1. Locate and mark the four 4.5 mm (3/16 inch) mounting holes.

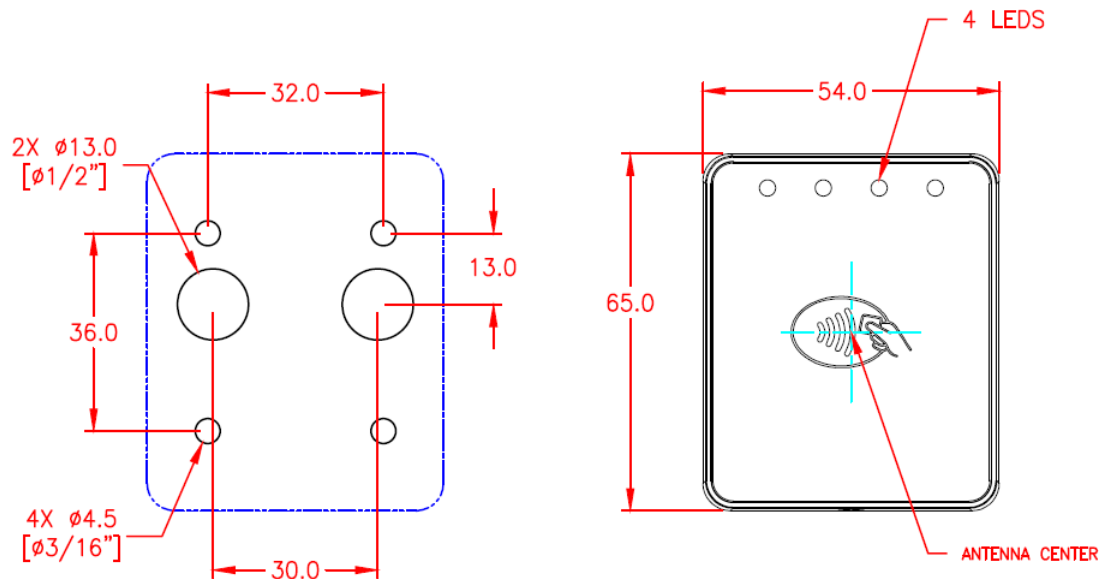


RECOMMENDED CUTOUT FOR MOUNTING

2. Locate and mark two 14.0 mm (0.551 inches) access holes (used for connecting the antenna barrel connector and the LED power and data cable to the unit. Notice that these holes are located off-center toward the top of the unit.
3. Drill the four 4.5 mm (3/16 inch) mounting holes.
4. Drill the two access holes (14.0 mm, 0.551 inch) holes using a 35/64 drill bit.



5. Use the nuts that are supplied with the unit (in plastic bag).


6. Route the end of the cable (80152235-001) with the RJ-45 connector through the matching 14.0 mm (0.551 inch) hole into the kiosk. Make sure that the front of the antenna will be properly oriented (not upside down) on the kiosk before inserting the four screws into the mounting holes.

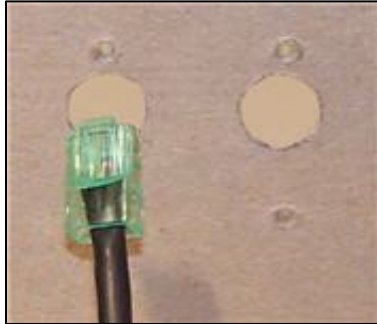

7. Align the four threaded posts with their mounting holes and attach the NFC Antenna to the mounting surface. Make sure that the cable is not pinched, rubbing, or binding.



8. Use the four nuts to secure the NFC Antenna to the surface of the kiosk. Make sure to tighten the nuts securely so that the antenna does not move freely on the outside surface of the kiosk.

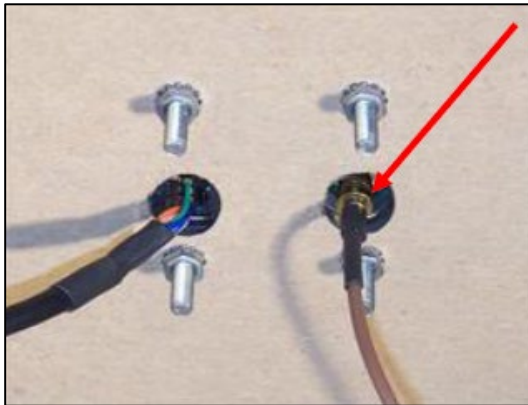


Note: Tighten the nuts to 5-7 in/lbs. for a good weather-tight seal.

9. Attach the end of the cable with the SMB barrel connector through the right 14.0 mm (0.551 inch) hole and secure it to its socket on the back of the antenna. The SMB connector pushes onto the socket.
10. Attach the RJ-45 connector (male) coming from the NFC Antenna to the RJ-45 receptacle (female) on the 80152236-001 cable



6.3.3. Recommended Mounting Locations

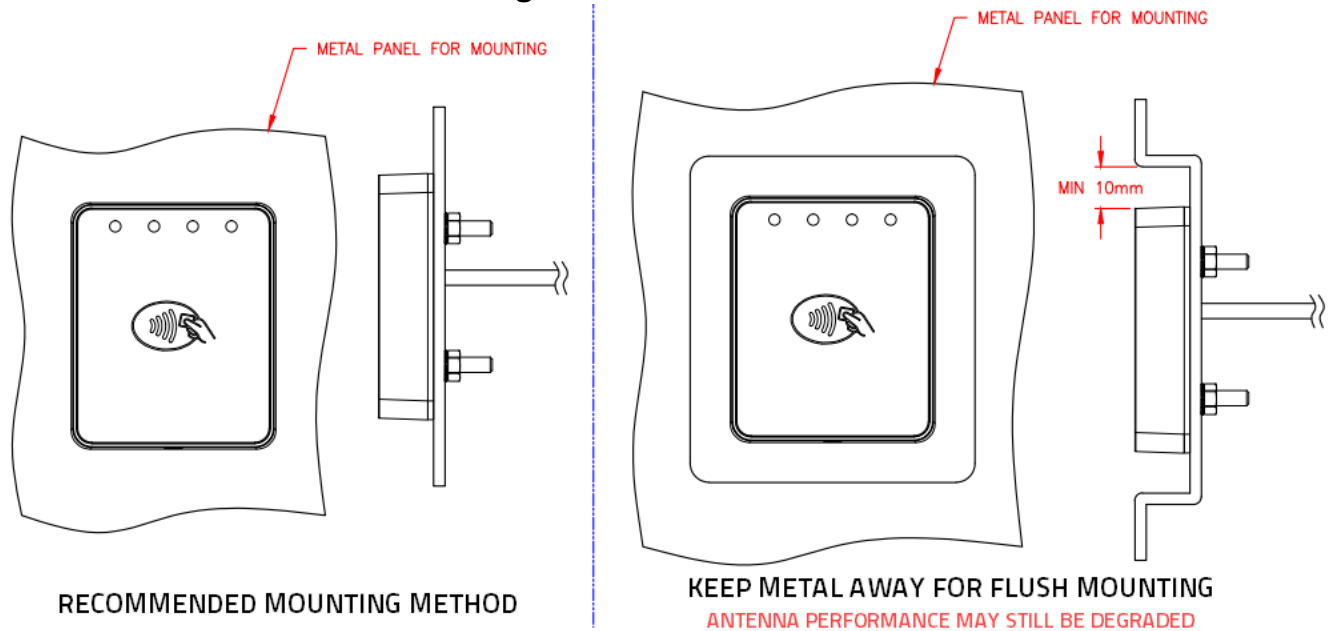

Note: The 10mm gap described in the above diagram can be either an air gap or flush plastic material; the restriction is that metal needs to be more than 10mm away from the antenna.

6.3.4. Flush-Mounting the Antenna


The antenna's RF field is sensitive to the proximity of metal. There are three options when flush-mounting the antenna in a metal surface or bezel:

1. Mount with the RF emitting surface of the antenna at least 1cm forward of any metal.
 2. Mount with the RF emitting surface of the antenna at least 1cm behind any metal.
- Note:** this reduces the antenna's effective range.
3. Mount flush with the metal but allow a minimum of 1cm spacing between the antenna and the metal.

In all three cases, **make sure to test the antenna** mounting before engaging in a production-ready installation.

6.4. Attaching the Cables from the Antenna to the VP5300


1. Attach the SMB barrel end of the cable (80152236-001) from the antenna to the SMB post of the VP5300. The connector slides on.
2. Attach the 8-pin end of the cable (80152236-001) from the antenna to the VP5300, where the receptacle sits next to the RJ-45 (Ethernet) receptacle.

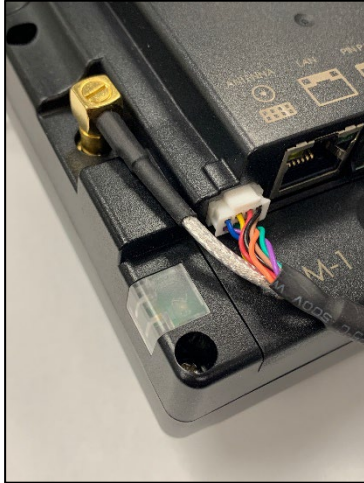

6.5. Connecting to Power

The VP5300 can be powered through the RS-232 communications cable or the USB Y-connector. In either case, the VP5300 requires the +9VDC power supply to operate.

1. Connect the +9VDC power supply (P/N 140-2035-00) to the barrel receptacle on the RS-232 cable or the barrel part of the Y-cable for USB by sliding the power supply barrel into the receiving recess.

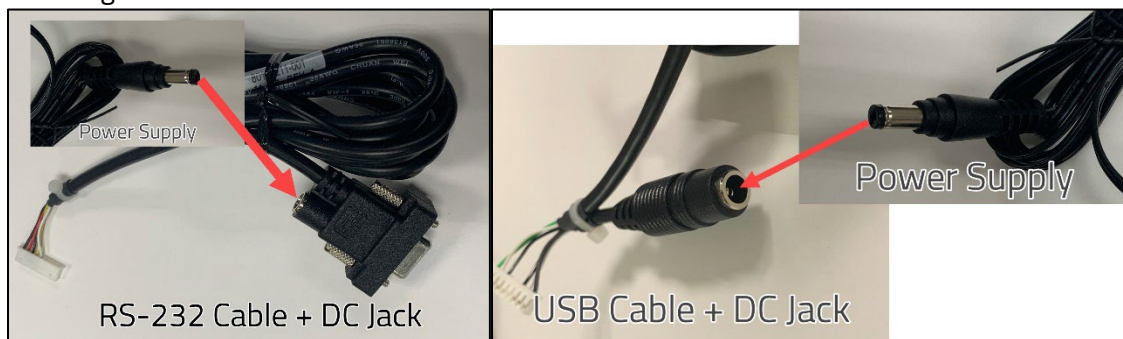

2. Plug the unit in to an AC outlet and verify that the VP5300 lights up.


Note: The VP5300 requires a power supply whether connected by RS-232 or USB.

6.6. Connecting to the Host Port

Use 9-pin Joint Tech P/N A2002H-09P (or equivalent) for the mating connector. See diagrams below for RS-232 or USB, as appropriate.


6.7. VP5300 External Cable Pin Assignments: RS-232

WIRE CONNECTIONS					
P1	P2	COLOR	GAUGE	SIGNAL	J1
2		WHITE	26	RXD	5
3		YELLOW	26	TXD	6
5	SLEEVE	BLACK	26	GND	7
	PIN	RED	26	POWER	8
SHELL		DRAIN	26	CASE GND	9



6.8. VP5300 External Cable Pin Assignments: USB


WIRE CONNECTIONS					
P1	P2	COLOR	GAUGE	SIGNAL	J1
	PIN	WHITE	26	POWER	8
2		WHITE	28	-DATA	3
3		GREEN	28	+DATA	2
4		BLACK	26	GND	4
	SLEEVE	BLACK	26	GND	7
SHELL		DRAIN	26	CASE GND	9



6.9. Engaging the Removal Detection Switch for Testing

The front panel of the VP5300 incorporates a removal-detection switch behind the bezel's rubber gasket, on the unit's right-edge flange (when viewed head-on, as in the illustration below).

Engaging the removal-detection feature is only necessary when attempting to pair a VP5300 with a compatible ID TECH PIN pad, such as the SmartPIN L100 or L80 keypad for PIN functionality. For bench testing, you may find it desirable to clamp the detection-removal nubs closed using a metal strip held on with two screws (as in the illustration below). **Make sure to do this before powering up the unit.** Conversely, power down the unit before releasing tension on the nubs.

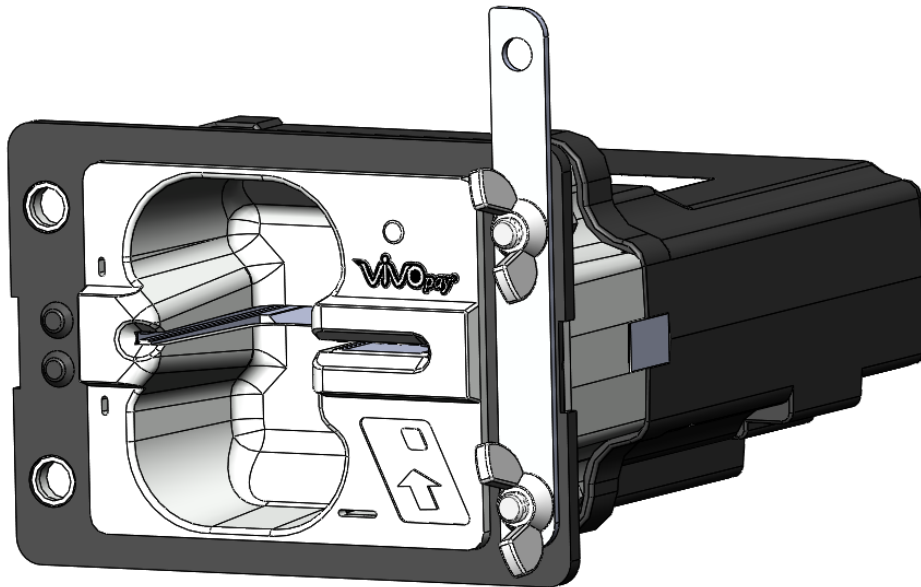

Note: to close the tamper removal switch, 1.63mm of displacement (compression) is required, or 0.056kg of force, but it is recommended that when using a M4-M5 hex nut to mount the unit, a torque between 1.0-1.2 N.m be applied to allow the gasket to prevent water ingress as well.

6.10. Installation Notes

- The VP5300 is designed to be mounted on a metal surface and in reasonably close proximity to any internal motors and electrical devices that may be operating inside the kiosk. However, the unit (like all NFC/RFID devices) is susceptible to RF and electromagnetic interference. ***It is important that the unit not be mounted near (within 3 or 4 feet of) large electric motors, computer UPS systems, microwave transmitters, anti-theft devices, radio transmitters, routers, and so on.***
- This device is intended to be mounted on the front or the side of tool secured enclosures by four mounting units. The rear side of the module must be placed into a tool-secured enclosure in the final installation. The suitable installation methods shall be provided as technical assistance for end user and shall be subject to investigation by the local Authority Having Jurisdiction at the time of installation.
- Close proximity of metal to antenna's the RF-emitting end can greatly reduce the antenna's range.
- Tie all cables neatly with nylon cable-ties and route them so that they are inaccessible and invisible to customers. Label the cable ends as "host," "ViVOpay," and "power" to simplify connection testing or component replacement, particularly when untrained individuals might be involved.
- Test the installation using a test card to perform an end-to-end transaction (the same as an actual purchase). The NFC antenna front panel's light should illuminate. Even if the transaction is declined (as it should be with a test card), it will prove connectivity all the way through the system. If possible, the store manager or some other responsible party should test each VP5300 on a regular basis (perhaps at the start of each day or at least once per week) with a test card to ensure continued operation and functionality. If the unit is manually rebooted, it is important to test the contactless reader portion as soon as possible afterwards to verify continued communication.

6.11. 24-Hour Device Reboot

Per PCI Requirements, this device reboots every 24 hours and performs a firmware self-check at that time. Please contact your device integrator if you need to check the reboot time for your unit.

7. LED Management

There are two LEDs. One is the user-interface LED on the front bezel of the reader; the other (diagnostic) LED is on the back.

Front LED Status

- The LED turns green in idle waiting.
- LED handling for Magstripe card operation:
 - The LED will turn red to indicate that the recent magstripe card read was bad.
- LED handling for smart card operation:
 - The Green LED will flash after powering on the smart card.
 - The solid Green LED indicates smart card processing is complete and the ICC powered off. The user can remove the smart card.

State	LED	Indicating
0	Off	No external power
1	Flashing Green	Powering on the smart card and starting smart card operation
2	Solid Green	Idle waiting (Smart card processing is complete and the ICC powered off. User can remove the smart card. If the transaction mode was MSR, magstripe card data is sent out.)
3	Solid Red	The recent magstripe card read was bad. Red lasts 1 second.

7.1. Diagnostic LED Status

The LED on the *back* of the VP5300 is intended to be used for diagnostic purposes.



LED status:

1. Off
2. Solid – No communication with its host.
3. Flashing (1 sec on, 1 sec off) – Communicating with its host.

LED Colors:

- Amber – Reader requires on-site service actions.
- Green – Reader is ready to read cards.
- Red – Reader needs to be sent back to the manufacturer.

State	Green LED	Amber LED	Red LED	Indicating	Service action
1	Off	Off	Off	No external power.	Check the power cable and power supply.
2			Solid Red	Power is on, but firmware doesn't run.	Dismount the device and send it back to the manufacture.
3		Solid Amber	Off	Solid amber normally means the front removal-detection buttons (left side of front bezel) are not depressed. If this possibility is ruled out, check host connectivity.	Check that the removal detection button is fully depressed. Check the communication cable and if host is running.
4	Solid Green	Solid Amber		Power on. First restart and no command sent. In not ready state and waiting for host to communicate.	No action required.

State	Green LED	Amber LED	Red LED	Indicating	Service action
5	N/A	N/A		N/A	N/A
6	Solid Green	Off		In ready state but no communication with its host.	Check connections.
7	Flashing Green			Command sent to reader; reader waiting for response.	Check L100 OR L80 display for message.
8		Flashing Amber	Solid Red	Removal flag is on and communicating with its host.	Check removal switch (under the gasket on the unit's front flange, on the right) to see if it is fully engaged; if necessary, call service center to reactivate the reader.
9		Solid Amber		Reader has no communication with its host, and the crypto driver is not functioning: Crypto MCU is lost or certificates are invalid (unit may be tampered).	Dismount the reader and send it back to the manufacturer.
10		Flashing Amber		Reader is communicating with its host, and the crypto driver is not functioning: Crypto MCU is lost or certificates are invalid (unit may be tampered).	Dismount the reader and send it back to the manufacturer.

7.2. L100 and L80 Diagnostic Messages

VP5300 units connected to L100 and L80 PIN Pads may display the following diagnostic messages.

Message ID	Display Message	Description
1	Tampered	Device is tampered.
2	Deactivated	Device is not activated.
3	Activated	Device is activated.
4	No Key Injected	DUKPT key (such as LCL-KEK, DEK,PEK) does not exist.
5	Welcome	All initialization finished.
6	Cert Failed	Certification self-check has failed.
7	FW/BL Failed	Firmware self-check has failed.
8	CLL2 Failed	Contactless kernel self-check has failed.
9	Keys Failed	Encryption key self-check has failed.
10	Whitelist Failed	White list data file self-check has failed.
11	Restricted	Check for a suspected attack.
12	TRANS Suspended	If the device supports the "Remove detection" function, the device will support Dual Control (2 passwords) to Enable / Disable the "Remove detection" function. If there are three password entry errors in a row, the device will work in the "Suspend" state in three minutes.
13	PWR Off in 5secs	System is in low power; the device will shut down in five seconds.
14	No FW Detected	TM4 has no firmware, please load firmware.
15	Pls Upgrade FW	TM4 firmware is not the latest, please upgrade to the most recent firmware.
16	Loading Key	Load DEK to TM4 chip.
17	Tamper Triggered	TM4 physical tamper is triggered.

7.3. Tamper and Failed Self-Check Indicators

The VP5300 displays the following indicators when it has been tampered or has any of the other following internal issues, such as an expired certificate, missing key, or similar fault discovered during a self-check.

The VP5300's diagnostic LED is located on the back of the reader, near the antenna cable connectors.



Indicator	Tampered Status	Other Issue Status
Front LED	Off	All LEDs off
Back Diagnostic LED	Solid red	See below
SmartPIN L100 or L80 LCD	TAMPERED	See below
Buzzer	Alarm tone	Alarm tone

When paired to a SmartPIN L100 or L80, the VP5300 can indicate the following issues in the event of a failed self-check:

- "CERT FAILED" indicates the battery is drained or certificate expired.
- "FW/BL FAILED" indicates the bin and sign do not match.
- "CLL2" indicates the Contactless kernel self-check failed.
- "KEYS FAILED" if no injection key happened.
- "WHITELIST FAILED" indicates that CL or MSR whitelist verification failed.

7.4. Avoiding Device Tamper Issues

All ID TECH PCI-certified devices integrate tamper switches and disable the card reader when it has been compromised. The section below describes best practices when handling PCI-secure devices to help prevent triggering the tamper switches.

Note that following these guidelines does not guarantee a device will not tamper if inadvertently mishandled or breached. User-induced tamper events will incur repair fees, key injection fees, and shipping both to and from ID TECH, regardless of warranty status.

7.4.1. Device Handling Best Practices

- Do not excessively shake the reader.
- Do not drop the reader.
- Do not strike the reader.
- Do not attempt to twist or cause any torsion to the reader.
- Do not expose the reader to extreme heat or cold.
- Do not intentionally subject the reader to electrical shocks.
- Do not submerge the reader in liquids of any type for extended time.
- Do not attempt to open the reader.
- Do not provide power to the reader until all connectors are plugged into the unit.
- Check the device manual to ensure the reader receives the correct power voltage. Providing power to wires and connectors before plugging them into the device may cause power spikes that can trigger a tamper event.
- When working with or installing the reader, minimize exposure to static electricity.

7.4.2. ID TECH Support

In the event the reader does tamper when under warranty, report the tampered device to ID TECH to troubleshoot and, if needed, be returned to ID TECH for analysis. Contact ID TECH support at support@idtechproducts.com for assistance.

8. Using the VP5300 to Make a Contactless Purchase

8.1. Presenting Proximity Cards or NFC Phones

The VP5300 allows for credit/debit card purchases using Contactless technology when the optional NFC antenna is installed.

Present the card or phone in close proximity to the front portion of the antenna module. Present the card or phone so that maximum surface area is parallel to the antenna module as shown below. The antenna should beep and all four green LEDs should illuminate briefly to indicate a successful test.



This tests the antenna's ability to read the Contactless test card. An unsuccessful test produces no reaction from the reader. If you use a test card and the antenna is attached to the VP5300, a dummy transaction can be tested. The transaction will not be authorized and return a response, but will at least test for end-to-end connectivity.

9. Pairing with PIN Pad

The VP5300 is designed to be paired with ID TECH's SmartPIN L100 or L80 keypads to create a full chip- and-PIN solution. Follow the pairing procedures below to use the L100 or L80 with the VP5300.

First, set up the L100 or L80 for paired operation by specifying two user passwords; then set up the VP5300; and then, finally, pair the two devices.

9.1. Setting up the L100 or L80

1. Cycle the power to the insert reader (unplug the power from the USB cable and plug it back in).
2. After plugging the power into the USB cable again, you have only 2 seconds to begin entering the special pairing command on the keypad (otherwise, you'll need to cycle the power again). To get into the special menu, press the following keys in this order:

SmartPIN L100	SmartPIN L80
• Cancel • Clear • Enter • Blank • Clear • Enter	• Cancel • 5 • Enter • 0 • 5 • Enter

3. The L100 or L80 will start beeping to indicate that the user passwords are not yet set and the LCD screen will prompt to enter a password.
4. Enter default Password A: **12345678**. Make sure the device beeps after each button is pressed to register the input. After correctly entering the default Password A, the device beeps twice.
5. Enter a new user-created Password 1 to replace Password A. The new Password 1 must be eight digits (for example: 11111111). After entering the new Password 1, the device beeps twice to confirm the input. Make a note of the new Password 1 in your records.
6. The device will prompt to reenter the password. Enter the new Password 1 again to confirm it. After entering the new Password 1 a second time, the device beeps twice to confirm successful verification.
7. Next, enter default Password B: **87654321**. Make sure the device beeps after each button is pressed to register the input. After entering the default Password B correctly, the device beeps twice.
8. Enter a new user-generated Password 2 to replace Password B. The new Password 2 must be 8 digits and must be different from Password 1 (for example: 22222222). After entering the new Password 2, the device beeps twice to confirm successful verification. Make a note

- of the new Password 2 in your records.
9. The device prompts to reenter the password. Enter the new Password 2 again to confirm it. After entering the new Password 2 for a second time, the device beeps twice to confirm the input. The SmartPIN L100 or L80 Removal Detection passwords are now set.
 10. The next menu on the L100 or L80 screen has the option to **Enable**. Choose the top option (scroll up or down using the * and # keys) and press the green **Enter** key. The device displays an "Activate Success" prompt to indicate success.

9.2. Setting up the VP5300

To set up the VP5300 for chip-and-PIN operation, you will need to configure the unit to operate in Configuration 3C. Out of the box, the VP5300 uses the **4C configuration**, which indicates the reader performs EMV transactions without a PIN pad.


Switching the unit to a 3C configuration can be done easily with ID TECH's free USDK Demo program on any Windows computer. Download the free demo program from the [ID TECH .NET Universal SDK page](#) (look for **dot NET SDK Demo.zip**). No registration is required.

1. Launch the USDK Demo program and plug the VP5300 into the USB port of your computer. Verify that the VP5300 is shown as selected on the left side of the window:




2. Verify that the firmware version of your VP5300 is higher than v72. If the firmware version is lower, please contact your ID TECH sales rep for more instructions.

- Open **Commands > EMV > Terminal Config** to expose command names. Select the **Set Config #3** command and click the **Execute Command** button. This configures the VP5300 reader to accept 3C configuration settings.

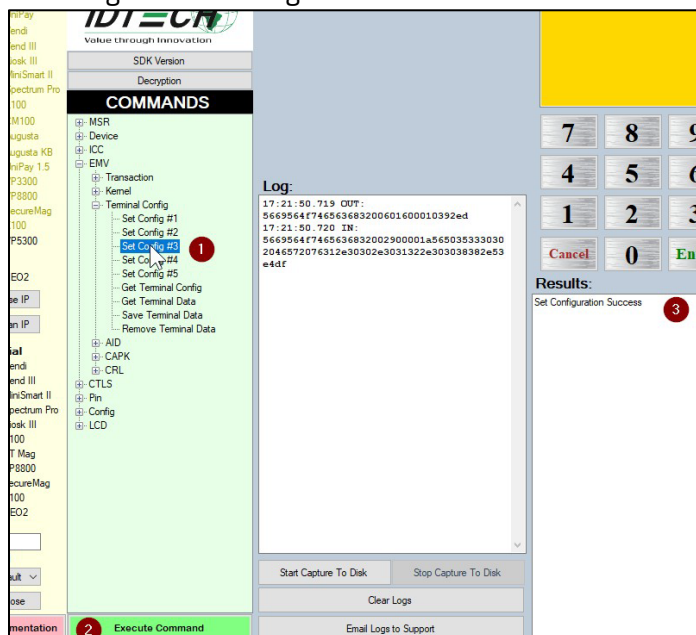

- Find the **Save Terminal Data** command (see below). When you select it, the upper portion of the center panel will change appearance and show a CONFIG dropdown menu along with a TLV text area. Select **3C** from the dropdown (leave the TLV area as it is), then click **Execute Command**.

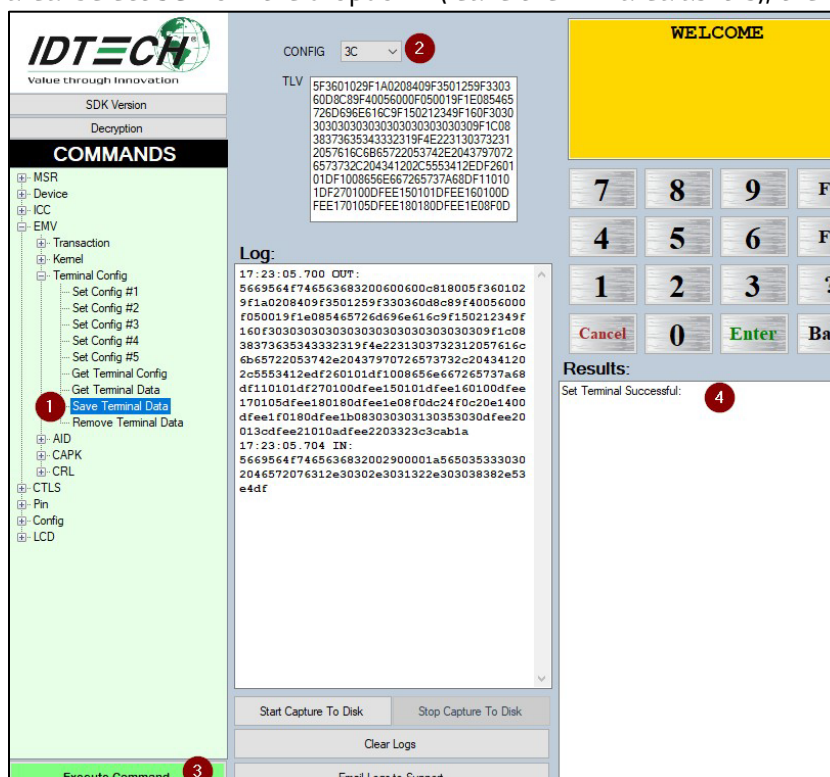

9.3. Pair the Devices

1. Open **Device > Send NEO Command**. Enter **63** for Cmd and **01** for Sub in the text boxes at the top of the center panel (as shown below). This command pairs the readers.

The screenshot displays the IDTECH software interface. On the left, a sidebar contains a tree view with categories: MSR, Device, ICC, and EMV. Under the 'Device' category, the 'Send NEO Command' option is highlighted with a red circle labeled '1'. At the bottom of the sidebar, a green button labeled 'Execute Command' is highlighted with a red circle labeled '3'. The main panel has a top section with 'Cmd' (63) and 'Sub' (01) input boxes, a 'Data' text box, a 'Timeout (ms)' set to 3000, and a 'Don't Wait For Response' checkbox. A 'Log' window shows the command execution details: '17:28:19.354 OUT: 5669564f74656368320063010000d991' and '17:28:19.355 IN: 5669564f74656368320063000000a6e9'. On the right, a yellow 'WELCOME' banner is visible above a numeric keypad. The 'Results' section at the bottom right shows 'Send P2 Command successful' with a red circle labeled '4'.

- The VP5300 is now fully configured to do PIN-based transactions (if the presented credit card supports them). Verify that the VP5300's front removal detection switch is firmly pressed down. The pressure switch is located on the front bezel, right side, behind the rubber gasket. If the unit is not mounted in a kiosk or other fixture, you can temporarily engage the pressure switch by attaching a strip of metal to the right side of the flange as shown below (note the wing nuts):



- Next, return to the L100 or L80 and power-cycle the PIN pad. You have only 2 seconds to start entering the special pairing command on the keypad. To get into the special menu, press:


SmartPIN L100	SmartPIN L80
• Cancel • Clear • Enter • Blank • Clear • Enter	• Cancel • 5 • Enter • 0 • 5 • Enter

9.3.1. Enabling SmartPIN L100 Devices

1. The L100 or L80 front display now shows two options: **Enable PinPad**, and **Enable CR** (in this case, CR means "card reader"). Use the **#** and ***** keys to scroll up or down. Select **Enable CR** and press **Enter**.



2. Setup is now complete. Execute the **Start EMV Transaction** command in the USDK Demo, or start a transaction from your own software, and then insert a PIN debit card. After the prompt for PIN comes up, the unit should display "ENTER PIN:" as shown below:

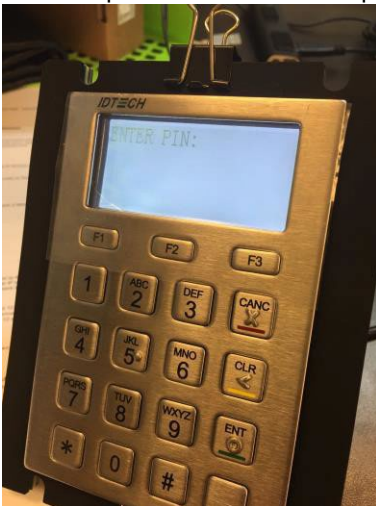

Note: The test card must be a PIN-capable EMV card. We recommend using the appropriate test card from a deck of test cards.

9.3.2. Enabling SmartPIN L80 Devices

1. The L80 front display now shows the **Enable CR** option (in this case, CR means "card reader"). Press **Enter**.

Setup is now complete. Execute the **Start EMV Transaction** command in the USDK Demo, or start a transaction from your own software, and then insert a PIN debit card. After the prompt for PIN comes up, the unit should display "ENTER PIN:".

Note: The test card must be a PIN-capable EMV card. We recommend using the appropriate test card from a deck of test cards.

9.1. L100 Removal Detection and Paired Readers

Note: The SmartPIN L100 comes equipped with a removal detection sensor. For VP5300 readers, triggering the L100's removal sensor disables PIN functions: the reader paired to the L100 will NOT perform PIN transactions. However, transactions not requiring a PIN are unaffected.

10. Implementing Whitelists

For instructions on implementing Whitelists for the VP5300, contact your ID TECH representative to receive the user guide *ID TECH Implementing Whitelists*, available under NDA.

11. RF Interference

Q. Why do I need to know about RF interference?

A. Contactless payment devices use radio frequency technology to send card data to a contactless terminal reader.

Q. How can RF interference affect contactless payment?

A. Radio frequency interference can cause data errors. If RF interference is present, contactless payment devices may operate intermittently or inconsistently.

Q. Where does RF interference come from?

A. Radio frequency interference (RFI) can originate from a wide number of sources at the point-of-sale (POS). Some examples of sources of RF energy and RF interference include:

- AM/FM radio and TV transmitters
- 2-way radios and pagers
- Mobile telephones
- Power lines and transformers
- Large electric motors
- Medical equipment
- Microwaves
- Electromechanical switches
- Wireless routers

Q. What should I do if I suspect RF interference exists in my environment?

A. Begin by inspecting your environment for possible sources of RF interference.

Q. Do equipment manufacturers test their devices for RF interference?

A. Yes. Electronic equipment is tested for RFI sensitivity by the manufacturers. These tests are performed in a controlled laboratory environment and will often not replicate the types of situations that would be encountered in your own point-of-sale (POS) environment.

Q. What RF levels will impact RF operations?

A. Factors that can cause RF interference vary case-by-case. There are no set rules defining a single RF level that will cause RFI. RFI depends on the sensitivity of the equipment under consideration, or how low an interpreting signal can be in the presence of the equipment and cause problems.

Equipment can be particularly sensitive to very low signal levels of one frequency and yet be quite

immune to high signal levels of another frequency; frequency is an important factor. Some electronic system components are internally shielded and have a very high immunity to interference; but generally, most equipment has not been so engineered.

12. Updating VP5300 Firmware


Users can update VP5300 firmware with a Windows computer via either serial or USB interfaces.

Note: Before you begin, go to the [VP5300 product page](#) on the ID TECH Knowledge Base, download the **Firmware update package; VP5300; production** ZIP file, and extract it to your computer.


You will also need to install [ID TECH's Universal SDK Demo app](#), available free on the ID TECH Knowledge Base.

Follow the steps below to update VP5300 firmware:


1. Connect the VP5300 to your PC via USB or serial port.
2. Open the USDK Demo app from the Windows Start menu.

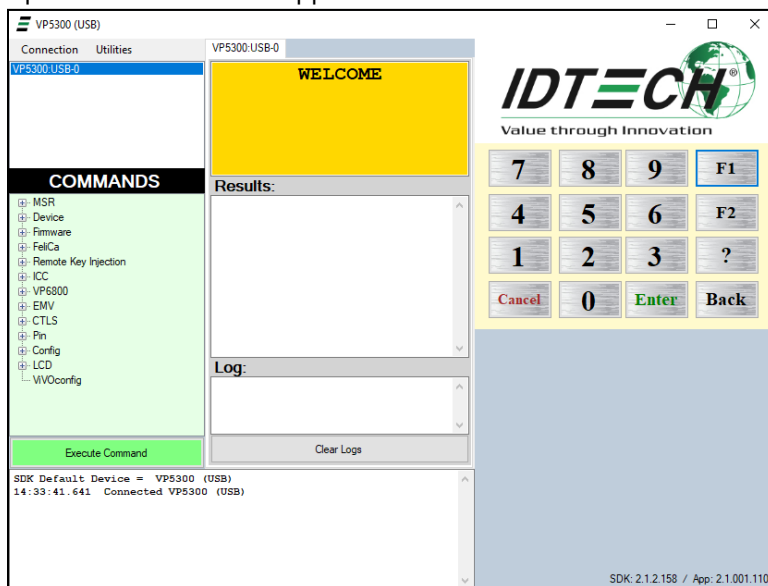


3. Under **Firmware**, select **Update Device Firmware**, then click **Execute Command**.

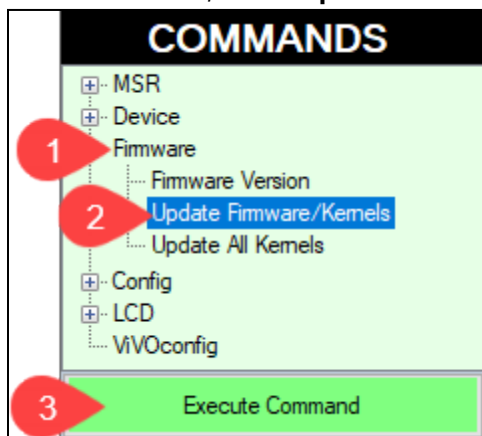


4. In the **Firmware Type** dialog, enter **255** for **K81 FW** and click **OK**.

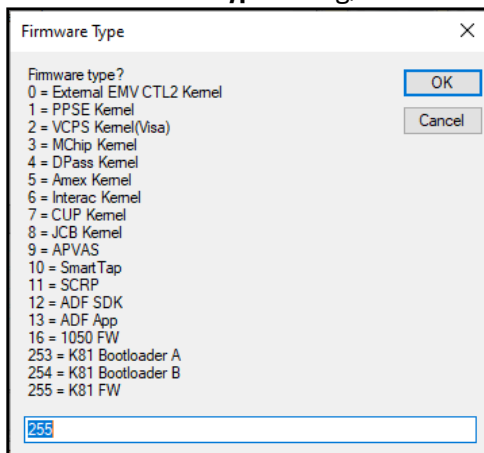

5. In the File Explorer window, navigate to the directory where you saved the VP5300 firmware update, open the **FirmwareApp** directory, and select the FW file that starts with **VP5300 v1.00...** and click **Open**.

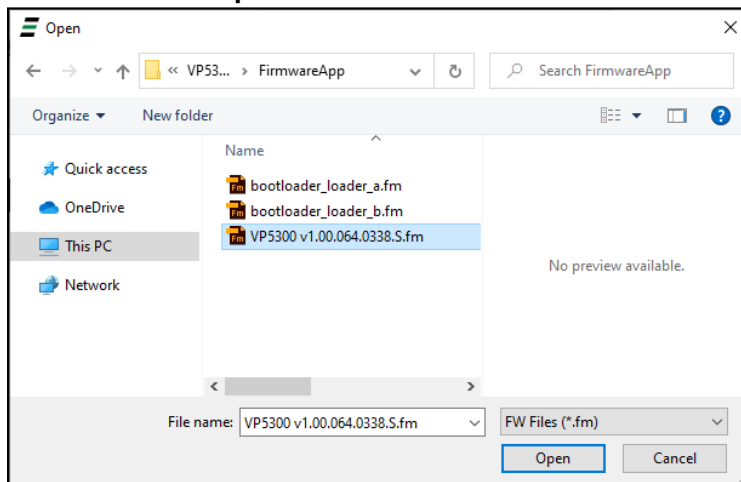

6. The VP5300 reboots and enters the bootloader, at which point the USDK Demo app begins updating the device's firmware.
7. When the firmware update completes, the VP5300 reboots again and the USDK Demo app prints **Firmware Update Successful** in the **Results** panel.

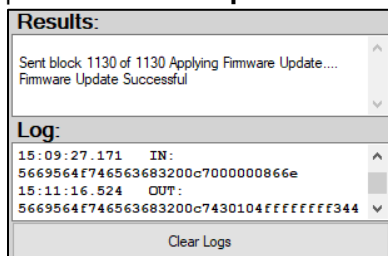

13. Decommissioning PCI-Certified Devices

All PCI devices require proper decommissioning prior to device disposal in order to ensure the protection of all sensitive financial card data. For instructions on decommissioning your device, see [Decommissioning of PCI-Certified Devices](#) on the ID TECH Knowledge Base.

14. Troubleshooting

The VP5300 reader is designed to be reliable and easy to troubleshoot. The components that may require troubleshooting include the power module (if applicable), the reader, and the serial cable.

If you are unable to resolve the problem, please contact <mailto:support@idtechproducts.com> (sending an e-mail to this address will automatically open a support ticket).

14.1. A Note About Encryption

When a key is not injected into the VP5300, it has limited functionality and will be in a state looking for key injection. Without a key, all requests to start a transaction result in an error code that the command is not allowed.

After a key is injected into the VP5300, there is no method to turn off encryption.

Symptom	Possible Cause	Remedy
General Issues		
Reader does not appear to be powered on (no LEDs are lit).	- Reader not powered on or incorrect voltage. - Improper use of internal power supply provided by the kiosk.	- Check cable connections. - Verify that power is on and correct voltage and current are present. - Make sure that the correct pins are utilized. - Make sure that the power provided is within the specified range of the reader. - Make sure that the correct polarity is observed. - For more information, refer to the Input Voltage under the Electrical specification section. - Replace the device with a known-good device to verify that the power supply and wiring in the installation are sound.
Reading Cards/Phones		
LED is lit, but beeper is not audible when card/fob presented.	- Card/fob/phone not properly presented. - RF interference. - Unsupported card used. - Wrong firmware (contact your local support representative).	- Present card/fob/phone closer to the antenna, and ensure it is parallel to the face of the reader. - Verify that the card/fob/phone is valid/current. - Verify that metal is not interfering with the antenna. - Test with "ViVocard Contactless Test Card" part number 241-0015-03 Rev A.

Symptom	Possible Cause	Remedy
		• Try a different card/fob. • Check to see if card/fob is damaged. • Verify that correct firmware is loaded on reader (local support representative only). • Power cable plug is fully inserted. • Replace the unit.
Some cards/fobs read, but not all.	• Possible bad card/fob. • Unsupported card used. • Wrong firmware (contact your local support representative).	• Check to see if card/fob is damaged. • Verify that correct firmware is loaded on reader (local support representative only). • Card readers must contain the latest versions of card-brand public certificates (CAPKs). If a CAPK is out of date, one particular kind of card may no longer be usable. Update the CAPK.
Communication to Kiosk		
No data is received, or data is garbled.	Faulty or incorrect cable connections.	• Check that the cable connection is secure and in the correct port on the unit.
Load Firmware		
Firmware loading software indicates "open RS-232 failed"	Device is not well connected to PC. Or other software is using the serial interface.	• Check the cable connection • Close other software which might be using the same serial interface.
Firmware loading software indicates "Load firmware failed."	Device is not well connected to PCs.	• Check the cable connections.
Firmware loading software indicates "Send Command failed."	Bootloader firmware in device is destroyed.	• Contact your support representative to reload manufacture's firmware.

16. FCC Regulatory Compliance Notices Class B Equipment

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The user manual for an intentional or unintentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: The grantee is not responsible for any changes or modifications not expressly approved by the party responsible for compliance. Such modifications could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and the receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with FCC RF radiation exposure limits set forth for an uncontrolled environment. The antenna(s) used for this transmitter must not be co-located or operating in conjunction with any other antenna or transmitter and must be installed to provide a separation distance of at least 20cm from all persons.

17. North American Hazardous Location Approval

- SUITABLE FOR USE IN CLASS I, DIVISION 2, GROUPS A, B, C AND D HAZARDOUS LOCATIONS, OR NONHAZARDOUS LOCATIONS ONLY. Convenant à l'emploi dans les sites dangereux de classe i, division 2, groupes a, b, c et d, ou dans les sites non hasardeux seulement.
- WARNING - EXPLOSION HAZARD - DO NOT DISCONNECT EQUIPMENT WHILE THE CIRCUIT IS LIVE OR UNLESS THE AREA IS KNOWN TO BE FREE OF IGNITABLE CONCENTRATIONS. ATTENTION - DANGER D'EXPLOSION - LA SUBSTITUTION DE COMPOSANTS PEUT ENTRAÎNER UNE ADÉQUATION À LA CLASSE I, DIVISION 2.
- Temperature code "T4A"
- Ambient Temperature Range: -25°C to 65°C.

18. IC Compliance Warning

This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:

1. This device may not cause interference, and
2. This device must accept any interference, including interference that may cause undesired operation of the device.

L'émetteur/récepteur exempt de licence contenu dans le présent appareil est conforme aux CNR d'Innovation, Sciences et

Développement économique Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

1. l'appareil ne doit pas produire de brouillage, et, and
2. l'utilisateur de l'appareil doit accepter tout brouillage radioelectrique subi, meme si le brouillage est susceptible d'en compromettre le fonctionnement.

19. Cautions and Warnings

	Warning: Avoid close proximity to radio transmitters which may reduce the capability of the reader. Avertissement : Évitez la proximité d'émetteurs radio, ce qui peut réduire la performance du lecteur.
	Caution: Do not drop the device. Attention : Ne pas laisser tomber le lecteur
	Caution: Electrostatic sensitive device. Use caution in handling, in high ESD conditions. Attention : Le lecteur est sensible aux décharges électrostatiques. Manipulez le lecteur avec précaution dans une situation d'électricité statique élevée.