

User Manual of Product 1:

Pyle Home Mini Audio Amplifier - 60W Portable Dual Channel Surround Sound HiFi Stereo Receiver w/ 12V AC Adapter, AUX, MIC IN, Supports Smart Phone, iPhone, iPod, MP3 For 2-8ohm Speakers - Pyle PFA200

User Manual of Product 2:

Pyle 3-way Mini Box Speaker System - 3.5 Inch 200 Watt Weatherproof Marine Grade Mount Speakers - in a Heavy Duty ABS Enclosure Grill - Home, Boat, Poolside, Patio Indoor Outdoor Use- PLMR24B (Black)

PFA200 Class T Amplifier

The **PFA200** uses a Class-T audio amplifier IC for low distortion and acoustically accurate reproduction of music.

Tone/direct switching allows for customized listening via separate bass and treble adjustments — or the original signal can be passed through without enhancement.


The built-in loudspeaker protection circuit triggers when the amplifier is turned on to protect speakers from high volume bursts of audio.

Over-voltage protection circuit shuts down the amplifier if input voltage exceeds 14.4 V DC.

State of the art design using surface mount components and advanced engineering for proven performance, reduced signal interference, and long operational life.

Specifications:

Input power: DC 9~14.4V 2A
Output Power: 60 W
Speaker impedance: 2Ω
Frequency response: 20Hz-20kHz
Total harmonic distortion: < 0.4%
SNR: > 80dB

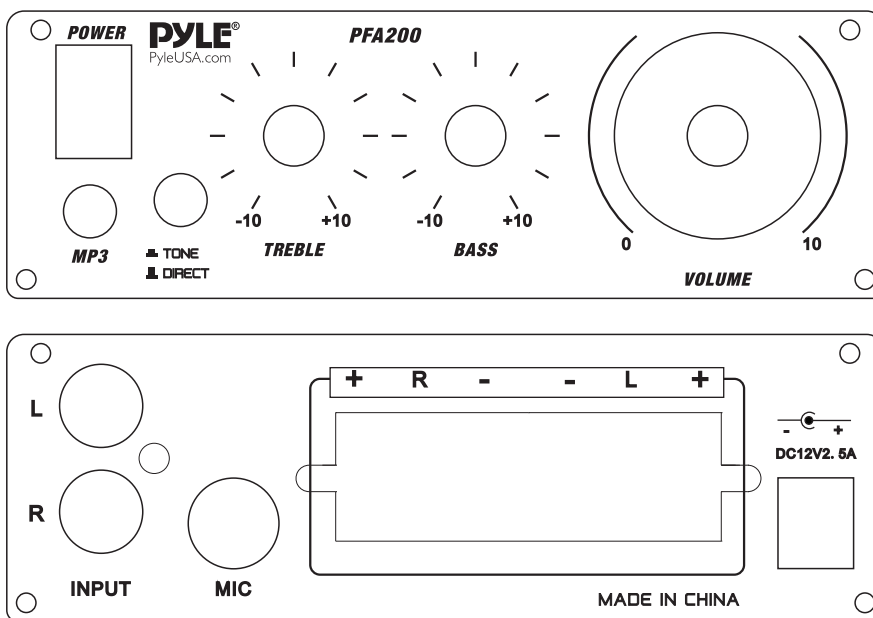

Front Inputs: 3.5mm (1/8")
Rear Outputs: Speaker, RCA L/R, 1/4" Mic

www.PyleUSA.com
718.535.1800 718.236.2400(fax)
1600 63rd Street, Brooklyn NY 11204

PLMR24 - PLMR24B - PLMR24S

Compact 3.5" Wall Mount Home Speakers

3-Way Indoor/Outdoor Speaker System, 200 Watt (Pair)

PYLE
PyleUSA.com

USER MANUAL

FEATURES:

- Dual Passive Speaker System
- Universal Indoor/Outdoor Mountable
- Marine Grade Construction
- Waterproof Rated & Weather-Resistant
- Connect & Stream Audio from External Devices
- 3-Way Full Range Stereo Sound Reproduction
- Bass Reflex Vent for Added Bass Response
- Built-in Capacitor Crossover Network
- Lightweight & Compact Size
- Removable Rustproof Mesh Grills
- Quick Connect/Disconnect Speaker Terminals
- Used for Home, Garage, Yard, Deck, Porch, Patio

TECHNICAL SPECS:

- Power: 200 Watt Peak (100 Watt RMS)
- Marine Grade Rating: IP-44
- Subwoofers: 3.5" Aluminum Injection Cones
- Midranges: 1.75" Wide Dispersion Cones
- Tweeters: 1.0" Superior Domes
- Construction Material: Engineered ABS
- Frequency Response: 70Hz - 21kHz
- Magnet Structure: 24 oz.
- Impedance: 4 Ohm
- Power Supply: 120V (DC 12V Power Adapter)
- Dimensions (L x W x H): 5.25" x 3.75" x 3.75" -Each

Installation Guide:

MOUNTING THE BRACKET

1. Remove the bracket knobs and the bracket from the speaker
2. Hold the bracket up to the mounting surface. "Plmr" can be mounted either horizontally or vertically, hold the bracket so that the speaker wire fits through the large, circular wire hole in the bracket, align the bracket to be square with the surrounding (**Use A level for accuracy**)
3. Mark the locations of the three shaped screw holes, use all of the holes
4. Drill pilot holes into the mounting surface
5. Gently pull the speaker wire through the wire hole in the center of the mounting bracket, the bracket so that the holes all line up
6. Use your hardware to attach the bracket to the mounting surface


FINAL ADJUSTMENTS

1. After checking that the speaker is in-phase and works correctly, angle the speaker for the best sound
2. Hand tighten the bracket knobs only, power tools may over-tighten the knob, and strip the threads of the insert
3. Check that the entire installation is safe and secure

WHAT'S IN THE BOX:

- (2) Wall-Mount Speakers
- Speaker Wire, 11.5' ft.
- Removable Mounting Brackets

MOUNTING

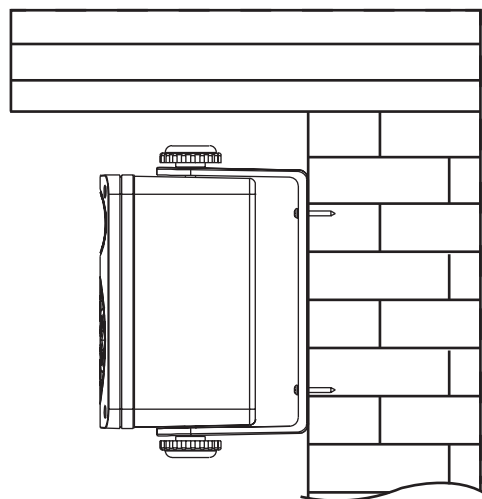

VISIT US ONLINE:

Have a question?
Need service or repair?
Want to leave a comment?
[PyleUSA.com/ContactUs](https://www.pyleusa.com/ContactUs)

PYLE