

WAC LIGHTING

Shard

Wall Sconce 4CCT

Fixture Type: _____
 Catalog Number: _____
 Project: _____
 Location: _____

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
<input type="radio"/> WS-79524 24"	<input type="radio"/> 2700K <input type="radio"/> 3000K <input type="radio"/> 3500K <input type="radio"/> 4000K	<input type="radio"/> BK Black <input type="radio"/> BN Brushed Nickel	20W	750	506

Example: **WS-79524-40-BN**

For custom requests please contact customs@wacighting.com

DESCRIPTION


A textured reflective panel in a simple curve is held by a slim bar. Dedicated LED light sources within its frame enhances the translucent slab of patterned acrylic with a warm glow.

FEATURES


- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Option to pre-select color temperature or adjust in the field
- Reflective textured panel
- Driver included
- 5 Year warranty

SPECIFICATIONS


Color Temp:	2700K,3000K,3500K,4000K
Input:	120-277V,50/60Hz
CRI	90
Dimming:	ELV: 100-10% , TRIAC: 100-10%
Rated Life:	50,000 Hours
Mounting:	Can be mounted on wall in all orientations
Standards:	ETL, cETL, Damp Location Listed
Construction	Aluminum hardware



FINISHES:



LINE DRAWING:

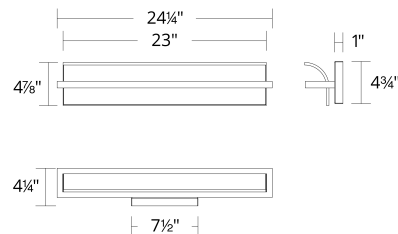

WS-79524

WAC LIGHTING

Shard

Wall Sconce 4CCT

Fixture Type: _____
 Catalog Number: _____
 Project: _____
 Location: _____

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
<input type="radio"/> WS-79534 34"	<input type="radio"/> 2700K <input type="radio"/> 3000K <input type="radio"/> 3500K <input type="radio"/> 4000K	<input type="radio"/> BK Black <input type="radio"/> BN Brushed Nickel	27W	900	710

Example: **WS-79534-40-BN**

For custom requests please contact customs@wacighting.com

DESCRIPTION

A textured reflective panel in a simple curve is held by a slim bar. Dedicated LED light sources within its frame enhances the translucent slab of patterned acrylic with a warm glow.

FEATURES


- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Option to pre-select color temperature or adjust in the field
- Reflective textured panel
- Driver included
- 5 Year warranty

SPECIFICATIONS


Color Temp:	2700K,3000K,3500K,4000K
Input:	120-277V,50/60Hz
CRI	90
Dimming:	ELV: 100-10% , TRIAC: 100-10%
Rated Life:	50,000 Hours
Mounting:	Can be mounted on wall in all orientations
Standards:	ETL, cETL, Damp Location Listed
Construction	Aluminum hardware



FINISHES:



LINE DRAWING:

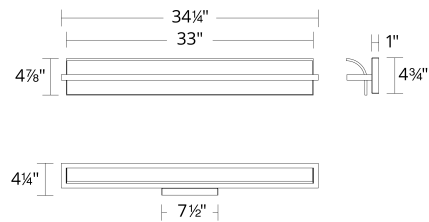

WS-79534