



Petzl Custom can customize a work-positioning lanyard from the GRILLON range. You can choose the type of rope (standard or high-strength), the color, and the length (up to 20 meters). You can also choose the color of the device. The lanyard can be equipped with connectors for attachment to the harness or for the end. The GRILLON CUSTOM lanyard is packaged individually for a ready-to-go solution.



# CUSTOMIZATION REQUEST

GRILLON CUSTOM



Access  
the  
inaccessible®

### Rope color

Standard rope, available in seven colors (black, white, yellow, red, blue or orange) or aramid fiber rope with excellent abrasion resistance (beige).



### Rope length

Option to order a rope of a specified length, up to 20 meters (in 50-centimeter increments between 1 and 5 meters, and by the meter for 5 to 20 meters).

### Color of descender



Yellow/black



Black

### End connector

Option to choose and install an anchor connector.

- Without



HOOK EUR



HOOK INTER



EASHOOK OPEN




EASHOOK OPEN black



MGO 60 INTER



MGO 60 OPEN

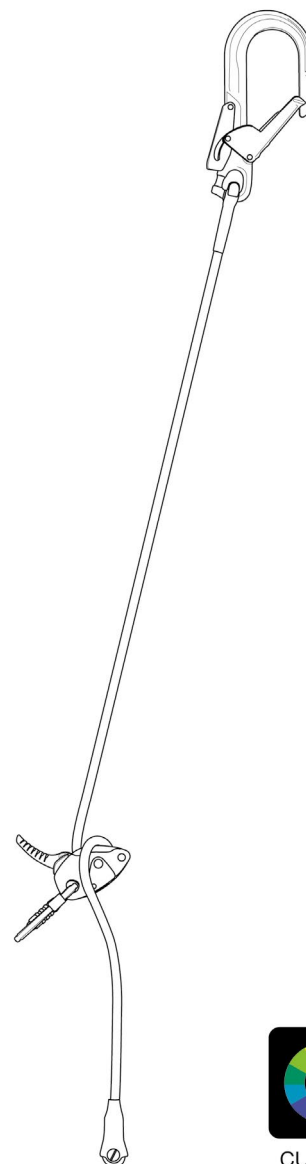

CUSTOM

### Harness connector

Option to choose and install a connector for attachment to the harness.

- Without



OK TRIACT-LOCK + CAPTIV



OK TRIACT-LOCK black + CAPTIV



Bm'D TRIACT-LOCK + CAPTIV



Bm'D TRIACT-LOCK black + CAPTIV

# Request a Quote

Company name:

Dealer: ☐ Yes ☐ No

Client name:

Client sector:

☐ Telecommunications ☐ Chemical/Petrochemical  
☐ Energy and Networks ☐ Other  
☐ Construction

Date:

Contact name:

Address:

Postal code:

City:

Tel:

Email:

Please fill out a form for each desired configuration.

## L052XYXX GRILLON CUSTOM



|                    |    |                                                                                                                |              |                          |
|--------------------|----|----------------------------------------------------------------------------------------------------------------|--------------|--------------------------|
| Rope length        | -  | From 1 to 20 meters. In 50-centimeter increments between 1 and 5 meters; and by the meter from 5 to 20 meters. |              | _____                    |
| Rope color         | 01 |                              | Black        | <input type="checkbox"/> |
|                    | 02 |                             | White        | <input type="checkbox"/> |
|                    | 03 |                             | Yellow       | <input type="checkbox"/> |
|                    | 04 |                             | Red          | <input type="checkbox"/> |
|                    | 05 |                             | Orange       | <input type="checkbox"/> |
|                    | 06 |                             | Beige        | <input type="checkbox"/> |
|                    | 07 |                             | Blue         | <input type="checkbox"/> |
| Color of descender | 01 |                             | Yellow/black | <input type="checkbox"/> |
|                    | 02 |                             | Black        | <input type="checkbox"/> |

|                   |    |                                                                                     |                                                          |                          |
|-------------------|----|-------------------------------------------------------------------------------------|----------------------------------------------------------|--------------------------|
| End connector     | 01 | -                                                                                   | Without connector                                        | <input type="checkbox"/> |
|                   | 02 |    | HOOK Eur.<br>CE-certified                                | <input type="checkbox"/> |
|                   | 03 |    | HOOK Inter.<br>ANSI and CE-certified                     | <input type="checkbox"/> |
|                   | 04 |    | EASHOOK OPEN<br>CE-certified                             | <input type="checkbox"/> |
|                   | 05 |    | EASHOOK OPEN black<br>CE-certified                       | <input type="checkbox"/> |
|                   | 06 |    | MGO 60 Inter.<br>ANSI and CE-certified                   | <input type="checkbox"/> |
|                   | 07 |    | MGO OPEN 60<br>CE-certified                              | <input type="checkbox"/> |
| Harness connector | 01 | -                                                                                   | Without connector                                        | <input type="checkbox"/> |
|                   | 02 |  | OK TRIACT-LOCK + CAPTIV<br>CE-certified                  | <input type="checkbox"/> |
|                   | 03 |  | OK TRIACT-LOCK black + CAPTIV<br>CE-certified            | <input type="checkbox"/> |
|                   | 04 |  | Bm'D TRIACT-LOCK + CAPTIV<br>ANSI and CE-certified       | <input type="checkbox"/> |
|                   | 05 |  | Bm'D TRIACT-LOCK black + CAPTIV<br>ANSI and CE-certified | <input type="checkbox"/> |

Note: Certifications depend on choice of connector (more information in the Instructions for Use).

QUANTITY: \_\_\_\_\_