



EQUIPMENT GUIDE 2022

YOUR FAMOUS 33 BRANDS



A portion of your purchases goes to
FEEDING AMERICA
food banks in Ohio, Pennsylvania, & West
Virginia to provide food and other essential
products to the communities we serve.



Learn more at breeze33.com/food-bank-water-org

HELP YOUR COMMUNITY.



We've partnered with
HABITAT FOR HUMANITY
to help families in your community
build and improve places to call home
through in-kind donations.



Learn more at breeze33.com/food-bank-water-org



CONTENTS

MINI SPLITS

Comfort Series Indoor/Outdoor Heat Pump Systems	5-7
Premier Series Outdoor Hyper Pro Systems.	8-9
Premier Series Indoor Hyper Pro Systems.	10-12
Premier Series Cassette Systems.	13
Premier Series Ducted Systems	14
Premier Series Ceiling & Floor Systems.	15
Premier Series Console Systems	16
Premier Series Indoor Air Handler.	17
Premier Series Outdoor Heat Pump Multi-Zone Units	18-19
Premier Series Outdoor Hyper Pro Multi-Zone Units	20-21
Single-Zone Mini Split Compatibility Guide	22
Multi-Zone Mini Split Compatibility Guide	23
Heat Pump Multi-Zone Match Rules	24-25
Hyper Pro Multi-Zone Match Rules	26-27
Mini Split Linset Covers	28-29

AIR CONDITIONERS & DEHUMIDIFIERS

Portable Air Conditioners	30
Through the Wall Air Conditioners	31-32
Window Air Conditioners	33
Packaged Terminal Air Conditioners	34
Portable Dehumidifiers	35

ACCESSORIES

Controllers	36
Wall Sleeves	36
Grilles	36
HVAC Thermostats	36
Thermostat Features Guide.	37

INDOOR/OUTDOOR HEAT PUMP MINI SPLIT SYSTEM



G1 System



G2 System

COMFORT SERIES

FEATURES

- Comfort Series
- Compatible with Heat Pump Wall Mount only
- Two-way draining
- Golden Fin anti-corrosive coating
- Auto restart function
- Crank case & basepan heater included
- Auto defrost
- 24-Hour timer
- Wireless remote control included
- Compatible with BZ33-WCON1

Indoor Unit	BZ33-HP09WALL1-C .3473331	BZ33-HP09WALL1-G2-C .3548009	BZ33-HP12WALL1-C .3473353	BZ33-HP12WALL1-G2-C .3548003
Width (in)	28-2/5	28-2/5	31-1/2	31-3/5
Depth (in)	7-2/5	7-2/5	7-2/5	7-2/5
Height (in)	11-2/5	11-2/5	11-7/10	11-7/10
Weight (Lb)	22.7	22.27	24.91	24.25



Outdoor Unit	BZ33-HP09OUT1-C .3473335	BZ33-HP09OUT1-G2-C .3548015	BZ33-HP12OUT1-C .3473359	BZ33-HP12OUT1-G2-C .3548010
Width (in)	30-3/10	30-1/10	31-1/2	30-1/10
Depth (in)	11-4/5	11-9/10	13-1/10	11-9/10
Height (in)	21-4/5	21-9/10	21-4/5	21-9/10
Weight (Lb)	71.87	63.49	76.28	67.68



COOLING

Capacity (BTU/H)	9,000	9,000	12,000	12,000
Range (BTU/H)	3,600-10,300	2,650-10,300	3,700-13,000	4,300-12,600
Input (W)	782	720	1,020	1,168
Current (A)	6.8	6.26	8.87	10.6
EER (BTU/W)	11.5	12.5	10.5	10.3
SEER (BTU/W)	19	20.5	19	20

HEATING

Capacity (BTU/H)	10,000	10,000	12,000	12,000
Range (BTU/H)	3,500-10,900	2,700-10,500	3,600-13,500	4,000-12,500
Input (W)	925	1,000	1,026	1,122
Current (A)	8.1	8.7	8.93	10.3
COP (W/W)	3.11	2.93	3.43	3.13
HSPF4 (BTU/W)	10	10	9.5	10.5
HSPF5 (BTU/W)	7.8	7.8	7.8	8.4

SPECIFICATIONS

Lineset (in)	1/4 x 3/8	1/4 x 3/8	1/4 x 1/2	1/4 x 1/2
Power	115V, 1 Phase	115V, 1 Phase	115V, 1 Phase	115V, 1 Phase
Refrigerant	R410A	R410A	R410A	R410A
Thermostat	Wireless Remote	Wireless Remote	Wireless Remote	Wireless Remote
Warranty	Yes*	Yes*	Yes*	Yes*

*5 year warranty on parts. 7 year warranty on compressor.

INDOOR/OUTDOOR HEAT PUMP **MINI SPLIT SYSTEM**



G1 System



G2 System

COMFORT SERIES

FEATURES

- Comfort Series
- Compatible with Heat Pump Wall Mount only
- Two-way draining
- Golden Fin anti-corrosive coating
- Auto restart function
- Crank case & basepan heater included
- Auto defrost
- 24-Hour timer
- Wireless remote control included
- Compatible with BZ33-WCON1

Indoor Unit	BZ33-HP18WALL2-C .3473404	BZ33-HP18WALL2-G2-C .3548004	BZ33-HP24WALL2-C .3473406	BZ33-HP24WALL2-G2-C .3548005
Width (In)	38	38	42-1/2	42-1/2
Depth (In)	8-1/2	8-1/2	8-9/10	8-9/10
Height (In)	12-1/2	12-3/5	13-1/5	13-1/5
Weight (Lb)	32.19	31.53	39.68	38.58



Outdoor Unit	BZ33-HP18OUT2-C .3473405	BZ33-HP18OUT2-G2-C .3548011	BZ33-HP24OUT2-C .3473407	BZ33-HP24OUT2-G2-C .3548012
Width (In)	31-1/2	31-7/10	33-1/5	35
Depth (In)	13-1/10	13	14-3/10	13-1/2
Height (In)	21-4/5	21-4/5	27-3/5	26-1/2
Weight (Lb)	85.76	79.81	112.22	104.5



COOLING

Capacity (BTU/H)	18,000	18,000	24,000	24,000
Range (BTU/H)	4,500-18,500	3,900-20,000	6,850-24,500	6,704-25,300
Input (W)	1,645	1,715	2,500	2,665
Current (A)	7.35	7.5	11	11.6
EER (BTU/W)	11	10.5	9.5	9
SEER (BTU/W)	19	19	17	18

HEATING

Capacity (BTU/H)	18,000	18,800	24,000	24,000
Range (BTU/H)	4,600-19,000	6,300-19,400	7,200-25,000	6,900-28,100
Input (W)	1,700	1,883	2,200	2,320
Current (A)	7.4	8.18	9.6	10.08
COP (W/W)	3.1	2.93	3.2	3.03
HSPF4 (BTU/W)	10	10	9.5	9.8
HSPF5 (BTU/W)	8	8.3	8	8

SPECIFICATIONS

Lineset (In)	1/4 x 1/2	1/4 x 1/2	3/8 x 5/8	3/8 x 5/8
Power	208/230V, 1 Phase	208/230V, 1 Phase	208/230V, 1 Phase	208/230V, 1 Phase
Refrigerant	R410A	R410A	R410A	R410A
Thermostat	Wireless Remote	Wireless Remote	Wireless Remote	Wireless Remote
Warranty	Yes*	Yes*	Yes*	Yes*

*5 year warranty on parts. 7 year warranty on compressor.

INDOOR/OUTDOOR HEAT PUMP MINI SPLIT SYSTEM



G1 System



G2 System

COMFORT SERIES

FEATURES

- Comfort Series
- Compatible with Heat Pump Wall Mount only
- Two-way draining
- Golden Fin anti-corrosive coating
- Auto restart function
- Crank case & basepan heater included
- Auto defrost
- 24-Hour timer
- Wireless remote control included
- Compatible with BZ33-WCON1

Indoor Unit	BZ33-HP30WALL2-C .3478327	BZ33-HP30WALL2-G2-C .3548006	BZ33-HP36WALL2-C .3473408	BZ33-HP36WALL2-G2-C .3548007
Width (in)	46-7/10	49-3/5	49-3/5	49-3/5
Depth (in)	10-1/10	11-1/10	11-1/10	11-1/10
Height (in)	13-2/5	14-1/4	14-1/4	14-1/4
Weight (Lb)	50.26	50.49	55.6	52.69



Outdoor Unit	BZ33-HP30OUT2-C .3478321	BZ33-HP30OUT2-G2-C .3548000	BZ33-HP36OUT2-C .3473409	BZ33-HP36OUT2-G2-C .3548013
Width (in)	37-1/4	37-1/4	37-1/4	37-1/4
Depth (in)	16-1/10	16-1/10	16-1/10	16-1/10
Height (in)	31-9/10	31-9/10	31-9/10	31-9/10
Weight (Lb)	148.81	151.9	153.22	158.95



COOLING

Capacity (BTU/H)	30,000	30,000	36,000	36,000
Range (BTU/H)	8,800-31,760	7,200-31,600	10,100-36,500	8,900-36,300
Input (W)	2,605	2,855	4,235	4,256
Current (A)	11.5	12.4	18.5	18.4
EER (BTU/W)	11.5	10.5	8.5	8.5
SEER (BTU/W)	19.8	18.6	16	17.5

HEATING

Capacity (BTU/H)	30,000	30,000	36,000	36,000
Range (BTU/H)	8,900-31,970	10,600-32,500	10,400-37,500	11,400-37,800
Input (W)	3,410	3,250	3,835	4,270
Current (A)	15	14.2	16.7	18.9
COP (W/W)	2.58	2.71	2.75	2.47
HSPF4 (BTU/W)	9.4	9.5	10	12
HSPF5 (BTU/W)	8	7.7	8.4	8

SPECIFICATIONS

Lineset (in)	3/8 x 5/8	3/8 x 5/8	3/8 x 5/8	3/8 x 5/8
Power Supply	208/230V, 1 Phase	208/230V, 1 Phase	208/230V, 1 Phase	208/230V, 1 Phase
Refrigerant	R410A	R410A	R410A	R410A
Thermostat	Wireless Remote	Wireless Remote	Wireless Remote	Wireless Remote
Warranty	Yes*	Yes*	Yes*	Yes*

*5 year warranty on parts. 7 year warranty on compressor.

PREMIER SERIES



G1 System



G2 System

FEATURES

- Premier Series
- Compatible with Hyper Pro Wall Mounts, Cassettes, Ducted, and Ceiling/Floor Systems
- Two-way draining
- Heating down to -22°F
- Golden Fin anti-corrosive coating
- Auto restart function
- Crank case & basepan heater included
- Auto defrost
- 24-Hour timer
- Wireless remote control included
- Low ambient cooling down to -22°F
- Up to 100% capacity at 5°F

Outdoor Unit	BZ33-HYP06OUT2-G2-P .3548002	BZ33-HYP09HPOUT2-P .3473411	BZ33-HYP09OUT2-G2-P .3548028	BZ33-HYP12HPOUT2-P .3473412	BZ33-HYP12OUT2-G2-P .3548025
Width (in)	30-1/10	31-1/2	31-7/10	31-1/2	31-7/10
Depth (in)	11-9/10	13-1/10	13	13-1/10	13
Height (in)	21-9/10	21-4/5	21-4/5	21-4/5	21-4/5
Weight (Lb)	69	93.7	80.25	93.7	79.37



COOLING

Capacity (BTU/H)	6,000	9,000	9,000	12,000	12,000
Range (BTU/H)	3,400-12,000	3,100-12,000	3,300-14,300	3,730-12,500	3,300-14,300
Input (W)	380	620	556	960	857
Current (A)	3.3	2.7	2.5	4.2	3.72
EER (BTU/W)	15.8	14.5	16.2	13	14
SEER (BTU/W)	26.5	25	28.1	22.5	25.5

HEATING

Capacity (BTU/H)	7,000	10,000	11,800	12,000	12,000
Range (BTU/H)	3,300-11,500	3,000-12,500	5,000-15,200	3,660-13,500	5,000-15,300
Input (W)	449	835	907	975	907
Current (A)	3.92	3.6	4.1	4.2	4.1
COP (W/W)	3.92	3.83	3.81	3.55	3.88
HSPF4 (BTU/W)	14	11.2	13	12	13
HSPF5 (BTU/W)	11	9	11	9.9	10.5

SPECIFICATIONS

Lineset	1/4 x 3/8	1/4 x 3/8	1/4 x 3/8	1/4 x 1/2	1/4 x 1/2
Power Supply	208/230V, 1 Phase	208/230V, 1 Phase	208/230V, 1 Phase	208/230V, 1 Phase	208/230V, 1 Phase
Refrigerant	R410A	R410A	R410A	R410A	R410A
Thermostat	Wireless Remote	Wireless Remote	Wireless Remote	Wireless Remote	Wireless Remote
Warranty	Yes*	Yes*	Yes*	Yes*	Yes*

*5 year warranty on parts. 7 year warranty on compressor.

HYPER PRO OUTDOOR MINI SPLIT SYSTEM

PREMIER SERIES



FEATURES

- Premier Series
- Compatible with Hyper Pro Wall Mounts, Cassettes, Ducted, and Ceiling/Floor Systems
- Two-way draining
- Heating down to -22°F
- Golden Fin anti-corrosive coating
- Auto restart function
- Crank case & basepan heater included
- Auto defrost
- 24-Hour timer
- Wireless remote control included
- Low ambient cooling down to -22°F
- Up to 100% capacity at 5°F

Outdoor Unit	BZ33-HYP18HPOUT2-P .3473413	BZ33-HYP18OUT2-G2-P .3548026	BZ33-HYP24HPOUT2-P .3478319	BZ33-HYP24OUT2-G2-P .3548027
Width (in)	33-1/4	35	37-1/4	37-1/4
Depth (in)	14-3/10	13-1/2	16-1/10	16-1/10
Height (in)	27-3/5	26-1/2	31-9/10	31-9/10
Weight (Lb)	115.1	108	148.81	144.4



COOLING

Capacity (BTU/H)	17,000	18,000	24,000	24,000
Range (BTU/H)	6,100-18,500	8,870-19,400	7,150-24,500	6,850-27,000
Input (W)	1,360	1,440	1,920	1,845
Current (A)	5.95	6.3	8.4	8.1
EER (BTU/W)	12.5	12.5	13	13
SEER (BTU/W)	20	21.5	20.5	21.5

HEATING

Capacity (BTU/H)	18,000	18,000	24,000	29,000
Range (BTU/H)	6,300-19,500	15,100-19,500	7,500-29,740	11,900-31,000
Input (W)	1,685	1,700	2,500	2,500
Current (A)	7.4	7.3	17.8	10.9
COP (W/W)	3.13	3.1	10.9	3.4
HSPF4 (BTU/W)	10.3	13	11.5	12
HSPF5 (BTU/W)	8.8	11	9.6	10

SPECIFICATIONS

Lineset	1/4 x 1/2	1/4 x 1/2	3/8 x 5/8	3/8 x 5/8
Power Supply	208/230, 1 Phase	208/230, 1 Phase	208/230V, 1 Phase	208/230V, 1 Phase
Refrigerant	R410A	R410A	R410A	R410A
Thermostat	Wireless Remote	Wireless Remote	Wireless Remote	Wireless Remote
Warranty	Yes*	Yes*	Yes*	Yes*

*5 year warranty on parts. 7 year warranty on compressor.

PREMIER SERIES



G1 System



G2 System

FEATURES

- Premier Series
- Compatible with Single-Zone Hyper Pro Outdoor, Multi-Zone Heat Pump, Hyper Pro Multi-Zone
- Two-way draining
- Heating down to -22°F
- Low ambient cooling down to -22°F
- Golden Fin anti-corrosive coating
- Occupancy and humidity sensor (G2 only)
- Auto restart function
- Auto defrost
- 24-Hour timer
- Wireless remote control included
- Compatible with BZ33-WCON1

Indoor Unit	BZ33-HYP06WALL2-G2-P .3548008	BZ33-HYP09WALL2-P .3473419	BZ33-HYP09WALL2-G2-P .3548024	BZ33-HYP12WALL2-P .3473420	BZ33-HYP12WALL2-G2-P .3548020
Width (In)	31-3/10	32-9/10	31-3/10	32-9/10	31-3/10
Depth (In)	8-9/10	7-4/5	8-9/10	7-4/5	8-9/10
Height (In)	11-3/5	11	11-3/5	11	11-3/5
Weight (Lb)	28.9	25.35	28.9	26.68	28.9



COOLING

Capacity (BTU/H)	6,000	9,000	9,000	12,000	12,000
Range (BTU/H)	3,400-12,000	3,100-12,000	3,300-14,300	3,730-12,500	3,300-14,300
Input (W)	380	620	556	960	857
Current (A)	3.3	2.7	2.5	4.2	3.72
EER (BTU/W)	15.8	14.5	16.2	13	14
SEER (BTU/W)	26.5	25	28.1	22.5	25.5

HEATING

Capacity (BTU/H)	7,000	10,000	11,800	12,000	12,000
Range (BTU/H)	3,300-11,500	3,000-12,500	5,000-15,200	3,660-13,500	5,000-15,300
Input (W)	449	835	907	975	907
Current (A)	3.92	3.6	4.1	4.2	4.1
COP (W/W)	3.92	3.83	3.81	3.55	3.88
HSPF4 (BTU/W)	14	11.2	13	12	13
HSPF5 (BTU/W)	11	9	11	9.9	10.5

SPECIFICATIONS

Lineset (In)	1/4 x 3/8	1/4 x 3/8	1/4 x 3/8	1/4 x 1/2	1/4 x 1/2
Power Supply	208/230V, 1 Phase	208/230V, 1 Phase	208/230V, 1 Phase	208/230V, 1 Phase	208/230V, 1 Phase
Refrigerant	R410A	R410A	R410A	R410A	R410A
Thermostat	Wireless Remote	Wireless Remote	Wireless Remote	Wireless Remote	Wireless Remote
Warranty	Yes*	Yes*	Yes*	Yes*	Yes*

*5 year warranty on parts. 7 year warranty on compressor.

HYPER PRO INDOOR MINI SPLIT SYSTEM

PREMIER SERIES



G1 System



G2 System

FEATURES

- Premier Series
- Compatible with Single-Zone Hyper Pro Outdoor, Multi-Zone Heat Pump and Hyper Pro Multi-Zone
- Two-way draining
- Heating down to -22°F
- Low ambient cooling down to -22°F
- Golden Fin anti-corrosive coating
- Occupancy and humidity sensor (G2 only)
- Auto restart function
- Auto defrost
- 24-Hour timer
- Wireless remote control included
- Compatible with BZ33-WCON1

Indoor Unit	BZ33-HYP18WALL2-P .3473423	BZ33-HYP18WALL2-G2-P .3548021	BZ33-HYP24WALL2-P .3473426	BZ33-HYP24WALL2-G2-P .3548036
Width (in)	39	38	46-7/10	44-9/10
Depth (in)	8-3/5	9-2/5	10-1/10	10-4/5
Height (in)	12-2/5	12-3/5	13-2/5	14-3/5
Weight (Lb)	34.83	35.71	50.3	54.89



COOLING

Capacity (BTU/H)	17,000	18,000	24,000	24,000
Range (BTU/H)	6,100-18,500	8,870-19,400	7,150-24,500	6,850-27,000
Input (W)	1,360	1,440	1,920	1,845
Current (A)	5.95	6.3	8.4	8.1
EER (BTU/W)	12.5	12.5	13	13
SEER (BTU/W)	20	21.5	20.5	21.5

HEATING

Capacity (BTU/H)	18,000	18,000	24,000	29,000
Range (BTU/H)	6,300-19,500	15,100-19,500	7,500-29,740	11,900-31,000
Input (W)	1,685	1,700	2,500	2,500
Current (A)	7.4	7.3		10.9
COP (W/W)	3.13	3.1	10.9	3.4
HSPF4 (BTU/W)	10.3	13	11.5	12
HSPF5 (BTU/W)	8.8	11	9.6	10

SPECIFICATIONS

Lineset (in)	1/4 x 1/2	1/4 x 1/2	3/8 x 5/8	3/8 x 5/8
Power Supply	208/230, 1 Phase	208/230, 1 Phase	208/230V, 1 Phase	208/230V, 1 Phase
Refrigerant	R410A	R410A	R410A	R410A
Thermostat	Wireless Remote	Wireless Remote	Wireless Remote	Wireless Remote
Warranty	Yes*	Yes*	Yes*	Yes*

*5 year warranty on parts. 7 year warranty on compressor.



G1 System



G2 System

Indoor Unit	BZ33-HYP30WALL2-G2-P .3547997	BZ33-HYP36WALL2-G2-P .3547998
Width (In)	46-9/10	46-9/10
Depth (In)	11-1/5	11-1/5
Height (In)	14-3/5	14-3/5
Weight (Lb)	54.89	54.89



PREMIER SERIES

FEATURES

- Premier Series
- Compatible with Single-Zone Hyper Pro Outdoor, Multi-Zone Heat Pump and Hyper Pro Multi-Zone
- Two-way draining
- Heating down to -22°F
- Low ambient cooling down to -22°F
- Golden Fin anti-corrosive coating
- Occupancy and humidity sensor (G2 only)
- Auto restart function
- Auto defrost
- 24-Hour timer
- Wireless remote control included
- Compatible with BZ33-WCON1

COOLING

Capacity (BTU/H)	30,000	36,000
Range (BTU/H)	9,070-30,700	9,300-38,800
Input (W)	2,605	4,235
Current (A)	11.4	18.5
EER (BTU/W)	11.5	8.5
SEER (BTU/W)	20	17.5

HEATING

Capacity (BTU/H)	30,000	36,000
Range (BTU/H)	8,600-34,800	11,570-37,000
Input (W)	3,380	4,200
Current (A)	14.7	18.3
COP (W/W)	2.6	2.51
HSPF4 (BTU/W)	9.6	9
HSPF5 (BTU/W)	8	7.4

SPECIFICATIONS

Lineset (In)	3/8 x 5/8	3/8 x 5/8
Power Supply	208/230V, 1 Phase	208/230V, 1 Phase
Refrigerant	R410A	R410A
Thermostat	Wireless Remote	Wireless Remote
Warranty	Yes*	Yes*

*5 year warranty on parts. 7 year warranty on compressor.

CASSETTE SYSTEM

PREMIER SERIES



FEATURES

- Premier Series
- Compatible with Single-Zone Hyper Pro Outdoor Units
- Heat Pump and Hyper Pro Multi-Zone Compatible
- 360° Air flow
- Electrical box within unit
- Optional fresh air intake
- 24-Hour timer
- Auto restart function
- Golden Fin anti-corrosive coating
- Built-in 28" vertical lift
- Independent vane control
- Wireless remote control included
- Front grill sold separately
- Compatible with BZ33-WCON1 and BZ33-WCON2

Indoor Unit	BZ33-CASS09-P .3473427	BZ33-CASS12-P .3473429	BZ33-CASS18-P .3473430	BZ33-CASS24-P .3473434	BZ33-CASS24-G2-P .3547996
Body Width (In)	22-1/5	22-2/5	22-2/5	33	32-7/10
Body Depth (In)	22-1/5	22-2/5	22-2/5	33	32-7/10
Body Height (In)	10-1/4	10-1/4	10-1/4	8	8
Body Weight (Lb)	41.88	41.88	46.3	52.91	55.34



Grill†	BZ33-GRILL1-P .3473437	BZ33-GRILL1-P .3473437	BZ33-GRILL1-P .3473437	BZ33-GRILL2-P .3473438	BZ33-GRILL2-G2-P .3548035
Grill Width (In)	25-1/2	25-1/2	25-1/2	37-2/5	37-2/5
Grill Depth (In)	25-1/2	25-1/2	25-1/2	37-2/5	37-2/5
Grill Height (In)	2	2	2	2-1/10	2-1/10
Grill Weight (Lb)	9.92	9.92	9.92	17.64	13.23



COOLING

Capacity (BTU/H)	9,000	12,000	16,000	24,000	24,000
Range (BTU/H)	3,250-9,500	3,850-13,000	5,650-18,000	7,300-24,200	8,000-25,000
EER (BTU/W)	13	12.5	12.5	19.0	11
SEER (BTU/W)	19.5	19	19	11.0	20.2

HEATING

Capacity (BTU/H)	10,000	12,000	18,000	24,000	25,000
Range (BTU/H)	3,050-10,500	4,000-14,890	5,200-20,000	7,100-29,000	11,840-27,000
HSPF4 (BTU/W)	10.0	10.0	9.6	10.5	11.6
HSPF5 (BTU/W)	8.1	8.2	8.3	9.0	9

SPECIFICATIONS

Lineset (In)	1/4 x 3/8	1/4 x 1/2	1/4 x 1/2	3/8 x 5/8	3/8 x 5/8
Power Supply	208/230V, 1 Phase	208/230V, 1 Phase	208/230V, 1 Phase	208/230V, 1 Phase	208/230V, 1 Phase
Controller	Wireless Remote	Wireless Remote	Wireless Remote	Wireless Remote	Wireless Remote
Warranty	Yes*	Yes*	Yes*	Yes*	Yes*

*5 year warranty on parts. 7 year warranty on compressor.

†Sold separately.

DUCTED SYSTEM



PREMIER SERIES

FEATURES

- Premier Series
- Compatible with Single-Zone Hyper Pro Outdoor Units
- Heat Pump and Hyper Pro Multi-Zone Compatible
- Auto defrost
- 24-Hour timer
- Auto restart function
- Optional fresh air intake
- Golden Fin anti-corrosive coating
- Variable static pressure control
- BZ33-WCON1 included
- Compatible with BZ33-WCON2

Indoor Unit	BZ33-DIDU9-P .3473440	BZ33-DIDU12-P .3473441	BZ33-DIDU18-P .3473443
Width (In)	27-3/5	27-1/2	34-7/10
Depth (In)	17-7/10	17-7/10	28-1/2
Height (In)	7-9/10	7-9/10	8-1/4
Weight (Lb)	48.2	48.3	66



COOLING

Capacity (BTU/H)	9,000	12,000	16,500
Range (BTU/H)	3,500-11,990	4,000-12,350	5,700-19,000
EER (BTU/W)	13.5	12.5	12.5
SEER (BTU/W)	23	20.5	19.6

HEATING

Capacity (BTU/H)	10,000	12,000	19,000
Range (BTU/H)	3,160-14,960	3,950-15,230	5,900-22,930
HSPF4 (BTU/W)	12.0	11.0	11.0
HSPF5 (BTU/W)	10.0	9.5	9.3

SPECIFICATIONS

Lineset (In)	1/4 x 3/8	1/4 x 1/2	1/4 x 1/2
Power Supply	208/230V, 1 Phase	208/230V, 1 Phase	208/230V, 1 Phase
Controller	Wired Remote	Wired Remote	Wired Remote
Warranty	Yes*	Yes*	Yes*

*5 year warranty on parts. 7 year warranty on compressor.

CEILING & FLOOR SYSTEM



PREMIER SERIES

FEATURES

- Premier Series
- Compatible with Single-Zone Hyper Pro Outdoor Units
- Heat Pump and Hyper Pro Multi-Zone Compatible
- Optional fresh air intake
- 24-Hour timer
- Auto restart function
- Golden Fin anti-corrosive coating
- Two-way draining
- Wireless remote control included
- Compatible with BZ33-WCON1 and BZ33-WCON2

Indoor Unit	BZ33-IFMU18-P .3473448
Width (in)	42
Depth (in)	9-1/4
Height (in)	26-3/5
Weight (Lb)	65.48



COOLING

Capacity (BTU/H)	17,000
Range (BTU/H)	5,270-18,000
EER (BTU/W)	12.5
SEER (BTU/W)	18.5

HEATING

Capacity (BTU/H)	18,000
Range (BTU/H)	5,040-18,900
HSPF4 (BTU/W)	10.0
HSPF5 (BTU/W)	8.7

SPECIFICATIONS

Lineset (in)	1/4 x 1/2
Power Supply	208/230V, 1 Phase
Controller	Wireless Remote
Warranty	Yes*

*5 year warranty on parts. 7 year warranty on compressor.



PREMIER SERIES

FEATURES

- Premier Series
- Compatible with Single-Zone Hyper Pro Outdoor Units
- Heat Pump and Hyper Pro Multi-Zone Compatible
- 24-Hour timer
- Auto restart function
- Golden Fin anti-corrosive coating
- Wireless remote control included
- Compatible with BZ33-WCON1

Indoor Unit	BZ33-ICM12-G2-P .3473446
Width (In)	27-3/5
Depth (In)	8-3/10
Height (In)	23-3/5
Weight (Lb)	41



COOLING

Capacity (BTU/H)	12,000
Range (BTU/H)	2,800-13,500
EER (BTU/W)	13
SEER (BTU/W)	23

HEATING

Capacity (BTU/H)	12,000
Range (BTU/H)	2,350-15,700
HSPF4 (BTU/W)	11.5
HSPF5 (BTU/W)	9.5

SPECIFICATIONS

Lineset (In)	1/4 x 1/2
Power Supply	208/230V, 1 Phase
Controller	Wireless Remote
Warranty	Yes*

*5 year warranty on parts. 7 year warranty on compressor.

AIR HANDLER



G1 System



G2 System

PREMIER SERIES

FEATURES

- Premier Series
- Auto restart function
- Golden Fin anti-corrosive coating
- Multi-position: upflow or horizontal left/right configuration, downflow (G2 only)
- Self-diagnosis and auto-protection
- Refrigerant leakage detect
- Error alarm
- Compatible with 36K & 48K Multi Zone Outdoor Units
- Compatible with 24K Hyper Pro Premier Series Outdoor Units

Indoor Unit	BZ33-MSAHU18-G2-P .3548029	BZ33-MSAHU24-P .3510122	BZ33-MSAHU24-G2-P .3548037
Width (in)	21	21	21
Depth (in)	17-1/2	19-3/5	17-1/2
Height (in)	45	48-4/5	45
Weight (Lb)	127.21	156.09	127.21



COOLING

Capacity (BTU/H)	18,000	20,800	23,000
Range (BTU/H)	6,800-20,000	7,500-26,000	7,500-26,000
Input (W)	1,440	1,660	1,840
Current (A)	9.1	7.6	9
EER (BTU/W)	12.5	12.5	12.5
SEER (BTU/W)	20	20	21

HEATING

Capacity (BTU/H)	19,000	29,000	26,000
Range (BTU/H)	5,800-21,000	5,600-35,000	5,600-29,000
Input (W)	1,540	2,440	2,130
Current (A)	9.3	10.7	10
COP (W)	3.62	3.48	3.58
HSPF4 (BTU/W)	10.8	10	11.6
HSPF5 (BTU/W)	9	7.5	9.5

SPECIFICATIONS

Lineset (in)	1/4 x 1/2	3/8 x 5/8	3/8 x 5/8
Power Supply	208/230V, 1 Phase	208/230V, 1 Phase	208/230V, 1 Phase
Controller	Wired	Wired	Wired
Warranty	Yes*	Yes*	Yes*


*5 year warranty on parts.

RECOMMENDED ACCESSORIES

Electric Heat Strip	BZ33-EHS05-P .3511348	BZ33-EHS10-P .3511349
Description	5kW, 208-230V	10kW, 208-230V



OUTDOOR HEAT PUMP **MULTI-ZONE UNIT**

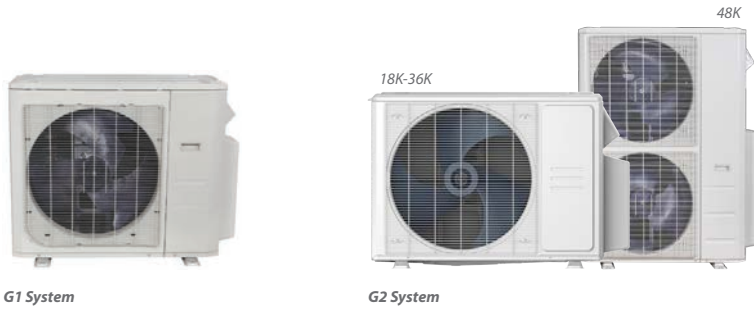

PREMIER SERIES

FEATURES

- Premier Series
- Multi-zone compatibility
- Space-saving installation
- Crank case & basepan heater included
- No branch box required
- Port adapters included
- Dual fan in BZ33HP48S2Z only

Outdoor Unit	BZ33-HP182Z2-P .3473414	BZ33-HP182Z2-G2-P .3548016	BZ33-HP273Z2-P .3473415	BZ33-HP273Z2-G2-P .3548017
Width (In)	33-1/4	35	37-1/4	37-1/4
Depth (In)	14-3/10	13-1/2	16-1/10	16-1/10
Height (In)	27-3/5	26-1/2	31-9/10	31-9/10
Weight (Lb)	114.64	108.69	160.94	150.57



COOLING

Capacity (BTU/H)	18,000	18,000	28,000	28,000
Range (BTU/H)	5,600-21,540	5,650-22,000	6,000-32,750	9,838-30,438
Input (W)	1,440	1,355	2,240	2,240
Current (A)	6.3	6.2	9.7	11
EER (BTU/W)	12.5	13	12.5	12.5
SEER (BTU/W)	22.5	23	23	23.8

HEATING

Capacity (BTU/H)	19,000	19,000	28,000	28,000
Range (BTU/H)	5,760-23,960	5,050-24,400	6,010-37,950	8,218-31,000
Input (W)	1,547	1,420	2,104	2,200
Current (A)	6.7	6.3	9.1	10.5
COP (W)	3.6	3.9	3.9	3.73
HSPF4 (BTU/W)	10.3	10.6	10.3	10.5
HSPF5 (BTU/W)	8.8	8.5	8.5	8.8

SPECIFICATIONS

Lineset (In)	1/4 x 3/8	2 x 1/4 or 2 x 3/8	1/4 x 3/8	3 x 1/4 or 3 x 3/8
Zones	2	2	3	3
Power Supply	208/230V, 1 Phase	208/230V, 1 Phase	208/230V, 1 Phase	208/230V, 1 Phase
Refrigerant	R410A	R410A	R410A	R410A
Warranty	Yes*	Yes*	Yes*	Yes*

*5 year warranty on parts. 7 year warranty on compressor.

OUTDOOR HEAT PUMP MULTI-ZONE UNIT



PREMIER SERIES

FEATURES

- Premier Series
- Multi-zone compatibility
- Space-saving installation
- Crank case & basepan heater included
- No branch box required
- Port adapters included
- Dual fan in BZ33HP364Z2 and BZ33HP485Z2 only

Outdoor Unit	BZ33-HP364Z2-P .3473416	BZ33-HP364Z2-G2-P .3548018	BZ33-HP485Z2-P .3473417	BZ33-HP485Z2-G2-P .3548019
Width (in)	37-1/4	37-1/4	37-1/2	37-1/2
Depth (in)	16-1/10	16-1/10	16-3/10	16-3/10
Height (in)	31-9/10	31-9/10	52-1/2	52-1/2
Weight (Lb)	167.55	181.44	255.07	256.62



COOLING

Capacity (BTU/H)	36,000	36,000	48,000	48,000
Range (BTU/H)	10,800-38,820	8,209-40,555	14,500-53,160	19,000-50,000
Input (W)	3,130	3,125	3,840	3,840
Current (A)	13.6	13.6	16.7	16.8
EER (BTU/W)	11.5	11.5	12.5	12.5
SEER (BTU/W)	22.5	23	22.4	22.4

HEATING

Capacity (BTU/H)	36,000	37,000	48,000	48,000
Range (BTU/H)	11,000-37,950	8,008-44,632	14,000-56,950	12,500-52,000
Input (W)	3,103	3,000	3,908	3,910
Current (A)	13.5	13	17	17.1
COP (W)	3.4	3.61	3.6	3.6
HSPF4 (BTU/W)	10.2	11.3	10.2	11
HSPF5 (BTU/W)	8.7	9.2	8.3	8.8

SPECIFICATIONS

Lineset (in)	4 x 1/4 or 3 x 3/8 or 1 x 1/2	4 x 1/4 or 3 x 3/8 or 1 x 1/2	5 x 1/4 or 3 x 3/8 or 2 x 1/2	5 x 1/4 or 3 x 3/8 or 2 x 1/2
Zones	4	4	5	5
Power Supply	208/230V, 1 Phase	208/230V, 1 Phase	208/230V, 1 Phase	208/230V, 1 Phase
Refrigerant	R410A	R410A	R410A	R410A
Warranty	Yes*	Yes*	Yes*	Yes*

*5 year warranty on parts. 7 year warranty on compressor.

HYPER PRO OUTDOOR MULTI-ZONE UNIT



PREMIER SERIES

FEATURES

- Premier Series
- Multi-zone compatibility
- Space-saving installation
- Crank case & basepan heater included
- No branch box required
- Port adapters included
- Heating and cooling operation down to -22°F
- Up to 100% rated capacity at 5°F
- Dual fan in BZ33-HYP36HP4Z2 and BZ33-HYP48HP5Z2 models only

Outdoor Unit	BZ33-HYP18HP2Z2-P .3481265	BZ33-HYP18Z2Z2-G2-P .3547992	BZ33-HYP27HP3Z2-P .3481263	BZ33-HYP273Z2Z2-G2-P .3547993
Width (in)	37-1/4	37-1/4	37-1/4	37-1/4
Depth (in)	14	16-1/10	16-1/10	16-1/10
Height (in)	31-9/10	31-9/10	31-9/10	31-9/10
Weight (Lb)	160.94	149.03	167.55	179.7



COOLING

Capacity (BTU/H)	19,000	19,000	28,000	28,000
Range (BTU/H)	5,500-18,220	5,500-25,000	6,200-27,330	7,995-32,826
Input (W)	1,520	1,520	2,154	2,240
Current (A)	6.6	9.1	9.4	12.4
EER (BTU/W)	12.5	12.5	13	12.5
SEER (BTU/W)	21.5	22	22	22.5

HEATING

Capacity (BTU/H)	20,000	20,000	28,000	28,000
Range (BTU/H)	6,020-21,086	8,100-29,700	5,820-37,720	5,035-38,712
Input (W)	1,724	1,725	2,345	2,240
Current (A)	7.5	9.4	10.2	10.5
COP (W)	3.4	3.4	3.5	3.7
HSPF4 (BTU/W)	9.8	10.2	10.4	11.3
HSPF5 (BTU/W)	8.5	8.7	9	9

SPECIFICATIONS

Lineset (in)	1/4 x 3/8	2 x 1/4 or 2 x 3/8	1/4 x 3/8	3 x 1/4 or 3 x 3/8
Zones	2	2	3	3
Power Supply	208/230V, 1 Phase	208/230V, 1 Phase	208/230V, 1 Phase	208/230V, 1 Phase
Refrigerant	R410A	R410A	R410A	R410A
Warranty	Yes*	Yes*	Yes*	Yes*

*5 year warranty on parts. 7 year warranty on compressor.

HYPER PRO OUTDOOR MULTI-ZONE UNIT



PREMIER SERIES

FEATURES

- Premier Series
- Multi-zone compatibility
- Space-saving installation
- Crank case & basepan heater included
- No branch box required
- Port adapters included
- Heating and cooling operation down to -22°F
- Up to 100% rated capacity at 5°F
- Dual fan in BZ33-HYP36HP4Z2 and BZ33-HYP48HP5Z2 models only

Outdoor Unit	BZ33-HYP36HP4Z2-P .3481262	BZ33-HYP364Z2-G2-P .3547994	BZ33-HYP48HP5Z2-P .3494048	BZ33-HYP485Z2-G2-P .3547995
Width (in)	37-1/2	37-1/2	37-1/2	37-1/2
Depth (in)	16-3/10	16-3/10	16-3/10	16-3/10
Height (in)	52-1/2	52-1/2	52-1/2	52-1/2
Weight (Lb)	255.07	254	269.84	269.84



COOLING

Capacity (BTU/H)	36,000	36,000	48,000	48,000
Range (BTU/H)	11,500-36,030	17,900-42,000	15,300-51,000	19,300-51,000
Input (W)	2,667	2,650	4,150	4,150
Current (A)	11.6	11.8	18	18
EER (BTU/W)	13.5	13.6	11.6	11.6
SEER (BTU/W)	21.5	21.8	21.5	21.5

HEATING

Capacity (BTU/H)	36,000	36,500	49,000	49,000
Range (BTU/H)	12,000-50,350	12,500-49,000	14,500-60,000	11,500-58,000
Input (W)	2,777	2,780	4,000	4,000
Current (A)	12.1	12.2	17.8	17.8
COP (W)	3.8	3.9	3.59	3.59
HSPF4 (BTU/W)	10.5	11	10.3	11
HSPF5 (BTU/W)	8.5	9	8.6	9

SPECIFICATIONS

Lineset (in)	4 x 1/4 or 3 x 3/8 or 1 x 1/2	4 x 1/4 or 3 x 3/8 or 1 x 1/2	5 x 1/4 or 3 x 3/8 or 2 x 1/2	5 x 1/4 or 3 x 3/8 or 2 x 1/2
Zones	4	4	5	5
Power Supply	208/230V, 1 Phase	208/230V, 1 Phase	208/230V, 1 Phase	208/230V, 1 Phase
Refrigerant	R410A	R410A	R410A	R410A
Warranty	Yes*	Yes*	Yes*	Yes*

*5 year warranty on parts. 7 year warranty on compressor.

SINGLE-ZONE MINI SPLIT COMPATIBILITY GUIDE

OUTDOOR UNITS											
	HP09OUT1-G2-C HP09OUT1-C	HP12OUT1-G2-C HP12OUT1-C	HP18OUT2-G2-C HP18OUT2-C	HP24OUT2-G2-C HP24OUT2-C	HP30OUT2-G2-C HP30OUT2-C	HP36OUT2-G2-C HP36OUT2-C	HYP06OUT2-G2-P	HYP09OUT2-G2-P HYP09HPOUT2-P	HYP12OUT2-G2-P HYP12HPOUT2-P	HYP18OUT2-G2-P HYP18HPOUT2-P	HYP24OUT2-G2-P HYP24HPOUT2-P
CAS509-P								●			
CAS512-P									●		
CAS518-P										●	
CAS524-G2-P CAS524-P											●
DIDU9-P								●			
DIDU12-P									●		
DIDU18-P										●	
MSAHU18-G2-P										●	
MSAHU24-G2-P MSAHU24-P											●
HP09WALL1-G2-C HP09WALL1-C	●										
HP12WALL1-G2-C HP12WALL1-C		●									
HP18WALL2-G2-C HP18WALL2-C			●								
HP24WALL2-G2-C HP24WALL2-C				●							
HP30WALL2-G2-C HP30WALL2-C					●						
HP36WALL2-G2-C HP36WALL2-C						●					
HYP06WALL2-G2-P							●				
HYP09WALL2-G2-P HYP09WALL2-P								●			
HYP12WALL2-G2-P HYP12WALL2-P									●		
HYP18WALL2-G2-P HYP18WALL2-P										●	
HYP24WALL2-G2-P HYP24WALL2-P											●
ICM12-G2-P									●		
IFMU18-P										●	

INDOOR UNITS

INDOOR UNITS

OUTDOOR HYPER PRO MULTI-ZONE SYSTEMS

OUTDOOR HEAT PUMP MULTI-ZONE SYSTEMS

INDOOR UNITS	HP182Z2-G2-P HP182Z2-P	HP273Z2-G2-P HP273Z2-P	HP364Z2-G2-P HP364Z2-P	HP485Z2-G2-P HP485Z2-P	HYP18HP2Z2-G2-P HYP18HP2Z2-P	HYP27HP3Z2-G2-P HYP27HP3Z2-P	HYP36HP4Z2-G2-P HYP36HP4Z2-P	HYP48HP5Z2-G2-P HYP48HP5Z2-P
CASS09-P	●	●	●	●	●	●	●	●
CASS12-P	●	●	●	●	●	●	●	●
CASS18-P		●	●	●	●	●	●	●
CASS24-G2-P CASS24-P			●	●		●	●	●
DIDU9-P	●	●	●	●	●	●	●	●
DIDU12-P	●	●	●	●	●	●	●	●
DIDU18-P		●	●	●	●	●	●	●
MSAHU18-G2-P		●	●	●		●	●	●
MSAHU24-G2-P MSAHU24-P			●	●			●	●
HYP06WALL2-G2-P	●	●	●	●	●	●	●	●
HYP09WALL2-G2-P HYP09WALL2-P	●	●	●	●	●	●	●	●
HYP12WALL2-G2-P HYP12WALL2-P	●	●	●	●	●	●	●	●
HYP18WALL2-G2-P HYP18WALL2-P		●	●	●	●	●	●	●
HYP24WALL2-G2-P HYP24WALL2-P			●	●			●	●
HYP30WALL2-G2-P				●				●
HYP36WALL2-G2-P				●				●
ICM12-G2-P	●	●	●	●	●	●	●	●
IFMU18-P		●	●	●	●	●	●	●

INDOOR UNITS

HEAT PUMP MULTI-ZONE MATCH RULES

OUTDOOR UNIT	INDOOR UNIT	2-ZONE	3-ZONE	4-ZONE	5-ZONE
HP182Z2-G2-P HP182Z2-P	Wall Mount: 6K / 9K / 12K Cassette/Duct/Console: 9K / 12K	6 + 6	—	—	—
		6 + 9	—	—	—
		6 + 12	—	—	—
		9 + 9	—	—	—
		9 + 12	—	—	—
		12 + 12	—	—	—
HP273Z2-G2-P HP273Z2-P	Wall Mount: 6K / 9K / 12K / 18K Cassette/Duct/Ceiling & Floor/Console: 9K / 12K / 18K Air Handling Unit: 18K	6 + 9	6 + 6 + 6	—	—
		6 + 12	6 + 6 + 9	—	—
		6 + 18	6 + 6 + 12	—	—
		9 + 9	6 + 6 + 18	—	—
		9 + 12	6 + 9 + 9	—	—
		9 + 18	6 + 9 + 12	—	—
		12 + 12	6 + 9 + 18	—	—
		12 + 18	6 + 12 + 12	—	—
		18 + 18	6 + 12 + 18	—	—
		—	9 + 9 + 9	—	—
		—	9 + 9 + 12	—	—
		—	9 + 9 + 18	—	—
		—	9 + 12 + 12	—	—
		—	12 + 12 + 12	—	—
HP364Z2-G2-P HP364Z2-P	Wall Mount: 6K / 9K / 12K / 18K / 24K Cassette/Duct/Ceiling & Floor/Console: 9K / 12K / 18K / 24K Air Handling Unit: 18K / 24K	6 + 18	6 + 6 + 12	6 + 6 + 6 + 6	—
		6 + 24	6 + 6 + 18	6 + 6 + 6 + 9	—
		9 + 18	6 + 6 + 24	6 + 6 + 6 + 12	—
		9 + 24	6 + 9 + 12	6 + 6 + 6 + 18	—
		12 + 12	6 + 9 + 18	6 + 6 + 6 + 24	—
		12 + 18	6 + 9 + 24	6 + 6 + 9 + 9	—
		12 + 24	6 + 12 + 12	6 + 6 + 9 + 12	—
		18 + 18	6 + 12 + 18	6 + 6 + 9 + 18	—
		18 + 24	6 + 12 + 24	6 + 6 + 9 + 24	—
		24 + 24	6 + 18 + 18	6 + 6 + 12 + 12	—
		—	6 + 18 + 24	6 + 6 + 12 + 18	—
		—	9 + 9 + 9	6 + 6 + 12 + 24	—
		—	9 + 9 + 12	6 + 9 + 9 + 9	—
		—	9 + 9 + 18	6 + 9 + 9 + 12	—
		—	9 + 9 + 24	6 + 9 + 9 + 18	—
		—	9 + 12 + 12	6 + 9 + 9 + 24	—
		—	9 + 12 + 18	6 + 9 + 12 + 12	—
		—	9 + 12 + 24	6 + 9 + 12 + 18	—
		—	9 + 18 + 18	6 + 12 + 12 + 12	—
		—	12 + 12 + 12	6 + 12 + 12 + 18	—
		—	12 + 12 + 18	9 + 9 + 9 + 9	—
		—	12 + 12 + 24	9 + 9 + 9 + 12	—
		—	12 + 18 + 18	9 + 9 + 9 + 18	—
		—	—	9 + 9 + 12 + 12	—
		—	—	9 + 9 + 12 + 18	—
		—	—	9 + 12 + 12 + 12	—
		—	—	12 + 12 + 12 + 12	—

HEAT PUMP MULTI-ZONE MATCH RULES

OUTDOOR UNIT	INDOOR UNIT	2-ZONE	3-ZONE	4-ZONE	5-ZONE
HP485Z2-G2-P HP485Z2-P	Wall Mount: 6K / 9K / 12K / 18K / 24K Cassette/Duct/Ceiling & Floor/Console: 9K / 12K / 18K / 24K Air Handling Unit: 18K / 24K	9 + 24	6 + 6 + 24	6 + 6 + 6 + 18	6 + 6 + 6 + 6 + 9
		9 + 30	6 + 6 + 30	6 + 6 + 6 + 24	6 + 6 + 6 + 6 + 12
		9 + 36	6 + 6 + 36	6 + 6 + 6 + 30	6 + 6 + 6 + 6 + 18
		12 + 24	6 + 9 + 18	6 + 6 + 6 + 36	6 + 6 + 6 + 6 + 24
		12 + 30	6 + 9 + 24	6 + 6 + 9 + 18	6 + 6 + 6 + 6 + 30
		12 + 36	6 + 12 + 18	6 + 6 + 9 + 24	6 + 6 + 6 + 6 + 36
		18 + 18	6 + 12 + 24	6 + 6 + 9 + 30	6 + 6 + 6 + 9 + 9
		18 + 24	6 + 12 + 30	6 + 6 + 9 + 36	6 + 6 + 6 + 9 + 12
		18 + 30	6 + 12 + 36	6 + 6 + 12 + 12	6 + 6 + 6 + 9 + 18
		18 + 36	6 + 18 + 18	6 + 6 + 12 + 18	6 + 6 + 6 + 9 + 24
		24 + 30	6 + 18 + 24	6 + 6 + 12 + 24	6 + 6 + 6 + 9 + 30
		24 + 36	6 + 18 + 30	6 + 6 + 12 + 30	6 + 6 + 6 + 9 + 36
		30 + 30	6 + 18 + 36	6 + 6 + 12 + 36	6 + 6 + 6 + 12 + 12
		—	6 + 24 + 24	6 + 6 + 18 + 18	6 + 6 + 6 + 12 + 18
		—	6 + 24 + 30	6 + 6 + 18 + 24	6 + 6 + 6 + 12 + 24
		—	9 + 9 + 18	6 + 6 + 18 + 30	6 + 6 + 6 + 12 + 30
		—	9 + 9 + 24	6 + 6 + 24 + 24	6 + 6 + 6 + 18 + 18
		—	9 + 9 + 30	6 + 9 + 9 + 12	6 + 6 + 6 + 18 + 24
		—	9 + 9 + 36	6 + 9 + 9 + 18	6 + 6 + 9 + 9 + 9
		—	9 + 12 + 12	6 + 9 + 9 + 24	6 + 6 + 9 + 9 + 12
		—	9 + 12 + 18	6 + 9 + 9 + 30	6 + 6 + 9 + 9 + 18
		—	9 + 12 + 24	6 + 9 + 9 + 36	6 + 6 + 9 + 9 + 24
		—	9 + 12 + 30	6 + 9 + 12 + 12	6 + 6 + 9 + 9 + 30
		—	9 + 12 + 36	6 + 9 + 12 + 18	6 + 6 + 9 + 12 + 12
		—	9 + 18 + 18	6 + 9 + 12 + 24	6 + 6 + 9 + 12 + 18
		—	9 + 18 + 24	6 + 9 + 12 + 30	6 + 6 + 9 + 12 + 24
		—	9 + 18 + 30	6 + 9 + 12 + 36	6 + 6 + 9 + 12 + 30
		—	9 + 18 + 36	6 + 9 + 18 + 18	6 + 6 + 9 + 18 + 18
		—	9 + 24 + 24	6 + 9 + 18 + 24	6 + 6 + 9 + 18 + 24
		—	9 + 24 + 30	6 + 9 + 18 + 30	6 + 6 + 12 + 12 + 12
		—	12 + 12 + 12	6 + 12 + 12 + 12	6 + 6 + 12 + 12 + 18
		—	12 + 12 + 18	6 + 12 + 12 + 18	6 + 6 + 12 + 12 + 24
		—	12 + 12 + 24	6 + 12 + 12 + 24	6 + 6 + 12 + 18 + 18
		—	12 + 12 + 30	6 + 12 + 12 + 30	6 + 9 + 9 + 9 + 9
		—	12 + 12 + 36	6 + 12 + 18 + 18	6 + 9 + 9 + 9 + 12
		—	12 + 18 + 18	6 + 12 + 18 + 24	6 + 9 + 9 + 9 + 18
		—	12 + 18 + 24	9 + 9 + 9 + 9	6 + 9 + 9 + 9 + 24
		—	12 + 18 + 30	9 + 9 + 9 + 12	6 + 9 + 9 + 9 + 30
		—	12 + 24 + 24	9 + 9 + 9 + 18	6 + 9 + 9 + 12 + 12
		—	18 + 18 + 18	9 + 9 + 9 + 24	6 + 9 + 9 + 12 + 18
		—	18 + 18 + 24	9 + 9 + 9 + 30	6 + 9 + 9 + 12 + 24
		—	—	9 + 9 + 9 + 36	6 + 9 + 9 + 18 + 18
		—	—	9 + 9 + 12 + 12	6 + 9 + 12 + 12 + 12
		—	—	9 + 9 + 12 + 18	6 + 9 + 12 + 12 + 18
		—	—	9 + 9 + 12 + 24	6 + 9 + 12 + 12 + 24
		—	—	9 + 9 + 12 + 30	6 + 12 + 12 + 12 + 12
		—	—	9 + 9 + 18 + 18	6 + 12 + 12 + 12 + 18
		—	—	9 + 9 + 18 + 24	9 + 9 + 9 + 9 + 9
		—	—	9 + 12 + 12 + 12	9 + 9 + 9 + 9 + 12
		—	—	9 + 12 + 12 + 18	9 + 9 + 9 + 9 + 18
		—	—	9 + 12 + 12 + 24	9 + 9 + 9 + 9 + 24
		—	—	9 + 12 + 12 + 30	9 + 9 + 9 + 12 + 12
		—	—	9 + 12 + 18 + 18	9 + 9 + 9 + 12 + 18
		—	—	9 + 12 + 18 + 24	9 + 9 + 9 + 12 + 24
		—	—	12 + 12 + 12 + 12	9 + 9 + 12 + 12 + 12
		—	—	12 + 12 + 12 + 18	9 + 9 + 12 + 12 + 18
		—	—	12 + 12 + 12 + 24	9 + 12 + 12 + 12 + 12
		—	—	12 + 12 + 18 + 18	12 + 12 + 12 + 12 + 12

OUTDOOR UNIT	INDOOR UNIT	2-ZONE	3-ZONE	4-ZONE	5-ZONE
HYP18HP2Z2-G2-P HYP18HP2Z2-P	Wall Mount: 6K / 9K / 12K Cassette/Duct/Console: 9K / 12K	6 + 6	—	—	—
		6 + 9	—	—	—
		6 + 12	—	—	—
		9 + 9	—	—	—
		9 + 12	—	—	—
		12 + 12	—	—	—
HYP27HP3Z2-G2-P HYP27HP3Z2-P	Wall Mount: 6K / 9K / 12K / 18K Cassette/Duct/Ceiling & Floor/Console: 9K / 12K / 18K Air Handling Unit: 18K	6 + 12	6 + 6 + 6	—	—
		6 + 18	6 + 6 + 9	—	—
		9 + 9	6 + 6 + 12	—	—
		9 + 12	6 + 6 + 18	—	—
		9 + 18	6 + 9 + 9	—	—
		12 + 12	6 + 9 + 12	—	—
		12 + 18	6 + 9 + 18	—	—
		18 + 18	6 + 12 + 12	—	—
		—	6 + 12 + 18	—	—
		—	9 + 9 + 9	—	—
		—	9 + 9 + 12	—	—
		—	9 + 9 + 18	—	—
		—	9 + 12 + 12	—	—
		—	12 + 12 + 12	—	—
HYP36HP4Z2-G2-P HYP36HP4Z2-P	Wall Mount: 6K / 9K / 12K / 18K 24K / 30K / 36K Cassette/Duct/Ceiling & Floor/Console: 9K / 12K / 18K / 24K Air Handling Unit: 18K / 24K	6 + 18	6 + 6 + 12	6 + 6 + 6 + 6	—
		6 + 24	6 + 6 + 18	6 + 6 + 6 + 9	—
		9 + 18	6 + 6 + 24	6 + 6 + 6 + 12	—
		9 + 24	6 + 9 + 12	6 + 6 + 6 + 18	—
		12 + 12	6 + 9 + 18	6 + 6 + 6 + 24	—
		12 + 18	6 + 9 + 24	6 + 6 + 9 + 9	—
		12 + 24	6 + 12 + 12	6 + 6 + 9 + 12	—
		18 + 18	6 + 12 + 18	6 + 6 + 9 + 18	—
		18 + 24	6 + 12 + 24	6 + 6 + 9 + 24	—
		24 + 24	6 + 18 + 18	6 + 6 + 12 + 12	—
		—	6 + 18 + 24	6 + 6 + 12 + 18	—
		—	9 + 9 + 9	6 + 6 + 12 + 24	—
		—	9 + 9 + 12	6 + 9 + 9 + 9	—
		—	9 + 9 + 18	6 + 9 + 9 + 12	—
		—	9 + 9 + 24	6 + 9 + 9 + 18	—
		—	9 + 12 + 12	6 + 9 + 9 + 24	—
		—	9 + 12 + 18	6 + 9 + 12 + 12	—
		—	9 + 12 + 24	6 + 9 + 12 + 18	—
		—	9 + 18 + 18	6 + 12 + 12 + 12	—
		—	12 + 12 + 12	6 + 12 + 12 + 18	—
		—	12 + 12 + 18	9 + 9 + 9 + 9	—
		—	12 + 12 + 24	9 + 9 + 9 + 12	—
		—	12 + 18 + 18	9 + 9 + 9 + 18	—
		—	—	9 + 9 + 12 + 12	—
		—	—	9 + 9 + 12 + 18	—
		—	—	9 + 12 + 12 + 12	—
		—	—	12 + 12 + 12 + 12	—

HYPER PRO MULTI-ZONE MATCH RULES

OUTDOOR UNIT	INDOOR UNIT	2-ZONE	3-ZONE	4-ZONE	5-ZONE
HYP48HP5Z2-G2-P HYP48HP5Z2-P	Wall Mount: 6K / 9K / 12K / 18K 24K / 30K / 36K Cassette/Duct/Ceiling & Floor/Console: 9K / 12K / 18K / 24K Air Handling Unit: 18K / 24K	9 + 24	6 + 6 + 24	6 + 6 + 6 + 18	6 + 6 + 6 + 6 + 9
		9 + 30	6 + 6 + 30	6 + 6 + 6 + 24	6 + 6 + 6 + 6 + 12
		9 + 36	6 + 6 + 36	6 + 6 + 6 + 30	6 + 6 + 6 + 6 + 18
		12 + 24	6 + 9 + 24	6 + 6 + 6 + 36	6 + 6 + 6 + 6 + 24
		12 + 30	6 + 9 + 30	6 + 6 + 9 + 18	6 + 6 + 6 + 6 + 30
		12 + 36	6 + 9 + 36	6 + 6 + 9 + 24	6 + 6 + 6 + 6 + 36
		18 + 18	6 + 12 + 18	6 + 6 + 9 + 30	6 + 6 + 6 + 9 + 9
		18 + 24	6 + 12 + 24	6 + 6 + 9 + 36	6 + 6 + 6 + 9 + 12
		18 + 30	6 + 12 + 30	6 + 6 + 12 + 12	6 + 6 + 6 + 9 + 18
		18 + 36	6 + 12 + 36	6 + 6 + 12 + 18	6 + 6 + 6 + 9 + 24
		24 + 30	6 + 18 + 18	6 + 6 + 12 + 24	6 + 6 + 6 + 9 + 30
		24 + 36	6 + 18 + 24	6 + 6 + 12 + 30	6 + 6 + 6 + 9 + 36
		30 + 30	6 + 18 + 30	6 + 6 + 12 + 36	6 + 6 + 6 + 12 + 12
		—	6 + 18 + 36	6 + 6 + 18 + 18	6 + 6 + 6 + 12 + 18
		—	6 + 24 + 24	6 + 6 + 18 + 24	6 + 6 + 6 + 12 + 24
		—	6 + 24 + 30	6 + 6 + 18 + 30	6 + 6 + 6 + 12 + 30
		—	9 + 9 + 18	6 + 6 + 24 + 24	6 + 6 + 6 + 18 + 18
		—	9 + 9 + 24	6 + 9 + 9 + 12	6 + 6 + 6 + 18 + 24
		—	9 + 9 + 30	6 + 9 + 9 + 18	6 + 6 + 9 + 9 + 9
		—	9 + 9 + 36	6 + 9 + 9 + 24	6 + 6 + 9 + 9 + 12
		—	9 + 12 + 12	6 + 9 + 9 + 30	6 + 6 + 9 + 9 + 18
		—	9 + 12 + 18	6 + 9 + 9 + 36	6 + 6 + 9 + 9 + 24
		—	9 + 12 + 24	6 + 9 + 12 + 12	6 + 6 + 9 + 9 + 30
		—	9 + 12 + 30	6 + 9 + 12 + 18	6 + 6 + 9 + 12 + 12
		—	9 + 12 + 36	6 + 9 + 12 + 24	6 + 6 + 9 + 12 + 18
		—	9 + 18 + 18	6 + 9 + 12 + 30	6 + 6 + 9 + 12 + 24
		—	9 + 18 + 24	6 + 9 + 12 + 36	6 + 6 + 9 + 12 + 30
		—	9 + 18 + 30	6 + 9 + 18 + 18	6 + 6 + 9 + 18 + 18
		—	9 + 18 + 36	6 + 9 + 18 + 24	6 + 6 + 9 + 18 + 24
		—	9 + 24 + 24	6 + 9 + 18 + 30	6 + 6 + 12 + 12 + 12
		—	9 + 24 + 30	6 + 12 + 12 + 12	6 + 6 + 12 + 12 + 18
		—	12 + 12 + 12	6 + 12 + 12 + 18	6 + 6 + 12 + 12 + 24
		—	12 + 12 + 24	6 + 12 + 12 + 24	6 + 6 + 12 + 18 + 18
		—	12 + 12 + 30	6 + 12 + 12 + 30	6 + 9 + 9 + 9 + 9
		—	12 + 12 + 36	6 + 12 + 18 + 18	6 + 9 + 9 + 9 + 12
		—	12 + 18 + 18	6 + 12 + 18 + 24	6 + 9 + 9 + 9 + 18
		—	12 + 18 + 24	9 + 9 + 9 + 9	6 + 9 + 9 + 9 + 24
		—	12 + 18 + 30	9 + 9 + 9 + 12	6 + 9 + 9 + 9 + 30
		—	12 + 24 + 24	9 + 9 + 9 + 18	6 + 9 + 9 + 12 + 12
		—	18 + 18 + 18	9 + 9 + 9 + 24	6 + 9 + 9 + 12 + 18
		—	18 + 18 + 24	9 + 9 + 9 + 30	6 + 9 + 9 + 12 + 24
		—	—	9 + 9 + 9 + 36	6 + 9 + 9 + 18 + 18
		—	—	9 + 9 + 12 + 12	6 + 9 + 12 + 12 + 12
		—	—	9 + 9 + 12 + 18	6 + 9 + 12 + 12 + 18
		—	—	9 + 9 + 12 + 24	6 + 9 + 12 + 12 + 24
		—	—	9 + 9 + 12 + 30	6 + 12 + 12 + 12 + 12
		—	—	9 + 9 + 18 + 18	6 + 12 + 12 + 12 + 18
		—	—	9 + 9 + 18 + 24	9 + 9 + 9 + 9 + 9
		—	—	9 + 12 + 12 + 12	9 + 9 + 9 + 9 + 12
		—	—	9 + 12 + 12 + 18	9 + 9 + 9 + 9 + 18
		—	—	9 + 12 + 12 + 24	9 + 9 + 9 + 9 + 24
		—	—	9 + 12 + 12 + 30	9 + 9 + 9 + 12 + 12
		—	—	9 + 12 + 18 + 18	9 + 9 + 9 + 12 + 18
		—	—	9 + 12 + 18 + 24	9 + 9 + 9 + 12 + 24
		—	—	12 + 12 + 12 + 12	9 + 9 + 12 + 12 + 12
		—	—	12 + 12 + 12 + 18	9 + 9 + 12 + 12 + 18
		—	—	12 + 12 + 12 + 24	9 + 12 + 12 + 12 + 12
		—	—	12 + 12 + 18 + 18	12 + 12 + 12 + 12 + 12

MINI SPLIT LINESET COVERS



COVER DUCT

- UV resistant
- Min. -4°F to 140°F max. in a static position



LINE COVER TEE

- UV resistant
- Reduces multi-split unit duct to single-unit installation
- Min. -4°F to 140°F max. in a static position



90° FLAT BEND

- UV resistant
- Min. -4°F to max. 140°F in a static position

Unit	BZ33-LC100D .3538203
Description	4" x 3"



Unit	BZ33-LC100TEE .3538223
Description	Compatible with LC100 Line Cover



Unit	BZ33-LC10090F .3555601
Description	Compatible with LC100 Line Cover



Unit	BZ33-LC150D .3538207
Description	6" x 3.25"



Unit	BZ33-LC150TEE .3538224
Description	Compatible with LC150 Line Cover



Unit	BZ33-LC15090F .3555602
Description	Compatible with LC150 Line Cover



DUCT CAP

- UV resistant
- Min. -4°F to max. 140°F in a static position



45° FLAT BEND

- UV resistant
- Min. -4°F to max. 140°F in a static position



DUCT END

- UV resistant
- Min. -4°F to 140°F max. in a static position

Unit	BZ33-LC100CAP .3538226
Description	Compatible with LC100 Line Cover



Unit	BZ33-LC10045F .3538217
Description	Compatible with LC100 Line Cover



Unit	BZ33-LC100END .3538228
Description	Compatible with LC100 Line Cover



Unit	BZ33-LC150CAP .3538227
Description	Compatible with LC150 Line Cover



Unit	BZ33-LC15045F .3538218
Description	Compatible with LC150 Line Cover



Unit	BZ33-LC150END .3538229
Description	Compatible with LC150 Line Cover



COVER CONNECTOR

- UV resistant
- Min. -4°F to 140°F max. in a static position



WALL COVER

- UV resistant
- Wall inlet cover
- Min. -4°F to 140°F max. in a static position



90° INSIDE ELBOW BEND

- UV resistant
- Min. -4°F to 140°F max. in a static position

Unit	BZ33-LC100CON .3538212
Description	Compatible with LC100 Line Cover



Unit	BZ33-LC100WH .3538210
Description	Compatible with LC100 Line Cover



Unit	BZ33-LC10090IN .3538221
Description	Compatible with LC100 Line Cover



Unit	BZ33-LC150CON .3538213
Description	Compatible with LC150 Line Cover



Unit	BZ33-LC150WH .3538211
Description	Compatible with LC150 Line Cover



Unit	BZ33-LC15090IN .3538222
Description	Compatible with LC150 Line Cover



MINI SPLIT LINESET COVERS



- 90° OUTSIDE ELBOW BEND**
- UV resistant
 - Min. -4°F to 140°F max. in a static position

Unit	BZ33-LC10090OUT .3538219
Description	Compatible with LC100 Line Cover



- FLAT COVER**
- UV resistant
 - Min. -4°F to 140°F max. in a static position

Unit	BZ33-LC100FLT .3538214
Description	Compatible with LC100 Line Cover



- ADJUSTABLE FLAT BEND**
- UV resistant
 - Adjustable between 90° and 135°
 - Min. -4°F to max. 140°F in a static position

Unit	BZ33-LC100ADJ .3538216
Description	Compatible with LC100 Line Cover



Unit	BZ33-LC15090OUT .3538220
Description	Compatible with LC150 Line Cover



Unit	BZ33-LC150FLT .3538215
Description	Compatible with LC150 Line Cover



- REDUCER JOINT**
- UV resistant
 - Min. -4°F to max. 140°F in a static position

Unit	BZ33-LC100RED .3538225
Description	Compatible with LC100 Line Cover



- WALL SLEEVE**
- Protects insulation of lineset tubes from damage when passing through a wall
 - Collar covers indoor drill imperfections

Unit	BZ33-WSLV .3538232
Description	—



- SPIN IN CLIP**
- UV resistant
 - Min. -4°F to 140°F max. in a static position

Unit	BZ33-LCCLIP .3538208
Description	Compatible with LC100 Line Cover



- FLEXIBLE HOSE KIT**
- UV resistant
 - 1 flexible hose, 2 flex connectors, 1 flex end & 1 stainless steel clamp
 - Min. -4°F to 140°F max. in a static position

Unit	BZ33-100FHK .3538209
Description	39.4" Hose length



PORTABLE AIR CONDITIONERS



**COOLING FROM 550 TO 700 SQ. FT.
12,000 TO 14,000 BTU/H**

FEATURES

- 3-in-1 or 4-in-1 Comfort: cools, dehumidifies and vents; heating available on BZ3313PHP only
- Easy mobility
- Comfort sleep setting
- Programmable timer
- Air conditioning condensate slinger
- Wireless remote controller included

Unit	BZ3312PAC-G2 .3509676	BZ3313PHP .3509733
Width (in)	17-9/10	18-2/5
Depth (in)	14-1/3	15-3/5
Height (in)	27-2/3	30
Weight (Lb)	73.19	89.71



PERFORMANCE

Cooling (BTU/H)	12,000	13,500
Heating (BTU/H)	—	11,000
EER	9.0	9.89
Room (Sq Ft)	550	700

ELECTRICAL

Power Supply	115V~60Hz	115V~60Hz
Plug Type	5-15P	5-15P

FEATURES

Remote Control	●	●
Venting Kit	●	●
Fan Speeds	3	3
Cooling Settings	3	3
Comfort Sleep	●	●
Timer	●	●
Venting Kit	●	●
Warranty*	●	●
Certifications	cULus	cULus

*1 year warranty on parts. 5 year warranty on compressor.

THROUGH THE WALL AIR CONDITIONERS



**COOLING FROM 300 TO 700 SQ. FT.
8,300 TO 14,000 BTU/H**

FEATURES

- 3-in-1 Comfort: cools, dehumidifies and vents
- Fits in most existing wall sleeves
- Quick install
- Air conditioning condensate slinger
- Wireless remote controller included
- Wall sleeve available (sold separately, see page 36)

Unit	BZ338TWAC1 .3468722	BZ3310TWAC1 .3468726	BZ3310TWAC2 .3468727	BZ3312TWAC1 .3468730	BZ3312TWAC2 .3468732	BZ3314TWAC2 .3468738
Width (in)	24-1/5	24-1/5	24-1/5	24-1/5	24-1/5	24-1/5
Depth (in)	20-3/10	20-3/10	20-3/10	20-3/10	20-3/10	20-3/10
Height (in)	14-1/2	14-1/2	14-1/2	14-1/2	14-1/2	14-1/2
Weight (Lb)	78	80	80.5	89.5	87.1	85.5



PERFORMANCE

Cooling (BTU/H)	8,300	10,000	10,000	12,000	12,000	14,000
Heating (BTU/H)	—	—	—	—	—	—
CEER	10.6	10.6	10.6	10.5	10.5	9.3
EER	10.6	10.6	10.6	10.5	10.5	9.3
Room (Sq Ft)	300-350	400-450	400-450	450-550	450-550	550-700

ELECTRICAL

Power Supply	115V~60Hz	115V~60Hz	230/208V~60Hz	115V~60Hz	230/208V~60Hz	230/208V~60Hz
Plug Type	5-15P	5-15P	6-15P	5-15P	6-15P	6-15P

FEATURES

Remote Control	●	●	●	●	●	●
Energy Saver	●	●	●	●	●	●
ENERGY STAR®	●	●	●	●	●	●
Auto Restart	●	●	●	●	●	●
Sleep Mode	●	●	●	●	●	●
Filter Monitor	●	●	●	●	●	●
Timer	●	●	●	●	●	●
Fan Speeds	3	3	3	3	3	3
Slide-out Chassis	●	●	●	●	●	●
Washable Filter	●	●	●	●	●	●
Warranty*	●	●	●	●	●	●
Certifications	cULus	cULus	cULus	cULus	cULus	cULus

*1 year warranty on parts. 5 year warranty on compressor.

THROUGH THE WALL AIR CONDITIONERS



**COOLING FROM 300 TO 700 SQ. FT.
8,000 TO 14,000 BTU/H**

FEATURES

- 4-in-1 Comfort: cools, heats, dehumidifies and vents
- Quick install
- Fits in most existing wall sleeves
- Air conditioning condensate slinger
- Wireless remote controller included
- Wall sleeve available (sold separately, see page 36)

Unit	BZ338TWHC1 .3468723	BZ3312TWHC2 .3468734	BZ3314TWHC2 .3468740
Width (in)	24-1/5	24-1/5	24-1/5
Depth (in)	20-3/10	20-3/10	20-3/10
Height (in)	14-1/2	14-1/2	14-1/2
Weight (Lb)	78	89.3	90.6



PERFORMANCE

Cooling (BTU/H)	8,000	12,000	14,000
Heating (BTU/H)	4,200	10,600	10,600
CEER	9.6	9.5	9.3
EER	9.6	9.5	9.3
Room (Sq Ft)	300-350	450-550	550-700

ELECTRICAL

Power Supply	115V~60Hz	230/208V~60Hz	230/208V~60Hz
Plug Type	5-15P	6-20P	6-20P

FEATURES

Remote Control	●	●	●
Energy Saver	●	●	●
ENERGY STAR®	—	—	—
Auto Restart	●	●	●
Sleep Mode	●	●	●
Filter Monitor	●	●	●
Timer	●	●	●
Fan Speeds	3	3	3
Slide-out Chassis	●	●	●
Washable Filter	●	●	●
Warranty*	●	●	●
Certifications	cULus	cULus	cULus

*1 year warranty on parts. 5 year warranty on compressor.

WINDOW AIR CONDITIONERS



**COOLING FROM 150 TO 1,500 SQ. FT.
6,000 TO 25,000 BTU/H**

FEATURES

- 3-in-1 Comfort: cools, dehumidifies and vents
- Quick install
- Air conditioning condensate slinger
- Wireless remote controller included

Unit	BZ336WAC1 .3468752	BZ3310WAC1 .3468754	BZ3312WAC1 .3468755	BZ3315WAC1 .3468756	BZ3318WAC2 .3468757	BZ3325WAC2 .3468758
Width (in)	18-1/2	19	19	23-3/5	23-3/5	26-1/2
Depth (in)	15-3/4	21-1/2	21-1/2	25-2/5	25-2/5	26-1/2
Height (in)	13-2/5	14-7/10	14-3/5	18	18	18-3/5
Weight (Lb)	48.5	63.9	75	118	129	151.5



PERFORMANCE

Cooling (BTU/H)	6,000	10,000	12,000	15,100	18,000	25,000
Heating (BTU/H)	—	—	—	—	—	—
CEER	12.1	12	12	11.8	11.8	10.3
EER	12.2	12	12	11.9	11.8	10.3
Room (Sq Ft)	150-250	400-450	450-550	550-700	700-1,000	1,400-1,500

ELECTRICAL

Power Supply	115V~60Hz	115V~60Hz	115V~60Hz	115V~60Hz	230/208V~60Hz	230/208V~60Hz
Plug Type	5-15P	5-15P	5-15P	5-15P	6-15P	6-20P

FEATURES

Remote Control	●	●	●	●	●	●
Energy Saver	●	●	●	●	●	●
ENERGY STAR®	●	●	●	●	●	●
Auto Restart	●	●	●	●	●	●
Sleep Mode	●	●	●	●	●	●
Filter Monitor	●	●	●	●	●	●
Timer	●	●	●	●	●	●
Fan Speeds	3	3	3	3	3	3
Slide-out Chassis	●	●	●	●	●	●
Washable Filter	●	●	●	●	●	●
Warranty*	●	●	●	●	●	●
Certifications	cCSAus	cCSAus	cULus	cULus	cULus	cULus

*1 year warranty on parts. 5 year warranty on compressor.

PACKAGED TERMINAL AIR CONDITIONERS



**COOLING & HEATING FROM 250 TO 700 SQ. FT.
7,200 TO 14,700 BTU/H**

FEATURES

- 4-in-1 Comfort: cools, heats, dehumidifies and vents
- Quiet operation
- Heat pump with auxiliary heat backup
- Power cord
- Designed to fit in most existing PTAC sleeves
- Wall sleeves and grilles available (sold separately, see page 36)

Unit	BZ33-PTACHP7 .3473457	BZ33-PTACHP9 .3473458	BZ33-PTACHP12 .3473459	BZ33-PTACHP15 .3473460
Width (in)	42	42	42	42
Depth (in)	21	21	21	21
Height (in)	16	16	16	16
Weight (Lb)	115.52	112.88	125.44	126.54



PERFORMANCE

Cooling (BTU/H)	7,200	9,000	12,000	14,700
Heating (BTU/H)	7,800	10,900	10,900	13,500
EER	13.1	11.4	10.5	10.6
Room (Sq Ft)	250-300	300-350	450-550	550-700

ELECTRICAL

Power Supply	208/230V~60Hz	208/230V~60Hz	208/230V~60Hz	208/230V~60Hz
Plug Type	6-15P	6-20P	6-20P	6-20P

FEATURES

Remote Control	—	—	—	—
Energy Saver	—	—	—	—
ENERGY STAR®	—	—	—	—
Auto Restart	●	●	●	●
Auto Defrost	●	●	●	●
Sleep Mode	—	—	—	—
Filter Monitor	—	—	—	—
Timer	—	—	—	—
Fan Speeds	3	3	3	3
Slide-out Chassis	●	●	●	●
Washable Filter	●	●	●	●
Warranty*	●	●	●	●
Certifications	AHRI, cULus	AHRI, cULus	AHRI, cULus	AHRI, cULus

*1 year warranty on parts. 5 year warranty on compressor.



NON-PROGRAMMABLE WIRELESS PTAC THERMOSTAT

- LCD screen
- Battery (included) or 24V
- 1H/1C conventional or 2H/1C heat pump
- 5 Year warranty



NON-PROGRAMMABLE PTAC THERMOSTAT

- LCD screen
- Battery (included) or 24V
- 1H/1C conventional or 2H/1C heat pump
- 5 Year warranty

Unit	BZ33-201NW .3525088
Programs	Non-programmable



Unit	BZ33-201N .3525087
Programs	Non-programmable



PORTABLE DEHUMIDIFIERS



35 OR 50 PINT MOISTURE REMOVAL

FEATURES

- Refrigerant leakage detector
- Water level indicator
- Omni-directional caster
- Can drain with standard garden hose

Unit	BZ3335DEH1 .3480494	BZ3350DEH1 .3480492
Width (in)	15-2/5	15-2/5
Depth (in)	11	11
Height (in)	24-1/4	24-1/4
Weight (in)	42.33	43.87



PERFORMANCE

Dehumidification (Pt/Day)	35	50
EEV (L/kW hr)	1.8	1.8

ELECTRICAL

Power Supply	115V~60Hz	115V~60Hz
Plug Type	5-15P	5-15P

FEATURES

LED Display	●	●
Control Type	Electronic	Electronic
Auto Restart	●	●
Auto Defrost	●	●
Auto Shut-off	●	●
ENERGY STAR®	●	●
Drain Hose Connection	●	●
Drain Hose	—	—
Fan Speeds	2	2
Fan Type	Turbo	Turbo
Remote Control	—	—
Timer	●	●
Casters	●	●
Bucket Type	Removable	Removable
Bucket Fill Indicator	●	●
Warranty	●	●
Certifications	cULus	cULus

*1 year warranty on parts. 5 year warranty on compressor.

ACCESSORIES



WIRED CONTROLLER

- Backlight display
- Auto cool/dry/heat/fan mode
- Sleep mode
- Room temperature display
- Daily timer



WIRED CONTROLLER

- LCD display
- Auto/cool/dry/heat/fan mode
- Room temperature display
- Weekly timer



WALL SLEEVE

- Universal design
- 25-6/10" x 15-3/10" x 17-1/2"

Unit	BZ33-WCON1 .3496301
Compatibility	Indoor Wall Mount, Cassette, Ducted, Ceiling & Floor, Console

Unit	BZ33-WCON2 .3496307
Compatibility	Cassette, Ducted, Ceiling & Floor

Unit	BZ338-14UWS .3468729
Compatibility	8K-14K TTW Air Conditioners



PTAC WALL SLEEVE

- 42" x 16" x 14-4/5"



PTAC GRILLE

- White standard grille
- 41-3/5" x 2/5" x 15-3/5"



ARCHITECTURAL GRILLE

- Grey extruded grille
- 41-4/5" x 1" x 15-1/4"

Unit	BZ33-PTACWS .3473461
Compatibility	PTAC

Unit	BZ33-PTACGRILL1 .3514045
Compatibility	PTAC

Unit	BZ33-PTACGRILL2 .3473463
Compatibility	PTAC



HVAC THERMOSTATS



PROGRAMMABLE 2H/1C THERMOSTAT

- LCD screen
- Battery (included) or 24V
- 2H/1C
- 5 Year warranty



PROGRAMMABLE 3H/2C THERMOSTAT

- LCD screen
- Battery (included) or 24V
- 2H/2C conventional or up to 3H/2C heat pump
- 5 Year warranty

Unit	BZ33-201P .3525020
Programs	7-Day or 5-1-1, or non-programmable

Unit	BZ33-302TSP .3525083
Programs	7-Day or 5-1-1, or non-programmable



PROGRAMMABLE 3H/2C WIFI THERMOSTAT

- LCD screen
- Requires common wire
- 2H/2C conventional or up to 3H/2C heat pump
- 5 Year warranty



NON-PROGRAMMABLE PTAC THERMOSTAT

- LCD screen
- Battery (included) or 24V
- 1H/1C conventional or 2H/1C heat pump
- 5 Year warranty

Unit	BZ33-302WIFI .3544504
Programs	7-Day or 5-1-1, or non-programmable

Unit	BZ33-201N .3525087
Programs	Non-programmable



NON-PROGRAMMABLE WIRELESS PTAC THERMOSTAT

- LCD screen
- Battery (included) or 24V
- 1H/1C conventional or 2H/1C heat pump
- 5 Year warranty

Unit	BZ33-201NW .3525088
Programs	Non-programmable



THERMOSTATS

	201P	302TSP	201N	WIRELESS 201NW	WIFI 302WIFI
Program Modes	7 Day, 5/1/1, Non-Programmable	7 Day, 5/1/1, Non-Programmable	Non-Programmable	Non-Programmable	7 Day, 5/1/1
Heat Stages	2	3	2*	2	3
Cool Stages	1	2	1	1	2
Gas, Electric or Oil	●	●	●	●	●
Heat Pump with Auxiliary	●	●	●	●	●
Heat Pump without Auxiliary	●	●	●	●	●
Battery Power	●	●	●	●	—
24V Power (Hardwire)	●	●	●	●	●
Dual Fuel Compatible	●	●	—	—	●
Display Size (Sq In)	4.6	8.8	4.6	4.6	8.8
Auto Changeover	—	●	—	—	●
Filter Change Reminder	●	●	—	—	●
Room Temperature Calibration	●	●	●	●	●
Minimum Compressor Run Time	—	●	—	—	●
Compressor Short Cycle Delay	●	●	●	●	●
Adjustable Heat & Cool Temperature Swing	●	●	●	●	●
Cooling Fan Delay	—	●	—	—	●
High/Low Speed Fan Switch	—	—	●	●	—
Programmable Fan	—	●	—	—	●
IAQ Fan Mode	—	●	—	—	●
Always On Display Light	—	●	—	—	●
Keypad Lockout	—	●	—	—	●
Adjustable Setpoint Limits	●	●	●	●	●
Touchscreen	—	●	—	—	●
Millivolt	—	●	—	—	—
Warranty	5	5	5	5	5
Terminals	R, C, Y, W, GH, O, B	Rh, Rc, C, Y, Y2, W/E, W2, G, O, B	R, C, Y, W, GH, GL, O, B	R, C, Y, W, GH, GL, O, B	Rh, Rc, Y, Y2, W/E, W2, G, O, B

FEATURES

[illegible]

This image shows a single sheet of white paper with horizontal blue or grey ruling lines. The lines are evenly spaced and run across the width of the page. There is no text or other markings on the paper.

