

AKG ACOUSTICS



AKG Acoustics GmbH

Lemböckgasse 21–25, P.O.B. 158, A-1230 Vienna/AUSTRIA

Tel: (+43 1) 86 654-0*, Fax: (+43 1) 86 654-7516

www.akg.com, e-mail: sales@akg.com

Hotline: (+43 676) 83200 888, hotline@akg.com

AKG ACOUSTICS, U.S.

914 Airpark Center Drive, Nashville, TN 37217, U.S.A.

Tel: (+1 615) 620-3800, Fax: (+1 615) 620-3875

www.akgusa.com, e-mail: akgusa@harman.com

For details on other AKG products or Distributors ask
your dealer or visit www.akg.com
Specifications subject to change without notice.

H A Harman International Company

12/04/PROA 1516

www.akg.com



AKG ACOUSTICS



CCS — Crystal Clear Sound Series Microphones Headphones



CCS – Crystal Clear Sound

D 11/XLR Dynamic Microphone

for bass instruments

- Dynamic microphone designed for low-pitched instruments
- Powerful sound with gutsy bass range
- Handles highest sound pressure levels with ease
- Integrated stand adapter
- Rugged all-metal body withstands typical tough handling on stage
- Complete with 16 foot (5 m) microphone cable



2



SPECIFICATIONS

Frequency range: 20 Hz to 20 kHz
Polar pattern: cardioid
Sensitivity: 2.5 mV/Pa
Standard accessory: 16 ft. (5 m) XLR/XLR cable

CCS – Crystal Clear Sound



D 22/XLR Dynamic Microphone

for instruments

- Dynamic microphone designed for drums and percussions, wind instruments and guitar amps
- Response tailored for neutral reproduction of instrument sounds
- Integrated stand adapter and external bracket for easy mounting on stands or drums
- Rugged all-metal body withstands typical tough handling on stage
- Complete with 16 foot (5 m) microphone cable



3

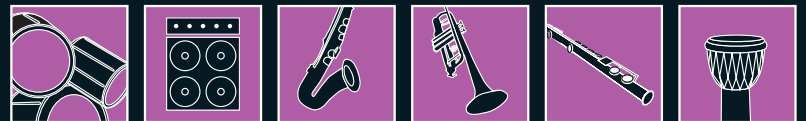

SPECIFICATIONS

Frequency range: 60 Hz to 18 kHz
Polar pattern: cardioid
Sensitivity: 2.5 mV/Pa
Standard accessories: 16 ft. (5 m) XLR/XLR cable
H 440 mounting bracket

CCS – Crystal Clear Sound

D 44 S Dynamic Microphone


for vocals/Karaoke

- Vocal/general-purpose microphone
- Designed for hi-fi recording and Karaoke use
- On/off switch
- Rugged wire mesh cap with internal protective basket
- 16 foot (5 m) cable w/mini jack and 1/4" adapter



SPECIFICATIONS

Frequency range: 70 Hz to 18 kHz
Polar pattern: cardioid
Sensitivity: 2.5 mV/Pa
Standard accessories: fixed 16 ft. (5 m) cable
w/mini jack plug
mini to 1/4" adapter plug




CCS – Crystal Clear Sound

D 55 S Dynamic Microphone

for vocals/Karaoke

- Vocal/general-purpose microphone
- Sturdy die-cast metal body
- Designed for hi-fi recording and Karaoke use
- On/off switch
- Rugged wire mesh cap with internal protective basket
- 16 foot (5 m) cable w/mini jack and 1/4" adapter

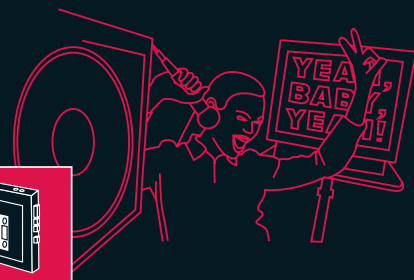

SPECIFICATIONS

Frequency range: 70 Hz to 18 kHz
Polar pattern: cardioid
Sensitivity: 2.5 mV/Pa
Standard accessories: fixed 16 ft. (5 m) cable
w/mini jack plug
mini to 1/4" adapter plug




CCS – Crystal Clear Sound

D 77 S Dynamic Microphone

for backing vocals and instruments

XLR/Jack

- Rugged performance microphone designed for backing vocals and instruments
- Available with 16 foot (5 m) XLR/XLR cable or 16 foot (5 m) XLR/jack cable
- On/off switch
- Rugged wire mesh cap with internal protective basket
- Sturdy die-cast metal body
- Complete with stand adapter



SPECIFICATIONS

Frequency range: 40 Hz to 20 kHz

Polar pattern: cardioid

Sensitivity: 2.5 mV/Pa

Standard accessories: stand adapter

D 77 S/XLR: 16 foot (5 m) XLR to XLR cable

D 77 S/Jack: 16 foot (5 m) XLR to 1/4" jack cable



CCS – Crystal Clear Sound

D 88 S Dynamic Microphone

for lead vocals

XLR/Jack

- Rugged performance microphone designed for lead vocals
- Available with 16 foot (5 m) XLR/XLR cable or 16 foot (5 m) XLR/jack cable
- On/off switch
- Rugged wire mesh cap with internal protective basket
- Sturdy die-cast metal body
- Complete with stand adapter

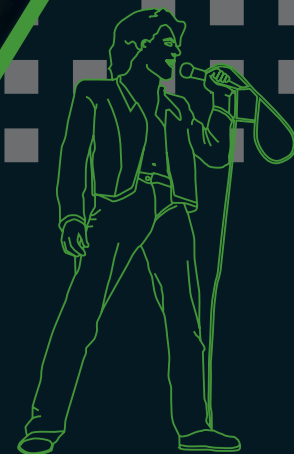

SPECIFICATIONS

Frequency range: 40 Hz to 20 kHz

Polar pattern: supercardioid

Sensitivity: 2.5 mV/Pa

Standard accessories: stand adapter

D 88 S/XLR: 16 foot (5 m) XLR to XLR cable

D 88 S/Jack: 16 foot (5 m) XLR to 1/4" jack cable

Headphones

K 44

- Closed-back stereo headphones
- Powerful sound with low-down bass and clean highs
- Soft, supraaural, leatherette ear pads
- AKG self-adjusting headband for maximum comfort



SPECIFICATIONS

Weight (without cable): approx. 190 g (6.7 oz.)

Frequency range: 18 Hz to 20 kHz

Sensitivity: 115 dB SPL/V

Cable: single-entry, 8 ft. (2.5 m) long

Adapter plug: mini to 1/4"

8

K 55

- Closed-back, circumaural stereo headphones
- High ambient-noise attenuation
- TurboBass feature for powerful sound
- Excellent wearing comfort



SPECIFICATIONS

Weight (without cable): approx. 210 g (7.4 oz.)

Frequency range: 16 Hz to 20 kHz

Sensitivity: 114 dB SPL/V

Cable: single-entry, approx. 10 ft. (3 m) long

Adapter plug: mini to 1/4"

K 66

- Excellent price/performance
- Semi-open, circumaural stereo headphones
- Natural Sound design for airy, pristine sound
- AKG self-adjusting headband and leatherette ear pads for maximum comfort



SPECIFICATIONS

Weight (without cable): approx. 210 g (7.4 oz.)

Frequency range: 18 Hz to 22 kHz

Sensitivity: 112 dB SPL/V

Cable: single-entry, approx. 10 ft. (3 m) long


Adapter plug: mini to 1/4"

9

Headphones

K 26 P

- Folding, closed-back miniature headphones with 40 mm (1.6 in.) speakers
- High ambient-noise attenuation plus fabulous sound
- Extremely lightweight headphones
- 3D-Axis design folds headphones into minimum space



SPECIFICATIONS

Weight (without cable): approx. 73 g (2.6 oz.)
 Frequency range: 12 Hz to 26 kHz
 Sensitivity: 125 dB SPL/V
 Cable: 5 ft. (1.5 m) long, with mini jack plug
 Standard accessory: carrying bag

K 306 AFC

- Lightweight, UHF wireless stereo headphones
- Autotuning function for reliable reception
- High quality radio signal penetrates walls and ceilings
- Transmitter doubles as storage cradle and charger for headphones
- Single transmitter can be used with many headphones at once



SPECIFICATIONS

Transmitter weight: approx. 275 g (9.7 oz.)
 Headphones weight: approx. 180 g (6.4 oz.)
 Audio bandwidth: 20 Hz to 22 kHz
 Max. sound pressure level: 103 dB SPL
 Battery life: approx. 10 hours
 (2 AAA size NiCd rechargeable batteries)

Carrier frequency: 864 MHz

Range: approx. 100 m*

* under ideal transmission conditions (free-field)