

# Sonesse® 30 Zigbee 24V DC

Item #: 1241970




Somfy  
DESIGNED FOR  
SILENCE



## Technical Features

<b>Supply Tolerance</b>	21.6 – 26.4V DC	<b>Temperature Working Range</b>	From 32°F to 140°F (0°C to 60°C)
<b>Running Time</b>	6 minutes	<b>Electric Insulation</b>	Class III
<b>Repeatability</b>	+ 6°	<b>Antenna</b>	6.9 in. (17.5cm) wire length, must not be cut or lengthened. For greatest RF range, antenna must be exposed.
<b>Cable</b>	AWG24 – 1 Cable: 2 wire (7.5 in. Weidmüller pigtail non-removable)	<b>Sound Level*</b>	<47 dB(A)*
<b>Index Protection Rating</b>	IP30 (interior use only)	*Noise Level: Power Level according to standards ISO3741 in dB(A) re1pW Typical Value at nominal torque without end product.	
<b>Limit Switch Unit</b>	Electronic		
<b>Limit Switch Capacity</b>	125 turns (limited to 6 minutes of rotation without stop)		

## Dimensions

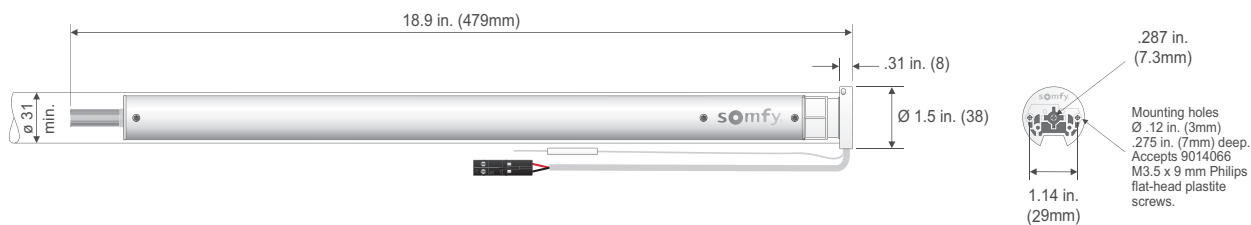

## Specifications

<b>Nominal Torque</b>	2 Nm
<b>Nominal Speed</b>	25 rpm
<b>Adjustable Speed</b>	10 to 28 by increment (speed regulated and adjustable)
<b>Radio Protocol</b>	Zigbee 3.0 / Bluetooth 4.2
<b>Radio Frequency</b>	2.4 GHz
<b>Nominal Voltage</b>	24V DC
<b>Rated Current</b>	.625A
<b>Standby Power</b>	.2W

## Integrated Motor Plates (sold separately)

<b>9025996</b>	Sonesse 30 Motor Plate Rollease 360 R3-R8 10 x 1.8mm and screws	
<b>9025999</b>	Sonesse 30 Motor Plate Acmeda 12mm and screws	
<b>9026003</b>	Sonesse 30 Motor Plate Rollease Skyline and screws	
<b>9026093</b>	Sonesse 30 Motor Plate M3 x 6mm Philips flat-head plastite screw	

## Cables

Weidmüller non-removable pigtail = 7.5 in. (190mm)



## Optional Head Covers

