

ESB 69-3 HOSE BINDING MACHINE




MORE SAFETY. MORE COMFORT.

You should not make any compromise concerning the quality of binding, because your life depends during a firefight on safe and watertight hoses. Use the BARTH ESB 69-3 for save and high quality wire binding according to actual standards for pressure and suction hoses.


Your Benefits

- + high safety standards
- + comfortable & quick
- + user friendly
- + high quality standards

ESB 69-3 with two spool fixtures

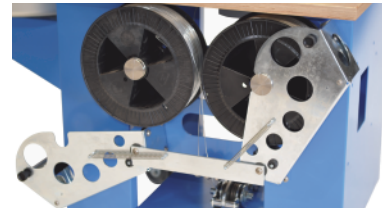

BARTH wire-break for quick reload

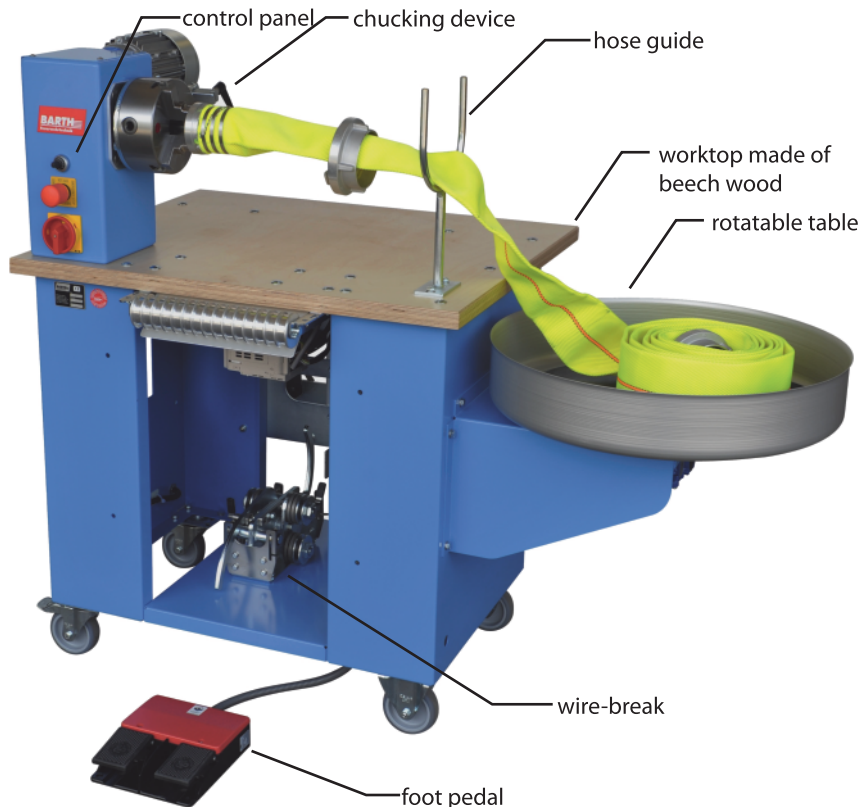

WITH KNOW-HOW MADE IN GERMANY

The ESB 69-3 is driven by a gear-motor, the standard chucking device is adjustable for couplings from 38 mm to 110 mm (1½" to 4½"), no matter if you have Storz, BS, DSP, GOST or other couplings.

The BARTH ESB 69-3 with the adjustable wire-break guarantees that the wire is always under tension during the binding process. Another feature is the rotating table which keeps the hose from being twisted while binding. The rotating table is directly synchronized with the rotating of the chucking device. The BARTH ESB 69-3 is also equipped with a spool holder to store and change the the ready-for-use plastic spools with different types of binding wire very fast, easily and safely. The wire tension will be adjusted by the innovative BARTH wire-break to make keep the binding process as comfortable as possible.

Accessoires

Product Code	Description
155581	2 nd wire-spool, for binding with two different wires
008060	Chucking device 150, for couplings 110 to 150 mm (4½" to 6")
003396	Chucking device 25, for couplings 25 to 38 mm (1" to 1½")
155582	Professional-Set for maximum efficiency (second wire spool, extended wire guide, variable speed control)
155587	Binding wire spool, 15kg stainless steel; Ø 1,4 mm (~ 0,05")
155588	Binding wire spool, 15kg stainless steel; Ø 1,8 mm (~ 0,07")
155585	Binding wire spool, 15kg zinc-plated; Ø 1,4 mm (~ 0,05")
155586	Binding wire spool, 15kg zinc-plated; Ø 1,8 mm (~ 0,07")

Technical Specifications

Product Code	155580
Coupling size	38 - 110 mm Ø (1½" to 4½") with standard chuck jaws, extendable and reducible by special chuck jaws
Elec. connection	3N AC 400 V 50 Hz 0,55 kW 1,2 A (opt. 230 V) 5 m cable with 5 pin CEE-plug 16 A
Dimensions	1.500 x 1.380 x 795 mm
Weight	approx. 110 kg