

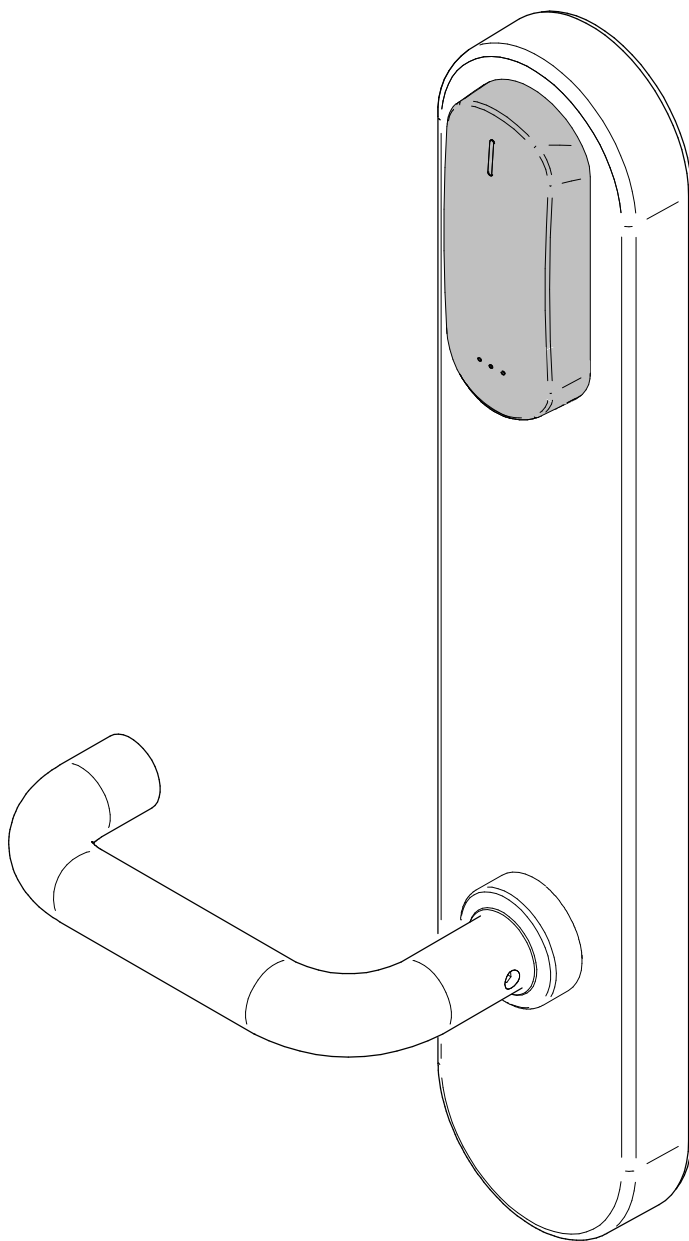
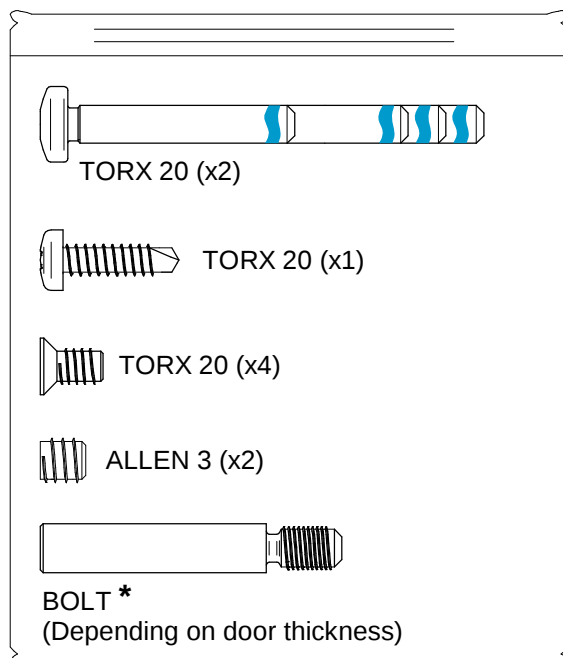





XS4 Original+ for USA mortise locks, cylindrical & tubular latches

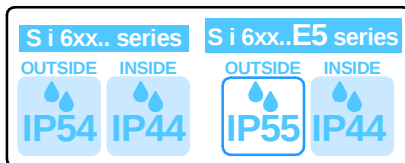

The Salto XS4 Original+ is designed to fit most ANSI profile doors, mortise, cylindrical and tubular locks. Easy to install and retrofit, it can replace your existing door hardware and fits any door with a broad range of different models and functions. The XS4 Original+ incorporates the latest BLUEnet wireless and mobile credentials technology to accommodate access control needs of both today and tomorrow.


A i 6xx series

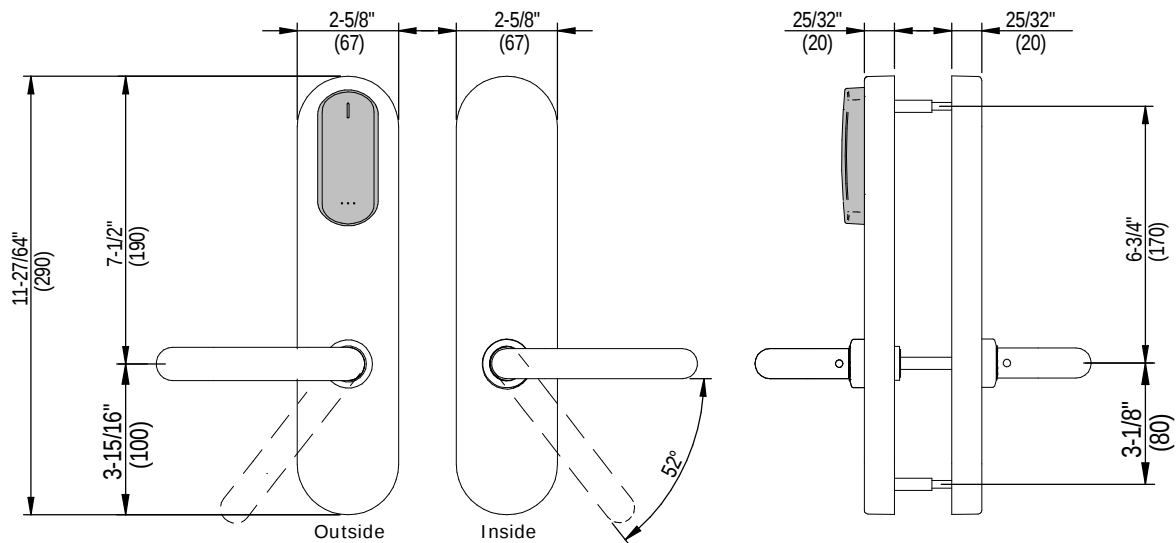

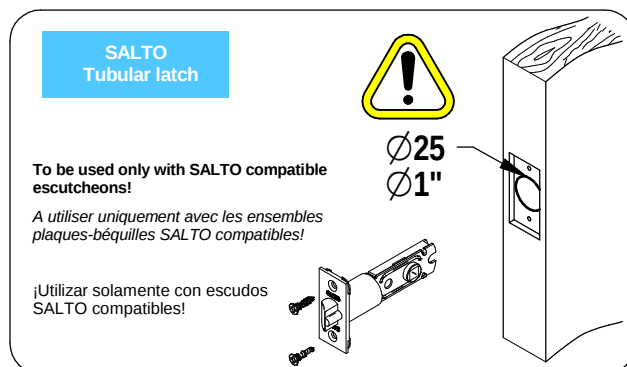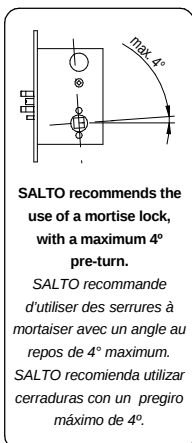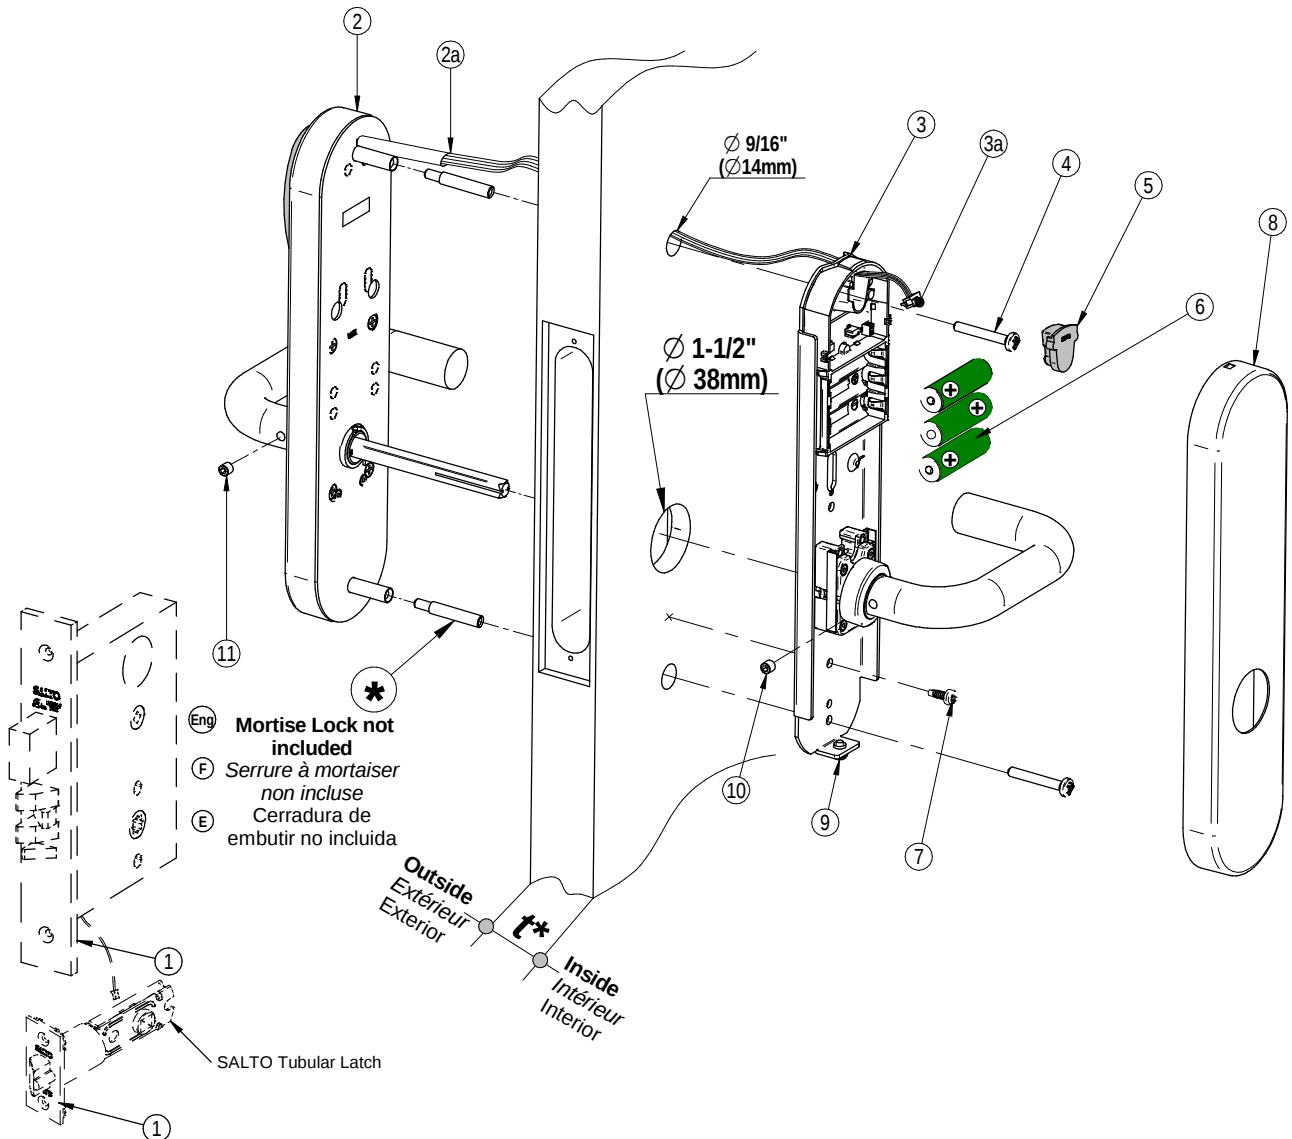


(Eng) Select handing (F) Choisir le sens de la bêteuille (E) Seleccione mano


1

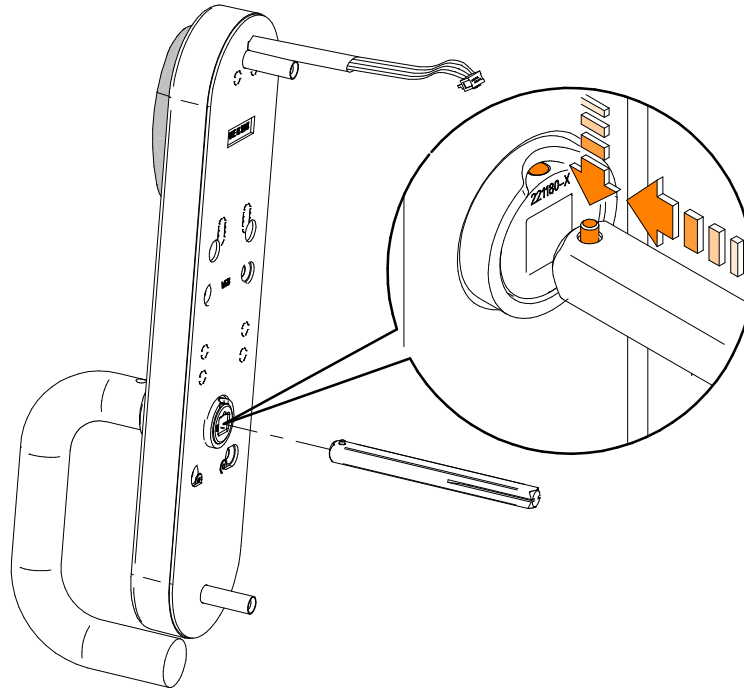


2

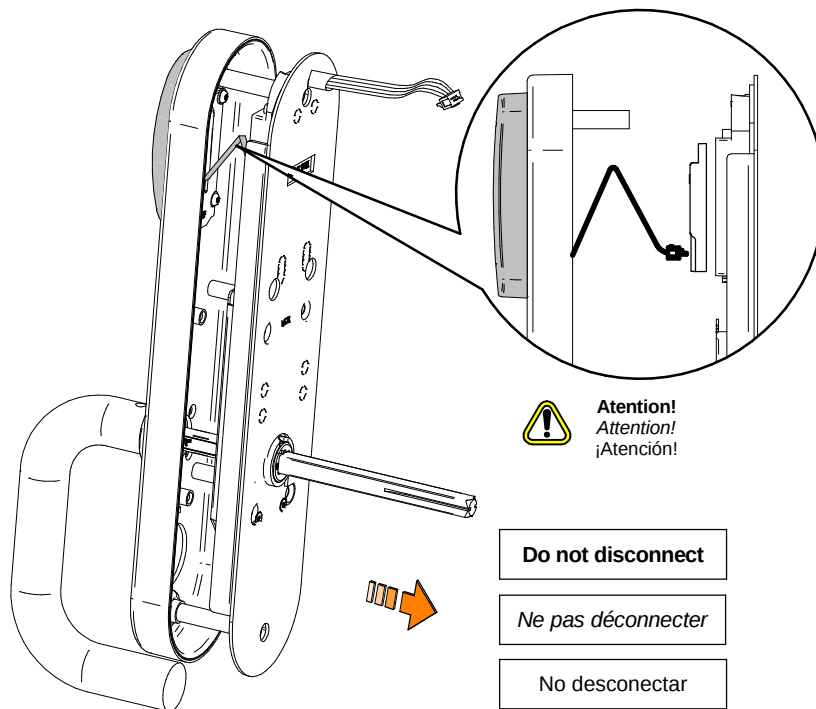


3

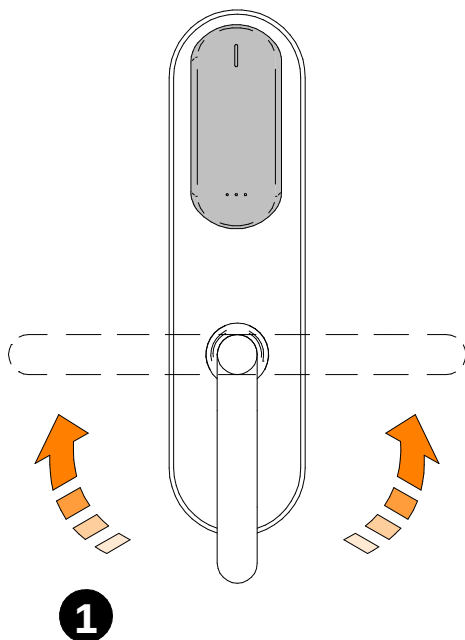

4

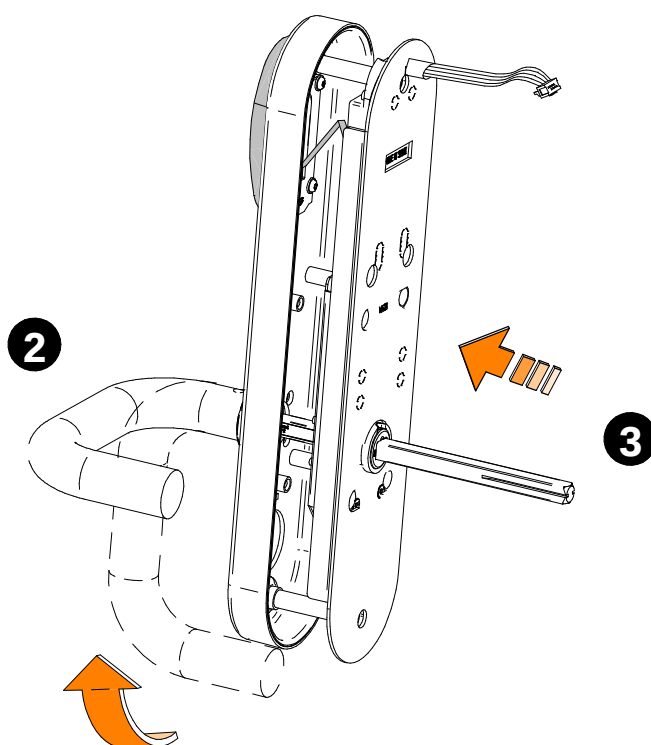

5

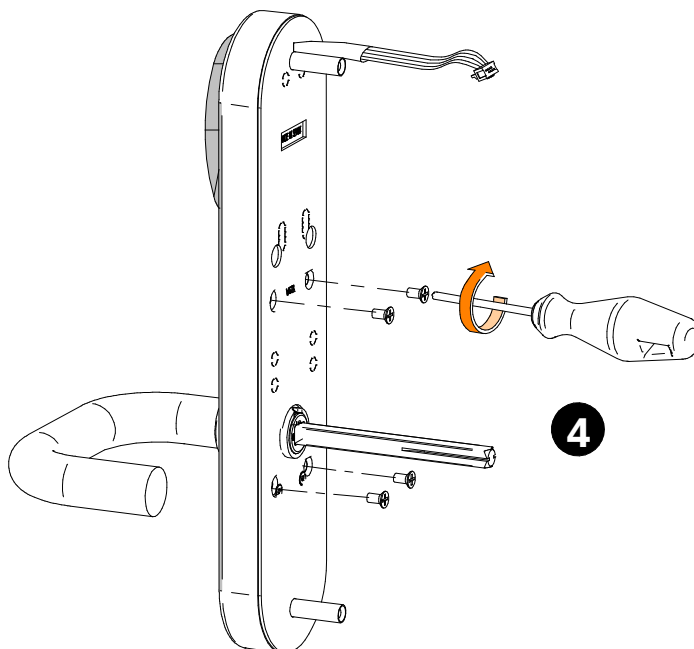


E5 models

CLICK
HERE




(Eng) Installation (F) Installation (E) Instalación

1

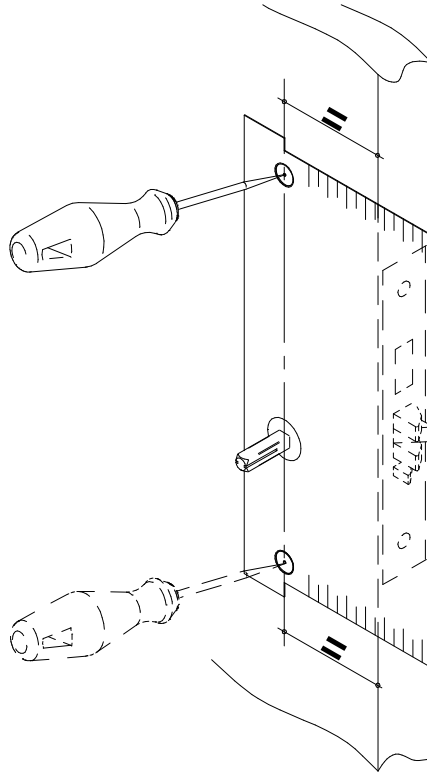

2

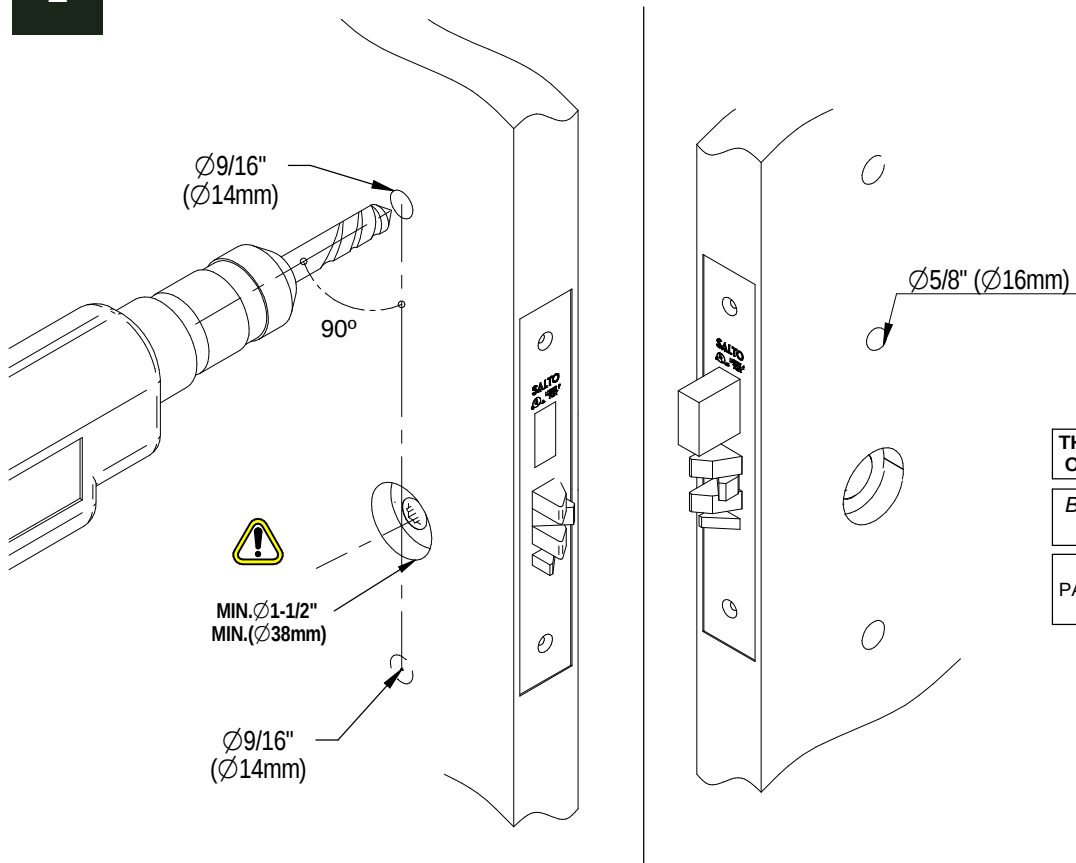


**THUMB TURN MODEL
ONLY. INSIDE ONLY.**


**BOUTON ROTATIF
UNIQUEMENT.**

**SOLO MODELO
PALANCA. SOLO POR
EL INTERIOR.**


3

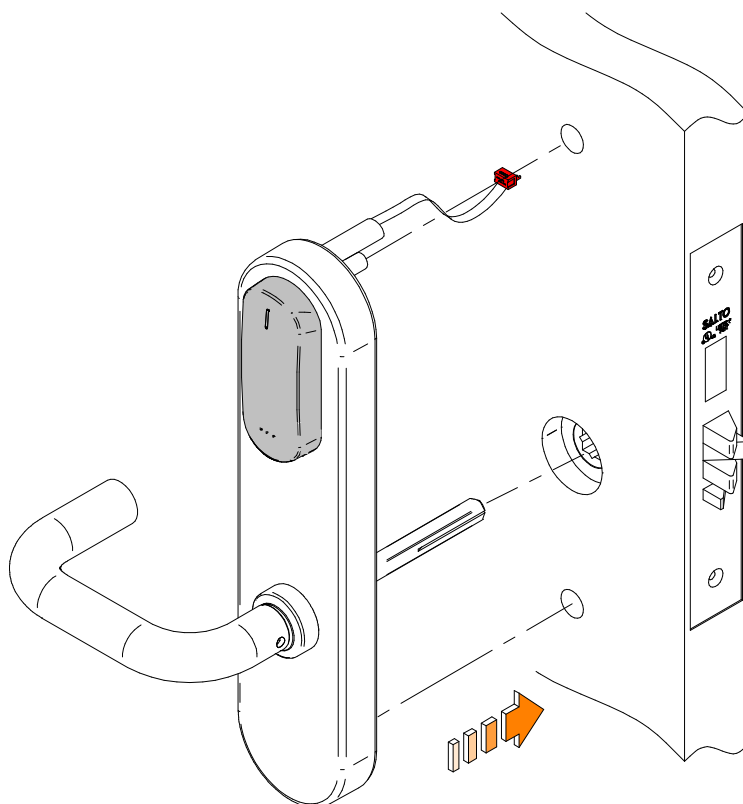


4

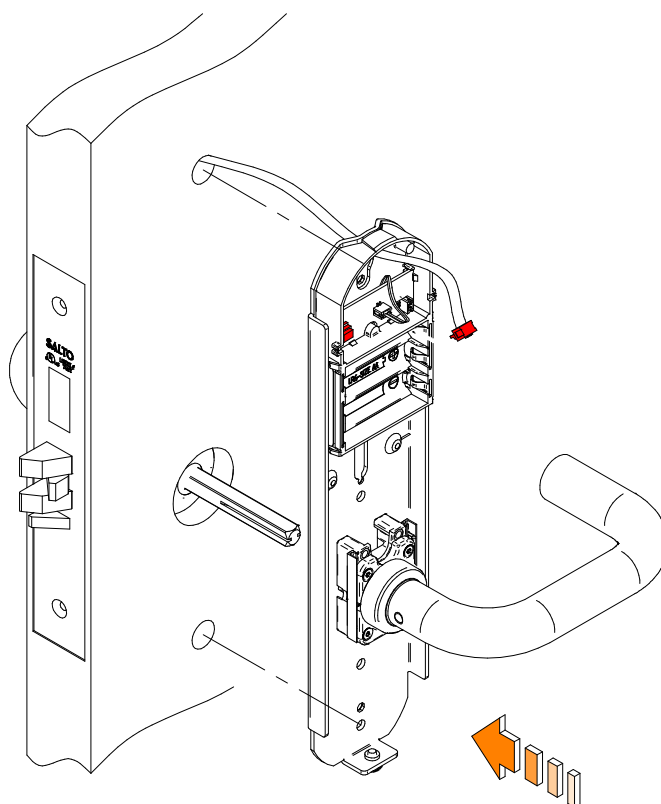


5

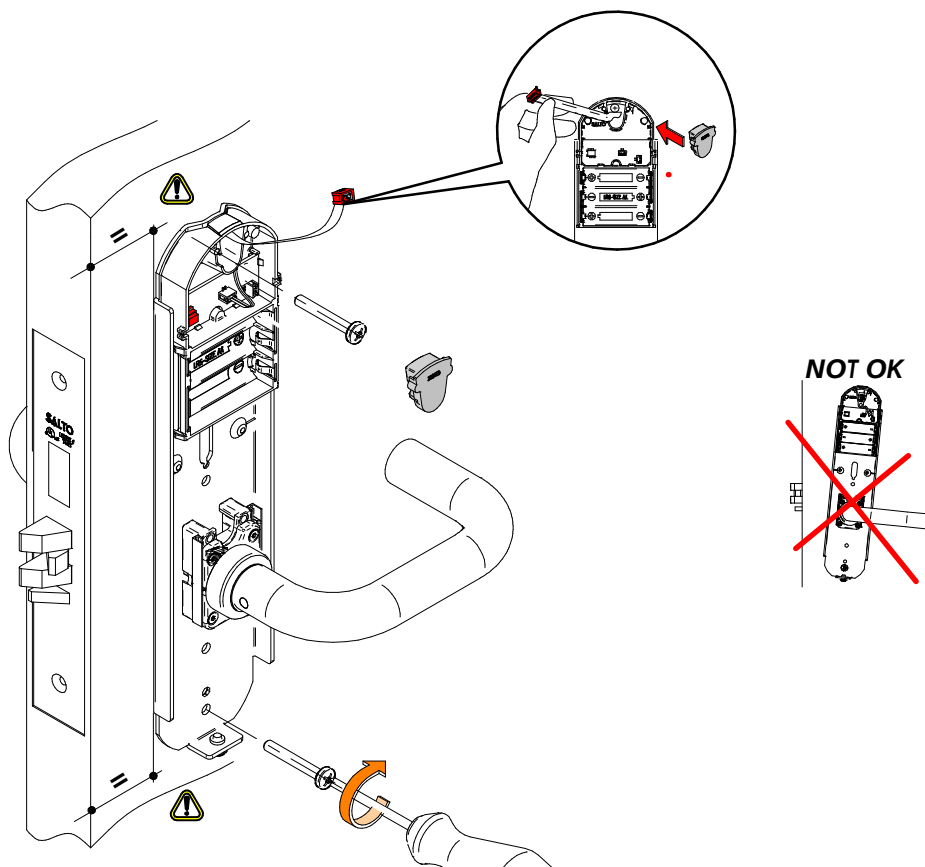


6

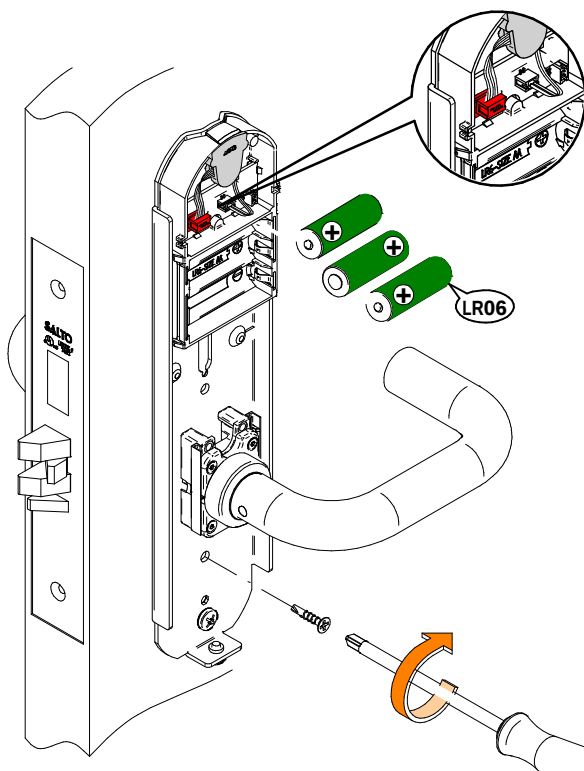


7

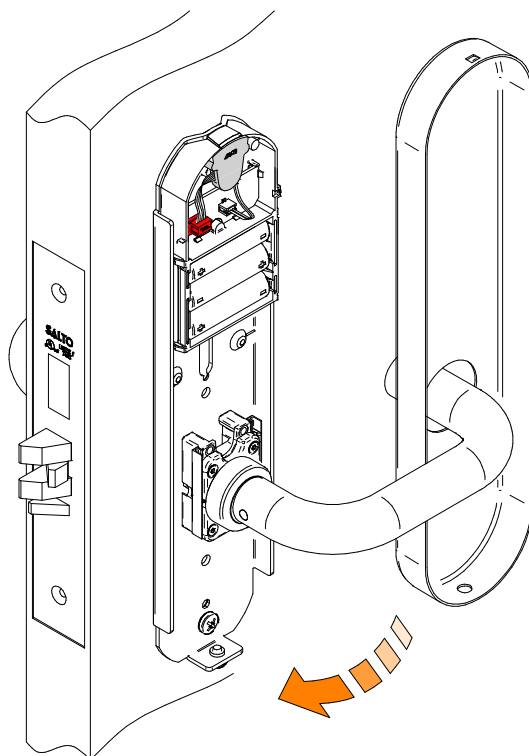


8

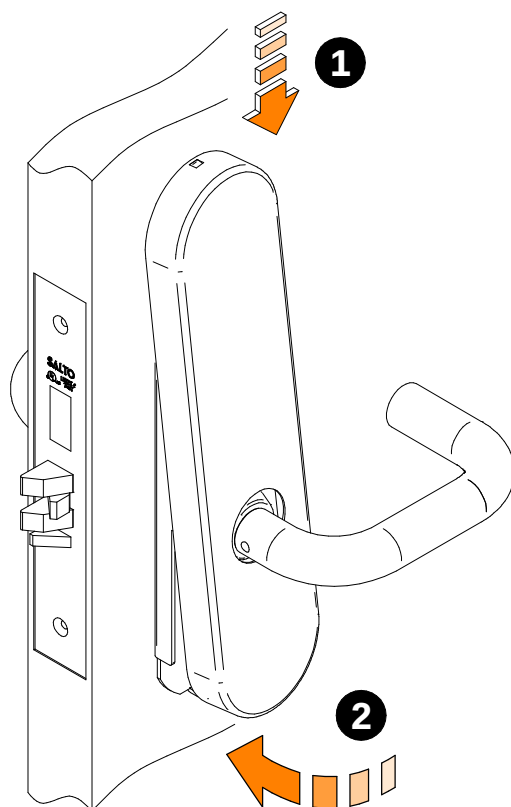

9

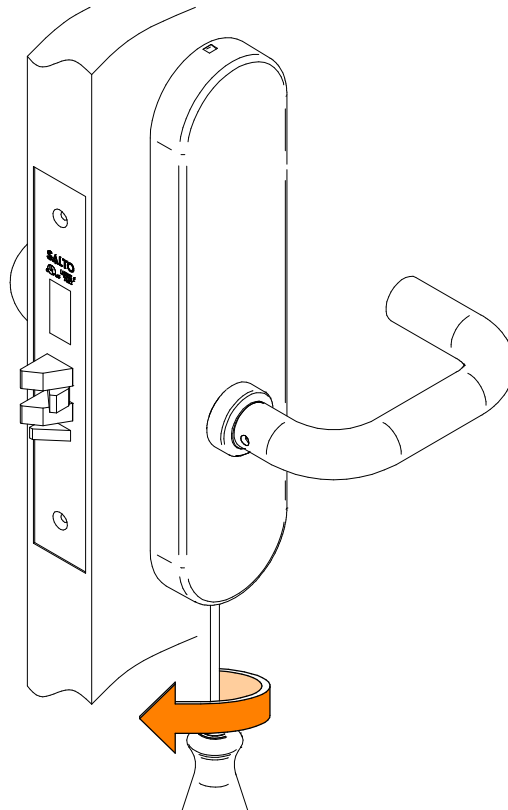

10

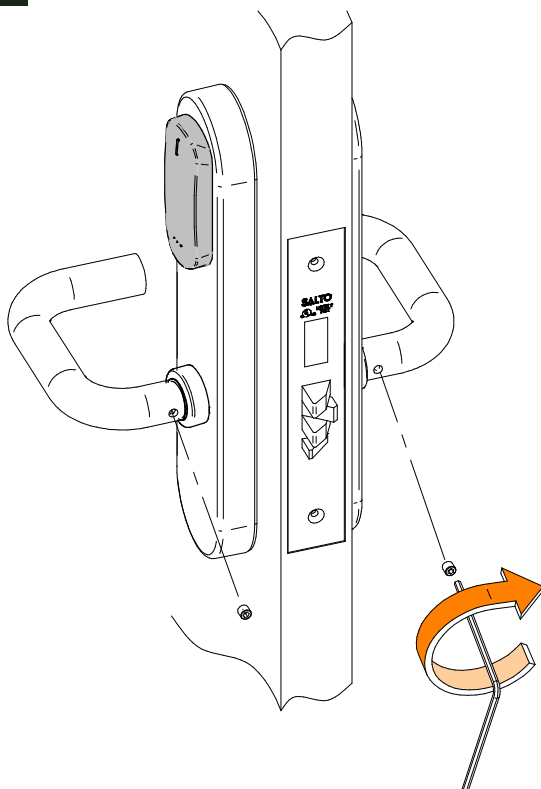

(Eng)

**AT THIS POINT DO NOT
CLOSE THE DOOR
PROGRAM THE LOCK FIRST**

Follow user manual

(F)

**NE FERMEZ PAS LA PORTE.
PROGRAMMEZ LA BÉQUILLE
AVANT**

Consultez le manuel utilisateur



(E)

**NO CIERRE LA PUERTA.
PROGRAMA LA CERRADURA
CON ANTES**


Consulte el manual del usuario

(Eng) Battery change (F) Remplacer les piles (E) Cambio de pilas



LR06

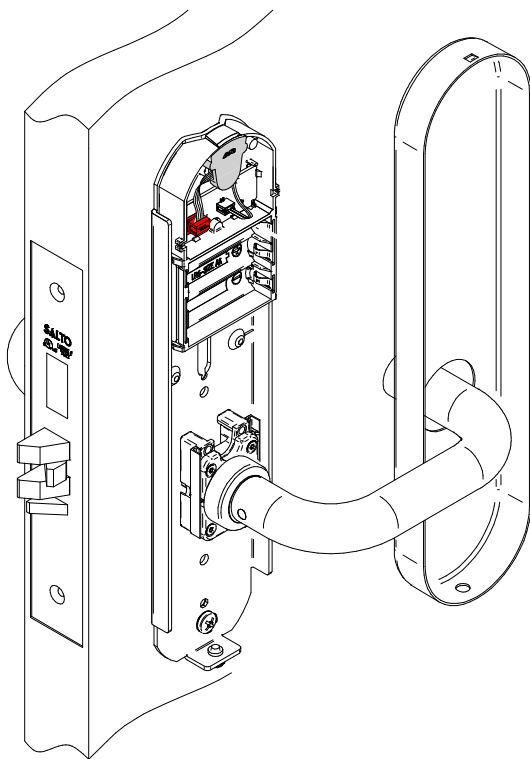

Ai658 m dd ff t x h r
Ai668 m dd ff t x h r

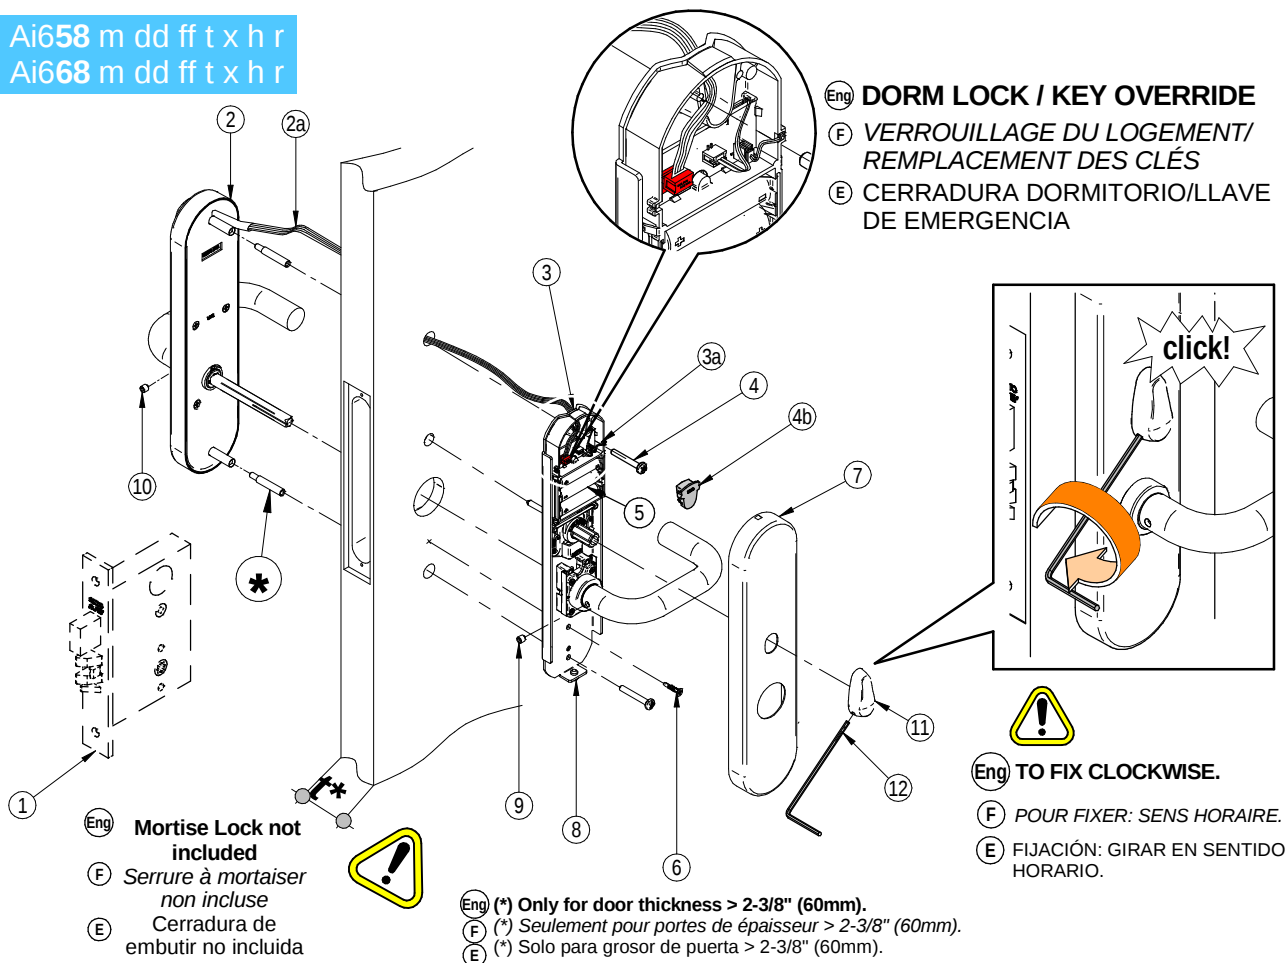

AT6xx.. series

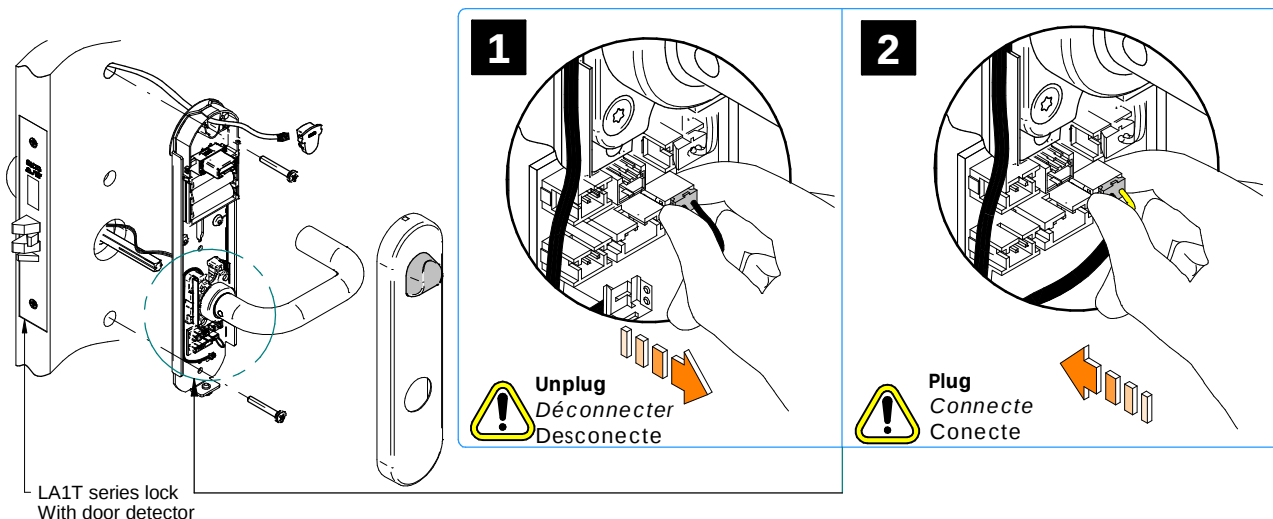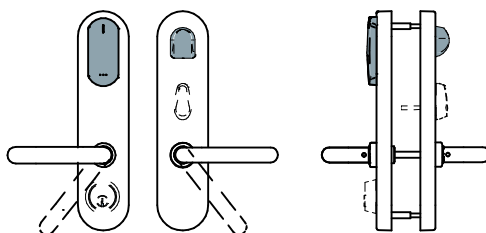

UL294 Statements

UL listed XS4 Original+ ANSI models AM65xx, and AM67xx.

Tested by UL with Mifare (DESFIRE, ULTRALIGHT C) RFID communication, and with Mobile APP (JustIN Mobile version 2.x) through Bluetooth LE5.2 and NFC. Minimum Operating System version for Android: 13 (Nougat) (kernel 4.19.111-27127798) or later and for iOS: 17.5.1 or later. A means of verification shall be employed by the user to enable access to the wireless electronic device such as a PIN or biometric feature. The wireless electronic device is not capable of command, control, programming, or any other system manipulation and it is only to be used in the same manner as a physical credential.

Indoor use. The IP value has not been verified by UL. Tested with LR6 batteries. Operating temperature -5°C to +50°C. Humidity 0 to 95% (non-condensing). BLE frequency range 2400-2483.5 MHz. RFID central frequency 13.56 MHz.

MODEL	SOFTWARE VERSION
AM65xx – AM66xx – AM67xx	0174v01.xx, 0129v00.xx, 0186v01.xx, 0187v11.xx, 0197v02.xx

Signalling guide 226966-ED.-06/09/2021 referenced by this document is common for all XS4 Original+ and XS4 One S product families including XS4 Original+ ANSI models AM65xx, AM66xx and AM67xx.

UL294 performance level:

FEATURE	LEVEL
Destructive attack	I
Line Security	I
Endurance	IV
Standby power	I