

0–10V Single room solutions


Standalone



Diva 0–10V dimmer




Nova T☆ 0–10V dimmer

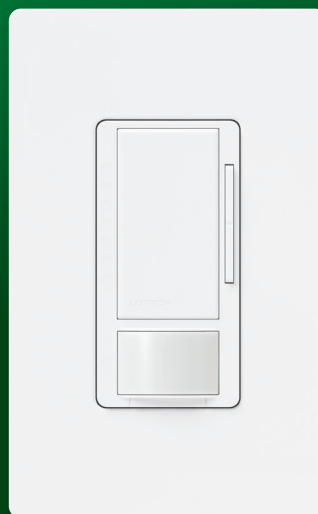


Maestro 0–10V
dimmer sensor

Wireless

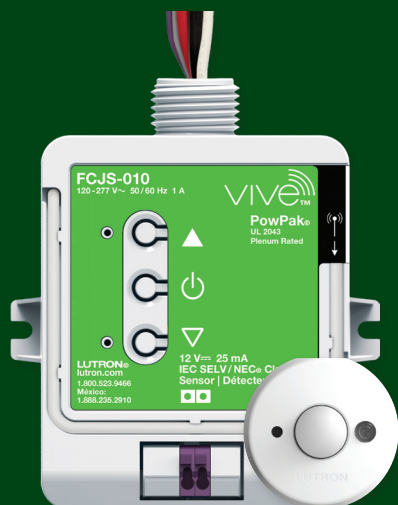

PowPak wireless fixture
controller and PowPak
fixture sensor

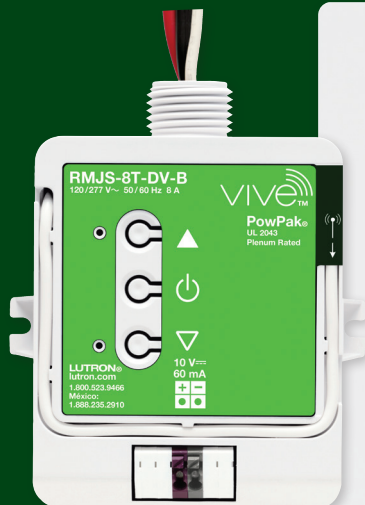

PowPak dimming module
with 0–10V control



Maestro Wireless
0-10V dimmer
sensor




Radio Powr Savr occupancy
and daylight sensors, and
Pico wireless remote

0–10V is a common control protocol that you can find across the lighting industry. Originally developed for fluorescent ballast control, 0-10V has become one of the most common control protocols in the growing LED market.


Lutron offers a variety of 0-10V control options to give you both high-quality dimming capabilities and additional opportunities to save energy.

These control options allow you to take advantage of multiple energy-saving strategies.


Lutron energy-saving strategies




Dimming
Gives occupants the ability to set the light levels.




Occupancy/vacancy sensing
Turns lights on when occupants are in a space and dims lights to a low level or turns lights off when they vacate the space.



Personal dimming control
Gives occupants the ability to set the light levels.



Daylight harvesting
Dims electric light when daylight is available to light the space.



High-end trim
Sets the maximum light level based on customer requirements in each space.

Dimming



Diva 0–10V dimmer
page 4



Nova T☆ 0–10V dimmer
page 6

Dimming and sensing



Maestro 0–10V dimmer sensor
page 8

Dimming, sensing, personal control, and daylight harvesting



PowPak dimming module
with 0–10V control
page 10



Maestro Wireless 0-10V
dimmer sensor
page 12

Individual fixture dimming, sensing, personal control,
and daylight harvesting



PowPak wireless fixture controller with
0-10V control and PowPak fixture sensor
page 14



Divia 0–10V dimmer

- 0–10V dimmer for LED and fluorescent fixtures
- Two models available:
 - DVSTV
 - Controls 120–277 V without a power pack
 - Provides 3-way preset switching functionality
 - DVTV
 - Requires a power pack
 - Use with a power pack for Class 2 installations, with wired occupancy sensors, for 347 V operation, and for loads greater than 8 A

Models/Price

- DVSTV (gloss): \$97 List
- DVSCSTV (Satin Colors): \$107 List
- DVTV (gloss): \$105 List
- DVSCTV (Satin Colors): \$115 List

Voltage

- DVSTV/DVSCSTV
 - 8 A, 120–277 V
- DVTV/DVSCTV
 - 16 A with PP-DV, 120–277 V
 - 16 A with PP-347, 347 V

Ideal for private offices and conference rooms

The Lutron Advantage

- Patented technology extends relay life to 10 years
- Low-end and high-end trim in one product
- No derating for 277 V installations
- No neutral required

Energy-saving strategies


- Dimming
- High-end trim

Codes met


- Automatic shut-off with wired occupancy sensors through a power pack
- Area control
- Multi-level lighting control

Application examples: Conference room

Without power pack (DVSTV Only)

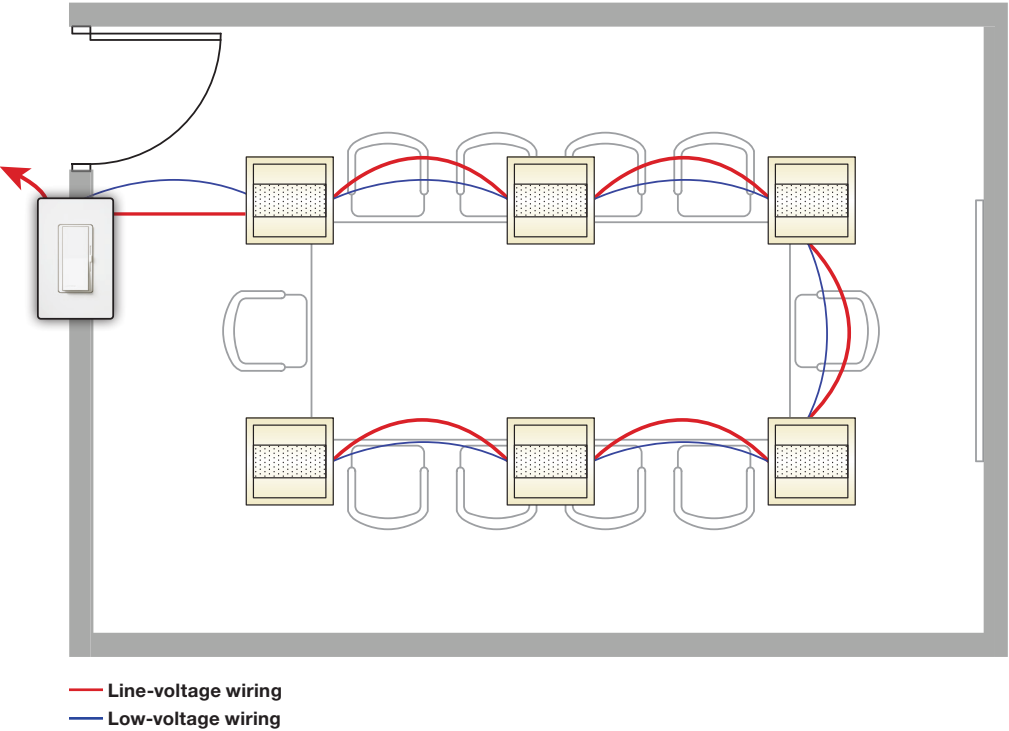

With power pack (DVTV Only)

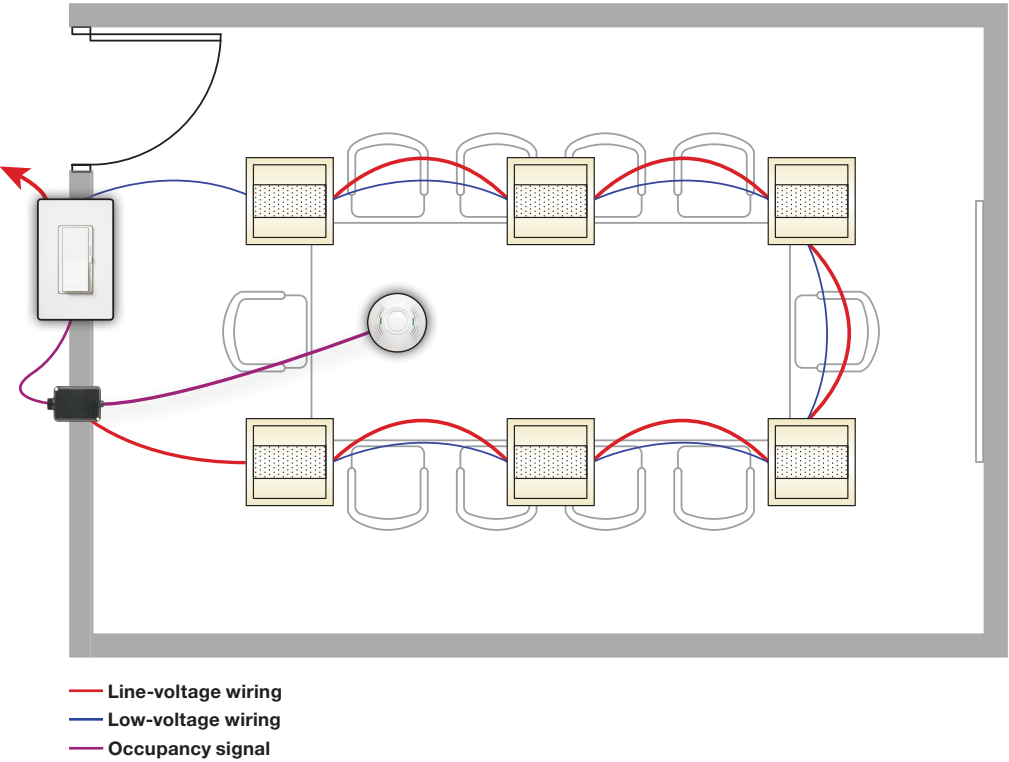



Nova T☆ 0–10V dimmer

- 0–10V spec grade dimmer that can switch line voltage for fluorescent ballasts and LED drivers
- Controls 120–277 V without a power pack
- Power pack required for Class 2 installations, for 347 V operation (Canada), and for loads greater than 8
- Works with wired occupancy/vacancy sensors with the addition of the respective power pack

Models/Price

NTSTV-DV: \$145 List

Voltage

- 8 A, 120–277 V; up to 16 A with the addition of a power pack (PP-DV)
- 16 A, 347 V (with power pack PP-347H)

Ideal for private offices, conference rooms, and hospitals

The Lutron Advantage

- Spec grade with heavy-duty components for surge protection and long life
- Low-end and high-end trim in one product
- No derating for 277 V installations
- No neutral required

Energy-saving strategies


- Dimming
- High-end trim
- Occupancy sensing

Codes met


- Automatic shut-off with wired occupancy sensors through a power pack
- Area control
- Multi-level lighting control


Application examples: Conference room

Without power pack

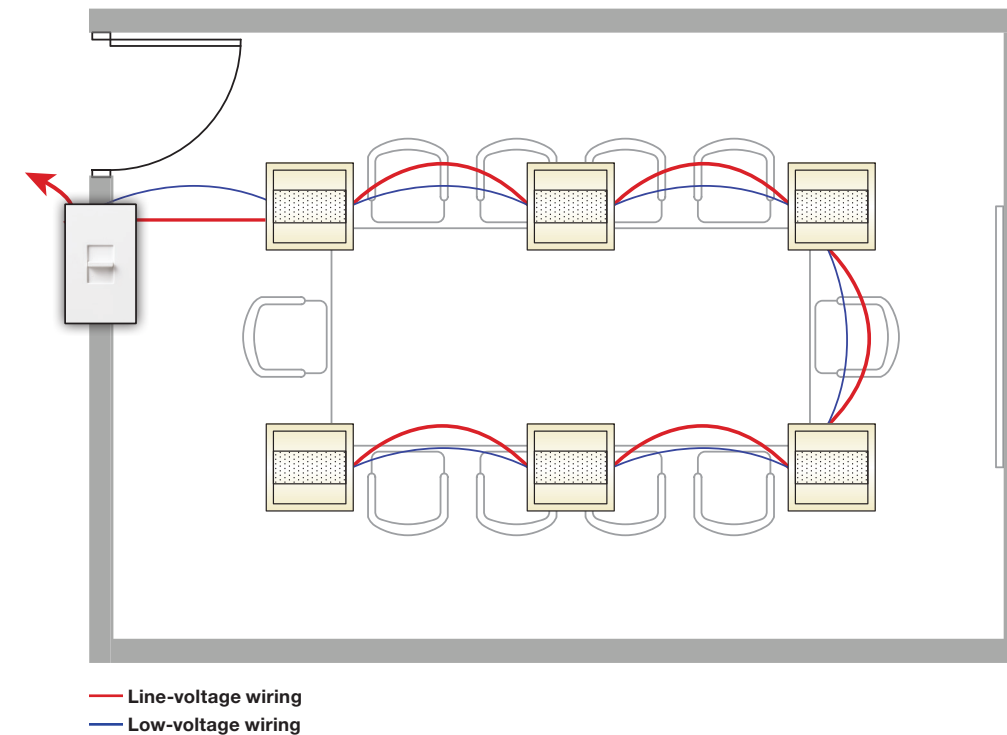

With power pack

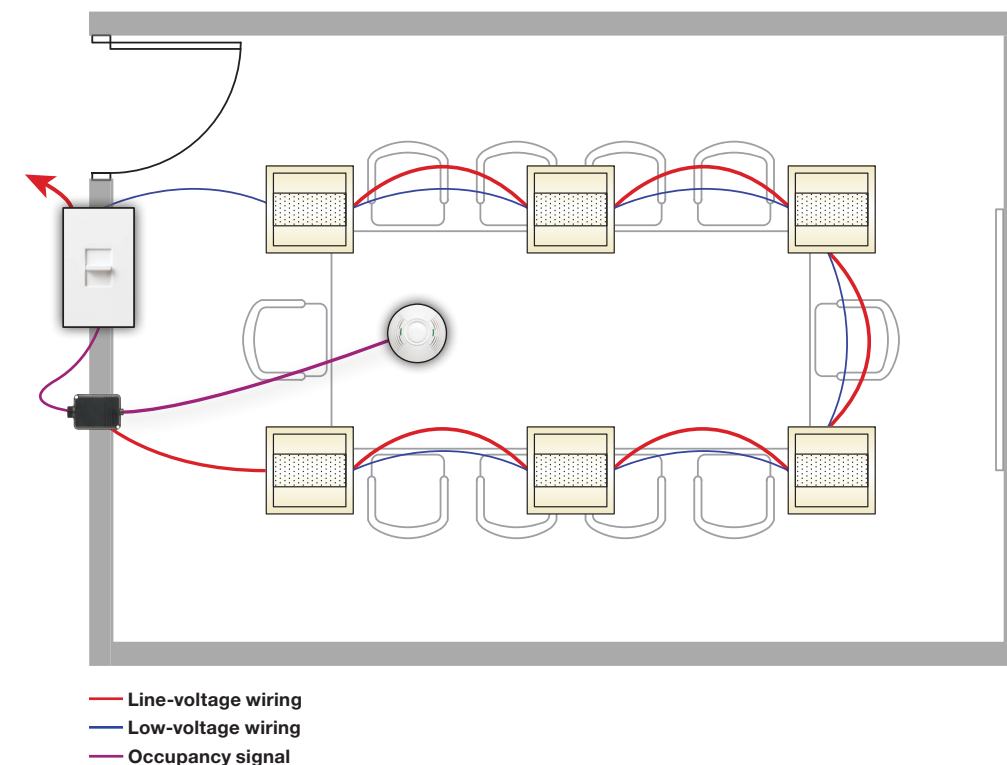

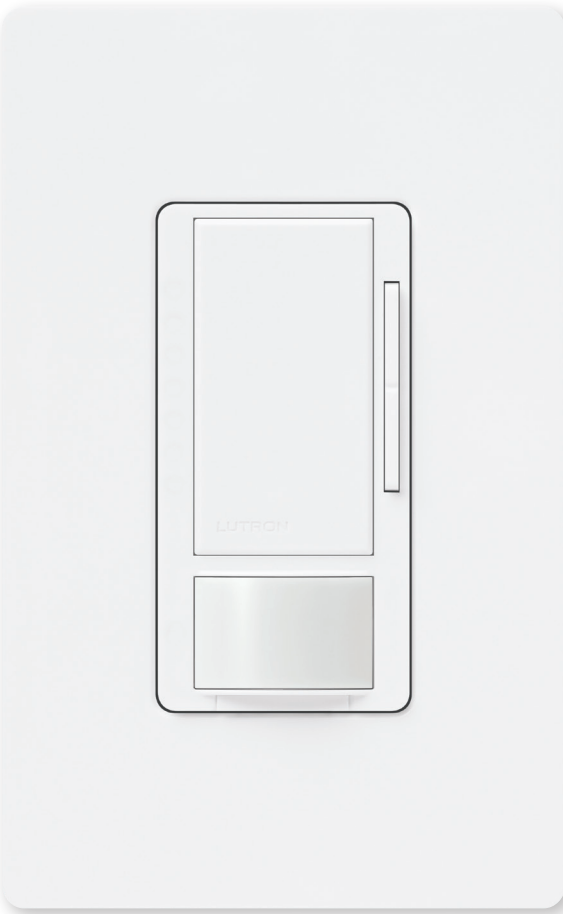

Maestro 0–10V dimmer sensor

- Dims 0–10V LED drivers or electronic fluorescent ballasts
- XCT PIR sensing
- Single pole or 3-way with Maestro companion or mechanical switch
- Neutral connection optional
- Sinking control for sourcing fixtures
- High- and low-end trim

Models/Price


MS-Z101 (occupancy/vacancy): \$114 List
MS-Z101-V (vacancy only): \$114 List

Voltage

8 A, 120–277V

Ideal for small spaces such as private offices, small classrooms, and equipment rooms

Application example: Private office

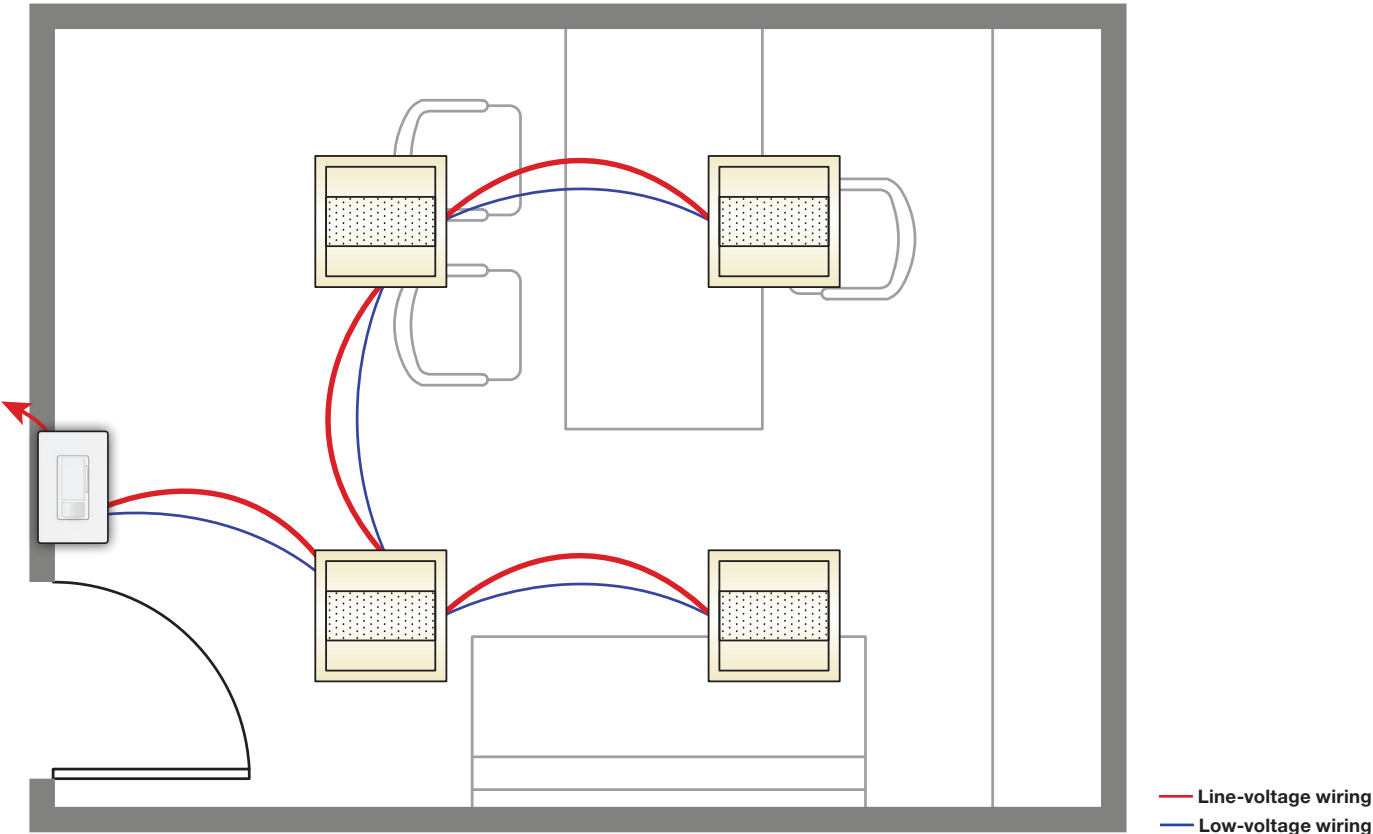

The Lutron Advantage

- Miswire and load incompatibility alert — lens will flash red if control is miswired or connected to an incompatible fixture
- Optimized dimming performance with selectable dimming curve and smooth fade to on and fade to off
- Lutron’s XCT sensing technology
- Smart ambient light detection learns users preferred light level and keeps lights off when sufficient daylight is available
- Lutron’s Adaptive Zero-Cross Switching extends relay lifetime

Energy-saving strategies


- Occupancy/vacancy sensing
- Dimming
- High-end trim

Codes met


- Automatic shut-off
- Multi-level lighting control
- Area control

Coverage patterns

Horizontal Beam Diagram

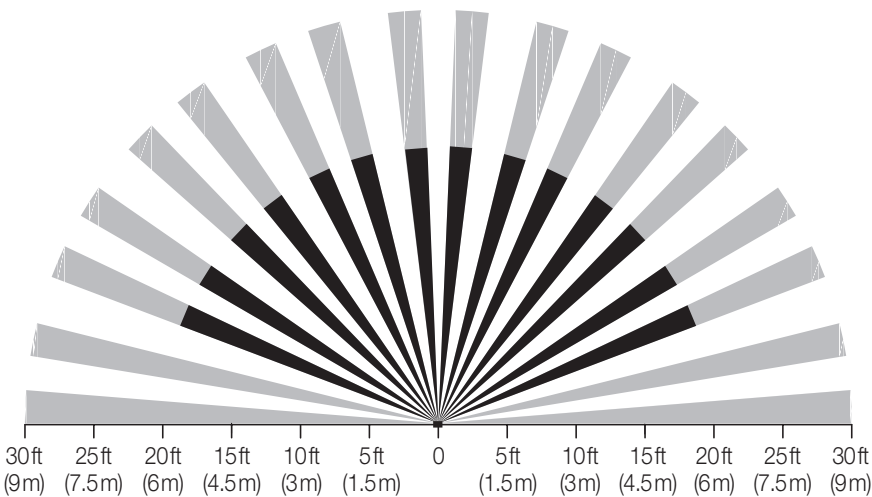

Vertical Beam Diagram

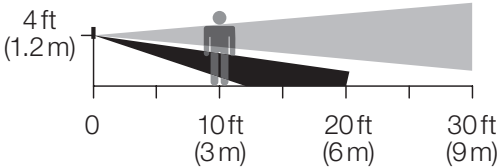

- Major motion coverage (900sq ft)
- Minor motion coverage (400sq ft)

Dimming, sensing, personal control, and daylight harvesting (j-box)



PowPak dimming module with 0–10V control

- Junction-box mounted dimming module that controls 0–10V fixtures
- Auto adapts to sink/source fixtures

Models/Price

RMJS-8T-DV-B (connector): \$152 List

RMJS-8TN-DV-B (flying leads): \$152 List

Voltage


8A, 120–277V

Ideal for larger conference rooms, larger classrooms, and training rooms

The PowPak dimming module with 0–10V control is a part of the Vive wireless solution, which includes:

- Radio Powr Savr wireless occupancy/vacancy sensors
- Radio Powr Savr daylight sensors
- Pico wireless remotes
- Maestro Wireless dimmers, switches, and sensors
- PowPak dimming and switching modules
- PowPak receptacle control modules
- Individual wireless fixture controllers

Application example: Classroom

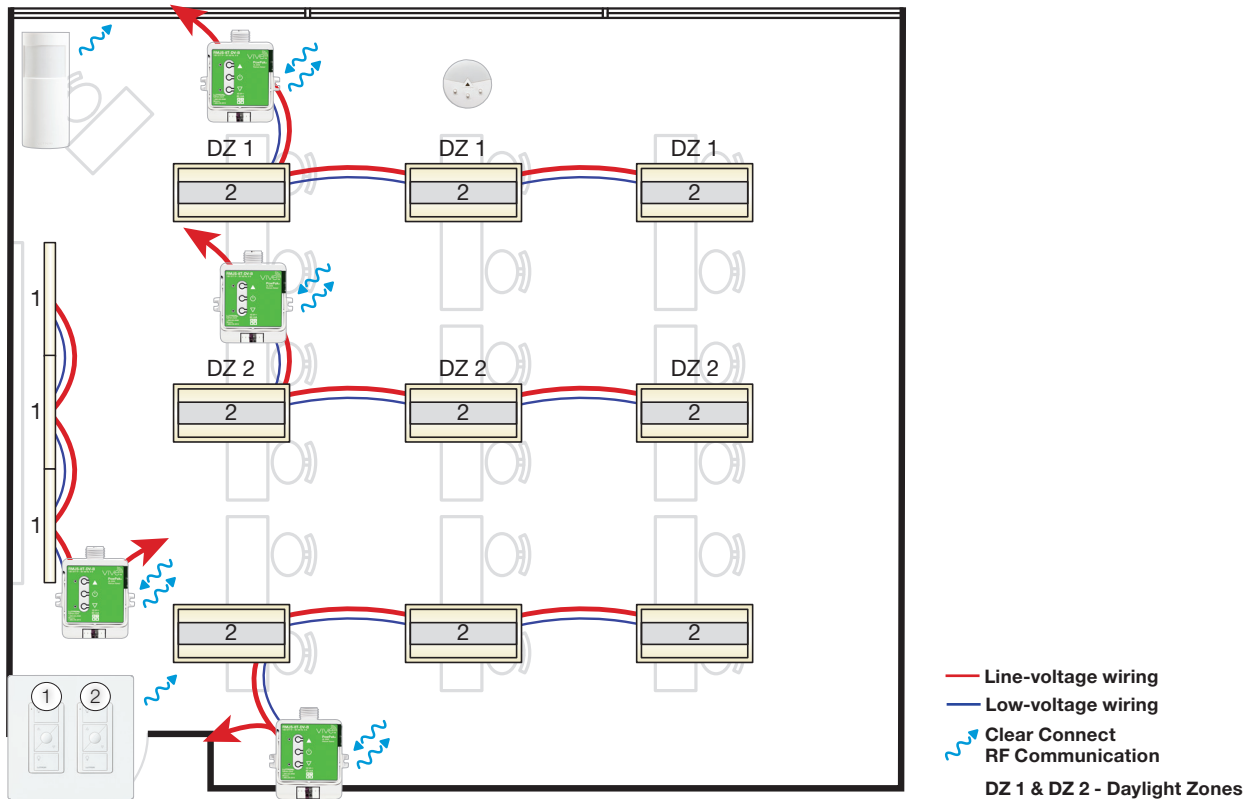

Vive wireless components (work with PowPak dimming module and Maestro Wireless dimmer sensor)



The Lutron Advantage

- Push-button setup —utilizes simple button-press programming to select and associate wireless devices
- Proven technology means no callbacks — uses Lutron's XCT sensing technology (Radio Powr Savr sensors) and Clear Connect RF wireless communication
- Add/relocate wireless remotes and sensors at any time with no new wiring

Energy-saving strategies

- Occupancy sensing
- Dimming
- Personal control
- Daylight harvesting
- High-end trim

Codes met

- Automatic shut-off
- Multi-level daylight control
- Multi-level lighting control
- Area control

Dimming, sensing, personal control, and daylight harvesting (in-wall)



Maestro Wireless 0-10V dimmer sensor

- Dims 0-10V LED drivers or electronic fluorescent ballasts
- XCT PIR sensing
- Single pole or multi-location with a Pico wireless remote
- Neutral required
- High-end and low-end trim

Models/Price

MRF2S-8SD010 (occupancy/vacancy): \$180 List
MRF2S-8SDV010 (vacancy only): \$180 List


Voltage

8A, 120/277V

Ideal for private offices, classrooms, conference rooms, and equipment rooms

Maestro Wireless 0-10V dimmer sensor is a part of the Vive solution. See pages 10-11 for more information.

Application example: Breakroom

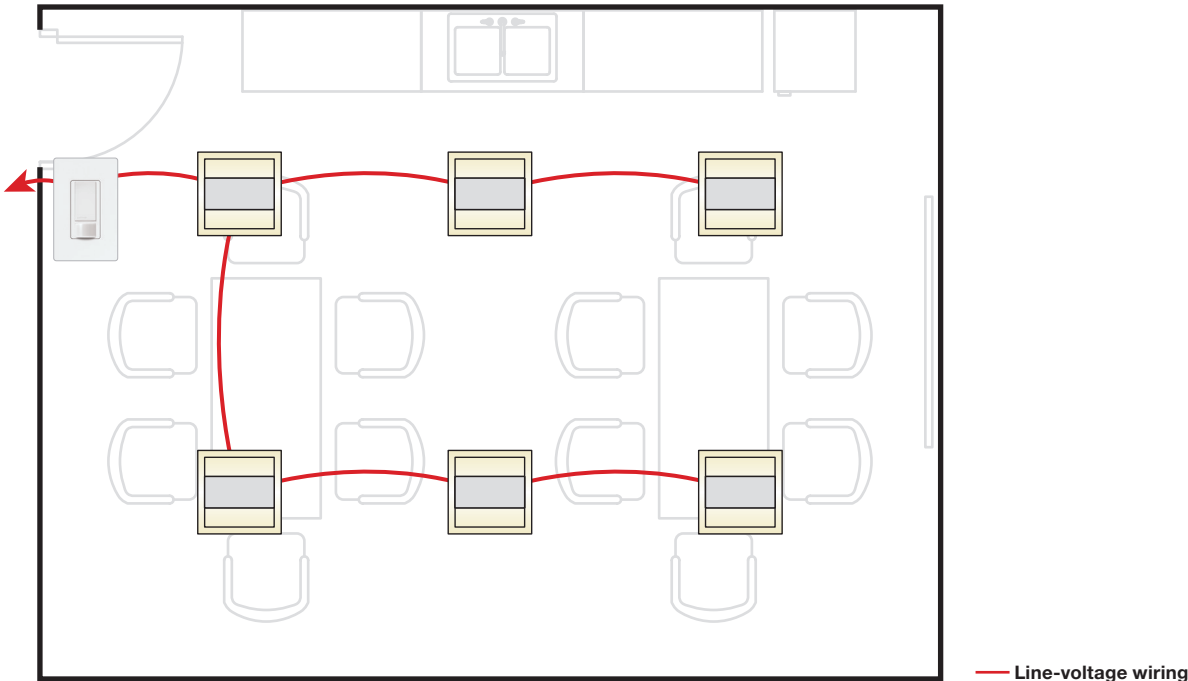

The Lutron Advantage

- Combines the simplicity of an in-wall sensor with the scalability of a Vive system. You can easily add wireless devices, for another point of control, additional occupancy coverage, or daylight sensing when needed
- Lutron's XCT sensing technology
- Smart ambient light detection learns users preferred light level and keeps lights off when sufficient daylight is available

Energy-saving strategies


- Occupancy/vacancy sensing
- Dimming
- Personal control
- Daylight harvesting
- High-end trim

Codes met


- Automatic shut-off
- Multi-level daylight control
- Multi-level lighting control
- Area control

Coverage patterns

Horizontal Beam Diagram

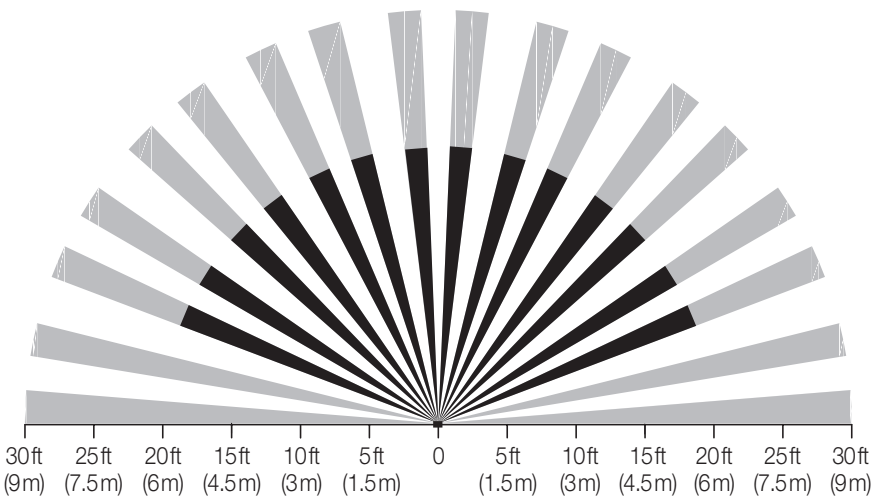

Vertical Beam Diagram

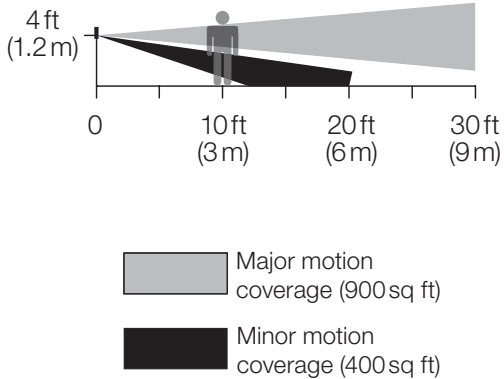

Individual fixture dimming, sensing, personal control, and daylight harvesting



PowPak wireless fixture controller with 0-10V control

- Adds wireless control to each individual 0-10V LED or fluorescent fixture in a space
- Enables combined occupancy detection and daylight harvesting at the individual fixture level

Models/Price

FCJS-010: \$79 List

FCJS-010-BULK8: \$610 List
(contractor 8-pack, \$76.25 List per unit)

FC-SENSOR: \$35 List

FC-VSENSOR: \$35 List

Voltage

1A, 120-277 V

Ideal for open offices and cafeterias

PowPak wireless fixture controller is a part of the Vive solution. See pages 10-11 for more information.

The Lutron Advantage

- Simple to design and estimate — just count the fixtures
- No additional wiring required — works with existing high-voltage wiring; add more wireless remotes and sensors at any time, and reconfigure zones with no new wiring
- Works out of the box — no complex computer programming; associate Pico wireless remotes with just a button press or green laser
- Proven technology means no callbacks —uses Lutron's XCT sensing technology (fixture sensor) and Clear Connect RF wireless communication

Energy-saving strategies


- Occupancy sensing
- Dimming
- Personal control
- Daylight harvesting
- High-end trim

Codes met


- Automatic shut-off
- Multi-level daylight control
- Multi-level lighting control
- Area control

Application example: Open offices

Individual Fixture Control

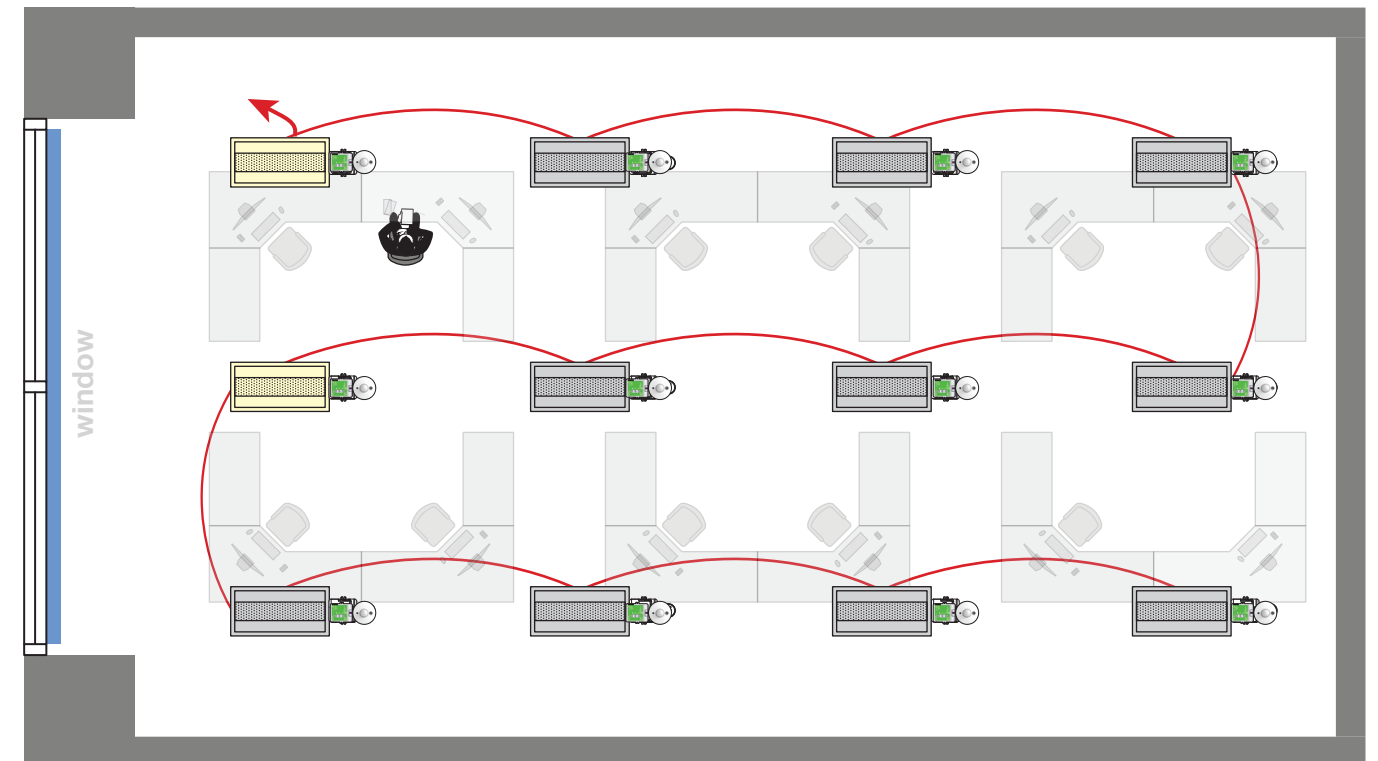

Area Control

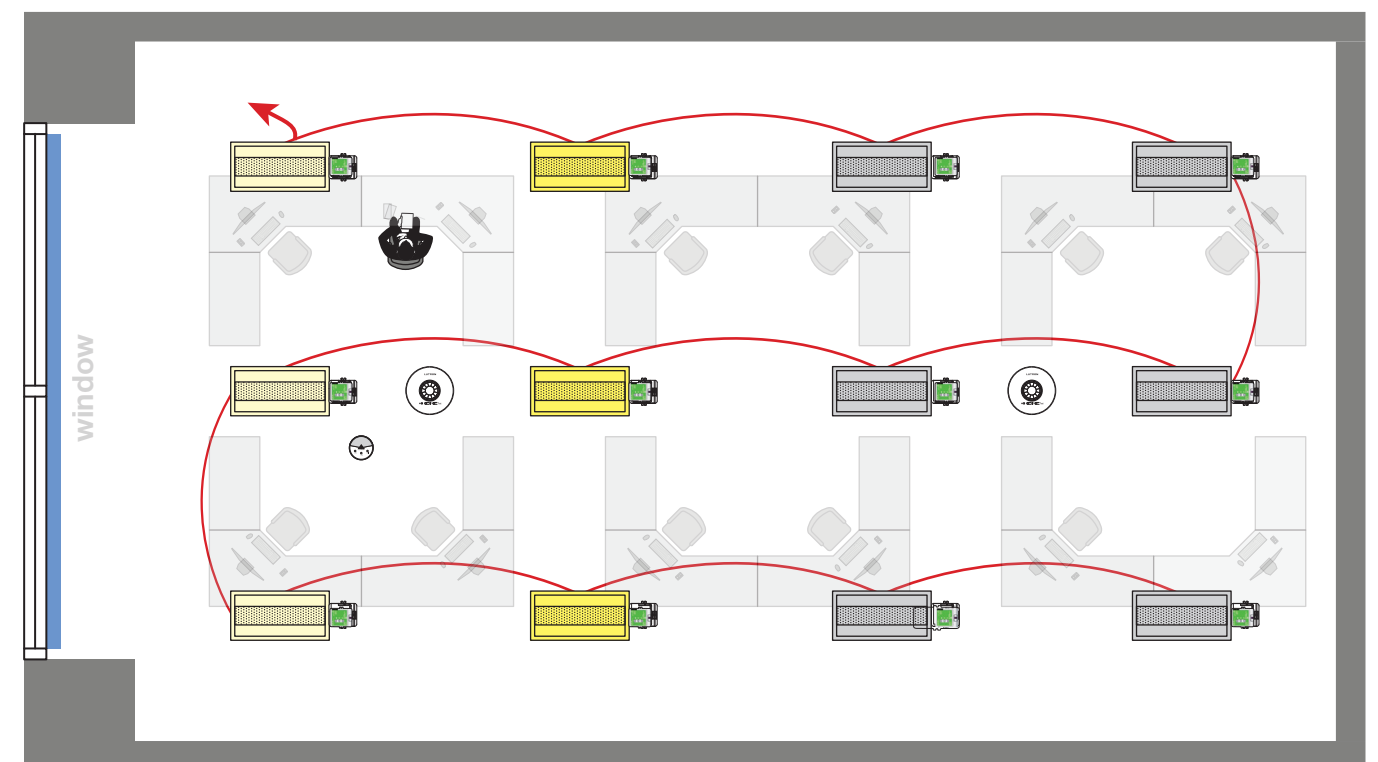

Leader in LED dimming technology

In addition to 0–10V solutions, look to Lutron as your leader in LED dimming technology. We offer superior technology for standalone, as well as system-based dimming, for both analog and digital control.

We also provide the highest quality products across these LED control types, for LED solutions you can count on.


Lutron dimmers with LED+ technology (formerly C•L) fix the issues with lamp compatibility

- Provides superior dimming of LEDs and incandescent/halogen bulbs
- Works with dimmable screw-in LEDs and incandescent/halogen bulbs — even mixed on the same circuit
- Helps future-proof dimmer installations as the bulb landscape changes from incandescent bulbs to LEDs
- High-performance dimming minimizes problems seen with other dimmers, including flicker, shimmer, and pop-on

Light bulb compatibility

- UL Listed to control over 800 different LED bulbs. Easily find the right LED bulb for your dimmer at lutron.com/LEDfinder.

■ = unique LED bulb model type

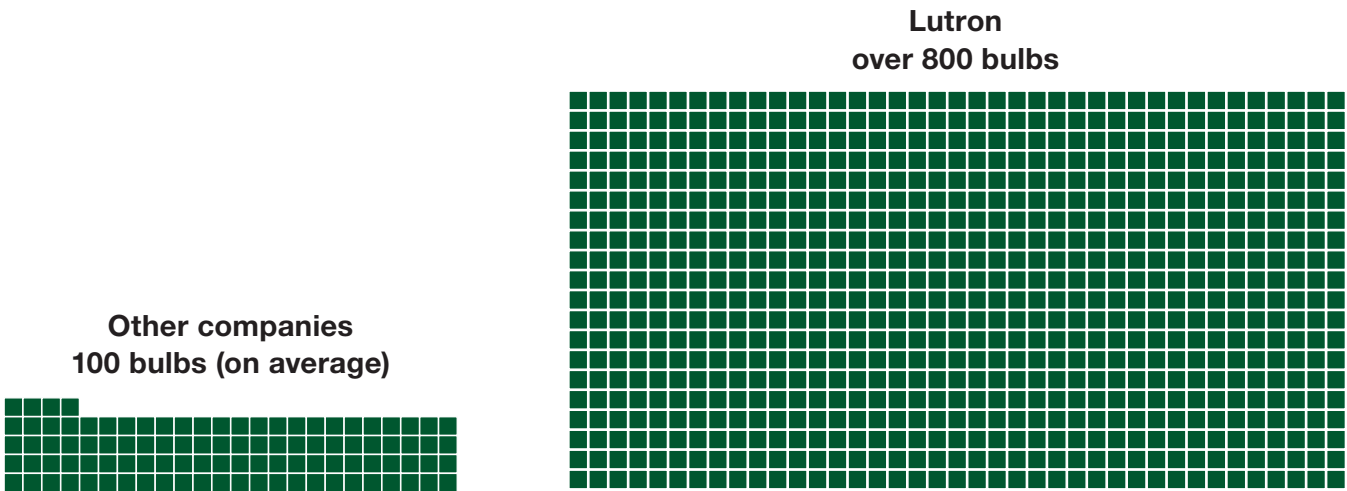

Lutron dimmers with LED+ technology

Dimmers



Dimmer/Sensor




Wireless controls



Scaling from a single room to a whole building

GRAFIK Eye QS

Perfect for conference rooms, GRAFIK Eye QS is a customizable preset lighting control system that allows you to adjust lights and shades for any task.



- ☑ Phase control
- ☑ 0-10V*
- ☑ EcoSystem

Vive

Vive is a simple, scalable, wireless control solution that can be installed in a single space or throughout an entire campus. Designed to be used in new construction or retrofit applications, Vive offers a wide variety of products—including sensors, remotes, load controls, and a software management suite.



- ☑ Phase control
- ☑ 0-10V
- ☑ EcoSystem

Energi Savr Node Solutions

For open office spaces, Energi Savr Node provides a flexible lighting control system comprised of digital fluorescent dimming ballasts, LED drivers, controls, and sensors.



- ☑ Phase control*
- ☑ 0-10V
- ☑ EcoSystem

Panel Solutions

Traditional panel-based systems offer a simple, easy-to-maintain solution for areas with higher wattage lighting zones.



- ☑ Phase control
- ☑ 0-10V
- ☐ EcoSystem

Quantum

Quantum is a lighting control and energy management system for an entire floor, building, or campus.



- ☑ Phase control
- ☑ 0-10V
- ☑ EcoSystem

*Requires interface

Model number	Description	List Price (US)*
Diva dimmers		
DVSTV	8 A lighting, 120–277 V, 3-way/single pole, no neutral or power pack required (gloss)	97.00
DVSCSTV	8 A lighting, 120–277 V, 3-way/single pole, no neutral or power pack required (Satin Colors)	107.00
DVTV	16 A lighting, 120–277 V, single pole, power pack required (gloss)	105.00
DVSCTV	16 A lighting, 120–277 V, single pole, power pack required (Satin Colors)	115.00
Nova T☆ dimmer		
NTSTV-DV	8 A lighting, 120–277 V, no neutral or power pack required	145.00
Maestro dimmer sensors		
MS-Z101	8 A lighting, 120–277 V, occupancy/vacancy, multi-location/3-way/single pole	114.00
MS-Z101-V	8 A lighting, 120–277 V, vacancy only, multi-location/3-way/single pole	114.00
PowPak dimming module		
RMJS-8T-DV-B	5 A lighting, 120–277 V, connector	152.00
RMJS-8TN-DV-B	5 A lighting, 120–277 V, flying leads	152.00
Maestro Wireless dimmer sensors		
MRF2S-8SD010	8 A lighting, 120/277 V, occupancy/vacancy, multi-location/single pole	180.00
MRF2S-8SDV010	8 A lighting, 120/277 V, vacancy only, multi-location/single pole	180.00
PowPak wireless fixture controllers and fixture sensors		
FCJS-010	0–10V control module	79.00
FCJS-010-BULK8	0–10V control module, 8-pack	610.00
FC-SENSOR	Occupancy/daylight sensor	35.00
FC-VSENSOR	Vacancy/daylight sensor	35.00
Radio Powr Savr sensors and Pico wireless remotes		
LRF2-OCR2B-P-WH	Ceiling-mount, 360° field-of-view, occupancy/vacancy sensor	89.00
LRF2-OWLB-P-WH	Wall-mount, 180° field-of-view, occupancy/vacancy sensor	89.00
LRF2-OKLB-P-WH	Corner-mount, 90° field-of-view, occupancy/vacancy sensor	89.00
LRF2-OHLB-P-WH	Hallway, occupancy/vacancy sensor	89.00
LRF2-DCRB-WH	Ceiling-mount daylight sensor	125.00
PJ2-3BRL-GWH-L01	Pico wireless remote with on/off, raise/lower, and favorite button	21.00

* Price indicated for gloss finish (White)



World Headquarters 1.610.282.3800
Technical Support 1.800.523.9466 (Available 24/7)
Customer Service 1.888.LUTRON1 (1.888.588.7661)



lutron.com

© 2020 Lutron Electronics, Inc. | P/N 367-2532 REV I

The Lutron Logo, Lutron, Ariadni, C-L, Caséta, Clear Connect, Dalia, Diva, EcoSystem, Energi Savr Node, GRAFIK Eye, LED+, Maestro, Maestro Wireless, NovaT*, Pico, PowPak, Quantum, Radio Powr Savr, Satin Colors, Skylark, Skylark Contour, Sunnata, Vive, and XCT are trademarks or registered trademarks of Lutron Electronics Co., Inc., in the U.S. and/or other countries.