



A-11

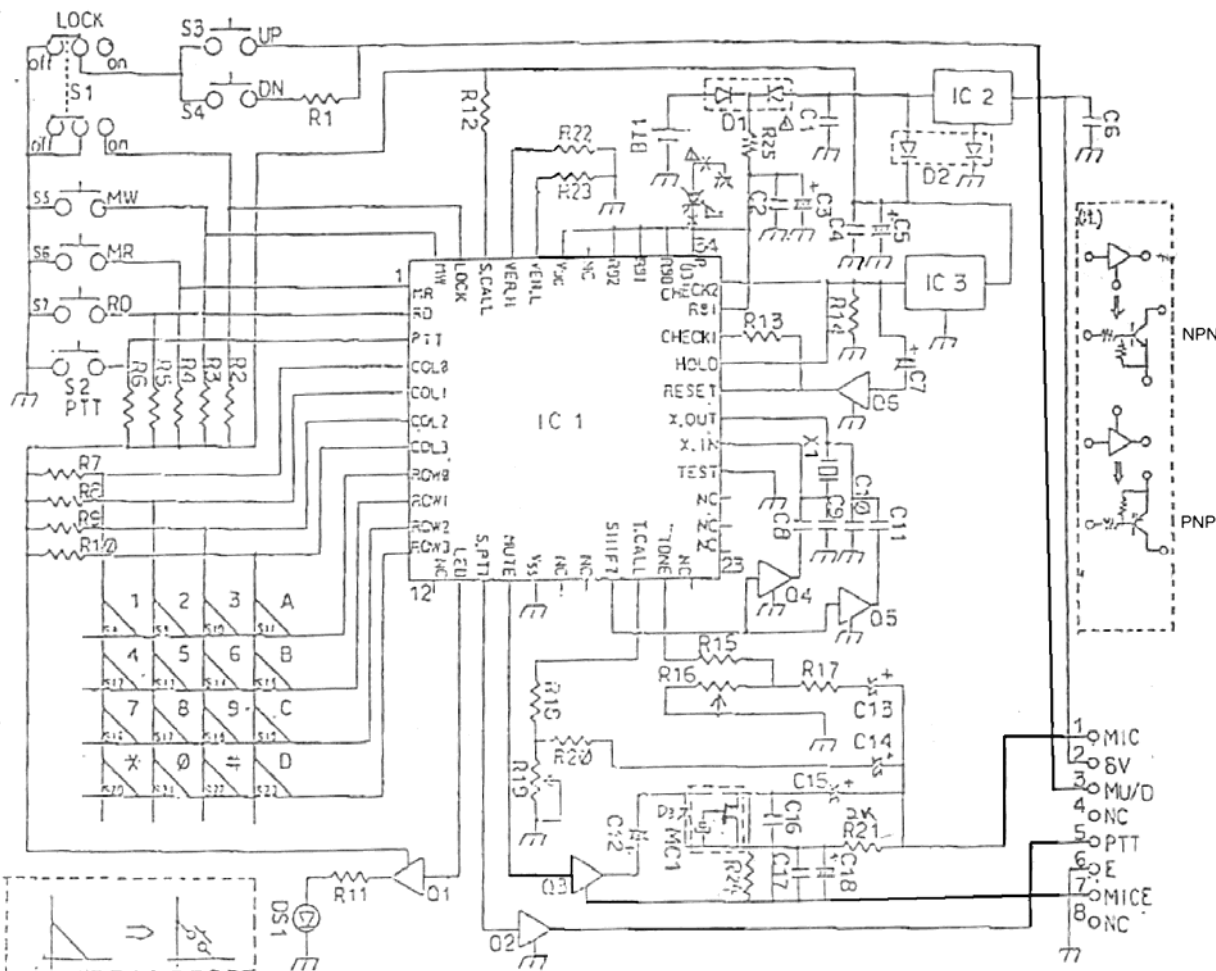

## Mic pinout / color code

- |            |        |
|------------|--------|
| 1. Mic     | White  |
| 2. 8V      | Red    |
| 3. Mic U/D | Black  |
| 4. N.C.    | N.C.   |
| 5. PTT     | Green  |
| 6. GND     | Blue   |
| 7. Mic GND | Shield |
| 8. N.C.    | N.C.   |

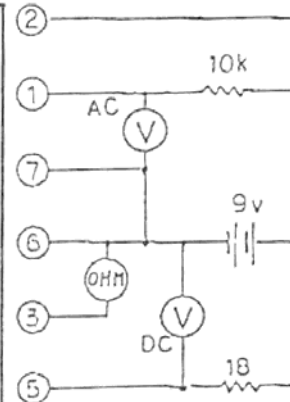

| No  | TYPE         | No  | TYPE        |
|-----|--------------|-----|-------------|
| IC1 | TNP47C452AF  | R20 | 12KΩ        |
| IC2 | TA78L05F     | R21 | 2KΩ         |
| IC3 | S-8054AER-LN | R22 | 1KΩ         |
| Q1  | RN2404       | R23 | 1KΩ         |
| Q2  | RN1402       | R24 | 2.2KΩ       |
| Q3  | RN1403       | C1  | 0.1 μF      |
| Q4  | RN1404       | C2  | 0.1 μF      |
| Q5  | RN1404       | C3  | 22 μF 6.3V  |
| Q6  | RN1403       | C4  | 0.1 μF      |
| D1  | 1SS184       | C5  | 22 μF 6.3V  |
| D2  | 1SS272       | C6  | 0.1 μF      |
| X1  | CS8480E16    | C7  | 0.1 μF 50V  |
| R1  | 470Ω         | C8  | 220pF CH    |
| R2  | 470KΩ        | C9  | 100pF CH    |
| R3  | 470KΩ        | C10 | 100pF CH    |
| R4  | 470KΩ        | C11 | 220pF CH    |
| R5  | 470KΩ        | C12 | 4.7 μF 25V  |
| R6  | 470KΩ        | C13 | 1 μF 50V    |
| R7  | 470KΩ        | C14 | 1 μF 50V    |
| R8  | 470KΩ        | C15 | 0.33 μF 50V |
| R9  | 470KΩ        | C16 | 4700pF 50V  |
| R10 | 470KΩ        | C17 | 4700pF 50V  |
| R11 | 5.6KΩ        | C18 | 10 μF 16V   |
| R12 | 470KΩ        | DS1 | TLR226      |
| R13 | 10KΩ         | MC1 | ECM         |
| R14 | 470KΩ        | S1  | 251スイッチ     |
| R15 | 10KΩ         | S2  | 271スイッチ     |
| R16 | RH04A1A 1KΩ  | S3  | 291スイッチ     |
| R17 | 1.8KΩ        | S4  | 301スイッチ     |
| R18 | 10KΩ         | BT1 | BR2032-172  |
| R19 | RH04A1A 1KΩ  | D3  | RD 4.7E     |
|     |              | R25 | 100Ω        |

HHM7563-01-0010

HHM7563-11A-0010

HHM56-9908619WL  
HHM56A-9908619WL  
MC. CARD

91810564