

**Functional
Devices, Inc.™**



2016

**Relays | Current Sensors
Power Supplies | Transformers
Power Control | Enclosures | Accessories
Wireless Devices | Energy Saving Devices**

TABLE OF CONTENTS

2016 RIB® Catalog



Functional
Devices, Inc.™

NEW PRODUCTS	2
RELAYS 10-15 AMP: 3 20-30 AMP: 23 LATCHING: 44 LOW INPUT / OPTOISOLATED: 47 ALARM: 55 DRY CONTACT INPUT: 59 NETWORK COMPATIBLE DEVICES: 65 SPECIALTY PERIPHERAL CONTROLS: 83	3
CURRENT SENSORS SOLID & SPLIT CORE: 93 TRANSDUCERS: 95 T STYLE: 98 TRACK MOUNT: 99 ENCLOSED, T STYLE & TRACK MOUNT COMBINATIONS: 100	91
POWER SUPPLIES AC: 108 DC: 125	107
TRANSFORMERS U.S. MANUFACTURED: 130	129
POWER CONTROL POWER CONTROL CENTERS: 134 TRACK MOUNT CIRCUIT BREAKER SWITCHES: 134 PREPACKAGED SWITCHES: 135 UPS INTERFACE DEVICES: 136	133
ENCLOSURES PLASTIC: 141 SMALL METAL: 142 MEDIUM METAL: 143 LARGE METAL: 144	141
ACCESSORIES SUB-PANELS: 148 MOUNTING SUPPLIES: 152 REPLACEMENT PARTS: 153	147
WIRELESS DEVICES WIRELESS CONTROL RELAYS: 156 WIRELESS TRANSMITTERS: 157	155
ENERGY SAVING DEVICES HALF-LIGHT® BALLAST CONTROLLERS: 160	159
INDEX	163

2016 NEW PRODUCTS

NEW PRODUCTS

EXPAND YOUR **NETWORK**
EXPAND YOUR **CONTROL**


RIB™
Wi-Fi RIB™



PAGES
80 & 81

Prepackaged Enclosure, Power Supply, and Sub-Panel

Great for mounting a controller
along with peripheral devices.

Designed to provide everything you need to mount controllers in one package. Convenience and time savings are essential when you're in the field, and Functional Devices is known for providing both!




PAGES
114 & 115

THE **EN** STRUCK FEAR INTO WIRES EVERYWHERE.
THE **EN2** STARTED TO TEAR THESE WIRES OUT.

EN3

THE END OF WIRES HAS COME
WIRELESS RELAYS ARE HERE

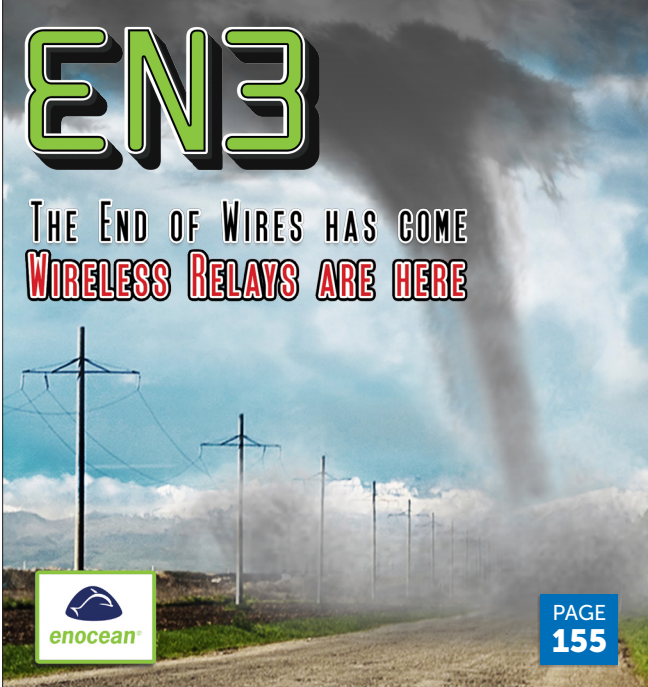


PAGE
155

ASHRAE **BACnet™**

Analog Output Network Device

 **Designed for I/O Applications**
Valve • Actuator • Damper • VFD • Pump Fan

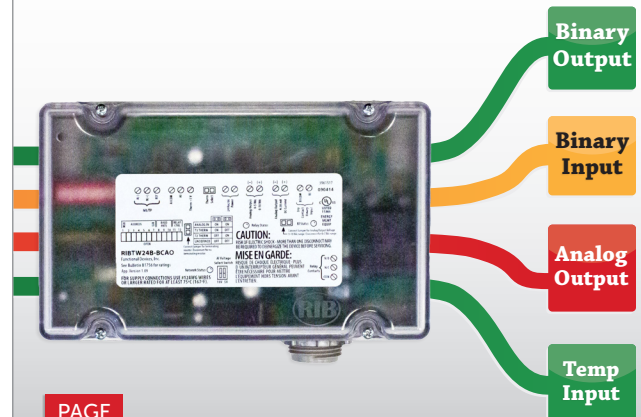

PAGE
76

PILOT RELAYS: 10–15 AMPS

Enclosed | T Style | Track Mount



Made in the U.S.A.
Meets the "Buy American" provisions of Section 1605 of the American Recovery and Reinvestment Act of 2009 (ARRA).

Prepackaged For Convenience – Great Time Saver

- LED indicator
- Multi-voltage coil input
- Several different contact ratings
- True override switch on load side of relay
- High/low voltage separation
- 10-15 Amp models
- Pre-wired
- Track mount panel style
- Time delay models

ENCLOSED PILOT RELAYS

MODEL #	UL	COIL VOLTAGE		RELAYS	CONTACTS	OVERRIDE SWITCH	NOTES	SPEC PAGE
		AC/DC	AC					
RIBU1C	•	10-30	120	1	SPDT			4
RIBH1C	•	10-30	208-277	1	SPDT			4
RIBU2C	•	10-30	120	2	2 SPDT			5
RIBH2C	•	10-30	208-277	2	2 SPDT			5
RIBL3C	•	10-30		3	3 SPST			5
RIBL4C	•	10-30		4	3 SPST, 1 SPDT			5
RIBU1S	•	10-30	120	1	SPST	1		6
RIBH1S	•	10-30	208-277	1	SPST	1		6
RIBU1SM-250	•	10-30	120	1	SPST	1+monitor		6
RIBH1SM-250	•	10-30	208-277	1	SPST	1+monitor		6
RIB2401D	•	24	120	1	DPDT			7
RIB2402D	•	24	208-277	1	DPDT			7
RIBU1SC	•	10-30	120	1	SPDT	2 ³		7
RIBH1SC	•	10-30	208-277	1	SPDT	2 ³		7
RIBL1C-DC	•	10-30 ¹		1	SPDT			8
RIB2421C	•	24	120-277	1	SPDT			8
RIBD2421C	•	24	120-277	1	SPDT		2	9
RIBU2SC	•	10-30	120	2	1 SPST, 1 SPDT	1		10
RIBU2S2	•	10-30	120	2	2 SPST	2		10

T STYLE PILOT RELAYS

MODEL #	UL	COIL VOLTAGE		RELAYS	CONTACTS	OVERRIDE SWITCH	NOTES	SPEC PAGE
		AC/DC	AC					
RIBTU1C	•	10-30	120	1	SPDT			11
RIBTH1C	•	10-30	208-277	1	SPDT			11
RIBTU2C	•	10-30	120	2	2 SPDT			11
RIBTH2C	•	10-30	208-277	2	2 SPDT			11
RIBU1CW	•	10-30	120	1	SPDT			12
RIBH1CW	•	10-30	208-277	1	SPDT			12
RIBTU1S	•	10-30	120	1	SPST	1		12
RIBTH1S	•	10-30	208-277	1	SPST	1		12
RIBTU1SC	•	10-30	120	1	SPDT	2 ³		13
RIBTH1SC	•	10-30	208-277	1	SPDT	2 ³		13
RIBT2401D	•	24	120	1	DPDT			13

UL = UL Listed : UL916 Energy Management, UL864 Fire ; USA & Canada

1 = DC Only

2 = Time Delay

3 = SPDT with override requires 2 switches

TRACK MOUNT PILOT RELAYS

RELAYS


MODEL #	UL	COIL VOLTAGE		RELAYS	CONTACTS	OVERRIDE SWITCH	NOTES	SPEC PAGE
		AC/DC	AC					
RIBAN12C	• 1	12		1	SPDT			14
RIBAN24C	• 1	24		1	SPDT			14
RIBM12C	•	12		1	SPDT			15
RIBM12S	•	12		1	SPST	1		15
RIBM24C	•	24		1	SPDT			15
RIBM24S	•	24		1	SPST	1		15
RIBM2401D	•	24	120	1	DPDT			16
RIBM2402D	•	24	208-277	1	DPDT			16
RIBMU1C	•	10-30	120	1	SPDT			16
RIBMU1S	•	10-30	120	1	SPST	1		17
RIBMH1C	•	10-30	208-277	1	SPDT			16
RIBMH1S	•	10-30	208-277	1	SPST	1		17
RIBMU2C	•	10-30	120	2	2 SPDT			17
RIBMH2C	•	10-30	208-277	2	2 SPDT			17
RIBMU1SM-250	•	10-30	120	1	SPST	1+monitor		18
RIBMH1SM-250	•	10-30	208-277	1	SPST	1+monitor		18
RIBMU1SC	•	10-30	120	1	SPDT	2 ²		18
RIBMH1SC	•	10-30	208-277	1	SPDT	2 ²		18
RIBMN12C	•	12		1	SPDT			19
RIBMN12S	•	12		1	SPST	1		19
RIBMN24C	•	24		1	SPDT			19
RIBMN24S	•	24		1	SPST	1		19
RIBMN24S-J	•	24		1	SPST	1		20
RIBMN24C-4T	•	24		4	4 SPDT			20
RIBMN24S-4T	•	24		4	4 SPST	4		20
RIBMN2401D	•	24	120	1	DPDT			21
RIBMNU1C	•	10-30	120	1	SPDT			21
RIBMNU1S	•	10-30	120	1	SPST	1		22
RIBMNH1C	•	10-30	208-277	1	SPDT			21
RIBMNH1S	•	10-30	208-277	1	SPST	1		22

UL = UL Listed : UL916 Energy Management, UL864 Fire ; USA & Canada 1 = UL Listed : UL508 only ; USA & Canada 2 = SPDT with override requires 2 switches

10 AMP PILOT CONTROL RELAYS



RIBU1C

Enclosed Relay 10 Amp SPDT with 10-30 Vac/dc/120 Vac Coil

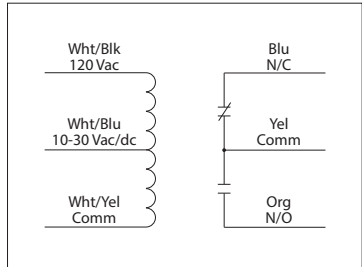

RIBH1C

Enclosed Relay 10 Amp SPDT with 10-30 Vac/dc/208-277 Vac Coil

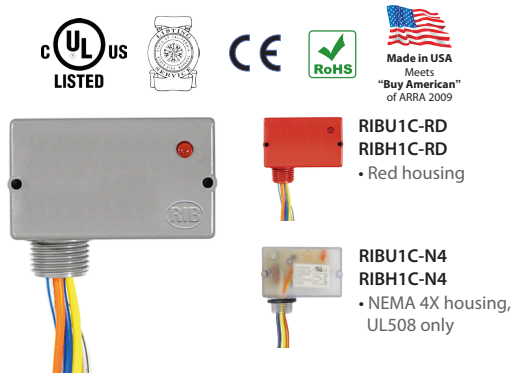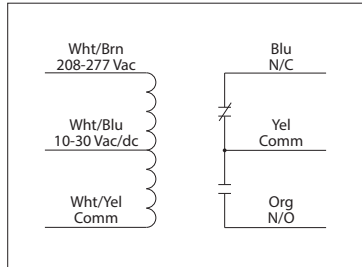

SPECIFICATIONS

Relays & Contact Type: One (1) SPDT Continuous Duty Coil
Expected Relay Life: 10 million cycles minimum mechanical
Operating Temperature: -30 to 140° F
Humidity Range: 5 to 95% (noncondensing)
Operate Time: 20ms
Relay Status: LED On = Activated
Dimensions: 1.70" x 2.80" x 1.50" with .50" NPT nipple
Wires: 16", 600V Rated
Approvals: UL Listed, UL916, UL864, C-UL California State Fire Marshal, CE, RoHS
Housing Rating: UL Accepted for Use in Plenum, NEMA 1
Gold Flash: Yes
Override Switch: No

Contact Ratings:
 10 Amp Resistive @ 277 Vac
 10 Amp Resistive @ 28 Vdc
 480 VA Pilot Duty @ 240-277 Vac
 480 VA Ballast @ 277 Vac
Not rated for Electronic Ballast
 600 Watt Tungsten @ 120 Vac (N/O)
 240 Watt Tungsten @ 120 Vac (N/C)
 1/3 HP @ 120-240 Vac (N/O)
 1/6 HP @ 120-240 Vac (N/C)
 1/4 HP @ 277 Vac (N/O)
 1/8 HP @ 277 Vac (N/C)


Coil Current:
 33 mA @ 10 Vac 13 mA @ 10 Vdc
 35 mA @ 12 Vac 15 mA @ 12 Vdc
 46 mA @ 24 Vac 18 mA @ 24 Vdc
 55 mA @ 30 Vac 20 mA @ 30 Vdc
 28 mA @ 120 Vac (RIBU1C)
 39 mA @ 208-277 Vac (RIBH1C)

Coil Voltage Input:
 10-30 Vac/dc ; 120 Vac ; 50-60 Hz (RIBU1C)
 10-30 Vac/dc ; 208-277 Vac ; 50-60 Hz (RIBH1C)
 Drop Out = 2.1 Vac / 2.8 Vdc
 Pull In = 9 Vac / 10 Vdc

10 AMP PILOT CONTROL RELAYS


RIBU2C

Enclosed Relays 10 Amp 2 SPDT with
10-30 Vac/dc/**120 Vac Coil**

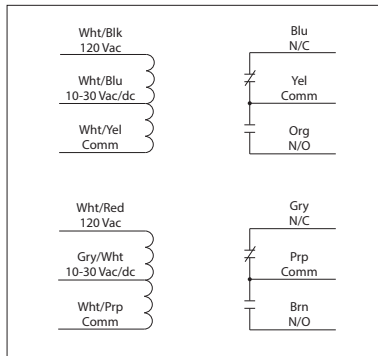

RIBH2C

Enclosed Relays 10 Amp 2 SPDT with
10-30 Vac/dc/**208-277 Vac Coil**

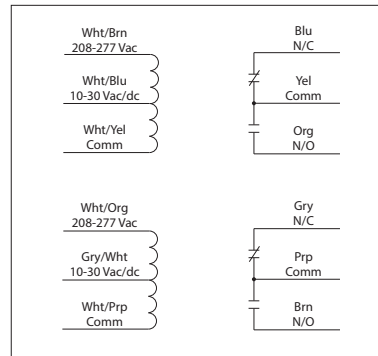

RELAYS

SPECIFICATIONS

- # Relays & Contact Type:** Two (2) SPDT Continuous Duty Coil
- Expected Relay Life:** 10 million cycles minimum mechanical
- Operating Temperature:** -30 to 140° F
- Humidity Range:** 5 to 95% (noncondensing)
- Operate Time:** 20ms
- Relay Status:** LED On = Activated
- Dimensions:** 2.30" x 3.20" x 1.80" with .75" NPT nipple
- Wires:** 16", 600V Rated
- Approvals:** UL Listed, UL916, UL864, C-UL California State Fire Marshal, CE, RoHS
- Housing Rating:** UL Accepted for Use in Plenum, NEMA 1
- Gold Flash:** Yes
- Override Switch:** No

- Contact Ratings:**
 - 10 Amp Resistive @ 277 Vac
 - 10 Amp Resistive @ 28 Vdc
 - 480 VA Pilot Duty @ 240-277 Vac
 - 480 VA Ballast @ 277 Vac
 - Not rated for Electronic Ballast*
 - 600 Watt Tungsten @ 120 Vac (N/O)
 - 240 Watt Tungsten @ 120 Vac (N/C)
 - 1/3 HP @ 120-240 Vac (N/O)
 - 1/6 HP @ 120-240 Vac (N/C)
 - 1/4 HP @ 277 Vac (N/O)
 - 1/8 HP @ 277 Vac (N/C)


- Coil Current:**
 - 33 mA @ 10 Vac
 - 35 mA @ 12 Vac
 - 46 mA @ 24 Vac
 - 55 mA @ 30 Vac
 - 28 mA @ 120 Vac (RIBU2C)
 - 39 mA @ 208-277 Vac (RIBH2C)
 - 13 mA @ 10 Vdc
 - 15 mA @ 12 Vdc
 - 18 mA @ 24 Vdc
 - 20 mA @ 30 Vdc

- Coil Voltage Input:**
 - 10-30 Vac/dc ; 120 Vac ; 50-60 Hz (RIBU2C)
 - 10-30 Vac/dc ; 208-277 Vac ; 50-60 Hz (RIBH2C)
 - Drop Out = 2.1 Vac / 2.8 Vdc
 - Pull In = 9 Vac / 10 Vdc

10 AMP PILOT CONTROL RELAYS


RIBL3C

Enclosed Relays 10 Amp 3 SPST-N/O with
10-30 Vac/dc Coil

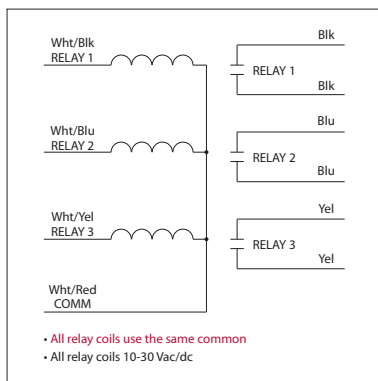

RIBL4C

Enclosed Relays 10 Amp 3 SPST-N/O +
1 SPDT with 10-30 Vac/dc Coil

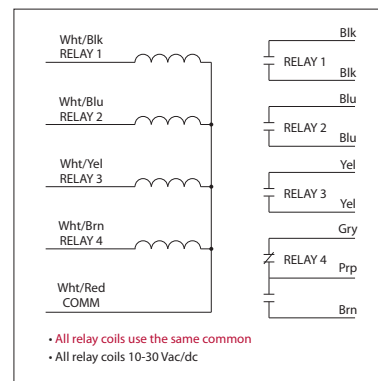

SPECIFICATIONS

- # Relays & Contact Type:** Three (3) SPST Continuous Duty Coil (RIBL3C)
Three (3) SPST + One (1) SPDT Continuous Duty Coil (RIBL4C)
- Expected Relay Life:** 10 million cycles minimum mechanical
- Operating Temperature:** -30 to 140° F
- Humidity Range:** 5 to 95% (noncondensing)
- Operate Time:** 20ms
- Relay Status:** LED On = Activated
- Dimensions:** 4.00" x 4.00" x 1.80" with .50" NPT nipple
- Wires:** 16", 600V Rated
- Approvals:** UL Listed, UL916, UL864, C-UL California State Fire Marshal, CE, RoHS
- Housing Rating:** UL Accepted for Use in Plenum, NEMA 1
- Gold Flash:** Yes
- Override Switch:** No

- Contact Ratings:**
 - 10 Amp Resistive @ 277 Vac
 - 10 Amp Resistive @ 28 Vdc
 - 480 VA Pilot Duty @ 240-277 Vac
 - 480 VA Ballast @ 277 Vac
 - Not rated for Electronic Ballast*
 - 600 Watt Tungsten @ 120 Vac (N/O)
 - 240 Watt Tungsten @ 120 Vac (N/C)
 - 1/3 HP @ 120-240 Vac (N/O)
 - 1/6 HP @ 120-240 Vac (N/C)
 - 1/4 HP @ 277 Vac (N/O)
 - 1/8 HP @ 277 Vac (N/C)

- Coil Current:**
 - 33 mA @ 10 Vac
 - 35 mA @ 12 Vac
 - 46 mA @ 24 Vac
 - 55 mA @ 30 Vac
 - 13 mA @ 10 Vdc
 - 15 mA @ 12 Vdc
 - 18 mA @ 24 Vdc
 - 20 mA @ 30 Vdc


- Coil Voltage Input:**
 - 10-30 Vac/dc ; 50-60 Hz
 - Drop Out = 2.1 Vac / 2.8 Vdc
 - Pull In = 9 Vac / 10 Vdc

- Notes:**
 - Order Normally Closed by adding "-NC" to end of model number

10 AMP PILOT CONTROL RELAYS


RIBU1S

Enclosed Relay 10 Amp SPST-N/O + Override with 10-30 Vac/dc/120 Vac Coil

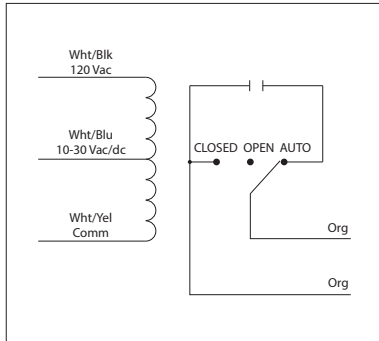

RIBH1S

Enclosed Relay 10 Amp SPST-N/O + Override with 10-30 Vac/dc/208-277 Vac Coil

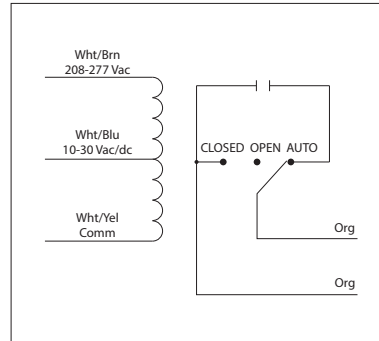

RELAYS

SPECIFICATIONS

Relays & Contact Type: One (1) SPST Continuous Duty Coil
Expected Relay Life: 10 million cycles minimum mechanical
Operating Temperature: -30 to 140° F
Humidity Range: 5 to 95% (noncondensing)
Operate Time: 20ms
Relay Status: LED On = Activated
Dimensions: 2.30" x 3.20" x 1.80" with .50" NPT nipple
Wires: 16", 600V Rated
Approvals: UL Listed, UL916, UL864, C-UL
 California State Fire Marshal, CE, RoHS
Housing Rating: UL Accepted for Use in Plenum, NEMA 1
Gold Flash: Yes
Override Switch: Yes

Contact Ratings:
 10 Amp Resistive @ 277 Vac
 480 VA Pilot Duty @ 277 Vac
 480 VA Ballast @ 277 Vac
Not rated for Electronic Ballast
 600 Watt Tungsten @ 120 Vac (N/O)
 240 Watt Tungsten @ 120 Vac (N/C)
 1/3 HP @ 120-240 Vac (N/O)
 1/6 HP @ 120-240 Vac (N/C)
 1/4 HP @ 277 Vac (N/O)
 1/8 HP @ 277 Vac (N/C)
Coil Voltage Input:
 10-30 Vac/dc ; 120 Vac ; 50-60 Hz (RIBU1S)
 10-30 Vac/dc ; 208-277 Vac ; 50-60 Hz (RIBH1S)
 Drop Out = 2.1 Vac / 2.8 Vdc
 Pull In = 9 Vac / 10 Vdc


Coil Current:
 33 mA @ 10 Vac 13 mA @ 10 Vdc
 35 mA @ 12 Vac 15 mA @ 12 Vdc
 46 mA @ 24 Vac 18 mA @ 24 Vdc
 55 mA @ 30 Vac 20 mA @ 30 Vdc
 28 mA @ 120 Vac (RIBU1S)
 39 mA @ 208-277 Vac (RIBH1S)

Notes:
 • Order Normally Closed by adding "-NC" to end of model number

10 AMP PILOT CONTROL RELAYS


RIBU1SM-250

Enclosed Relay 10 Amp SPST-N/O + Override + Monitor with 10-30 Vac/dc/120 Vac Coil

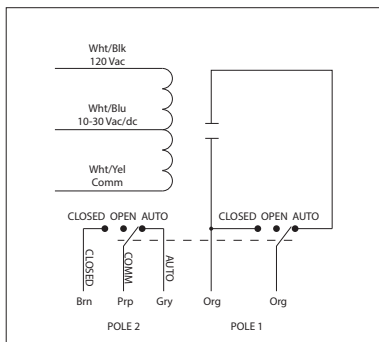

RIBH1SM-250

Enclosed Relay 10 Amp SPST-N/O + Override + Monitor with 10-30 Vac/dc/208-277 Vac Coil

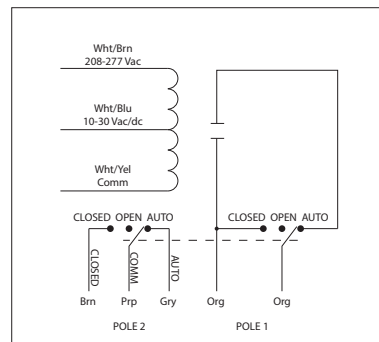

SPECIFICATIONS

Relays & Contact Type: One (1) SPST Continuous Duty Coil
Expected Relay Life: 10 million cycles minimum mechanical
Operating Temperature: -30 to 140° F
Humidity Range: 5 to 95% (noncondensing)
Operate Time: 20ms
Relay Status: LED On = Activated
Dimensions: 2.30" x 3.20" x 1.80" with .50" NPT nipple
Wires: 16", 600V Rated
Approvals: UL Listed, UL916, UL864, C-UL
 California State Fire Marshal, CE, RoHS
Housing Rating: UL Accepted for Use in Plenum, NEMA 1
Gold Flash: Yes
Override Switch: Yes + Monitor

Contact Ratings:
 10 Amp Resistive @ 120/250 Vac
 345 VA Pilot Duty @ 120/240 Vac
 211 VA Pilot Duty @ 120/240 Vac
 1/3 HP @ 120-240 Vac (N/O)
 1/6 HP @ 120-240 Vac (N/C)

Coil Current:
 55 mA @ 30 Vac
 28 mA @ 120 Vac (RIBU1SM-250)
 39 mA @ 208-277 Vac (RIBH1SM-250)
 20 mA @ 30 Vdc


Coil Voltage Input:
 10-30 Vac/dc ; 120 Vac ; 50-60 Hz (RIBU1SM-250)
 10-30 Vac/dc ; 208-277 Vac ; 50-60 Hz (RIBH1SM-250)
 Drop Out = 2.1 Vac / 2.8 Vdc
 Pull In = 9 Vac / 10 Vdc

Notes:
 • Second pole of override switch can be connected to digital-in of controller to report position of override switch
 • Rating of second pole is 250 Vac max and 5 Amp max
 • Order Normally Closed by adding "-NC" to end of model number

10 AMP PILOT CONTROL RELAYS


RIB2401D

Enclosed Relay 10 Amp DPDT with
24 Vac/dc/120 Vac Coil

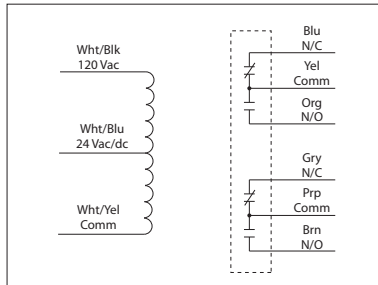

RIB2402D

Enclosed Relay 10 Amp DPDT with
24 Vac/dc/208-277 Vac Coil

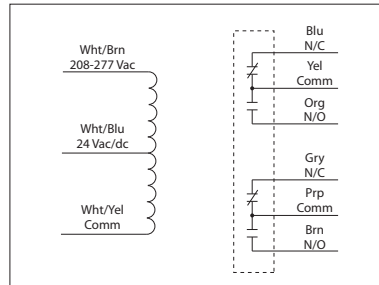

RIB2401D-RD
RIB2402D-RD
• Red housing



RIB2401D-N4
RIB2402D-N4
• NEMA 4X housing,
UL508 only

SPECIFICATIONS

Relays & Contact Type: One (1) DPDT Continuous Duty Coil
Expected Relay Life: 10 million cycles minimum mechanical
Operating Temperature: -30 to 140° F
Humidity Range: 5 to 95% (noncondensing)
Operate Time: 8ms
Relay Status: LED On = Activated
Dimensions: 1.70" x 2.80" x 1.50" with .50" NPT nipple
Wires: 16", 600V Rated
Approvals: UL Listed, UL916, UL864, C-UL
 California State Fire Marshal, CE, RoHS
Housing Rating: UL Accepted for Use in Plenum, NEMA 1
Gold Flash: No
Override Switch: No

Contact Ratings:
 10 Amp Resistive @ 30 Vdc
 10 Amp General Use @ 277 Vac
 1/2 HP @ 120/240 Vac (N/O)
 1/3 HP @ 120/240 Vac (N/C)
B300 Pilot Duty
 120 Vac 30A Make 3A Break (360 VA)
 240 Vac 15A Make 1.5A Break (360 VA)
 208 Vac 17.3A Make 1.73A Break (360 VA)
 277 Vac 13A Make 1.3A Break (360 VA)
 24 Vac 30A Make 5A Break (120VA) 5A Max


Coil Current:
 24 mA @ 18 Vac 20 mA @ 20 Vdc
 32 mA @ 24 Vac 24 mA @ 24 Vdc
 40 mA @ 30 Vac 36 mA @ 30 Vdc
 31 mA @ 120 Vac (RIB2401D)
 36 mA @ 208-277 Vac (RIB2402D)

Coil Voltage Input:
 24 Vac/dc ; 120 Vac ; 50-60 Hz (RIB2401D)
 24 Vac/dc ; 208-277 Vac ; 50-60 Hz (RIB2402D)
 Drop Out = 3 Vac / 3.8 Vdc
 Pull In = 18 Vac / 20 Vdc

10 AMP PILOT CONTROL RELAYS



RIBU1SC

Enclosed Relay 10 Amp SPDT + Override with
10-30 Vac/dc/120 Vac Coil

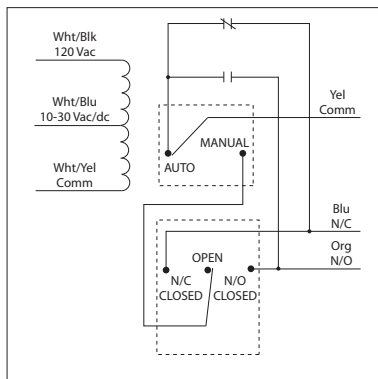

RIBH1SC

Enclosed Relay 10 Amp SPDT + Override with
10-30 Vac/dc/208-277 Vac Coil

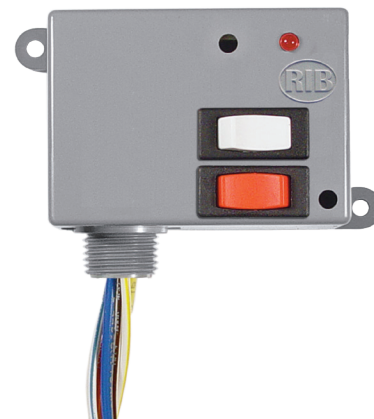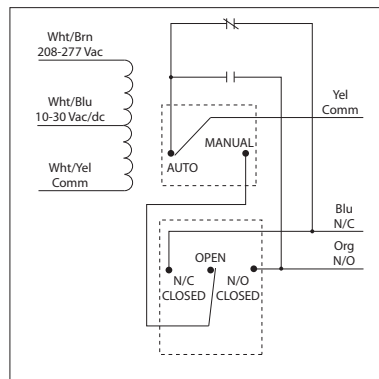

SPECIFICATIONS

Relays & Contact Type: One (1) SPDT Continuous Duty Coil
Expected Relay Life: 10 million cycles minimum mechanical
Operating Temperature: -30 to 140° F
Humidity Range: 5 to 95% (noncondensing)
Operate Time: 20ms
Relay Status: LED On = Activated
Dimensions: 2.30" x 3.20" x 1.80" with .50" NPT nipple
Wires: 16", 600V Rated
Approvals: UL Listed, UL916, UL864, C-UL
 California State Fire Marshal, CE, RoHS
Housing Rating: UL Accepted for Use in Plenum, NEMA 1
Gold Flash: Yes
Override Switch: Yes (2)

Contact Ratings:
 10 Amp Resistive @ 277 Vac
 480 VA Pilot Duty @ 277 Vac
 480 VA Ballast @ 277 Vac
Not rated for Electronic Ballast
 600 Watt Tungsten @ 120 Vac (N/O)
 240 Watt Tungsten @ 120 Vac (N/C)
 1/3 HP @ 120-240 Vac (N/O)
 1/6 HP @ 120-240 Vac (N/C)
 1/4 HP @ 277 Vac (N/O)
 1/8 HP @ 277 Vac (N/C)



Coil Current:
 33 mA @ 10 Vac 13 mA @ 10 Vdc
 35 mA @ 12 Vac 15 mA @ 12 Vdc
 46 mA @ 24 Vac 18 mA @ 24 Vdc
 55 mA @ 30 Vac 20 mA @ 30 Vdc
 28 mA @ 120 Vac (RIBU1SC)
 39 mA @ 208-277 Vac (RIBH1SC)

Coil Voltage Input:
 10-30 Vac/dc ; 120 Vac ; 50-60 Hz (RIBU1SC)
 10-30 Vac/dc ; 208-277 Vac ; 50-60 Hz (RIBH1SC)
 Drop Out = 2.1 Vac / 2.8 Vdc
 Pull In = 9 Vac / 10 Vdc

10 AMP PILOT CONTROL RELAYS

RIBL1C-DC

Enclosed Relay 10 Amp SPDT with 10-30 Vdc
Limited Inrush Coil

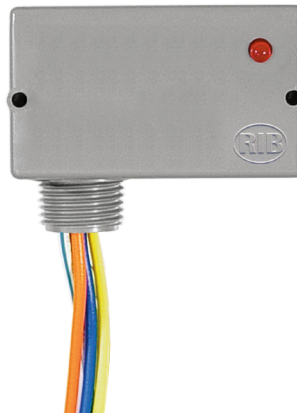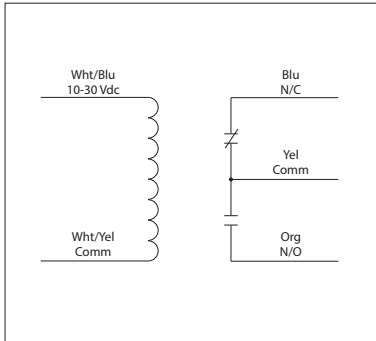

RIBL1C-DC-RD
• Red housing

RIBL1C-DC-N4
• NEMA 4X housing,
UL508 only



SPECIFICATIONS

Relays & Contact Type: One (1) SPDT Continuous Duty Coil
Expected Relay Life: 10 million cycles minimum mechanical
Operating Temperature: -30 to 140° F
Humidity Range: 5 to 95% (noncondensing)
Operate Time: 20ms
Relay Status: LED On = Activated
Dimensions: 1.70" x 2.80" x 1.50" with .50" NPT nipple
Wires: 16", 600V Rated
Approvals: UL Listed, UL916, UL864, C-UL
California State Fire Marshal, CE, RoHS
Housing Rating: UL Accepted for Use in Plenum, NEMA 1
Gold Flash: Yes
Override Switch: No

Contact Ratings:
 10 Amp Resistive @ 277 Vac
 10 Amp Resistive @ 28 Vdc
 480 VA Pilot Duty @ 240-277 Vac
 480 VA Ballast @ 277 Vac
Not rated for Electronic Ballast
 600 Watt Tungsten @ 120 Vac (N/O)
 240 Watt Tungsten @ 120 Vac (N/C)
 1/3 HP @ 120-240 Vac (N/O)
 1/6 HP @ 120-240 Vac (N/C)
 1/4 HP @ 277 Vac (N/O)
 1/8 HP @ 277 Vac (N/C)



Coil Current:
 13 mA @ 10 Vdc
 15 mA @ 12 Vdc
 18 mA @ 24 Vdc
 20 mA @ 30 Vdc

Coil Voltage Input:
 10-30 Vdc
 Drop Out = 2.8 Vdc
 Pull In = 10 Vdc

10 AMP PILOT CONTROL RELAYS

RIB2421C

Enclosed Relay 10 Amp SPDT with
24 Vac/dc/120-277 Vac Coil

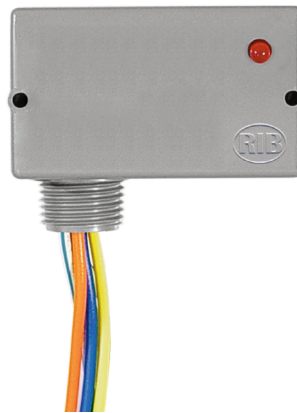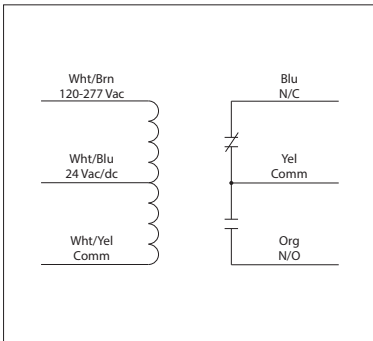

RIB2421C-RD
• Red housing

RIB2421C-N4
• NEMA 4X housing,
UL508 only



**GREAT SERVICE
TRUCK RELAY
ONE RELAY COVERS
MOST APPLICATIONS**

SPECIFICATIONS

Relays & Contact Type: One (1) SPDT Continuous Duty Coil
Expected Relay Life: 10 million cycles minimum mechanical
Operating Temperature: -30 to 140° F
Humidity Range: 5 to 95% (noncondensing)
Operate Time: 20ms
Relay Status: LED On = Activated
Dimensions: 1.70" x 2.80" x 1.50" with .50" NPT nipple
Wires: 16", 600V Rated
Approvals: UL Listed, UL916, UL864, C-UL
California State Fire Marshal, CE, RoHS
Housing Rating: UL Accepted for Use in Plenum, NEMA 1
Gold Flash: No
Override Switch: No

Contact Ratings:
 10 Amp General Use @ 277 Vac
 10 Amp Resistive @ 30 Vdc (N/O)
 7 Amp Resistive @ 30 Vdc (N/C)
 1/2 HP @ 125 Vac
 1 HP @ 250 Vac
 1/4 HP @ 277 Vac
 C300 Pilot Duty



Coil Current:
 66 mA @ 24 Vac
 38 mA @ 24 Vdc
 40 mA @ 120-277 Vac

Coil Voltage Input:
 24 Vac/dc ; 120-277 Vac ; 50-60 Hz
 Drop Out = 3 Vac / 3.8 Vdc
 Pull In = 20 Vac / 20 Vdc

10 AMP PILOT CONTROL RELAY

RIBD2421C

Enclosed Time Delay Relay 10 Amp SPDT with 24 Vac/dc/120-277 Vac Coil

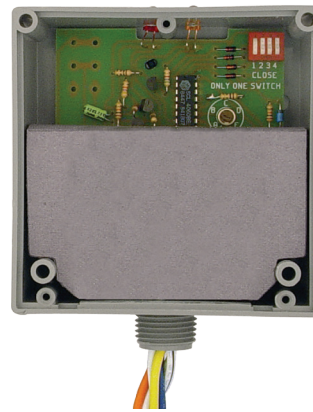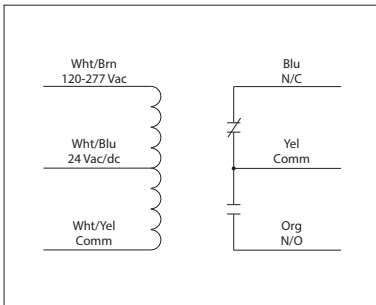

RELAYS


SPECIFICATIONS

- # Relays & Contact Type:** One (1) SPDT Continuous Duty Coil
- Expected Relay Life:** 10 million cycles minimum mechanical
- Operating Temperature:** -30 to 140° F
 - Humidity Range:** 5 to 95% (noncondensing)
 - Operate Time:** 6ms after time delay
 - Relay Status:** RED LED On = Activated
 - Time Delay Status:** PINK LED FLASHING = Timing
 - Timing Mode:** Delay On Make (N/O)
 - Timing Range:** 6 seconds - 20 minutes
 - Timing Adjustment:** 4 position DIP switch for range selection and single turn potentiometer for timing adjustment within range
- Timing Tolerance:** Switches 1 & 2 = ±10%
Switches 3 & 4 = ±5%
- Timing Repeatability:** ±1%
- Temperature Timing Variance:** ±1%
- Voltage Timing Variance:** ±1%
- Recycle Time:** 750ms Maximum
- Dimensions:** 4.00" x 4.00" x 1.80" with .50" NPT nipple
- Wires:** 16", 600V Rated
- Approvals:** UL Listed, UL916, UL864, C-UL California State Fire Marshal, CE, RoHS
- Housing Rating:** UL Accepted for Use in Plenum, NEMA 1
- Gold Flash:** No
- Override Switch:** No


- Contact Ratings:**
 - 10 Amp General Use @ 277 Vac
 - 10 Amp Resistive @ 30 Vdc (N/O)
 - 7 Amp Resistive @ 30 Vdc (N/C)
 - 1/2 HP @ 125 Vac
 - 1 HP @ 250 Vac
 - 1/4 HP @ 277 Vac
 - C300 Pilot Duty

- Input Current:**
 - 66 mA @ 24 Vac
 - 38 mA @ 24 Vdc
 - 40 mA @ 120-277 Vac


- Coil Voltage Input:**
 - 24 Vac/dc; 120-277 Vac; 50-60 Hz
 - Drop Out = 3 Vac / 3.8 Vdc
 - Pull In = 20 Vac / 20 Vdc



Timing Adjustment




Range Selection




TIMING TABLE						
Switch Ranges	Close Dip Switch	Potentiometer Setting				
		A	B	C	D	E
6s-20s	1	6s	9s	13s	16s	20s
22s-1min15s	2	22s	36s	50s	1min4s	1min15s
1min30s-5min	3	1min30s	2min10s	3min20s	4min16s	5min
6min-20min	4	6min	9min	13min20s	17min20s	20min

Timing Diagram

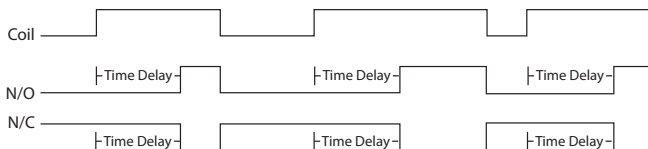

Time Delay Application



Load 2 stays on selected amount of time after Load 1 goes off.

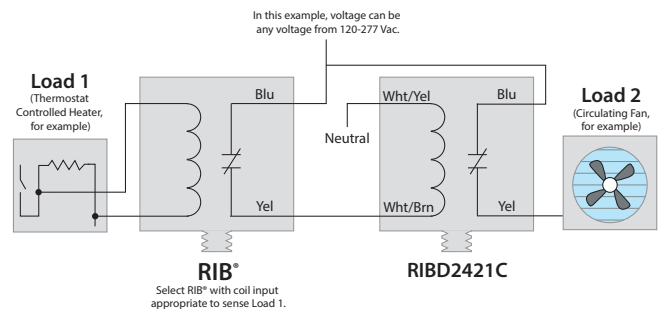

10 AMP PILOT CONTROL RELAY

RIBU2SC

Enclosed Relays 10 Amp SPST-N/O + Override
+ 1 SPDT with 10-30 Vac/dc/120 Vac Coil

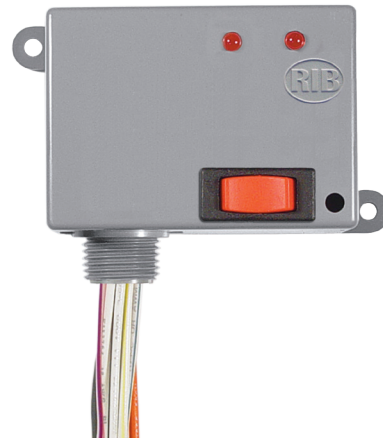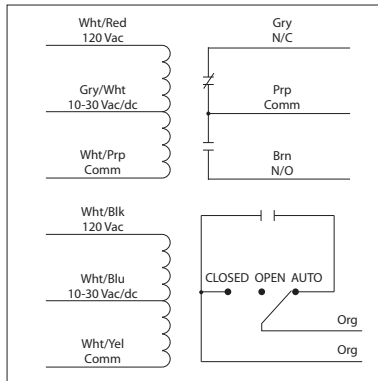

SPECIFICATIONS

Relays & Contact Type: One (1) SPST + One (1) SPDT
Continuous Duty Coil

Expected Relay Life: 10 million cycles minimum mechanical

Operating Temperature: -30 to 140° F

Humidity Range: 5 to 95% (noncondensing)

Operate Time: 20ms

Relay Status: LED On = Activated

Dimensions: 2.30" x 3.20" x 1.80" with .75" NPT nipple

Wires: 16", 600V Rated

Approvals: UL Listed, UL916, UL864, C-UL
California State Fire Marshal, CE, RoHS

Housing Rating: UL Accepted for Use in Plenum, NEMA 1

Gold Flash: Yes

Override Switch: Yes

Contact Ratings:
10 Amp Resistive @ 277 Vac
480 VA Pilot Duty @ 277 Vac
480 VA Ballast @ 277 Vac
Not rated for Electronic Ballast
600 Watt Tungsten @ 120 Vac (N/O)
240 Watt Tungsten @ 120 Vac (N/C)
1/3 HP @ 120-240 Vac (N/O)
1/6 HP @ 120-240 Vac (N/C)
1/4 HP @ 277 Vac (N/O)
1/8 HP @ 277 Vac (N/C)

Coil Current:
33 mA @ 10 Vac
35 mA @ 12 Vac
46 mA @ 24 Vac
55 mA @ 30 Vac
28 mA @ 120 Vac
13 mA @ 10 Vdc
15 mA @ 12 Vdc
18 mA @ 24 Vdc
20 mA @ 30 Vdc


Coil Voltage Input:
10-30 Vac/dc; 120 Vac; 50-60 Hz
Drop Out = 2.1 Vac / 2.8 Vdc
Pull In = 9 Vac / 10 Vdc

Notes:
• Order Normally Closed by adding
"-NC" to end of model number

10 AMP PILOT CONTROL RELAY

RIBU2S2

Enclosed Relays 10 Amp 2 SPST-N/O + 2
Overrides with 10-30 Vac/dc/120 Vac Coil

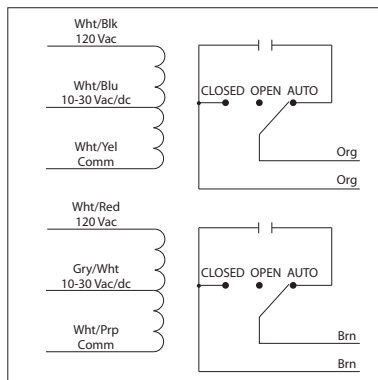

SPECIFICATIONS

Relays & Contact Type: Two (2) SPST Continuous Duty Coil

Expected Relay Life: 10 million cycles minimum mechanical

Operating Temperature: -30 to 140° F

Humidity Range: 5 to 95% (noncondensing)

Operate Time: 20ms

Relay Status: LED On = Activated

Dimensions: 4.00" x 4.00" x 1.80" with .50" NPT nipple

Wires: 16", 600V Rated

Approvals: UL Listed, UL916, UL864, C-UL
California State Fire Marshal, CE, RoHS

Housing Rating: UL Accepted for Use in Plenum, NEMA 1

Gold Flash: Yes

Override Switch: Yes (2)

Contact Ratings:
10 Amp Resistive @ 277 Vac
480 VA Pilot Duty @ 277 Vac
480 VA Ballast @ 277 Vac
Not rated for Electronic Ballast
600 Watt Tungsten @ 120 Vac (N/O)
240 Watt Tungsten @ 120 Vac (N/C)
1/3 HP @ 120-240 Vac (N/O)
1/6 HP @ 120-240 Vac (N/C)
1/4 HP @ 277 Vac (N/O)
1/8 HP @ 277 Vac (N/C)

Coil Current:
33 mA @ 10 Vac
35 mA @ 12 Vac
46 mA @ 24 Vac
55 mA @ 30 Vac
28 mA @ 120 Vac
13 mA @ 10 Vdc
15 mA @ 12 Vdc
18 mA @ 24 Vdc
20 mA @ 30 Vdc


Coil Voltage Input:
10-30 Vac/dc; 120 Vac; 50-60 Hz
Drop Out = 2.1 Vac / 2.8 Vdc
Pull In = 9 Vac / 10 Vdc

Notes:
• Order Normally Closed by adding
"-NC" to end of model number

10 AMP PILOT CONTROL RELAYS



RIBTU1C

Enclosed Relay Hi/Low Separation 10 Amp
SPDT with 10-30 Vac/dc/**120 Vac Coil**

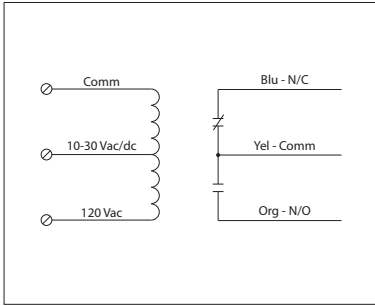

RIBTH1C

Enclosed Relay Hi/Low Separation 10 Amp
SPDT with 10-30 Vac/dc/**208-277 Vac Coil**

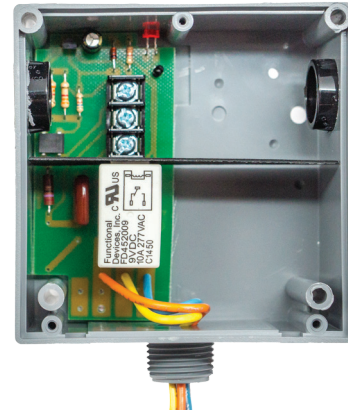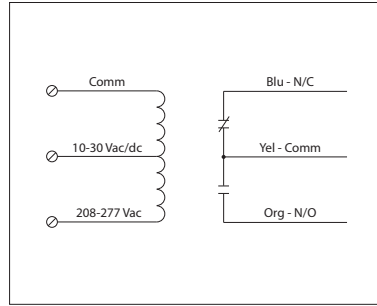

SPECIFICATIONS

Relays & Contact Type: One (1) SPDT Continuous Duty Coil
Expected Relay Life: 10 million cycles minimum mechanical
Operating Temperature: -30 to 140° F
Humidity Range: 5 to 95% (noncondensing)
Operate Time: 20ms
Relay Status: LED On = Activated
Dimensions: 4.00" x 4.00" x 1.80" with .50" NPT nipple
Wires: 16", 600V Rated
Approvals: UL Listed, UL916, UL864, C-UL
 California State Fire Marshal, CE, RoHS
Housing Rating: UL Accepted for Use in Plenum, NEMA 1
Gold Flash: Yes
Override Switch: No

Contact Ratings:
 10 Amp Resistive @ 277 Vac
 10 Amp Resistive @ 28 Vdc
 480 VA Pilot Duty @ 240-277 Vac
 480 VA Ballast @ 277 Vac
Not rated for Electronic Ballast
 600 Watt Tungsten @ 120 Vac (N/O)
 240 Watt Tungsten @ 120 Vac (N/C)
 1/3 HP @ 120-240 Vac (N/O)
 1/6 HP @ 120-240 Vac (N/C)
 1/4 HP @ 277 Vac (N/O)
 1/8 HP @ 277 Vac (N/C)


Coil Current:
 33 mA @ 10 Vac 13 mA @ 10 Vdc
 35 mA @ 12 Vac 15 mA @ 12 Vdc
 46 mA @ 24 Vac 18 mA @ 24 Vdc
 55 mA @ 30 Vac 20 mA @ 30 Vdc
 28 mA @ 120 Vac (RIBTU1C)
 39 mA @ 208-277 Vac (RIBTH1C)

Coil Voltage Input:
 10-30 Vac/dc; 120 Vac; 50-60 Hz (RIBTU1C)
 10-30 Vac/dc; 208-277 Vac; 50-60 Hz (RIBTH1C)
 Drop Out = 2.1 Vac / 2.8 Vdc
 Pull In = 9 Vac / 10 Vdc

10 AMP PILOT CONTROL RELAYS



RIBTU2C

Enclosed Relays Hi/Low Separation 10 Amp
2 SPDT with 10-30 Vac/dc/**120 Vac Coil**

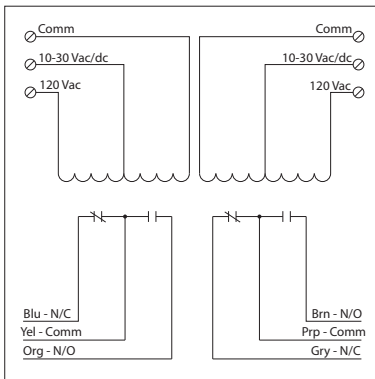

RIBTH2C

Enclosed Relays Hi/Low Separation 10 Amp
2 SPDT with 10-30 Vac/dc/**208-277 Vac Coil**

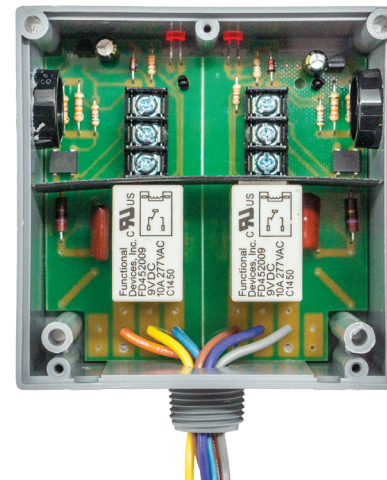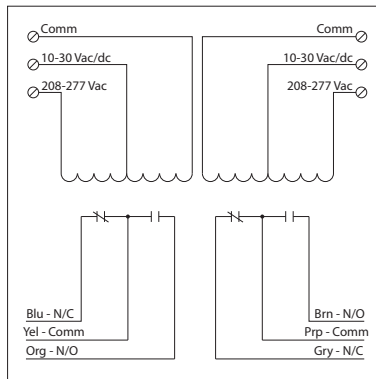

SPECIFICATIONS

Relays & Contact Type: Two (2) SPDT Continuous Duty Coil
Expected Relay Life: 10 million cycles minimum mechanical
Operating Temperature: -30 to 140° F
Humidity Range: 5 to 95% (noncondensing)
Operate Time: 20ms
Relay Status: LED On = Activated
Dimensions: 4.00" x 4.00" x 1.80" with .50" NPT nipple
Wires: 16", 600V Rated
Approvals: UL Listed, UL916, UL864, C-UL
 California State Fire Marshal, CE, RoHS
Housing Rating: UL Accepted for Use in Plenum, NEMA 1
Gold Flash: Yes
Override Switch: No

Contact Ratings:
 10 Amp Resistive @ 277 Vac
 10 Amp Resistive @ 28 Vdc
 480 VA Pilot Duty @ 240-277 Vac
 480 VA Ballast @ 277 Vac
Not rated for Electronic Ballast
 600 Watt Tungsten @ 120 Vac (N/O)
 240 Watt Tungsten @ 120 Vac (N/C)
 1/3 HP @ 120-240 Vac (N/O)
 1/6 HP @ 120-240 Vac (N/C)
 1/4 HP @ 277 Vac (N/O)
 1/8 HP @ 277 Vac (N/C)


Coil Current:
 33 mA @ 10 Vac 13 mA @ 10 Vdc
 35 mA @ 12 Vac 15 mA @ 12 Vdc
 46 mA @ 24 Vac 18 mA @ 24 Vdc
 55 mA @ 30 Vac 20 mA @ 30 Vdc
 28 mA @ 120 Vac (RIBTU2C)
 39 mA @ 208-277 Vac (RIBTH2C)

Coil Voltage Input:
 10-30 Vac/dc; 120 Vac; 50-60 Hz (RIBTU2C)
 10-30 Vac/dc; 208-277 Vac; 50-60 Hz (RIBTH2C)
 Drop Out = 2.1 Vac / 2.8 Vdc
 Pull In = 9 Vac / 10 Vdc

15 AMP PILOT CONTROL RELAYS



RIBU1CW

Enclosed Relay Hi/Low Separation 15 Amp SPDT with 10-30 Vac/dc/120 Vac Coil

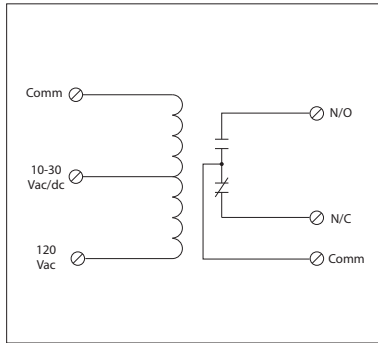

RIBH1CW

Enclosed Relay Hi/Low Separation 15 Amp SPDT with 10-30 Vac/dc/208-277 Vac Coil

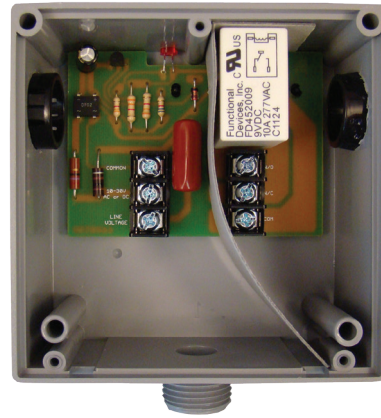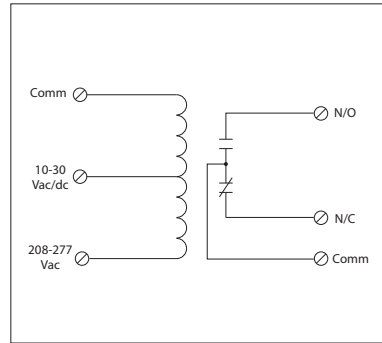

RELAYS

SPECIFICATIONS

Relays & Contact Type: One (1) SPDT Continuous Duty Coil
Expected Relay Life: 10 million cycles minimum mechanical
Operating Temperature: -30 to 140° F
Humidity Range: 5 to 95% (noncondensing)
Operate Time: 20ms
Relay Status: LED On = Activated
Dimensions: 4.00" x 4.00" x 1.80" with .50" NPT nipple
Approvals: UL Listed, UL916, UL864, C-UL California State Fire Marshal, CE, RoHS
Housing Rating: UL Accepted for Use in Plenum, NEMA 1
Gold Flash: Yes
Override Switch: No

Contact Ratings:
 15 Amp Resistive @ 150 Vac, 28Vdc
 15 Amp Inductive @ 150 Vac
 10 Amp Resistive @ 277 Vac
 480 VA Pilot Duty @ 240-277 Vac
 480 VA Ballast @ 277 Vac
Not rated for Electronic Ballast
 600 Watt Tungsten @ 120 Vac (N/O)
 240 Watt Tungsten @ 120 Vac (N/C)
 1/3 HP @ 120-240 Vac (N/O)
 1/6 HP @ 120-240 Vac (N/C)
 1/4 HP @ 277 Vac (N/O)
 1/8 HP @ 277 Vac (N/C)


Coil Current:
 33 mA @ 10 Vac 13 mA @ 10 Vdc
 35 mA @ 12 Vac 15 mA @ 12 Vdc
 46 mA @ 24 Vac 18 mA @ 24 Vdc
 55 mA @ 30 Vac 20 mA @ 30 Vdc
 28 mA @ 120 Vac (RIBU1CW)
 39 mA @ 208-277 Vac (RIBH1CW)

Coil Voltage Input:
 10-30 Vac/dc; 120 Vac; 50-60 Hz (RIBU1CW)
 10-30 Vac/dc; 208-277 Vac; 50-60 Hz (RIBH1CW)
 Drop Out = 2.1 Vac / 2.8 Vdc
 Pull In = 9 Vac / 10 Vdc

10 AMP PILOT CONTROL RELAYS



RIBTU1S

Enclosed Relay Hi/Low Separation 10 Amp SPST + Override with 10-30 Vac/dc/120 Vac Coil

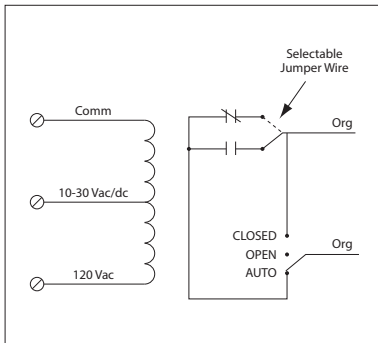

RIBTH1S

Enclosed Relay Hi/Low Separation 10 Amp SPST + Override with 10-30 Vac/dc/208-277 Vac Coil

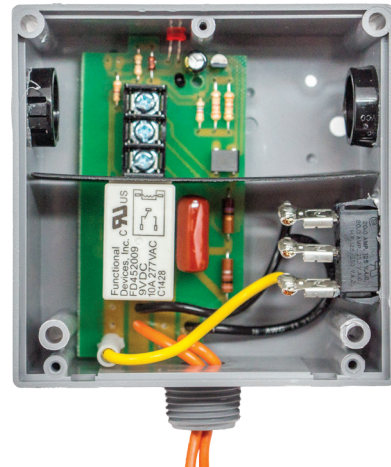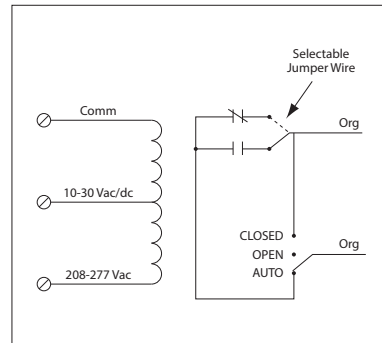

SPECIFICATIONS

Relays & Contact Type: One (1) SPST Continuous Duty Coil
Expected Relay Life: 10 million cycles minimum mechanical
Operating Temperature: -30 to 140° F
Humidity Range: 5 to 95% (noncondensing)
Operate Time: 20ms
Relay Status: LED On = Activated
Dimensions: 4.00" x 4.00" x 1.80" with .50" NPT nipple
Wires: 16", 600V Rated
Approvals: UL Listed, UL916, UL864, C-UL California State Fire Marshal, CE, RoHS
Housing Rating: UL Accepted for Use in Plenum, NEMA 1
Gold Flash: Yes
Override Switch: Yes

Contact Ratings:
 10 Amp Resistive @ 277 Vac
 480 VA Pilot Duty @ 277 Vac
 480 VA Ballast @ 277 Vac
Not rated for Electronic Ballast
 600 Watt Tungsten @ 120 Vac (N/O)
 240 Watt Tungsten @ 120 Vac (N/C)
 1/3 HP @ 120-240 Vac (N/O)
 1/6 HP @ 120-240 Vac (N/C)
 1/4 HP @ 277 Vac (N/O)
 1/8 HP @ 277 Vac (N/C)

Notes:
 • Normally Open or Normally Closed selected by yellow jumper wire


Coil Current:
 33 mA @ 10 Vac 13 mA @ 10 Vdc
 35 mA @ 12 Vac 15 mA @ 12 Vdc
 46 mA @ 24 Vac 18 mA @ 24 Vdc
 55 mA @ 30 Vac 20 mA @ 30 Vdc
 28 mA @ 120 Vac (RIBTU1S)
 39 mA @ 208-277 Vac (RIBTH1S)

Coil Voltage Input:
 10-30 Vac/dc; 120 Vac; 50-60 Hz (RIBTU1S)
 10-30 Vac/dc; 208-277 Vac; 50-60 Hz (RIBTH1S)
 Drop Out = 2.1 Vac / 2.8 Vdc
 Pull In = 9 Vac / 10 Vdc

10 AMP PILOT CONTROL RELAYS



RIBTU1SC

Enclosed Relay Hi/Low Separation 10 Amp
SPDT + Override with 10-30 Vac/dc/
120 Vac Coil

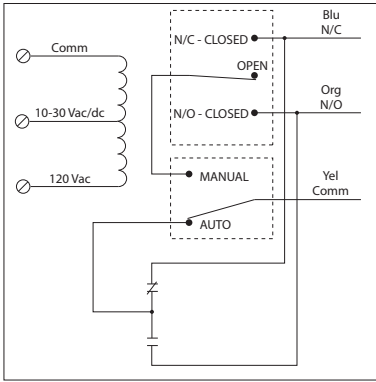

RIBTH1SC

Enclosed Relay Hi/Low Separation 10 Amp
SPDT + Override with 10-30 Vac/dc/
208-277 Vac Coil

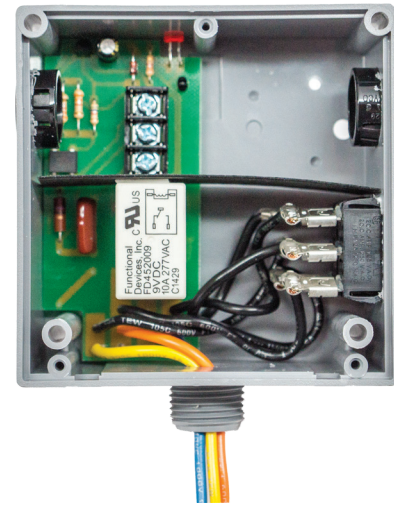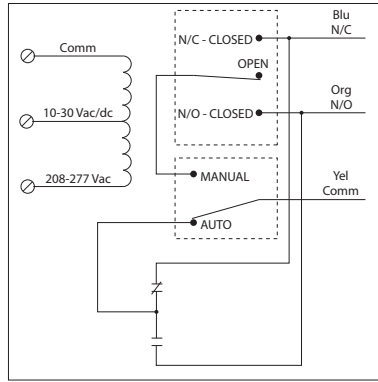

RELAYS

SPECIFICATIONS

Relays & Contact Type: One (1) SPDT Continuous Duty Coil
Expected Relay Life: 10 million cycles minimum mechanical
Operating Temperature: -30 to 140° F
Humidity Range: 5 to 95% (noncondensing)
Operate Time: 20ms
Relay Status: LED On = Activated
Dimensions: 4.00" x 4.00" x 1.80" with .50" NPT nipple
Wires: 16", 600V Rated
Approvals: UL Listed, UL916, UL864, C-UL
 California State Fire Marshal, CE, RoHS
Housing Rating: UL Accepted for Use in Plenum, NEMA 1
Gold Flash: Yes
Override Switch: Yes (2)

Contact Ratings:
 10 Amp Resistive @ 277 Vac
 480 VA Pilot Duty @ 277 Vac
 480 VA Ballast @ 277 Vac
Not rated for Electronic Ballast
 600 Watt Tungsten @ 120 Vac (N/O)
 240 Watt Tungsten @ 120 Vac (N/C)
 1/3 HP @ 120-240 Vac (N/O)
 1/6 HP @ 120-240 Vac (N/C)
 1/4 HP @ 277 Vac (N/O)
 1/8 HP @ 277 Vac (N/C)


Coil Current:
 33 mA @ 10 Vac 13 mA @ 10 Vdc
 35 mA @ 12 Vac 15 mA @ 12 Vdc
 46 mA @ 24 Vac 18 mA @ 24 Vdc
 55 mA @ 30 Vac 20 mA @ 30 Vdc
 28 mA @ 120 Vac (RIBTU1SC)
 39 mA @ 208-277 Vac (RIBTH1SC)

Coil Voltage Input:
 10-30 Vac/dc; 120 Vac; 50-60 Hz (RIBTU1SC)
 10-30 Vac/dc; 208-277 Vac; 50-60 Hz (RIBTH1SC)
 Drop Out = 2.1 Vac / 2.8 Vdc
 Pull In = 9 Vac / 10 Vdc

10 AMP PILOT CONTROL RELAY

RIBT2401D

Enclosed Relay Hi/Low Separation 10 Amp
DPDT with 24 Vac/dc/120 Vac Coil

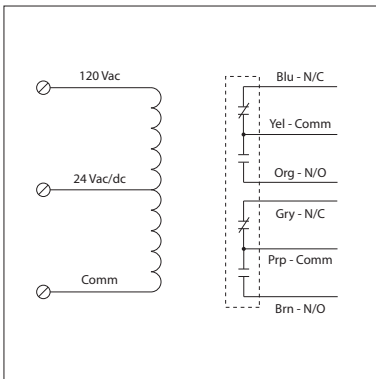

SPECIFICATIONS

Relays & Contact Type: One (1) DPDT Continuous Duty Coil
Expected Relay Life: 10 million cycles minimum mechanical
Operating Temperature: -30 to 140° F
Humidity Range: 5 to 95% (noncondensing)
Operate Time: 8ms
Relay Status: LED On = Activated
Dimensions: 4.00" x 4.00" x 1.80" with .50" NPT nipple
Wires: 16", 600V Rated
Approvals: UL Listed, UL916, UL864, C-UL
 California State Fire Marshal, CE, RoHS
Housing Rating: UL Accepted for Use in Plenum, NEMA 1
Gold Flash: No
Override Switch: No

Contact Ratings:
 10 Amp Resistive @ 30 Vdc
 10 Amp General Use @ 277 Vac
 1/2 HP @ 120/240 Vac (N/O)
 1/3 HP @ 120/240 Vac (N/C)
B300 Pilot Duty
 120 Vac 30A Make 3A Break (360 VA)
 240 Vac 15 A Make 1.5A Break (360 VA)
 208 Vac 17.3A Make 1.73A Break (360 VA)
 277 Vac 13A Make 1.3A Break (360 VA)
 24 Vac 30A Make 5A Break (120VA) 5A Max


Coil Current:
 24 mA @ 18 Vac
 32 mA @ 24 Vac
 40 mA @ 30 Vac
 31 mA @ 120 Vac
 20 mA @ 20 Vdc
 24 mA @ 24 Vdc
 36 mA @ 30 Vdc

Coil Voltage Input:
 24 Vac/dc; 120 Vac; 50-60 Hz
 Drop Out = 3 Vac / 3.8 Vdc
 Pull In = 18 Vac / 20 Vdc

10 AMP TRACK MOUNT CONTROL RELAYS



RIBAN24C

Track Mount Relay 10 Amp SPDT with
24 Vac/dc Coil

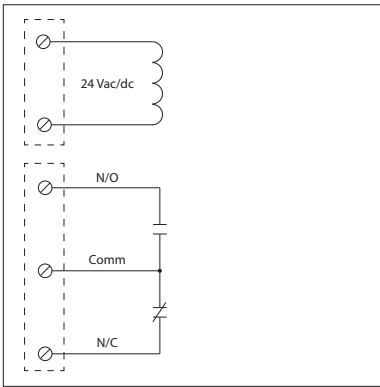

RIBAN12C

Track Mount Relay 10 Amp SPDT with
12 Vac/dc Coil

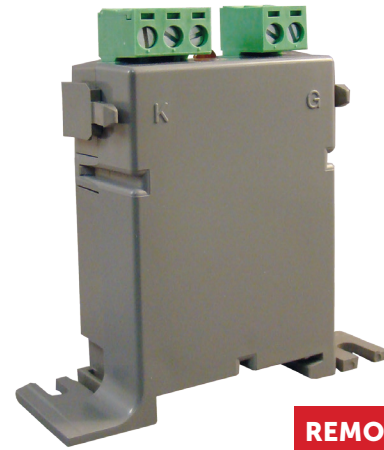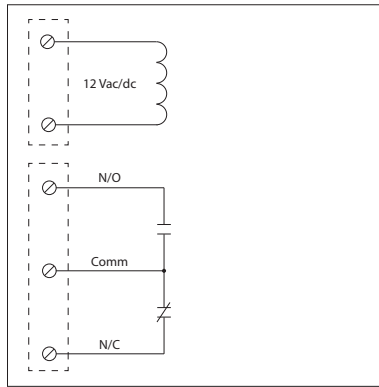

**REMOVABLE
TERMINALS**

SPECIFICATIONS

Relays & Contact Type: One (1) SPDT Continuous Duty Coil

Expected Relay Life: 10 million cycles minimum mechanical

Operating Temperature: -30 to 140° F

Operate Time: 6ms

Relay Status: LED On = Activated

Dimensions: 1.025" x 2.750" x 2.850"

Terminals: Removable, Accepts 22-16 AWG copper wires

Mounting: A: 2.750" Track Mount, See MT212 Series on page 152. **MT212 Mounting Track Sold Separately.**

B: 35mm x 7.5mm symmetrical DIN rail EN50022

C: Screw Mount, See DS80625 on page 153.

DS80625 Self-Tapping Drill Screws Sold Separately.

D: Current Sensor Mount, See RIBXG Series on page 94 or RIBXK Series on page 93.

Current Sensors Sold Separately.

Approvals: UL Listed, UL508, C-UL, CE, RoHS

Gold Flash: No

Override Switch: No

Contact Ratings:

10 Amp General Use @ 277 Vac

10 Amp Resistive @ 30 Vdc (N/O)

7 Amp Resistive @ 30 Vdc (N/C)

1/2 HP @ 125 Vac

1 HP @ 250 Vac

1/4 HP @ 277 Vac

C300 Pilot Duty

Coil Voltage Input (RIBAN24C):

24 Vac/dc ; 50-60 Hz

Drop Out = 3 Vac / 3.8 Vdc

Pull In = 20 Vac / 20 Vdc

Coil Voltage Input (RIBAN12C):

12 Vac/dc ; 50-60 Hz

Drop Out = 2 Vac / 2.5 Vdc

Pull In = 9 Vac / 11 Vdc

Coil Current (RIBAN24C):

26 mA @ 20 Vac

31 mA @ 24 Vac

14 mA @ 20 Vdc

18 mA @ 24 Vdc

28 mA @ 35 Vdc

Coil Current (RIBAN12C):

53 mA @ 10 Vac

62 mA @ 12 Vac

29 mA @ 11 Vdc

35 mA @ 12 Vdc


Notes:

- Set of replacement terminals available. Order model number: TS-AN

RELAY MOUNTING OPTIONS A & B


Mounting Option A:

2.75" Track Mount
MT212 Series




Mounting Option B:


35mm x 7.5mm symmetrical
DIN rail EN50022



CURRENT SENSOR MOUNTING OPTION D

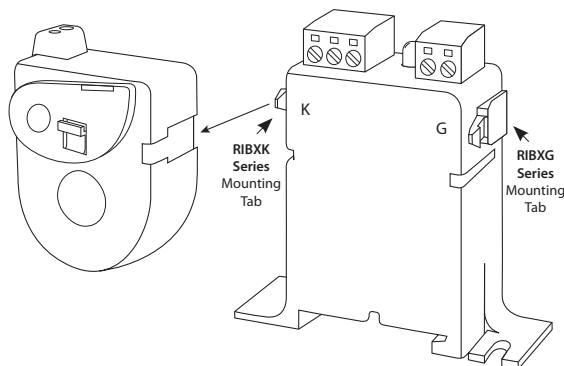


1. Slide current sensor onto corresponding mounting tab.
2. Snap into place.
3. Depress tab to remove current sensor.

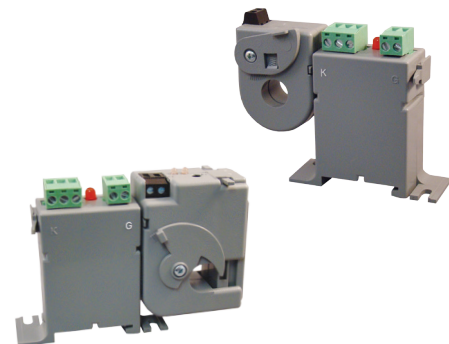

15 AMP TRACK MOUNT CONTROL RELAYS


RIBM12C

4.00" Track Mount Relay 15 Amp SPDT with 12 Vac/dc Coil

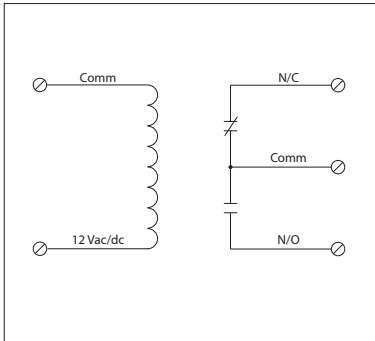

RIBM12S

4.00" Track Mount Relay 15 Amp SPST + Override with 12 Vac/dc Coil

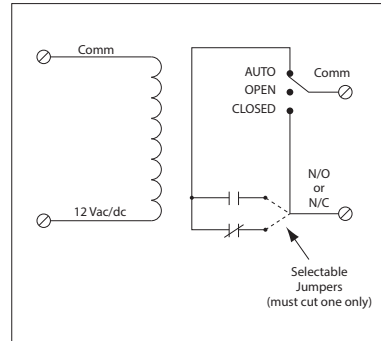

Cut for N/O
Cut for N/C

RELAYS

SPECIFICATIONS

Relays & Contact Type: One (1) SPDT Continuous Duty Coil (RIBM12C)
One (1) SPST Continuous Duty Coil (RIBM12S)

Expected Relay Life: 10 million cycles minimum mechanical

Operating Temperature: -30 to 140° F

Humidity Range: 5 to 95% (noncondensing)

Operate Time: 6ms

Relay Status: LED On = Activated

Dimensions: 1.250" x 4.000" x 1.750"

Track Mount: 4.000", See MT4 Series on page 152
MT4 Mounting Track Sold Separately

Approvals: UL Listed, UL916, UL864, C-UL
California State Fire Marshal, CE, RoHS

Gold Flash: No

Override Switch: No (RIBM12C)
Yes (RIBM12S)

Contact Ratings:
15 Amp General Use @ 125 Vac
10 Amp General Use @ 277 Vac
10 Amp Resistive @ 30 Vdc (N/O)
7 Amp Resistive @ 30 Vdc (N/C)
1/2 HP @ 125 Vac
1 HP @ 250 Vac
1/4 HP @ 277 Vac
C300 Pilot Duty

Coil Current:
53 mA @ 10 Vac
62 mA @ 12 Vac
29 mA @ 11 Vdc
36 mA @ 12 Vdc


Coil Voltage Input:
12 Vac/dc ; 50-60 Hz
Drop Out = 2 Vac / 2.5 Vdc
Pull In = 9 Vac / 11 Vdc

Notes:
• Must cut appropriate jumper to select Normally Open or Normally Closed (RIBM12S)

15 AMP TRACK MOUNT CONTROL RELAYS


RIBM24C

4.00" Track Mount Relay 15 Amp SPDT with 24 Vac/dc Coil

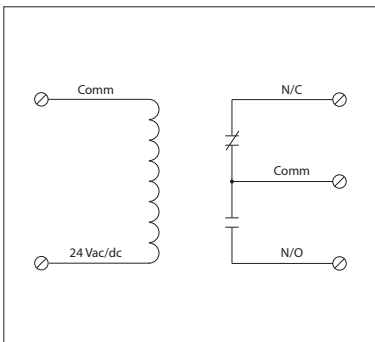

RIBM24S

4.00" Track Mount Relay 15 Amp SPST + Override with 24 Vac/dc Coil

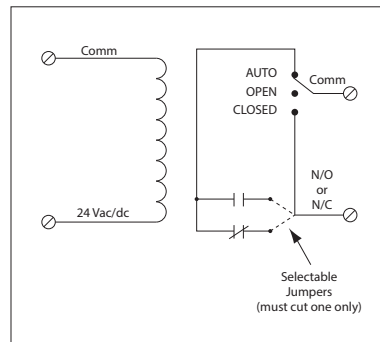

Cut for N/O
Cut for N/C

SPECIFICATIONS

Relays & Contact Type: One (1) SPDT Continuous Duty Coil (RIBM24C)
One (1) SPST Continuous Duty Coil (RIBM24S)

Expected Relay Life: 10 million cycles minimum mechanical

Operating Temperature: -30 to 140° F

Humidity Range: 5 to 95% (noncondensing)

Operate Time: 6ms

Relay Status: LED On = Activated

Dimensions: 1.250" x 4.000" x 1.750"

Track Mount: 4.000", See MT4 Series on page 152
MT4 Mounting Track Sold Separately

Approvals: UL Listed, UL916, UL864, C-UL
California State Fire Marshal, CE, RoHS

Gold Flash: No

Override Switch: No (RIBM24C)
Yes (RIBM24S)

Contact Ratings:
15 Amp General Use @ 125 Vac
10 Amp General Use @ 277 Vac
10 Amp Resistive @ 30 Vdc (N/O)
7 Amp Resistive @ 30 Vdc (N/C)
1/2 HP @ 125 Vac
1 HP @ 250 Vac
1/4 HP @ 277 Vac
C300 Pilot Duty

Coil Current:
26 mA @ 20 Vac
31 mA @ 24 Vac
48 mA @ 35 Vac
14 mA @ 20 Vdc
18 mA @ 24 Vdc
28 mA @ 35 Vdc


Coil Voltage Input:
24 Vac/dc ; 50-60 Hz
Drop Out = 3 Vac / 3.8 Vdc
Pull In = 20 Vac / 20 Vdc

Notes:
• Must cut appropriate jumper to select Normally Open or Normally Closed (RIBM24S)

10 AMP TRACK MOUNT CONTROL RELAYS


RIBM2401D

4.00" Track Mount Relay 10 Amp DPDT with
24 Vac/dc/120 Vac Coil

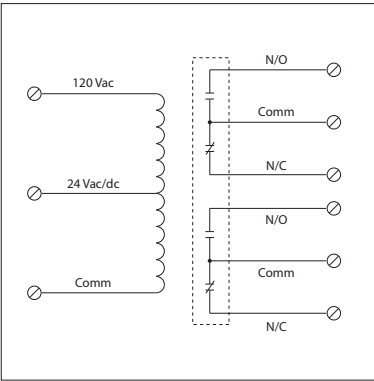

RIBM2402D

4.00" Track Mount Relay 10 Amp DPDT with
24 Vac/dc/208-277 Vac Coil

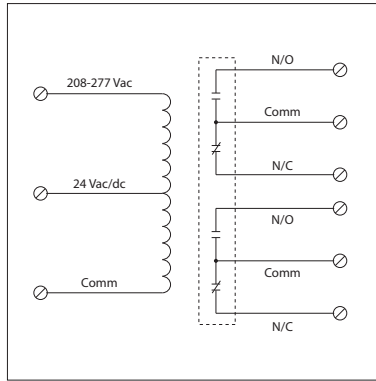

RELAYS

SPECIFICATIONS

Relays & Contact Type: One (1) DPDT Continuous Duty Coil
Expected Relay Life: 10 million cycles minimum mechanical
Operating Temperature: -30 to 140° F
Humidity Range: 5 to 95% (noncondensing)
Operate Time: 8ms
Relay Status: LED On = Activated
Dimensions: 1.700" x 4.000" x 1.750"
Track Mount: 4.000", See MT4 Series on page 152
Approvals: UL Listed, UL916, UL864, C-UL
 California State Fire Marshal, CE, RoHS
Gold Flash: No
Override Switch: No

Contact Ratings:
 10 Amp Resistive @ 30 Vdc
 10 Amp General Use @ 277 Vac
 1/2 HP @ 120/240 Vac (N/O)
 1/3 HP @ 120/240 Vac (N/C)
B300 Pilot Duty
 120 Vac 30A Make 3A Break (360 VA)
 240 Vac 15 A Make 1.5A Break (360 VA)
 208 Vac 17.3A Make 1.73A Break (360 VA)
 277 Vac 13A Make 1.3A Break (360 VA)
 24 Vac 30A Make 5A Break (120VA) 5A Max


Coil Current:
 24 mA @ 18 Vac 20 mA @ 20 Vdc
 32 mA @ 24 Vac 24 mA @ 24 Vdc
 40 mA @ 30 Vac 36 mA @ 30 Vdc
 31 mA @ 120 Vac (RIBM2401D)
 36 mA @ 208-277 Vac (RIBM2402D)

Coil Voltage Input:
 24 Vac/dc; 120 Vac; 50-60 Hz (RIBM2401D)
 24 Vac/dc; 208-277 Vac; 50-60 Hz (RIBM2402D)
 Drop Out = 3 Vac / 3.8 Vdc
 Pull In = 18 Vac / 20 Vdc

15 AMP TRACK MOUNT CONTROL RELAYS


RIBMU1C

4.00" Track Mount Relay 15 Amp SPDT with
10-30 Vac/dc/120 Vac Coil

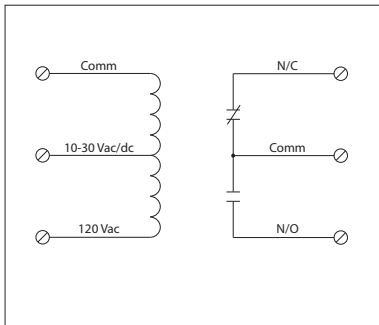

RIBMH1C

4.00" Track Mount Relay 15 Amp SPDT with
10-30 Vac/dc/208-277 Vac Coil

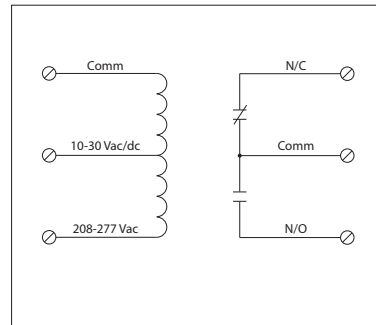

SPECIFICATIONS

Relays & Contact Type: One (1) SPDT Continuous Duty Coil
Expected Relay Life: 10 million cycles minimum mechanical
Operating Temperature: -30 to 140° F
Humidity Range: 5 to 95% (noncondensing)
Operate Time: 20ms
Relay Status: LED On = Activated
Dimensions: 1.250" x 4.000" x 1.750"
Track Mount: 4.000", See MT4 Series on page 152
Approvals: UL Listed, UL916, UL864, C-UL
 California State Fire Marshal, CE, RoHS
Gold Flash: Yes
Override Switch: No

Contact Ratings:
 15 Amp Inductive @ 150 Vac
 15 Amp Resistive @ 150 Vac, 28 Vdc
 10 Amp Resistive @ 277 Vac
 480 VA Pilot Duty @ 240-277 Vac
 480 VA Ballast @ 277 Vac
Not rated for Electronic Ballast
 600 Watt Tungsten @ 120 Vac (N/O)
 240 Watt Tungsten @ 120 Vac (N/C)
 1/3 HP @ 120-240 Vac (N/O)
 1/6 HP @ 120-240 Vac (N/C)
 1/4 HP @ 277 Vac (N/O)
 1/8 HP @ 277 Vac (N/C)


Coil Current:
 33 mA @ 10 Vac 13 mA @ 10 Vdc
 35 mA @ 12 Vac 15 mA @ 12 Vdc
 46 mA @ 24 Vac 18 mA @ 24 Vdc
 55 mA @ 30 Vac 20 mA @ 30 Vdc
 28 mA @ 120 Vac (RIBMU1C)
 39 mA @ 208-277 Vac (RIBMH1C)

Coil Voltage Input:
 10-30 Vac/dc; 120 Vac; 50-60 Hz (RIBMU1C)
 10-30 Vac/dc; 208-277 Vac; 50-60 Hz (RIBMH1C)
 Drop Out = 2.1 Vac / 2.8 Vdc
 Pull In = 9 Vac / 10 Vdc

15 AMP TRACK MOUNT CONTROL RELAYS



RIBMU1S

4.00" Track Mount Relay 15 Amp SPST-N/O +
Override with 10-30 Vac/dc/**120 Vac Coil**

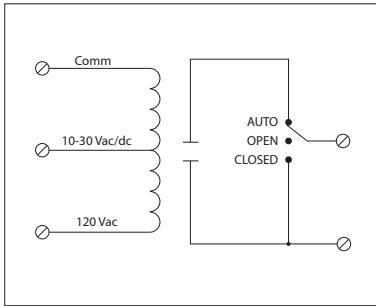

RIBMH1S

4.00" Track Mount Relay 15 Amp SPST-N/O +
Override with 10-30 Vac/dc/**208-277 Vac Coil**

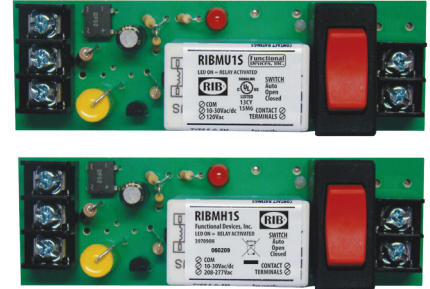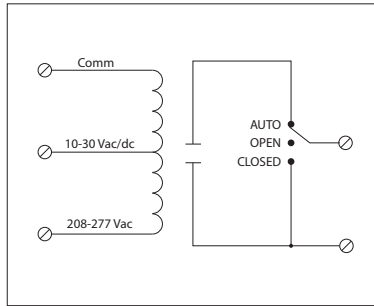

RELAYS

SPECIFICATIONS

Relays & Contact Type: One (1) SPST Continuous Duty Coil
Expected Relay Life: 10 million cycles minimum mechanical
Operating Temperature: -30 to 140° F
Humidity Range: 5 to 95% (noncondensing)
Operate Time: 20ms
Relay Status: LED On = Activated
Dimensions: 1.275" x 4.000" x 1.750"
Track Mount: 4.000", See MT4 Series on page 152
Approvals: UL Listed, UL916, UL864, C-UL
 California State Fire Marshal, CE, RoHS
Gold Flash: Yes
Override Switch: Yes

Contact Ratings:
 15 Amp Resistive @ 150 Vac
 10 Amp Resistive @ 277 Vac
 480 VA Pilot Duty @ 277 Vac
 480 VA Ballast @ 277 Vac
Not rated for Electronic Ballast
 600 Watt Tungsten @ 120 Vac (N/O)
 240 Watt Tungsten @ 120 Vac (N/C)
 1/3 HP @ 120-240 Vac (N/O)
 1/6 HP @ 120-240 Vac (N/C)
 1/4 HP @ 277 Vac (N/O)
 1/8 HP @ 277 Vac (N/C)

Coil Voltage Input:
 10-30 Vac/dc; 120 Vac; 50-60 Hz (RIBMU1S)
 10-30 Vac/dc; 208-277 Vac; 50-60 Hz (RIBMH1S)
 Drop Out = 2.1 Vac / 2.8 Vdc
 Pull In = 9 Vac / 10 Vdc

Coil Current:


33 mA @ 10 Vac	13 mA @ 10 Vdc
35 mA @ 12 Vac	15 mA @ 12 Vdc
46 mA @ 24 Vac	18 mA @ 24 Vdc
55 mA @ 30 Vac	20 mA @ 30 Vdc
28 mA @ 120 Vac (RIBMU1S)	
39 mA @ 208-277 Vac (RIBMH1S)	

Notes:
 • Order Normally Closed by adding "-NC" to end of model number

15 AMP TRACK MOUNT CONTROL RELAYS



RIBMU2C

4.00" Track Mount Relays 15 Amp 2 SPDT with
10-30 Vac/dc/**120 Vac Coil**

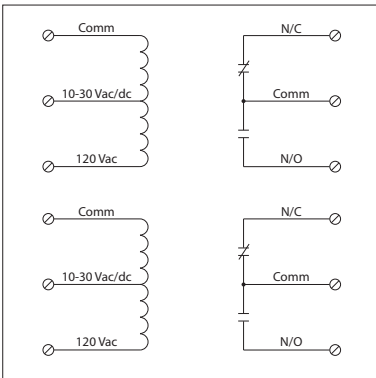

RIBMH2C

4.00" Track Mount Relays 15 Amp 2 SPDT with
10-30 Vac/dc/**208-277 Vac Coil**

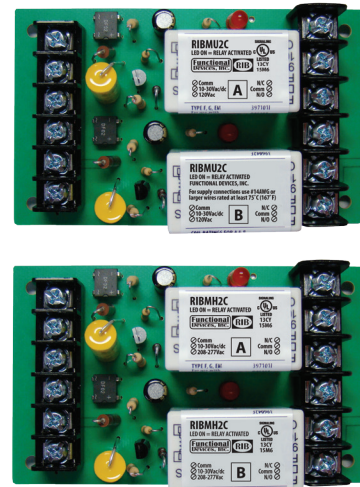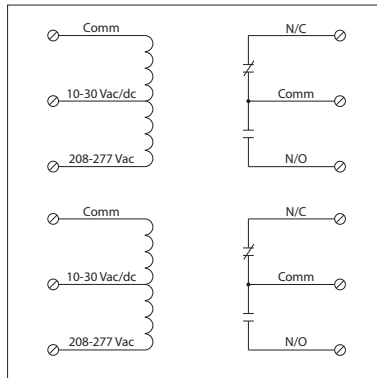

SPECIFICATIONS

Relays & Contact Type: Two (2) SPDT Continuous Duty Coil
Expected Relay Life: 10 million cycles minimum mechanical
Operating Temperature: -30 to 140° F
Humidity Range: 5 to 95% (noncondensing)
Operate Time: 20ms
Relay Status: LED On = Activated
Dimensions: 2.450" x 4.000" x 1.750"
Track Mount: 4.000", See MT4 Series on page 152
Approvals: UL Listed, UL916, UL864, C-UL
 California State Fire Marshal, CE, RoHS
Gold Flash: Yes
Override Switch: No

Contact Ratings:
 15 Amp Inductive @ 150 Vac
 15 Amp Resistive @ 150 Vac, 28 Vdc
 10 Amp Resistive @ 277 Vac
 480 VA Pilot Duty @ 240-277 Vac
 480 VA Ballast @ 277 Vac
Not rated for Electronic Ballast
 600 Watt Tungsten @ 120 Vac (N/O)
 240 Watt Tungsten @ 120 Vac (N/C)
 1/3 HP @ 120-240 Vac (N/O)
 1/6 HP @ 120-240 Vac (N/C)
 1/4 HP @ 277 Vac (N/O)
 1/8 HP @ 277 Vac (N/C)

Coil Current:


33 mA @ 10 Vac	13 mA @ 10 Vdc
35 mA @ 12 Vac	15 mA @ 12 Vdc
46 mA @ 24 Vac	18 mA @ 24 Vdc
55 mA @ 30 Vac	20 mA @ 30 Vdc
28 mA @ 120 Vac (RIBMU2C)	
39 mA @ 208-277 Vac (RIBMH2C)	

Coil Voltage Input:
 10-30 Vac/dc; 120 Vac; 50-60 Hz (RIBMU2C)
 10-30 Vac/dc; 208-277 Vac; 50-60 Hz (RIBMH2C)
 Drop Out = 2.1 Vac / 2.8 Vdc
 Pull In = 9 Vac / 10 Vdc

15 AMP TRACK MOUNT CONTROL RELAYS



RIBMU1SM-250

4.00" Track Mount Relay 15 Amp SPST +
Override + Monitor with 10-30 Vac/dc/
120 Vac Coil

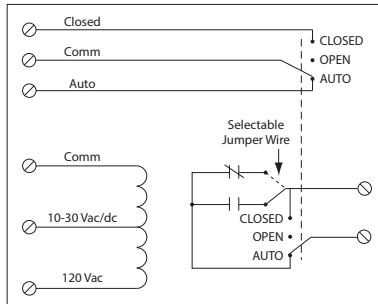

RIBMH1SM-250

4.00" Track Mount Relay 15 Amp SPST +
Override + Monitor with 10-30 Vac/dc/
208-277 Vac Coil

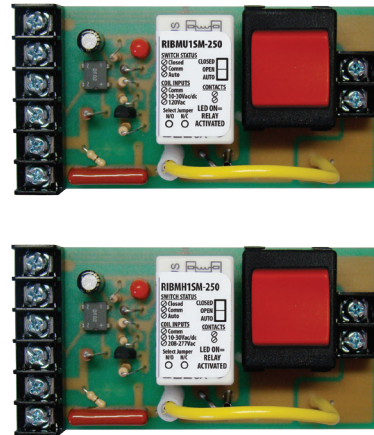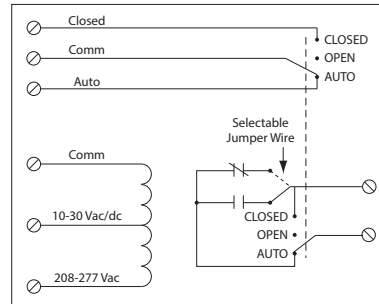

RELAYS

SPECIFICATIONS

Relays & Contact Type: One (1) SPST Continuous Duty Coil
Expected Relay Life: 10 million cycles minimum mechanical
Operating Temperature: -30 to 140° F
Humidity Range: 5 to 95% (noncondensing)
Operate Time: 20ms
Relay Status: LED On = Activated
Dimensions: 2.000" x 4.000" x 1.750"
Track Mount: 4.000", See MT4 Series on page 152
MT4 Mounting Track Sold Separately
Approvals: UL Listed, UL916, UL864, C-UL
 California State Fire Marshal, CE, RoHS
Gold Flash: Yes
Override Switch: Yes + Monitor

Contact Ratings:
 15 Amp Resistive @ 125 Vac
 10 Amp Resistive @ 250 Vac
 345 VA Pilot Duty @ 120/240 Vac (N/O)
 211 VA Pilot Duty @ 120/240 Vac (N/C)
 1/3 HP for N/O @ 120-240 Vac
 1/6 HP for N/C @ 120-240 Vac

Coil Voltage Input:
 10-30 Vac/dc; 120 Vac; 50-60 Hz (RIBMU1SM-250)
 10-30 Vac/dc; 208-277 Vac; 50-60 Hz (RIBMH1SM-250)
 Drop Out = 2.1 Vac / 2.8 Vdc
 Pull In = 9 Vac / 10 Vdc


Coil Current:
 33 mA @ 10 Vac 13 mA @ 10 Vdc
 35 mA @ 12 Vac 15 mA @ 12 Vdc
 46 mA @ 24 Vac 18 mA @ 24 Vdc
 55 mA @ 30 Vac 20 mA @ 30 Vdc
 28 mA @ 120 Vac (RIBMU1SM-250)
 39 mA @ 208-277 Vac (RIBMH1SM-250)

Notes:
 • Normally Open or Normally Closed selected by yellow jumper wire
 • Second pole of override switch can be connected to digital-in of controller to report position of override switch
 • Rating of second pole is 50 Vac/dc, 0.25 Amp max

15 AMP TRACK MOUNT CONTROL RELAYS



RIBMU1SC

4.00" Track Mount Relay 15 Amp SPDT +
Override with 10-30 Vac/dc/120 Vac Coil

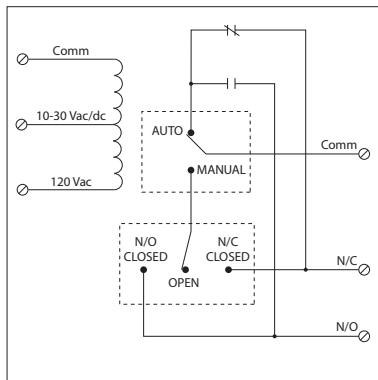

RIBMH1SC

4.00" Track Mount Relay 15 Amp SPDT +
Override with 10-30 Vac/dc/208-277 Vac Coil

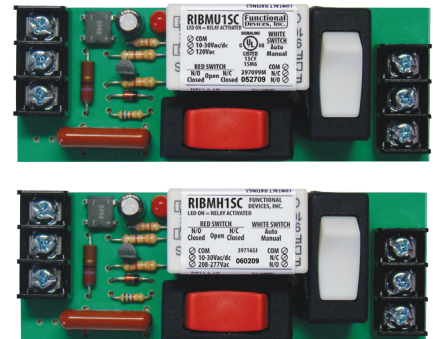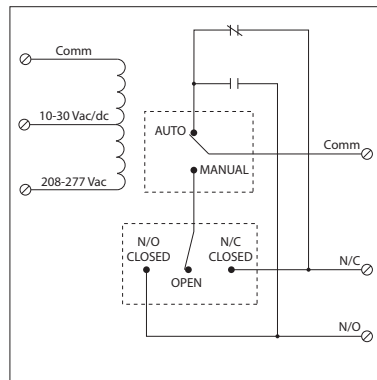

SPECIFICATIONS

Relays & Contact Type: One (1) SPDT Continuous Duty Coil
Expected Relay Life: 10 million cycles minimum mechanical
Operating Temperature: -30 to 140° F
Humidity Range: 5 to 95% (noncondensing)
Operate Time: 20ms
Relay Status: LED On = Activated
Dimensions: 1.500" x 4.000" x 1.750"
Track Mount: 4.000", See MT4 Series on page 152
MT4 Mounting Track Sold Separately
Approvals: UL Listed, UL916, UL864, C-UL
 California State Fire Marshal, CE, RoHS
Gold Flash: Yes
Override Switch: Yes (2)

Contact Ratings:
 15 Amp Resistive @ 150 Vac
 10 Amp Resistive @ 277 Vac
 480 VA Pilot Duty @ 277 Vac
 480 VA Ballast @ 277 Vac
Not rated for Electronic Ballast
 600 Watt Tungsten @ 120 Vac (N/O)
 240 Watt Tungsten @ 120 Vac (N/C)
 1/3 HP @ 120-240 Vac (N/O)
 1/6 HP @ 120-240 Vac (N/C)
 1/4 HP @ 277 Vac (N/O)
 1/8 HP @ 277 Vac (N/C)


Coil Current:
 33 mA @ 10 Vac 13 mA @ 10 Vdc
 35 mA @ 12 Vac 15 mA @ 12 Vdc
 46 mA @ 24 Vac 18 mA @ 24 Vdc
 55 mA @ 30 Vac 20 mA @ 30 Vdc
 28 mA @ 120 Vac (RIBMU1SC)
 39 mA @ 208-277 Vac (RIBMH1SC)

Coil Voltage Input:
 10-30 Vac/dc; 120 Vac; 50-60 Hz (RIBMU1SC)
 10-30 Vac/dc; 208-277 Vac; 50-60 Hz (RIBMH1SC)
 Drop Out = 2.1 Vac / 2.8 Vdc
 Pull In = 9 Vac / 10 Vdc

15 AMP TRACK MOUNT CONTROL RELAYS


RIBMN12C

2.75" Track Mount Relay 15 Amp SPDT with 12 Vac/dc Coil

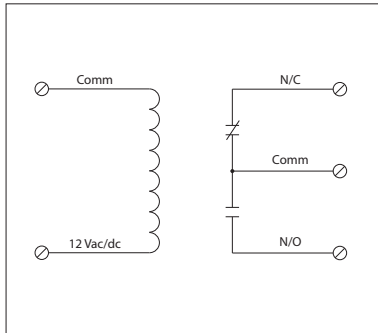

RIBMN12S

2.75" Track Mount Relay 15 Amp SPST + Override with 12 Vac/dc Coil

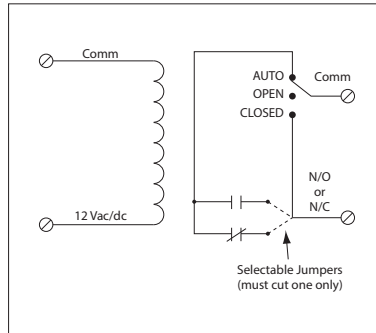

Cut for N/O
Cut for N/C

RELAYS

SPECIFICATIONS

- # Relays & Contact Type:** One (1) SPDT Continuous Duty Coil (RIBMN12C)
One (1) SPST Continuous Duty Coil (RIBMN12S)
- Expected Relay Life:** 10 million cycles minimum mechanical
- Operating Temperature:** -30 to 140° F
- Humidity Range:** 5 to 95% (noncondensing)
- Operate Time:** 6ms
- Relay Status:** LED On = Activated
- Dimensions:** 1.100" x 2.750" x 1.750" (RIBMN12C)
1.250" x 2.750" x 1.750" (RIBMN12S)
- Track Mount:** 2.750"; See MT212 Series on page 152
MT212 Mounting Track Sold Separately
- Approvals:** UL Listed, UL916, UL864, C-UL
California State Fire Marshal, CE, RoHS
- Gold Flash:** No
- Override Switch:** No (RIBMN12C)
Yes (RIBMN12S)

- Contact Ratings:**
15 Amp General Use @ 125 Vac
10 Amp General Use @ 277 Vac
10 Amp Resistive @ 30 Vdc (N/O)
7 Amp Resistive @ 30 Vdc (N/C)
1/2 HP @ 125 Vac
1 HP @ 250 Vac
1/4 HP @ 277 Vac
C300 Pilot Duty

- Coil Current:**
53 mA @ 10 Vac
62 mA @ 12 Vac
29 mA @ 11 Vdc
35 mA @ 12 Vdc


- Coil Voltage Input:**
12 Vac/dc; 50-60 Hz
Drop Out = 2 Vac / 2.5 Vdc
Pull In = 9 Vac / 11 Vdc

- Notes:**
• Must cut appropriate jumper to select Normally Open or Normally Closed (RIBMN12S)

15 AMP TRACK MOUNT CONTROL RELAYS


RIBMN24C

2.75" Track Mount Relay 15 Amp SPDT with 24 Vac/dc Coil

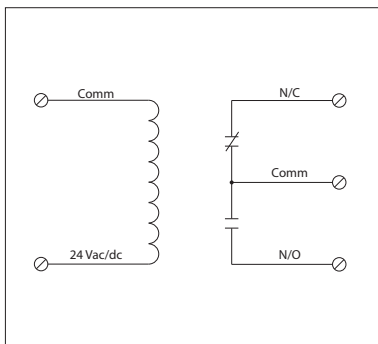

RIBMN24S

2.75" Track Mount Relay 15 Amp SPST + Override with 24 Vac/dc Coil

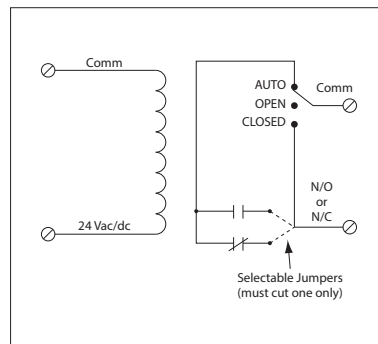

Cut for N/O
Cut for N/C

SPECIFICATIONS

- # Relays & Contact Type:** One (1) SPDT Continuous Duty Coil (RIBMN24C)
One (1) SPST Continuous Duty Coil (RIBMN24S)
- Expected Relay Life:** 10 million cycles minimum mechanical
- Operating Temperature:** -30 to 140° F
- Humidity Range:** 5 to 95% (noncondensing)
- Operate Time:** 6ms
- Relay Status:** LED On = Activated
- Dimensions (RIBMN24C):** 1.100" x 2.750" x 0.750" (without track)
1.100" x 2.750" x 1.250" (including track)
- Dimensions (RIBMN24S):** 1.250" x 2.750" x 1.000" (without track)
1.250" x 2.750" x 1.500" (including track)
- Track Mount:** 2.750"; See MT212 Series on page 152
MT212 Mounting Track Sold Separately
- Approvals:** UL Listed, UL916, UL864, C-UL
California State Fire Marshal, CE, RoHS
- Gold Flash:** No
- Override Switch:** No (RIBMN24C), Yes (RIBMN24S)

- Contact Ratings:**
15 Amp General Use @ 125 Vac
10 Amp General Use @ 277 Vac
10 Amp Resistive @ 30 Vdc (N/O)
7 Amp Resistive @ 30 Vdc (N/C)
1/2 HP @ 125 Vac
1 HP @ 250 Vac
1/4 HP @ 277 Vac
C300 Pilot Duty

- Coil Current:**
26 mA @ 20 Vac
31 mA @ 24 Vac
48 mA @ 35 Vac
14 mA @ 20 Vdc
18 mA @ 24 Vdc
28 mA @ 35 Vdc



- Coil Voltage Input:**
24 Vac/dc; 50-60 Hz
Drop Out = 3 Vac / 3.8 Vdc
Pull In = 20 Vac / 20 Vdc

- Notes:**
• Must cut appropriate jumper to select Normally Open or Normally Closed (RIBMN24S)

15 AMP TRACK MOUNT CONTROL RELAY

RIBMN24S-J

2.75" Track Mount Relay 15 Amp SPST +
Override with 24 Vac/dc Coil and Jumper
Selectable Output

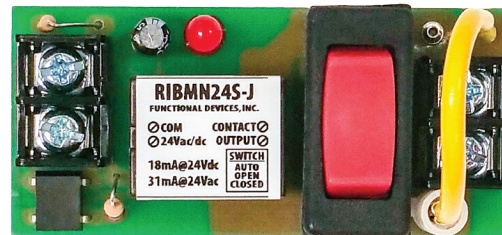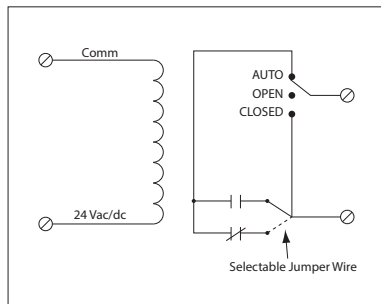

SPECIFICATIONS

Relays & Contact Type: One (1) SPST Continuous Duty Coil
Expected Relay Life: 10 million cycles minimum mechanical
Operating Temperature: -30 to 140° F
Humidity Range: 5 to 95% (noncondensing)
Operate Time: 6ms
Relay Status: LED On = Activated
Dimensions: 1.250" x 2.750" x 1.750"
Track Mount: 2.750", See MT212 Series on page 152
MT212 Mounting Track Sold Separately
Approvals: UL Listed, UL916, UL864, C-UL
 California State Fire Marshal, CE, RoHS
Gold Flash: No
Override Switch: Yes

Contact Ratings:
 15 Amp General Use @ 125 Vac
 10 Amp General Use @ 277 Vac
 10 Amp Resistive @ 30 Vdc (N/O)
 7 Amp Resistive @ 30 Vdc (N/C)
 1/2 HP @ 125 Vac
 1 HP @ 250 Vac
 1/4 HP @ 277 Vac
 C300 Pilot Duty

Coil Current:
 26 mA @ 20 Vac
 31 mA @ 24 Vac
 48 mA @ 35 Vac
 14 mA @ 20 Vdc
 18 mA @ 24 Vdc
 28 mA @ 35 Vdc


Coil Voltage Input:
 24 Vac/dc ; 50-60 Hz
 Drop Out = 3 Vac / 3.8 Vdc
 Pull In = 20 Vac / 20 Vdc

Notes:
 • Normally Open or Normally Closed selected by yellow jumper wire.

15 AMP TRACK MOUNT CONTROL RELAYS


RIBMN24C-4T

Four 2.75" Track Mount Relays 15 Amp SPDT
with 24 Vac/dc Coil and 2.75" x 6.00"
Mounting Track

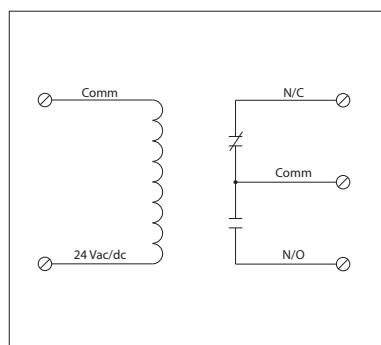

RIBMN24S-4T

Four 2.75" Track Mount Relays 15 Amp SPST
+ Override with 24 Vac/dc Coil and 2.75" x
6.00" Mounting Track

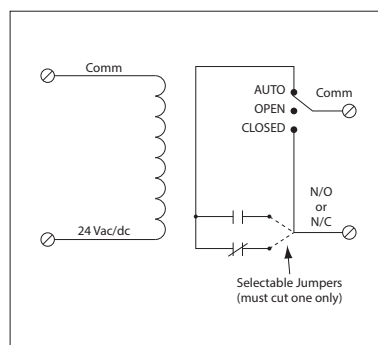

SPECIFICATIONS

Relays & Contact Type: Four (4) SPDT Continuous Duty Coils (RIBMN24C-4T)
 Four (4) SPST Continuous Duty Coils (RIBMN24S-4T)
Expected Relay Life: 10 million cycles minimum mechanical
Operating Temperature: -30 to 140° F
Humidity Range: 5 to 95% (noncondensing)
Operate Time: 6ms
Relay Status: LED On = Activated
Dimensions: 6.000" x 2.750" x 1.150" (RIBMN24C-4T)
 6.000" x 2.750" x 1.500" (RIBMN24S-4T)
Track Mount: 2.750" x 6.000"; MT212-6 Mounting Track Included
Approvals: UL Listed, UL916, UL864, C-UL
 California State Fire Marshal, CE, RoHS
Gold Flash: No
Override Switch: No (RIBMN24C-4T)
 Yes (RIBMN24S-4T)

Contact Ratings:
 15 Amp General Use @ 125 Vac
 10 Amp General Use @ 277 Vac
 10 Amp Resistive @ 30 Vdc (N/O)
 7 Amp Resistive @ 30 Vdc (N/C)
 1/2 HP @ 125 Vac
 1 HP @ 250 Vac
 1/4 HP @ 277 Vac
 C300 Pilot Duty

Coil Current:
 26 mA @ 20 Vac
 31 mA @ 24 Vac
 48 mA @ 35 Vac
 14 mA @ 20 Vdc
 18 mA @ 24 Vdc
 28 mA @ 35 Vdc



Coil Voltage Input:
 24 Vac/dc ; 50-60 Hz
 Drop Out = 3 Vac / 3.8 Vdc
 Pull In = 20 Vac / 20 Vdc

Notes:
 • Must cut appropriate jumper to select Normally Open or Normally Closed (RIBMN24S-4T)

10 AMP TRACK MOUNT CONTROL RELAY

RIBMN2401D

2.75" Track Mount Relay 10 Amp DPDT with 24 Vac/dc/120 Vac Coil

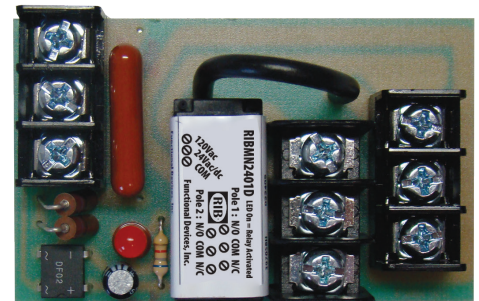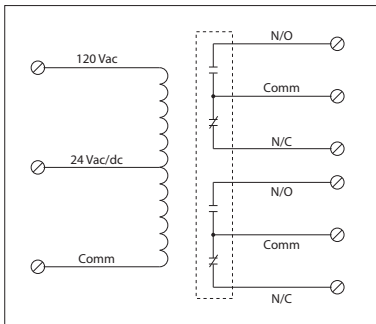

RELAYS

SPECIFICATIONS

Relays & Contact Type: One (1) DPDT Continuous Duty Coil
Expected Relay Life: 10 million cycles minimum mechanical
Operating Temperature: -30 to 140° F
Humidity Range: 5 to 95% (noncondensing)
Operate Time: 8ms
Relay Status: LED On = Activated
Dimensions: 1.700" x 2.750" x 1.750"
Track Mount: 2.750", See MT212 Series on page 152
Approvals: UL Listed, UL916, UL864, C-UL
Gold Flash: No
Override Switch: No

Contact Ratings:
 10 Amp Resistive @ 30 Vdc
 10 Amp General Use @ 277 Vac
 1/2 HP @ 120/240 Vac (N/O)
 1/3 HP @ 120/240 Vac (N/C)
B300 Pilot Duty
 120 Vac 30A Make 3A Break (360 VA)
 240 Vac 15 A Make 1.5A Break (360 VA)
 208 Vac 17.3A Make 1.73A Break (360 VA)
 277 Vac 13A Make 1.3A Break (360 VA)
 24Vac 30A Make 5A Break (120VA) 5A Max


Coil Current:
 36 mA @ 30Vdc
 24 mA @ 18 Vac
 32 mA @ 24 Vac
 40 mA @ 30 Vac
 31 mA @ 120 Vac

Coil Voltage Input:
 24 Vac/dc; 120 Vac; 50-60 Hz
 Drop Out = 3 Vac / 3.8 Vdc
 Pull In = 18 Vac / 20 Vdc

15 AMP TRACK MOUNT CONTROL RELAYS




RIBMNU1C

2.75" Track Mount Relay 15 Amp SPDT with 10-30 Vac/dc/120 Vac Coil

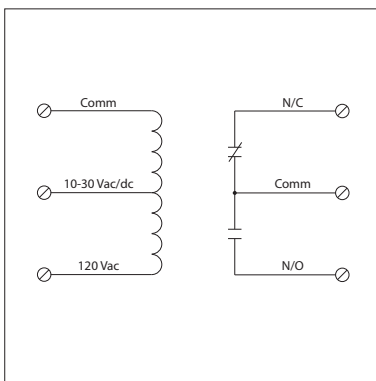

RIBMNH1C

2.75" Track Mount Relay 15 Amp SPDT with 10-30 Vac/dc/208-277 Vac Coil

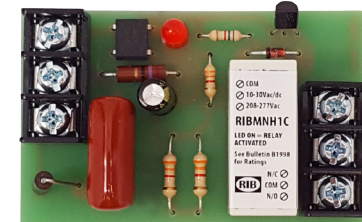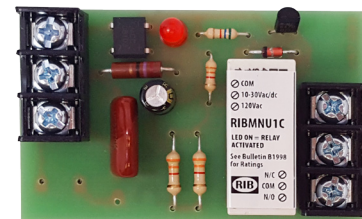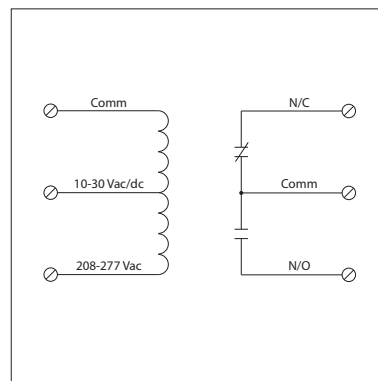

SPECIFICATIONS

Relays & Contact Type: One (1) SPDT Continuous Duty Coil
Expected Relay Life: 10 million cycles minimum mechanical
Operating Temperature: -30 to 140° F
Humidity Range: 5 to 95% (noncondensing)
Operate Time: 20ms
Relay Status: LED On = Activated
Dimensions: 1.700" x 2.750" x 1.750"
Track Mount: 2.750", See MT212 Series on page 152
Approvals: UL Listed, UL916, UL864, C-UL
Gold Flash: Yes
Override Switch: No

Contact Ratings:
 15 Amp Resistive @ 150 Vac, 28Vdc
 15 Amp Inductive @ 150 Vac
 10 Amp Resistive @ 120-277 Vac, 28 Vdc
 480 VA Pilot Duty @ 240-277 Vac
 480 VA Ballast @ 277 Vac
Not rated for Electronic Ballast
 600 Watt Tungsten @ 120 Vac (N/O)
 240 Watt Tungsten @ 120 Vac (N/C)
 1/3 HP @ 120-240 Vac (N/O)
 1/6 HP @ 120-240 Vac (N/C)
 1/4 HP @ 277 Vac (N/O)
 1/8 HP @ 277 Vac (N/C)


Coil Current:
 33 mA @ 10 Vac
 35 mA @ 12 Vac
 46 mA @ 24 Vac
 55 mA @ 30 Vac
 28 mA @ 120 Vac (RIBMNU1C)
 39 mA @ 208-277 Vac (RIBMNH1C)

Coil Voltage Input:
 10-30 Vac/dc; 120 Vac; 50-60 Hz (RIBMNU1C)
 10-30 Vac/dc; 208-277 Vac; 50-60 Hz (RIBMNH1C)
 Drop Out = 2.1 Vac / 2.8 Vdc
 Pull In = 9 Vac / 10 Vdc

15 AMP TRACK MOUNT CONTROL RELAYS




RIBMNU1S

2.75" Track Mount Relay 15 Amp SPST
+ Override with 10-30 Vac/dc/**120 Vac Coil**

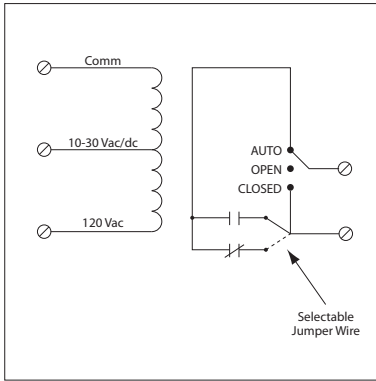

RIBMNH1S

2.75" Track Mount Relay 15 Amp SPST
+ Override with 10-30 Vac/dc/**208-277 Vac Coil**

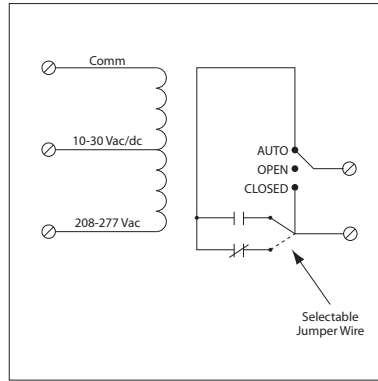

RELAYS

SPECIFICATIONS

Relays & Contact Type: One (1) SPST Continuous Duty Coil
Expected Relay Life: 10 million cycles minimum mechanical
Operating Temperature: -30 to 140° F
Humidity Range: 5 to 95% (noncondensing)
Operate Time: 20ms
Relay Status: LED On = Activated
Dimensions: 2.500" x 2.750" x 1.750"
Track Mount: 2.750", See MT212 Series on page 152
MT212 Mounting Track Sold Separately
Approvals: UL Listed, UL916, UL864, C-UL
 California State Fire Marshal, CE, RoHS
Gold Flash: Yes
Override Switch: Yes

Contact Ratings:

15 Amp Resistive @ 150 Vac
 10 Amp Resistive @ 277 Vac
 480 VA Pilot Duty @ 277 Vac
 480 VA Ballast @ 277 Vac
Not rated for Electronic Ballast
 600 Watt Tungsten @ 120 Vac (N/O)
 240 Watt Tungsten @ 120 Vac (N/C)
 1/3 HP @ 120-240 Vac (N/O)
 1/6 HP @ 120-240 Vac (N/C)
 1/4 HP @ 277 Vac (N/O)
 1/8 HP @ 277 Vac (N/C)

Coil Voltage Input:

10-30 Vac/dc ; 120 Vac ; 50-60 Hz (RIBMNU1S)
 10-30 Vac/dc ; 208-277 Vac ; 50-60 Hz (RIBMNH1S)
 Drop Out = 2.1 Vac / 2.8 Vdc
 Pull In = 9 Vac / 10 Vdc

Coil Current:

33 mA @ 10 Vac	13 mA @ 10Vdc
35 mA @ 12 Vac	15 mA @ 12Vdc
46 mA @ 24 Vac	18 mA @ 24 Vdc
55 mA @ 30 Vac	20 mA @ 30 Vdc
28 mA @ 120 Vac (RIBMNU1S)	
39 mA @ 208-277 Vac (RIBMNH1S)	

Notes:

- Normally Open or Normally Closed selected by yellow jumper wire

POWER RELAYS: 20–30 AMPS

Enclosed | T Style | Track Mount



Made in the U.S.A.
Meets the "Buy American" provisions of Section 1605 of the American Recovery and Reinvestment Act of 2009 (ARRA).

ENCLOSED POWER RELAYS

MODEL #	UL	COIL VOLTAGE		RELAYS	CONTACTS	OVERRIDE SWITCH	NOTES	SPEC PAGE
		AC/DC	AC					
RIB2401B	•	24	120	1	SPDT			24
RIB2402B	•	24	208-277	1	SPDT			24
RIB2401SB	•	24	120	1	SPST	1		25
RIB2402SB	•	24	208-277	1	SPST	1		25
RIB2421B	•	24	120/208-277	1	SPDT			25
RIB2421SB	•	24	120/208-277	1	SPST	1		25
RIB01P	•		120	1	DPDT			26
RIB02P	•		208-277	1	DPDT			27
RIB347P	•		347	1	DPDT		NEW	27
RIB04P	•		480	1	DPDT			28
RIB2401SBC	•	24	120	1	SPDT	2 ¹		26
RIB2402SBC	•	24	208-277	1	SPDT	2 ¹		26
RIB243P	• ³	24		1	3PST			28
RIB013P	•		120	1	3PST			29
RIB023P	•		208-277	1	3PST			29
RIB043P	•		480	1	3PST			30
RIB24Z	•	24		1	1 SPST N/O, 1 SPST N/C			30
RIB12P	•	12		1	DPDT			31
RIB12P30	•	12		1	DPDT			31
RIB24P	•	24		1	DPDT			31
RIB24P30	•	24		1	DPDT			31
RIB01P30	•		120	1	DPST			32
RIB01P30-S	•		120	1	DPST	1		32
RIB02P30	•		208-277	1	DPST			32

RELAYS

T STYLE POWER RELAYS

MODEL #	UL	COIL VOLTAGE		RELAYS	CONTACTS	OVERRIDE SWITCH	NOTES	SPEC PAGE
		AC/DC	AC					
RIBT24B	•	24		1	SPDT			33
RIBT2401B	•	24	120	1	SPDT			33
RIBTD2401B	•	24	120	1	SPDT		2	35
RIBT2402B	•	24	208-277	1	SPDT			33
RIBT242B	•	24		2	2 SPDT			36
RIBT243B	• ³	24		3	2 SPST, 1 SPDT			36
RIBT24SB	•	24		1	SPST	1		33
RIBT2401SB	•	24	120	1	SPST	1		34
RIBT2402SB	•	24	208-277	1	SPST	1		34
RIBT2401SBC	•	24	120	1	SPDT	2 ¹		34
RIBT2402SBC	•	24	208-277	1	SPDT	2 ¹		34
RIBT24P	•	24		1	DPDT			36
RIBT24Z	•	24		1	1 SPST N/O, 1 SPST N/C			37
RIBT243P	• ³	24		1	3PST			37

UL = UL Listed : UL916 Energy Management, UL864 Fire ; USA & Canada

1 = SPDT with override requires 2 switches

2 = Time Delay

3 = UL Listed : UL916 Energy Management ; USA & Canada

TRACK MOUNT POWER RELAYS

RELAYS

MODEL #	UL	COIL VOLTAGE		RELAYS	CONTACTS	OVERRIDE SWITCH	NOTES	SPEC PAGE
		AC/DC	AC					
RIBM2401B	•	24	120	1	SPDT			38
RIBM2402B	•	24	208-277	1	SPDT			38
RIBM2401SB	•	24	120	1	SPST	1		38
RIBM2402SB	•	24	208-277	1	SPST	1		38
RIBM2401SBC	•	24	120	1	SPDT	2 ¹		39
RIBM2402SBC	•	24	208-277	1	SPDT	2 ¹		39
RIBM24ZN	UL	24		1	DPDT			39
RIBM24ZL	•	24		1	DPST			40
RIBM24ZL	•	24		1	DPST			40
RIBM243PN	UL	24		1	3PDT			41
RIBM013PN	UL		120	1	3PDT			41
RIBM023PN	UL		208-277	1	3PDT			42
RIBM043PN	UL		480	1	3PDT			42
RIBM043PN-HD	UL		480	1	3PDT			43

UL = UL Listed : UL916 Energy Management, UL864 Fire ; USA & Canada


¹ = SPDT with override requires 2 switches

UL = UL Component Recognized : UL916 Energy Management; USA & Canada

20 AMP POWER CONTROL RELAYS


RIB2401B

Enclosed Relay 20 Amp SPDT with 24 Vac/dc/120 Vac Coil

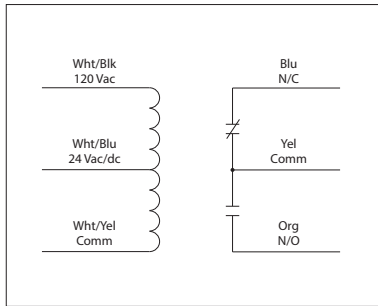

RIB2402B

Enclosed Relay 20 Amp SPDT with 24 Vac/dc/208-277 Vac Coil

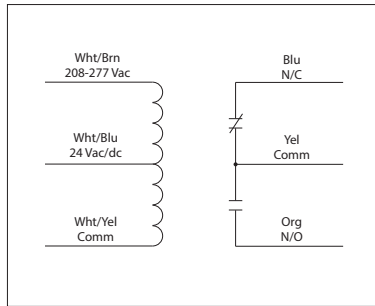

SPECIFICATIONS

Relays & Contact Type: One (1) SPDT Continuous Duty Coil
Expected Relay Life: 10 million cycles minimum mechanical
Operating Temperature: -30 to 140° F
Humidity Range: 5 to 95% (noncondensing)
Operate Time: 18ms
Relay Status: LED On = Activated
Dimensions: 2.30" x 3.20" x 1.80" with .50" NPT Nipple
Wires: 16", 600V Rated
Approvals: UL Listed, UL916, UL864, C-UL California State Fire Marshal, CE, RoHS
Housing Rating: UL Accepted for Use in Plenum, NEMA 1
Gold Flash: No
Override Switch: No

Contact Ratings:
 20 Amp Resistive @ 277 Vac
 5 Amp Resistive @ 480 Vac
 20 Amp Ballast @ 277 Vac
 16 Amp Electronic Ballast @ 277 Vac (N/O)
 10 Amp Tungsten @ 120 Vac (N/O)
 770 VA Pilot Duty @ 120 Vac
 1,110 VA Pilot Duty @ 277 Vac
 2 HP @ 277 Vac
 1 HP @ 120 Vac


Coil Current:
 50 mA @ 18 Vac
 83 mA @ 24 Vac
 47 mA @ 120 Vac (RIB2401B)
 69 mA @ 208-277 Vac (RIB2402B)
 33 mA @ 22 Vdc
 35 mA @ 24 Vdc
 47 mA @ 30 Vdc

Coil Voltage Input:
 24 Vac/dc ; 120 Vac ; 50-60 Hz (RIB2401B)
 24 Vac/dc ; 208-277 Vac ; 50-60 Hz (RIB2402B)
 Drop Out = 2.1 Vac / 3.8 Vdc
 Pull In = 18 Vac / 22 Vdc

20 AMP POWER CONTROL RELAYS


RIB2401SB

Enclosed Relay 20 Amp SPST-N/O + Override with 24 Vac/dc/120 Vac Coil

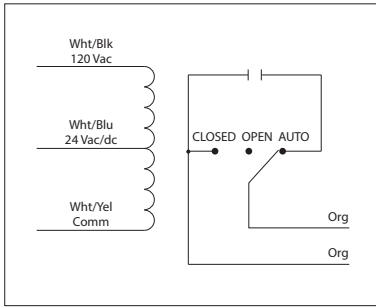

RIB2402SB

Enclosed Relay 20 Amp SPST-N/O + Override with 24 Vac/dc/208-277 Vac Coil

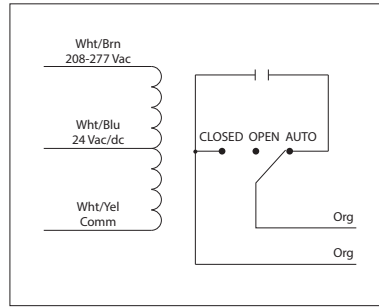

RELAYS

SPECIFICATIONS

Relays & Contact Type: One (1) SPST Continuous Duty Coil
Expected Relay Life: 10 million cycles minimum mechanical
Operating Temperature: -30 to 140° F
Humidity Range: 5 to 95% (noncondensing)
Operate Time: 18ms
Relay Status: LED On = Activated
Dimensions: 2.30" x 3.20" x 1.80" with .50" NPT Nipple
Wires: 16", 600V Rated
Approvals: UL Listed, UL916, UL864, UL508, C-UL California State Fire Marshal, CE, RoHS
Housing Rating: UL Accepted for Use in Plenum, NEMA 1
Gold Flash: No
Override Switch: Yes

Contact Ratings:
 20 Amp Resistive @ 277 Vac
 20 Amp Ballast @ 277 Vac (N/O)
 10 Amp Ballast @ 277 Vac (N/C)
Not rated for Electronic Ballast
 10 Amp Tungsten @ 120 Vac (N/O)
 770 VA Pilot Duty @ 120 Vac
 1,110 VA Pilot Duty @ 277 Vac
 2 HP @ 277 Vac
 1 HP @ 120 Vac

Coil Voltage Input:
 24 Vac/dc; 120 Vac; 50-60 Hz (RIB2401SB)
 24 Vac/dc; 208-277 Vac; 50-60 Hz (RIB2402SB)
 Drop Out = 2.1 Vac / 3.8 Vdc
 Pull In = 18 Vac / 22 Vdc


Coil Current:
 50 mA @ 18 Vac 33 mA @ 22 Vdc
 83 mA @ 24 Vac 35 mA @ 24 Vdc
 47 mA @ 120 Vac (RIB2401SB) 47 mA @ 30 Vdc
 69 mA @ 208-277 Vac (RIB2402SB)

Notes:
 • Order Normally Closed by adding "-NC" to end of model number

20 AMP POWER CONTROL RELAYS



RIB2421B

Enclosed Relay 20 Amp with 24 Vac/dc/208-277 Vac/120 Vac Coil

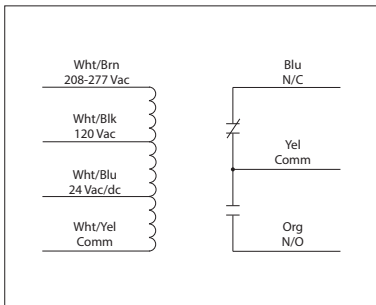

RIB2421SB

Enclosed Relay 20 Amp + Override with 24 Vac/dc/208-277 Vac/120 Vac Coil

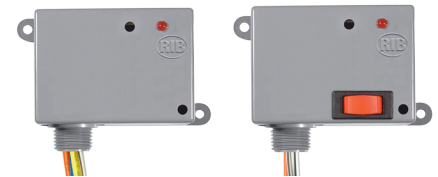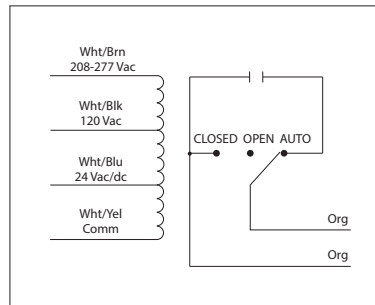

GREAT SERVICE TRUCK RELAY
 ONE RELAY COVERS MOST APPLICATIONS

SPECIFICATIONS

Relays & Contact Type: One (1) SPDT Continuous Duty Coil (RIB2421B)
 One (1) SPST Continuous Duty Coil (RIB2421SB)
Expected Relay Life: 10 million cycles minimum mechanical
Operating Temperature: -30 to 140° F
Humidity Range: 5 to 95% (noncondensing)
Operate Time: 18ms
Relay Status: LED On = Activated
Dimensions: 2.30" x 3.20" x 1.80" with .50" NPT Nipple
Wires: 16", 600V Rated
Approvals: UL Listed, UL916, UL864, C-UL California State Fire Marshal, CE, RoHS
Housing Rating: UL Accepted for Use in Plenum, NEMA 1
Gold Flash: No
Override Switch: No (RIB2421B)
 Yes (RIB2421SB)

Contact Ratings (RIB2421B):
 20 Amp Resistive @ 277 Vac
 5 Amp Resistive @ 480 Vac
 20 Amp Ballast @ 277 Vac
 16 Amp Electronic Ballast @ 277 Vac (N/O)
 10 Amp Tungsten @ 120 Vac (N/O)
 770 VA Pilot Duty @ 120 Vac
 1,110 VA Pilot Duty @ 277 Vac
 2 HP @ 277 Vac
 1 HP @ 120 Vac

Coil Current:
 83 mA @ 24 Vac
 47 mA @ 120 Vac
 69 mA @ 208-277 Vac
 47 mA @ 30 Vdc

Coil Voltage Input:
 24 Vac/dc; 208-277 Vac;
 120 Vac; 50-60 Hz
 Drop Out = 2.1 Vac / 3.8 Vdc
 Pull In = 18 Vac / 22 Vdc


Contact Ratings (RIB2421SB):
 20 Amp Resistive @ 277 Vac
 20 Amp Ballast @ 277 Vac (N/O)
 10 Amp Ballast @ 277 Vac (N/C)
Not rated for Electronic Ballast
 10 Amp Tungsten @ 120 Vac (N/O)
 770 VA Pilot Duty @ 120 Vac
 1,110 VA Pilot Duty @ 277 Vac
 2 HP @ 277 Vac
 1 HP @ 120 Vac

Notes:
 • Order Normally Closed by adding "-NC" to end of model number (RIB2421SB)

20 AMP POWER CONTROL RELAYS



RIB2401SBC

Enclosed Relay 20 Amp SPDT + Override with 24 Vac/dc/120 Vac Coil

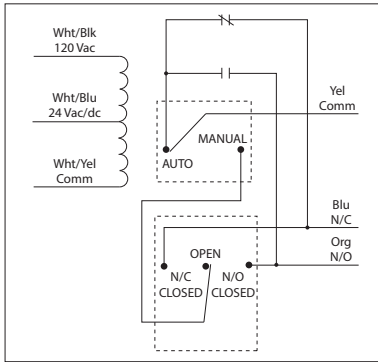

RIB2402SBC

Enclosed Relay 20 Amp SPDT + Override with 24 Vac/dc/208-277 Vac Coil

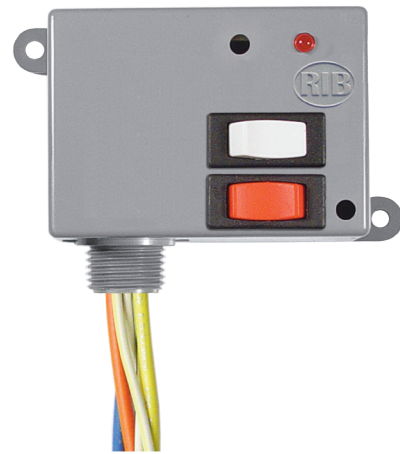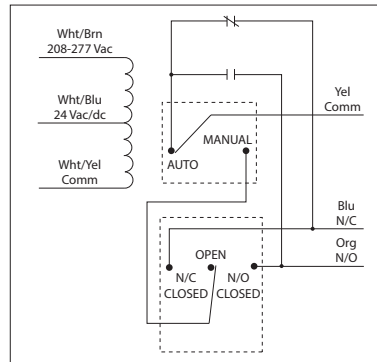

RELAYS

SPECIFICATIONS

Relays & Contact Type: One (1) SPDT Continuous Duty Coil
Expected Relay Life: 10 million cycles minimum mechanical
Operating Temperature: -30 to 140° F
Humidity Range: 5 to 95% (noncondensing)
Operate Time: 18ms
Relay Status: LED On = Activated
Dimensions: 2.30" x 3.20" x 1.80" with .50" NPT Nipple
Wires: 16", 600V Rated
Approvals: UL Listed, UL916, UL864, C-UL
 California State Fire Marshal, CE, RoHS
Housing Rating: UL Accepted for Use in Plenum, NEMA 1
Gold Flash: No
Override Switch: Yes (2)

Contact Ratings:
 20 Amp Resistive @ 277 Vac
 20 Amp Ballast @ 277 Vac (N/O)
 10 Amp Ballast @ 277 Vac (N/C)
Not rated for Electronic Ballast
 10 Amp Tungsten @ 120 Vac (N/O)
 770 VA Pilot Duty @ 120 Vac
 1,110 VA Pilot Duty @ 277 Vac
 2 HP @ 277 Vac
 1 HP @ 120 Vac


Coil Current:
 50 mA @ 18 Vac
 83 mA @ 24 Vac
 47 mA @ 120 Vac (RIB2401SBC)
 69 mA @ 208-277 Vac (RIB2402SBC)
 33 mA @ 22 Vdc
 35 mA @ 24 Vdc
 47 mA @ 30 Vdc

Coil Voltage Input:
 24 Vac/dc ; 120 Vac ; 50-60 Hz (RIB2401SBC)
 24 Vac/dc ; 208-277 Vac ; 50-60 Hz (RIB2402SBC)
 Drop Out = 2.1 Vac / 3.8 Vdc
 Pull In = 18 Vac / 22 Vdc

20 AMP POWER CONTROL RELAY

RIB01P

Enclosed Relay 20 Amp DPDT with 120 Vac Coil

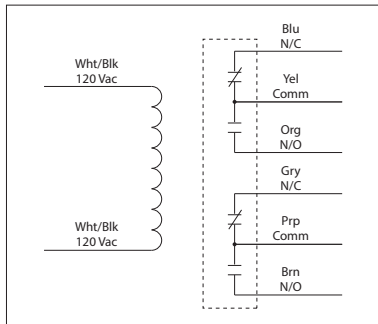

SPECIFICATIONS

Relays & Contact Type: One (1) DPDT Continuous Duty Coil
Expected Relay Life: 10 million cycles minimum mechanical
Operating Temperature: -30 to 140° F
Humidity Range: 5 to 95% (noncondensing)
Operate Time: 18ms
Relay Status: LED On = Activated
Dimensions: 4.00" x 4.00" x 1.80" with .50" NPT Nipple
Wires: 16", 600V Rated
Approvals: UL Listed, UL916, UL864, C-UL
 California State Fire Marshal, CE, RoHS
Housing Rating: UL Accepted for Use in Plenum, NEMA 1
Gold Flash: Yes
Override Switch: No

Contact Ratings:
 20 Amp Resistive @ 300 Vac
 20 Amp Resistive @ 28 Vdc
 20 Amp Ballast @ 277-480 Vac
Not rated for Electronic Ballast
 15 Amp Resistive @ 600 Vac
 770 VA Pilot Duty @ 120 Vac
 1158 VA Pilot Duty @ 240 Vac
 1109 VA Pilot Duty @ 277 Vac
 1640 VA Pilot Duty @ 480 Vac
 Heavy Pilot Duty @ 600 Vac
 3 HP @ 480-600 Vac
 2 HP @ 240-277 Vac
 1 HP @ 120 Vac


Coil Current:
 105 mA @ 120 Vac

Coil Voltage Input:
 120 Vac ; 50-60 Hz
 Drop Out = 35 Vac
 Pull In = 85 Vac

20 AMP POWER CONTROL RELAY

RIB02P

Enclosed Relay 20 Amp DPDT with 208-277 Vac Coil

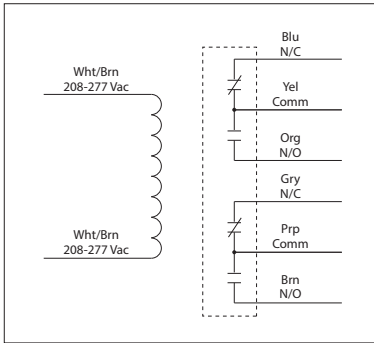

RELAYS

SPECIFICATIONS

Relays & Contact Type: One (1) DPDT Continuous Duty Coil
Expected Relay Life: 10 million cycles minimum mechanical
Operating Temperature: -30 to 140° F
Humidity Range: 5 to 95% (noncondensing)
Operate Time: 18ms
Relay Status: LED On = Activated
Dimensions: 4.00" x 4.00" x 1.80" with .50" NPT Nipple
Wires: 16", 600V Rated
Approvals: UL Listed, UL916, UL864, C-UL, California State Fire Marshal, CE, RoHS
Housing Rating: UL Accepted for Use in Plenum, NEMA 1
Gold Flash: Yes
Override Switch: No

Contact Ratings:
 20 Amp Resistive @ 300 Vac
 20 Amp Resistive @ 28 Vdc
 20 Amp Ballast @ 277-480 Vac
Not rated for Electronic Ballast
 15 Amp Resistive @ 600 Vac
 770 VA Pilot Duty @ 120 Vac
 1158 VA Pilot Duty @ 240 Vac
 1109 VA Pilot Duty @ 277 Vac
 1640 VA Pilot Duty @ 480 Vac
 Heavy Pilot Duty @ 600 Vac
 3 HP @ 480-600 Vac
 2 HP @ 240-277 Vac
 1 HP @ 120 Vac


Coil Current:
 105 mA @ 208-277 Vac

Coil Voltage Input:
 208-277 Vac ; 50-60 Hz
 Drop Out = 60 Vac
 Pull In = 160 Vac

20 AMP POWER CONTROL RELAY

RIB347P

Enclosed Relay 20 Amp DPDT with 347 Vac Coil

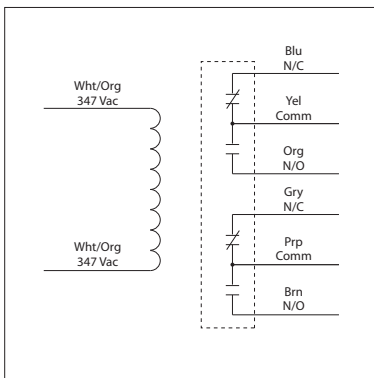

LIGHTING RETROFITS
347 VAC FOR OUR FRIENDS IN CANADA



SPECIFICATIONS

Relays & Contact Type: One (1) DPDT Continuous Duty Coil
Expected Relay Life: 10 million cycles minimum mechanical
Operating Temperature: -30 to 140° F
Humidity Range: 5 to 95% (noncondensing)
Operate Time: 18ms
Relay Status: LED On = Activated
Dimensions: 4.00" x 4.00" x 1.80" with .50" NPT Nipple
Wires: 16", 600V Rated
Approvals: UL Listed, UL916, C-UL, CE, RoHS
Housing Rating: UL Accepted for Use in Plenum, NEMA 1
Gold Flash: Yes
Override Switch: No

Contact Ratings:
 20 Amp Resistive @ 300 Vac
 20 Amp Resistive @ 28 Vdc
 15 Amp Resistive @ 600 Vac
 20 Amp Ballast @ 277-480 Vac
Not rated for Electronic Ballast
 770 VA Pilot Duty @ 120 Vac
 1158 VA Pilot Duty @ 240 Vac

1109 VA Pilot Duty @ 277 Vac
 1640 VA Pilot Duty @ 480 Vac
 Heavy Pilot Duty @ 600 Vac
 3 HP @ 480-600 Vac
 2 HP @ 240-277 Vac
 1 HP @ 120 Vac


Coil Current:
 105 mA @ 347 Vac

Coil Voltage Input:
 347 Vac ; 50-60 Hz
 Drop Out = 70 Vac
 Pull In = 295 Vac

20 AMP POWER CONTROL RELAY

RIB04P

Enclosed Relay 20 Amp DPDT with 480 Vac Coil

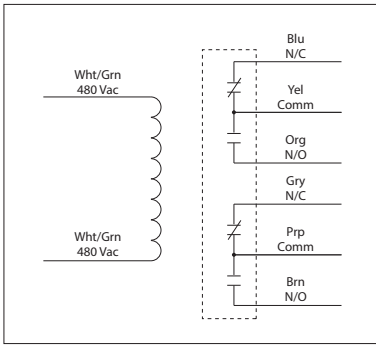

RELAYS

SPECIFICATIONS

Relays & Contact Type: One (1) DPDT Continuous Duty Coil
Expected Relay Life: 10 million cycles minimum mechanical
Operating Temperature: -30 to 140° F
Humidity Range: 5 to 95% (noncondensing)
Operate Time: 18ms
Relay Status: LED On = Activated
Dimensions: 4.00" x 4.00" x 1.80" with .50" NPT Nipple
Wires: 16", 600V Rated
Approvals: UL Listed, UL916, UL864, C-UL
 California State Fire Marshal, CE, RoHS
Housing Rating: UL Accepted for Use in Plenum, NEMA 1
Gold Flash: Yes
Override Switch: No

Contact Ratings:
 20 Amp Resistive @ 300 Vac
 20 Amp Resistive @ 28 Vdc
 20 Amp Ballast @ 277-480 Vac
Not rated for Electronic Ballast
 15 Amp Resistive @ 600 Vac
 770 VA Pilot Duty @ 120 Vac
 1158 VA Pilot Duty @ 240 Vac
 1109 VA Pilot Duty @ 277 Vac
 1640 VA Pilot Duty @ 480 Vac
 Heavy Pilot Duty @ 600 Vac
 3 HP @ 480-600 Vac
 2 HP @ 240-277 Vac
 1 HP @ 120 Vac


Coil Current:
 105 mA @ 480 Vac

Coil Voltage Input:
 480 Vac ; 50-60 Hz
 Drop Out = 140 Vac
 Pull In = 340 Vac

20 AMP POWER CONTROL RELAY

RIB243P

Enclosed Relay 20 Amp 3PST-N/O with 24 Vac/dc Coil

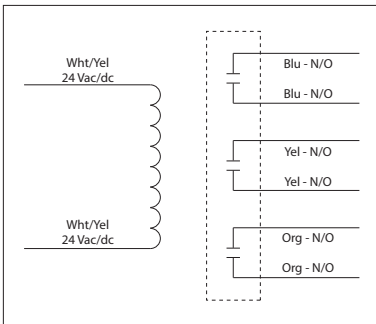

SPECIFICATIONS

Relays & Contact Type: One (1) 3PST Continuous Duty Coil
Expected Relay Life: 10 million cycles minimum mechanical
Operating Temperature: -30 to 140° F
Humidity Range: 5 to 95% (noncondensing)
Operate Time: 20ms
Relay Status: LED On = Activated
Dimensions: 4.00" x 4.00" x 1.80" with .50" NPT Nipple
Wires: 16", 600V Rated
Approvals: UL Listed, UL916, C-UL
 California State Fire Marshal, CE, RoHS
Housing Rating: UL Accepted for Use in Plenum, NEMA 1
Gold Flash: No
Override Switch: No

Contact Ratings:
 20 Amp Resistive @ 300 Vac, 28 Vdc
 20 Amp Ballast @ 277-480 Vac
Not rated for Electronic Ballast
 15 Amp Resistive @ 600 Vac
 770 VA Pilot Duty @ 120 Vac, 1 Phase
 1158 VA Pilot Duty @ 240 Vac, 1 Phase
 1110 VA Pilot Duty @ 277 Vac, 1 Phase
 1640 VA Pilot Duty @ 480 Vac, 1 Phase
 1466 VA Pilot Duty @ 240 Vac, 3 Phase
 2112 VA Pilot Duty @ 480 Vac, 3 Phase
 Heavy Pilot Duty @ 600 Vac
 7.5 HP @ 480 Vac, 3 Phase
 5 HP @ 240 Vac, 3 Phase
 3 HP @ 480-600 Vac, 1 Phase
 2 HP @ 240-277 Vac, 1 Phase
 1 HP @ 120 Vac, 1 Phase

Coil Current:
 210 mA @ 24 Vac
 154 mA @ 30 Vdc


Coil Voltage Input:
 24 Vac/dc ; 50-60 Hz
 Drop Out = 3 Vac / 3.8 Vdc
 Pull In = 20 Vac / 22 Vdc

Notes:
 • Order Normally Closed by adding "-NC" to end of model number

20 AMP POWER CONTROL RELAY

RIB013P

Enclosed Relay 20 Amp 3PST-N/O with
120 Vac Coil

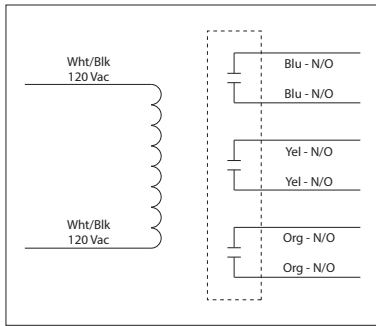

RELAYS

SPECIFICATIONS

Relays & Contact Type: One (1) 3PST Continuous Duty Coil
Expected Relay Life: 10 million cycles minimum mechanical
Operating Temperature: -30 to 140° F
Humidity Range: 5 to 95% (noncondensing)
Operate Time: 20ms
Relay Status: LED On = Activated
Dimensions: 4.00" x 4.00" x 1.80" with .50" NPT Nipple
Wires: 16", 600V Rated
Approvals: UL Listed, UL916, UL864, C-UL
 California State Fire Marshal, CE, RoHS
Housing Rating: UL Accepted for Use in Plenum, NEMA 1
Gold Flash: No
Override Switch: No

Contact Ratings:
 20 Amp Resistive @ 300 Vac, 28 Vdc
 20 Amp Ballast @ 277-480 Vac
Not rated for Electronic Ballast
 15 Amp Resistive @ 600 Vac
 770 VA Pilot Duty @ 120 Vac, 1 Phase
 1158 VA Pilot Duty @ 240 Vac, 1 Phase
 1110 VA Pilot Duty @ 277 Vac, 1 Phase
 1640 VA Pilot Duty @ 480 Vac, 1 Phase
 1466 VA Pilot Duty @ 240 Vac, 3 Phase
 2112 VA Pilot Duty @ 480 Vac, 3 Phase
 Heavy Pilot Duty @ 600 Vac
 7.5 HP @ 480 Vac, 3 Phase
 5 HP @ 240 Vac, 3 Phase
 3 HP @ 480-600 Vac, 1 Phase
 2 HP @ 240-277 Vac, 1 Phase
 1 HP @ 120 Vac, 1 Phase

Coil Current:
 154 mA @ 120 Vac


Coil Voltage Input:
 120 Vac ; 50-60 Hz
 Drop Out = 35 Vac
 Pull In = 85 Vac

Notes:
 • Order Normally Closed by adding "-NC" to end of model number

20 AMP POWER CONTROL RELAY

RIB023P

Enclosed Relay 20 Amp 3PST-N/O with
208-277 Vac Coil

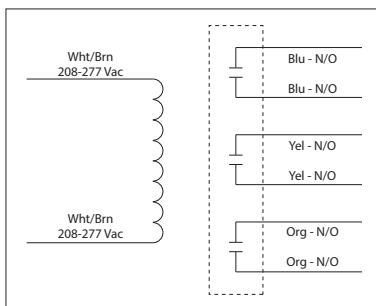

SPECIFICATIONS

Relays & Contact Type: One (1) 3PST Continuous Duty Coil
Expected Relay Life: 10 million cycles minimum mechanical
Operating Temperature: -30 to 140° F
Humidity Range: 5 to 95% (noncondensing)
Operate Time: 20ms
Relay Status: LED On = Activated
Dimensions: 4.00" x 4.00" x 1.80" with .50" NPT Nipple
Wires: 16", 600V Rated
Approvals: UL Listed, UL916, UL864, C-UL
 California State Fire Marshal, CE, RoHS
Housing Rating: UL Accepted for Use in Plenum, NEMA 1
Gold Flash: No
Override Switch: No

Contact Ratings:
 20 Amp Resistive @ 300 Vac, 28 Vdc
 20 Amp Ballast @ 277-480 Vac
Not rated for Electronic Ballast
 15 Amp Resistive @ 600 Vac
 770 VA Pilot Duty @ 120 Vac, 1 Phase
 1158 VA Pilot Duty @ 240 Vac, 1 Phase
 1110 VA Pilot Duty @ 277 Vac, 1 Phase
 1640 VA Pilot Duty @ 480 Vac, 1 Phase
 1466 VA Pilot Duty @ 240 Vac, 3 Phase
 2112 VA Pilot Duty @ 480 Vac, 3 Phase
 Heavy Pilot Duty @ 600 Vac
 7.5 HP @ 480 Vac, 3 Phase
 5 HP @ 240 Vac, 3 Phase
 3 HP @ 480-600 Vac, 1 Phase
 2 HP @ 240-277 Vac, 1 Phase
 1 HP @ 120 Vac, 1 Phase

Coil Current:
 187 mA @ 208-277 Vac


Coil Voltage Input:
 208-277 Vac ; 50-60 Hz
 Drop Out = 60 Vac
 Pull In = 160 Vac

Notes:
 • Order Normally Closed by adding "-NC" to end of model number

20 AMP POWER CONTROL RELAY

RIB043P

Enclosed Relay 20 Amp 3PST-N/O with 480 Vac Coil

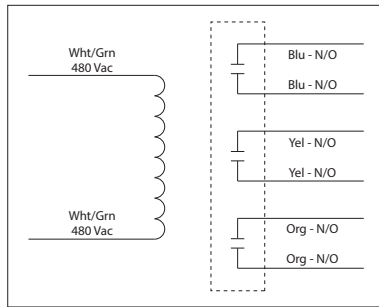

SPECIFICATIONS

Relays & Contact Type: One (1) 3PST Continuous Duty Coil
Expected Relay Life: 10 million cycles minimum mechanical
Operating Temperature: -30 to 140° F
Humidity Range: 5 to 95% (noncondensing)
Operate Time: 20ms
Relay Status: LED On = Activated
Dimensions: 4.00" x 4.00" x 1.80" with .50" NPT Nipple
Wires: 16", 600V Rated
Approvals: UL Listed, UL916, UL864, C-UL
 California State Fire Marshal, CE, RoHS
Housing Rating: UL Accepted for Use in Plenum, NEMA 1
Gold Flash: No
Override Switch: No

Contact Ratings:
 20 Amp Resistive @ 300 Vac, 28 Vdc
 20 Amp Ballast @ 277-480 Vac
Not rated for Electronic Ballast
 15 Amp Resistive @ 600 Vac
 770 VA Pilot Duty @ 120 Vac, 1 Phase
 1158 VA Pilot Duty @ 240 Vac, 1 Phase
 1110 VA Pilot Duty @ 277 Vac, 1 Phase
 1640 VA Pilot Duty @ 480 Vac, 1 Phase
 1466 VA Pilot Duty @ 240 Vac, 3 Phase
 2112 VA Pilot Duty @ 480 Vac, 3 Phase
 Heavy Pilot Duty @ 600 Vac
 7.5 HP @ 480 Vac, 3 Phase
 5 HP @ 240 Vac, 3 Phase
 3 HP @ 480-600 Vac, 1 Phase
 2 HP @ 240-277 Vac, 1 Phase
 1 HP @ 120 Vac, 1 Phase

Coil Current:
 132 mA @ 480 Vac



Coil Voltage Input:
 480 Vac ; 50-60 Hz
 Drop Out = 140 Vac
 Pull In = 340 Vac

Notes:
 • Order Normally Closed by adding "-NC" to end of model number

30 AMP POWER CONTROL RELAY

RIB24Z

Enclosed Relay 30 Amp SPST-N/O + SPST-N/C with 24 Vac/dc Coil

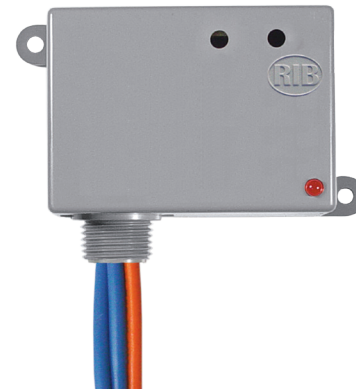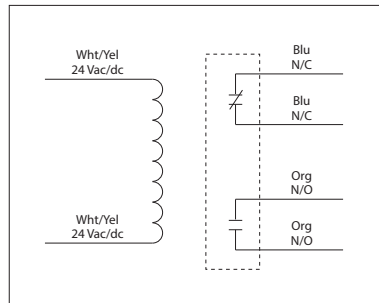

SPECIFICATIONS

Relays & Contact Type: One (1) SPST-N/O + SPST-N/C Continuous Duty Coil
Expected Relay Life: 10 million cycles minimum mechanical
Operating Temperature: -30 to 140° F
Humidity Range: 5 to 95% (noncondensing)
Operate Time: 18ms
Relay Status: LED On = Activated
Dimensions: 2.30" x 3.20" x 1.80" with .50" NPT Nipple
Wires: 16", 600V Rated
Approvals: UL Listed, UL916, UL864, C-UL
 California State Fire Marshal, CE, RoHS
Housing Rating: UL Accepted for Use in Plenum, NEMA 1
Gold Flash: Yes
Override Switch: No

Contact Ratings:
 30 Amp Resistive @ 300 Vac
 25 Amp Resistive @ 28 Vdc
 20 Amp Ballast @ 277-480 Vac
Not rated for Electronic Ballast
 15 Amp Resistive @ 600 Vac
 770 VA Pilot Duty @ 120 Vac
 1158 VA Pilot Duty @ 240 Vac
 1109 VA Pilot Duty @ 277 Vac
 1640 VA Pilot Duty @ 480 Vac
 Heavy Pilot Duty @ 600 Vac
 3 HP @ 480-600 Vac
 2 HP @ 240-277 Vac
 1 HP @ 120 Vac


Coil Current:
 110 mA @ 20 Vac
 138 mA @ 24 Vac
 55 mA @ 20 Vdc
 55 mA @ 24 Vdc
 77 mA @ 30 Vdc

Coil Voltage Input:
 24 Vac/dc ; 50-60 Hz
 Drop Out = 3 Vac / 3.8 Vdc
 Pull In = 20 Vac / 20 Vdc

20 / 30 AMP POWER CONTROL RELAYS


RIB12P

Enclosed Relay 20 Amp DPDT with
12 Vac/dc Coil

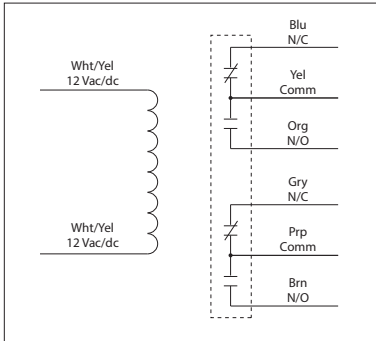

RIB12P30

Enclosed Relay 30 Amp DPDT with
12 Vac/dc Coil

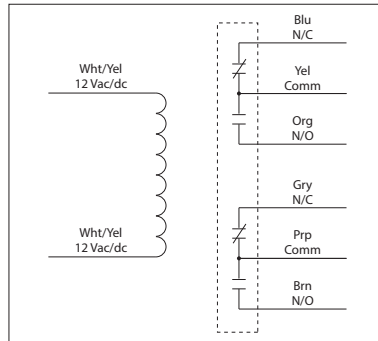

Made in USA
Meets
"Buy American"
of ARRA 2009

RELAYS

SPECIFICATIONS

Relays & Contact Type: One (1) DPDT Continuous Duty Coil
Expected Relay Life: 10 million cycles minimum mechanical
Operating Temperature: -30 to 140° F
Humidity Range: 5 to 95% (noncondensing)
Operate Time: 18ms
Relay Status: LED On = Activated
Dimensions: 2.30" x 3.20" x 1.80"
 with .50" NPT Nipple (RIB12P)
 2.30" x 3.20" x 1.80"
 with .75" NPT Nipple (RIB12P30)
Wires: 16", 600V Rated
Approvals: UL Listed, UL60947, C-UL, CE, RoHS
Housing Rating: UL Accepted for Use in Plenum, NEMA 1
Gold Flash: Yes
Override Switch: No

Contact Ratings: (RIB12P)
 20 Amp Resistive @ 300 Vac
 20 Amp Resistive @ 28 Vdc
 15 Amp Resistive @ 600 Vac
 20 Amp Ballast @ 277-480 Vac
Not rated for Electronic Ballast
 770 VA Pilot Duty @ 120 Vac
 1158 VA Pilot Duty @ 240 Vac
 1109 VA Pilot Duty @ 277 Vac
 1640 VA Pilot Duty @ 480 Vac
 Heavy Pilot Duty @ 600 Vac
 3 HP @ 480-600 Vac
 2 HP @ 240-277 Vac
 1 HP @ 120 Vac

Contact Ratings: (RIB12P30)
 30 Amp Resistive @ 300 Vac
 25 Amp Resistive @ 28 Vdc
 15 Amp Resistive @ 600 Vac
 20 Amp Ballast @ 277-480 Vac
Not rated for Electronic Ballast
 770 VA Pilot Duty @ 120 Vac
 1158 VA Pilot Duty @ 240 Vac
 1110 VA Pilot Duty @ 277 Vac
 1640 VA Pilot Duty @ 480 Vac
 Heavy Pilot Duty @ 600 Vac
 3 HP @ 480-600 Vac
 2 HP @ 240-277 Vac
 1 HP @ 120 Vac


Coil Current:
 115 mA @ 10 Vac
 180 mA @ 12 Vac
 79 mA @ 11 Vdc
 90 mA @ 12 Vdc
 115 mA @ 15 Vdc

Coil Voltage Input:
 12 Vac/dc ; 50-60 Hz
 Drop Out = 4.5 Vac / 4.8 Vdc
 Pull In = 9.7 Vac / 11 Vdc

20 / 30 AMP POWER CONTROL RELAYS


RIB24P

Enclosed Relay 20 Amp DPDT with
24 Vac/dc Coil

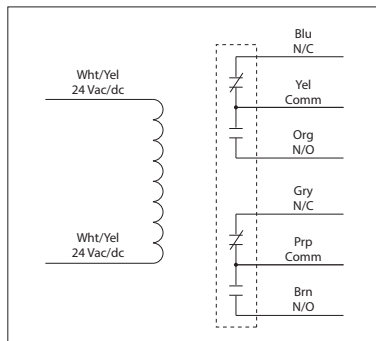

RIB24P30

Enclosed Relay 30 Amp DPDT with
24 Vac/dc Coil

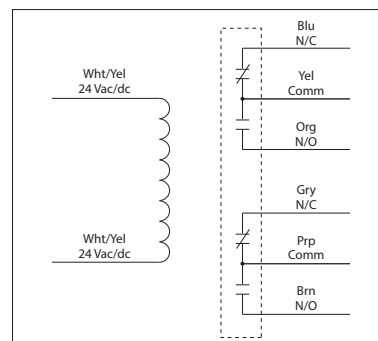

Made in USA
Meets
"Buy American"
of ARRA 2009

SPECIFICATIONS

Relays & Contact Type: One (1) DPDT Continuous Duty Coil
Expected Relay Life: 10 million cycles minimum mechanical
Operating Temperature: -30 to 140° F
Humidity Range: 5 to 95% (noncondensing)
Operate Time: 18ms
Relay Status: LED On = Activated
Dimensions: 2.30" x 3.20" x 1.80"
 with .50" NPT Nipple (RIB24P)
 2.30" x 3.20" x 1.80"
 with .75" NPT Nipple (RIB24P30)
Wires: 16", 600V Rated
Approvals: UL Listed, UL916, UL864, UL60947, C-UL
 California State Fire Marshal, CE, RoHS
Housing Rating: UL Accepted for Use in Plenum, NEMA 1
Gold Flash: Yes
Override Switch: No

Contact Ratings: (RIB24P)
 20 Amp Resistive @ 300 Vac
 20 Amp Resistive @ 28 Vdc
 20 Amp Ballast @ 277-480 Vac
Not rated for Electronic Ballast
 15 Amp Resistive @ 600 Vac
 770 VA Pilot Duty @ 120 Vac
 1158 VA Pilot Duty @ 240 Vac
 1109 VA Pilot Duty @ 277 Vac
 1640 VA Pilot Duty @ 480 Vac
 Heavy Pilot Duty @ 600 Vac
 3 HP @ 480-600 Vac
 2 HP @ 240-277 Vac
 1 HP @ 120 Vac

Contact Ratings: (RIB24P30)
 30 Amp Resistive @ 300 Vac
 25 Amp Resistive @ 28 Vdc
 20 Amp Ballast @ 277-480 Vac
Not rated for Electronic Ballast
 15 Amp Resistive @ 600 Vac
 770 VA Pilot Duty @ 120 Vac
 1158 VA Pilot Duty @ 240 Vac
 1110 VA Pilot Duty @ 277 Vac
 1640 VA Pilot Duty @ 480 Vac
 Heavy Pilot Duty @ 600 Vac
 3 HP @ 480-600 Vac
 2 HP @ 240-277 Vac
 1 HP @ 120 Vac


Coil Current:
 110 mA @ 20 Vac
 138 mA @ 24 Vac
 55 mA @ 20 Vdc
 55 mA @ 24 Vdc
 77 mA @ 30 Vdc

Coil Voltage Input:
 24 Vac/dc ; 50-60 Hz
 Drop Out = 3 Vac / 3.8 Vdc
 Pull In = 20 Vac / 20 Vdc

30 AMP POWER CONTROL RELAYS



RIB01P30

Enclosed Relay 30 Amp DPST-N/O with 120 Vac Coil

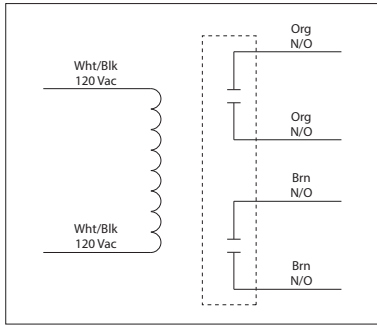

RIB01P30-S

Enclosed Relay 30 Amp DPST-N/O + Coil Side Override with 120 Vac Coil

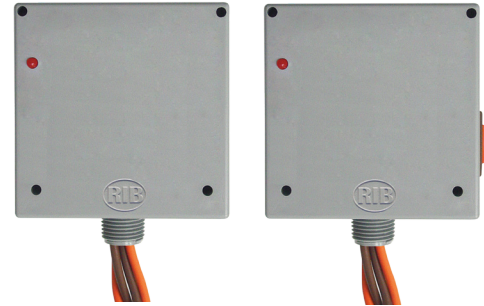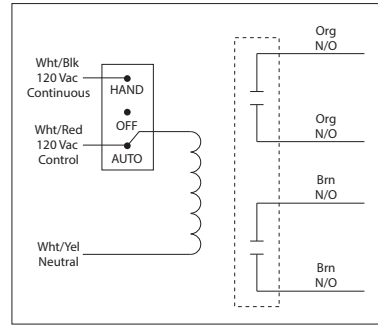

SPECIFICATIONS

Relays & Contact Type: One (1) DPST Continuous Duty Coil
Expected Relay Life: 10 million cycles minimum mechanical
Operating Temperature: -30 to 140° F
Humidity Range: 5 to 95% (noncondensing)
Operate Time: 18ms
Relay Status: LED On = Activated
Dimensions: 4.00" x 4.00" x 1.80" with .50" NPT Nipple
Wires: 16", 600V Rated
Approvals: UL Listed, UL916, UL864, C-UL California State Fire Marshal, CE, RoHS
Housing Rating: UL Accepted for Use in Plenum, NEMA 1
Gold Flash: Yes
Override Switch: No (RIB01P30)
 Coil Side (RIB01P30-S)

Contact Ratings:
 30 Amp Resistive @ 300 Vac
 25 Amp Resistive @ 28 Vdc
 20 Amp Ballast @ 277-480 Vac
Not rated for Electronic Ballast
 15 Amp Resistive @ 600 Vac
 770 VA Pilot Duty @ 120 Vac
 1158 VA Pilot Duty @ 240 Vac
 1110 VA Pilot Duty @ 277 Vac
 1640 VA Pilot Duty @ 480 Vac
 Heavy Pilot Duty @ 600 Vac
 3 HP @ 480-600 Vac
 2 HP @ 240-277 Vac
 1 HP @ 120 Vac

Coil Current:
 105 mA @ 120 Vac

Coil Voltage Input:
 120 Vac; 50-60 Hz
 Drop Out = 35 Vac
 Pull In = 85 Vac


Control Input: (RIB01P30-S)
 Wht/Blk = 120 Vac Continuous
 Wht/Red = 120 Vac Control
 Wht/Yel = Neutral

Notes:
 • Order Both Poles Normally Closed by adding "-NC" to end of model number
 • Order Pole 1 Normally Open and Pole 2 Normally Closed by adding "-NONC" to end of model number

30 AMP POWER CONTROL RELAY

RIB02P30

Enclosed Relay 30 Amp DPST-N/O with 208-277 Vac Coil

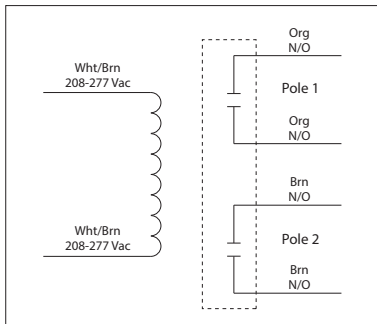

SPECIFICATIONS

Relays & Contact Type: One (1) DPST Continuous Duty Coil
Expected Relay Life: 10 million cycles minimum mechanical
Operating Temperature: -30 to 140° F
Humidity Range: 5 to 95% (noncondensing)
Operate Time: 18ms
Relay Status: LED On = Activated
Dimensions: 4.00" x 4.00" x 1.80" with .50" NPT Nipple
Wires: 16", 600V Rated
Approvals: UL Listed, UL916, UL864, C-UL California State Fire Marshal, CE, RoHS
Housing Rating: UL Accepted for Use in Plenum, NEMA 1
Gold Flash: Yes
Override Switch: No

Contact Ratings:
 30 Amp Resistive @ 300 Vac
 25 Amp Resistive @ 28 Vdc
 20 Amp Ballast @ 277-480 Vac
Not rated for Electronic Ballast
 15 Amp Resistive @ 600 Vac
 770 VA Pilot Duty @ 120 Vac
 1158 VA Pilot Duty @ 240 Vac
 1110 VA Pilot Duty @ 277 Vac
 1640 VA Pilot Duty @ 480 Vac
 Heavy Pilot Duty @ 600 Vac
 3 HP @ 480-600 Vac
 2 HP @ 240-277 Vac
 1 HP @ 120 Vac

Coil Current:
 105 mA @ 208-277 Vac


Coil Voltage Input:
 208-277 Vac; 50-60 Hz
 Drop Out = 60 Vac
 Pull In = 160 Vac

Notes:
 • Order Both Poles Normally Closed by adding "-NC" to end of model number
 • Order Pole 1 Normally Open and Pole 2 Normally Closed by adding "-NONC" to end of model number

20 AMP POWER CONTROL RELAYS


RIBT24B

Enclosed Relay Hi/Low Separation 20 Amp
SPDT with 24 Vac/dc Coil

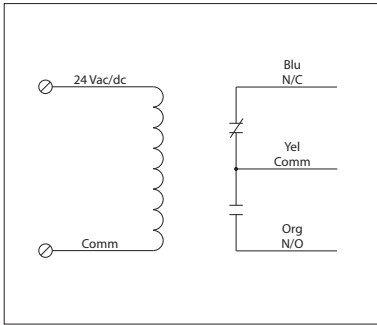

RIBT24SB

Enclosed Relay Hi/Low Separation 20 Amp
SPST + **Override** with 24 Vac/dc Coil

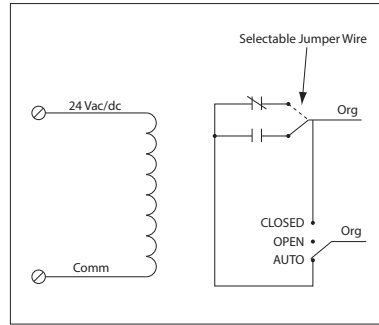

RELAYS

SPECIFICATIONS

Relays & Contact Type: One (1) SPDT Continuous Duty Coil (RIBT24B)
One (1) SPST Continuous Duty Coil (RIBT24SB)

Expected Relay Life: 10 million cycles minimum mechanical

Operating Temperature: -30 to 140° F

Humidity Range: 5 to 95% (noncondensing)

Operate Time: 18ms

Relay Status: LED On = Activated

Dimensions: 4.00" x 4.00" x 1.80" with .50" NPT Nipple

Wires: 16", 600V Rated

Approvals: UL Listed, UL916, UL864, C-UL
California State Fire Marshal, CE, RoHS

Housing Rating: UL Accepted for Use in Plenum, NEMA 1

Gold Flash: No

Override Switch: No (RIBT24B)
Yes (RIBT24SB)

Contact Ratings (RIBT24B):
20 Amp Resistive @ 277 Vac
5 Amp Resistive @ 480 Vac
20 Amp Ballast @ 277 Vac
16 Amp Electronic Ballast @ 277 Vac (N/O)
10 Amp Tungsten @ 120 Vac (N/O)
770 VA Pilot Duty @ 120 Vac
1,110 VA Pilot Duty @ 277 Vac
2 HP @ 277 Vac
1 HP @ 120 Vac

Coil Current:
45 mA @ 18 Vac
75 mA @ 24 Vac
30 mA @ 22 Vdc
32 mA @ 24 Vdc
42 mA @ 30 Vdc

Coil Voltage Input:
24 Vac/dc; 50-60 Hz
Drop Out = 2.1 Vac / 3.8 Vdc
Pull In = 18 Vac / 22 Vdc


Contact Ratings (RIBT24SB):
20 Amp Resistive @ 277 Vac
20 Amp Ballast @ 277 Vac (N/O)
10 Amp Ballast @ 277 Vac (N/C)
Not rated for Electronic Ballast
10 Amp Tungsten @ 120 Vac (N/O)
770 VA Pilot Duty @ 120 Vac
1,110 VA Pilot Duty @ 277 Vac
2 HP @ 277 Vac
1 HP @ 120 Vac

Notes:
• Normally Open or Normally Closed selected by yellow jumper wire (RIBT24SB)

20 AMP POWER CONTROL RELAYS




RIBT2401B

Enclosed Relay Hi/Low Separation 20 Amp
SPDT with 24 Vac/dc/120 Vac Coil

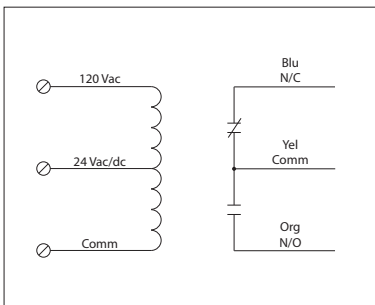

RIBT2402B

Enclosed Relay Hi/Low Separation 20 Amp
SPDT with 24 Vac/dc/208-277 Vac Coil

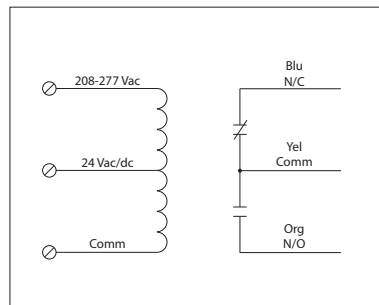

SPECIFICATIONS

Relays & Contact Type: One (1) SPDT Continuous Duty Coil

Expected Relay Life: 10 million cycles minimum mechanical

Operating Temperature: -30 to 140° F

Humidity Range: 5 to 95% (noncondensing)

Operate Time: 18ms

Relay Status: LED On = Activated

Dimensions: 4.00" x 4.00" x 1.80" with .50" NPT Nipple

Wires: 16", 600V Rated

Approvals: UL Listed, UL916, UL864, C-UL
California State Fire Marshal, CE, RoHS

Housing Rating: UL Accepted for Use in Plenum, NEMA 1

Gold Flash: No

Override Switch: No

Contact Ratings:
20 Amp Resistive @ 277 Vac
5 Amp Resistive @ 480 Vac
20 Amp Ballast @ 277 Vac
16 Amp Electronic Ballast @ 277 Vac (N/O)
10 Amp Tungsten @ 120 Vac (N/O)
770 VA Pilot Duty @ 120 Vac
1,110 VA Pilot Duty @ 277 Vac
2 HP @ 277 Vac
1 HP @ 120 Vac


Coil Current:
50 mA @ 18 Vac
83 mA @ 24 Vac
47 mA @ 120 Vac (RIBT2401B)
69 mA @ 208-277 Vac (RIBT2402B)

Coil Voltage Input:
24 Vac/dc; 120 Vac; 50-60 Hz (RIBT2401B)
24 Vac/dc; 208-277 Vac; 50-60 Hz (RIBT2402B)
Drop Out = 2.1 Vac / 3.8 Vdc
Pull In = 18 Vac / 22 Vdc

20 AMP POWER CONTROL RELAYS



RIBT2401SB

Enclosed Relay Hi/Low Separation 20 Amp SPST + Override with 24 Vac/dc/120 Vac Coil

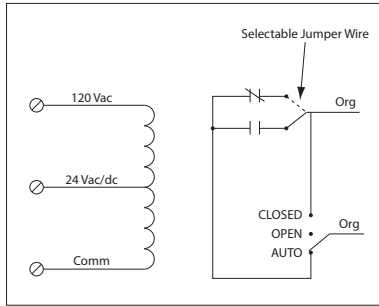

RIBT2402SB

Enclosed Relay Hi/Low Separation 20 Amp SPST + Override with 24 Vac/dc/208-277 Vac Coil

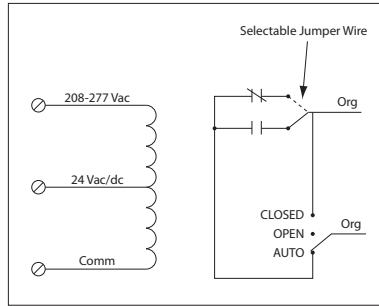

RELAYS

SPECIFICATIONS

Relays & Contact Type: One (1) SPST Continuous Duty Coil
Expected Relay Life: 10 million cycles minimum mechanical
Operating Temperature: -30 to 140° F
Humidity Range: 5 to 95% (noncondensing)
Operate Time: 18ms
Relay Status: LED On = Activated
Dimensions: 4.00" x 4.00" x 1.80" with .50" NPT Nipple
Wires: 16", 600V Rated
Approvals: UL Listed, UL916, UL864, C-UL
 California State Fire Marshal, CE, RoHS
Housing Rating: UL Accepted for Use in Plenum, NEMA 1
Gold Flash: No
Override Switch: Yes

Contact Ratings:
 20 Amp Resistive @ 277 Vac
 20 Amp Ballast @ 277 Vac (N/O)
 10 Amp Ballast @ 277 Vac (N/C)
Not rated for Electronic Ballast
 10 Amp Tungsten @ 120 Vac (N/O)
 1110 VA Pilot Duty @ 277 Vac
 770 VA Pilot Duty @ 120 Vac
 2 HP @ 277 Vac
 1 HP @ 120 Vac
Coil Voltage Input:
 24 Vac/dc ; 120 Vac ; 50-60 Hz (RIBT2401SB)
 24 Vac/dc ; 208-277 Vac ; 50-60 Hz (RIBT2402SB)
 Drop Out = 2.1 Vac / 3.8 Vdc
 Pull In = 18 Vac / 22 Vdc


Coil Current:
 50 mA @ 18 Vac
 83 mA @ 24 Vac
 47 mA @ 120 Vac (RIBT2401SB)
 69 mA @ 208-277 Vac (RIBT2402SB)
 33 mA @ 22 Vdc
 35 mA @ 24 Vdc
 47 mA @ 30 Vdc

Notes:
 • Normally Open or Normally Closed selected by yellow jumper wire

20 AMP POWER CONTROL RELAYS




RIBT2401SBC

Enclosed Relay Hi/Low Separation 20 Amp SPDT + Override with 24 Vac/dc/120 Vac Coil

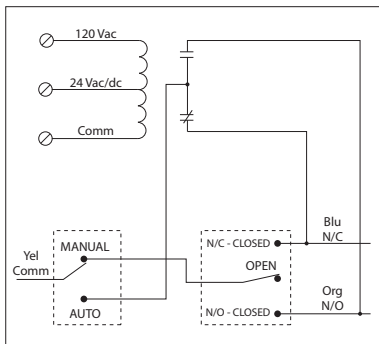

RIBT2402SBC

Enclosed Relay Hi/Low Separation 20 Amp SPDT + Override with 24 Vac/dc/208-277 Vac Coil

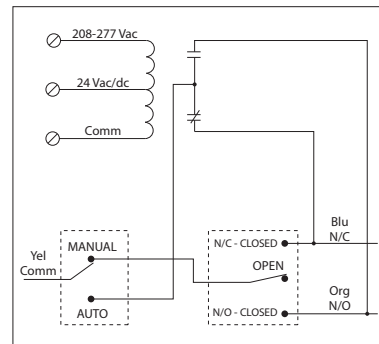

SPECIFICATIONS

Relays & Contact Type: One (1) SPDT Continuous Duty Coil
Expected Relay Life: 10 million cycles minimum mechanical
Operating Temperature: -30 to 140° F
Humidity Range: 5 to 95% (noncondensing)
Operate Time: 18ms
Relay Status: LED On = Activated
Dimensions: 4.00" x 4.00" x 1.80" with .50" NPT Nipple
Wires: 16", 600V Rated
Approvals: UL Listed, UL916, UL864, C-UL
 California State Fire Marshal, CE, RoHS
Housing Rating: UL Accepted for Use in Plenum, NEMA 1
Gold Flash: No
Override Switch: Yes (2)


Contact Ratings:
 20 Amp Resistive @ 277 Vac
 20 Amp Ballast @ 277 Vac (N/O)
 10 Amp Ballast @ 277 Vac (N/C)
Not rated for Electronic Ballast
 10 Amp Tungsten @ 120 Vac (N/O)
 1110 VA Pilot Duty @ 277 Vac
 770 VA Pilot Duty @ 120 Vac
 2 HP @ 277 Vac
 1 HP @ 120 Vac
Coil Voltage Input:
 24 Vac/dc ; 120 Vac ; 50-60 Hz (RIBT2401SBC)
 24 Vac/dc ; 208-277 Vac ; 50-60 Hz (RIBT2402SBC)
 Drop Out = 2.1 Vac / 3.8 Vdc
 Pull In = 18 Vac / 22 Vdc

Coil Current:
 50 mA @ 18 Vac
 83 mA @ 24 Vac
 47 mA @ 120 Vac (RIBT2401SBC)
 69 mA @ 208-277 Vac (RIBT2402SBC)
 33 mA @ 22 Vdc
 35 mA @ 24 Vdc
 47 mA @ 30 Vdc

20 AMP TIME DELAY RELAY

RIBTD2401B

Enclosed Time Delay Relay 20 Amp SPDT with 24 Vac/dc/120 Vac Coil

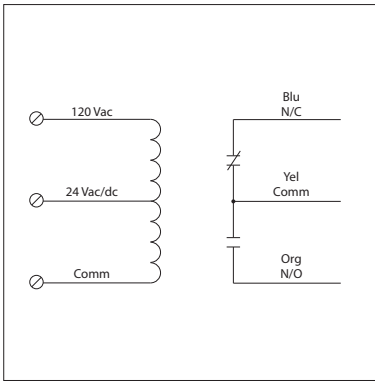

RELAYS

SPECIFICATIONS

- # Relays & Contact Type:** One (1) SPDT Continuous Duty Coil
- Expected Relay Life:** 10 million cycles minimum mechanical
- Operating Temperature:** -30 to 140° F
- Humidity Range:** 5 to 95% (noncondensing)
- Operate Time:** 6ms after time delay
- Relay Status:** RED LED On = Activated
- Time Delay Status:** PINK LED FLASHING = Timing
- Timing Mode:** Delay On Make (N/O)
- Timing Range:** 6 seconds - 20 minutes
- Timing Adjustment:** 4 position DIP switch for range selection and single turn potentiometer for timing adjustment within range
- Timing Tolerance:** Switches 1 & 2 = ±10%
Switches 3 & 4 = ±5%
- Timing Repeatability:** ±1%
- Temperature Timing Variance:** ±1%
- Voltage Timing Variance:** ±1%
- Recycle Time:** 750ms Maximum
- Dimensions:** 4.00" x 4.00" x 1.80" with .50" NPT nipple
- Approvals:** UL Listed, UL916, C-UL, CE, RoHS
- Housing Rating:** UL Accepted for Use in Plenum, NEMA 1
- Gold Flash:** No
- Override Switch:** No

- Contact Ratings:**
 - 20 Amp Resistive @ 277 Vac
 - 20 Amp Ballast @ 277 Vac
 - 16 Amp Electronic Ballast @ 277 Vac (N/O)
 - 10 Amp Tungsten @ 120 Vac (N/O)
 - 770 VA Pilot Duty @ 120 Vac
 - 1,110 VA Pilot Duty @ 277 Vac
 - 2 HP @ 277 Vac
 - 1 HP @ 120 Vac

- Input Current:**
 - 133 mA @ 24 Vac
 - 45 mA @ 24 Vdc
 - 51 mA @ 120 Vac

- Coil Voltage Input:**
 - 24 Vac/dc; 120 Vac; 50-60 Hz
 - Drop Out = 3 Vac / 3.8 Vdc
 - Pull In = 20 Vac / 20 Vdc

Timing Adjustment



Range Selection

Only Close 1 Switch

Switch Ranges	Close Dip Switch	Potentiometer Setting				
		A	B	C	D	E
6s-20s	1	6s	9s	13s	16s	20s
22s-1min15s	2	22s	36s	50s	1min4s	1min15s
1min30s-5min	3	1min30s	2min10s	3min20s	4min16s	5min
6min-20min	4	6min	9min	13min20s	17min20s	20min



Time Delay Application Example #1

Load 2 stays ON selected amount of time after Load 1 turns ON (N/C)
Load 2 stays OFF selected amount of time after Load 1 turns ON (N/O)

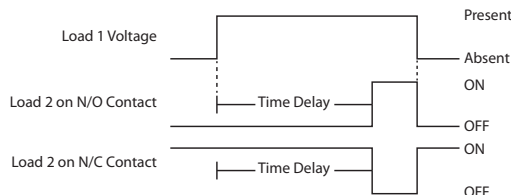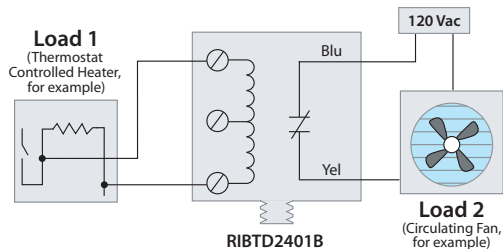

Time Delay Application Example #2 (Requires an Inverting Relay)


Load 2 stays ON selected amount of time after Load 1 turns OFF (N/C)
Load 2 stays OFF selected amount of time after Load 1 turns OFF (N/O)

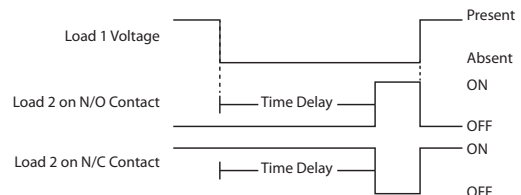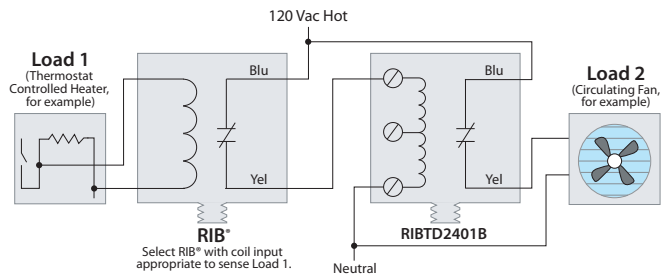

20 AMP POWER CONTROL RELAYS




RIBT242B

Enclosed Relays Hi/Low Separation 20 Amp
2 SPDT with 24 Vac/dc Coil

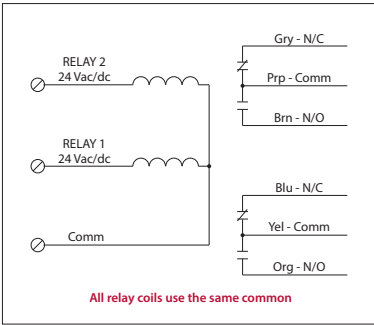

RIBT243B

Enclosed Relays Hi/Low Separation 20 Amp
2 SPST + 1 SPDT with 24 Vac/dc Coil

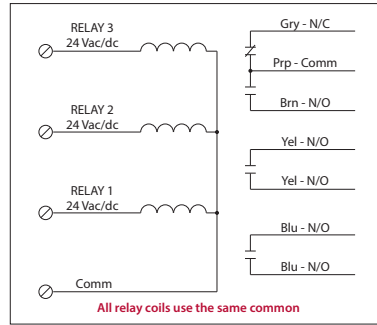

SPECIFICATIONS

Relays & Contact Type: Two (2) SPDT Continuous Duty Coil (RIBT242B)
Two (2) SPST + One (1) SPDT Continuous Duty Coil (RIBT243B)

Expected Relay Life: 10 million cycles minimum mechanical

Operating Temperature: -30 to 140° F

Humidity Range: 5 to 95% (noncondensing)

Operate Time: 18ms

Relay Status: LED On = Activated

Dimensions: 4.00" x 4.00" x 1.80" with .50" NPT Nipple

Wires: 16", 600V Rated

Approvals: UL Listed, UL916, UL864, C-UL

California State Fire Marshal, CE, RoHS

Housing Rating: UL Accepted for Use in Plenum, NEMA 1

Gold Flash: No

Override Switch: No

Contact Ratings:

20 Amp Resistive @ 277 Vac

5 Amp Resistive @ 480 Vac

20 Amp Ballast @ 277 Vac

16 Amp Electronic Ballast @ 277 Vac (N/O)

10 Amp Tungsten @ 120 Vac (N/O)

770 VA Pilot Duty @ 120 Vac

1,110 VA Pilot Duty @ 277 Vac

2 HP @ 277 Vac

1 HP @ 120 Vac

Coil Current:

50 mA @ 18 Vac

83 mA @ 24 Vac

33 mA @ 22 Vdc

35 mA @ 24 Vdc

47 mA @ 30 Vdc

Coil Voltage Input:

24 Vac/dc; 50-60 Hz

Drop Out = 2.1 Vac / 3.8 Vdc

Pull In = 18 Vac / 22 Vdc


Notes:

- RIBT243B not rated for UL864.

20 AMP POWER CONTROL RELAY

RIBT24P

Enclosed Relay Hi/Low Separation 20 Amp
DPDT with 24 Vac/dc Coil

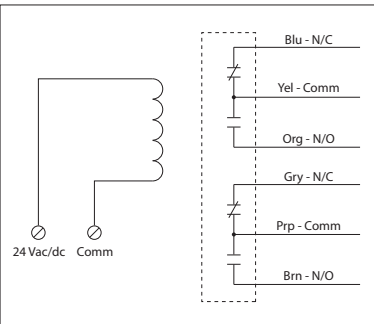

SPECIFICATIONS

Relays & Contact Type: One (1) DPDT Continuous Duty Coil

Expected Relay Life: 10 million cycles minimum mechanical

Operating Temperature: -30 to 140° F

Humidity Range: 5 to 95% (noncondensing)

Operate Time: 18ms

Relay Status: LED On = Activated

Dimensions: 4.00" x 4.00" x 1.80" with .50" NPT Nipple

Wires: 16", 600V Rated

Approvals: UL Listed, UL916, UL864, C-UL

California State Fire Marshal, CE, RoHS

Housing Rating: UL Accepted for Use in Plenum, NEMA 1

Gold Flash: Yes

Override Switch: No

Contact Ratings:

20 Amp Resistive @ 300 Vac

20 Amp Resistive @ 28 Vdc

20 Amp Ballast @ 277-480 Vac

Not rated for Electronic Ballast

15 Amp Resistive @ 600 Vac

770 VA Pilot Duty @ 120 Vac

1158 VA Pilot Duty @ 240 Vac

1109 VA Pilot Duty @ 277 Vac


1640 VA Pilot Duty @ 480 Vac

Heavy Pilot Duty @ 600 Vac

3 HP @ 480-600 Vac

2 HP @ 240-277 Vac



1 HP @ 120 Vac

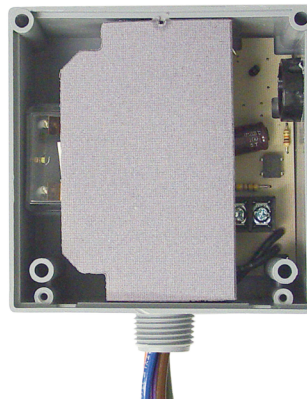

30 AMP POWER CONTROL RELAY

RIBT24Z

Enclosed Relay Hi/Low Separation 30 Amp
SPST-N/O + SPST-N/C with 24 Vac/dc Coil

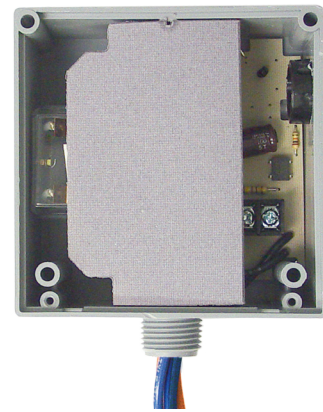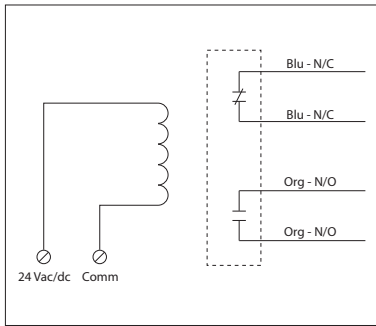

RELAYS

SPECIFICATIONS

Relays & Contact Type: One (1) SPST-N/O + One (1) SPST-N/C
Continuous Duty Coil
Expected Relay Life: 10 million cycles minimum mechanical
Operating Temperature: -30 to 140° F
Humidity Range: 5 to 95% (noncondensing)
Operate Time: 18ms
Relay Status: LED On = Activated
Dimensions: 4.00" x 4.00" x 1.80" with .50" NPT Nipple
Wires: 16", 600V Rated
Approvals: UL Listed, UL916, UL864, C-UL
California State Fire Marshal, CE, RoHS
Housing Rating: UL Accepted for Use in Plenum, NEMA 1
Gold Flash: Yes
Override Switch: No

Contact Ratings:
30 Amp Resistive @ 300 Vac
25 Amp Resistive @ 28 Vdc
20 Amp Ballast @ 277-480 Vac
Not rated for Electronic Ballast
15 Amp Resistive @ 600 Vac
770 VA Pilot Duty @ 120 Vac
1158 VA Pilot Duty @ 240 Vac
1109 VA Pilot Duty @ 277 Vac
1640 VA Pilot Duty @ 480 Vac
Heavy Pilot Duty @ 600 Vac
3 HP @ 480-600 Vac
2 HP @ 240-277 Vac
1 HP @ 120 Vac



Coil Current:
110 mA @ 20 Vac
138 mA @ 24 Vac
55 mA @ 20 Vdc
55 mA @ 24 Vdc
77 mA @ 30 Vdc

Coil Voltage Input:
24 Vac/dc ; 50-60 Hz
Drop Out = 3 Vac / 3.8 Vdc
Pull In = 20 Vac / 20 Vdc

20 AMP POWER CONTROL RELAY

RIBT243P

Enclosed Relay Hi/Low Separation 20 Amp
3PST-N/O with 24 Vac/dc Coil

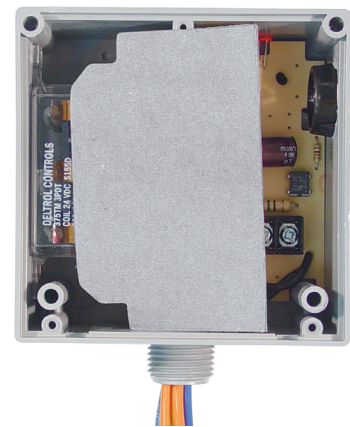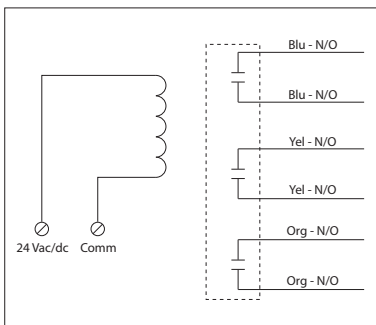

SPECIFICATIONS

Relays & Contact Type: One (1) 3PST Continuous Duty Coil
Expected Relay Life: 10 million cycles minimum mechanical
Operating Temperature: -30 to 140° F
Humidity Range: 5 to 95% (noncondensing)
Operate Time: 20ms
Relay Status: LED On = Activated
Dimensions: 4.00" x 4.00" x 1.80" with .50" NPT Nipple
Wires: 16", 600V Rated
Approvals: UL Listed, UL916, C-UL
California State Fire Marshal, CE, RoHS
Housing Rating: UL Accepted for Use in Plenum, NEMA 1
Gold Flash: No
Override Switch: No

Contact Ratings:
20 Amp Resistive @ 300 Vac, 28 Vdc
20 Amp Ballast @ 277-480 Vac
Not rated for Electronic Ballast
15 Amp Resistive @ 600 Vac
770 VA Pilot Duty @ 120 Vac, 1 Phase
1158 VA Pilot Duty @ 240 Vac, 1 Phase
1110 VA Pilot Duty @ 277 Vac, 1 Phase
1640 VA Pilot Duty @ 480 Vac, 1 Phase
1466 VA Pilot Duty @ 240 Vac, 3 Phase
2112 VA Pilot Duty @ 480 Vac, 3 Phase
Heavy Pilot Duty @ 600 Vac
7.5 HP @ 480 Vac, 3 Phase
5 HP @ 240 Vac, 3 Phase
3 HP @ 480-600 Vac, 1 Phase
2 HP @ 240-277 Vac, 1 Phase
1 HP @ 120 Vac, 1 Phase

Coil Current:
210 mA @ 24 Vac
154 mA @ 30 Vdc


Coil Voltage Input:
24 Vac/dc ; 50-60 Hz
Drop Out = 3 Vac / 3.8 Vdc
Pull In = 20 Vac / 22 Vdc

Notes:
• Order Normally Closed by adding "-NC" to end of model number

20 AMP TRACK MOUNT CONTROL RELAYS


RIBM2401B

4.00" Track Mount Relay 20 Amp SPDT with
24 Vac/dc/120 Vac Coil

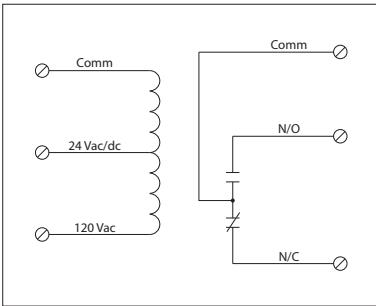

RIBM2402B

4.00" Track Mount Relay 20 Amp SPDT with
24 Vac/dc/208-277 Vac Coil

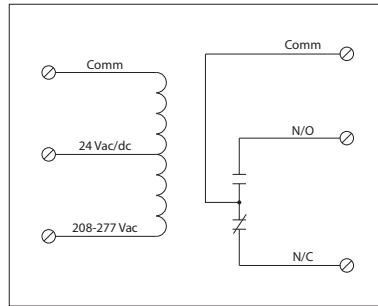

RELAYS

SPECIFICATIONS

Relays & Contact Type: One (1) SPDT Continuous Duty Coil
Expected Relay Life: 10 million cycles minimum mechanical
Operating Temperature: -30 to 140° F
Humidity Range: 5 to 95% (noncondensing)
Operate Time: 18ms
Relay Status: LED On = Activated
Dimensions: 1.250" x 4.000" x 1.750"
Track Mount: 4.000", See MT4 Series on page 152
MT4 Mounting Track Sold Separately
Approvals: UL Listed, UL916, UL864, C-UL
 California State Fire Marshal, CE, RoHS
Gold Flash: No
Override Switch: No

Contact Ratings:
 20 Amp Resistive @ 277 Vac
 20 Amp Ballast @ 277 Vac
 16 Amp Electronic Ballast @ 277 Vac (N/O)
 10 Amp Tungsten @ 120 Vac (N/O)
 1110 VA Pilot Duty @ 277 Vac
 770 VA Pilot Duty @ 120 Vac
 2 HP @ 277 Vac
 1 HP @ 120 Vac

Coil Current:
 50 mA @ 18 Vac
 83 mA @ 24 Vac
 47 mA @ 120 Vac (RIBM2401B)
 69 mA @ 208-277 Vac (RIBM2402B)


33 mA @ 22 Vdc
 35 mA @ 24 Vdc
 47 mA @ 30 Vdc

Coil Voltage Input:
 24 Vac/dc ; 120 Vac ; 50-60 Hz (RIBM2401B)
 24 Vac/dc ; 208-277 Vac ; 50-60 Hz (RIBM2402B)
 Drop Out = 2.1 Vac / 3.8 Vdc
 Pull In = 18 Vac / 22 Vdc

20 AMP TRACK MOUNT CONTROL RELAYS


RIBM2401SB

4.00" Track Mount Relay 20 Amp SPST +
Override with 24 Vac/dc/120 Vac Coil

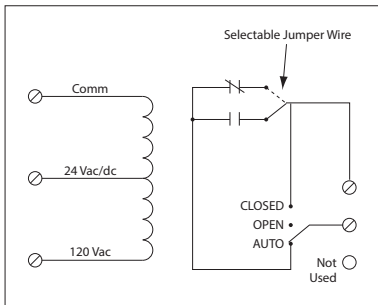

RIBM2402SB

4.00" Track Mount Relay 20 Amp SPST +
Override with 24 Vac/dc/208-277 Vac Coil

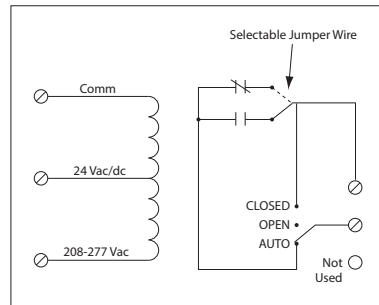

SPECIFICATIONS

Relays & Contact Type: One (1) SPST Continuous Duty Coil
Expected Relay Life: 10 million cycles minimum mechanical
Operating Temperature: -30 to 140° F
Humidity Range: 5 to 95% (noncondensing)
Operate Time: 18ms
Relay Status: LED On = Activated
Dimensions: 1.600" x 4.000" x 1.750"
Track Mount: 4.000", See MT4 Series on page 152
MT4 Mounting Track Sold Separately
Approvals: UL Listed, UL916, UL864, C-UL
 California State Fire Marshal, CE, RoHS
Gold Flash: No
Override Switch: Yes

Contact Ratings:
 20 Amp Resistive @ 277 Vac
 20 Amp Ballast @ 277 Vac (N/O)
 10 Amp Ballast @ 277 Vac (N/C)
Not rated for Electronic Ballast
 10 Amp Tungsten @ 120 Vac (N/O)
 1110 VA Pilot Duty @ 277 Vac
 770 VA Pilot Duty @ 120 Vac
 2 HP @ 277 Vac
 1 HP @ 120 Vac

Coil Voltage Input:
 24 Vac/dc ; 120 Vac ; 50-60 Hz (RIBM2401SB)
 24 Vac/dc ; 208-277 Vac ; 50-60 Hz (RIBM2402SB)
 Drop Out = 2.1 Vac / 3.8 Vdc
 Pull In = 18 Vac / 22 Vdc

Coil Current:
 50 mA @ 18 Vac
 83 mA @ 24 Vac
 47 mA @ 120 Vac (RIBM2401SB)
 69 mA @ 208-277 Vac (RIBM2402SB)


33 mA @ 22 Vdc
 35 mA @ 24 Vdc
 47 mA @ 30 Vdc

Notes:
 • Normally Open or Normally Closed selected by yellow jumper wire

20 AMP TRACK MOUNT CONTROL RELAYS




RIBM2401SBC

4.00" Track Mount Relay 20 Amp SPDT +
Override with 24 Vac/dc/120 Vac Coil

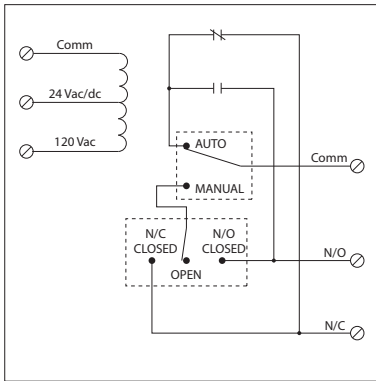

RIBM2402SBC

4.00" Track Mount Relay 20 Amp SPDT +
Override with 24 Vac/dc/208-277 Vac Coil

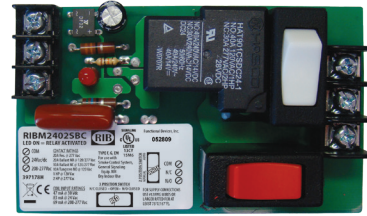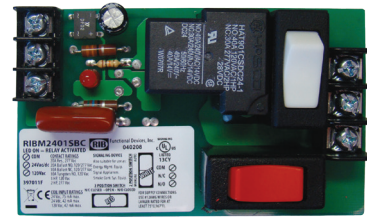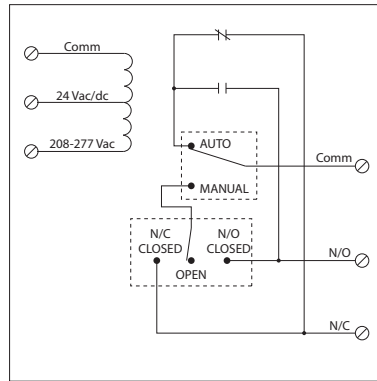

RELAYS

SPECIFICATIONS

Relays & Contact Type: One (1) SPDT Continuous Duty Coil
Expected Relay Life: 10 million cycles minimum mechanical
Operating Temperature: -30 to 140° F
Humidity Range: 5 to 95% (noncondensing)
Operate Time: 18ms
Relay Status: LED On = Activated
Dimensions: 2.350" x 4.000" x 1.750"
Track Mount: 4.000", See MT4 Series on page 152
Approvals: UL Listed, UL916, UL864, C-UL
 California State Fire Marshal, CE, RoHS
Gold Flash: No
Override Switch: Yes (2)

Contact Ratings:
 20 Amp Resistive @ 277 Vac
 20 Amp Ballast @ 277 Vac (N/O)
 10 Amp Ballast @ 277 Vac (N/C)
Not rated for Electronic Ballast
 10 Amp Tungsten @ 120 Vac (N/O)
 1110 VA Pilot Duty @ 277 Vac
 770 VA Pilot Duty @ 120 Vac
 2 HP @ 277 Vac
 1 HP @ 120 Vac


Coil Current:
 50 mA @ 18 Vac
 83 mA @ 24 Vac
 47 mA @ 120 Vac (RIBM2401SBC)
 69 mA @ 208-277 Vac (RIBM2402SBC)
 33 mA @ 22 Vdc
 35 mA @ 24 Vdc
 47 mA @ 30 Vdc

Coil Voltage Input:
 24 Vac/dc; 120 Vac; 50-60 Hz (RIBM2401SBC)
 24 Vac/dc; 208-277 Vac; 50-60 Hz (RIBM2402SBC)
 Drop Out = 2.1 Vac / 3.8 Vdc
 Pull In = 18 Vac / 22 Vdc

30 AMP TRACK MOUNT CONTROL RELAY

RIBM24ZN

4.00" Track Mount Relay 30 Amp DPDT with
24 Vac/dc Coil

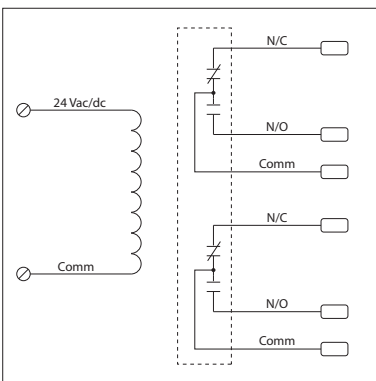

SPECIFICATIONS

Relays & Contact Type: One (1) DPDT Continuous Duty Coil
Expected Relay Life: 10 million cycles minimum mechanical
Operating Temperature: -30 to 140° F
Humidity Range: 5 to 95% (noncondensing)
Operate Time: 18ms
Relay Status: LED On = Activated
Dimensions: 1.600" x 4.000" x 1.750"
Track Mount: 4.000", See MT4 Series on page 152
Approvals: UL Component Recognized, UL916
 C-UL, CE, RoHS
Gold Flash: Yes
Override Switch: No

Contact Ratings:
 30 Amp Resistive @ 300 Vac
 25 Amp Resistive @ 28 Vdc
 15 Amp Resistive @ 600 Vac
 20 Amp Ballast @ 277-480 Vac
Not rated for Electronic Ballast
 3 HP @ 480-600 Vac
 2 HP @ 240/277 Vac
 1 HP @ 120 Vac
 NEMA B600 Pilot Duty



Coil Current:
 110 mA @ 20 Vac
 125 mA @ 24 Vac
 55 mA @ 20 Vdc
 55 mA @ 24 Vdc
 70 mA @ 30 Vdc

Coil Voltage Input:
 24 Vac/dc; 50-60 Hz
 Drop Out = 3 Vac / 3.8 Vdc
 Pull In = 20 Vac / 20 Vdc

30 AMP TRACK MOUNT CONTROL RELAY

RIBM24ZL

4.00" Track Mount Relay 30 Amp DPST-N/O with 24 Vac/dc Coil

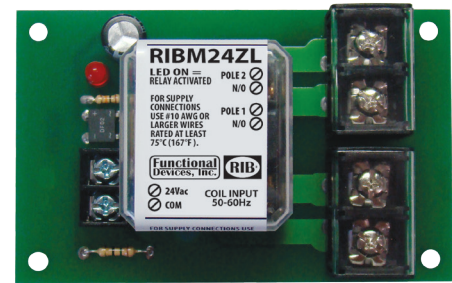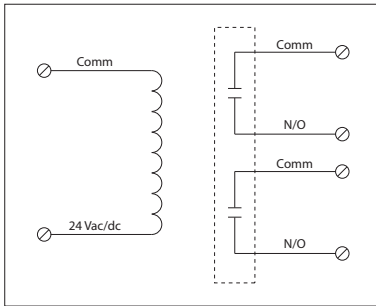

SPECIFICATIONS

Relays & Contact Type: One (1) DPST Continuous Duty Coil
Expected Relay Life: 10 million cycles minimum mechanical
Operating Temperature: -30 to 140° F
Humidity Range: 5 to 95% (noncondensing)
Operate Time: 18ms
Relay Status: LED On = Activated
Dimensions: 2.350" x 4.000" x 2.750"
Track Mount: 4.000", See MT4 Series on page 152
MT4 Mounting Track Sold Separately
Approvals: UL Listed, UL916, UL864, C-UL
 California State Fire Marshal, CE, RoHS
Gold Flash: Yes
Override Switch: No

Contact Ratings:
 30 Amp Resistive @ 300 Vac
 25 Amp Resistive @ 28 Vdc
 15 Amp Resistive @ 600 Vac
 20 Amp Ballast @ 277-480 Vac
Not rated for Electronic Ballast
 3 HP @ 480-600 Vac
 2 HP @ 240/277 Vac
 1 HP @ 120 Vac
 770 VA Pilot Duty @ 120 Vac
 1158 VA Pilot Duty @ 240 Vac
 1109 VA Pilot Duty @ 277 Vac
 1640 VA Pilot Duty @ 480 Vac
 Heavy Pilot Duty @ 600 Vac

Coil Current:
 110 mA @ 20 Vac
 138 mA @ 24 Vac
 55 mA @ 20 Vdc
 55 mA @ 24 Vdc
 77 mA @ 30 Vdc



Coil Voltage Input:
 24 Vac/dc; 50-60 Hz
 Drop Out = 2.1 Vac / 3.8 Vdc
 Pull In = 18 Vac / 22 Vdc

Notes:
 • Order Normally Closed by adding "-NC" to end of model number

30 AMP TRACK MOUNT CONTROL RELAY

RIBMN24ZL

2.75" Track Mount Relay 30 Amp DPST-N/O with 24 Vac/dc Coil

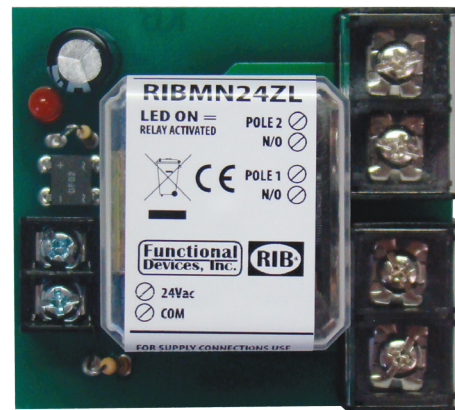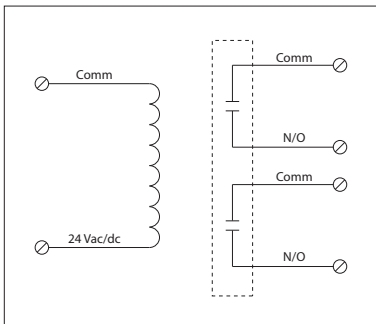

SPECIFICATIONS

Relays & Contact Type: One (1) DPST Continuous Duty Coil
Expected Relay Life: 10 million cycles minimum mechanical
Operating Temperature: -30 to 140° F
Humidity Range: 5 to 95% (noncondensing)
Operate Time: 18ms
Relay Status: LED On = Activated
Dimensions: 2.350" x 2.750" x 2.750"
Track Mount: 2.750", See MT212 Series on page 152
MT212 Mounting Track Sold Separately
Approvals: UL Listed, UL916, UL864, C-UL
 California State Fire Marshal, CE, RoHS
Gold Flash: Yes
Override Switch: No

Contact Ratings:
 30 Amp Resistive @ 300 Vac
 25 Amp Resistive @ 28 Vdc
 15 Amp Resistive @ 600 Vac
 3 HP @ 480-600 Vac
 2 HP @ 240/277 Vac
 1 HP @ 120 Vac
 20 Amp Ballast @ 277-480 Vac
Not rated for Electronic Ballast
 770 VA Pilot Duty @ 120 Vac
 1158 VA Pilot Duty @ 240 Vac
 1109 VA Pilot Duty @ 277 Vac
 1640 VA Pilot Duty @ 480 Vac
 Heavy Pilot Duty @ 600 Vac

Coil Current:
 110 mA @ 20 Vac
 138 mA @ 24 Vac
 55 mA @ 20 Vdc
 55 mA @ 24 Vdc
 77 mA @ 30 Vdc



Coil Voltage Input:
 24 Vac/dc; 50-60 Hz
 Drop Out = 2.1 Vac / 3.8 Vdc
 Pull In = 18 Vac / 22 Vdc

Notes:
 • Order Normally Closed by adding "-NC" to end of model number

30 AMP TRACK MOUNT CONTROL RELAY

RIBM243PN

4.00" Track Mount Relay 30 Amp 3PDT with 24 Vac/dc Coil

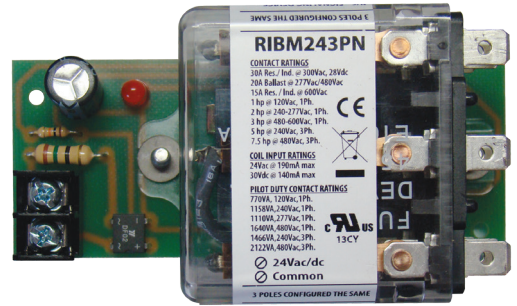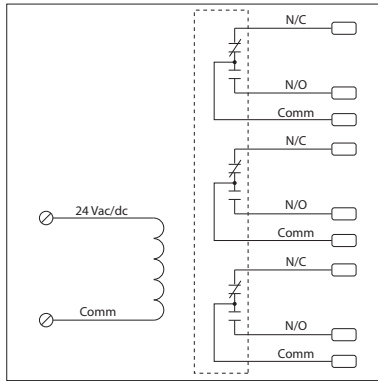

RELAYS

SPECIFICATIONS

Relays & Contact Type: One (1) 3PDT Continuous Duty Coil
Expected Relay Life: 10 million cycles minimum mechanical
Operating Temperature: -30 to 140° F
Humidity Range: 5 to 95% (noncondensing)
Operate Time: 20ms
Relay Status: LED On = Activated
Dimensions: 2.450" x 4.000" x 1.750"
Track Mount: 4.000", See MT4 Series on page 152
MT4 Mounting Track Sold Separately
Approvals: UL Component Recognized, UL916
 C-UL, California State Fire Marshal, CE, RoHS
Gold Flash: No
Override Switch: No

Contact Ratings:
 30 Amp General Use @ 300 Vac
 30 Amp Resistive @ 28 Vdc
 20 Amp Ballast @ 277-480 Vac
Not rated for Electronic Ballast
 15 Amp Resistive @ 600 Vac
 7.5 HP @ 480 Vac, 3 Phase
 5 HP @ 240 Vac, 3 Phase
 3 HP @ 480-600 Vac, 1 Phase
 2 HP @ 240-277 Vac, 1 Phase
 1 HP @ 120 Vac, 1 Phase

Heavy Pilot Duty @ 600 Vac
 770 VA @ 120 Vac, 1 Phase
 1158 VA @ 240 Vac, 1 Phase
 1110 VA @ 277 Vac, 1 Phase
 1640 VA @ 480 Vac, 1 Phase
 1466 VA @ 240 Vac, 3 Phase
 2122 VA @ 480 Vac, 3 Phase



Coil Current:
 190 mA @ 24 Vac
 140 mA @ 30 Vdc

Coil Voltage Input:
 24 Vac/dc; 50-60 Hz
 Drop Out = 3 Vac / 3.8 Vdc
 Pull In = 20 Vac / 22 Vdc

30 AMP TRACK MOUNT CONTROL RELAY

RIBM013PN

4.00" Track Mount Relay 30 Amp 3PDT with 120 Vac Coil

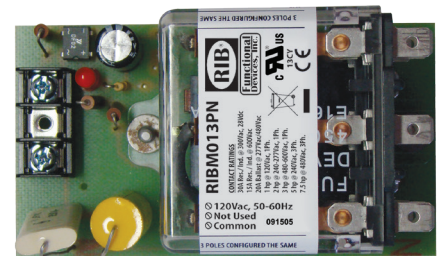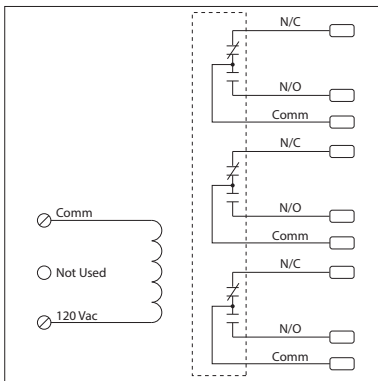

SPECIFICATIONS

Relays & Contact Type: One (1) 3PDT Continuous Duty Coil
Expected Relay Life: 10 million cycles minimum mechanical
Operating Temperature: -30 to 140° F
Humidity Range: 5 to 95% (noncondensing)
Operate Time: 20ms
Relay Status: LED On = Activated
Dimensions: 2.450" x 4.000" x 1.750"
Track Mount: 4.000", See MT4 Series on page 152
MT4 Mounting Track Sold Separately
Approvals: UL Component Recognized, UL916, UL864
 C-UL, California State Fire Marshal, CE, RoHS
Gold Flash: No
Override Switch: No

Contact Ratings:
 30 Amp General Use @ 300 Vac
 30 Amp Resistive @ 28 Vdc
 20 Amp Ballast @ 277-480 Vac
Not rated for Electronic Ballast
 15 Amp Resistive @ 600 Vac
 7.5 HP @ 480 Vac, 3 Phase
 5 HP @ 240 Vac, 3 Phase
 3 HP @ 480-600 Vac, 1 Phase
 2 HP @ 240-277 Vac, 1 Phase
 1 HP @ 120 Vac, 1 Phase

Heavy Pilot Duty @ 600 Vac
 770 VA @ 120 Vac, 1 Phase
 1158 VA @ 240 Vac, 1 Phase
 1110 VA @ 277 Vac, 1 Phase
 1640 VA @ 480 Vac, 1 Phase
 1466 VA @ 240 Vac, 3 Phase
 2122 VA @ 480 Vac, 3 Phase



Coil Current:
 140 mA @ 120 Vac

Coil Voltage Input:
 120 Vac; 50-60 Hz
 Drop Out = 35 Vac
 Pull In = 85 Vac

30 AMP TRACK MOUNT CONTROL RELAY

RIBM023PN

4.00" Track Mount Relay 30 Amp 3PDT with 208-277 Vac Coil

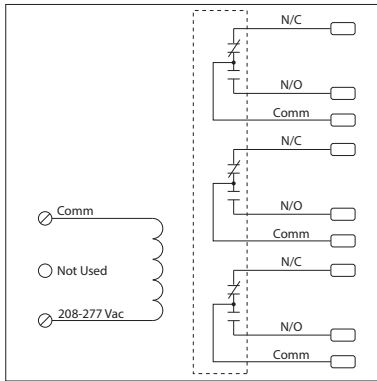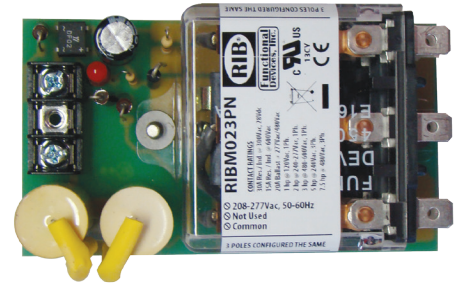

SPECIFICATIONS

Relays & Contact Type: One (1) 3PDT Continuous Duty Coil
Expected Relay Life: 10 million cycles minimum mechanical
Operating Temperature: -30 to 140° F
Humidity Range: 5 to 95% (noncondensing)
Operate Time: 20ms
Relay Status: LED On = Activated
Dimensions: 2.450" x 4.000" x 1.750"
Track Mount: 4.000", See MT4 Series on page 152
MT4 Mounting Track Sold Separately
Approvals: UL Component Recognized, UL916, UL864
 C-UL, California State Fire Marshal, CE, RoHS
Gold Flash: No
Override Switch: No

Contact Ratings:
 30 Amp General Use @ 300 Vac
 30 Amp Resistive @ 28 Vdc
 20 Amp Ballast @ 277-480 Vac
Not rated for Electronic Ballast
 15 Amp Resistive @ 600 Vac
 7.5 HP @ 480 Vac, 3 Phase
 5 HP @ 240 Vac, 3 Phase
 3 HP @ 480-600 Vac, 1 Phase
 2 HP @ 240-277 Vac, 1 Phase
 1 HP @ 120 Vac, 1 Phase

Heavy Pilot Duty @ 600 Vac
 770 VA @ 120 Vac, 1 Phase
 1158 VA @ 240 Vac, 1 Phase
 1110 VA @ 277 Vac, 1 Phase
 1640 VA @ 480 Vac, 1 Phase
 1466 VA @ 240 Vac, 3 Phase
 2122 VA @ 480 Vac, 3 Phase



Coil Current:
 170 mA @ 208-277 Vac

Coil Voltage Input:
 208-277 Vac ; 50-60 Hz
 Drop Out = 60 Vac
 Pull In = 160 Vac

30 AMP TRACK MOUNT CONTROL RELAY

RIBM043PN

4.00" Track Mount Relay 30 Amp 3PDT with 480 Vac Coil

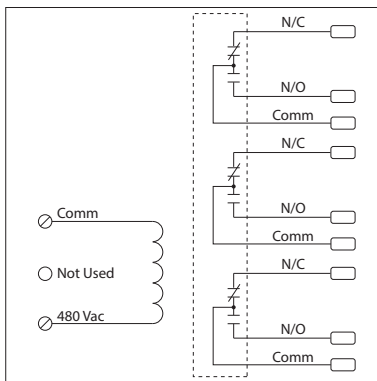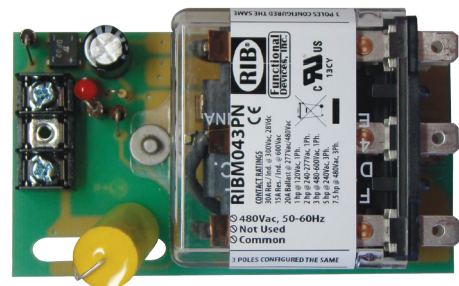

SPECIFICATIONS

Relays & Contact Type: One (1) 3PDT Continuous Duty Coil
Expected Relay Life: 10 million cycles minimum mechanical
Operating Temperature: -30 to 140° F
Humidity Range: 5 to 95% (noncondensing)
Operate Time: 20ms
Relay Status: LED On = Activated
Dimensions: 2.450" x 4.000" x 1.750"
Track Mount: 4.000", See MT4 Series on page 152
MT4 Mounting Track Sold Separately
Approvals: UL Component Recognized, UL916, UL864
 C-UL, California State Fire Marshal, CE, RoHS
Gold Flash: No
Override Switch: No

Contact Ratings:
 30 Amp General Use @ 300 Vac
 30 Amp Resistive @ 28 Vdc
 20 Amp Ballast @ 277-480 Vac
Not rated for Electronic Ballast
 15 Amp Resistive @ 600 Vac
 7.5 HP @ 480 Vac, 3 Phase
 5 HP @ 240 Vac, 3 Phase
 3 HP @ 480-600 Vac, 1 Phase
 2 HP @ 240-277 Vac, 1 Phase
 1 HP @ 120 Vac, 1 Phase

Heavy Pilot Duty @ 600 Vac
 770 VA @ 120 Vac, 1 Phase
 1158 VA @ 240 Vac, 1 Phase
 1110 VA @ 277 Vac, 1 Phase
 1640 VA @ 480 Vac, 1 Phase
 1466 VA @ 240 Vac, 3 Phase
 2122 VA @ 480 Vac, 3 Phase

Coil Current:
 140 mA @ 480 Vac



Coil Voltage Input:
 480 Vac/dc ; 50-60 Hz
 Drop Out = 140 Vac
 Pull In = 340 Vac

Notes:
 • See model RIBM043PN-HD for use in more transient prone environments

30 AMP TRACK MOUNT CONTROL RELAY

RIBM043PN-HD

4.00" Track Mount Relay 30 Amp 3PDT with 480 Vac Coil (-HD for More Transient Prone Environments)

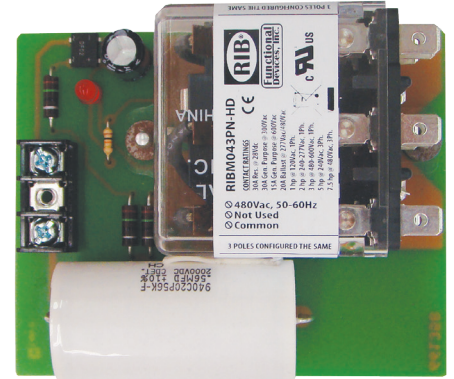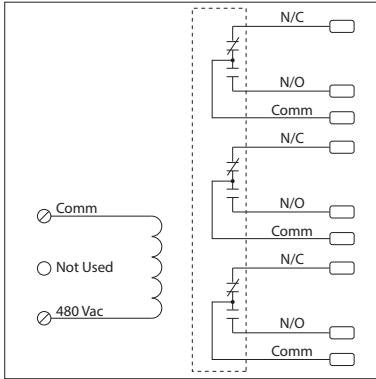

RELAYS

SPECIFICATIONS

- # Relays & Contact Type: One (1) 3PDT Continuous Duty Coil
- Expected Relay Life: 10 million cycles minimum mechanical
- Operating Temperature: -30 to 140° F
- Humidity Range: 5 to 95% (noncondensing)
- Operate Time: 20ms
- Relay Status: LED On = Activated
- Dimensions: 3.250" x 4.000" x 1.750"
- Track Mount: 4.000", See MT4 Series on page 152
- Approvals: UL Component Recognized, UL916, UL864
C-UL, California State Fire Marshal, CE, RoHS
- Gold Flash: No
- Override Switch: No

- Contact Ratings:**
- 30 Amp General Use @ 300 Vac
 - 30 Amp Resistive @ 28 Vdc
 - 20 Amp Ballast @ 277-480 Vac
 - Not rated for Electronic Ballast*
 - 15 Amp Resistive @ 600 Vac
 - 7.5 HP @ 480 Vac, 3 Phase
 - 5 HP @ 240 Vac, 3 Phase
 - 3 HP @ 480-600 Vac, 1 Phase
 - 2 HP @ 240-277 Vac, 1 Phase
 - 1 HP @ 120 Vac, 1 Phase

- Heavy Pilot Duty @ 600 Vac
- 770 VA @ 120 Vac, 1 Phase
- 1158 VA @ 240 Vac, 1 Phase
- 1110 VA @ 277 Vac, 1 Phase
- 1640 VA @ 480 Vac, 1 Phase
- 1466 VA @ 240 Vac, 3 Phase
- 2122 VA @ 480 Vac, 3 Phase

- Coil Current:**
- 140 mA @ 480 Vac
- Coil Voltage Input:**
- 480 Vac/dc ; 50-60 Hz
 - Drop Out = 140 Vac
 - Pull In = 340 Vac

LATCHING RELAYS

Enclosed




Made in the U.S.A.
Meets the "Buy American" provisions of Section 1605 of the American Recovery and Reinvestment Act of 2009 (ARRA).

Features

- Prepackaged for convenience
- Electromechanical relay
- Mechanically latching
- Status output contact
- Electronic ballast rating
- 20 Amp rating

RELAYS

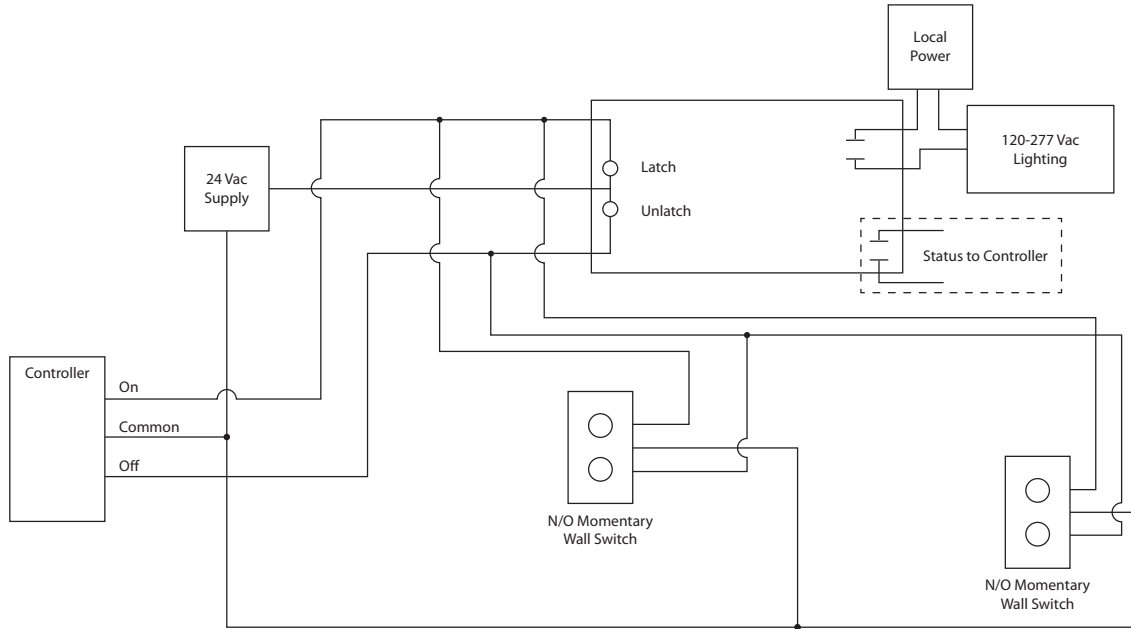

ENCLOSED LATCHING RELAYS


MODEL #	UL	COIL VOLTAGE		RELAYS	CONTACTS	OVERRIDE SWITCH	AUXILIARY OUTPUT	NOTES	SPEC PAGE
		AC/DC							
RIBL12B	•	12		1	SPST				45
RIBL12BM	•	12		1	SPST		•		45
RIBL12SB	•	12		1	SPST	•			45
RIBL12SBM	•	12		1	SPST	•	•		45
RIBL24B	•	24		1	SPST				46
RIBL24BM	•	24		1	SPST		•		46
RIBL24SB	•	24		1	SPST	•			46
RIBL24SBM	•	24		1	SPST	•	•		46

UL = UL Listed : UL60947 Low-Voltage Switchgear and Controlgear

LATCHING RELAYS


RIBL12B

Enclosed Mechanically Latching Relay 20 Amp SPST with 12 Vac/dc Coil

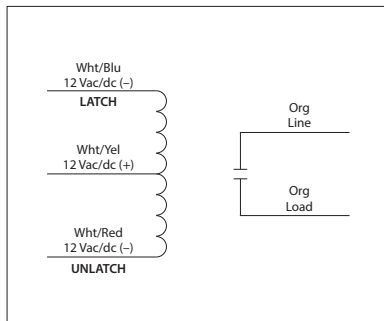

RIBL12BM

Enclosed Mechanically Latching Relay 20 Amp SPST with 12 Vac/dc Coil, Status LED and Auxiliary Output

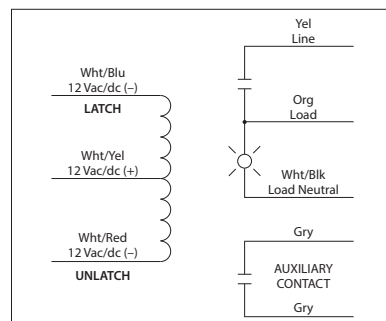

RIBL12B-RD
• Red housing



RIBL12B-N4
• NEMA 4X housing (Not available on switched models)

RELAYS

SPECIFICATIONS

Relays & Contact Type: One (1) SPST Latching Relay, Dual Coil
Expected Relay Life: 1 million cycles minimum mechanical
Operating Temperature: -30 to 140° F
Humidity Range: 5 to 95% (noncondensing)
Operate Time: 50ms
Maximum Pulse Length: 30 seconds
Relay Status / Auxiliary
Contact Closed: LED On = Voltage Detected on Load Wire (RIBL12BM)
Dimensions: 1.70" x 2.80" x 1.50" with .50" NPT Nipple (RIBL12B)
 2.30" x 3.20" x 1.80" with .50" NPT Nipple (RIBL12BM)
Wires: 16", 600V Rated
Approvals: UL Listed, UL60947, C-UL, CE, RoHS
Housing Rating: UL Accepted for Use in Plenum, NEMA 1
Gold Flash: No

Contact Ratings:
 20 Amp Resistive @ 120-277 Vac
 20 Amp Ballast @ 120-277 Vac
 16 Amp Electronic Ballast @ 120-277 Vac
 5540 Watt Tungsten @ 277 Vac
 720 VA Pilot Duty @ 120-277 Vac
 2 HP @ 277 Vac
 3 HP @ 240 Vac
 1.5 HP @ 120 Vac

Coil Current:
 182 mA @ 10 Vac
 250 mA @ 12 Vac
 165 mA @ 10 Vdc
 198 mA @ 12 Vdc
 250 mA @ 15 Vdc

Latch / Unlatch:
 Min. 10 Vdc / 11 Vac

Auxiliary Contact:
 3 Amp @ 30 Vac/dc max.


Notes:

- Application of voltage on latch coil (Wht/Blu & Wht/Yel) will close the contact.
- Application of voltage on unlatch coil (Wht/Red & Wht/Yel) will open the contact.
- Auxiliary contact and status LED activate when 120-277 Vac is applied between Load (Org) wire and Load Neutral (Wht/Blk) wire. (RIBL12BM)

LATCHING RELAYS



RIBL12SB

Enclosed Mechanically Latching Relay 20 Amp SPST + Override with 12 Vac/dc Coil

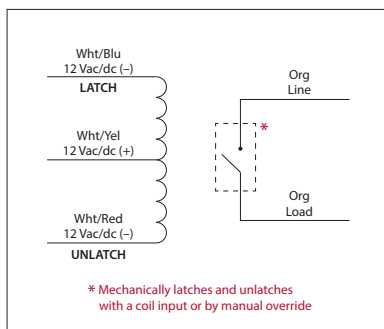

RIBL12SBM

Enclosed Mechanically Latching Relay 20 Amp SPST + Override with 12 Vac/dc Coil, Status LED and Auxiliary Output

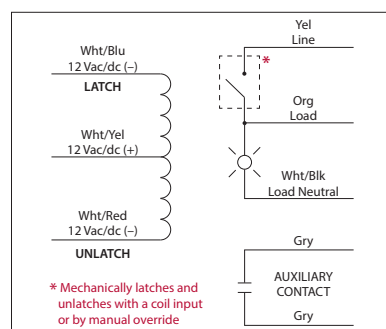

SPECIFICATIONS

Relays & Contact Type: One (1) SPST Latching Relay, Dual Coil
Expected Relay Life: 1 million cycles minimum mechanical
Operating Temperature: -30 to 140° F
Humidity Range: 5 to 95% (noncondensing)
Operate Time: 50ms
Maximum Pulse Length: 30 seconds
Relay Status / Auxiliary
Contact Closed: LED On = Voltage Detected on Load Wire (RIBL12SBM)
Dimensions: 1.70" x 2.80" x 1.50" with .50" NPT Nipple (RIBL12SB)
 2.30" x 3.20" x 1.80" with .50" NPT Nipple (RIBL12SBM)
Wires: 16", 600V Rated
Approvals: UL Listed, UL60947, C-UL, CE, RoHS
Housing Rating: UL Accepted for Use in Plenum, NEMA 1
Gold Flash: No
Override Switch: Yes

Contact Ratings:
 20 Amp Resistive @ 120-277 Vac
 20 Amp Ballast @ 120-277 Vac
 16 Amp Electronic Ballast @ 120-277 Vac
 5540 Watt Tungsten @ 277 Vac
 720 VA Pilot Duty @ 120-277 Vac
 2 HP @ 277 Vac
 3 HP @ 240 Vac
 1.5 HP @ 120 Vac

Coil Current:
 182 mA @ 10 Vac
 250 mA @ 12 Vac
 165 mA @ 10 Vdc
 198 mA @ 12 Vdc
 250 mA @ 15 Vdc

Latch / Unlatch:
 Min. 10 Vdc / 11 Vac

Auxiliary Contact:
 3 Amp @ 30 Vac/dc max.


Notes:

- Application of voltage on latch coil (Wht/Blu & Wht/Yel) will close the contact.
- Application of voltage on unlatch coil (Wht/Red & Wht/Yel) will open the contact.
- Auxiliary contact and status LED activate when 120-277 Vac is applied between Load (Org) wire and Load Neutral (Wht/Blk) wire. (RIBL12SBM)

LATCHING RELAYS


RIBL24B

Enclosed Mechanically Latching Relay 20 Amp
SPST with 24 Vac/dc Coil

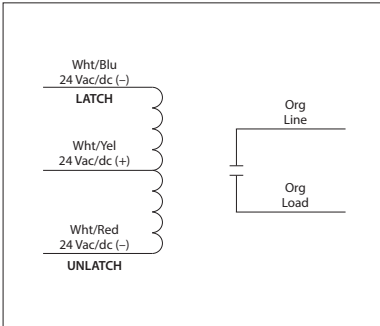

RIBL24BM

Enclosed Mechanically Latching Relay 20 Amp
SPST with 24 Vac/dc Coil, **Status LED and
Auxiliary Output**

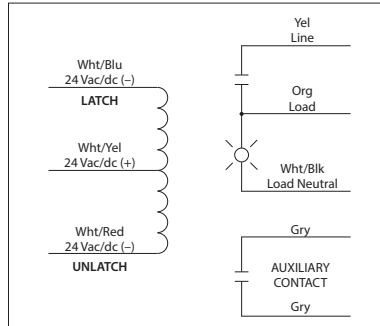

RIBL24B-RD
• Red housing



RIBL24BM-N4
• NEMA 4X housing
(Not available on switched models)

SPECIFICATIONS

Relays & Contact Type: One (1) SPST Latching Relay Dual Coil
Expected Relay Life: 1 million cycles minimum mechanical
Operating Temperature: -30 to 140° F
Humidity Range: 5 to 95% (noncondensing)
Operate Time: 50ms
Maximum Pulse Length: 30 seconds
Relay Status / Auxiliary
Contact Closed: LED On = Voltage Detected on Load Wire (RIBL24BM)
Dimensions: 1.70" x 2.80" x 1.50" with .50" NPT Nipple (RIBL24B)
 2.30" x 3.20" x 1.80" with .50" NPT Nipple (RIBL24BM)
Wires: 16", 600V Rated
Approvals: UL Listed, UL60947, C-UL, CE, RoHS
Housing Rating: UL Accepted for Use in Plenum, NEMA 1
Gold Flash: No

Contact Ratings:
 20 Amp Resistive @ 120-277 Vac
 20 Amp Ballast @ 120-277 Vac
 16 Amp Electronic Ballast @ 120-277 Vac
 5540 Watt Tungsten @ 277 Vac
 720 VA Pilot Duty @ 120-277 Vac
 2 HP @ 277 Vac
 3 HP @ 240 Vac
 1.5 HP @ 120 Vac

Coil Current:
 175 mA @ 20 Vac
 210 mA @ 24 Vac
 92 mA @ 20 Vdc
 110 mA @ 24 Vdc
 138 mA @ 30 Vdc

Latch / Unlatch:
 Min. 20 Vdc / 22 Vac

Auxiliary Contact:
 3 Amp @ 30 Vac/dc max.


Notes:

- Application of voltage on latch coil (Wht/Blu & Wht/Yel) will close the contact.
- Application of voltage on unlatch coil (Wht/Red & Wht/Yel) will open the contact.
- Auxiliary contact and status LED activate when 120-277 Vac is applied between Load (Org) wire and Load Neutral (Wht/Blk) wire. (RIBL24BM)

LATCHING RELAYS




RIBL24SB

Enclosed Mechanically Latching Relay 20 Amp
SPST + Override with 24 Vac/dc Coil

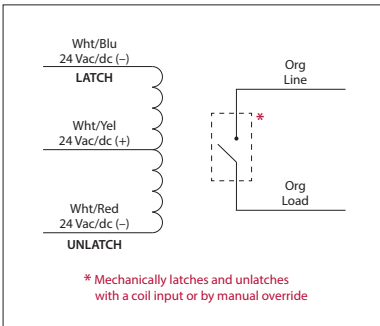

RIBL24SBM

Enclosed Mechanically Latching Relay 20 Amp
SPST + Override with 24 Vac/dc Coil,
Status LED and Auxiliary Output

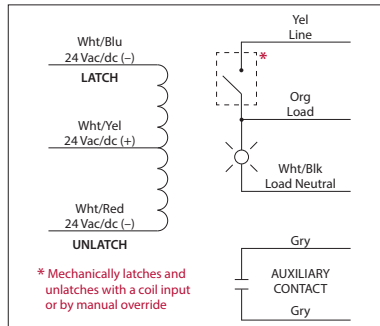

SPECIFICATIONS

Relays & Contact Type: One (1) SPST Latching Relay Dual Coil
Expected Relay Life: 1 million cycles minimum mechanical
Operating Temperature: -30 to 140° F
Humidity Range: 5 to 95% (noncondensing)
Operate Time: 50ms
Maximum Pulse Length: 30 seconds
Relay Status / Auxiliary
Contact Closed: LED On = Voltage Detected on Load Wire (RIBL24SBM)
Dimensions: 1.70" x 2.80" x 1.50" with .50" NPT Nipple (RIBL24SB)
 2.30" x 3.20" x 1.80" with .50" NPT Nipple (RIBL24SBM)
Wires: 16", 600V Rated
Approvals: UL Listed, UL60947, C-UL, CE, RoHS
Housing Rating: UL Accepted for Use in Plenum, NEMA 1
Gold Flash: No
Override Switch: Yes

Contact Ratings:
 20 Amp Resistive @ 120-277 Vac
 20 Amp Ballast @ 120-277 Vac
 16 Amp Electronic Ballast @ 120-277 Vac
 5540 Watt Tungsten @ 277 Vac
 720 VA Pilot Duty @ 120-277 Vac
 2 HP @ 277 Vac
 3 HP @ 240 Vac
 1.5 HP @ 120 Vac

Coil Current:
 175 mA @ 20 Vac
 210 mA @ 24 Vac
 92 mA @ 20 Vdc
 110 mA @ 24 Vdc
 138 mA @ 30 Vdc

Latch / Unlatch:
 Min. 20 Vdc / 22 Vac

Auxiliary Contact:
 3 Amp @ 30 Vac/dc max.

Notes:

- Application of voltage on latch coil (Wht/Blu & Wht/Yel) will close the contact.
- Application of voltage on unlatch coil (Wht/Red & Wht/Yel) will open the contact.
- Auxiliary contact and status LED activate when 120-277 Vac is applied between Load (Org) wire and Load Neutral (Wht/Blk) wire. (RIBL24SBM)

LOW-INPUT / OPTOISOLATED RELAYS


Enclosed | Track Mount



Made in the U.S.A.
Meets the "Buy American" provisions of Section 1605 of the American Recovery and Reinvestment Act of 2009 (ARRA).

Prepackaged Like the Original RIB® with Special Features

- Extremely low current draw on the input
- Control input can connect to AO for relay control
- Protect controller from feedback or voltage transients

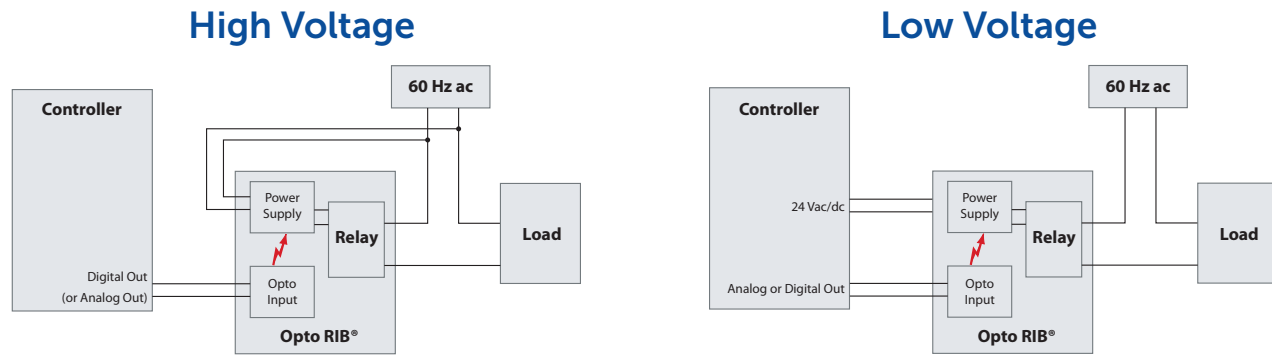

- Optoisolated relays help isolate noisy loads from the controller. Good for controlling power relays from analog outputs.

ENCLOSED LOW-INPUT / OPTOISOLATED RELAYS

MODEL #	UL	CONTROL INPUT	POWER INPUT	RELAYS	CONTACTS	OVERRIDE SWITCH	NOTES	SPEC PAGE
RIBTELC	•	5-25 Vac/dc	10-30 Vac/dc	1	SPDT			48
RIBTELS	•	5-25 Vac/dc	10-30 Vac/dc	1	SPST	1		48
RIBTE24B	•	5-25 Vac/dc	24 Vac/dc	1	SPDT			48
RIBTE01B	•	5-25 Vac/dc	120 Vac	1	SPDT			49
RIBTE02B	•	5-25 Vac/dc	208-277 Vac	1	SPDT			49
RIBTE24SB	•	5-25 Vac/dc	24 Vac/dc	1	SPST	1		50
RIBTE01SB	•	5-25 Vac/dc	120 Vac	1	SPST	1		50
RIBTE02SB	•	5-25 Vac/dc	208-277 Vac	1	SPST	1		51
RIBTE24P	•	5-25 Vac/dc	24 Vac/dc	1	DPDT			51
RIBTE01P	•	5-25 Vac/dc	120 Vac	1	DPDT			52
RIBTE02P	•	5-25 Vac/dc	208-277 Vac	1	DPDT			52
RIBTE01P-S	•	5-25 Vac/dc	120 Vac	1	DPDT	1		53
RIBTE02P-S	•	5-25 Vac/dc	208-277 Vac	1	DPDT	1		53

TRACK MOUNT LOW-INPUT / OPTOISOLATED RELAYS


MODEL #	UL	CONTROL INPUT	POWER INPUT	RELAYS	CONTACTS	OVERRIDE SWITCH	NOTES	SPEC PAGE
RIBME2401B	•	5-25 Vac/dc	24 Vac/dc/120 Vac	1	SPDT			53
RIBME2402B	•	5-25 Vac/dc	24 Vac/dc/208-277 Vac	1	SPDT			53
RIBME2401SB	•	5-25 Vac/dc	24 Vac/dc/120 Vac	1	SPST	1		54
RIBME2402SB	•	5-25 Vac/dc	24 Vac/dc/208-277 Vac	1	SPST	1		54
RIBME2401P	•	5-25 Vac/dc	24 Vac/dc/120 Vac	1	DPST			54
RIBME2402P	•	5-25 Vac/dc	24 Vac/dc/208-277 Vac	1	DPST			54

UL = UL Listed : UL916 Energy Management, UL864 Fire ; USA & Canada

LOW COIL INPUT RELAYS




RIBTELC

Enclosed Relay Hi/Low Separation 10 Amp
SPDT, 10-30 Vac/dc Power Input + 5-25 Vac/dc
Control Input

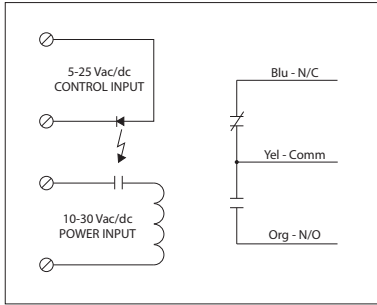

RIBTELS

Enclosed Relay Hi/Low Separation 10 Amp
SPST + **Override**, 10-30 Vac/dc Power Input
+ 5-25 Vac/dc Control Input

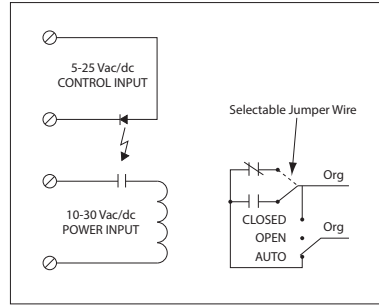

RELAYS

SPECIFICATIONS

Power Input: 10-30 Vac/dc, 50-60 Hz
Control Input: 5-25 Vac/dc, 50-60 Hz
Relays & Contact Type: One (1) SPDT Continuous Duty Coil
Expected Relay Life: 10 million cycles minimum mechanical
Operating Temperature: -30 to 140° F
Humidity Range: 5 to 95% (noncondensing)
Operate Time: 20ms
Relay Status: LED On = Activated
Dimensions: 4.00" x 4.00" x 1.80" with .50" NPT Nipple
Wires: 16", 600V Rated
Approvals: UL Listed, UL916, UL864, C-UL
 California State Fire Marshal, CE, RoHS
Housing Rating: UL Accepted for Use in Plenum, NEMA 1
Gold Flash: Yes (RIBTELC), No (RIBTELS)
Override Switch: No (RIBTELC), Yes (RIBTELS)

Contact Ratings:
 10 Amp Resistive @ 120-277 Vac
 10 Amp Resistive @ 28 Vdc
 480 VA Pilot Duty @ 240-277 Vac
 480 VA Ballast @ 277 Vac
Not rated for Electronic Ballast
 600 Watt Tungsten @ 120 Vac (N/O)
 240 Watt Tungsten @ 120 Vac (N/C)
 1/3 HP @ 120-240 Vac (N/O)
 1/6 HP @ 120-240 Vac (N/C)
 1/4 HP @ 277 Vac (N/O)
 1/8 HP @ 277 Vac (N/C)

Power Input Ratings:
 33 mA @ 10 Vac
 35 mA @ 12 Vac
 46 mA @ 24 Vac
 55 mA @ 30 Vac
 13 mA @ 10 Vdc
 15 mA @ 12 Vdc
 18 mA @ 24 Vdc
 20 mA @ 30 Vdc


Control Input Ratings:
 .4 mA @ 5 Vdc
 .9 mA @ 10 Vdc
 1 mA @ 12 Vdc
 2 mA @ 24 Vdc
 3 mA @ 24 Vdc
 (Non Polarized)

Notes:
 • Normally Open or Normally Closed selected by yellow jumper wire (RIBTELS)

LOW COIL INPUT RELAY

RIBTE24B

Enclosed Relay Hi/Low Separation 20 Amp SPDT,
24 Vac/dc Power Input + 5-25 Vac/dc Control Input

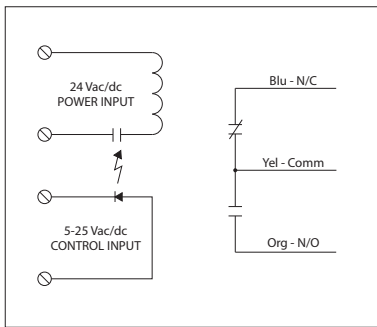

SPECIFICATIONS

Power Input: 24 Vac/dc, 50-60 Hz
Control Input: 5-25 Vac/dc, 50-60 Hz
Relays & Contact Type: One (1) SPDT Continuous Duty Coil
Expected Relay Life: 10 million cycles minimum mechanical
Operating Temperature: -30 to 140° F
Humidity Range: 5 to 95% (noncondensing)
Operate Time: 18ms
Relay Status: LED On = Activated
Dimensions: 4.00" x 4.00" x 1.80" with .50" NPT Nipple
Wires: 16", 600V Rated
Approvals: UL Listed, UL916, UL864, C-UL
 California State Fire Marshal, CE, RoHS
Housing Rating: UL Accepted for Use in Plenum, NEMA 1
Gold Flash: No
Override Switch: No

Contact Ratings:
 20 Amp Resistive @ 277 Vac
 5 Amp Resistive @ 480 Vac
 1110 VA Pilot Duty @ 277 Vac
 770 VA Pilot Duty @ 120 Vac
 20 Amp Ballast @ 277 Vac
 16 Amp Electronic Ballast @ 277 Vac (N/O)
 10 Amp Tungsten @ 120 Vac (N/O)
 240 Watt Tungsten @ 120 Vac (N/C)
 2 HP @ 277 Vac
 1 HP @ 120 Vac



Power Input Ratings:
 50 mA @ 18 Vac
 83 mA @ 24 Vac
 33 mA @ 22 Vdc
 35 mA @ 24 Vdc
 47 mA @ 30 Vdc

Control Input Ratings:
 .4 mA @ 5 Vdc
 .9 mA @ 10 Vdc
 1 mA @ 12 Vdc
 2 mA @ 24 Vdc
 3 mA @ 24 Vdc
 (Non Polarized)

LOW COIL INPUT RELAY

RIBTE01B

Enclosed Relay Hi/Low Separation 20 Amp SPDT, 120 Vac Power Input + 5-25 Vac/dc Control Input

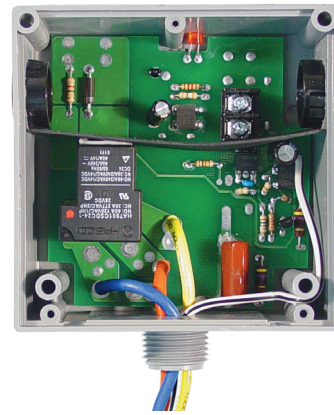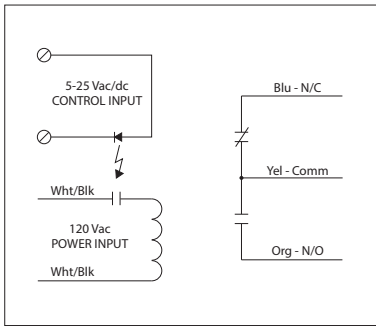

Made in USA
Meets
"Buy American"
of ARRA 2009

RELAYS

SPECIFICATIONS

Power Input: 120 Vac, 50-60 Hz

Control Input: 5-25 Vac/dc, 50-60 Hz

Relays & Contact Type: One (1) SPDT Continuous Duty Coil

Expected Relay Life: 10 million cycles minimum mechanical

Operating Temperature: -30 to 140° F

Humidity Range: 5 to 95% (noncondensing)

Operate Time: 18ms

Relay Status: LED On = Activated

Dimensions: 4.00" x 4.00" x 1.80" with .50" NPT Nipple

Wires: 16", 600V Rated

Approvals: UL Listed, UL916, UL864, C-UL

California State Fire Marshal, CE, RoHS

Housing Rating: UL Accepted for Use in Plenum, NEMA 1

Gold Flash: No

Override Switch: No

Contact Ratings:

20 Amp Resistive @ 277 Vac

5 Amp Resistive @ 480 Vac

1110 VA Pilot Duty @ 277 Vac

770 VA Pilot Duty @ 120 Vac

20 Amp Ballast @ 277 Vac

16 Amp Electronic Ballast @ 277 Vac (N/O)

10 Amp Tungsten @ 120 Vac (N/O)

240 Watt Tungsten @ 120 Vac (N/C)

2 HP @ 277 Vac

1 HP @ 120 Vac

Power Input Ratings:

47 mA @ 120 Vac

Control Input Ratings:

.4 mA @ 5 Vdc

.9 mA @ 10 Vdc

1 mA @ 12 Vdc

2 mA @ 24 Vdc



3 mA @ 24 Vac

(Non Polarized)

LOW COIL INPUT RELAY

RIBTE02B

Enclosed Relay Hi/Low Separation 20 Amp SPDT, 208-277 Vac Power Input + 5-25 Vac/dc Control Input

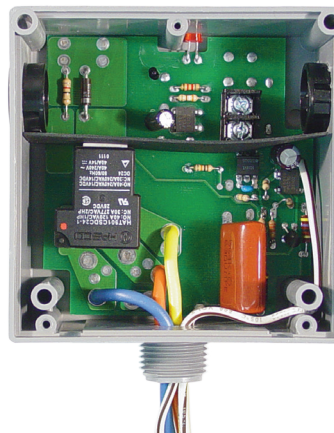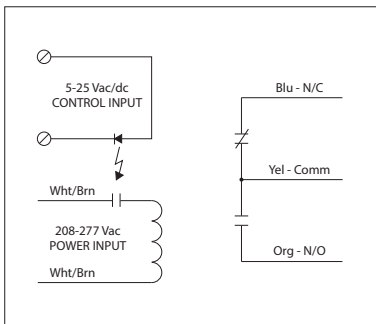

Made in USA
Meets
"Buy American"
of ARRA 2009

SPECIFICATIONS

Power Input: 208-277 Vac, 50-60 Hz

Control Input: 5-25 Vac/dc, 50-60 Hz

Relays & Contact Type: One (1) SPDT Continuous Duty Coil

Expected Relay Life: 10 million cycles minimum mechanical

Operating Temperature: -30 to 140° F

Humidity Range: 5 to 95% (noncondensing)

Operate Time: 18ms

Relay Status: LED On = Activated

Dimensions: 4.00" x 4.00" x 1.80" with .50" NPT Nipple

Wires: 16", 600V Rated

Approvals: UL Listed, UL916, UL864, C-UL

California State Fire Marshal, CE, RoHS

Housing Rating: UL Accepted for Use in Plenum, NEMA 1

Gold Flash: No

Override Switch: No

Contact Ratings:

20 Amp Resistive @ 277 Vac

5 Amp Resistive @ 480 Vac

1110 VA Pilot Duty @ 277 Vac

770 VA Pilot Duty @ 120 Vac

20 Amp Ballast @ 277 Vac

16 Amp Electronic Ballast @ 277 Vac (N/O)

10 Amp Tungsten @ 120 Vac (N/O)

240 Watt Tungsten @ 120 Vac (N/C)

2 HP @ 277 Vac

1 HP @ 120 Vac

Power Input Ratings:

69 mA @ 208-277 Vac

Control Input Ratings:

.4 mA @ 5 Vdc

.9 mA @ 10 Vdc

1 mA @ 12 Vdc

2 mA @ 24 Vdc



3 mA @ 24 Vac

(Non Polarized)

LOW COIL INPUT RELAY

RIBTE24SB

Enclosed Relay Hi/Low Separation 20 Amp SPST
+ Override, 24 Vac/dc Power Input + 5-25 Vac/dc
Control Input

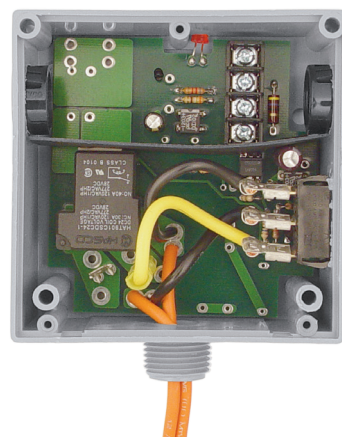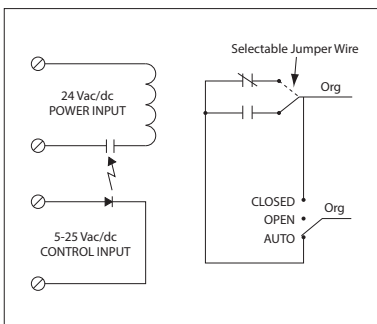

SPECIFICATIONS

Power Input: 24 Vac/dc, 50-60 Hz
Control Input: 5-25 Vac/dc, 50-60 Hz
Relays & Contact Type: One (1) SPST Continuous Duty Coil
Expected Relay Life: 10 million cycles minimum mechanical
Operating Temperature: -30 to 140° F
Humidity Range: 5 to 95% (noncondensing)
Operate Time: 18ms
Relay Status: LED On = Activated
Dimensions: 4.00" x 4.00" x 1.80" with .50" NPT Nipple
Wires: 16", 600V Rated
Approvals: UL Listed, UL916, UL864, C-UL
 California State Fire Marshal, CE, RoHS
Housing Rating: UL Accepted for Use in Plenum, NEMA 1
Gold Flash: No
Override Switch: Yes

Contact Ratings:
 20 Amp Resistive @ 277 Vac
 1110 VA Pilot Duty @ 277 Vac
 770 VA Pilot Duty @ 120 Vac
 20 Amp Ballast @ 277 Vac (N/O)
 10 Amp Ballast @ 277 Vac (N/C)
Not rated for Electronic Ballast
 10 Amp Tungsten @ 120 Vac (N/O)
 240 Watt Tungsten @ 120 Vac (N/C)
 2 HP @ 277 Vac
 1 HP @ 120 Vac

Power Input Ratings:
 50 mA @ 18 Vac
 83 mA @ 24 Vac
 33 mA @ 22 Vdc
 35 mA @ 24 Vdc
 47 mA @ 30 Vdc



Control Input Ratings:
 .4 mA @ 5 Vdc
 .9 mA @ 10 Vdc
 1 mA @ 12 Vdc
 2 mA @ 24 Vdc
 3 mA @ 24 Vac
 (Non Polarized)

Notes:
 • Normally Open or Normally Closed selected by yellow jumper wire

LOW COIL INPUT RELAY

RIBTE01SB

Enclosed Relay Hi/Low Separation 20 Amp SPST
+ Override, 120 Vac Power Input + 5-25 Vac/dc
Control Input

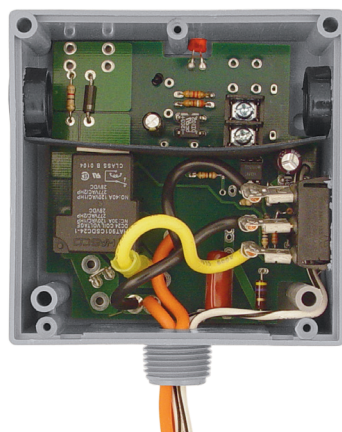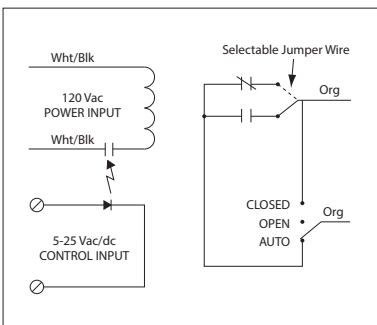

SPECIFICATIONS

Power Input: 120 Vac, 50-60 Hz
Control Input: 5-25 Vac/dc, 50-60 Hz
Relays & Contact Type: One (1) SPST Continuous Duty Coil
Expected Relay Life: 10 million cycles minimum mechanical
Operating Temperature: -30 to 140° F
Humidity Range: 5 to 95% (noncondensing)
Operate Time: 18ms
Relay Status: LED On = Activated
Dimensions: 4.00" x 4.00" x 1.80" with .50" NPT Nipple
Wires: 16", 600V Rated
Approvals: UL Listed, UL916, UL864, C-UL
 California State Fire Marshal, CE, RoHS
Housing Rating: UL Accepted for Use in Plenum, NEMA 1
Gold Flash: No
Override Switch: Yes

Contact Ratings:
 20 Amp Resistive @ 277 Vac
 1110 VA Pilot Duty @ 277 Vac
 770 VA Pilot Duty @ 120 Vac
 20 Amp Ballast @ 277 Vac (N/O)
 10 Amp Ballast @ 277 Vac (N/C)
Not rated for Electronic Ballast
 10 Amp Tungsten @ 120 Vac (N/O)
 240 Watt Tungsten @ 120 Vac (N/C)
 2 HP @ 277 Vac
 1 HP @ 120 Vac

Control Input Ratings:
 .4 mA @ 5 Vdc
 .9 mA @ 10 Vdc
 1 mA @ 12 Vdc
 2 mA @ 24 Vdc
 3 mA @ 24 Vac
 (Non Polarized)



Power Input Ratings:
 47 mA @ 120 Vac

Notes:
 • Normally Open or Normally Closed selected by yellow jumper wire

LOW COIL INPUT RELAY

RIBTE02SB

Enclosed Relay Hi/Low Separation 20 Amp SPST + Override, 208-277 Vac Power Input + 5-25 Vac/dc Control Input

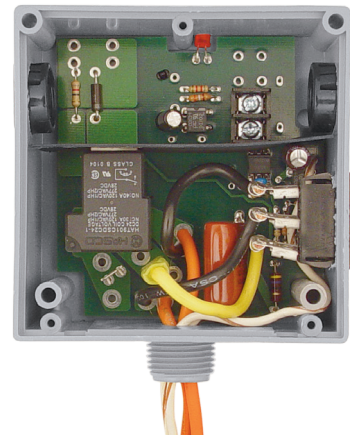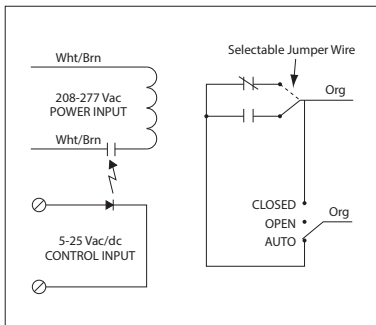

RELAYS

SPECIFICATIONS

Power Input: 208-277 Vac, 50-60 Hz
Control Input: 5-25 Vac/dc, 50-60 Hz
Relays & Contact Type: One (1) SPST Continuous Duty Coil
Expected Relay Life: 10 million cycles minimum mechanical
Operating Temperature: -30 to 140° F
Humidity Range: 5 to 95% (noncondensing)
Operate Time: 18ms
Relay Status: LED On = Activated
Dimensions: 4.00" x 4.00" x 1.80" with .50" NPT Nipple
Wires: 16", 600V Rated
Approvals: UL Listed, UL916, UL864, C-UL
 California State Fire Marshal, CE, RoHS
Housing Rating: UL Accepted for Use in Plenum, NEMA 1
Gold Flash: No
Override Switch: Yes

Contact Ratings:
 20 Amp Resistive @ 277 Vac
 1110 VA Pilot Duty @ 277 Vac
 770 VA Pilot Duty @ 120 Vac
 20 Amp Ballast @ 277 Vac (N/O)
 10 Amp Ballast @ 277 Vac (N/C)
Not rated for Electronic Ballast
 10 Amp Tungsten @ 120 Vac (N/O)
 240 Watt Tungsten @ 120 Vac (N/C)
 2 HP @ 277 Vac
 1 HP @ 120 Vac

Power Input Ratings:
 69 mA @ 208-277 Vac

Control Input Ratings:
 .4 mA @ 5 Vdc
 .9 mA @ 10 Vdc
 1 mA @ 12 Vdc
 2 mA @ 24 Vdc
 3 mA @ 24 Vdc
 (Non Polarized)



Notes:

- Normally Open or Normally Closed selected by yellow jumper wire

LOW COIL INPUT RELAY

RIBTE24P

Enclosed Relay Hi/Low Separation 20 Amp DPDT, 24 Vac/dc Power Input + 5-25 Vac/dc Control Input

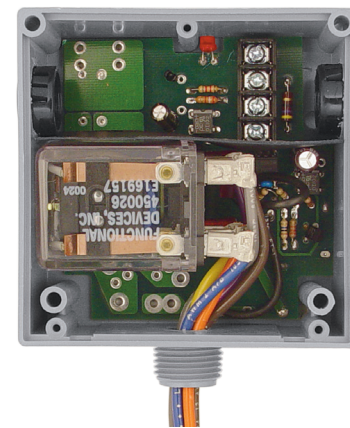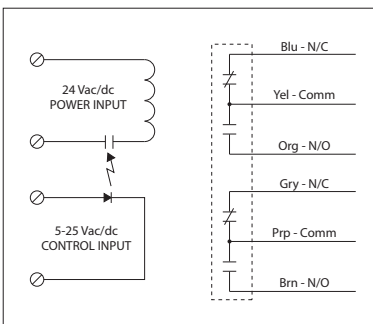

SPECIFICATIONS

Power Input: 24 Vac/dc, 50-60 Hz
Control Input: 5-25 Vac/dc, 50-60 Hz
Relays & Contact Type: One (1) DPDT Continuous Duty Coil
Expected Relay Life: 10 million cycles minimum mechanical
Operating Temperature: -30 to 140° F
Humidity Range: 5 to 95% (noncondensing)
Operate Time: 18ms
Relay Status: LED On = Activated
Dimensions: 4.00" x 4.00" x 1.80" with .50" NPT Nipple
Wires: 16", 600V Rated
Approvals: UL Listed, UL916, UL864, C-UL
 California State Fire Marshal, CE, RoHS
Housing Rating: UL Accepted for Use in Plenum, NEMA 1
Gold Flash: Yes
Override Switch: No

Contact Ratings:
 20 Amp Resistive @ 300 Vac
 20 Amp Resistive @ 28 Vdc
 15 Amp Resistive @ 600 Vac
 20 Amp Ballast @ 277-480 Vac
Not rated for Electronic Ballast
 770 VA Pilot Duty @ 120 Vac
 1158 VA Pilot Duty @ 240 Vac
 1110 VA Pilot Duty @ 277 Vac
 1640 VA Pilot Duty @ 480 Vac
 3 HP @ 480-600 Vac
 2 HP @ 240-277 Vac
 1 HP @ 120 Vac


Power Input Ratings:
 110 mA @ 20 Vac
 138 mA @ 24 Vac
 55 mA @ 20 Vdc
 55 mA @ 24 Vdc
 77 mA @ 30 Vdc

Control Input Ratings:
 .4 mA @ 5 Vdc
 .9 mA @ 10 Vdc
 1 mA @ 12 Vdc
 2 mA @ 24 Vdc
 3 mA @ 24 Vac
 (Non Polarized)

LOW COIL INPUT RELAY

RIBTE01P

Enclosed Relay Hi/Low Separation 20 Amp DPDT, 120 Vac Power Input + 5-25 Vac/dc Control Input

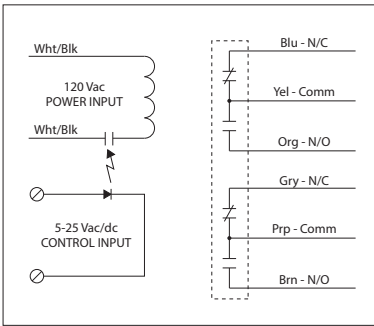

SPECIFICATIONS

Power Input: 120 Vac, 50-60 Hz
Control Input: 5-25 Vac/dc, 50-60 Hz
Relays & Contact Type: One (1) DPDT Continuous Duty Coil
Expected Relay Life: 10 million cycles minimum mechanical
Operating Temperature: -30 to 140° F
Humidity Range: 5 to 95% (noncondensing)
Operate Time: 18ms
Relay Status: LED On = Activated
Dimensions: 4.00" x 4.00" x 1.80" with .50" NPT Nipple
Wires: 16", 600V Rated
Approvals: UL Listed, UL916, UL864, C-UL California State Fire Marshal, CE, RoHS
Housing Rating: UL Accepted for Use in Plenum, NEMA 1
Gold Flash: Yes
Override Switch: No

Contact Ratings:
 20 Amp Resistive @ 300 Vac
 20 Amp Resistive @ 28 Vdc
 15 Amp Resistive @ 600 Vac
 20 Amp Ballast @ 277-480 Vac
Not rated for Electronic Ballast
 770 VA Pilot Duty @ 120 Vac
 1158 VA Pilot Duty @ 240 Vac
 1110 VA Pilot Duty @ 277 Vac
 1640 VA Pilot Duty @ 480 Vac
 3 HP @ 480-600 Vac
 2 HP @ 240-277 Vac
 1 HP @ 120 Vac



Power Input Ratings:
 105 mA @ 120 Vac

Control Input Ratings:
 .4 mA @ 5 Vdc
 .9 mA @ 10 Vdc
 1 mA @ 12 Vdc
 2 mA @ 24 Vdc
 3 mA @ 24 Vac
 (Non Polarized)

LOW COIL INPUT RELAY

RIBTE02P

Enclosed Relay Hi/Low Separation 20 Amp DPDT, 208-277 Vac Power Input + 5-25 Vac/dc Control Input

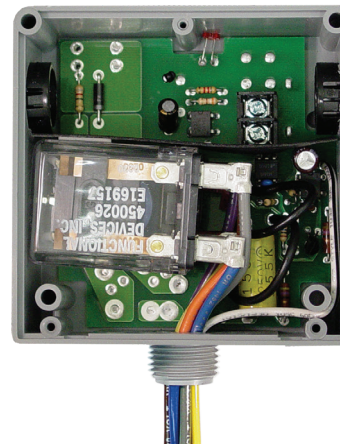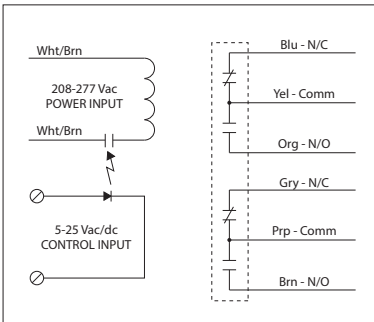

SPECIFICATIONS

Power Input: 208-277 Vac, 50-60 Hz
Control Input: 5-25 Vac/dc, 50-60 Hz
Relays & Contact Type: One (1) DPDT Continuous Duty Coil
Expected Relay Life: 10 million cycles minimum mechanical
Operating Temperature: -30 to 140° F
Humidity Range: 5 to 95% (noncondensing)
Operate Time: 18ms
Relay Status: LED On = Activated
Dimensions: 4.00" x 4.00" x 1.80" with .50" NPT Nipple
Wires: 16", 600V Rated
Approvals: UL Listed, UL916, UL864, C-UL California State Fire Marshal, CE, RoHS
Housing Rating: UL Accepted for Use in Plenum, NEMA 1
Gold Flash: Yes
Override Switch: No

Contact Ratings:
 20 Amp Resistive @ 300 Vac
 20 Amp Resistive @ 28 Vdc
 15 Amp Resistive @ 600 Vac
 20 Amp Ballast @ 277-480 Vac
Not rated for Electronic Ballast
 770 VA Pilot Duty @ 120 Vac
 1158 VA Pilot Duty @ 240 Vac
 1110 VA Pilot Duty @ 277 Vac
 1640 VA Pilot Duty @ 480 Vac
 3 HP @ 480-600 Vac
 2 HP @ 240-277 Vac
 1 HP @ 120 Vac


Power Input Ratings:
 105 mA @ 208-277 Vac

Control Input Ratings:
 .4 mA @ 5 Vdc
 .9 mA @ 10 Vdc
 1 mA @ 12 Vdc
 2 mA @ 24 Vdc
 3 mA @ 24 Vac
 (Non Polarized)

LOW COIL INPUT RELAYS



RIBTE01P-S

Enclosed Relay Hi/Low Separation 20 Amp DPDT
+Override, 120 Vac Power Input + 5-25 Vac/dc
Control Input

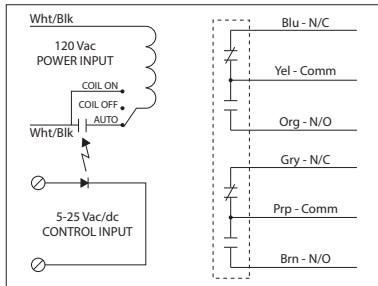

RIBTE02P-S

Enclosed Relay Hi/Low Separation 20 Amp DPDT
+Override, 208-277 Vac Power Input +
5-25 Vac/dc Control Input

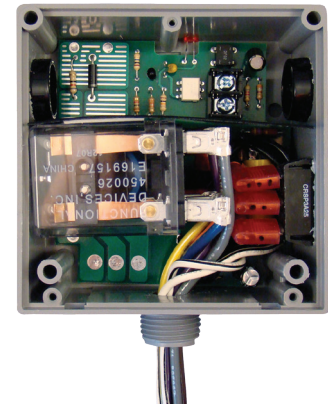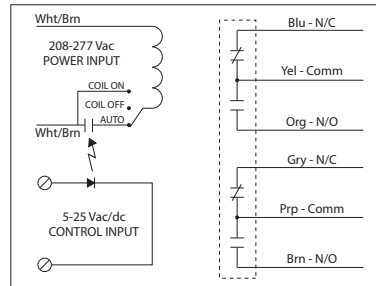

RELAYS

SPECIFICATIONS

Power Input: 120 Vac, 50-60 Hz (RIBTE01P-S)
208-277 Vac, 50-60 Hz (RIBTE02P-S)

Control Input: 5-25 Vac/dc, 50-60 Hz

Relays & Contact Type: One (1) DPDT Continuous Duty Coil

Expected Relay Life: 10 million cycles minimum mechanical

Operating Temperature: -30 to 140° F

Humidity Range: 5 to 95% (noncondensing)

Operate Time: 18ms

Relay Status: LED On = Activated

Dimensions: 4.00" x 4.00" x 1.80" with .50" NPT Nipple

Wires: 16", 600V Rated

Approvals: UL Listed, UL916, UL864, C-UL

California State Fire Marshal, CE, RoHS

Housing Rating: UL Accepted for Use in Plenum, NEMA 1

Gold Flash: Yes

Override Switch: Yes*

Contact Ratings:

20 Amp Resistive @ 300 Vac
20 Amp Resistive @ 28 Vdc
15 Amp Resistive @ 600 Vac
20 Amp Ballast @ 277-480 Vac
Not rated for Electronic Ballast
770 VA Pilot Duty @ 120 Vac
1158 VA Pilot Duty @ 240 Vac
1110 VA Pilot Duty @ 277 Vac
1640 VA Pilot Duty @ 480 Vac
3 HP @ 480-600 Vac
2 HP @ 240-277 Vac
1 HP @ 120 Vac

Control Input Ratings:

.4 mA @ 5 Vdc
.9 mA @ 10 Vdc
1 mA @ 12 Vdc
2 mA @ 24 Vdc
3 mA @ 24 Vac
(Non Polarized)

Notes:

* Override capability is made possible by supplying constant voltage on the Power Input. No Control Input Voltage is necessary to override the relay.*


Power Input Ratings:

105 mA @ 120 Vac (RIBTE01P-S)
105 mA @ 208-277 Vac (RIBTE02P-S)

LOW COIL INPUT TRACK MOUNT RELAYS




RIBME2401B

4.00" Track Mount Relay 20 Amp SPDT,
24 Vac/dc/120 Vac Power Input +
5-25 Vac/dc Control Input

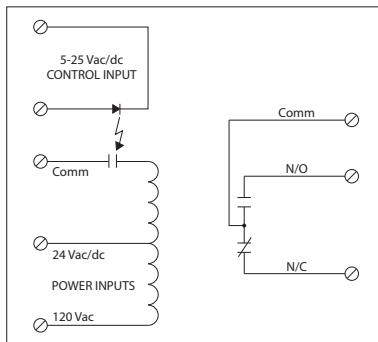

RIBME2402B

4.00" Track Mount Relay 20 Amp SPDT,
24 Vac/dc/208-277 Vac Power Input +
5-25 Vac/dc Control Input

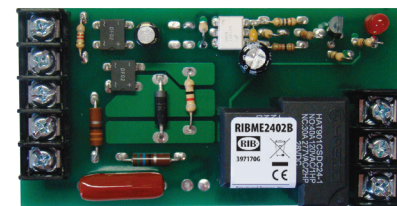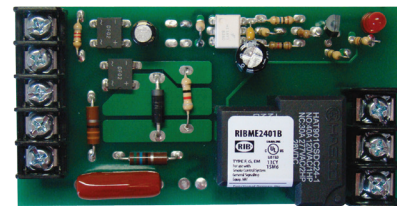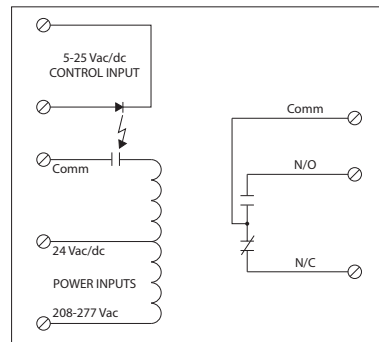

SPECIFICATIONS

Power Input: 24 Vac/dc/120 Vac, 50-60 Hz (RIBME2401B)
24 Vac/dc/208-277 Vac, 50-60 Hz (RIBME2402B)

Control Input: 5-25 Vac/dc, 50-60 Hz

Relays & Contact Type: One (1) SPDT Continuous Duty Coil

Expected Relay Life: 10 million cycles minimum mechanical

Operating Temperature: -30 to 140° F

Humidity Range: 5 to 95% (noncondensing)

Operate Time: 18ms

Relay Status: LED On = Activated

Dimensions: 2.050" x 4.000" x 1.750"

Track Mount: 4.000", See MT4 Series on page 152
MT4 Mounting Track Sold Separately

Approvals: UL Listed, UL916, UL864, C-UL

California State Fire Marshal, CE, RoHS

Gold Flash: No

Override Switch: No

Contact Ratings:

20 Amp Resistive @ 277 Vac
1110 VA Pilot Duty @ 277 Vac
770 VA Pilot Duty @ 120 Vac
20 Amp Ballast @ 277 Vac
16 Amp Electronic Ballast @ 277 Vac (N/O)
10 Amp Tungsten @ 120 Vac (N/O)
240 Watt Tungsten @ 120 Vac (N/C)
2 HP @ 277 Vac
1 HP @ 120 Vac

Power Input Ratings:

50 mA @ 18 Vac
83 mA @ 24 Vac
47 mA @ 120 Vac (RIBME2401B)
69 mA @ 208-277 Vac (RIBME2402B)


Control Input Ratings:

.4 mA @ 5 Vdc
.9 mA @ 10 Vdc
1 mA @ 12 Vdc
2 mA @ 24 Vdc
3 mA @ 24 Vac
(Non Polarized)

LOW COIL INPUT TRACK MOUNT RELAYS



RIBME2401SB

4.00" Track Mount Relay 20 Amp SPST + Override,
24 Vac/dc/120 Vac Power Input +
5-25 Vac/dc Control Input

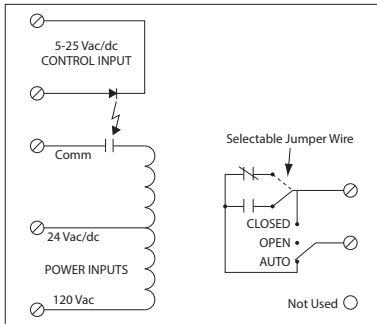

RIBME2402SB

4.00" Track Mount Relay 20 Amp SPST + Override,
24 Vac/dc/208-277 Vac Power Input +
5-25 Vac/dc Control Input

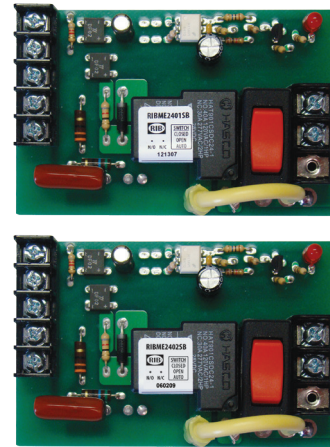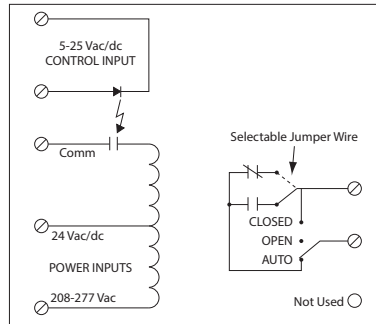

RELAYS

SPECIFICATIONS

Power Input: 24 Vac/dc/120 Vac, 50-60 Hz (RIBME2401SB)
24 Vac/dc/208-277 Vac, 50-60 Hz (RIBME2402SB)

Control Input: 5-25 Vac/dc, 50-60 Hz

Relays & Contact Type: One (1) SPST Continuous Duty Coil

Expected Relay Life: 10 million cycles minimum mechanical

Operating Temperature: -30 to 140° F

Humidity Range: 5 to 95% (noncondensing)

Operate Time: 18ms

Relay Status: LED On = Activated

Dimensions: 2.550" x 4.000" x 1.750"

Track Mount: 4.000", See MT4 Series on page 152
MT4 Mounting Track Sold Separately

Approvals: UL Listed, UL916, UL864, C-UL
California State Fire Marshal, CE, RoHS

Gold Flash: No

Override Switch: Yes

Contact Ratings:
20 Amp Resistive @ 277 Vac
1110 VA Pilot Duty @ 277 Vac
770 VA Pilot Duty @ 120 Vac
20 Amp Ballast @ 277 Vac (N/O)
10 Amp Ballast @ 277 Vac (N/C)
Not rated for Electronic Ballast
10 Amp Tungsten @ 120 Vac (N/O)
240 Watt Tungsten @ 120 Vac (N/C)
2 HP @ 277 Vac
1 HP @ 120 Vac

Control Input Ratings:
.4 mA @ 5 Vdc 2 mA @ 24 Vdc
.9 mA @ 10 Vdc 3 mA @ 24 Vdc
1 mA @ 12 Vdc (Non Polarized)


Power Input Ratings:
50 mA @ 18 Vac 33 mA @ 22 Vdc
83 mA @ 24 Vac 35 mA @ 24 Vdc
47 mA @ 120 Vac (RIBME2401SB) 47 mA @ 30 Vdc
69 mA @ 208-277 Vac (RIBME2402SB)

Notes:
• Normally Open or Normally Closed selected by yellow jumper wire

LOW COIL INPUT TRACK MOUNT RELAYS



RIBME2401P

4.00" Track Mount Relay 20 Amp DPST,
24 Vac/dc/120 Vac Power Input +
5-25 Vac/dc Control Input

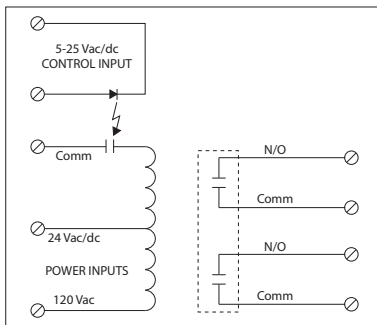

RIBME2402P

4.00" Track Mount Relay 20 Amp DPST,
24 Vac/dc/208-277 Vac Power Input +
5-25 Vac/dc Control Input

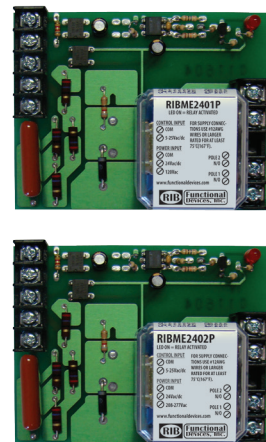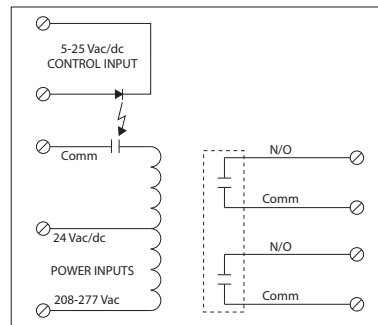

SPECIFICATIONS

Power Input: 24 Vac/dc/120 Vac, 50-60 Hz (RIBME2401P)
24 Vac/dc/208-277 Vac, 50-60 Hz (RIBME2402P)

Control Input: 5-25 Vac/dc, 50-60 Hz

Relays & Contact Type: One (1) DPST Continuous Duty Coil

Expected Relay Life: 10 million cycles minimum mechanical

Operating Temperature: -30 to 140° F

Humidity Range: 5 to 95% (noncondensing)

Operate Time: 18ms

Relay Status: LED On = Activated

Dimensions: 3.100" x 4.000" x 2.750"

Track Mount: 4.000", See MT4 Series on page 152
MT4 Mounting Track Sold Separately

Approvals: UL Listed, UL916, UL864, C-UL
California State Fire Marshal, CE, RoHS

Gold Flash: Yes

Override Switch: No

Contact Ratings:
20 Amp Resistive @ 300 Vac
20 Amp Resistive @ 28 Vdc, 15 Vdc
20 Amp Ballast @ 277-480 Vac
Not rated for Electronic Ballast
15 Amp Resistive @ 600 Vac
770 VA Pilot Duty @ 120 Vac
1158 VA Pilot Duty @ 240 Vac
1110 VA Pilot Duty @ 277 Vac
1640 VA Pilot Duty @ 480 Vac
3 HP @ 480-600 Vac
2 HP @ 240-277 Vac
1 HP @ 120 Vac

Power Input Ratings:
138 mA @ 24 Vac
105 mA @ 120 Vac (RIBME2401P)
105 mA @ 208-277 Vac (RIBME2402P)
77 mA @ 30 Vdc

Control Input Ratings:
.4 mA @ 5 Vdc
.9 mA @ 10 Vdc
1 mA @ 12 Vdc
2 mA @ 24 Vdc
3 mA @ 24 Vac
(Non Polarized)

POLARIZED RELAYS

Enclosed | Track Mount




Made in the U.S.A.
Meets the "Buy American" provisions of Section 1605 of the American Recovery and Reinvestment Act of 2009 (ARRA).

Same Great Prepackaging

- Relays are polarized to work in a supervised system and may be turned on and off by reversing polarity. For fire alarm systems, smoke control systems, etc.

Fire Alarm Systems Application

- Coil input is polarity sensitive
- For use with fire alarm systems
- System supervision for controllers that utilize end-of-line resistors
- Four wire circuit ensures indication of broken wiring connection with RIB®

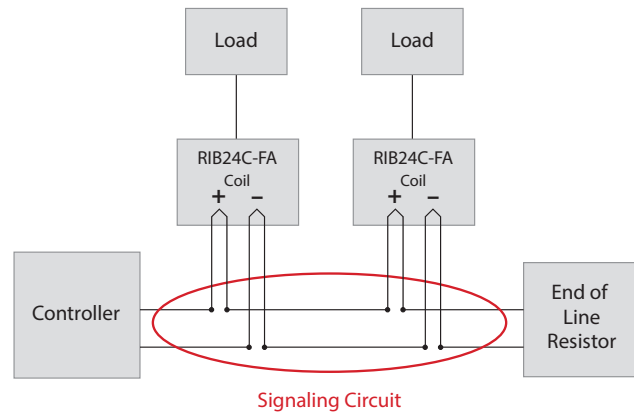

RELAYS

ENCLOSED ALARM RELAYS

MODEL #	UL	COIL VOLTAGE	RELAYS	CONTACTS	OVERRIDE SWITCH	NOTES	SPEC PAGE
RIB12C-FA	•	12 Vac/dc	1	SPDT			56
RIB24C-FA	•	24 Vac/dc	1	SPDT			56
RIB12S-FA	•	12 Vac/dc	1	SPST	1		56
RIB24S-FA	•	24 Vac/dc	1	SPST	1		56
RIBT24B-FA	•	24 Vac/dc	1	SPDT			57
RIB24P-FA	•	24 Vac/dc	1	DPDT			57

TRACK MOUNT ALARM RELAYS


MODEL #	UL	COIL VOLTAGE	RELAYS	CONTACTS	OVERRIDE SWITCH	NOTES	SPEC PAGE
RIBMN12C-FA	•	12 Vac/dc	1	SPDT			58
RIBMN24C-FA	•	24 Vac/dc	1	SPDT			58
RIBMN12S-FA	•	12 Vac/dc	1	SPST	1		58
RIBMN24S-FA	•	24 Vac/dc	1	SPST	1		58

UL = UL Listed : UL916 Energy Management, UL864 Fire ; USA & Canada

FIRE ALARM RELAYS


RIB12C-FA

Enclosed Relay 10 Amp, Polarized with 12 Vac/dc Coil

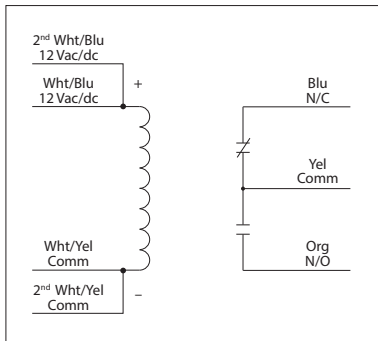


RIB12S-FA

Enclosed Relay 10 Amp + Override, Polarized with 12 Vac/dc Coil

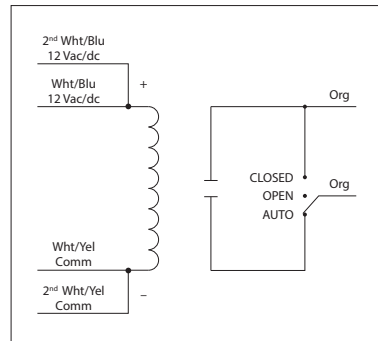

RIB12C-FA-RD
RIB12S-FA-RD
• Red housing



RIB12C-FA-N4
• NEMA 4X housing, UL508 only

SPECIFICATIONS

Relays & Contact Type: One (1) SPDT Continuous Duty Coil
Expected Relay Life: 10 million cycles minimum mechanical
Operating Temperature: -30 to 140° F
Humidity Range: 5 to 95% (noncondensing)
Operate Time: 6ms
Relay Status: LED On = Activated
Dimensions: 1.70" x 2.80" x 1.50" with .50" NPT nipple
Wires: 16", 600V Rated
Approvals: UL Listed, UL916, UL864, C-UL
 California State Fire Marshal, CE, RoHS
Housing Rating: UL Accepted for Use in Plenum, NEMA 1
Gold Flash: No
Override Switch: No (RIB12C-FA)
 Yes (RIB12S-FA)

Contact Ratings:
 10 Amp General Use @ 277 Vac
 10 Amp Resistive @ 30 Vdc (N/O)
 7 Amp Resistive @ 30 Vdc (N/C)
 1/2 HP @ 125 Vac
 1 HP @ 250 Vac
 1/4 HP @ 277 Vac
 470 VA Pilot Duty @ 125 Vac
 770 VA Pilot Duty @ 250 Vac

Coil Current:
 53 mA @ 10 Vac
 62 mA @ 12 Vac
 29 mA @ 11 Vdc
 36 mA @ 12 Vdc


Coil Voltage Input:
 12 Vac/dc; 50-60 Hz
 Drop Out = 2 Vac / 2.5 Vdc
 Pull In = 9 Vac / 11 Vdc

Notes:
 • Order Normally Closed by adding "-NC" to end of model number (RIB12S-FA)

FIRE ALARM RELAYS


RIB24C-FA

Enclosed Relay 10 Amp, Polarized with 24 Vac/dc Coil

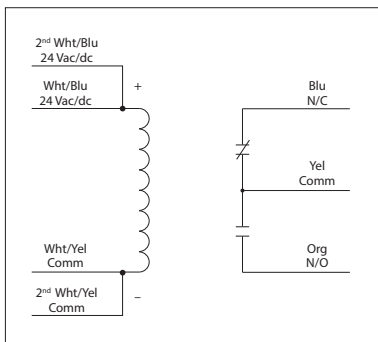

RIB24S-FA

Enclosed Relay 10 Amp + Override, Polarized with 24 Vac/dc Coil

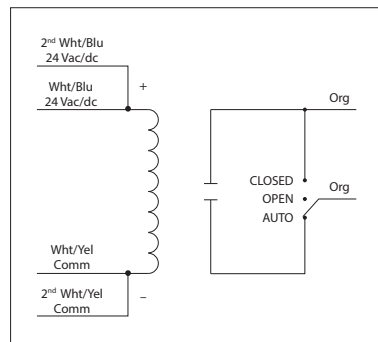

RIB24C-FA-RD
RIB24S-FA-RD
• Red housing



RIB24C-FA-N4
• NEMA 4X housing, UL508 only

SPECIFICATIONS

Relays & Contact Type: One (1) SPDT Continuous Duty Coil
Expected Relay Life: 10 million cycles minimum mechanical
Operating Temperature: -30 to 140° F
Humidity Range: 5 to 95% (noncondensing)
Operate Time: 6ms
Relay Status: LED On = Activated
Dimensions: 1.70" x 2.80" x 1.50" with .50" NPT nipple
Wires: 16", 600V Rated
Approvals: UL Listed, UL916, UL864, C-UL
 California State Fire Marshal, CE, RoHS
Housing Rating: UL Accepted for Use in Plenum, NEMA 1
Gold Flash: No
Override Switch: No (RIB24C-FA)
 Yes (RIB24S-FA)

Contact Ratings:
 10 Amp General Use @ 277 Vac
 10 Amp Resistive @ 30 Vdc (N/O)
 7 Amp Resistive @ 30 Vdc (N/C)
 1/2 HP @ 125 Vac
 1 HP @ 250 Vac
 1/4 HP @ 277 Vac
 470 VA Pilot Duty @ 125 Vac
 770 VA Pilot Duty @ 250 Vac

Coil Current:
 26 mA @ 20 Vac
 31 mA @ 24 Vac
 48 mA @ 35 Vac
 14 mA @ 20 Vdc
 18 mA @ 24 Vdc
 28 mA @ 35 Vdc



Coil Voltage Input:
 24 Vac/dc; 50-60 Hz
 Drop Out = 3 Vac / 3.8 Vdc
 Pull In = 20 Vac / 20 Vdc

Notes:
 • Order Normally Closed by adding "-NC" to end of model number (RIB24S-FA)

FIRE ALARM RELAY

RIBT24B-FA

Enclosed Relay Hi/Low Separation 20 Amp SPDT,
Polarized with 24 Vac/dc Coil

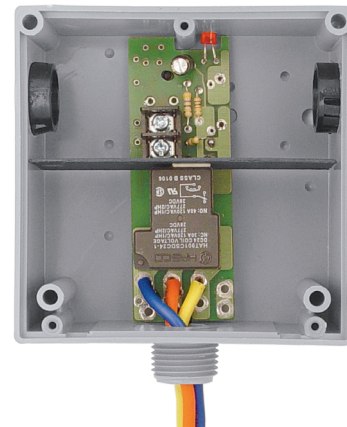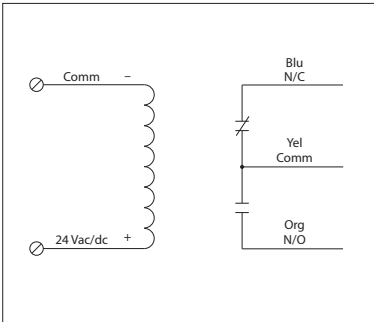

RELAYS

SPECIFICATIONS

Relays & Contact Type: One (1) SPDT Continuous Duty Coil
Expected Relay Life: 10 million cycles minimum mechanical
Operating Temperature: -30 to 140° F
Humidity Range: 5 to 95% (noncondensing)
Operate Time: 18ms
Relay Status: LED On = Activated
Dimensions: 4.00" x 4.00" x 1.80" with .50" NPT nipple
Wires: 16", 600V Rated
Approvals: UL Listed, UL916, UL864, C-UL
 California State Fire Marshal, CE, RoHS
Housing Rating: UL Accepted for Use in Plenum, NEMA 1
Gold Flash: No
Override Switch: No

Contact Ratings:
 20 Amp Resistive @ 277 Vac
 5 Amp Resistive @ 480 Vac
 1110 VA Pilot Duty @ 277 Vac
 770 VA Pilot Duty @ 120 Vac
 20 Amp Ballast @ 277 Vac
 16 Amp Electronic Ballast @ 277 Vac (N/O)
 10 Amp Tungsten @ 120 Vac (N/O)
 240 Watt Tungsten @ 120 Vac (N/C)
 2 HP @ 277 Vac
 1 HP @ 120 Vac


Coil Current:
 47 mA @ 18 Vac
 83 mA @ 24 Vac
 33 mA @ 22 Vdc
 35 mA @ 24 Vdc
 47 mA @ 30 Vdc

Coil Voltage Input:
 24 Vac/dc ; 50-60 Hz
 Drop Out = 2.1 Vac / 3.8 Vdc
 Pull In = 18 Vac / 22 Vdc

FIRE ALARM RELAY

RIB24P-FA

Enclosed Relay 20 Amp DPDT, Polarized with
24 Vac/dc Coil

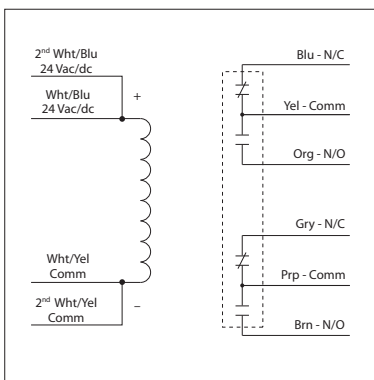

SPECIFICATIONS

Relays & Contact Type: One (1) DPDT Continuous Duty Coil
Expected Relay Life: 10 million cycles minimum mechanical
Operating Temperature: -30 to 140° F
Humidity Range: 5 to 95% (noncondensing)
Operate Time: 18ms
Relay Status: LED On = Activated
Dimensions: 2.30" x 3.20" x 1.80" with .50" NPT nipple
Wires: 16", 600V Rated
Approvals: UL Listed, UL916, UL864, C-UL
 California State Fire Marshal, CE, RoHS
Housing Rating: UL Accepted for Use in Plenum, NEMA 1
Gold Flash: Yes
Override Switch: No

Contact Ratings:
 20 Amp Resistive @ 300 Vac
 20 Amp Resistive @ 28 Vdc, 15 Vdc
 15 Amp Resistive @ 600 Vac
 1 HP @ 120 Vac
 2 HP @ 240-277 Vac
 3 HP @ 480 Vac - 600 Vac
 20 Amp Ballast @ 277-480 Vac
Not rated for Electronic Ballast
 770 VA Pilot Duty @ 120 Vac
 1,158 VA Pilot Duty @ 240 Vac
 1,110 VA Pilot Duty @ 277 Vac
 1,640 VA Pilot Duty @ 480 Vac


Coil Current:
 110 mA @ 20 Vac
 138 mA @ 24 Vac
 55 mA @ 20 Vdc
 55 mA @ 24 Vdc
 77 mA @ 30 Vdc

Coil Voltage Input:
 24 Vac/dc ; 50-60 Hz
 Drop Out = 3 Vac / 3.8 Vdc
 Pull In = 20 Vac / 20 Vdc

FIRE ALARM TRACK MOUNT RELAYS


RIBMN12C-FA

2.75" Track Mount Relay 15 Amp, Polarized with 12 Vac/dc Coil

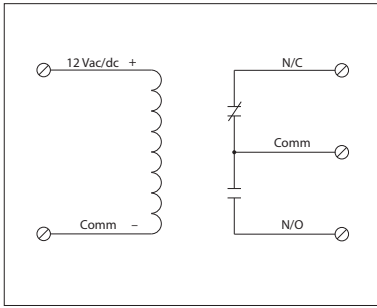

RIBMN12S-FA

2.75" Track Mount Relay 15 Amp + Override, Polarized with 12 Vac/dc Coil

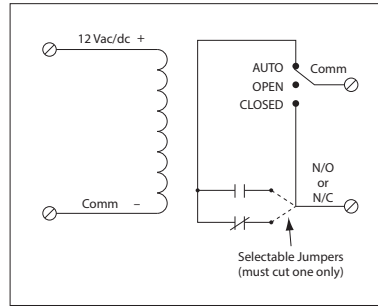

Cut for N/O
Cut for N/C

SPECIFICATIONS

Relays & Contact Type: One (1) SPDT Continuous Duty Coil
Expected Relay Life: 10 million cycles minimum mechanical
Operating Temperature: -30 to 140° F
Humidity Range: 5 to 95% (noncondensing)
Operate Time: 6ms
Relay Status: LED On = Activated
Dimensions: 1.100" x 2.750" x 1.750"
Track Mount: 2.750", See MT212 Series on page 152
MT212 Mounting Track Sold Separately
Approvals: UL Listed, UL916, UL864, C-UL
 California State Fire Marshal, CE, RoHS
Gold Flash: No
Override Switch: No (RIBMN12C-FA)
 Yes (RIBMN12S-FA)

Contact Ratings:
 15 Amp General Use @ 125 Vac
 10 Amp General Use @ 277 Vac
 10 Amp Resistive @ 30 Vdc (N/O)
 7 Amp Resistive @ 30 Vdc (N/C)
 1/2 HP @ 125 Vac
 1 HP @ 250 Vac
 1/4 HP @ 277 Vac
 470 VA Pilot Duty @ 125 Vac
 770 VA Pilot Duty @ 250 Vac

Coil Current:
 53 mA @ 10 Vac
 62 mA @ 12 Vac
 29 mA @ 11 Vdc
 35 mA @ 12 Vdc


Coil Voltage Input:
 12 Vac/dc; 50-60 Hz
 Drop Out = 2 Vac / 2.5 Vdc
 Pull In = 9 Vac / 11 Vdc

Notes:
 • Must cut appropriate jumper to select Normally Open or Normally Closed (RIBMN12S-FA)

FIRE ALARM TRACK MOUNT RELAYS



RIBMN24C-FA

2.75" Track Mount Relay 15 Amp, Polarized with 24 Vac/dc Coil

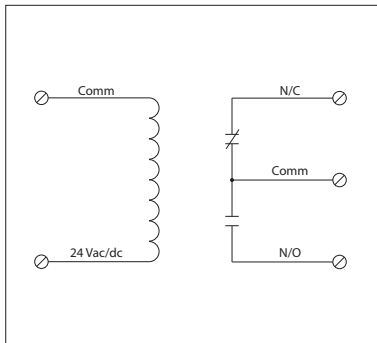

RIBMN24S-FA

2.75" Track Mount Relay 15 Amp + Override, Polarized with 24 Vac/dc Coil

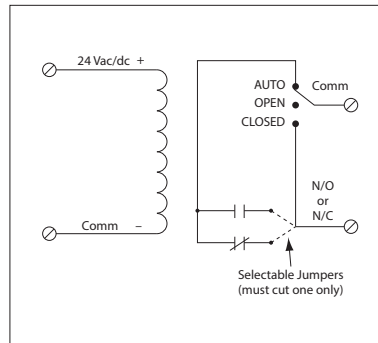

Cut for N/O
Cut for N/C

SPECIFICATIONS

Relays & Contact Type: One (1) SPDT Continuous Duty Coil
Expected Relay Life: 10 million cycles minimum mechanical
Operating Temperature: -30 to 140° F
Humidity Range: 5 to 95% (noncondensing)
Operate Time: 6ms
Relay Status: LED On = Activated
Dimensions: 1.100" x 2.750" x 1.750"
Track Mount: 2.750", See MT212 Series on page 152
MT212 Mounting Track Sold Separately
Approvals: UL Listed, UL916, UL864, C-UL
 California State Fire Marshal, CE, RoHS
Gold Flash: No
Override Switch: No (RIBMN24C-FA)
 Yes (RIBMN24S-FA)

Contact Ratings:
 15 Amp General Use @ 125 Vac
 10 Amp General Use @ 277 Vac
 10 Amp Resistive @ 30 Vdc (N/O)
 7 Amp Resistive @ 30 Vdc (N/C)
 1/2 HP @ 125 Vac
 1 HP @ 250 Vac
 1/4 HP @ 277 Vac
 470 VA Pilot Duty @ 125 Vac
 770 VA Pilot Duty @ 250 Vac

Coil Current:
 26 mA @ 20 Vac
 31 mA @ 24 Vac
 48 mA @ 35 Vac
 14 mA @ 20 Vdc
 18 mA @ 24 Vdc
 28 mA @ 35 Vdc

Coil Voltage Input:
 24 Vac/dc; 50-60 Hz
 Drop Out = 2 Vac / 2.5 Vdc
 Pull In = 9 Vac / 11 Vdc

Notes:
 • Must cut appropriate jumper to select Normally Open or Normally Closed (RIBMN24S-FA)

DRY CONTACT INPUT RELAYS

Enclosed | Track Mount




Made in the U.S.A.
Meets the "Buy American" provisions of Section 1605 of the American Recovery and Reinvestment Act of 2009 (ARRA).

The Dry Contact Input RIB® Series offers all the advantages of the standard RIB® line plus it can be activated by a wide range of dry contacts such as thermostats, current switches, other relays, solid-state switches, etc. The Dry Contact Input RIB® accepts local power to provide the low-voltage (Class 2) power needed to activate the relay; just close the dry contact input. The power to energize the relay can be brought to the relay on a separate pair of wires along with the control output of a controller, or can be a local power

source near the relay. The relay contacts are isolated from the input power and the dry contact input; thus, the relay contacts can be wired to switch any other power-load or low-voltage load (see specifications for contact ratings.) One model can be used for many installations (model RIB21CDC can be powered from any voltage from 120 Vac to 277 Vac; see specifications for the input power of other models.)

Can be activated by dry contacts such as thermostats, current switches, etc.

- Self-powered current switches of the RIBX Series and relays of the Dry Contact Input RIB® Series may be applied to interlock Load 2 to Load 1.

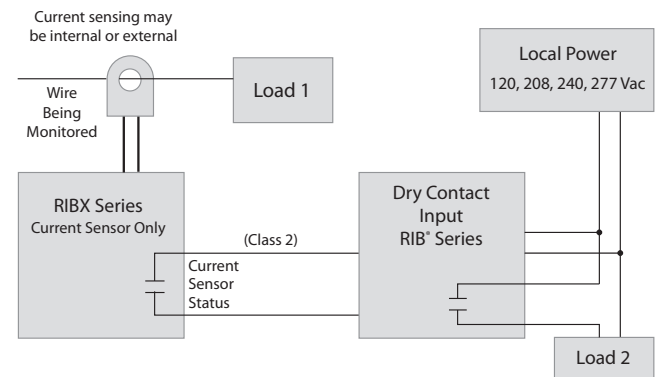

ENCLOSED DRY CONTACT INPUT RELAYS

MODEL #	UL	POWER INPUT	RELAYS	CONTACTS	OVERRIDE SWITCH	NOTES	SPEC PAGE
RIB21CDC	•	120-277 Vac	1	SPDT			60
RIB01BDC	•	120 Vac	1	SPDT			60
RIB02BDC	•	208-277 Vac	1	SPDT			60
RIB01SBDC	•	120 Vac	1	SPST	1		61
RIB02SBDC	•	208-277 Vac	1	SPST	1		61
RIB01SBCDC	•	120 Vac	1	SPDT	2		61
RIB02SBCDC	•	208-277 Vac	1	SPDT	2		61
RIBD01BDC	•	120 Vac	1	SPDT		#	62
RIBD02BDC	•	208-277 Vac	1	SPDT		#	62
RIBD01BDC-DOB	•	120 Vac	1	SPDT		#	63
RIBD02BDC-DOB	•	208-277 Vac	1	SPDT		#	63

TRACK MOUNT DRY CONTACT INPUT RELAYS

MODEL #	UL	POWER INPUT	RELAYS	CONTACTS	OVERRIDE SWITCH	NOTES	SPEC PAGE
RIBM01ZNDC	•	120 Vac	1	DPDT			64
RIBM02ZNDC	•	208-277 Vac	1	DPDT			64
RIBM013PNDC	•	120 Vac	1	3PDT			64

UL = UL Listed : UL916 Energy Management; USA & Canada



= Time Delay

UL = UL Component Recognized : UL916 Energy Management; USA & Canada

DRY CONTACT INPUT RELAYS

RIB21CDC

Enclosed Relay 10 Amp SPDT, Class 2 Dry
Contact Input, 120-277 Vac Power Input

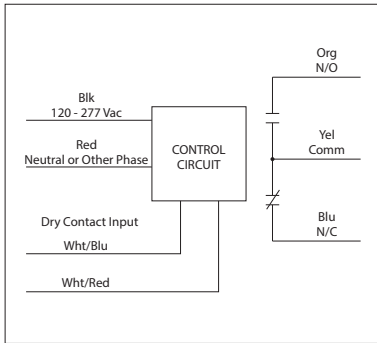

RIB21CDC-RD
• Red housing



RIB21CDC-N4
• NEMA 4X housing, UL508 only

RELAYS

SPECIFICATIONS

Relays & Contact Type: One (1) SPDT Continuous Duty Coil
Expected Relay Life: 10 million cycles minimum mechanical
Operating Temperature: -30 to 140° F
Humidity Range: 5 to 95% (noncondensing)
Operate Time: 1.8 Seconds
Relay Status: LED On = Activated
Dimensions: 1.70" x 2.80" x 1.50" with .50" NPT Nipple
Wires: 16", 600V Rated
Approvals: UL Listed, UL916, C-UL
 California State Fire Marshal, CE, RoHS
Housing Rating: UL Accepted for Use in Plenum, NEMA 1
Gold Flash: No
Override Switch: No

Contact Ratings:
 10 Amp General Use @ 277 Vac
 10 Amp Resistive @ 30 Vdc (N/O)
 7 Amp Resistive @ 30 Vdc (N/C)
 1/2 HP @ 125 Vac
 1 HP @ 250 Vac
 1/4 HP @ 277 Vac
 470 VA Pilot Duty @ 125 Vac
 770 VA Pilot Duty @ 250 Vac


Power Input:
 50 mA @ 240 Vac Max.

Notes:
 • **Dry Contact Input Operation:**
 Close White/Red wire to White/Blue wire to activate relay. If more than one dry contact RIB® shares a single dry contact input, White/Blue must be common.

DRY CONTACT INPUT RELAYS


RIB01BDC

Enclosed Relay 20 Amp SPDT, Class 2 Dry
Contact Input, 120 Vac Power Input

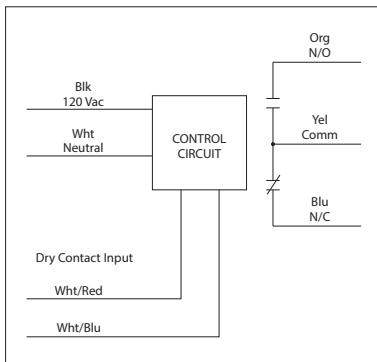

RIB02BDC

Enclosed Relay 20 Amp SPDT, Class 2 Dry
Contact Input, 208-277 Vac Power Input

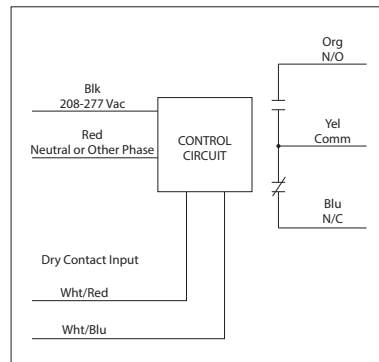

SPECIFICATIONS

Relays & Contact Type: One (1) SPDT Continuous Duty Coil
Expected Relay Life: 10 million cycles minimum mechanical
Operating Temperature: -30 to 140° F
Humidity Range: 5 to 95% (noncondensing)
Operate Time: 1.8 Seconds
Relay Status: LED On = Activated
Dimensions: 2.30" x 3.20" x 1.80" with .50" NPT Nipple
Wires: 16", 600V Rated
Approvals: UL Listed, UL916, C-UL
 California State Fire Marshal, CE, RoHS
Housing Rating: UL Accepted for Use in Plenum, NEMA 1
Gold Flash: No
Override Switch: No

Contact Ratings:
 20 Amp Resistive @ 277 Vac
 1110 VA Pilot Duty @ 277 Vac
 770 VA Pilot Duty @ 120 Vac
 20 Amp Ballast @ 277 Vac
 16 Amp Electronic Ballast @ 277 Vac (N/O)
 10 Amp Tungsten @ 120 Vac (N/O)
 240 Watt Tungsten @ 120 Vac (N/C)
 2 HP @ 277 Vac
 1 HP @ 120 Vac


Power Input:
 42 mA @ 120 Vac (RIB01BDC)
 62 mA @ 208-277 Vac (RIB02BDC)

Notes:
 • **Dry Contact Input Operation:**
 Close White/Red wire to White/Blue wire to activate relay. If more than one dry contact RIB® shares a single dry contact input, White/Blue must be common.

DRY CONTACT INPUT RELAYS


RIB01SBDC

Enclosed Relay 20 Amp SPST-N/O + Override, Class 2 Dry Contact Input, 120 Vac Power Input

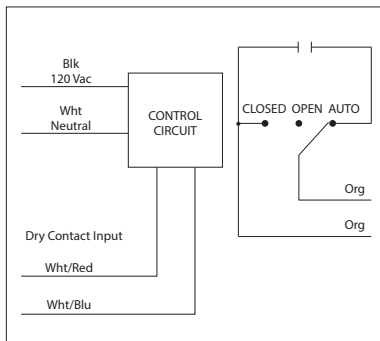

RIB02SBDC

Enclosed Relay 20 Amp SPST-N/O + Override, Class 2 Dry Contact Input, 208-277 Vac Power Input

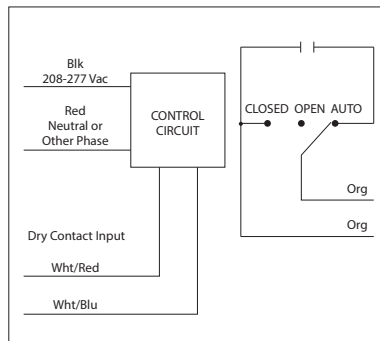

RELAYS

SPECIFICATIONS

Relays & Contact Type: One (1) SPST Continuous Duty Coil
Expected Relay Life: 10 million cycles minimum mechanical
Operating Temperature: -30 to 140° F
Humidity Range: 5 to 95% (noncondensing)
Operate Time: 1.8 Seconds
Relay Status: LED On = Activated
Dimensions: 2.30" x 3.20" x 1.80" with .50" NPT Nipple
Wires: 16", 600V Rated
Approvals: UL Listed, UL916, C-UL, CE, RoHS
Housing Rating: UL Accepted for Use in Plenum, NEMA 1
Gold Flash: No
Override Switch: Yes

Contact Ratings:
 20 Amp Resistive @ 277 Vac
 1110 VA Pilot Duty @ 277 Vac
 770 VA Pilot Duty @ 120 Vac
 20 Amp Ballast @ 277 Vac (N/O)
 10 Amp Ballast @ 277 Vac (N/C)
Not rated for Electronic Ballast
 10 Amp Tungsten @ 120 Vac (N/O)
 240 Watt Tungsten @ 120 Vac (N/C)
 2 HP @ 277 Vac
 1 HP @ 120 Vac


Power Input:
 42 mA @ 120 Vac (RIB01SBDC)
 62 mA @ 208-277 Vac (RIB02SBDC)

Notes:
 • **Dry Contact Input Operation:**
 Close White/Red wire to White/Blue wire to activate relay. If more than one dry contact RIB® shares a single dry contact input, White/Blue must be common.
 • Order Normally Closed by adding "-NC" to end of model number

DRY CONTACT INPUT RELAYS



RIB01SBDCDC

Enclosed Relay 20 Amp SPDT + Override, Class 2 Dry Contact Input, 120 Vac Power Input

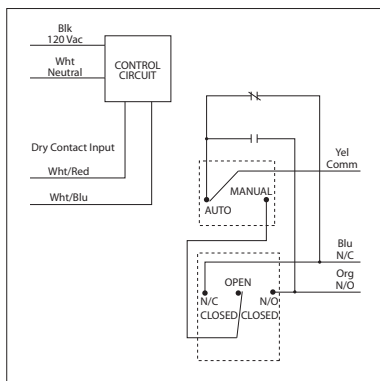

RIB02SBDCDC

Enclosed Relay 20 Amp SPDT + Override, Class 2 Dry Contact Input, 208-277 Vac Power Input

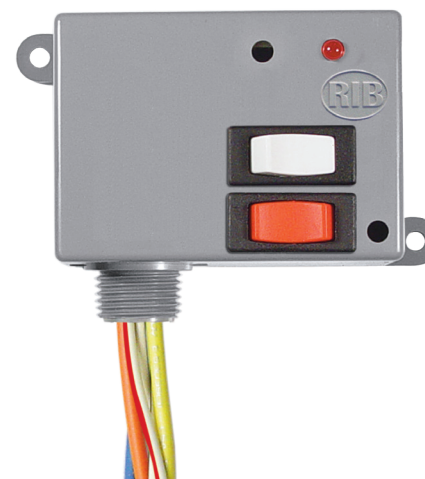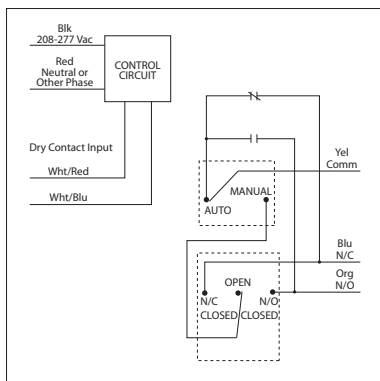

SPECIFICATIONS

Relays & Contact Type: One (1) SPDT Continuous Duty Coil
Expected Relay Life: 10 million cycles minimum mechanical
Operating Temperature: -30 to 140° F
Humidity Range: 5 to 95% (noncondensing)
Operate Time: 1.8 Seconds
Relay Status: LED On = Activated
Dimensions: 2.30" x 3.20" x 1.80" with .50" NPT Nipple
Wires: 16", 600V Rated
Approvals: UL Listed, UL916, C-UL, CE, RoHS
Housing Rating: UL Accepted for Use in Plenum, NEMA 1
Gold Flash: No
Override Switch: Yes (2)

Contact Ratings:
 20 Amp Resistive @ 277 Vac
 20 Amp Ballast @ 277 Vac
Not rated for Electronic Ballast
 10 Amp Tungsten @ 120 Vac
 770 VA Pilot Duty @ 120 Vac
 1,110 VA Pilot Duty @ 277 Vac
 2 HP @ 277 Vac
 1 HP @ 120 Vac


Power Input:
 42 mA @ 120 Vac (RIB01SBDCDC)
 62 mA @ 208-277 Vac (RIB02SBDCDC)

Notes:
 • **Dry Contact Input Operation:**
 Close White/Red wire to White/Blue wire to activate relay. If more than one dry contact RIB® shares a single dry contact input, White/Blue must be common.

DRY CONTACT INPUT TIME DELAY RELAYS



RIBD01BDC

Enclosed Delay on Make Relay 20 Amp
SPDT, Class 2 Dry Contact Input, 120 Vac
Power Input

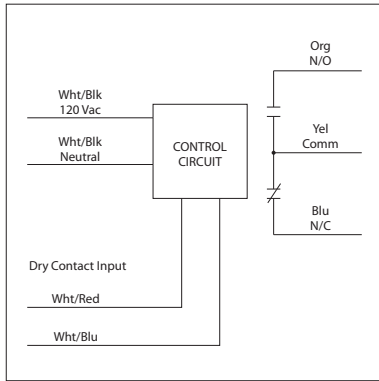

RIBD02BDC

Enclosed Delay on Make Relay 20 Amp
SPDT, Class 2 Dry Contact Input, 208-277 Vac
Power Input

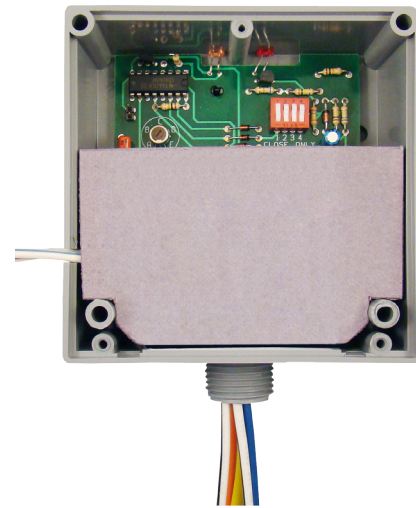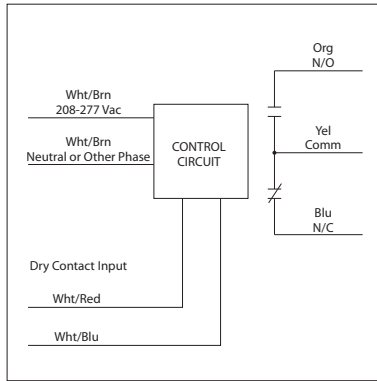

RELAYS



SPECIFICATIONS

- # Relays & Contact Type:** One (1) SPDT Continuous Duty Coil
- Expected Relay Life:** 10 million cycles minimum mechanical
- Operating Temperature:** -30 to 140° F
- Humidity Range:** 5 to 95% (noncondensing)
- Operate Time:** 18ms after time delay
- Relay Status:** Red LED On = Activated
- Time Delay Status:** Pink LED FLASHING = Timing / Relay Deactivated
- Timing Mode:** Delay On Make
- Timing Range:** 6 seconds - 20 minutes
- Timing Adjustment:** 4 position DIP switch for range selection and single turn potentiometer for timing adjustment within range
- Timing Tolerance:** Switches 1 & 2 = ±10%
Switches 3 & 4 = ±5%
- Timing Repeatability:** ±1%
- Temperature Timing Variance:** ±1%
- Voltage Timing Variance:** ±1%
- Recycle Time:** 750ms Maximum
- Dimensions:** 4.00" x 4.00" x 1.80" with .50" NPT nipple
- Wires:** 16", 600V Rated
- Approvals:** UL Listed, UL916, C-UL, CE, RoHS
- Housing Rating:** UL Accepted for Use in Plenum, NEMA 1
- Gold Flash:** No
- Override Switch:** No

- Contact Ratings:**
 - 20 Amp Resistive @ 277 Vac
 - 20 Amp Ballast @ 277 Vac
 - 16 Amp Electronic Ballast @ 277 Vac (N/O)
 - 10 Amp Tungsten @ 120 Vac (N/O)
 - 770 VA Pilot Duty @ 120 Vac
 - 1,110 VA Pilot Duty @ 277 Vac
 - 2 HP @ 277 Vac
 - 1 HP @ 120 Vac


- Power Input:**
 - 42 mA @ 120 Vac (RIBD01BDC)
 - 62 mA @ 208-277 Vac (RIBD02BDC)

- Notes:**
 - **Dry Contact Input Operation:** Close White/Red wire to White/Blue wire to start timing. Relay will activate after timing sequence has ended.
 - If more than one dry contact RIB® shares a single dry contact input, White/Blue must be common.

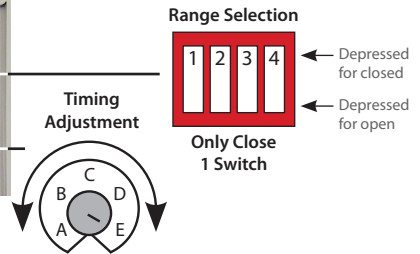


TIMING TABLE						
Switch Ranges	Close Dip Switch	Potentiometer Setting				
		A	B	C	D	E
6s-20s	1	6s	9s	13s	16s	20s
22s-1min15s	2	22s	36s	50s	1min4s	1min15s
1min30s-5min	3	1min30s	2min10s	3min20s	4min16s	5min
6min-20min	4	6min	9min	13min20s	17min20s	20min


Delay on Make

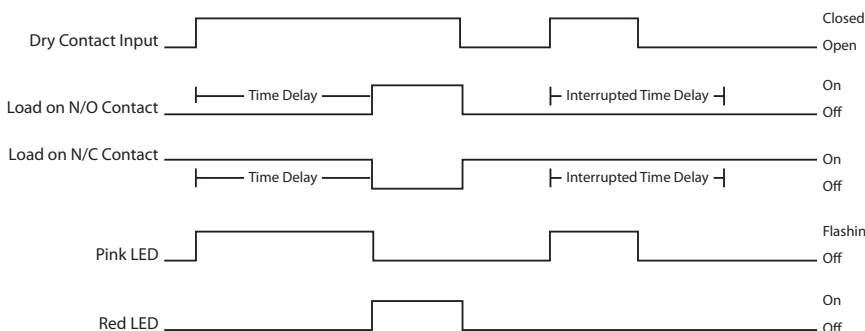

Wiring for Load on N/O Contact




Wiring for Load on N/C Contact

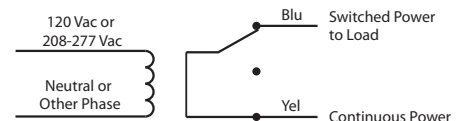

DRY CONTACT INPUT TIME DELAY RELAYS



RIBD01BDC-DOB

Enclosed Delay on Break Relay 20 Amp SPDT,
Class 2 Dry Contact Input, 120 Vac
Power Input

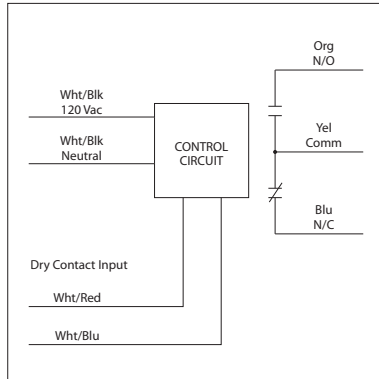

RIBD02BDC-DOB

Enclosed Delay on Break Relay 20 Amp SPDT,
Class 2 Dry Contact Input, 208-277 Vac Power
Input

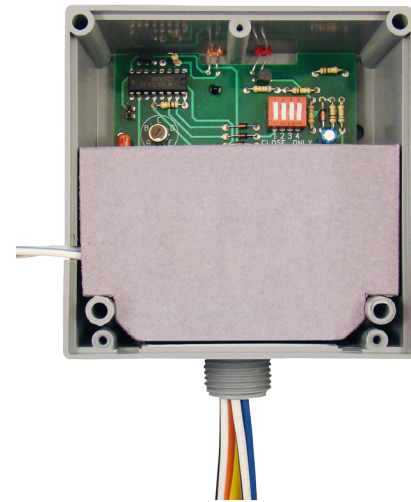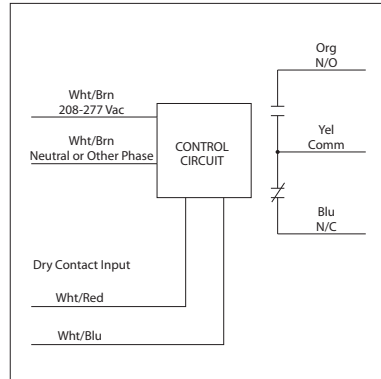

RELAYS



SPECIFICATIONS

- # Relays & Contact Type:** One (1) SPDT Continuous Duty Coil
- Expected Relay Life:** 10 million cycles minimum mechanical
- Operating Temperature:** -30 to 140° F
- Humidity Range:** 5 to 95% (noncondensing)
- Operate Time:** 18ms after time delay
- Relay Status:** Red LED On = Activated
- Time Delay Status:** Pink LED FLASHING = Timing / Relay Deactivated
- Timing Mode:** Delay On Break
- Timing Range:** 6 seconds - 20 minutes
- Timing Adjustment:** 4 position DIP switch for range selection and single turn potentiometer for timing adjustment within range
- Timing Tolerance:** Switches 1 & 2 = ±10%
Switches 3 & 4 = ±5%
- Timing Repeatability:** ±1%
- Temperature Timing Variance:** ±1%
- Voltage Timing Variance:** ±1%
- Recycle Time:** 750ms Maximum
- Dimensions:** 4.00" x 4.00" x 1.80" with .50" NPT nipple
- Wires:** 16", 600V Rated
- Approvals:** UL Listed, UL916, C-UL, CE, RoHS
- Housing Rating:** UL Accepted for Use in Plenum, NEMA 1
- Gold Flash:** No
- Override Switch:** No

- Contact Ratings:**
 - 20 Amp Resistive @ 277 Vac
 - 20 Amp Ballast @ 277 Vac
 - 16 Amp Electronic Ballast @ 277 Vac (N/O)
 - 10 Amp Tungsten @ 120 Vac (N/O)
 - 770 VA Pilot Duty @ 120 Vac
 - 1,110 VA Pilot Duty @ 277 Vac
 - 2 HP @ 277 Vac
 - 1 HP @ 120 Vac


- Power Input:**
 - 42 mA @ 120 Vac (RIBD01BDC-DOB)
 - 62 mA @ 208-277 Vac (RIBD02BDC-DOB)

- Notes:**
 - **Dry Contact Input Operation:** Open White/Red wire and White/Blue wire to start timing. Relay will activate after timing sequence has ended.
 - If more than one dry contact RIB® shares a single dry contact input, White/Blue must be common.

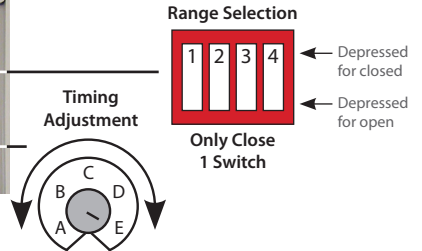


TIMING TABLE						
Switch Ranges	Close Dip Switch	Potentiometer Setting				
		A ← B	B ← C	C ← D	D ← E	
6s-20s	1	6s	9s	13s	16s	20s
22s-1min15s	2	22s	36s	50s	1min4s	1min15s
1min30s-5min	3	1min30s	2min10s	3min20s	4min16s	5min
6min-20min	4	6min	9min	13min20s	17min20s	20min


Delay on Make

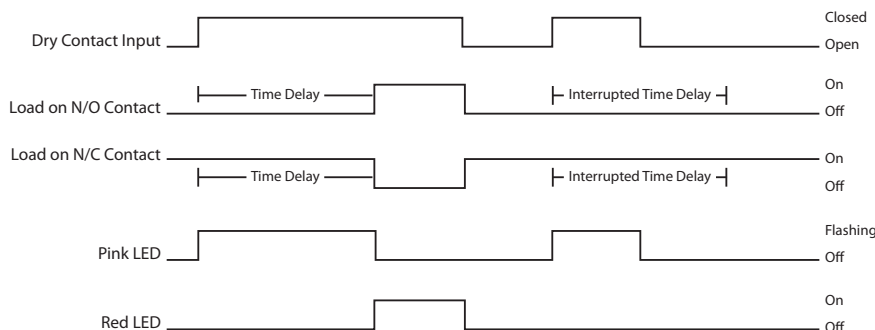

Wiring for Load on N/O Contact




Wiring for Load on N/C Contact

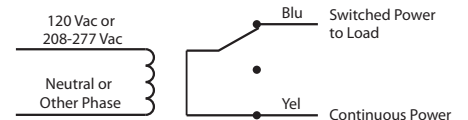

DRY CONTACT INPUT TRACK MOUNT RELAYS




RIBM01ZNDK

4.00" Track Mount Relay 30 Amp DPDT, Class 2
Dry Contact Input, 120 Vac Power Input

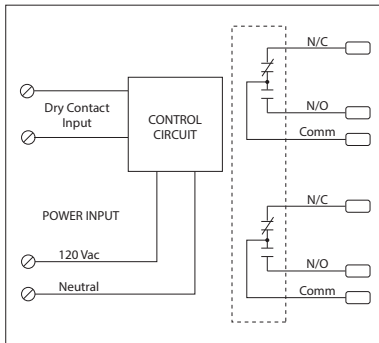

RIBM02ZNDK

4.00" Track Mount Relay 30 Amp DPDT, Class 2
Dry Contact Input, 208-277 Vac Power Input

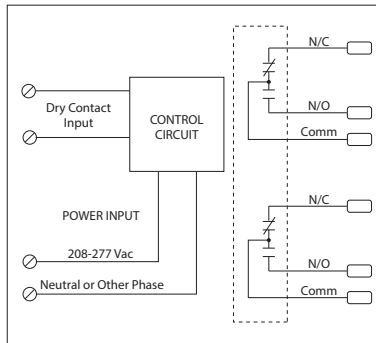

RELAYS

SPECIFICATIONS

Relays & Contact Type: One (1) DPDT Continuous Duty Coil
Expected Relay Life: 10 million cycles minimum mechanical
Operating Temperature: -30 to 140° F
Humidity Range: 5 to 95% (noncondensing)
Operate Time: 18ms
Relay Status: Red LED On = Activated
Power Status: Green LED On = Activated
Dimensions: 2.875" x 4.000" x 1.750"
Track Mount: 4.000"; See MT4 Series on page 152
MT4 Mounting Track Sold Separately
Approvals: UL Component Recognized, UL916
 C-UL, CE, RoHS
Gold Flash: Yes
Override Switch: No

Contact Ratings:
 30 Amp Resistive @ 300 Vac 770 VA @ 120 Vac
 25 Amp Resistive @ 28 Vdc 1158 VA @ 240 Vac
 15 Amp Resistive @ 600 Vac 1109 VA @ 277 Vac
 3 HP @ 480-600 Vac 1640 VA @ 480 Vac
 2 HP @ 240/277 Vac NEMA B600 Pilot Duty
 1 HP @ 120 Vac
 20 Amp Ballast @ 277-480 Vac
Not rated for Electronic Ballast



Power Input:
 95 mA @ 120 Vac (RIBM01ZNDK)
 95 mA @ 208-277 Vac (RIBM02ZNDK)

Notes:
 • **Dry Contact Input Operation:**
 Close dry contact to activate relay.

DRY CONTACT INPUT TRACK MOUNT RELAYS

RIBM013PNDK

4.00" Track Mount Relay 30 Amp 3PDT, Class 2
Dry Contact Input, 120 Vac Power Input

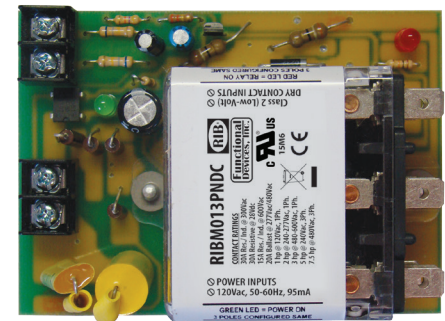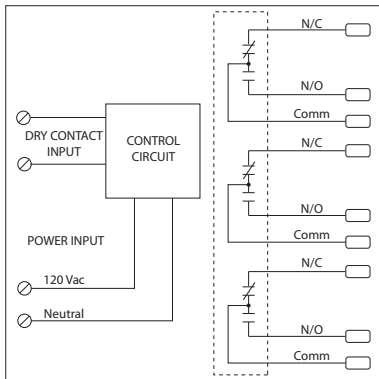

SPECIFICATIONS

Relays & Contact Type: One (1) 3PDT Continuous Duty Coil
Expected Relay Life: 10 million cycles minimum mechanical
Operating Temperature: -30 to 140° F
Humidity Range: 5 to 95% (noncondensing)
Operate Time: 20ms
Relay Status: Red LED On = Activated
Power Status: Green LED On = Activated
Dimensions: 2.875" x 4.000" x 1.750"
Track Mount: 4.000"; See MT4 Series on page 152
MT4 Mounting Track Sold Separately
Approvals: UL Component Recognized, UL916
 C-UL, CE, RoHS
Gold Flash: No
Override Switch: No

Contact Ratings:
 30 Amp Resistive @ 300 Vac Heavy Pilot Duty
 30 Amp Resistive @ 28 Vdc 770 VA @ 120 Vac, 1 Phase
 15 Amp Resistive @ 600 Vac 1158 VA @ 240 Vac, 1 Phase
 7.5 HP @ 480 Vac, 3 Phase 1109 VA @ 277 Vac, 1 Phase
 5 HP @ 240 Vac, 3 Phase 1640 VA @ 480 Vac, 1 Phase
 3 HP @ 480-600 Vac, 1 Phase 1466 VA @ 240 Vac, 3 Phase
 2 HP @ 240/277 Vac, 1 Phase 2122 VA @ 480 Vac, 3 Phase
 1 HP @ 120 Vac, 1Phase
 20 Amp Ballast @ 277-480 Vac
Not rated for Electronic Ballast

Power Input:
 95 mA @ 120 Vac

Notes:
 • **Dry Contact Input Operation:**
 Close dry contact to activate relay.

NETWORK COMPATIBLE RELAYS

LonMark® | BACnet® | Wi-Fi | Modbus®



Made in the U.S.A.
Meets the "Buy American" provisions of Section 1605 of the American Recovery and Reinvestment Act of 2009 (ARRA).

Use These Devices When a More Expensive Multi-Output Controller is Too Much for the Job

- UL Listed
- LonWorks®BACnet®, Wi-Fi, and Modbus® protocol
- Analog input
- Analog output
- Binary output
- Binary input
- Thermistor inputs available
- On-board current sensors available
- Panel mount
- Enclosed versions
- NEMA 4X available

LONMARK® DEVICES

MODEL #	UL	RELAY OUTPUT	DRY CONTACT BINARY INPUT	ANALOG INPUT	INTERNAL CURRENT SENSOR FEEDBACK	PRECON® THERMISTOR INPUT	DEVICE POWER		CONTACTS	OVERRIDE SWITCH	NOTES	SPEC PAGE
							AC/DC	AC				
RIBTW2401B-LN	•	1	1				24	120	SPDT			66
RIBTW2402B-LN	•	1	1				24	208-277	SPDT			66
RIBTW2401SB-LN	•	1	1				24	120	SPST	1		67
RIBTW2402SB-LN	•	1	1				24	208-277	SPST	1		67
RIBMNWX2401SB-LN	•	1			•		24	120	SPST	1		68
RIBTWX2401SB-LN	•	1			•		24	120	SPST	1		68
RIBMNWX2402SB-LN	•	1			•		24	208-277	SPST	1		69
RIBTWX2402SB-LN	•	1			•		24	208-277	SPST	1		69
RIBMW245B-LNAI	•	1	1	1			24		SPST	1		70
RIBTW245B-LNAI	•	1	1	1			24		SPST	1		70
RIBMW245B-LNT2	•	1	1			10kΩ Type 2	24		SPST	1		71
RIBTW245B-LNT2	•	1	1			10kΩ Type 2	24		SPST	1		71
RIBMW245B-LNT3	•	1	1			10kΩ Type 3	24		SPST	1		71
RIBTW245B-LNT3	•	1	1			10kΩ Type 3	24		SPST	1		71

BACNET® DEVICES

MODEL #	UL	RELAY OUTPUT	DRY CONTACT BINARY INPUT	ANALOG INPUT	ANALOG OUTPUT	ACCUMULATOR INPUT	INTERNAL CURRENT SENSOR FEEDBACK	PRECON® THERMISTOR INPUT	DEVICE POWER		CONTACTS	OVERRIDE SWITCH	NOTES	SPEC PAGE
									AC/DC	AC				
RIBTW2401B-BC	•	1	1						24	120	SPDT	#		72
RIBTW2402B-BC	•	1	1						24	208-277	SPDT	#		72
RIBMNWX2401B-BC	•	1	1				•		24	120	SPDT	#		73
RIBTWX2401B-BC	•	1	1				•		24	120	SPDT	#		73
RIBMNWX2402B-BC	•	1	1				•		24	208-277	SPDT	#		74
RIBTWX2402B-BC	•	1	1				•		24	208-277	SPDT	#		74
RIBMNW24B-BCAI	•	1	2	1				10kΩ Type 2 or 3	24		SPDT	#		75
RIBTW24B-BCAI	•	1	2	1				10kΩ Type 2 or 3	24		SPDT	#		75
RIBTW24B-BCAO	•	1	2	1	1			10kΩ Type 2 or 3	24		SPDT	#	NEW	76
RIBMNWD12-BCDI			12						24					77
RIBMNWD12-BC			12			2			24					78
RIBMW24B-44-BC	•	4	4						24		SPDT	#		79

WI-FI DEVICES

MODEL #	UL	RELAY OUTPUT	DRY CONTACT BINARY INPUT	UNIVERSAL INPUT	DEVICE POWER		CONTACTS	OVERRIDE SWITCH	NOTES	SPEC PAGE	
					AC/DC	AC					
RIBTW24B-WI-N4	•	1	1			24	SPDT	#	NEW	80	
RIBTW2401B-WIUI-N4	•	1	1	2		24	120	SPDT	#	NEW	81

MODBUS® DEVICES

MODEL #	UL	RELAY OUTPUT	DRY CONTACT BINARY INPUT	ANALOG INPUT	INTERNAL CURRENT SENSOR FEEDBACK	PRECON® THERMISTOR INPUT	DEVICE POWER		CONTACTS	OVERRIDE SWITCH	NOTES	SPEC PAGE
							AC/DC	AC				
RIBMNW24B-MBAI	•	1	2	1		10kΩ Type 2	24		SPDT	#		82
RIBTW24B-MBAI	•	1	2	1		10kΩ Type 2	24		SPDT	#		82


UL = UL Listed : UL916 Energy Management, USA & Canada
Precon® is a registered trademark of Kele and Associates.

= Coil Side Relay Override (requires unit to be powered)

NETWORK COMPATIBLE RELAYS



RIBTW2401B-LN

LonWorks® Twisted-Pair FT-10 Network Enclosed Dual I/O Device: One Binary Output (20 Amp Relay SPDT), One Binary Input (Dry Contact Class 2); 24 Vac/dc or **120 Vac Power Input**

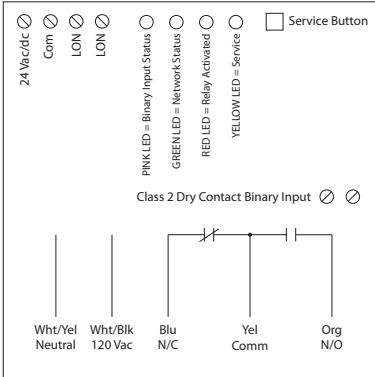

RIBTW2402B-LN

LonWorks® Twisted-Pair FT-10 Network Enclosed Dual I/O Device: One Binary Output (20 Amp Relay SPDT), One Binary Input (Dry Contact Class 2); 24 Vac/dc or **208-277 Vac Power Input**

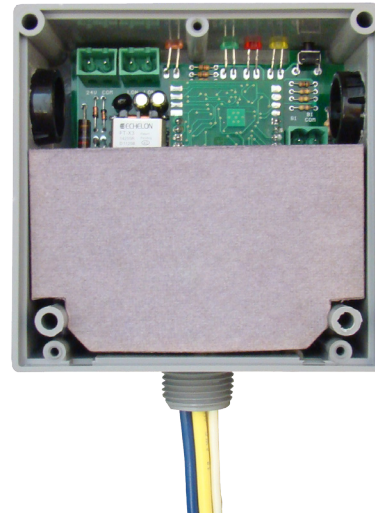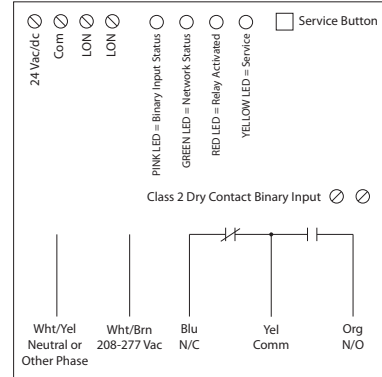

SPECIFICATIONS


- # Relays & Contact Type:** One (1) SPDT Continuous Duty Coil
- Expected Relay Life:** 10 million cycles minimum mechanical
- Operating Temperature:** -30 to 140° F
- Humidity Range:** 5 to 95% (noncondensing)
- Operate Time:** 18ms
- Green LED:** Network Status
- Red LED:** Relay Status
- Yellow LED:** Service Status
- Pink LED:** Binary Input Status
- Dimensions:** 4.00" x 4.00" x 1.80" with .50" NPT Nipple
- Wires:** 16", 600V Rated
- Approvals:** FCC, LonMark®, CE, RoHS, UL Listed, UL916, C-UL
- Housing Rating:** UL Accepted for Use in Plenum, NEMA 1
- Gold Flash:** No
- Override Switch:** No

- Contact Ratings:**
 - 20 Amp Resistive @ 277 Vac
 - 20 Amp Ballast @ 120/277 Vac (N/O)
 - 20 Amp Ballast @ 277 Vac (N/C)
 - 16 Amp Electronic Ballast @ 277 Vac (N/O)
 - 10 Amp Tungsten @ 120 Vac (N/O)
 - 1110 VA Pilot Duty @ 277 Vac
 - 770 VA Pilot Duty @ 120 Vac
 - 2 HP @ 277 Vac
 - 1 HP @ 120 Vac
- Power Input Ratings:**
 - 111 mA @ 24 Vac
 - 96 mA @ 120 Vac (RIBTW2401B-LN)
 - 105 mA @ 208-277 Vac (RIBTW2402B-LN)
 - 81 mA @ 24 Vdc

- Power Input:**
 - 24 Vac/dc ; 120 Vac ; 50-60 Hz (RIBTW2401B-LN)
 - 24 Vac/dc ; 208-277 Vac ; 50-60 Hz (RIBTW2402B-LN)

- Notes:**
 - Order with P1 option by adding "P1" to end of model number. The P1 option is pre-programmed to allow dry contact binary input to command the relay. Contact closure on the BI will activate relay.
 - When connecting 24 Vac to both the RIB(s) and a half-wave device, damage to device can occur.
 - Option 1: Use separate transformers for each device.
 - Option 2: Add diode between devices, see Option 2 note below. ^^

- Channel:** TP/FT-10
- Transceiver Type:** FT5000 Smart Transceiver
- Transceiver Compatibility:** FT3120 / FT3150, FTT-10 / FTT-10A, and LPT-10 / LPT-11 Transceivers
- Functional Blocks:**
 - 0000 Node Object
 - 0004 Closed Loop Actuator Object
 - 0001 Open Loop Sensor Object
- Downloadable Files:** PDF, XIF, APB, VSS and NXE available on website.

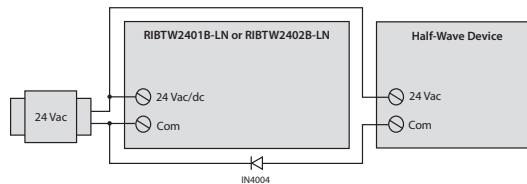


^^ Option 2: Add diode on 24 Vac power (Com) interconnection between devices. Band on diode faces towards RIB(s).

DESCRIPTION	SNVT NAME	SNVT TYPE
Command to open/close relay	nvi Value	SNVT_switch
Command status of relay	nvo Value Fb	SNVT_switch
Default state of relay on/off	nci Default	SNVT_switch
Communication timer	nci Max Receive T	SNVT_elapsed_tm
Status of Binary Input	nvo Value	SNVT_switch
Invert status of Binary Input	nci Invert	SNVT_lev_disc
Max time between updates	nci Max Send T	SNVT_elapsed_tm
Min time between updates	nci Min Send T	SNVT_elapsed_tm

The relay will go to the default state when the communication timer times out. Setting the timer value to zero will cause the communication to never time out.


It is recommended to put a value in nci Max Send T to ensure the RIB re-synchronizes itself on the network after power loss. It is the responsibility of the user to ensure this value does not cause conflicts in network traffic. (No value = No "heartbeat" updates / no re-synchronization; Low Value = Many updates but may cause many traffic collisions; High value = Few updates but many less collisions.)

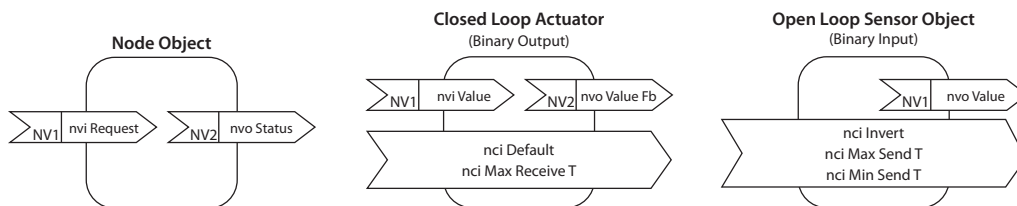

NETWORK COMPATIBLE RELAYS



RIBTW2401SB-LN

LonWorks® Twisted-Pair FT-10 Network Enclosed Dual I/O Device: One Binary Output (20 Amp Relay SPST + Override), One Binary Input (Dry Contact, Class 2); 24 Vac/dc or **120 Vac Power Input**

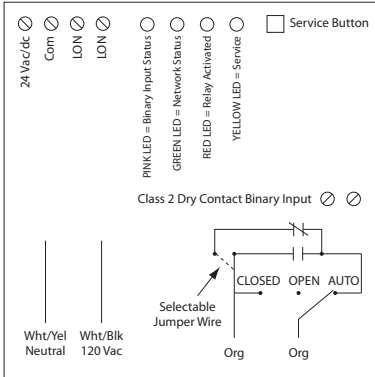

RIBTW2402SB-LN

LonWorks® Twisted-Pair FT-10 Network Enclosed Dual I/O Device: One Binary Output (20 Amp Relay SPST + Override), One Binary Input (Dry Contact, Class 2); 24 Vac/dc or **208-277 Vac Power Input**

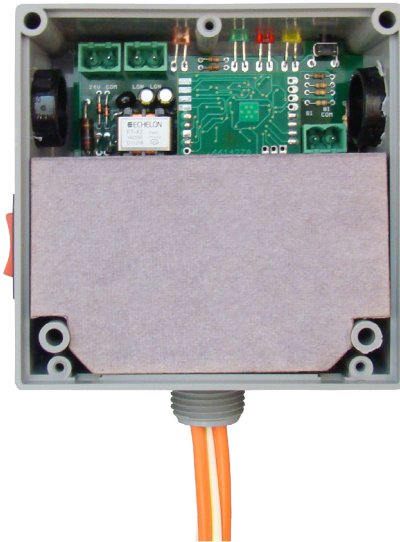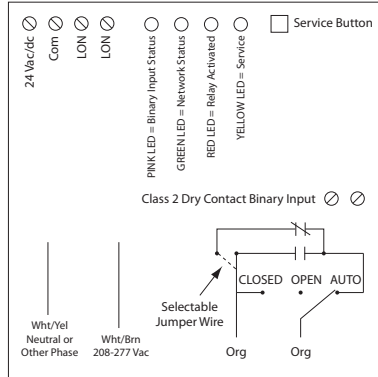

RELAYS


SPECIFICATIONS

- # Relays & Contact Type:** One (1) SPST Continuous Duty Coil
- Expected Relay Life:** 10 million cycles minimum mechanical
- Operating Temperature:** -30 to 140° F
- Humidity Range:** 5 to 95% (noncondensing)
- Operate Time:** 18ms
- Green LED:** Network Status
- Red LED:** Relay Status
- Yellow LED:** Service Status
- Pink LED:** Binary Input Status
- Dimensions:** 4.00" x 4.00" x 1.80" with .50" NPT Nipple
- Wires:** 16", 600V Rated
- Approvals:** FCC, LonMark®, CE, RoHS
UL Listed, UL916, C-UL
- Housing Rating:** UL Accepted for Use in Plenum, NEMA 1
- Gold Flash:** No
- Override Switch:** Yes
- Channel:** TP/FT-10
- Transceiver Type:** FT5000 Smart Transceiver
- Transceiver Compatibility:** FT3120 / FT3150, FTT-10 / FTT-10A, and LPT-10 / LPT-11 Transceivers
- Functional Blocks:** 0000 Node Object
0004 Closed Loop Actuator Object
0001 Open Loop Sensor Object
- Downloadable Files:** PDF, XIF, APB, VSS and NXE available on website.

- Contact Ratings:**
20 Amp Resistive @ 277 Vac
20 Amp Ballast @ 120/277 Vac (N/O)
10 Amp Ballast @ 120/277 Vac Vac (N/C)
Not rated for Electronic Ballast
10 Amp Tungsten @ 120 Vac (N/O)
1110 VA Pilot Duty @ 277 Vac
770 VA Pilot Duty @ 120 Vac
2 HP @ 277 Vac
1 HP @ 120 Vac
- Power Input Ratings:**
111 mA @ 24 Vac (RIBTW2401SB-LN)
96 mA @ 120 Vac (RIBTW2401SB-LN)
105 mA @ 208-277 Vac (RIBTW2402SB-LN)
81 mA @ 24 Vdc

- Power Input:**
24 Vac/dc ; 120 Vac ; 50-60 Hz (RIBTW2401SB-LN)
24 Vac/dc ; 208-277 Vac ; 50-60 Hz (RIBTW2402SB-LN)
- Notes:**
 - **Order with P1 option by adding "-P1" to end of model number.** The P1 option is pre-programmed to allow dry contact binary input to command the relay. Contact closure on the BI will activate relay.
 - **When connecting 24 Vac to both the RIB(s) and a half-wave device, damage to device can occur.**
Option 1: Use separate transformers for each device.
Option 2: Add diode between devices, see Option 2 note below. ^^


DESCRIPTION	SNVT NAME	SNVT TYPE
Command to open/close relay	nvi Value	SNVT_switch
Command status of relay	nvo Value Fb	SNVT_switch
Default state of relay on/off	nci Default	SNVT_switch
Communication timer	nci Max Receive T	SNVT_elapsed_tm
Status of Binary Input	nvo Value	SNVT_switch
Invert status of Binary Input	nci Invert	SNVT_lev_disc
Max time between updates	nci Max Send T	SNVT_elapsed_tm
Min time between updates	nci Min Send T	SNVT_elapsed_tm

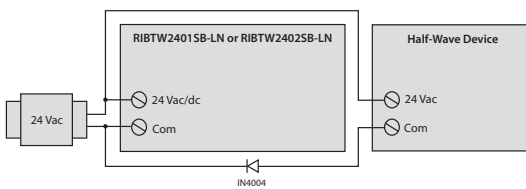

^^ Option 2: Add diode on 24 Vac power (Com) interconnection between devices. Band on diode faces towards RIB(s).

The relay will go to the default state when the communication timer times out. Setting the timer value to zero will cause the communication to never time out.

It is recommended to put a value in nci Max Send T to ensure the RIB re-synchronizes itself on the network after power loss. It is the responsibility of the user to ensure this value does not cause conflicts in network traffic. (No value = No "heartbeat" updates / no re-synchronization; Low Value = Many updates but may cause many traffic collisions; High value = Few updates but many less collisions.)

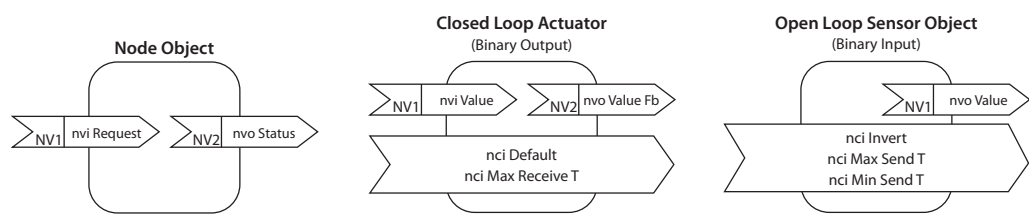



NETWORK COMPATIBLE RELAY / CURRENT SENSOR COMBOS

RIBMNWX2401SB-LN

2.75" Track Mount LonWorks® Twisted-Pair FT-10 Network Dual I/O Device; One Binary Output (20 Amp Relay SPST + Override); One Binary Input (Current Sensor 0.25 - 20 Amp, Relay Load Sensing), 24 Vac/dc or 120 Vac Power Input

RIBTWX2401SB-LN

Enclosed LonWorks® Twisted-Pair FT-10 Network Dual I/O Device; One Binary Output (20 Amp Relay SPST + Override); One Binary Input (Current Sensor 0.25 - 20 Amp, Relay Load Sensing), 24 Vac/dc or 120 Vac Power Input

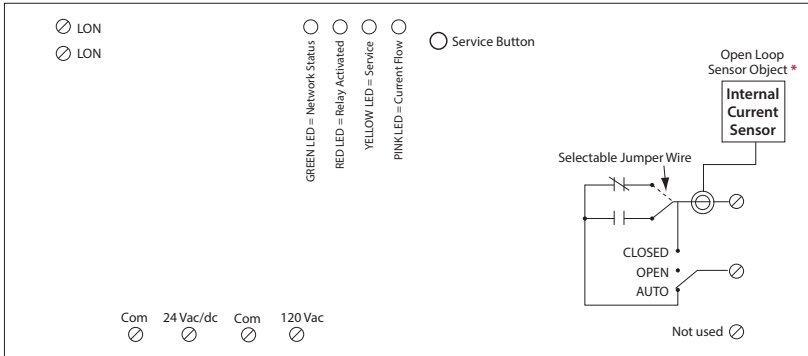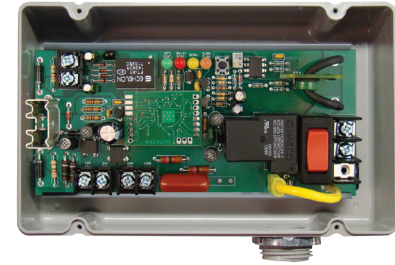

SPECIFICATIONS


- # Relays & Contact Type:** One (1) SPST Continuous Duty Coil
- Expected Relay Life:** 10 million cycles minimum mechanical
- Operating Temperature:** -30 to 140° F
- Humidity Range:** 5 to 95% (noncondensing)
- Operate Time:** 18ms
- Green LED:** Network Status
- Red LED:** Relay Status
- Yellow LED:** Service Status
- Dimensions:** 6.00" x 2.75" x 1.75" (RIBMNWX2401SB-LN)
7.00" x 4.28" x 2.00" with .75" NPT Nipple (RIBTWX2401SB-LN)
- Track Mount:** MT212-6 Mounting Track Provided
- Approvals:** FCC, LonMark®, CE, RoHS
UL Listed, UL916, C-UL
- Housing Rating:** UL Listed, NEMA 1, C-UL, CE Approved,
UL Accepted for Use in Plenum,
Also available NEMA 4 / 4X
- Gold Flash:** No
- Override Switch:** Yes
- Channel:** TP/FT-10
- Transceiver Type:** FT5000 Smart Transceiver
- Functional Blocks:** 0000 Node Object
0004 Closed Loop Actuator Object
0001 Open Loop Sensor Object
- Downloadable Files:** PDF, XIF, APB, VSS and NXE available on website.

- Contact Ratings:**
20 Amp Resistive @ 277 Vac
20 Amp Ballast @ 120/277 Vac (N/O)
10 Amp Ballast @ 120/277 Vac (N/C)
Not rated for Electronic Ballast
10 Amp Tungsten @ 120 Vac (N/O)
1110 VA Pilot Duty @ 277 Vac
770 VA Pilot Duty @ 120 Vac
2 HP @ 277 Vac
1 HP @ 120 Vac
- Power Input Ratings:**
105 mA @ 24 Vac
78 mA @ 24 Vdc
105 mA @ 120 Vac

- Current Sensor Range:**
0.25 - 20 Amps
Threshold fixed at .25 Amps.

- Notes:**
 - Normally Open or Normally Closed selected by yellow jumper wire.
 - Order NEMA 4 housing by adding "-N4" to end of model number. (RIBTWX2401SB-LN-N4)
 - Order with grey lid by adding "-GY" to end of model number. (RIBTWX2401SB-LN-GY)
 - Order NEMA 4 housing with grey lid by adding "-N4-GY" to end of model number. (RIBTWX2401SB-LN-N4-GY)
 - **When connecting 24 Vac to both the RIB(s) and a half-wave device, damage to device can occur.**
Option 1: Use separate transformers for each device.
Option 2: Add diode between devices, see Option 2 note below. ^^


DESCRIPTION	SNVT NAME	SNVT TYPE
Command to open/close relay	nvi Value	SNVT_switch
Command status of relay	nvo Value Fb	SNVT_switch
Default state of relay on/off	nci Default	SNVT_switch
Communication timer	nci Max Receive T	SNVT_elapsed_tm
Status of Binary Input	nvo Value	SNVT_switch
Invert status of Binary Input	nci Invert	SNVT_lev_disc
Max time between updates	nci Max Send T	SNVT_elapsed_tm
Min time between updates	nci Min Send T	SNVT_elapsed_tm

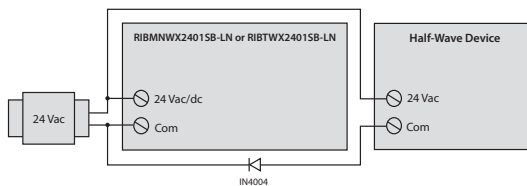

^^ Option 2: Add diode on 24 Vac power (Com) interconnection between devices. Band on diode faces towards RIB(s).

The relay will go to the default state when the communication timer times out. Setting the timer value to zero will cause the communication to never time out.

It is recommended to put a value in nci Max Send T to ensure the RIB re-synchronizes itself on the network after power loss. It is the responsibility of the user to ensure this value does not cause conflicts in network traffic. (No value = No "heartbeat" updates / no re-synchronization; Low Value = Many updates but may cause many traffic collisions; High value = Few updates but many less collisions.)

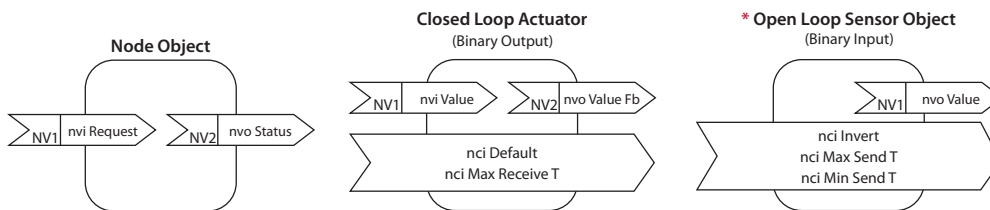



NETWORK COMPATIBLE RELAY / CURRENT SENSOR COMBOS

RIBMNX2402SB-LN

2.75" Track Mount LonWorks® Twisted-Pair FT-10 Network Dual I/O Device; One Binary Output (20 Amp Relay SPST + Override); One Binary Input (Current Sensor 0.25 - 20 Amp, Relay Load Sensing), 24 Vac/dc or 208-277 Vac Power Input

RIBTWX2402SB-LN

Enclosed LonWorks® Twisted-Pair FT-10 Network Dual I/O Device; One Binary Output (20 Amp Relay SPST + Override); One Binary Input (Current Sensor 0.25 - 20 Amp, Relay Load Sensing), 24 Vac/dc or 208-277 Vac Power Input

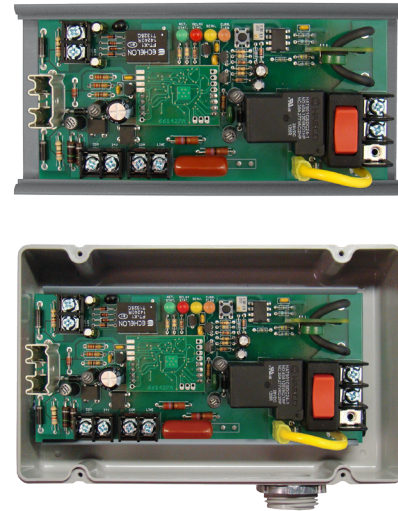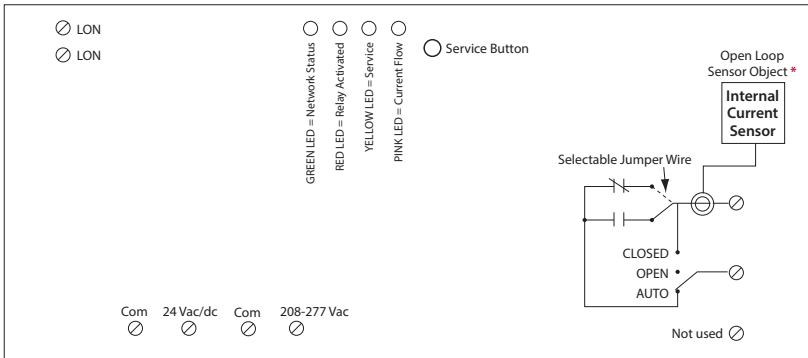

RELAYS

SPECIFICATIONS

Relays & Contact Type: One (1) SPST Continuous Duty Coil
Expected Relay Life: 10 million cycles minimum mechanical
Operating Temperature: -30 to 140° F
Humidity Range: 5 to 95% (noncondensing)
Operate Time: 18ms
Green LED: Network Status
Red LED: Relay Status
Yellow LED: Service Status
Dimensions: 6.00" x 2.75" x 1.75" (RIBMNX2402SB-LN)
 7.00" x 4.28" x 2.00" with .75" NPT Nipple (RIBTWX2402SB-LN)
Track Mount: MT212-6 Mounting Track Provided
Approvals: FCC, LonMark®, CE, RoHS
 UL Listed, UL916, C-UL
Housing Rating: UL Listed, NEMA 1, C-UL, CE Approved,
 UL Accepted for Use in Plenum,
 Also available NEMA 4 / 4X
Gold Flash: No
Override Switch: Yes

Contact Ratings:
 20 Amp Resistive @ 277 Vac
 20 Amp Ballast @ 120/277 Vac (N/O)
 10 Amp Ballast @ 120/277 Vac (N/C)
Not rated for Electronic Ballast
 10 Amp Tungsten @ 120 Vac (N/O)
 1110 VA Pilot Duty @ 277 Vac
 770 VA Pilot Duty @ 120 Vac
 2 HP @ 277 Vac
 1 HP @ 120 Vac

Power Input Ratings:
 105 mA @ 24 Vac
 78 mA @ 24 Vdc
 120 mA @ 208-277 Vac


Current Sensor Range:
 0.25 - 20 Amps
 Threshold fixed at .25 Amps.

Notes:

- Normally Open or Normally Closed selected by yellow jumper wire.
- Order NEMA 4 housing by adding "-N4" to end of model number. (RIBTWX2402SB-LN-N4)
- Order with grey lid by adding "-GY" to end of model number. (RIBTWX2402SB-LN-GY)
- Order NEMA 4 housing with grey lid by adding "-N4-GY" to end of model number. (RIBTWX2402SB-LN-N4-GY)
- **When connecting 24 Vac to both the RIB(s) and a half-wave device, damage to device can occur.**
Option 1: Use separate transformers for each device.
Option 2: Add diode between devices, see Option 2 note below. ^^

Channel: TP/FT-10
Transceiver Type: FT5000 Smart Transceiver
Functional Blocks: 0000 Node Object
 0004 Closed Loop Actuator Object
 0001 Open Loop Sensor Object
Downloadable Files: PDF, XIF, APB, VSS and NXE available on website.


DESCRIPTION	SNVT NAME	SNVT TYPE
Command to open/close relay	nvi Value	SNVT_switch
Command status of relay	nvo Value Fb	SNVT_switch
Default state of relay on/off	nci Default	SNVT_switch
Communication timer	nci Max Receive T	SNVT_elapsed_tm
Status of Binary Input	nvo Value	SNVT_switch
Invert status of Binary Input	nci Invert	SNVT_lev_disc
Max time between updates	nci Max Send T	SNVT_elapsed_tm
Min time between updates	nci Min Send T	SNVT_elapsed_tm

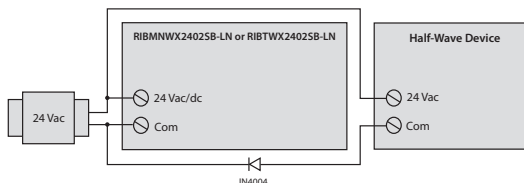

^^ Option 2: Add diode on 24 Vac power (Com) interconnection between devices. Band on diode faces towards RIB(s).

The relay will go to the default state when the communication timer times out. Setting the timer value to zero will cause the communication to never time out.

It is recommended to put a value in nci Max Send T to ensure the RIB re-synchronizes itself on the network after power loss. It is the responsibility of the user to ensure this value does not cause conflicts in network traffic. (No value = No "heartbeat" updates / no re-synchronization; Low Value = Many updates but may cause many traffic collisions; High value = Few updates but many less collisions.)

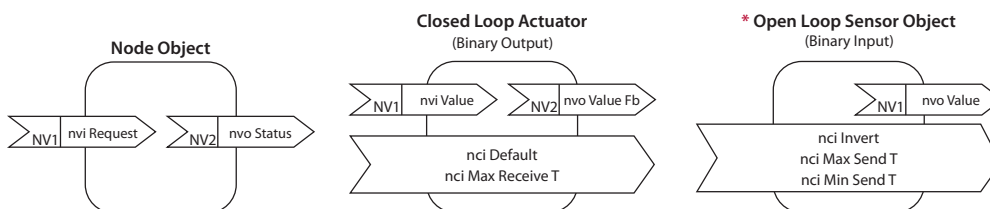



NETWORK COMPATIBLE RELAY / CURRENT SENSOR COMBOS

RIBMW24SB-LNAI



4.00" Track Mount LonWorks® Twisted-Pair FT-10 Network Three I/O Device; One Binary Output (20 Amp Relay SPST + Override), One Binary Input (Dry Contact, Class 2); One Analog Input (0-5Vdc / 0-10 Vdc); 24 Vac/dc Power Input

RIBTW24SB-LNAI

Enclosed LonWorks® Twisted-Pair FT-10 Network Enclosed Three I/O Device; One Binary Output (20 Amp Relay SPST + Override), One Binary Input (Dry Contact, Class 2); One Analog Input (0-5Vdc / 0-10 Vdc); 24 Vac/dc Power Input.



RELAYS

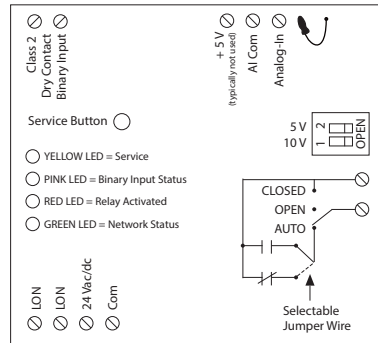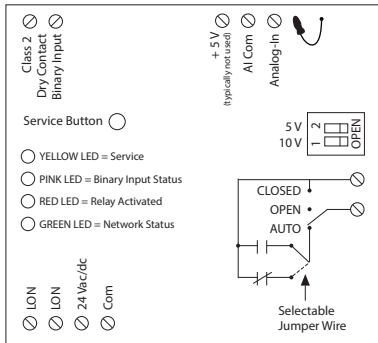


SPECIFICATIONS

- # Relays & Contact Type:** One (1) SPST Continuous Duty Coil
- Expected Relay Life:** 10 million cycles minimum mechanical
- Operating Temperature:** -30 to 140° F
- Humidity Range:** 5 to 95% (noncondensing)
- Operate Time:** 18ms
- Green LED:** Network Status
- Red LED:** Relay Status
- Yellow LED:** Service Status
- Pink LED:** Binary Input Status
- Dimensions:** 4.00" x 4.00" x 1.50" (RIBMW24SB-LNAI)
4.28" x 7.00" x 2.00" with .75" NPT Nipple (RIBTW24SB-LNAI)
- Track Mount:** MT4-4 Mounting Track Provided
- Approvals:** FCC, LonMark®, CE, RoHS
UL Listed, UL916, C-UL
- Housing Rating:** UL Listed, NEMA 1, C-UL, CE Approved, UL Accepted for Use in Plenum, Also available NEMA 4 / 4X
- Gold Flash:** No
- Override Switch:** Yes
- Channel:** TP/FT-10
- Transceiver Type:** FT5000 Smart Transceiver
- Transceiver Compatibility:** FT3120 / FT3150, FTT-10 / FTT-10A, and LPT-10 / LPT-11 Transceivers
- Functional Blocks:** 0000 Node Object
0004 Closed Loop Actuator Object
0001 Open Loop Sensor Object
0520 Analog Input
- Downloadable Files:** PDF, XIF, APB, VSS and NXE available on website.

- Contact Ratings:**
20 Amp Resistive @ 277 Vac
20 Amp Ballast @ 120/277 Vac (N/O)
10 Amp Ballast @ 120/277 Vac (N/C)
Not rated for Electronic Ballast
10 Amp Tungsten @ 120 Vac (N/O)
1110 VA Pilot Duty @ 277 Vac
770 VA Pilot Duty @ 120 Vac
2 HP @ 277 Vac
1 HP @ 120 Vac
- Power Input Ratings:**
111 mA @ 24 Vac
81 mA @ 24 Vdc

Power Input: 24 Vac/dc ; 50-60 Hz *


- Notes:**
- Order with P1 option by adding "P1" to end of model number. The P1 option is pre-programmed to allow dry contact binary input to command the relay. Contact closure on the BI will activate relay.
 - Normally Open or Normally Closed selected by yellow jumper wire.
 - Order NEMA 4 housing by adding "-N4" to end of model number. (RIBTW24SB-LNAI-N4)
 - Close DIP switch 1 for 0-5 Vdc Analog Input. Close DIP switch 2 for 0-10 Vdc Analog Input.
 - When connecting 24 Vac to both the RIB(s) and a half-wave device, damage to device can occur. Option 1: Use separate transformers for each device. Option 2: Add diode between devices, see Option 2 note below. ^^
 - See page 71 for -LNT2 or -LNT3 models if using a thermistor. If using a thermistor on the Analog Input, set DIP switches to the 0-5 Vdc setting. A look-up table must also be made.

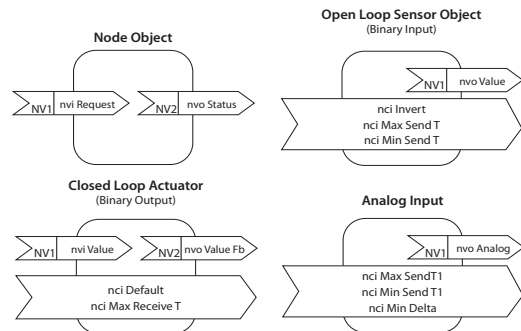

DESCRIPTION	SNVT NAME	SNVT TYPE
Command to open/close relay	nvi Value	SNVT_switch
Command status of relay	nvo Value Fb	SNVT_switch
Default state of relay on/off	nci Default	SNVT_switch
Communication timer	nci Max Receive T	SNVT_elapsed_tm
Status of Binary Input	nvo Value	SNVT_switch
Invert status of Binary Input	nci Invert	SNVT_lev_disc
Max time between updates	nci Max Send T	SNVT_elapsed_tm
Min time between updates	nci Min Send T	SNVT_elapsed_tm
Value of Analog-In	nvo Analog	SNVT_lev_percent
Max time between Analog updates	nci Max Send T1	SNVT_elapsed_tm
Min time between Analog updates	nci Min Send T1	SNVT_elapsed_tm
Min change in Analog before updates	nci Min Delta	SNVT_lev_percent

The relay will go to the default state when the communication timer times out. Setting the timer value to zero will cause the communication to never time out.


It is recommended to put a value in nci Max Send T to ensure the RIB re-synchronizes itself on the network after power loss. It is the responsibility of the user to ensure this value does not cause conflicts in network traffic. (No value = No "heartbeat" updates / no re-synchronization; Low Value = Many updates but may cause many traffic collisions; High value = Few updates but many less collisions.)

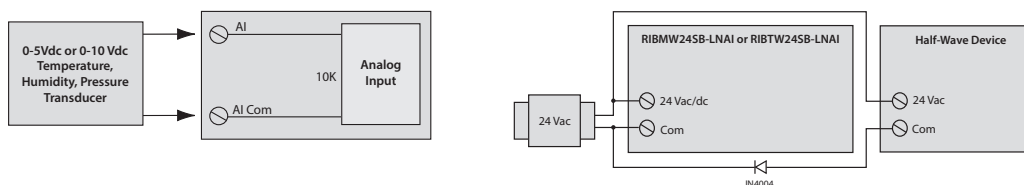

^^ Option 2: Add diode on 24 Vac power (Com) interconnection between devices. Band on diode faces towards RIB(s).



RIBMW24SB-LNT2

4.00" Track Mount LonWorks® Twisted-Pair FT-10 Network Three I/O Device; One Binary Output (20 Amp Relay SPST + Override), One Binary Input (Dry Contact, Class 2); Precon® Type 2 Thermistor Input; 24 Vac/dc Power Input

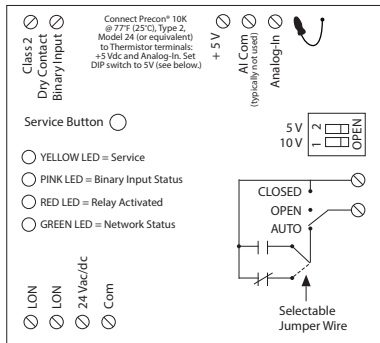

RIBTW24SB-LNT2

Enclosed LonWorks® Twisted-Pair FT-10 Network Three I/O Device; One Binary Output (20 Amp Relay SPST + Override), One Binary Input (Dry Contact, Class 2); Precon® Type 2 Thermistor Input; 24 Vac/dc Power Input

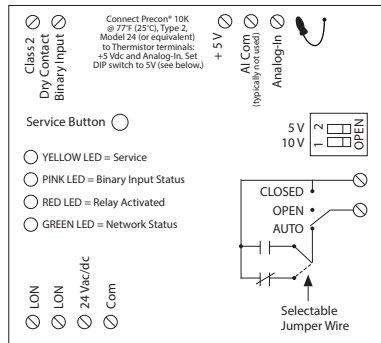

THERMISTOR INPUT

RELAYS

SPECIFICATIONS

- # Relays & Contact Type:** One (1) SPST Continuous Duty Coil
- Expected Relay Life:** 10 million cycles minimum mechanical
- Operating Temperature:** -30 to 140° F
- Humidity Range:** 5 to 95% (noncondensing)
- Operate Time:** 18ms
- Green LED:** Network Status
- Red LED:** Relay Status
- Yellow LED:** Service Status
- Pink LED:** Binary Input Status
- Dimensions:** 4.00" x 4.00" x 1.50" (RIBMW24SB-LNT2)
4.28" x 7.00" x 2.00" with .75" NPT Nipple (RIBTW24SB-LNT2)
- Track Mount:** MT4-4 Mounting Track Provided
- Approvals:** FCC, LonMark®, CE, RoHS
UL Listed, UL916, C-UL
- Housing Rating:** UL Listed, NEMA 1, C-UL, CE Approved,
UL Accepted for Use in Plenum,
Also available NEMA 4 / 4X
- Gold Flash:** No
- Override Switch:** Yes
- Channel:** TP/FT-10
- Transceiver Type:** FT5000 Smart Transceiver
- Transceiver Compatibility:** FT3120 / FT3150, FTT-10 / FTT-10A, and LPT-10 / LPT-11 Transceivers
- Functional Blocks:** 0000 Node Object
0004 Closed Loop Actuator Object
0001 Open Loop Sensor Object
1040 Temperature Sensor
- Downloadable Files:** PDF, XIF, APB, VSS and NXE available on website.


- Contact Ratings:**
20 Amp Resistive @ 277 Vac
20 Amp Ballast @ 120/277 Vac (N/O)
10 Amp Ballast @ 120/277 Vac (N/C)
Not rated for Electronic Ballast
10 Amp Tungsten @ 120 Vac (N/O)
1110 VA Pilot Duty @ 277 Vac
770 VA Pilot Duty @ 120 Vac
2 HP @ 277 Vac
1 HP @ 120 Vac

- Power Input Ratings:**
111 mA @ 24 Vac
81 mA @ 24 Vdc

- Power Input:**
24 Vac/dc ; 50/60 Hz ^

Notes:

- Order with P1 option by adding "-P1" to end of model number. The P1 option is pre-programmed to allow dry contact binary input to command the relay. Contact closure on the BI will activate relay.
- Normally Open or Normally Closed selected by yellow jumper wire.
- Order NEMA 4 housing by adding "-N4" to end of model number. (RIBTW24SB-LNT2-N4)
- 35 to 100°C range in one degree steps. -36°C indicates below range, 101°C indicates above range.
- When connecting 24 Vac to both the RIB(s) and a half-wave device, damage to device can occur.
Option 1: Use separate transformers for each device.
Option 2: Add diode between devices, see Option 2 note below. ^^
- Can be used with Precon® Type 3 Thermistor Input. Use suffix "-LNT3" instead of "LNT2" when ordering. Thermistor not included.

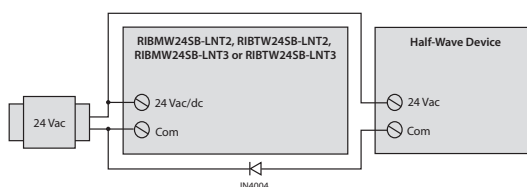


^^ Option 2: Add diode on 24 Vac power (Com) interconnection between devices. Band on diode faces towards RIB(s).

DESCRIPTION	SNVT NAME	SNVT TYPE
Command to open/close relay	nvi Value	SNVT_switch
Command status of relay	nvo Value Fb	SNVT_switch
Default state of relay on/off	nci Default	SNVT_switch
Communication timer	nci Max Receive T	SNVT_elapsed_tm
Status of Digital-In	nvo Value	SNVT_switch
Invert status of Digital-In	nci Invert	SNVT_lev_disc
Max time between updates	nci Max Send T	SNVT_elapsed_tm
Min time between updates	nci Min Send T	SNVT_elapsed_tm
T2 Thermistor input *	nvo HVACTemp	SNVT_temp_p
Max time between Temperature updates	nci Max Send T1	SNVT_elapsed_tm
Min time between Temperature updates	nci Min Send T1	SNVT_elapsed_tm
Min change in Temperature before updates	nci Min Delta	SNVT_temp_p

The relay will go to the default state when the communication timer times out. Setting the timer value to zero will cause the communication to never time out.


It is recommended to put a value in nci Max Send T to ensure the RIB re-synchronizes itself on the network after power loss. It is the responsibility of the user to ensure this value does not cause conflicts in network traffic. (No value = No "heartbeat" updates / no re-synchronization; Low Value = Many updates but may cause many traffic collisions; High value = Few updates but many less collisions.)

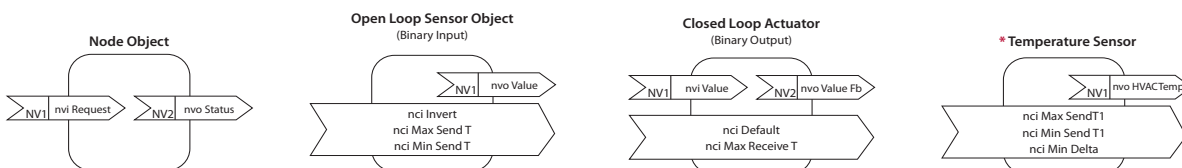

NETWORK COMPATIBLE RELAYS



RIBTW2401B-BC

Enclosed BACnet® MS/TP Network Relay Device; One Binary Output (20 Amp Relay SPDT + Override); One Binary Input (Dry Contact, Class 2); 24 Vac/dc or 120 Vac Power Input, Optional End of Line Resistor (EOL) Included.

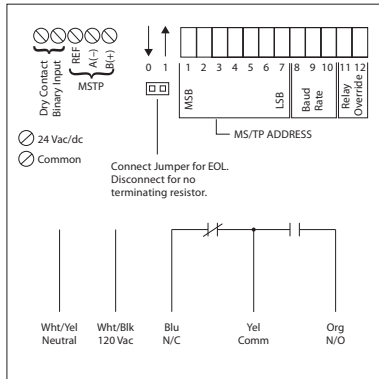

RIBTW2402B-BC

Enclosed BACnet® MS/TP Network Relay Device; One Binary Output (20 Amp Relay SPDT + Override); One Binary Input (Dry Contact, Class 2); 24 Vac/dc or 208-277 Vac Power Input, Optional End of Line Resistor (EOL) Included.

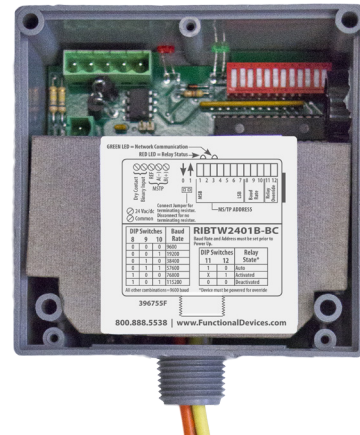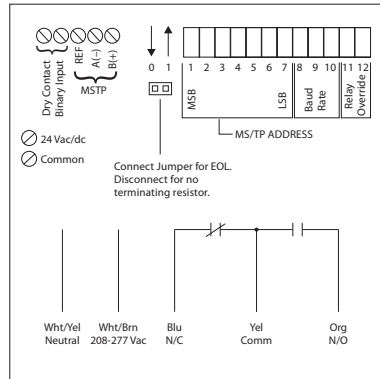

SPECIFICATIONS

- # Relays & Contact Type:** One (1) SPDT Continuous Duty Coil
- Expected Relay Life:** 10 million cycles minimum mechanical
- Operating Temperature:** -30 to 140° F
- Humidity Range:** 5 to 95% (noncondensing)
- Operate Time:** 18ms
- Green LED:** Network Communication
- Red LED:** Relay Status
- Dimensions:** 4.00" x 4.00" x 1.80" with .50" NPT Nipple
- Wires:** 16", 600V Rated
- Approvals:** CE, UL Listed, UL916, C-UL, RoHS
- Housing Rating:** UL Accepted for Use in Plenum, NEMA 1
- Gold Flash:** No
- Relay Override Switch:** DIP Switch Control
- Network Media:** Twisted Pair 22-24AWG, shielded recommended
- Terminations:** Functional Devices product installed at both ends of the MS/TP network – Use 120 Ω end of line resistors. All other cases – Follow instructions from the device installed at the end of the MS/TP network.
- Polarity:** Network is polarity sensitive
- Baud Rate:** 9600, 19200, 38400, 57600, 76800, 115200 (DIP Switch Selectable)

- Contact Ratings:**
 - 20 Amp Resistive @ 277 Vac
 - 20 Amp Ballast @ 277 Vac
 - 16 Amp Electronic Ballast @ 277 Vac (N/O)
 - 10 Amp Tungsten @ 120 Vac (N/O)
 - 1110 VA Pilot Duty @ 277 Vac
 - 770 VA Pilot Duty @ 120 Vac
 - 2 HP @ 277 Vac
 - 1 HP @ 120 Vac
- Power Input Ratings:**
 - 81 mA @ 24 Vdc
 - 111 mA @ 24 Vac
 - 96 mA @ 120 Vac (RIBTW2401B-BC)
 - 121 mA @ 208-277 Vac (RIBTW2402B-BC)
- Power Input:**
 - 24 Vac/dc; 120 Vac; 50/60 Hz (RIBTW2401B-BC)
 - 24 Vac/dc; 208-277 Vac; 50/60 Hz (RIBTW2402B-BC)
- Notes:**
 - When connecting 24 Vac to both the RIB(s) and a half-wave device, damage to device can occur.
 - Option 1: Use separate transformers for each device.
 - Option 2: Add diode between devices, see Option 2 note below. ^^

- BACnet® Details:**
 - MS/TP Address & Baud Rate must be set prior to power up via DIP switches.
 - Device ID will default to 277XXX where XXX is the MS/TP Address.
- Examples:
 - MS/TP Address - 004
Device ID - 277004
 - MS/TP Address - 121
Device ID - 277121
- Device ID can be changed via network command. Once changed, it will no longer default to 277XXX. (MS/TP Address & Device ID must be unique.)
- This model utilizes: BO 1 (Relay output), BI 1 (Dry contact binary input), BI 2 (Internal current sensor input)
- Device Instance changed via Object Identifier Property of Device Object
- PIC Statement available on website. http://www.functionaldevices.com/pdf/pics/RIBTW240x8-BC_PICS.pdf
- Or scan QR code with your smart phone.




DIP SWITCHES*			BAUD RATE
8	9	10	9600
0	0	0	19200
0	0	1	38400
0	1	0	57600
1	0	0	76800
1	0	1	115200

DIP SWITCHES*		RELAY STATE**
11	12	Auto
1	0	Override on
0	0	Override off

* 0 = Open; 1 = Closed
** Device must be powered for override

All other combinations=9600 baud

• Dry contact binary input is a general purpose input that is not tied to the relay internally. Can be used with any dry contact switching device, such as a current sensor, to report back to the network.

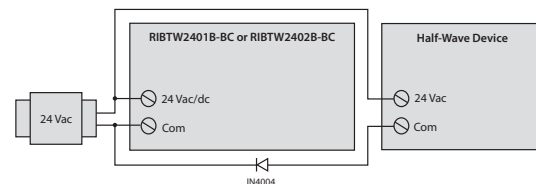

^^ Option 2: Add diode on 24 Vac power (Com) interconnection between devices. Band on diode faces towards RIB(s).




NETWORK COMPATIBLE RELAY / CURRENT SENSOR COMBOS

RIBMNX2401B-BC

2.75" Track Mount BACnet® MS/TP Network Relay Device; One Binary Output (20 Amp Relay SPDT + Override); Two Binary Inputs (One Current Sensor 0.25 - 20 Amp, Relay Load Sensing & One Dry Contact Binary Input), 24 Vac/dc or 120 Vac Power Input, Optional End of Line Resistor (EOL) Included.

RIBTWX2401B-BC

Enclosed BACnet® MS/TP Network Relay Device; One Binary Output (20 Amp Relay SPDT + Override); Two Binary Inputs (One Current Sensor 0.25 - 20 Amp, Relay Load Sensing & One Dry Contact Binary Input), 24 Vac/dc or 120 Vac Power Input, Optional End of Line Resistor (EOL) Included.

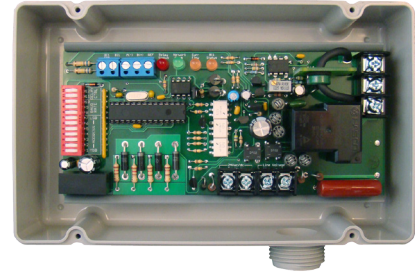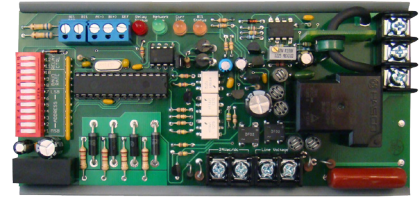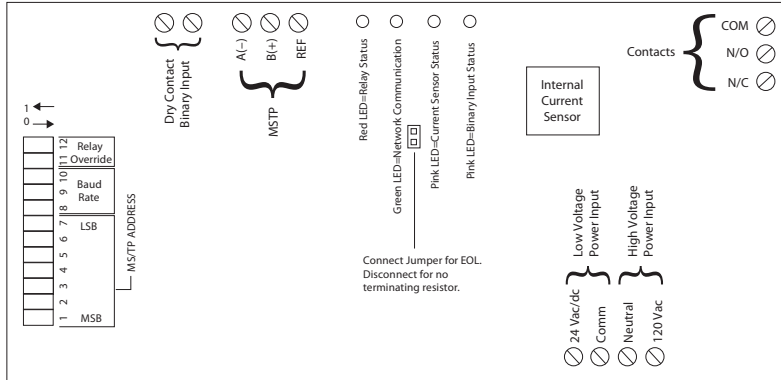

RELAYS

SPECIFICATIONS

- # Relays & Contact Type:** One (1) SPDT Continuous Duty Coil
- Expected Relay Life:** 10 million cycles minimum mechanical
- Operating Temperature:** -30 to 140° F
- Humidity Range:** 5 to 95% (noncondensing)
- Operate Time:** 18ms
- Network Communication:** Green LED
- Relay Status:** Red LED On = Activated
- Current Sensor Status:** Pink LED On = Activated
- Binary Input Status:** Pink LED On = Activated
- Dimensions:** 6.00" x 2.75" x 1.75" (RIBMNX2401B-BC)
4.28" x 7.00" x 2.00" with .75" NPT Nipple (RIBTWX2401B-BC)
- Track Mount:** MT212-6 Mounting Track Provided
- Approvals:** CE, UL Listed, UL916, C-UL, RoHS
- Housing Rating:** UL Listed, NEMA 1, C-UL, CE Approved, UL Accepted for Use in Plenum, Also available NEMA 4 / 4X
- Gold Flash:** No
- Relay Override Switch:** DIP Switch Control
- Network Media:** Twisted Pair 22-24AWG, shielded recommended
- Terminations:** Functional Devices product installed at both ends of the MS/TP network – Use 120 Ω end of line resistors. All other cases – Follow instructions from the device installed at the end of the MS/TP network.
- Polarity:** Network is polarity sensitive
- Baud Rate:** 9600, 19200, 38400, 57600, 76800, 115200 (DIP Switch Selectable)

- Contact Ratings:**
 - 20 Amp Resistive @ 277 Vac
 - 20 Amp Ballast @ 277 Vac
 - 16 Amp Electronic Ballast @ 277 Vac (N/O)
 - 10 Amp Tungsten @ 120 Vac (N/O)
 - 1110 VA Pilot Duty @ 277 Vac
 - 770 VA Pilot Duty @ 120 Vac
 - 2 HP @ 277 Vac
 - 1 HP @ 120 Vac

- Power Input:** 24 Vac/dc ; 120 Vac ; 50/60 Hz

- Power Input Ratings:**
 - 105 mA @ 24 Vac
 - 78 mA @ 24 Vdc
 - 105 mA @ 120 Vac

- Current Sensor Range:** 0.25 - 20 Amps
Threshold fixed at .25 Amps.

Notes:

- Device can be powered by either 24 Vac/dc or 120 Vac, but not both.
- Order NEMA 4 housing by adding "-N4" to end of model number. (RIBTWX2401B-BC-N4)
- Order with grey lid by adding "-GY" to end of model number. (RIBTWX2401B-BC-GY)
- Order NEMA 4 housing with grey lid by adding "-N4-GY" to end of model number. (RIBTWX2401B-BC-N4-GY)
- When connecting 24 Vac to both the RIB(s) and a half-wave device, damage to device can occur. Option 1: Use separate transformers for each device. Option 2: Add diode between devices, see Option 2 note below. ^^

BACnet® Details:

- MS/TP Address & Baud Rate must be set prior to power up via DIP switches.
- Device ID will default to 277XXX where XXX is the MS/TP Address.

Examples:

MS/TP Address - 004
Device ID - 277004
MS/TP Address - 121
Device ID - 277121

- Device ID can be changed via network command. Once changed, it will no longer default to 277XXX. (MS/TP Address & Device ID must be unique.)
- This model utilizes: BO 1 (Relay output), BI 1 (Dry contact binary input), BI 2 (Internal current sensor input)
- Device Instance changed via Object Identifier Property of Device Object
- PIC Statement available on website. http://www.functionaldevices.com/pdf/pics/RIBxWX240xB-BC_PICS.pdf
- Or scan QR code with your smart phone.

DIP SWITCHES*			BAUD RATE
8	9	10	
0	0	0	9600
0	0	1	19200
0	1	0	38400
0	1	1	57600
1	0	0	76800
1	0	1	115200


All other combinations=9600 baud

DIP SWITCHES*		RELAY STATE**
11	12	
1	0	Auto
X	1	Override on
0	0	Override off

* 0 = Open ; 1 = Closed

** Device must be powered for override

• Dry contact binary input is a general purpose input that is not tied to the relay internally. Can be used with any dry contact switching device, such as a current sensor, to report back to the network.

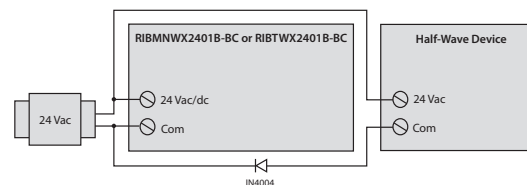

^^ Option 2: Add diode on 24 Vac power (Com) interconnection between devices. Band on diode faces towards RIB(s).





NETWORK COMPATIBLE RELAY / CURRENT SENSOR COMBOS

RIBMNWX2402B-BC

2.75" Track Mount BACnet® MS/TP Network Relay Device; One Binary Output (20 Amp Relay SPDT + Override); Two Binary Inputs (One Current Sensor 0.25 - 20 Amp, Relay Load Sensing & One Dry Contact Binary Input), 24 Vac/dc or 208-277 Vac Power Input, Optional End of Line Resistor (EOL) Included.

RIBTWX2402B-BC

Enclosed BACnet® MS/TP Network Relay Device; One Binary Output (20 Amp Relay SPDT + Override); Two Binary Inputs (One Current Sensor 0.25 - 20 Amp, Relay Load Sensing & One Dry Contact Binary Input), 24 Vac/dc or 208-277 Vac Power Input, Optional End of Line Resistor (EOL) Included.

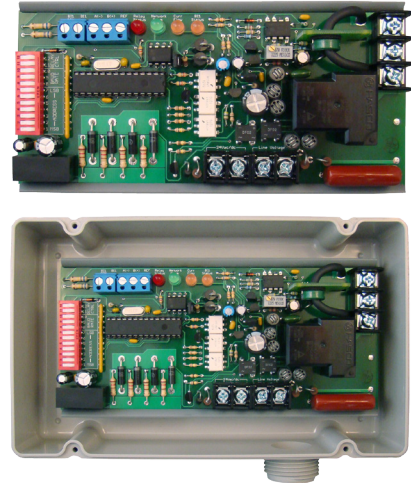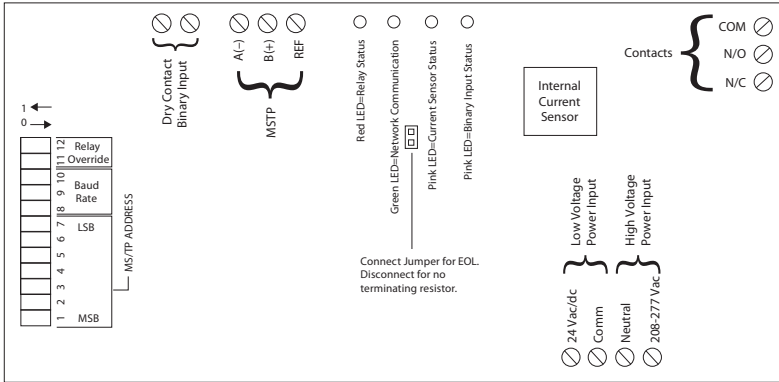

SPECIFICATIONS

Relays & Contact Type: One (1) SPDT Continuous Duty Coil
Expected Relay Life: 10 million cycles minimum mechanical
Operating Temperature: -30 to 140° F
Humidity Range: 5 to 95% (noncondensing)
Operate Time: 18ms
Network Communication: Green LED
Relay Status: Red LED On = Activated
Current Sensor Status: Pink LED On = Activated
Binary Input Status: Pink LED On = Activated
Dimensions: 6.00" x 2.75" x 1.75" (RIBMNWX2402B-BC)
 4.28" x 7.00" x 2.00" with .75" NPT Nipple (RIBTWX2402B-BC)
Track Mount: MT212-6 Mounting Track Provided
Approvals: CE, UL Listed, UL916, C-UL, RoHS
Housing Rating: UL Listed, NEMA 1, C-UL, CE Approved, UL Accepted for Use in Plenum, Also available NEMA 4 / 4X
Gold Flash: No
Relay Override Switch: DIP Switch Control
Network Media: Twisted Pair 22-24AWG, shielded recommended
Terminations: Functional Devices product installed at both ends of the MS/TP network – Use 120 Ω end of line resistors. All other cases – Follow instructions from the device installed at the end of the MS/TP network.
Polarity: Network is polarity sensitive
Baud Rate: 9600, 19200, 38400, 57600, 76800, 115200 (DIP Switch Selectable)

Contact Ratings:
 20 Amp Resistive @ 277 Vac
 20 Amp Ballast @ 277 Vac
 16 Amp Electronic Ballast @ 277 Vac (N/O)
 10 Amp Tungsten @ 120 Vac (N/O)
 1110 VA Pilot Duty @ 277 Vac
 770 VA Pilot Duty @ 120 Vac
 2 HP @ 277 Vac
 1 HP @ 120 Vac

Power Input:
 24 Vac/dc ; 208-277 Vac ; 50/60 Hz

Power Input Ratings:
 105 mA @ 24 Vac
 78 mA @ 24 Vdc
 120 mA @ 208-277 Vac

Current Sensor Range:
 0.25 - 20 Amps
 Threshold fixed at .25 Amps.

Notes:

- Device can be powered by either 24 Vac/dc or 208-277 Vac, but not both.
- Order NEMA 4 housing by adding "-N4" to end of model number. (RIBTWX2402B-BC-N4)
- Order with grey lid by adding "-GY" to end of model number. (RIBTWX2402B-BC-GY)
- Order NEMA 4 housing with grey lid by adding "-N4-GY" to end of model number. (RIBTWX2402B-BC-N4-GY)
- When connecting 24 Vac to both the RIB(s) and a half-wave device, damage to device can occur. Option 1: Use separate transformers for each device. Option 2: Add diode between devices, see Option 2 note below. ^^

BACnet® Details:

- MS/TP Address & Baud Rate must be set prior to power up via DIP switches.
- Device ID will default to 277XXX where XXX is the MS/TP Address.

Examples:
 MS/TP Address - 004
 Device ID - 277004

MS/TP Address - 121
 Device ID - 277121

- Device ID can be changed via network command. Once changed, it will no longer default to 277XXX. (MS/TP Address & Device ID must be unique.)
 - This model utilizes: BO 1 (Relay output), BI 1 (Dry contact binary input), BI 2 (Internal current sensor input)
 - Device Instance changed via Object Identifier Property of Device Object
 - PIC Statement available on website. http://www.functionaldevices.com/pdf/pics/RIBxWX240xB-BC_PICS.pdf
- Or scan QR code with your smart phone.



DIP SWITCHES*			BAUD RATE
8	9	10	
0	0	0	9600
0	0	1	19200
0	1	0	38400
0	1	1	57600
1	0	0	76800
1	0	1	115200


All other combinations=9600 baud

DIP SWITCHES*		RELAY STATE**
11	12	
1	0	Auto
X	1	Override on
0	0	Override off

* 0 = Open ; 1 = Closed

** Device must be powered for override

• Dry contact binary input is a general purpose input that is not tied to the relay internally. Can be used with any dry contact switching device, such as a current sensor, to report back to the network.

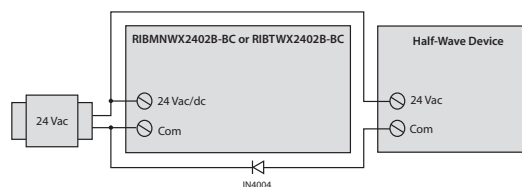



^^ Option 2: Add diode on 24 Vac power (Com) interconnection between devices. Band on diode faces towards RIB(s).

RIBMNW24B-BCAI

2.75" Track Mount BACnet® MS/TP Network Relay Device; One Binary Output (20 Amp Relay SPDT + Override); Two Binary Inputs (Dry Contact, Class 2); One Analog Input (T2/T3 Thermistor / 0-5 Vdc / 0-10 Vdc); 24 Vac/dc Power Input; **Optional End of Line Resistor (EOL) Included.**

RIBTW24B-BCAI

Enclosed BACnet® MS/TP Network Relay Device; One Binary Output (20 Amp Relay SPDT + Override); Two Binary Inputs (Dry Contact, Class 2); One Analog Input (T2/T3 Thermistor / 0-5 Vdc / 0-10 Vdc); 24 Vac/dc Power Input; **Optional End of Line Resistor (EOL) Included.**

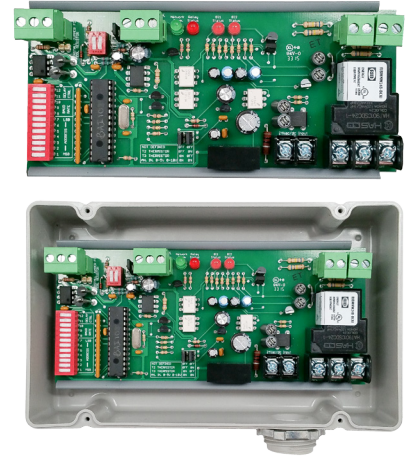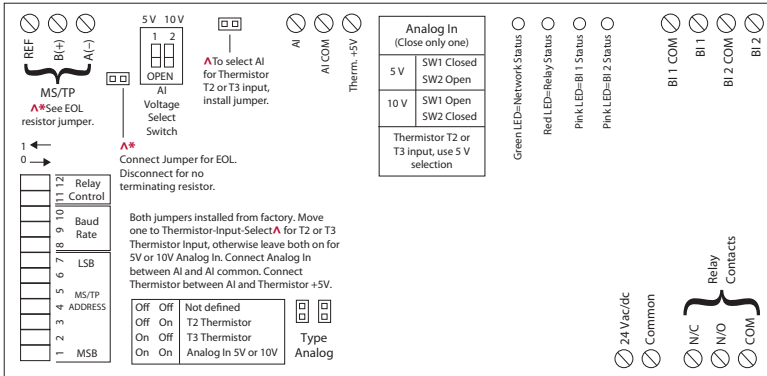

RELAYS

SPECIFICATIONS

- # Relays & Contact Type:** One (1) SPDT Continuous Duty Coil
- Expected Relay Life:** 10 million cycles minimum mechanical
- Operating Temperature:** -30 to 140° F
- Humidity Range:** 5 to 95% (noncondensing)
- Operate Time:** 18ms
- Network Communication:** Green LED
- Relay Status:** Red LED On = Activated
- Current Sensor Status:** Pink LED On = Activated
- Binary Input Status:** Pink LED On = Activated
- Dimensions:** 6.25" x 2.75" x 1.75" (RIBMNW24B-BCAI)
4.28" x 7.00" x 2.00" with .75" NPT Nipple (RIBTW24B-BCAI)
- Track Mount:** MT12-6 Mounting Track Provided
- Approvals:** CE, UL Listed, UL916, C-UL, RoHS
- Housing Rating:** UL Listed, NEMA 1, C-UL, CE Approved, UL Accepted for Use in Plenum, Also available NEMA 4 / 4X
- Gold Flash:** No
- Relay Override Switch:** DIP Switch Control
- Network Media:** Twisted Pair 22-24AWG, shielded recommended
- Terminations:** Functional Devices product installed at both ends of the MS/TP network – Use 120 Ω end of line resistors. All other cases – Follow instructions from the device installed at the end of the MS/TP network.
- Polarity:** Network is polarity sensitive
- Baud Rate:** 9600, 19200, 38400, 57600, 76800, 115200 (DIP Switch Selectable)

- Contact Ratings:**
 - 20 Amp Resistive @ 277 Vac
 - 20 Amp Ballast @ 277 Vac
 - 16 Amp Electronic Ballast @ 277 Vac (N/O)
 - 10 Amp Tungsten @ 120 Vac (N/O)
 - 1110 VA Pilot Duty @ 277 Vac
 - 770 VA Pilot Duty @ 120 Vac
 - 2 HP @ 277 Vac
 - 1 HP @ 120 Vac
- Power Input Ratings:**
 - 81 mA @ 24 Vdc
 - 111 mA @ 24 Vac

• PIC Statement available on website.
http://www.functionaldevices.com/pdf/pics/BACnet-BCAI_PICS.pdf
 Or scan QR code with your smart phone.



- Notes:**
 - Order NEMA 4 housing by adding "-N4" to end of model number. (RIBTW24B-BCAI-N4)
 - Order with grey lid by adding "-GY" to end of model number. (RIBTW24B-BCAI-GY)
 - Order NEMA 4 housing with grey lid by adding "-N4-GY" to end of model number. (RIBTW24B-BCAI-N4-GY)
 - For all versions, raw analog default settings are 0 and 1023 (real), respectively. Units default to 95 (no units).
 - **When connecting 24 Vac to both the RIB(s) and a half-wave device, damage to device can occur.**
Option 1: Use separate transformers for each device.
Option 2: Add diode between devices, see Option 2 note below.^^

- BACnet® Details:**
 - MS/TP Address & Baud Rate must be set prior to power up via DIP switches.
 - Device ID will default to 277XXX where XXX is the MS/TP Address.

MS/TP Address - 004 Device ID - 277004	MS/TP Address - 121 Device ID - 277121
---	---

- Device ID can be changed via network command. Once changed, it will no longer default to 277XXX. (MS/TP Address & Device ID must be unique.)
- This model utilizes: BO 1 (Relay output), BI 1 (Dry contact binary input), BI 2 (Dry contact binary input), AI 1 (Analog input)
- Device Instance changed via Object Identifier Property of Device Object

- Thermistor Specifications:**
 - Thermistor Type 2 (T2) Precon 10 K @ 77°F (25°C) PN ST-R24, Model 24, (or equivalent.) Thermistor Type 3 (T3) Precon 10 K @ 77°F (25°C) Model 3, (or equivalent.) Thermistor not included.

- For both T2 and T3, MIN_PRES_VAL must be set to -36 (real value) and MAX_PRES_VAL must be set to 66.3 (real value) for Celcius. For Fahrenheit, MIN_PRES_VAL must be set to -32.8 (real value) and MAX_PRES_VAL must be set to 151.34 (real value).
- -35 to 10°C range in 1° steps / -31 to 50°F range in 1.8° steps
 10 to 32°C range in 0.1° steps / 50 to 90°F range in 0.18° steps
 32 to 100°C range in 1° steps / 90 to 212°F range in 1.8° steps


DIP SWITCHES*			BAUD RATE
8	9	10	
0	0	0	9600
0	0	1	19200
0	1	0	38400
0	1	1	57600
1	0	0	76800
1	0	1	115200

DIP SWITCHES*		RELAY STATE**
11	12	
1	0	Auto
X	1	Override on
0	0	Override off

* 0 = Open ; 1 = Closed
 ** Device must be powered for override

All other combinations=9600 baud

• Dry contact binary input is a general purpose input that is not tied to the relay internally. Can be used with any dry contact switching device, such as a current sensor, to report back to the network.

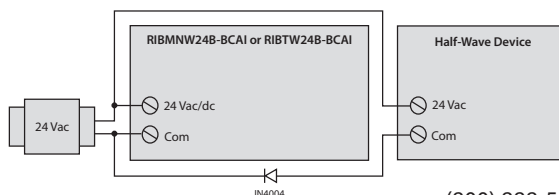

^^ Option 2:
 Add diode on 24 Vac power (Com) interconnection between devices. Band on diode faces towards RIB(s).



NETWORK COMPATIBLE RELAY

RIBTW24B-BCAO

Enclosed BACnet® MS/TP Network Relay Device; One Binary Output (20 Amp Relay SPDT + Override); One Binary Input (Dry Contact, Class 2); One Analog Output (0-5 Vdc, 0-10 Vdc, or 4-20 mA), One Analog Input (T2/T3 Thermistor / 0-5 Vdc / 0-10 Vdc); 24 Vac/dc Power Input; **Optional End of Line Resistor (EOL) Included.**



RELAYS

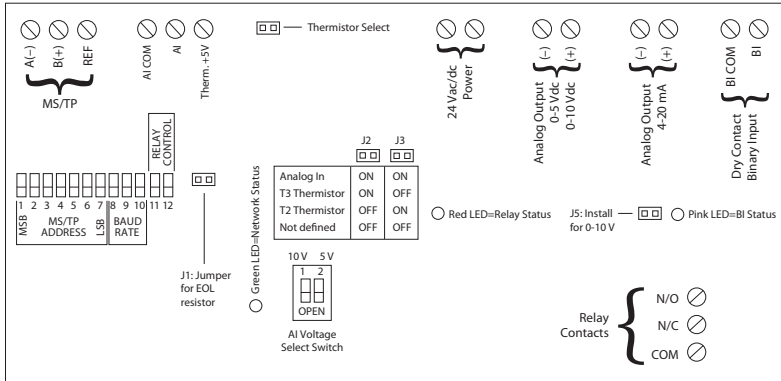

SPECIFICATIONS

- # Relays & Contact Type:** One (1) SPDT Continuous Duty Coil
- Expected Relay Life:** 10 million cycles minimum mechanical
- Operating Temperature:** -30 to 140° F
- Humidity Range:** 5 to 95% (noncondensing)
- Operate Time:** 18ms
- Network Communication:** Green LED
- Relay Status:** Red LED On = Relay Activated
- Binary Input Status:** Pink LED On = Activated
- Dimensions:** 4.28" x 7.00" x 2.00" with .75" NPT Nipple
- Approvals:** CE, UL Listed, UL916, C-UL, RoHS
- Housing Rating:** UL Listed, NEMA 1, C-UL, CE Approved, UL Accepted for Use in Plenum,
- Gold Flash:** No
- Relay Override:** DIP Switch Control

- Network Media:** Twisted Pair 22-24AWG, shielded recommended
- Terminations:** Functional Devices product installed at both ends of the MS/TP network – Use 120 Ω end of line resistors. All other cases – Follow instructions from the device installed at the end of the MS/TP network.
- Polarity:** Network is polarity sensitive
- Baud Rate:** 9600, 19200, 38400, 57600, 76800, 115200 (DIP Switch Selectable)

- Contact Ratings:**
 - 20 Amp Resistive @ 277 Vac
 - 20 Amp Magnetic Ballast @ 277 Vac
 - 16 Amp Electronic Ballast @ 277 Vac (N/O)
 - 10 Amp Tungsten @ 120 Vac (N/O)
 - 1110 VA Pilot Duty @ 277 Vac
 - 770 VA Pilot Duty @ 120 Vac
 - 2 HP @ 277 Vac
 - 1 HP @ 120 Vac

- Power Input Ratings:**
 - 176 mA @ 24 Vac
 - 150 mA @ 24 Vdc

- Notes:**
 - Use a separate 24 Vac transformer, or an isolated 24 Vdc power supply to power-up this product.
 - Complete Installation Instructions: Bulletin B1756 available on website. www.functionaldevices.com/pdf/bulletins/B1756_393218.pdf
 - When connecting 24 Vac to both the RIB(s) and a half-wave device, damage to device can occur. Option 1: Use separate transformers for each device. Option 2: Add diode between devices, see Option 2 note below. ^^



- Thermistor Specifications:**
 - Thermistor Type 2 (T2) Precon 10 K @ 77°F (25°C) PN ST-R24, Model 24, (or equivalent), Thermistor Type 3 (T3) Precon 10 K @ 77°F (25°C) Model 3, (or equivalent.) Thermistor not included.
 - 35 to 10°C range in 1° steps / -31 to 50°F range in 1.8° steps
 - 10 to 32°C range in 0.1° steps / 50 to 90°F range in 0.18° steps
 - 32 to 100°C range in 1° steps / 90 to 212°F range in 1.8° steps

- BACnet® Details:**
 - This model utilizes: BO 1 (Relay output), BI 1 (Dry contact binary input), AI 1 (Analog input), AO 1 (Analog output)
 - PIC Statement available on website. http://www.functionaldevices.com/pdf/pics/RIBTW24B-BCAO_PICS.pdf
 - Or scan QR code with your smart phone.
 - Addressing Specifications: Bulletin B2028 available on website. www.functionaldevices.com/pdf/bulletins/B2028_393243.pdf



ANALOG OUTPUT ACCURACY AS A FUNCTION OF OUTPUT SPAN (USING STANDARD CONDITIONS *)			
	Span 20% - 100%	Span 10% - 100%	Span 0% - 100%
Analog Output Voltage (0-5 Vdc; 0-10 Vdc)	+/- 2% error	+/- 5% error	+/- 11% error
Analog Output Current (4-20 mA)	+/- 2% error	+/- 3% error	+/- 12% error

*** Standard Conditions:**
Power Supply Input: 22 Vac/dc to 28 Vac/dc ; **Loop Resistance (Analog Output 4-20 mA Loop):** 530 Ohms max.
Load Resistance [Analog Output Voltage (0-5 Vdc, 0-10 Vdc)]: 10 K Ohms min. ; **Ambient Temperature:** -30 to 140° F

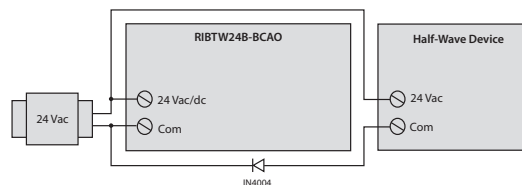
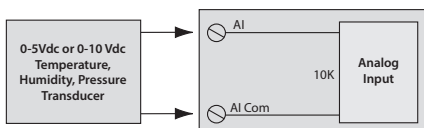


^^ Option 2: Add diode on 24 Vac power (Com) interconnection between devices. Band on diode faces towards RIB(s).

NETWORK COMPATIBLE DEVICE

RIBMNWD12-BCDI

2.75" Track Mount BACnet® MS/TP Network 12 Binary Input Device; **Optional End of Line Resistor (EOL) Included.**

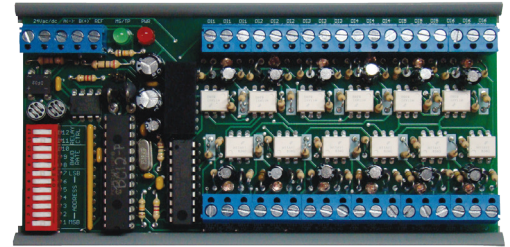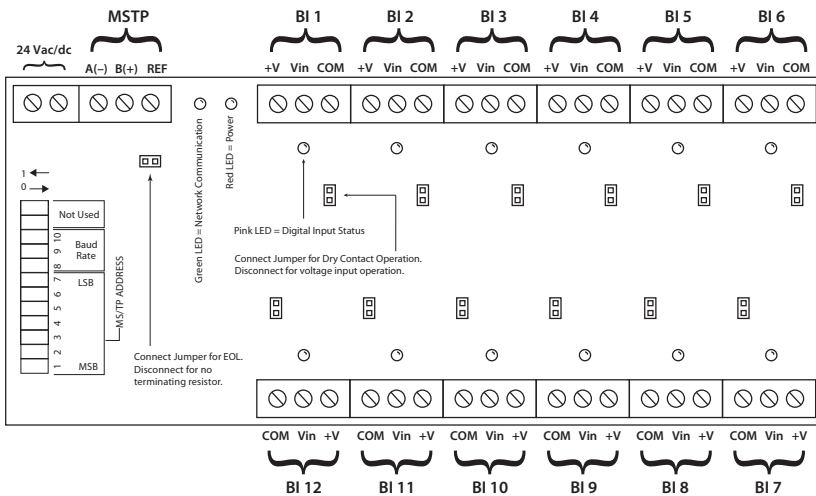

RELAYS

SPECIFICATIONS

Operating Temperature: -30 to 140° F

Humidity Range: 5 to 95% (noncondensing)

Green LED: Network Communication

Red LED: ON = Power Present

Dimensions: 5.85" x 2.75" x 1.75"

Track Mount: MT212-6 Mounting Track Provided

Approvals: CE, RoHS

Network Media: Twisted Pair 22-24AWG, shielded recommended

Terminations: Functional Devices product installed at both ends of the MS/TP network – Use 120 Ω end of line resistors. All other cases – Follow instructions from the device installed at the end of the MS/TP network.

Polarity: Network is polarity sensitive

Band Rate: 9600, 19200, 38400, 57600, 76800, 115200 (DIP Switch Selectable)

Power Input Ratings:

41 mA @ 24 Vdc

53 mA @ 24 Vac

BACnet® Details:

- MS/TP Address & Baud Rate must be set prior to power up via DIP switches.
- Device ID will default to 277XXX where XXX is the MS/TP Address. Examples:

MS/TP Address - 004
Device ID - 277004

MS/TP Address - 121
Device ID - 277121

- Device ID can be changed via network command. Once changed, it will no longer default to 277XXX. (MS/TP Address & Device ID must be unique.)
- Device Instance changed via Object Identifier Property of Device Object
- Full wave rectified

Binary Input Ratings:

Dry Contact: 3 mA @ 30 Vdc max.

Voltage Input: 12 mA @ 25 Vac/dc max.

- Objects included in device are:

- BI 1 (Binary input)
- BI 2 (Binary input)
- BI 3 (Binary input)
- BI 4 (Binary input)
- BI 5 (Binary input)
- BI 6 (Binary input)
- BI 7 (Binary input)
- BI 8 (Binary input)
- BI 9 (Binary input)
- BI 10 (Binary input)
- BI 11 (Binary input)
- BI 12 (Binary input)

- PIC Statement available on website.

http://www.functionaldevices.com/pdf/pics/RIBMNWD12-BCDI_PICS.pdf

Or scan QR code with your smart phone.




DIP SWITCHES*			BAUD RATE
8	9	10	
0	0	0	9600
0	0	1	19200
0	1	0	38400
0	1	1	57600
1	0	0	76800
1	0	1	115200


* 0 = Open ; 1 = Closed

All other combinations=9600 baud

Example of Dry Contact Input Operation




Example of Voltage Input Operation




NETWORK COMPATIBLE DEVICE

RIBMWD12-BC

2.75" Track Mount BACnet® MS/TP Network 12 Binary Input Device (With Accumulators); Optional End of Line Resistor (EOL) Included.

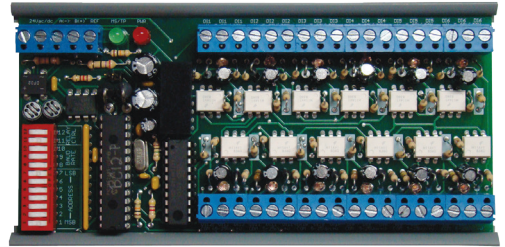

TWO (ACCUMULATOR) INPUTS CAN BE USED FOR POWER MONITORING OR OTHER PULSE COUNTING APPLICATION.

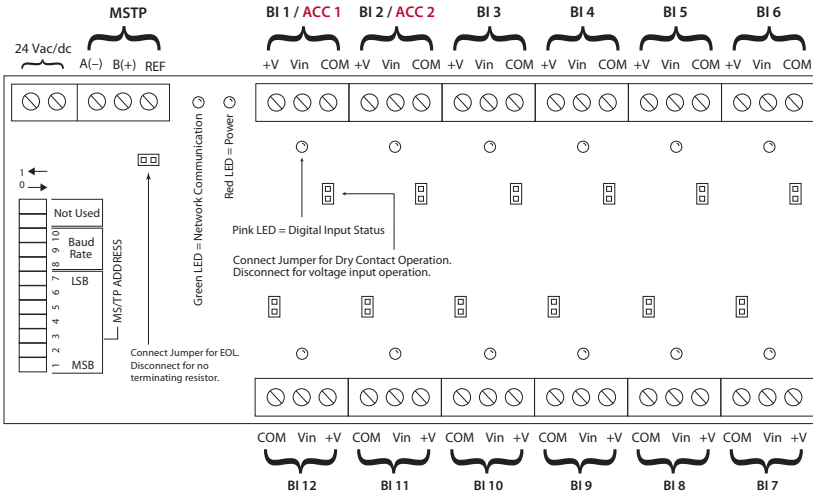

RELAYS

SPECIFICATIONS

Operating Temperature: -30 to 140° F

Humidity Range: 5 to 95% (noncondensing)

Green LED: Network Communication

Red LED: ON = Power Present

Dimensions: 5.85" x 2.75" x 1.75"

Track Mount: MT212-6 Mounting Track Provided

Approvals: CE, RoHS

Network Media: Twisted Pair 22-24AWG, shielded recommended

Terminations: Functional Devices product installed at both ends of the MS/TP network – Use 120 Ω end of line resistors. All other cases – Follow instructions from the device installed at the end of the MS/TP network.

Polarity: Network is polarity sensitive

Baud Rate: 9600, 19200, 38400, 57600, 76800, 115200 (DIP Switch Selectable)

Power Input Ratings:

41 mA @ 24 Vdc

53 mA @ 24 Vac

Max. Accumulator Frequency:

50 Hz

BACnet® Details:

- MS/TP Address & Baud Rate must be set prior to power up via DIP switches.
- Device ID will default to 277XXX where XXX is the MS/TP Address. Examples:

MS/TP Address - 004
Device ID - 277004

MS/TP Address - 121
Device ID - 277121

- Device ID can be changed via network command. Once changed, it will no longer default to 277XXX. (MS/TP Address & Device ID must be unique.)
- Device Instance changed via Object Identifier Property of Device Object

Binary Input Ratings:

Dry Contact: 3 mA @ 30 Vdc max.

Voltage Input: 12 mA @ 25 Vac/dc max.

- Objects included in device are:
 - BI 1 (Binary input) } Use Same
 - ACC 1 (Accumulator) } Physical Input
 - BI 2 (Binary input) } Use Same
 - ACC 2 (Accumulator) } Physical Input
 - BI 3 (Binary input)
 - BI 4 (Binary input)
 - BI 5 (Binary input)
 - BI 6 (Binary input)
 - BI 7 (Binary input)
 - BI 8 (Binary input)
 - BI 9 (Binary input)
 - BI 10 (Binary input)
 - BI 11 (Binary input)
 - BI 12 (Binary input)

• PIC Statement available on website.
http://www.functionaldevices.com/pdf/pics/RIBMWD12-BC_PICS.pdf
 Or scan QR code with your smart phone.




DIP SWITCHES*			BAUD RATE
8	9	10	
0	0	0	9600
0	0	1	19200
0	1	0	38400
0	1	1	57600
1	0	0	76800
1	0	1	115200


* 0 = Open ; 1 = Closed

All other combinations=9600 baud

Example of Dry Contact Input Operation





Example of Voltage Input Operation



NETWORK COMPATIBLE RELAY

RIBMW24B-44-BC

4.00" Track Mount BACnet® MS/TP Network Relay Device; Four Binary Outputs (20 Amp Relay SPDT + Override); Four Binary Inputs (Dry Contact Binary Inputs), 24 Vac/dc Power Input, Optional End of Line Resistor (EOL) Included.

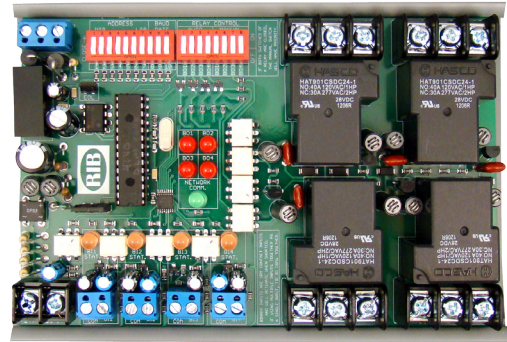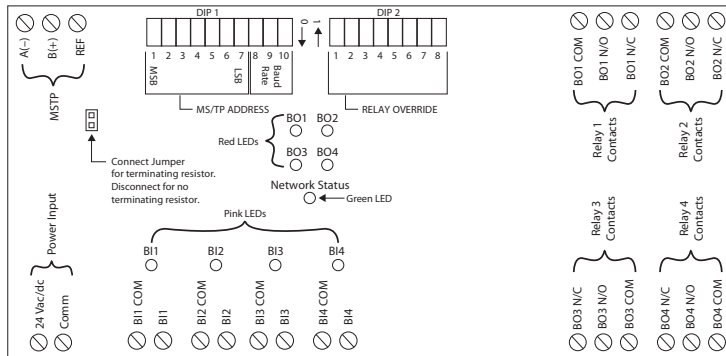

RELAYS

SPECIFICATIONS

- # Relays & Contact Type: Four (4) SPDT Continuous Duty Coil
- Expected Relay Life: 10 million cycles minimum mechanical
- Operating Temperature: -30 to 140° F
- Humidity Range: 5 to 95% (noncondensing)
- Operate Time: 18ms
- Network Communication: Green LED
- Relay Status: Red LED On = Activated
- Binary Input Status: Pink LED On = Activated
- Dimensions: 6.00" L x 4.27" W x 1.34" H
- Track Mount: MT4-6 Mounting Track Provided
- Approvals: CE, UL Listed, UL916, C-UL, RoHS
- Gold Flash: No
- Relay Override Switch: DIP Switch Control

Network Media: Twisted Pair 22-24AWG, shielded recommended

Terminations: Functional Devices product installed at both ends of the MS/TP network – Use 120 Ω end of line resistors. All other cases – Follow instructions from the device installed at the end of the MS/TP network.

Polarity: Network is polarity sensitive
Baud Rate: 9600, 19200, 38400, 57600, 76800, 115200 (Dip Switch Selectable)

- Contact Ratings:**
- 20 Amp Resistive @ 277 Vac
- 20 Amp Ballast @ 120/277 Vac
- 16 Amp Electronic Ballast @ 277 Vac (N/O)
- 10 Amp Tungsten @ 120 Vac (N/O)
- 1110 VA Pilot Duty @ 277 Vac
- 770 VA Pilot Duty @ 120 Vac
- 2 HP @ 277 Vac
- 1 HP @ 120 Vac

Power Input Ratings:
 24 Vac : 400 mA
 24 Vdc : 190 mA

- BACnet® Details:**
- MS/TP Address & Baud Rate must be set prior to power up via DIP switches.
- Device ID will default to 277XXX where XXX is the MS/TP Address.

```
MS/TP Address - 004
Device ID - 277004

MS/TP Address - 121
Device ID - 277121
```

- Device ID can be changed via network command. Once changed, it will no longer default to 277XXX. (MS/TP Address & Device ID must be unique)
 - This model utilizes: BO1, BO2, BO3, BO4, (Relay outputs), BI1, BI2, BI3, BI4 (Dry contact inputs)
 - Device Instance changed via Object Identifier Property of Device Object
 - Each unit is 1/8 unit load
 - PIC Statement available on website.
- http://www.functionaldevices.com/pdf/pics/RIBMW24B-44-BC_PICS.pdf
 Or scan QR code with your smart phone.

NEED AN ENCLOSURE?
 ORDER MODEL MH1210 (PAGE 142)

NEED A POWER SUPPLY AND AN ENCLOSURE?
 ORDER MODEL CTRL-PS (PAGE 113) & AT4-8 (PAGE 152)



	DIP 1			
	DIP Switches			Baud Rate
	1-7	8	9 10	
See Bulletin B1082 for full MS/TP Addressing	0	0	0	9600
	0	0	1	19200
	0	1	0	38400
	0	1	1	57600
	1	0	0	76800
	1	0	1	115200

All other combinations=9600 baud

• Dry contact digital input is a general purpose input that is not tied to the relay internally. Can be used with any dry contact switching device, such as a current sensor, to report back to the network.

Relay	Relay State**	DIP 2							
		DIP Switches*							
		1	2	3	4	5	6	7	8
BO1	Auto	1	X	X	X	0	X	X	X
	ON	X	X	X	X	1	X	X	X
	OFF	0	X	X	X	0	X	X	X
BO2	Auto	X	1	X	X	X	0	X	X
	ON	X	X	X	X	X	1	X	X
	OFF	X	0	X	X	X	0	X	X
BO3	Auto	X	X	1	X	X	X	0	X
	ON	X	X	X	X	X	X	1	X
	OFF	X	X	0	X	X	X	0	X
BO4	Auto	X	X	X	1	X	X	X	0
	ON	X	X	X	X	X	X	X	1
	OFF	X	X	X	0	X	X	X	0



* 0 = Open ; 1 = Closed

** Device must be powered for override

NETWORK COMPATIBLE RELAY

RIBTW24B-WI-N4

Enclosed Wifi IEEE 802.11 b/g Network
Enclosed I/O Device: One Discrete Output
(20 Amp Relay SPDT + Override), One
Discrete Input (Dry Contact, Class 2); 24 Vac/dc

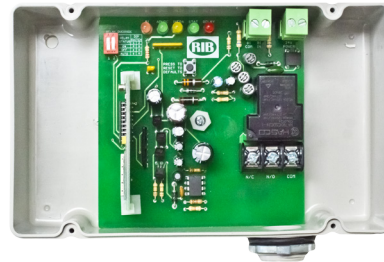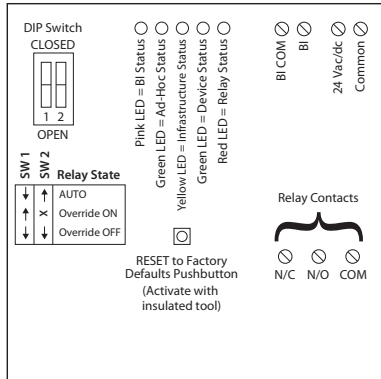

Shown
With
Cover

Code Version 4.0.1



Made in USA
Meets
"Buy American"
of ARRA 2009



SPECIFICATIONS

Relays & Contact Type: One (1) SPDT Continuous Duty Coil
Expected Relay Life: 10 million cycles minimum mechanical
Operating Temperature: -30 to 140° F
Operate Time: 18ms
Pink LED: Digital Input Status
Green LED: Wifi Ad-Hoc Status
Yellow LED: Wifi Infrastructure Status
Green LED: Device Status
Red LED: Relay Status
Dimensions: 4.28" x 7.00" x 2.00" with .75" NPT Nipple
Approvals: UL Listed, UL916, C-UL
FCC, CE, RoHS, Wifi Certified ASD Device
Housing Rating: UL Accepted for Use in Plenum, NEMA 4
Gold Flash: No
Relay Override Switch: DIP Switch Control
Wifi: IEEE 802.11 b/g/n Compatible, (G)
54 Mbps Data Rate
-95 dBm Min. Sensitivity
+16 dBm Max Output Power
Currently Unsecured Connection in Ad-Hoc
(WPA-PSK or WPA-2-PSK Available)
Supports PING and ARP
DSSS Modulation

Contact Ratings:
20 Amp Resistive @ 277 Vac
20 Amp Ballast @ 277 Vac
16 Amp Electronic Ballast @ 277 Vac (N/O)
10 Amp Tungsten @ 120 Vac (N/O)
2 HP @ 277 Vac
1 HP @ 120 Vac

Power Input Ratings:
200 mA Max @ 24 Vac
200 mA Max @ 24 Vdc

Available TCP/IP Settings:

- IP Address (Static)
- Port Number
- Subnet Mask
- Gateway Address
- Ad-Hoc mode
- Infrastructure mode
- Scan for wireless networks

Device Settings:

- Local Override
- Reset to Network Defaults Pushbutton

Power Input:
24 Vac = Terminal Strip (20 Vac min. ; 28 Vac max.)
24 Vdc = Terminal Strip (24 Vdc min. ; 28 Vdc max.)

Device Settings by Network:

- Power up default relay state
- Host name and location labels
- Relay bound to digital input

• **Setup instructions available on website.**

http://www.functionaldevices.com/pdf/bulletins/B1802_393224.pdf





Or scan QR code with your smart phone.

NETWORK COMPATIBLE RELAY

RIBTW2401B-WIUI-N4

Wifi IEEE 802.11 b/g Network Enclosed I/O Device; One Discrete Output (20 Amp Relay SPDT + Override), One Discrete Input (Dry Contact, Class 2); Two Universal Inputs; 24 Vac/dc, 120 Vac Power

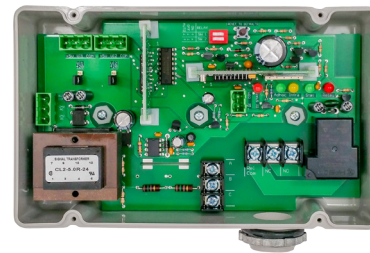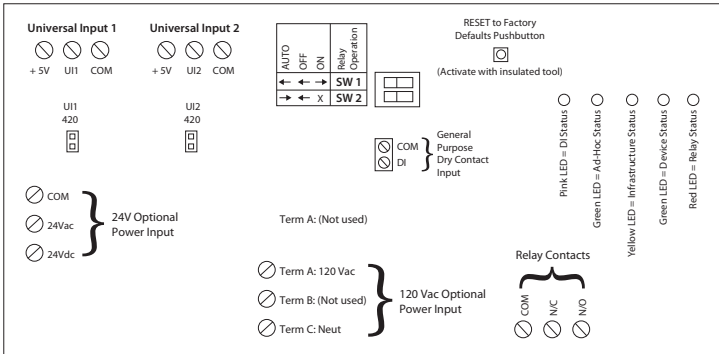

Shown
With
Cover



Code Version 4.7.1.1.0



RELAYS

SPECIFICATIONS

Relays & Contact Type: One (1) SPDT Continuous Duty Coil
Expected Relay Life: 10 million cycles minimum mechanical
Operating Temperature: -30 to 140° F
Operate Time: 18ms
Pink LED: Digital Input Status
Green LED: Wifi Ad-Hoc Status
Yellow LED: Wifi Infrastructure Status
Green LED: Device Status
Red LED: Relay Status
Dimensions: 4.28" x 7.00" x 2.00" with .75" NPT Nipple
Approvals: UL Listed, UL916, C-UL FCC, CE, RoHS, Wifi Certified ASD Device
Housing Rating: UL Accepted for Use in Plenum, NEMA 4X
Gold Flash: No
Relay Override Switch: DIP Switch Control
Wifi: IEEE 802.11 b/g/n Compatible, (G) 54 Mbps Data Rate -95 dBm Sensitivity +16 dBm Output Power (WPA-PSK or WPA-2-PSK Available) Supports PING and ARP DSSS Modulation
Security: Customer can choose to have Webpage and Controller Commands authentication-secured with Username and Password.

Contact Ratings:
 20 Amp Resistive @ 277 Vac
 5 Amp Resistive @ 480 Vac
 20 Amp Ballast @ 277 Vac
 16 Amp Electronic Ballast @ 277 Vac (N/O)
 10 Amp Tungsten @ 120 Vac (N/O)
 1110 VA Pilot Duty @ 277 Vac
 770 VA Pilot Duty @ 120 Vac
 1 HP @ 120 Vac
 2 HP @ 277 Vac

Power Input Ratings:
 158 mA Max @ 24 Vac
 110 mA Max @ 24 Vdc
 55 mA Max @ 120 Vac

Available TCP/IP Settings:
 • IP Address (Static)
 • Port Number
 • Subnet Mask
 • Gateway Address
 • Ad-Hoc mode (Default)
 • Infrastructure mode
 • Scan for wireless networks

Device Settings:
 • Local Override
 • Reset to Network Defaults Pushbutton

Power Input (Use one):
 24 Vac = Terminal Strip (20 Vac min.; 28 Vac max.)
 24 Vdc = Terminal Strip (24 Vdc min.; 28 Vdc max.)
 120 Vac = Terminal Strip

Device Settings by Network:
 • Power up default relay state
 • Host name and location labels
 • Relay bound to digital input
 • Username and Password security:
 Note: There will be no security if password field is left blank. A password may be entered that will secure the webpage as well as Controller Commands. Eight alpha-numerical characters case-sensitive.

• **Setup instructions available on website.**

http://www.functionaldevices.com/pdf/bulletins/B1783_393223.pdf



Or scan QR code with your smart phone.

CAUTION: Remove all connections to UI 1 and UI 2 when setting input.

Universal Input: Configurable by internal device web page, accessible in either Ad-Hoc or Infrastructure.

- Analog value returned, user configurable min. and max. scale, and label, 0-5 Vdc, 0-10 Vdc, or 4-20 mA*, connect between UI and Com.
- Direct temperature reading from Type T2 Thermistor. Connect between +5 Vdc and UI input.
- Digital Input, connect between +5 Vdc and UI input.

* 4-20 mA, when used, requires jumper to be installed on UI set for 4-20 mA input. Jumper MUST be removed when UI input used as anything other than 4-20 mA.

For application manual, please visit: www.functionaldevices.com



NETWORK COMPATIBLE RELAYS

RIBMNW24B-MBAI

2.75" Track Mount Modbus® RTU Network Relay Device; One Binary Output (20 Amp Relay SPDT + Override); Two Binary Inputs (Dry Contact, Class 2); One Analog Input (T2 Thermistor / 0-5 Vdc / 0-10 Vdc); 24 Vac/dc Power Input; **Optional End of Line Resistor (EOL) Included.**

RIBTW24B-MBAI

Enclosed Modbus® RTU Network Relay Device; One Binary Output (20 Amp Relay SPDT + Override); Two Binary Inputs (Dry Contact, Class 2); One Analog Input (T2 Thermistor / 0-5 Vdc / 0-10 Vdc); 24 Vac/dc Power Input; **Optional End of Line Resistor (EOL) Included.**

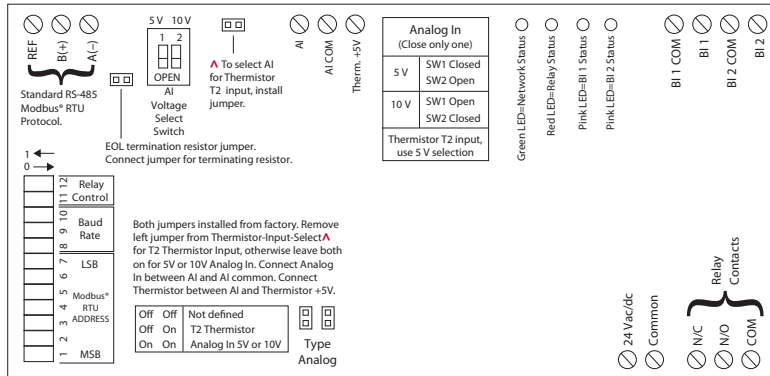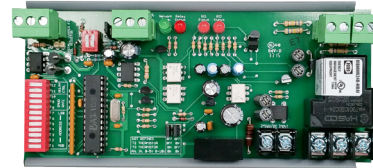

SPECIFICATIONS

- # Relays & Contact Type:** One (1) SPDT Continuous Duty Coil
- Expected Relay Life:** 10 million cycles minimum mechanical
- Operating Temperature:** -30 to 140° F
- Humidity Range:** 5 to 95% (noncondensing)
- Operate Time:** 18ms
- Network Communication:** Green LED
- Relay Status:** Red LED On = Activated
- Current Sensor Status:** Pink LED On = Activated
- Binary Input Status:** Pink LED On = Activated
- Dimensions:** 6.25" x 2.75" x 1.75" (RIBMNW24B-MBAI)
4.28" x 7.00" x 2.00" with .75" NPT Nipple (RIBTW24B-MBAI)
- Track Mount:** MT212-6 Mounting Track Provided
- Approvals:** CE, UL Listed, UL916, C-UL, RoHS
- Housing Rating:** UL Listed, NEMA 1, C-UL, CE Approved, UL Accepted for Use in Plenum, Also available NEMA 4 / 4X
- Gold Flash:** No
- Relay Override Switch:** DIP Switch Control

- Contact Ratings:**
 - 20 Amp Resistive @ 277 Vac
 - 20 Amp Ballast @ 277 Vac
 - 16 Amp Electronic Ballast @ 277 Vac (N/O)
 - 10 Amp Tungsten @ 120 Vac (N/O)
 - 1110 VA Pilot Duty @ 277 Vac
 - 770 VA Pilot Duty @ 120 Vac
 - 2 HP @ 277 Vac
 - 1 HP @ 120 Vac

- Power Input Ratings:**
 - 81 mA @ 24 Vdc
 - 111 mA @ 24 Vac

Notes:

- Modbus® Address & Baud Rate must be set prior to power up via DIP switches.
- Order NEMA 4 housing by adding "-N4" to end of model number. (RIBTW24B-MBAI-N4)
- Order with grey lid by adding "-GY" to end of model number. (RIBTW24B-MBAI-GY)
- Order NEMA 4 housing with grey lid by adding "-N4-GY" to end of model number. (RIBTW24B-MBAI-N4-GY)
- This model utilizes:
 - Physical coil 1 (Relay output)
 - Physical binary input 1 (Dry contact binary input)
 - Physical binary input 2 (Dry contact binary input)
 - Physical input register AI 1 (Analog input)
- Thermistor Type 2 (T2) Precon 10 K @ 77°F (25°C) PN ST-R24, Model 24, (or equivalent.) Thermistor not included. (Range -39 to 187°F)
- For all versions, raw analog default settings are 0 and 1023 (real), respectively.
- When connecting 24 Vac to both the RIB(s) and a half-wave device, damage to device can occur.
 - Option 1: Use separate transformers for each device.
 - Option 2: Add diode between devices, see Option 2 note below.^^
- Address and Baud Rate Settings on Bulletin B1676 available on website. http://functionaldevices.com/pdf/bulletins/B1676_393208.pdf Or scan QR code with your smart phone.



Modbus® is a registered trademark of Schneider Electric licensed to the Modbus Organization, Inc.


DIP SWITCHES*			BAUD RATE
8	9	10	
0	0	0	9600
0	0	1	19200
0	1	0	38400
0	1	1	57600

DIP SWITCHES*		RELAY STATE**
11	12	
1	0	Auto
X	1	Override on
0	0	Override off

* 0 = Open ; 1 = Closed
** Device must be powered for override

All other combinations=9600 baud

- Dry contact binary input is a general purpose input that is not tied to the relay internally. Can be used with any dry contact switching device, such as a current sensor, to feed back to the network.

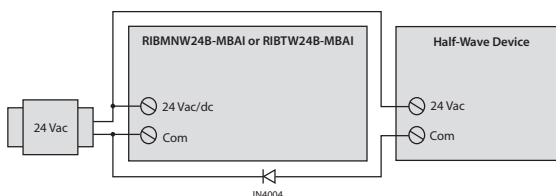

^^ Option 2:
Add diode on 24 Vac power (Com) interconnection between devices. Band on diode faces towards RIB(s).



Fan Safety Alarm Circuits

I/O Expanders

Manual Analog Override Switch

If we do not already build a device with specifications or packaging configurations you require, we will be happy to quote and design one for you. Functional Devices, Inc. is actively involved in the development, manufacturing, and production of special peripheral devices. They are either

variations of existing Functional Devices products or entirely unique devices. We will help provide you with a product to fit your specific needs. Please contact us so we may review your project and special requirements.

RELAYS

FAN SAFETY ALARM CIRCUITS

MODEL #		POWER INPUT	ALARM CIRCUITS	CONTACTS	SWITCH	ENCLOSED	NOTES	SPEC PAGE
RIBMNLB	•	24 Vac	4					84
RIBLB	•	24 Vac	4			•		84
RIBMNLB-6	•	24 Vac	6					85
RIBMNLB-4	•	24 Vac	4					85
RIBMNLB-2	•	24 Vac	2					85
RIBMNLB-1	•	24 Vac	2				NEW	87
RIBLB-6	•	24 Vac	6			•		85
RIBLB-4	•	24 Vac	4			•		85
RIBLB-2	•	24 Vac	2			•		85
RIBMNLB-6NO	•	24 Vac	6				NEW	86
RIBMNLB-4NO	•	24 Vac	4				NEW	86
RIBMNLB-2NO	•	24 Vac	2				NEW	86

I/O EXPANDERS

(Quick reference only. See individual spec page for more information.)

MODEL #		POWER INPUT	RELAYS	CONTACTS	SWITCH	ENCLOSED	NOTES	SPEC PAGE
RIBMN24Q2C	•	24 Vac/dc	2	2 SPDT				88
RIBMN24Q3C	•	24 Vac/dc	3	3 SPDT				88
RIBMN24Q4C	•	24 Vac/dc	4	4 SPDT				89
RIBMN24Q4C-PX	•	24 Vac/dc	4	4 SPDT				89

MANUAL ANALOG OVERRIDE SWITCH

MODEL #	POWER INPUT	RELAYS	SWITCH	ENCLOSED	NOTES	SPEC PAGE
RIBMNA1D0	24 Vac/dc		Manual / Auto	•		90

= UL Listed : UL916 Energy Management, UL864 Fire ; USA & Canada

= UL Listed : UL916 Energy Management ; USA & Canada




FAN SAFETY ALARM CIRCUITS

RIBMNLB

2.75" Track Mount AHU Fan Safety Alarm Circuit,
24 Vac Power Input

RIBLB

Enclosed AHU Fan Safety Alarm Circuit,
24 Vac Power Input

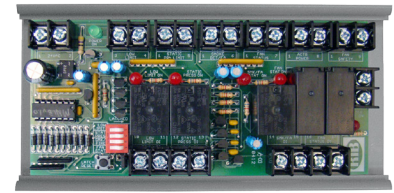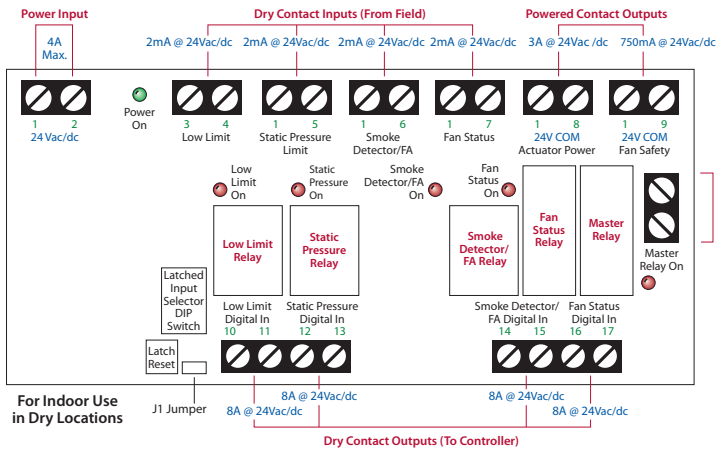

CODE VER. 1.0

CAN BE USED TO ISOLATE FIELD DEVICES FROM EACH OTHER AND FROM CONTROLLER, NOT ONLY FAN CIRCUITS

SPECIFICATIONS

- Expected Relay Life:** 10 million cycles minimum mechanical
- Operating Temperature:** -30 to 140° F
- Humidity Range:** 5 to 95% (noncondensing)
- Operate Time:** 250ms
- Power Input:** 4 Amp @ 24 Vac/dc; 50-60 Hz
- Alarm Status:** LED On = Activated
- Dimensions:** 6.000" x 2.750" x 1.200" (RIBMNLB)
4.28" x 7.00" x 2.00" with .75" NPT Nipple (RIBLB)
- Track Mount:** MT212-6 Mounting Track Provided
- Approvals:** UL Listed, UL864, C-UL, CE, RoHS
- Housing Rating:** UL Listed, NEMA 1, C-UL, CE Approved
- Gold Flash:** No
- Override Switch:** No

- Notes:**
- RIBMNLB and RIBLB have four Alarm Inputs and one Master Alarm.

A master relay will open if any one of the normally-closed (N/C) inputs open. LED status of all outputs and the master relay is provided. The RIBMNLB is provided with mounting track for mounting in user-provided electrical enclosures. The RIBLB is enclosed in a NEMA 1, 4" x 7" enclosure with a clear lid to allow viewing of the status LEDs. The master relay has two general-purpose outputs: one 24 V output terminal and one dry contact output rated up to 10 Amp @ 277 Vac. Fan status contact controls actuator power. The most common application is an Air Handling Unit (AHU) fan-safety-shutdown where the master relay is used to shutdown the fan. Contact closure outputs are provided so that a DDC controller can determine the cause of a shutdown.


Model RIBMNLB combines all the relay logic to facilitate fan status, fan safety control, and damper actuator control. It is intended for use in a circuit that will control fan start/stop and fan safety shut-down circuit monitors three critical inputs:

- Low-limit freeze protection (to stop fan and remove power from damper actuator)
- Static pressure (to monitor for hi/low pressure condition)
- Smoke detector / fire alarm

Master relay opens to shut down AHU when any Normally Closed input opens.

Integral DIP switch allows any input to be latched. Input can be reset with push button or by cycling unit power.

Installing J1 jumper allows Fan Status input to control Master Relay, like the other 3 inputs.

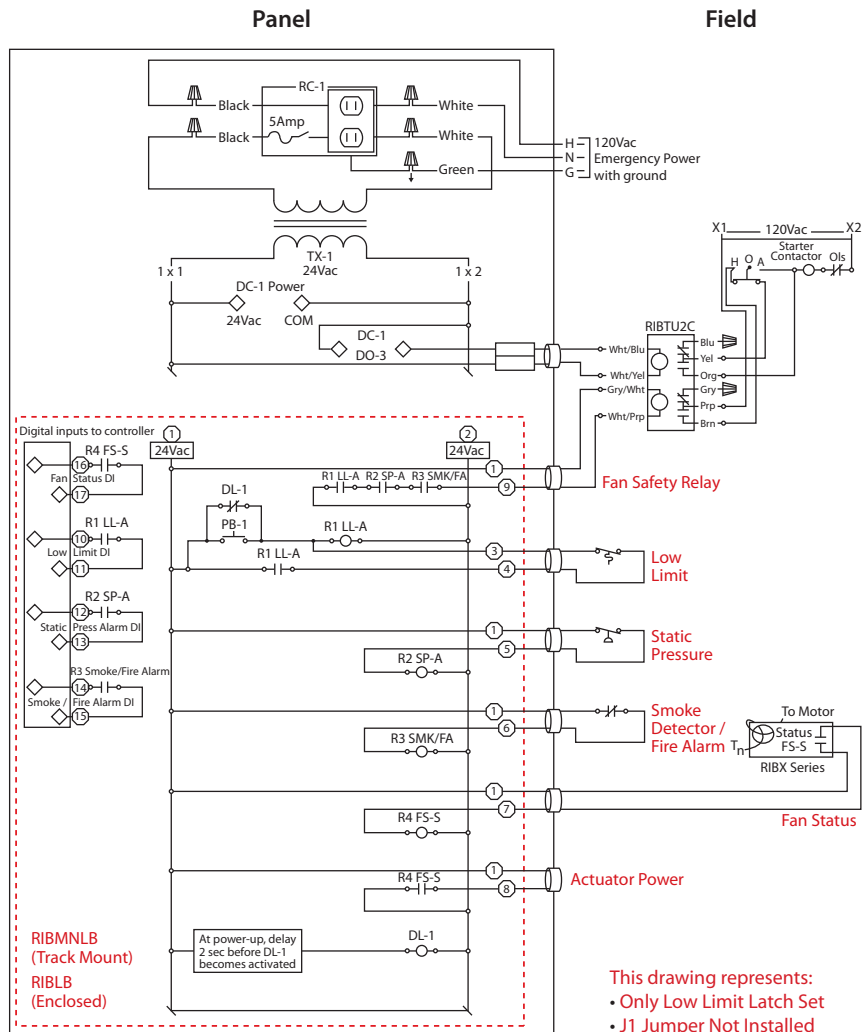

This drawing represents:
• Only Low Limit Latch Set
• J1 Jumper Not Installed



FAN SAFETY ALARM CIRCUITS

RIBMNLB-6/-4/-2

2.75" Track Mount AHU Fan Safety Alarm and General Purpose Logic Circuit, 24 Vac/dc Power Input, 2/4/6 Outputs

RIBLB-6/-4/-2

Enclosed AHU Fan Safety Alarm and General Purpose Logic Circuit, 24 Vac/dc Power Input, 2/4/6 Outputs

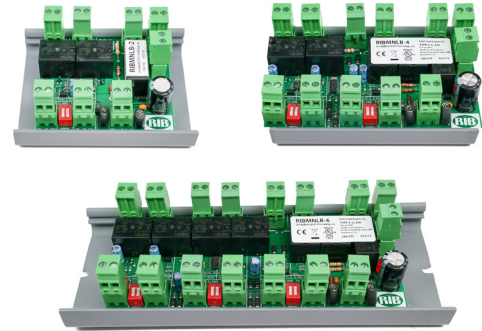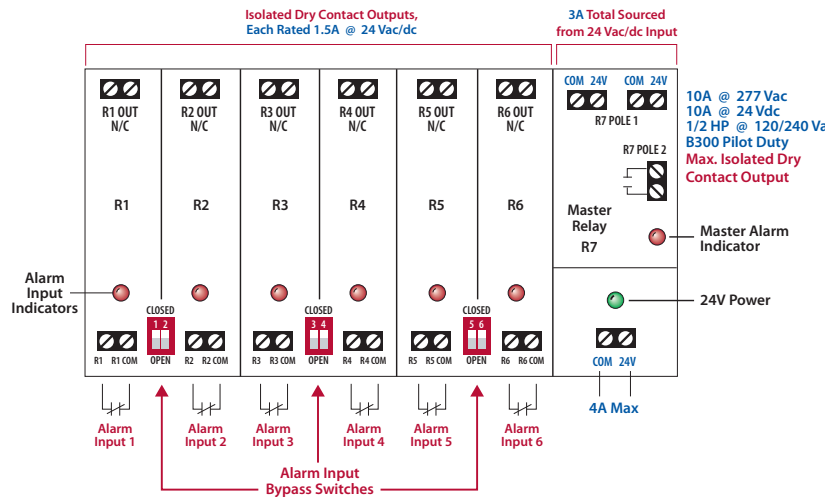

RELAYS


SPECIFICATIONS

- Expected Relay Life:** 10 million cycles minimum mechanical
- Operating Temperature:** -30 to 140° F
- Humidity Range:** 5 to 95% (noncondensing)
- Operate Time:** 8ms
- Power Input:** 4 Amp max. @ 24 Vac/dc ; 50-60 Hz
- Alarm Status:** LED On = Activated
- Dimensions:** 6.200" x 2.750" x 1.750" (RIBMNLB-6)
4.600" x 2.750" x 1.750" (RIBMNLB-4)
3.000" x 2.750" x 1.750" (RIBMNLB-2)
4.28" x 7.00" x 2.00" with .75" NPT Nipple (RIBLB-6/-4/-2)
- Track Mount:** MT212-6 Mounting Track Provided (RIBMNLB-6)
MT212-4 Mounting Track Provided (RIBMNLB-4, RIBMNLB-2)
- Approvals:** UL Listed, UL916, UL864, C-UL, CE, RoHS
- Housing Rating:** UL Listed, NEMA 1, C-UL, CE Approved, UL Accepted for Use in Plenum
- Gold Flash:** No
- Override Switch:** No

- Notes:**
- Track mount models shown above.
 - RIBMNLB-6 and RIBLB-6 have six Alarm Inputs and one Master Alarm. RIBMNLB-4 and RIBLB-4 have four Alarm Inputs and one Master Alarm. RIBMNLB-2 and RIBLB-2 have two Alarm Inputs and one Master Alarm.

Models RIBMNLB-6, RIBMNLB-4, and RIBMNLB-2; and RIBLB-6, RIBLB-4, and RIBLB-2 are simply devices that combine a common relay-logic function into a small, easy-to-install, and less expensive form.

A master relay will open if any one of the normally-closed (N/C) inputs open. There are six, four, or two inputs depending on the model chosen. LED status of all inputs, the master relay, and power input is provided. Bypass of un-used inputs is also provided. The RIBMNLB series is provided with mounting track for mounting in user-provided electrical enclosures. The RIBLB series is enclosed in a NEMA-1, 4" x 7" enclosure with a clear lid to allow viewing of the status LEDs. The master relay has three general-purpose outputs: two 24 V output terminals and one dry-contact output rated up to 10 Amp @ 277 Vac (terminals on RIBMNLB series, wires on RIBLB series.) The most common application is an Air Handling Unit (AHU) fan-safety-shutdown where the master relay is used to shutdown the fan. Contact closure outputs are provided so that a DDC controller can determine the cause of a shutdown.

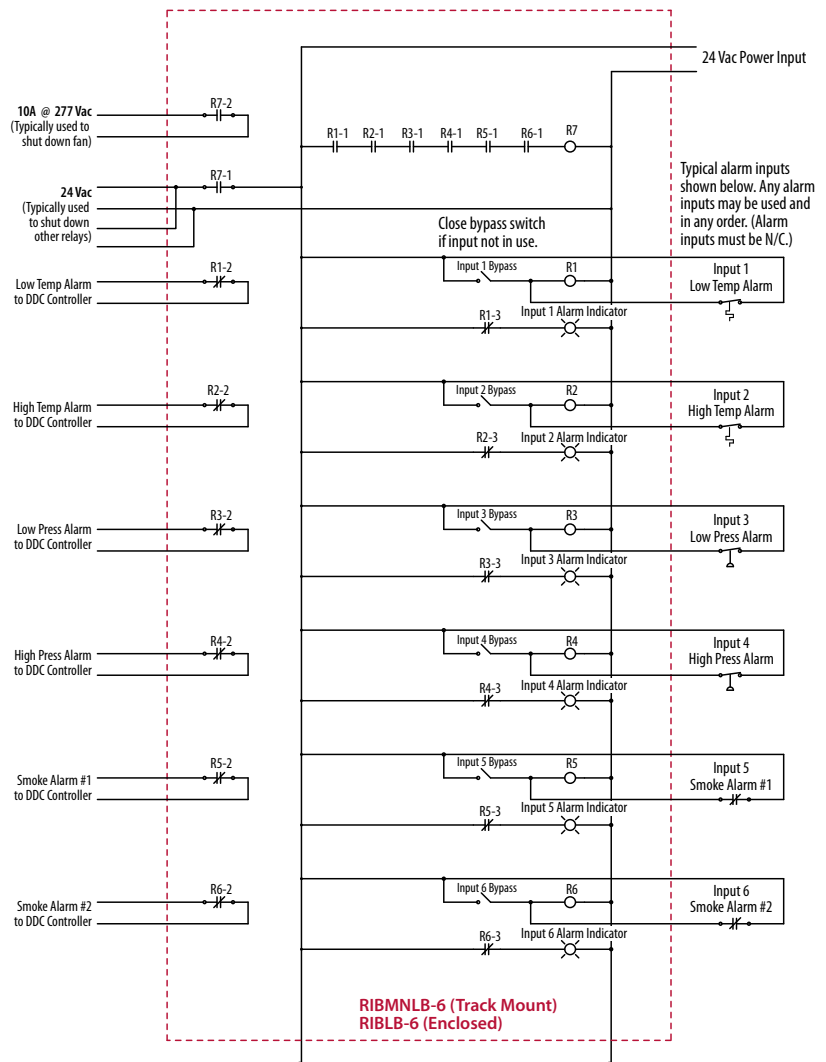

SELECTION GUIDE		
Model#	Inputs	
RIBMNLB-6	6	MT212 Mounting Track
RIBMNLB-4	4	MT212 Mounting Track
RIBMNLB-2	2	MT212 Mounting Track
RIBLB-6	6	PE6020 Enclosure
RIBLB-4	4	PE6020 Enclosure
RIBLB-2	2	PE6020 Enclosure

FAN SAFETY ALARM CIRCUITS




RIBMNLB-6NO/-4NO/-2NO

2.75" Track Mount AHU Fan Safety Alarm and General Purpose Logic Circuit, 24 Vac Power Input, 2/4/6 Alarm Inputs all with N/O Outputs



Isolated Dry Contact Outputs, Each Rated 1.5A @ 24 Vac/dc

3A Total Sourced from 24 Vac/dc Input or Dry Contact (Jumper Selectable)

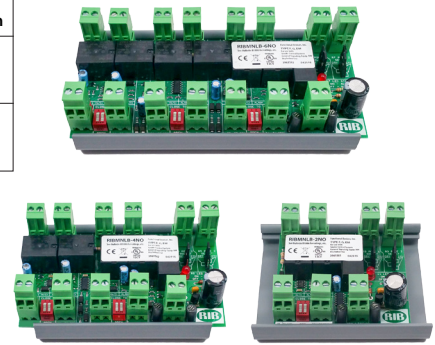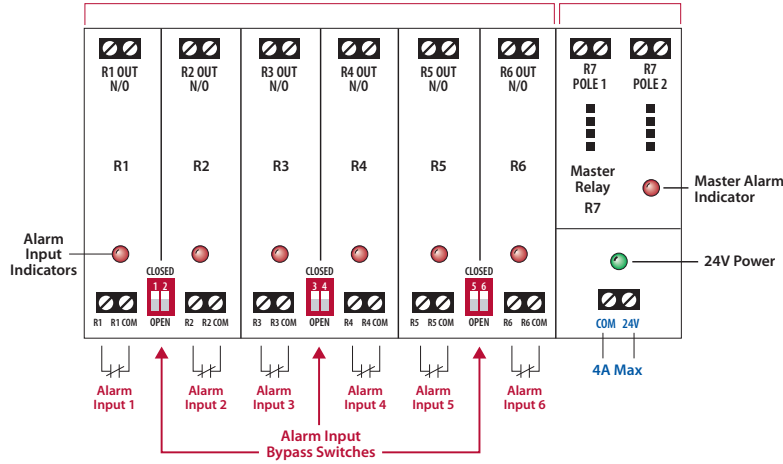

SPECIFICATIONS


- Expected Relay Life:** 10 million cycles minimum mechanical
- Operating Temperature:** -30 to 140° F
- Humidity Range:** 5 to 95% (noncondensing)
- Operate Time:** 8ms
- Power Input:** 4 Amp max. @ 24 Vac/dc ; 50-60 Hz
- Alarm Status:** LED On = Activated
- Dimensions:** 6.200" x 2.750" x 1.750" (RIBMNLB-6NO)
4.600" x 2.750" x 1.750" (RIBMNLB-4NO)
3.000" x 2.750" x 1.750" (RIBMNLB-2NO)
- Track Mount:** MT212-6 Mounting Track Provided (RIBMNLB-6NO)
MT212-4 Mounting Track Provided (RIBMNLB-4NO, RIBMNLB-2NO)
- Approvals:** UL Listed, UL916, UL864, C-UL, CE, RoHS
- Gold Flash:** No
- Override Switch:** No

Models RIBMNLB-6NO, RIBMNLB-4NO, and RIBMNLB-2NO are simply devices that combine a common relay-logic function into a small, easy-to-install, and less expensive form.

A master relay will open if any one of the normally-closed (N/C) inputs open. There are six, four, or two inputs depending on the model chosen. LED status of all inputs, the master relay, and power input is provided. Bypass of un-used inputs is also provided. The RIBMNLB series is provided with mounting track for mounting in user-provided electrical enclosures.

The master relay has two general-purpose outputs: both can be jumper selected at 24 V (sourced from input) or dry contact. The most common application is an Air Handling Unit (AHU) fan-safety-shutdown where the master relay is used to shutdown the fan. Contact closure outputs are provided so that a DDC controller can determine the cause of a shutdown.

- Notes:**
- RIBMNLB-6NO has six Alarm Inputs and one Master Alarm.
 - RIBMNLB-4NO has four Alarm Inputs and one Master Alarm.
 - RIBMNLB-2NO has two Alarm Inputs and one Master Alarm.
- This is a half wave device. When connecting 24 Vac to both this device and a full-wave device, damage to device can occur.**

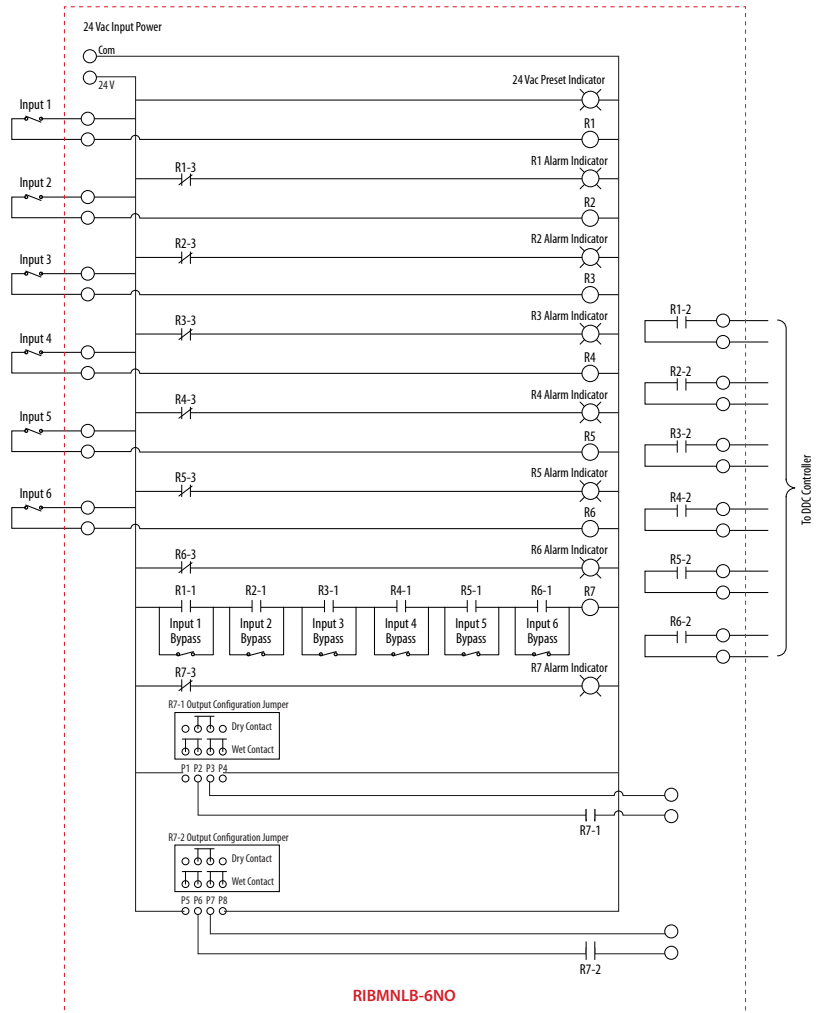


SELECTION GUIDE		
Model#	Inputs	Mounting Track
RIBMNLB-6NO	6	MT212 Mounting Track
RIBMNLB-4NO	4	MT212 Mounting Track
RIBMNLB-2NO	2	MT212 Mounting Track


FAN SAFETY ALARM CIRCUIT

RIBMNLB-1

2.75" Track Mount General Purpose Latching Logic Circuit; One Latching/Fault Input (Dry Contact, Class 2); 24 Vac/dc Power Input

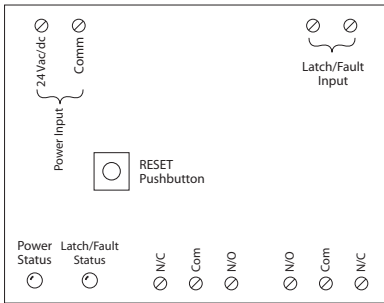

- MANUAL RESET
- ONE ALARM OUTPUT
- ONE RELAY OUTPUT

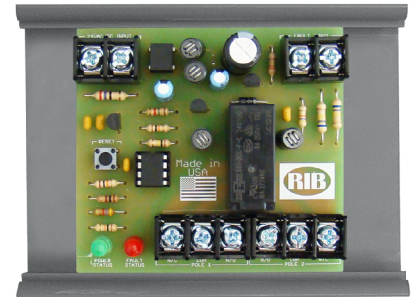

RELAYS

SPECIFICATIONS

- # Relays & Contact Type: One (1) DPDT Continuous Duty Coil
- Expected Relay Life: 10 million cycles minimum mechanical
- Operating Temperature: -30 to 140° F
- Humidity Range: 5 to 95% (noncondensing)
- Operate Time: 8ms
- Green LED: Power Status (ON: Power present)
- Red LED: Fault Status (ON: Latched/Fault State)
- Dimensions: 4.00" x 2.75" x 1.25"
- Track Mount: MT212-4 Mounting Track Provided
- Approvals: CE, UL Listed, UL864, C-UL, RoHS
- Gold Flash: No
- Relay Override Switch: No
- Fault Reset Switch: Yes

- Contact Ratings:
 - 10 Amp Resistive @ 30Vdc
 - 10 Amp General Use @ 277Vac
 - 1/2 HP @ 120/240Vac (N/O)
 - 1/3 HP @ 120/240Vac (N/C)


- Power Input Ratings:
 - 53 mA @ 24Vac
 - 25 mA @ 24Vdc
 - 50/60 Hz

Alarm Fault Application:


When the Latch/Fault Input is Closed (Normal state), the Relay is activated, and Red LED is Off. When Latch/Fault Input Opens (Alarm state), the Relay deactivates, and Red LED turns On. Until the Latch/Fault Input is Closed AND either power is cycled or the RESET button is pressed, relay will remain in the Alarm state.

Notes:

- Fault conditions must last for at least 500 ms in order for the unit to go into Alarm state.
- Reset signal, whether via pushbutton or power cycling, must last for at least 30 ms in order to reset the device to go from Alarm state to Normal state.

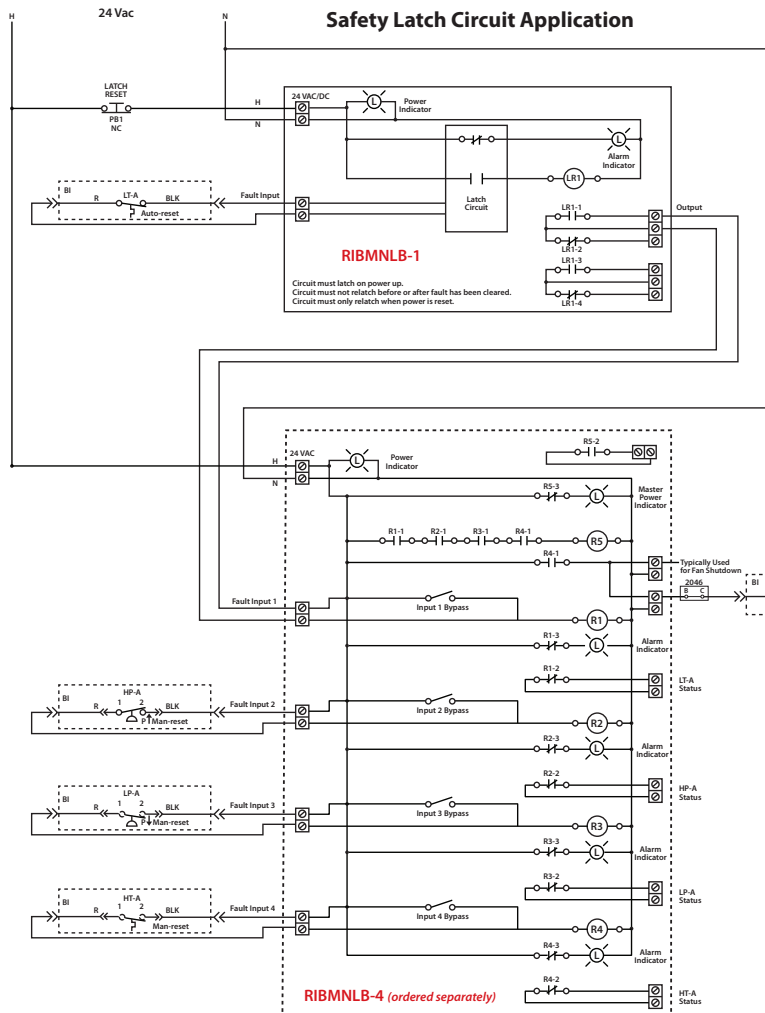


Typical Field Interlock Wiring

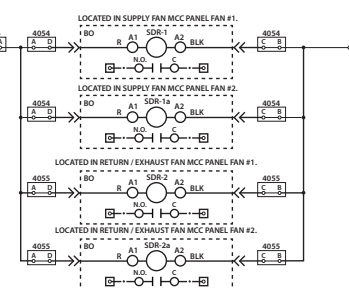

I/O EXPANDER

RIBMN24Q2C

2.75" Track Mount 2 Output I/O Expander with 24 Vac/dc Power Input and 0-10 Vdc / 0-5 Vdc Control Input

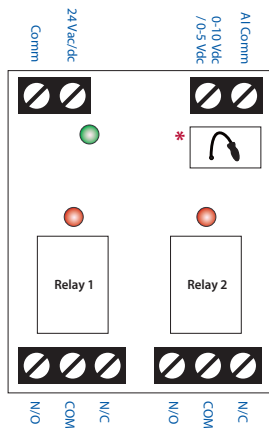

0-10 VDC CONTROL VOLTAGE	0-5 VDC * CONTROL VOLTAGE	RELAY 1 STATUS	RELAY 2 STATUS
0-2.117Vdc	0-1.058Vdc	OFF	OFF
2.745-4.627Vdc	1.373-2.313Vdc	ON	OFF
5.255-7.137Vdc	2.628-3.568Vdc	OFF	ON
7.765-10.000Vdc	3.883-5.000Vdc	ON	ON



GREAT FOR STAGING LOADS SUCH AS CHILLERS, PUMPS, ACTUATORS, OR MULTI-STAGE HEATING

SPECIFICATIONS

Relays & Contact Type: Two (2) SPDT Continuous Duty Coil
Expected Relay Life: 10 million cycles minimum mechanical
Operating Temperature: -30 to 140° F
Humidity Range: 5 to 95% (noncondensing)
Power Status: Green LED On = Power On
Relay Status: Red LED On = Relay Activated
Dimensions: 3.100" x 2.750" x 1.750"
Track Mount: MT212-4 Mounting Track Provided
Approvals: UL Listed, UL916, C-UL, CE, RoHS
Gold Flash: No
Override Switch: No

Contact Ratings:
 15 Amp General Use @ 125 Vac
 10 Amp General Use @ 277 Vac
 10 Amp Resistive @ 30 Vdc (N/O)
 7 Amp Resistive @ 30 Vdc (N/C)
 1/2 HP @ 125 Vac
 1 HP @ 250 Vac
 1/4 HP @ 277 Vac
 470 VA Pilot Duty @ 125 Vac
 770 VA Pilot Duty @ 250 Vac


Power Input:
 24 Vac/dc ; 50-60 Hz
 100mA max.

Notes:
 • Must clip resistor in white box for 0-5Vdc.*
 • Custom Programming Available for Large Orders.


I/O EXPANDER

RIBMN24Q3C

2.75" Track Mount 3 Output I/O Expander with 24 Vac/dc Power Input and 0-10 Vdc / 0-5 Vdc Control Input

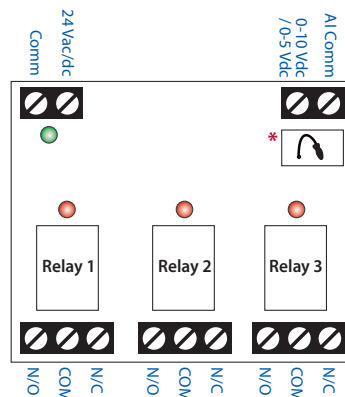

0-10 VDC CONTROL VOLTAGE	0-5 VDC * CONTROL VOLTAGE	RELAY 1 STATUS	RELAY 2 STATUS	RELAY 3 STATUS
0-0.988Vdc	0-0.494Vdc	OFF	OFF	OFF
1.366-2.242Vdc	0.683-1.121Vdc	ON	OFF	OFF
2.620-3.496Vdc	1.310-1.748Vdc	OFF	ON	OFF
3.876-4.752Vdc	1.938-2.376Vdc	ON	ON	OFF
5.130-6.006Vdc	2.565-3.003Vdc	OFF	OFF	ON
6.386-7.262Vdc	3.193-3.631Vdc	ON	OFF	ON
7.640-8.516Vdc	3.820-4.258Vdc	OFF	ON	ON
8.896-10.000Vdc	4.448-5.000Vdc	ON	ON	ON

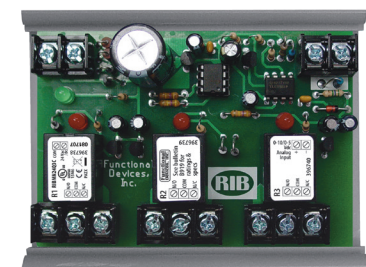

GREAT FOR STAGING LOADS SUCH AS CHILLERS, PUMPS, ACTUATORS, OR MULTI-STAGE HEATING

SPECIFICATIONS

Relays & Contact Type: Three (3) SPDT Continuous Duty Coil
Expected Relay Life: 10 million cycles minimum mechanical
Operating Temperature: -30 to 140° F
Humidity Range: 5 to 95% (noncondensing)
Power Status: Green LED On = Power On
Relay Status: Red LED On = Relay Activated
Dimensions: 4.000" x 2.750" x 1.750"
Track Mount: MT212-4 Mounting Track Provided
Approvals: UL Listed, UL916, C-UL, CE, RoHS
Gold Flash: No
Override Switch: No

Contact Ratings:
 15 Amp General Use @ 125 Vac
 10 Amp General Use @ 277 Vac
 10 Amp Resistive @ 30 Vdc (N/O)
 7 Amp Resistive @ 30 Vdc (N/C)
 1/2 HP @ 125 Vac
 1 HP @ 250 Vac
 1/4 HP @ 277 Vac
 470 VA Pilot Duty @ 125 Vac
 770 VA Pilot Duty @ 250 Vac


Power Input:
 24 Vac/dc ; 50-60 Hz
 150mA max.

Notes:
 • Must clip resistor in white box for 0-5Vdc.*
 • Custom Programming Available for Large Orders.


I/O EXPANDER

RIBMN24Q4C

2.75" Track Mount 4 Output I/O Expander with 24 Vac/dc Power Input and 0-10 Vdc / 0-5 Vdc Control Input

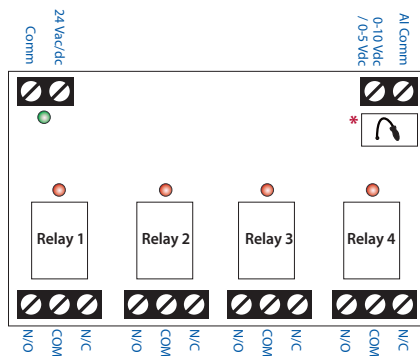

0-10 VDC CONTROL VOLTAGE	0-5 VDC * CONTROL VOLTAGE	RELAY 1 STATUS	RELAY 2 STATUS	RELAY 3 STATUS	RELAY 4 STATUS
0-0.372Vdc	0-0.186Vdc	OFF	OFF	OFF	OFF
0.726-1.000Vdc	0.363-0.500Vdc	ON	OFF	OFF	OFF
1.354-1.626Vdc	0.677-0.813Vdc	OFF	ON	OFF	OFF
1.982-2.254Vdc	0.991-1.127Vdc	ON	ON	OFF	OFF
2.608-2.882Vdc	1.304-1.441Vdc	OFF	OFF	ON	OFF
3.236-3.508Vdc	1.618-1.754Vdc	ON	OFF	ON	OFF
3.864-4.136Vdc	1.932-2.068Vdc	OFF	ON	ON	OFF
4.492-4.764Vdc	2.246-2.382Vdc	ON	ON	ON	OFF
5.118-5.392Vdc	2.559-2.696Vdc	OFF	OFF	OFF	ON
5.746-6.018Vdc	2.873-3.009Vdc	ON	OFF	OFF	ON
6.374-6.646Vdc	3.187-3.323Vdc	OFF	ON	OFF	ON
7.000-7.274Vdc	3.500-3.637Vdc	ON	ON	OFF	ON
7.628-7.902Vdc	3.814-3.951Vdc	OFF	OFF	ON	ON
8.256-8.528Vdc	4.128-4.264Vdc	ON	OFF	ON	ON
8.884-9.156Vdc	4.442-4.578Vdc	OFF	ON	ON	ON
9.510-10.000Vdc	4.755-5.000Vdc	ON	ON	ON	ON

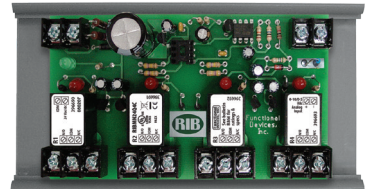

GREAT FOR STAGING LOADS SUCH AS CHILLERS, PUMPS, ACTUATORS, OR MULTI-STAGE HEATING

RELAYS

SPECIFICATIONS

- # Relays & Contact Type:** Four (4) SPDT Continuous Duty Coil
- Expected Relay Life:** 10 million cycles minimum mechanical
- Operating Temperature:** -30 to 140° F
- Humidity Range:** 5 to 95% (noncondensing)
- Power Status:** Green LED On = Power On
- Relay Status:** Red LED On = Relay Activated
- Dimensions:** 4.950" x 2.750" x 1.750"
- Track Mount:** MT212-6 Mounting Track Provided
- Approvals:** UL Listed, UL916, C-UL, CE, RoHS
- Gold Flash:** No
- Override Switch:** No

- Contact Ratings:**
 - 15 Amp General Use @ 125 Vac
 - 10 Amp General Use @ 277 Vac
 - 10 Amp Resistive @ 30 Vdc (N/O)
 - 7 Amp Resistive @ 30 Vdc (N/C)
 - 1/2 HP @ 125 Vac
 - 1 HP @ 250 Vac
 - 1/4 HP @ 277 Vac
 - 470 VA Pilot Duty @ 125 Vac
 - 770 VA Pilot Duty @ 250 Vac


- Power Input:** 24 Vac/dc ; 50-60 Hz 200mA max.

- Notes:**
 - Must clip resistor in white box for 0-5Vdc.*
 - Custom Programming Available for Large Orders.


I/O EXPANDER

RIBMN24Q4C-PX

2.75" Track Mount 4 Output Field Adjustable Staging Threshold Relay Module with 24 Vac/dc Power and 0-10 Vdc Control Input

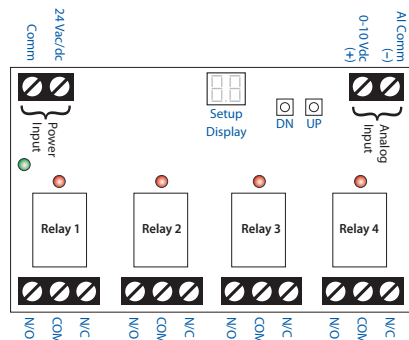

- CONTROL FOUR RELAY OUTPUTS WITH ONE (0-10 VDC) ANALOG SIGNAL FROM CONTROLLER OR THERMOSTAT
- CAPABILITY TO SET DESIRED ON AND OFF VOLTAGES FOR EACH RELAY
- NO POTS TO ADJUST
- NO NEED FOR VOLT METER FOR SETUP
- ON BOARD "FIELD SELECTABLE" DIGITAL DISPLAY

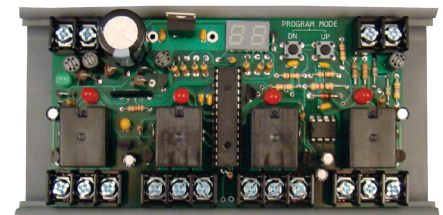

SPECIFICATIONS

- # Relays & Contact Type:** Four (4) SPDT Continuous Duty Coil
- Expected Relay Life:** 10 million cycles minimum mechanical
- Operating Temperature:** -30 to 140° F
- Humidity Range:** 5 to 95% (noncondensing)
- Power Status:** Green LED On = Power On
- Relay Status:** Red LED On = Relay Activated
- Heartbeat Status:** Right-most decimal point
- Dimensions:** 4.950" x 2.750" x 1.750"
- Track Mount:** MT212-6 Mounting Track Provided
- Approvals:** UL Listed, UL916, C-UL, CE, RoHS
- Gold Flash:** No
- Override Switch:** No

- Contact Ratings:**
 - 15 Amp General Use @ 125 Vac
 - 10 Amp General Use @ 277 Vac
 - 10 Amp Resistive @ 30 Vdc (N/O)
 - 7 Amp Resistive @ 30 Vdc (N/C)
 - 1/2 HP @ 125 Vac
 - 1 HP @ 250 Vac
 - 1/4 HP @ 277 Vac
 - 470 VA Pilot Duty @ 125 Vac
 - 770 VA Pilot Duty @ 250 Vac


- Power Input:** 24 Vac/dc ; 50-60 Hz 200mA max.

- Notes:**
 - For AC applications, an isolation transformer, to be used solely for the power input, is recommended.
 - Relay will activate when control signal voltage reaches or exceeds individual relay ON point. Relay will deactivate when control voltage reaches or drops below individual OFF point.
 - Factory relay ON / OFF voltages:
 - Relay 1: 3V / 2.8V
 - Relay 2: 5V / 4.8V
 - Relay 3: 7V / 6.8V
 - Relay 4: 9V / 8.8V
 - Minimum ON point: 0.5V
 - Maximum ON point: 9.9V
 - Minimum OFF point: 0.3V
 - Relay number will flash 3 times when voltage exceeds setpoint.
 - Pressing UP or DN button in normal run mode will display the voltage present on Analog Input.
 - ON/OFF points can be changed at any time, by the user, by entering "Program Mode"
 - User defined ON/OFF points will be maintained upon power loss.



MANUAL ANALOG OVERRIDE SWITCH

RIBMNA1D0

2.75" Track Mount Manual Analog Override Switch + Monitor with 24 Vac/dc Power Input



Legend for Selecting Output for Jumpers

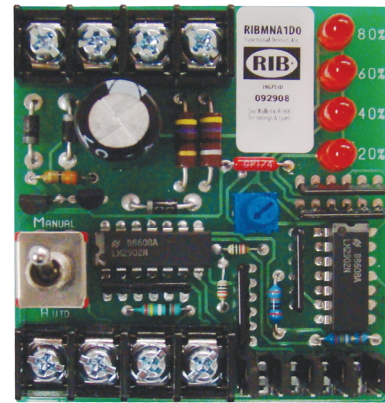

RELAYS

SPECIFICATIONS

- Operating Temperature:** -30 to 140° F
- Humidity Range:** 5 to 95% (noncondensing)
- Dimensions:** 2.450" x 2.750" x 1.270"
- Track Mount:** 2.750"; See MT212 Series on page 142
MT212 Mounting Track Sold Separately
- Input Voltage:** 24 Vac/dc
- Input Current:** 90mA Max.
- Range/Impedance Override:** 0-5 Vdc, 200 Ω Min.
0-10 Vdc, 400 Ω Min.
0-15 Vdc, 1 kΩ Min.
0-20mA dc, 500 Ω Max.
- Feedback Contact:** 2A Max. @ 24 Vac/dc

Notes:

- Set the jumpers according to your input signal (Analog signal from the controller.) Example: When controlling a damper with 0-10 Vdc, the jumpers need to be in position for the 0-10 Vdc override range. If the LED range does not match your analog scale, ensure the jumpers are set for the proper range.
- Feedback contact closed when switch is in Manual position, open when switch is in Auto position.

- **PROVIDES MANUAL OVERRIDE IF CONTROLLER DOES NOT SUPPORT OVERRIDE CAPABILITY**
- **ALLOWS YOU TO MANUALLY MAKE ADJUSTMENTS TO YOUR END DEVICE REMOTELY INSTEAD OF AT YOUR CONTROL PANEL**
- **SENDS OVERRIDE STATUS BACK TO CONTROLLER VIA FEEDBACK**
- **MULTI-RANGE ANALOG OUTPUT**

CURRENT SENSORS

Solid and Split Core | Enclosed | Track Mount



Made in the U.S.A.
Meets the "Buy American" provisions of Section 1605 of the American Recovery and Reinvestment Act of 2009 (ARRA).

Many Variations

- Miniature size
- Voltage outputs
- 4-20 mA regulation
- Adjustable or fixed
- Self-calibrating
- Relay and current sensor combinations
- Track mount styles

SOLID AND SPLIT CORE AC SENSORS

MODEL #	UL SENSOR OUTPUT	RANGE	TYPE	THRESHOLD	NOTES	SPEC PAGE
RIBXKF	• Solid State Switch SPST ; 30 Vac/dc ; .4 Amps Max (Wire Leads)	.25-150A	Solid	Fixed, .25 Amp		93
RIBXKTF	• Solid State Switch SPST ; 30 Vac/dc ; .4 Amps Max (Terminals)	.25-150A	Solid	Fixed, .25 Amp		93
RIBXKA	• Solid State Switch SPST ; 30 Vac/dc ; .8 Amps Max (Wire Leads)	.50-150A	Solid	Adjustable		93
RIBXKTA	• Solid State Switch SPST ; 30 Vac/dc ; .8 Amps Max (Terminals)	.50-150A	Solid	Adjustable		93
RIBXGHF	• Solid State Switch SPST ; 120Vac, 1 Amp Max (Wht/Blk 16" 18 AWG Wire Leads)	.50-150A	Split	Fixed, .50 Amp		93
RIBXGHTF	• Solid State Switch SPST ; 120Vac, 1 Amp Max (Terminal Strip, Accepts #14-22 AWG Wire)	.50-150A	Split	Fixed, .50 Amp		93
RIBXGHA	• Solid State Switch SPST ; 120Vac, 1 Amp Max (Wht/Blk 16" 18 AWG Wire Leads)	.75-150A	Split	Adjustable		93
RIBXGHTA	• Solid State Switch SPST ; 120Vac, 1 Amp Max (Terminal Strip, Accepts #14-22 AWG Wire)	.75-150A	Split	Adjustable		93
RIBXGF	• Solid State Switch SPST ; 30 Vac/dc ; .4 Amps Max (Wire Leads)	.35-150A	Split	Fixed, .35 Amp		94
RIBXGFL	• Solid State Switch SPST ; 30 Vac/dc ; .4 Amps Max (Wire Leads)	.75-150A	Split	Fixed, .75 Amp		94
RIBXGTF	• Solid State Switch SPST ; 30 Vac/dc ; .4 Amps Max (Terminals)	.35-150A	Split	Fixed, .35 Amp		94
RIBXGTFL	• Solid State Switch SPST ; 30 Vac/dc ; .4 Amps Max (Terminals)	.75-150A	Split	Fixed, .75 Amp		94
RIBXGA	• Solid State Switch SPST ; 30 Vac/dc ; .4 Amps Max (Wire Leads)	.75-150A	Split	Adjustable		94
RIBXGTA	• Solid State Switch SPST ; 30 Vac/dc ; .4 Amps Max (Terminals)	.75-150A	Split	Adjustable		94
RIBXGA-SCAL	• Solid State Switch SPST ; 30 Vac/dc ; .4 Amps Max (Wire Leads)	3-150A	Split	Adjustable		94
RIBXGTA-SCAL	• Solid State Switch SPST ; 30 Vac/dc ; .4 Amps Max (Terminals)	3-150A	Split	Adjustable		94
RIBXG21F	• Solid State Switch SPST ; 120-277Vac, 1 Amp Max (Wht/Blk 16" 18 AWG Wire Leads)	.50-150A	Split	Fixed, .50 Amp		95
RIBXG21TF	• Solid State Switch SPST ; 120-277Vac, 1 Amp Max (Terminal Strip, Accepts #14-22 AWG Wire)	.50-150A	Split	Fixed, .50 Amp		95
RIBXG21A	• Solid State Switch SPST ; 120-277Vac, 1 Amp Max (Wht/Blk 16" 18 AWG Wire Leads)	.75-150A	Split	Adjustable		95
RIBXG21TA	• Solid State Switch SPST ; 120-277Vac, 1 Amp Max (Terminal Strip, Accepts #14-22 AWG Wire)	.75-150A	Split	Adjustable		95
RIBXKT5-10	• 0-5 Vdc Voltage Output (Terminals)	0-10A	Solid	Analog		95
RIBXKT5-20	• 0-5 Vdc Voltage Output (Terminals)	0-20A	Solid	Analog		95
RIBXKT5-50	• 0-5 Vdc Voltage Output (Terminals)	0-50A	Solid	Analog		95
RIBXKT5-100	• 0-5 Vdc Voltage Output (Terminals)	0-100A	Solid	Analog		95
RIBXK420-20	• Loop Powered 4-20mA Transmitter Output (Wire Leads)	0-20A	Solid	Analog		96
RIBXK420-50	• Loop Powered 4-20mA Transmitter Output (Wire Leads)	0-50A	Solid	Analog		96
RIBXK420-100	• Loop Powered 4-20mA Transmitter Output (Wire Leads)	0-100A	Solid	Analog		96
RIBXGTV10	• 0-10 Vdc Voltage Output (Terminals)	0-20A, 0-50A, 0-100A	Split	Analog		96
RIBXG420-20	• Loop Powered 4-20 mA Transmitter (Wire Leads)	0-20A	Split	Analog		97
RIBXG420-50	• Loop Powered 4-20 mA Transmitter (Wire Leads)	0-50A	Split	Analog		97
RIBXG420-100	• Loop Powered 4-20 mA Transmitter (Wire Leads)	0-100A	Split	Analog		97

T STYLE AC SENSORS

MODEL #	UL SENSOR OUTPUT	RANGE	TYPE	THRESHOLD	NOTES	SPEC PAGE
RIBXF	• Solid State Switch SPST ; 30 Vac/dc ; .4 Amps Max	.50-30A	Internal	Fixed, .50 Amp		98
RIBXA	• Solid State Switch SPST ; 30 Vac/dc ; .4 Amps Max	.50-30A	Internal	Adjustable		98
RIBXV	• 0-5 Vdc / 0-10 Vdc Voltage Output	0-30A	Internal	Analog		98
RIBXRF	• Solid State Switch SPST ; 30 Vac/dc ; .4 Amps Max	1.25-150A	Solid	Fixed, 1.25 Amp		98
RIBXRA	• Solid State Switch SPST ; 30 Vac/dc ; .4 Amps Max	1.25-150A	Solid	Adjustable		98
RIBXJF	• Solid State Switch SPST ; 30 Vac/dc ; .4 Amps Max	3-150A	Split	Fixed, 3 Amp		99
RIBXJA	• Solid State Switch SPST ; 30 Vac/dc ; .4 Amps Max	3-150A	Split	Adjustable		99

TRACK MOUNT AC SENSORS

MODEL #	UL SENSOR OUTPUT	RANGE	TYPE	THRESHOLD	NOTES	SPEC PAGE
RIBMXV	• 0-5 Vdc / 0-10 Vdc Voltage Output	0-20A	Internal	Analog		99
RIBMXRF	• Solid State Switch SPST ; 30 Vac/dc ; .4 Amps Max	3-150A	Solid	Fixed, 3 Amp		99
RIBMXRA	• Solid State Switch SPST ; 30 Vac/dc ; .4 Amps Max	3-150A	Solid	Adjustable		99

UL = UL Listed : UL916 Energy Management, UL864 Fire ; USA & Canada

CURRENT SENSORS

CURRENT SENSOR & RELAY COMBINATIONS

Enclosed | Track Mount



Made in the U.S.A.
Meets the "Buy American" provisions of Section 1605 of the American Recovery and Reinvestment Act of 2009 (ARRA).

ENCLOSED AC SENSORS WITH RELAYS

MODEL #	UL	AC/DC	RELAYS	CONTACTS	OVERRIDE SWITCH	SENSOR RANGE	SENSOR TYPE	SENSOR THRESHOLD	SPEC PAGE
RIBHX24BF	•	24	1	SPST-N/O		.25-20A	Internal	Fixed, .25 Amp	100
RIBXLCF	•	10-30	1	SPDT		.50-10A	Internal	Fixed, .50 Amp	101
RIBXLCA	•	10-30	1	SPDT		.50-10A	Internal	Adjustable	101
RIBXLCV	•	10-30	1	SPDT		0 - 10A	Internal	Analog	101
RIBXLCEA	•	10-30	1	SPDT		.125 - 5A	Internal	Adjustable	101
RIBXLCEV	•	10-30	1	SPDT		0 - 5A	Internal	Analog	101
RIBXLCRF	•	10-30	1	SPDT		1.25-150A	Solid	Fixed, 1.25 Amp	101
RIBXLCRA	•	10-30	1	SPDT		1.25-150A	Solid	Adjustable	101
RIBXLCJF	•	10-30	1	SPDT		3-150A	Split	Fixed, 3 Amp	101
RIBXLCJA	•	10-30	1	SPDT		3-150A	Split	Adjustable	101
RIBXLSF	•	10-30	1	SPST	1	.50-10A	Internal	Fixed, .50 Amp	102
RIBXLSA	•	10-30	1	SPST	1	.50-10A	Internal	Adjustable	102
RIBXLSV	•	10-30	1	SPST	1	0 - 10A	Internal	Analog	102
RIBXLEA	•	10-30	1	SPST	1	.125 - 5A	Internal	Adjustable	102
RIBXLEV	•	10-30	1	SPST	1	0 - 5A	Internal	Analog	102
RIBXLSRF	•	10-30	1	SPST	1	1.25-150A	Solid	Fixed, 1.25 Amp	102
RIBXLSRA	•	10-30	1	SPST	1	1.25-150A	Solid	Adjustable	102
RIBXLSJF	•	10-30	1	SPST	1	3-150A	Split	Fixed, 3 Amp	102
RIBXLSJA	•	10-30	1	SPST	1	3-150A	Split	Adjustable	102
RIBX24BF	•	24	1	SPDT		.50-20A	Internal	Fixed, .50 Amp	103
RIBX24BA	•	24	1	SPDT		.50-20A	Internal	Adjustable	103
RIBX24BV	•	24	1	SPDT		0 - 20A	Internal	Analog	103
RIBX24SBF	•	24	1	SPST	1	.50-20A	Internal	Fixed, .50 Amp	103
RIBX24SBA	•	24	1	SPST	1	.50-20A	Internal	Adjustable	103
RIBX24SBV	•	24	1	SPST	1	0 - 20A	Internal	Analog	103
RIBX243PF	• ¹	24	1	3PST		.50-20A	Internal	Fixed, .50 Amp	104
RIBX243PA	• ¹	24	1	3PST		.50-20A	Internal	Adjustable	104
RIBX243PV	• ¹	24	1	3PST		0 - 20A	Internal	Analog	104

TRACK MOUNT AC SENSORS WITH RELAYS

MODEL #	UL	AC/DC	RELAYS	CONTACTS	OVERRIDE SWITCH	SENSOR RANGE	SENSOR TYPE	SENSOR THRESHOLD	SPEC PAGE
RIBMX24BF	•	24	1	SPDT		.50-20A	Internal	Fixed, .50 Amp	105
RIBMX24BA	•	24	1	SPDT		.50-20A	Internal	Adjustable	105
RIBMX24BV	•	24	1	SPDT		0 - 20A	Internal	Analog	105
RIBMX24SBF	•	24	1	SPST	1	.50-20A	Internal	Fixed, .50 Amp	105
RIBMX24SBA	•	24	1	SPST	1	.50-20A	Internal	Adjustable	105
RIBMX24SBV	•	24	1	SPST	1	0 - 20A	Internal	Analog	105



UL = UL Listed : UL916 Energy Management, UL864 Fire ; USA & Canada

¹ = UL Listed : UL916 Energy Management ; USA & Canada

AC CURRENT SWITCHES

RIBXK Series

Enclosed Self-Powered Solid Core AC Sensors

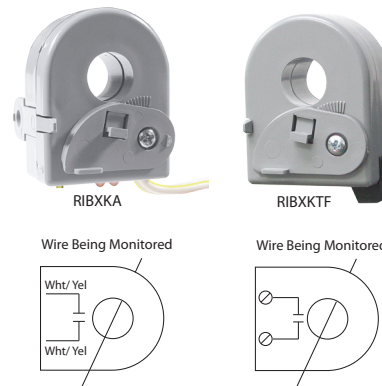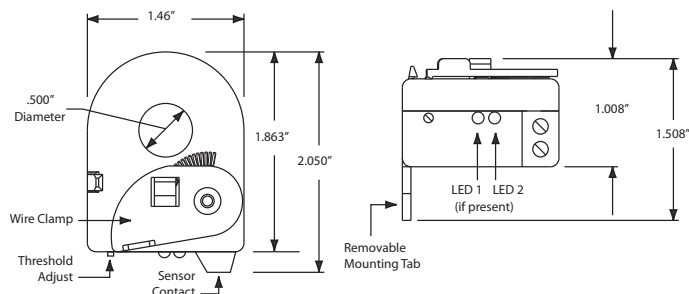

SPECIFICATIONS

Operating Temperature: -30 to 140° F

Humidity Range: 5 to 95% (noncondensing)

Max Sense Voltage: 600 Vac

Approvals: UL Listed, UL916, UL864, C-UL, California State Fire Marshal, CE, RoHS

Mounting/Installation: Removable mounting tab provided. The wire clamp locks against the wire being monitored, securing the unit in place.

Sensor Contact Output: Current below threshold: Open ; Current above threshold: Closed

Sensor Contact:

- Solid State Contact
- When sensor contact is off (open), leakage <30 uA @ 30Vac/dc
- When sensor contact is on (closed), voltage drop < .3 Vac/dc @ .1 Amp < 1.6 Vac/dc @ .4 Amp



RIBXK SERIES SELECTION GUIDE

Model#	Sensing Range	Type	Threshold	Sensor Contact Type	Switching Voltage Range	Maximum Switching Current	Sensor Contact Termination	LED 1	LED 2
RIBXKF	.25-150 Amp	Solid Core	Fixed, .25 Amp	Solid State Switch SPST	30 Vac/dc	.4 Amps Max	Wht/Yel 16" 18 AWG Wire Leads		
RIBXKTF	.25-150 Amp	Solid Core	Fixed, .25 Amp	Solid State Switch SPST	30 Vac/dc	.4 Amps Max	Terminal Strip, Accepts #14-22 AWG Wire		
RIBXKA	.50-150 Amp	Solid Core	Adjustable	Solid State Switch SPST	30 Vac/dc	.8 Amps Max	Wht/Yel 16" 18 AWG Wire Leads	Over Trip Point	Under Trip Point
RIBXKTA	.50-150 Amp	Solid Core	Adjustable	Solid State Switch SPST	30 Vac/dc	.8 Amps Max	Terminal Strip, Accepts #14-22 AWG Wire	Over Trip Point	Under Trip Point

AC CURRENT SWITCHES

RIBXGH Series

Enclosed Self-Powered Split Core 120 Vac Switching AC Current Sensors

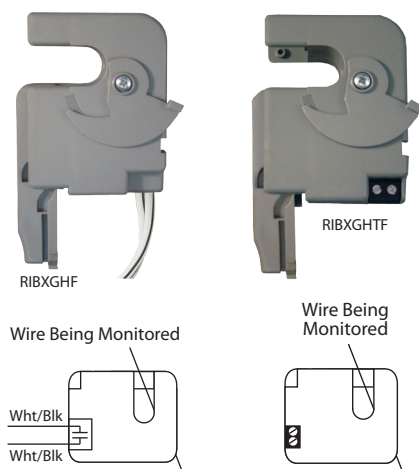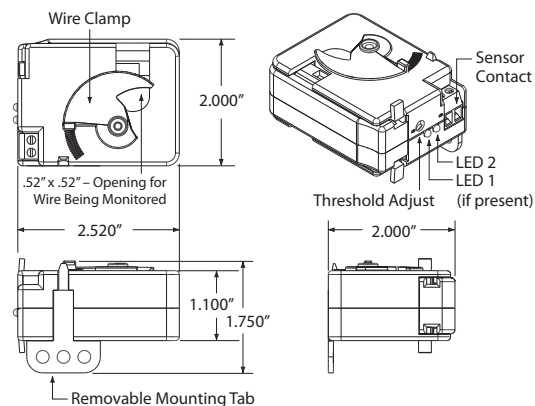

SPECIFICATIONS

Operating Temperature: -30 to 140° F

Humidity Range: 5 to 95% (noncondensing)

Temperature Derating: 1 Amp up to 50° C, 0.5 Amp up to 60° C

Max Sense Voltage: 600 Vac

Sensor Contact Status: Current below threshold: Open
Current above threshold: Closed

Approvals: UL Listed, UL916, C-UL, CE, RoHS¹

Mounting/Installation: Removable mounting tab provided. The wire clamp locks against the wire being monitored, securing the unit in place.

Notes:

- Use Sensor Contact to switch 120 Vac loads only.
- For testing purposes, Sensor Contact will measure approximately 250 Ω when closed and > 10 MΩ when open.
- The Sensor Contact is a Solid State Contact.



RIBXGH SERIES SELECTION GUIDE

Model#	Sensing Range	Type	Threshold	Sensor Contact Type	Switching Voltage Range	Maximum Switching Current	Sensor Contact Termination	LED 1	LED 2
RIBXGHF	.50-150 Amp	Split Core	Fixed, .50 Amp	Solid State Switch SPST	120 Vac Only	1 Amp Max	Wht/Blk 16" 18 AWG Wire Leads		
RIBXGHTF	.50-150 Amp	Split Core	Fixed, .50 Amp	Solid State Switch SPST	120 Vac Only	1 Amp Max	Terminal Strip, Accepts #14-22 AWG Wire		
RIBXGHA	.75-150 Amp	Split Core	Adjustable	Solid State Switch SPST	120 Vac Only	1 Amp Max	Wht/Blk 16" 18 AWG Wire Leads	Over Trip Point	Under Trip Point
RIBXGHTA	.75-150 Amp	Split Core	Adjustable	Solid State Switch SPST	120 Vac Only	1 Amp Max	Terminal Strip, Accepts #14-22 AWG Wire	Over Trip Point	Under Trip Point

AC CURRENT SWITCHES

RIBXG Series

Enclosed Self-Powered Split Core AC Sensors

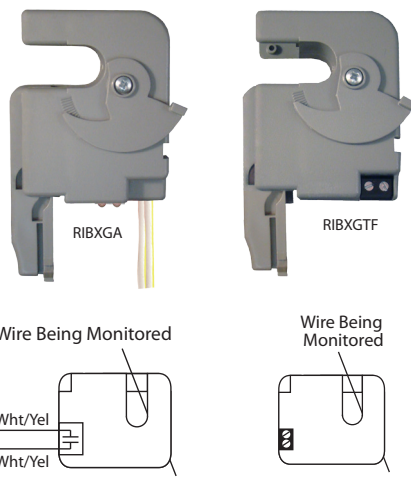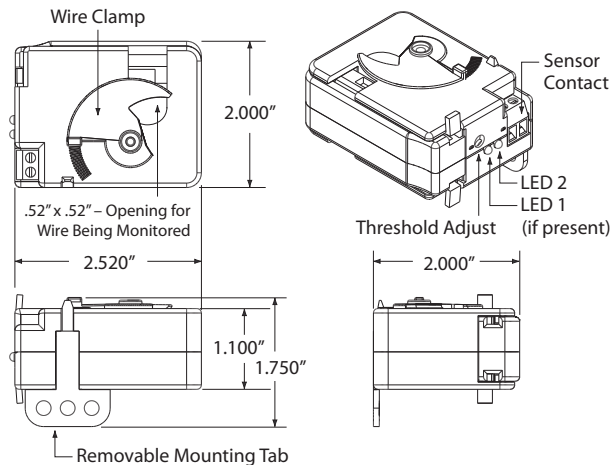


CURRENT SENSORS

SPECIFICATIONS

- Operating Temperature:** -30 to 140° F
- Humidity Range:** 5 to 95% (noncondensing)
- Max Sense Voltage:** 600 Vac
- Approvals:** UL Listed, UL916, UL864, C-UL, California State Fire Marshal, CE, RoHS
- Mounting/Installation:** Removable mounting tab provided. The wire clamp locks against the wire being monitored, securing the unit in place.
- Sensor Contact Status:** Current below threshold: Open
Current above threshold: Closed

- Sensor Contact:**
 - Solid State Contact
 - When sensor contact is off (open), leakage <30 uA @ 30Vac/dc
 - When sensor contact is on (closed), voltage drop < .3 Vac/dc @ .1 Amp
< 1.6 Vac/dc @ .4 Amp


SELF-CALIBRATING AC SWITCHES (Models with -SCAL Suffix)



-SCAL LED TABLE	
LED Off	No Current
Two Winks	Current Below Range
Three Winks	Current In Range
Four Winks	Current Above Range
Continuous Winks	Calibration in Progress

The SCAL unit begins the 30 second self-calibration process the first time current is applied in the operating range. The threshold is then set. Subsequent calibrations may be performed by moving SW1 to the position opposite of its current position with or without current applied (hands can be safely away from live voltage). Once current begins flowing, or if it already is, the calibration process will begin. At the end of the 30 seconds, amperage will be read and set as the threshold. SW2 in the ON position provides a 15% (+/-3%) differential. In the OFF position, it provides a 25% (+/-3%) differential. SW2 can be selected at anytime and does not affect the threshold setting. Current in-range closes the sensor contact. Current above or below range opens the sensor contact.

Example: With a current of 10 amps set as the threshold and a 15% differential, sensor contact will be closed between 8.5 amps and 11.5 amps and open outside of this range. A small amount of hysteresis is provided to prevent dithering near the differential limits.

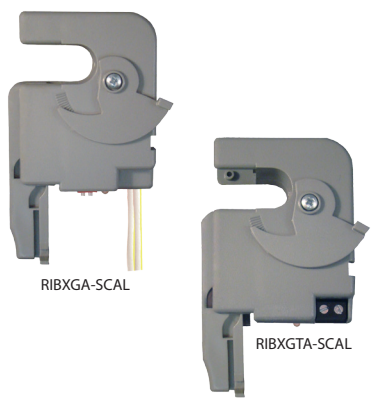

RIBXG SERIES SELECTION GUIDE



Model#	Sensing Range	Type	Threshold	Sensor Contact Type	Switching Voltage Range	Maximum Switching Current	Sensor Contact Termination	LED 1	LED 2
RIBXGF	.35-150 Amp	Split Core	Fixed, .35 Amp	Solid State Switch SPST	30 Vac/dc	.4 Amps Max	Wht/Yel 16" 18 AWG Wire Leads		
RIBXGFL*	.75-150 Amp	Split Core	Fixed, .75 Amp	Solid State Switch SPST	30 Vac/dc	.4 Amps Max	Wht/Yel 16" 18 AWG Wire Leads	Over Trip Point	
RIBXGTF	.35-150 Amp	Split Core	Fixed, .35 Amp	Solid State Switch SPST	30 Vac/dc	.4 Amps Max	Terminal Strip, Accepts #14-22 AWG Wire		
RIBXGTFL*	.75-150 Amp	Split Core	Fixed, .75 Amp	Solid State Switch SPST	30 Vac/dc	.4 Amps Max	Terminal Strip, Accepts #14-22 AWG Wire	Over Trip Point	
RIBXGA	.75-150 Amp	Split Core	Adjustable	Solid State Switch SPST	30 Vac/dc	.4 Amps Max	Wht/Yel 16" 18 AWG Wire Leads	Over Trip Point	Under Trip Point
RIBXGTA	.75-150 Amp	Split Core	Adjustable	Solid State Switch SPST	30 Vac/dc	.4 Amps Max	Terminal Strip, Accepts #14-22 AWG Wire	Over Trip Point	Under Trip Point
RIBXGA-SCAL	3-150 Amp	Split Core	Self-Cal.	Solid State Switch SPST	30 Vac/dc	.4 Amps Max	Wht/Yel 16" 18 AWG Wire Leads	See -SCAL Table	
RIBXGTA-SCAL	3-150 Amp	Split Core	Self-Cal.	Solid State Switch SPST	30 Vac/dc	.4 Amps Max	Terminal Strip, Accepts #14-22 AWG Wire	See -SCAL Table	

* = Not approved by California State Fire Marshal

AC CURRENT SWITCHES

RIBXG21 Series

Enclosed Self-Powered Split Core 120-277 Vac Switching AC Current Sensors

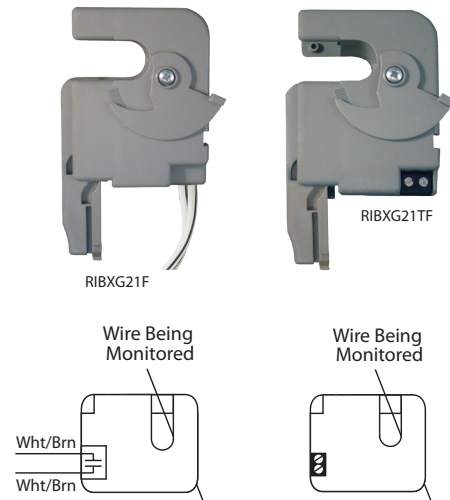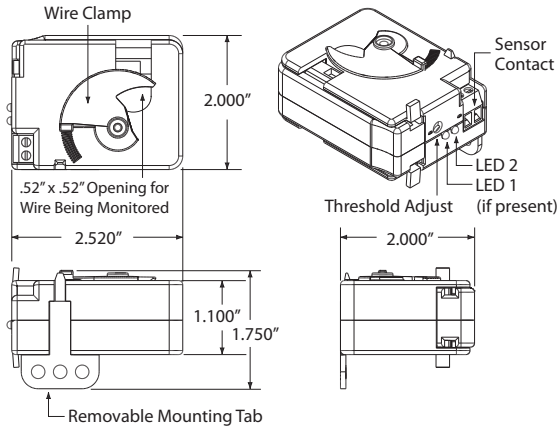

SPECIFICATIONS

Operating Temperature: -30 to 140° F

Humidity Range: 5 to 95% (noncondensing)

*** Temperature Derating:** 1 Amp up to 50° C, 0.5 Amp up to 60° C

Max Sense Voltage: 600 Vac

Sensor Contact Status: Monitored current below threshold: Open
Monitored current above threshold: Closed

Approvals: UL Listed, UL916, C-UL, CE, RoHS

Mounting/Installation: Unit can be secured using the supplied Mounting Tab, the adjustable Wire Clamp, or both.

Notes:

- Use Sensor Contact to switch 120-277 Vac loads only.
- For testing purposes, Sensor Contact will measure approximately 250 Ω when closed and > 10 MΩ when open.
- The Sensor Contact is a Solid State Contact.


RIBXG21 SERIES SELECTION GUIDE

Model#	Sensing Range	Type	Threshold	Sensor Contact Type	Switching Voltage Range	Maximum Switching Current	Sensor Contact Termination	LED 1	LED 2
RIBXG21F	.50-150 Amps AC	Split Core	Fixed, .50 Amp AC	Solid State Switch SPST	120-277 Vac	1 Amp AC *	Wht/Blk 16" 18 AWG Wire Leads		
RIBXG21TF	.50-150 Amps AC	Split Core	Fixed, .50 Amp AC	Solid State Switch SPST	120-277 Vac	1 Amp AC *	Terminal Strip, Accepts #14-22 AWG Wire		
RIBXG21A	.75-150 Amps AC	Split Core	Adjustable	Solid State Switch SPST	120-277 Vac	1 Amp AC *	Wht/Blk 16" 18 AWG Wire Leads	Over Threshold	Under Threshold
RIBXG21TA	.75-150 Amps AC	Split Core	Adjustable	Solid State Switch SPST	120-277 Vac	1 Amp AC *	Terminal Strip, Accepts #14-22 AWG Wire	Over Threshold	Under Threshold

AC TRANSDUCERS

RIBXKTV Series

Enclosed Self-Powered Solid Core Current to DC Transducers

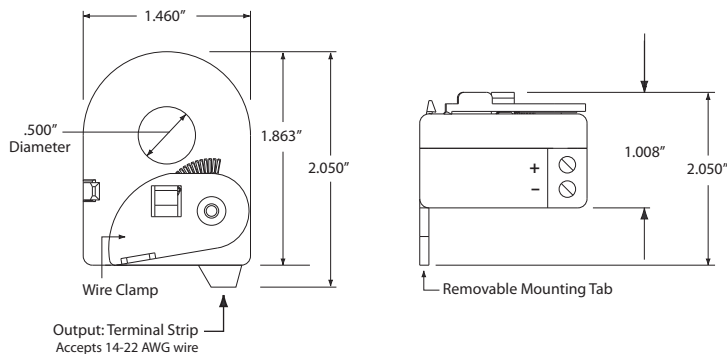

SPECIFICATIONS

Operating Temperature: -30 to 140° F

Humidity Range: 5 to 95% (noncondensing)

Accuracy: 96.8% Full Scale

Loading: RIBXKTV5-10, 1% Error @ 180 kΩ
RIBXKTV5-20, 1% Error @ 90 kΩ
RIBXKTV5-50, 1% Error @ 40 kΩ
RIBXKTV5-100, 1% Error @ 15 kΩ

Max Sense Voltage: 600 Vac

Approvals: UL Listed, UL916, UL864, California State Fire Marshal, C-UL, CE, RoHS

Mounting/Installation: Removable mounting tab provided. The wire clamp locks against the wire being monitored, securing the unit in place.

Sensor Type: Solid core with voltage output


RIBXKTV SERIES SELECTION GUIDE

Model#	Sensing Range	Sensor Output
RIBXKTV5-10	0-10 Amp	0-5 Vdc (Terminal Strip, Accepts #14-22 AWG Wire)
RIBXKTV5-20	0-20 Amp	0-5 Vdc (Terminal Strip, Accepts #14-22 AWG Wire)
RIBXKTV5-50	0-50 Amp	0-5 Vdc (Terminal Strip, Accepts #14-22 AWG Wire)
RIBXKTV5-100	0-100 Amp	0-5 Vdc (Terminal Strip, Accepts #14-22 AWG Wire)

AC TRANSDUCERS


RIBXK420 Series

Enclosed Self-Powered Solid Core 20, 50, and 100 Amp Current Transducers with Loop Powered 4-20 mA Output (Pre-Wired)

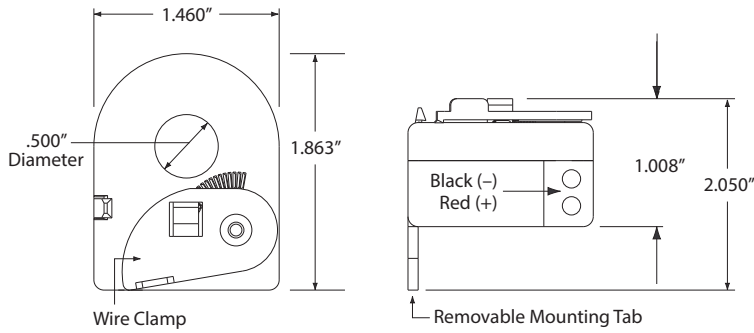

SPECIFICATIONS

- Operating Temperature:** -30 to 140° F
- Humidity Range:** 5 to 95% (noncondensing)
- Wires:** Red (positive) & Black (negative), 16", 18 AWG, 600V Rated
- Sensor Type:** Internal, with 4-20 mA Transmitter Output
- Sensor Range:** 0-20 Amps, 0-50 Amps, or 0-100 Amps (See Selection Guide Below)
- Accuracy:** 96.4% FS
- Linearity:** 99% FS (25%-100% Span)
- Max Output Current:** 30 mA
- Max Sense Voltage:** 600 Vac
- Approvals:** UL Listed, UL916, UL864, C-UL, California State Fire Marshal, CE, RoHS
- Mounting/Installation:** Removable mounting tab provided. The wire clamp locks against the wire being monitored, securing the unit in place.

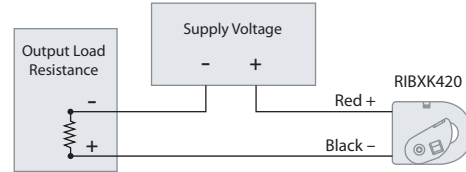

OUTPUT LOAD RESISTANCE	SUPPLY VOLTAGE		
	Maximum	Minimum	Maximum
700 ohms	26 Vdc	35 Vdc	35 Vdc
600 ohms	24 Vdc	35 Vdc	35 Vdc
500 ohms	21 Vdc	35 Vdc	35 Vdc
400 ohms	19 Vdc	30 Vdc	30 Vdc
300 ohms	17 Vdc	30 Vdc	30 Vdc
250 ohms	16 Vdc	28 Vdc	28 Vdc
200 ohms	14 Vdc	28 Vdc	28 Vdc
100 ohms	12 Vdc	28 Vdc	28 Vdc
50 ohms	11 Vdc	28 Vdc	28 Vdc


RIBXKTV SERIES SELECTION GUIDE

Model#	Sensing Range	Sensor Output
RIBXK420-20	0-20 Amps	Loop Powered 4-20 mA Transmitter (Pre-Wired)
RIBXK420-50	0-50 Amps	Loop Powered 4-20 mA Transmitter (Pre-Wired)
RIBXK420-100	0-100 Amps	Loop Powered 4-20 mA Transmitter (Pre-Wired)

AC TRANSDUCER

RIBXGTV10

Enclosed Self-Powered Split Core Multi-Range (0-20A, 50A, or 100A) AC Transducer with 0-10Vdc Terminal Output

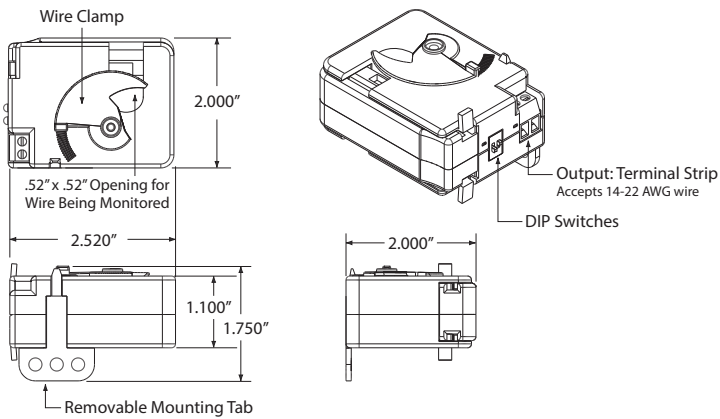

SPECIFICATIONS



- Operating Temperature:** -30 to 140° F
- Humidity Range:** 5 to 95% (noncondensing)
- Accuracy:** 96.8% Full Scale
- Max Sense Voltage:** 600 Vac
- Approvals:** UL Listed, UL916, UL864, California State Fire Marshal, C-UL, CE, RoHS
- Mounting/Installation:** Removable mounting tab provided. The wire clamp locks against the wire being monitored, securing the unit in place.
- Sensor Type:** Split core with voltage output

DIP SWITCH		
1	2	Sensing Range
OFF	OFF	0-20 Amp
OFF	ON	0-50 Amp
ON	OFF	0-100 Amp

AC TRANSDUCERS

RIBXG420 Series

Enclosed Self-Powered Split Core 20, 50, and 100 Amp Current Transducers with Loop Powered 4-20 mA Output (Pre-Wired)

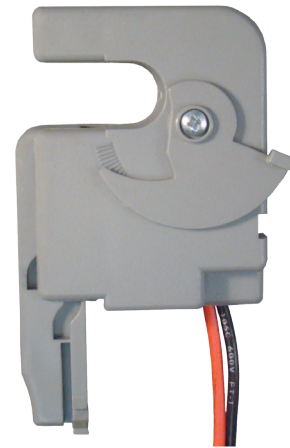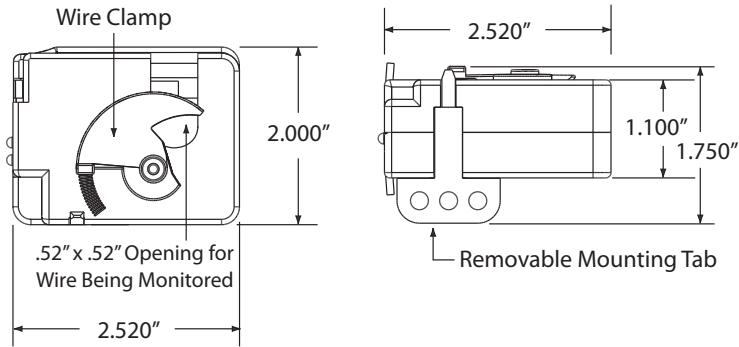

SPECIFICATIONS

- Operating Temperature:** -30 to 140° F
- Humidity Range:** 5 to 95% (noncondensing)
- Wires:** Red (positive) & Black (negative), 16", 18 AWG, 600V Rated
- Sensor Type:** Internal, with 4-20 mA Transmitter Output
- Sensor Range:** 0-20 Amps, 0-50 Amps, or 0-100 Amps (See Selection Guide Below)
- Accuracy:** Refer to chart below.
- Linearity:** 99% FS (20%-100% Span)
- Max Output Current:** 30 mA
- Max Sense Voltage:** 600 Vac
- Approvals:** UL Listed, UL864, UL508, C-UL, California State Fire Marshal, CE, RoHS
- Mounting/Installation:** Removable mounting tab provided. The wire clamp locks against the wire being monitored, securing the unit in place.

OUTPUT LOAD RESISTANCE	SUPPLY VOLTAGE	
	Minimum	Maximum
Maximum	24 Vdc	35 Vdc
800 ohms	18 Vdc	35 Vdc
500 ohms	15 Vdc	35 Vdc
350 ohms	13 Vdc	35 Vdc
250 ohms	12 Vdc	35 Vdc
200 ohms	10 Vdc	35 Vdc
100 ohms	9 Vdc	35 Vdc
50 ohms	9 Vdc	35 Vdc


RIBXG420 SERIES SELECTION GUIDE

Model#	Sensing Range	Sensor Output	ACCURACY		
			Span 20% – 100%	Span 10% – 100%	Span 0% – 100%
RIBXG420-20	0-20 Amps	Loop Powered 4-20 mA Transmitter (Pre-Wired)	99%	99%	95%
RIBXG420-50	0-50 Amps	Loop Powered 4-20 mA Transmitter (Pre-Wired)	99%	97.5%	92%
RIBXG420-100	0-100 Amps	Loop Powered 4-20 mA Transmitter (Pre-Wired)	99%	97%	91%

- Accuracy charts are available on data sheet on website.

http://www.functionaldevices.com/pdf/datasheets/RIBXG420_SERIES.pdf


Or scan QR code with your smart phone.

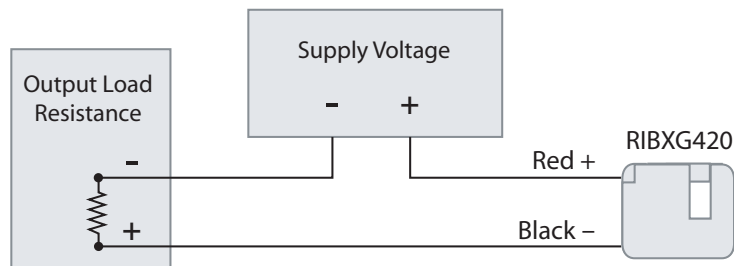

AC CURRENT SWITCHES


RIBXF

Enclosed Self-Powered Internal **Fixed** 0.50-30 Amp AC Sensor

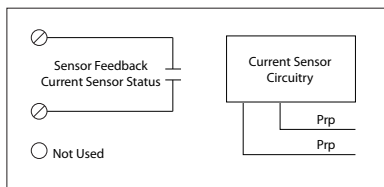

RIBXA

Enclosed Self-Powered Internal **Adjustable** 0.50-30 Amp AC Sensor

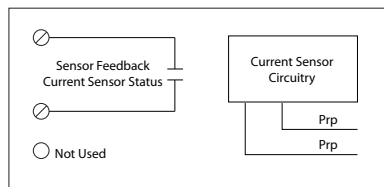

Made in USA
Meets
"Buy American"
of ARRA 2009

SPECIFICATIONS

Operating Temperature: -30 to 140° F

Humidity Range: 5 to 95% (noncondensing)

Dimensions: 4.00" x 4.00" x 1.80" with .50" NPT Nipple

Wire Length: 16", 600V Rated

Approvals: UL Listed, UL916, UL864, C-UL

California State Fire Marshal, CE, RoHS

Housing Rating: UL Accepted for Use in Plenum, NEMA 1

Sensor Type: Internal, with contact status

Sensor Threshold: Fixed, .5 Amps (RIBXF)

Adjustable, .50-30 Amps (RIBXA)

Sensor Range: .50-30 Amps

Max Sense Voltage: 600 Vac

Sensor Contact Status: Current below threshold: Open / LED OFF
Current above threshold: Closed / LED ON


Sensor Contact:

- Solid State Contact
- 30 Vac/dc, .4 Amp Max.
- When sensor contact is off (open), leakage <30 uA @ 30Vac/dc
- When sensor contact is on (closed), voltage drop <.3 Vac/dc @ .1 Amp <1.6 Vac/dc @ .4 Amp

AC TRANSDUCER

RIBXV

Enclosed Self-Powered Internal 0-30 Amp to 0-5 Vdc / 0-10 Vdc AC Transducer

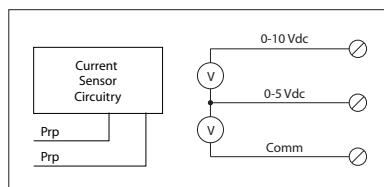

Made in USA
Meets
"Buy American"
of ARRA 2009

SPECIFICATIONS

Operating Temperature: -30 to 140° F

Humidity Range: 5 to 95% (noncondensing)

Dimensions: 4.00" x 4.00" x 1.80" with .50" NPT Nipple

Wire Length: 16", 600V Rated

Approvals: UL Listed, UL916, UL864, C-UL

California State Fire Marshal, CE, RoHS

Housing Rating: UL Accepted for Use in Plenum, NEMA 1

Sensor Type: Internal, with voltage output

Sensor Range: 0-30 Amps

Max Sense Voltage: 600 Vac


Sensor Output:

- Voltage output is proportional to current sensor range.
- Min. Input Impedance = 30K ohms
- Accuracy +/- 3% full scale
- Ripple < 10m Vac

AC CURRENT SWITCHES


RIBXRF

Enclosed Self-Powered Solid Ring Remote **Fixed** 1.25-150 Amp AC Sensor

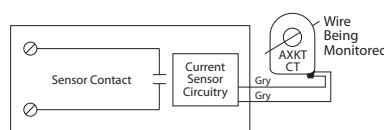

RIBXRA

Enclosed Self-Powered Solid Ring Remote **Adjustable** 1.25-150 Amp AC Sensor

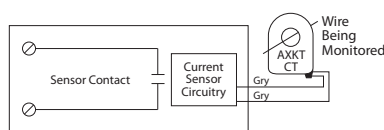

Made in USA
Meets
"Buy American"
of ARRA 2009

SPECIFICATIONS

Operating Temperature: -30 to 140° F

Humidity Range: 5 to 95% (noncondensing)

Dimensions: 4.00" x 4.00" x 1.80" with .50" NPT Nipple

Remote Dimensions: 1.863" x 1.460", .500" Inside Diameter

Wire Length: 16", 600V Rated

Approvals: UL Listed, UL916, UL864, C-UL, California State Fire Marshal, CE, RoHS

Housing Rating: UL Accepted for Use in Plenum, NEMA 1

Sensor Type: External, with contact status

Sensor Threshold: Fixed, 1.25 Amps (RIBXRF)

Adjustable, 1.25-150 Amps (RIBXRA)

Sensor Range: 1.25-150 Amps

Max Sense Voltage: 600 Vac

Sensor Contact Status: Current below threshold: Open / LED OFF
Current above threshold: Closed / LED ON


Sensor Contact:

- Solid State Contact
- 30 Vac/dc, .4 Amp Max.
- When sensor contact is off (open), leakage <30 uA @ 30Vac/dc
- When sensor contact is on (closed), voltage drop <.3 Vac/dc @ .1 Amp <1.6 Vac/dc @ .4 Amp

AC CURRENT SWITCHES



RIBXJF

Enclosed Self-Powered Split Ring Remote
Fixed 3-150 Amp AC Sensor

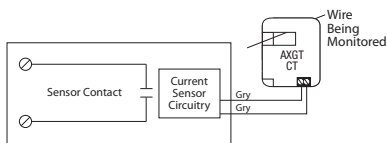

RIBXJA

Enclosed Self-Powered Split Ring Remote
Adjustable 3-150 Amp AC Sensor

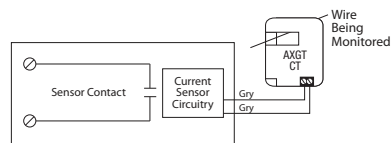

SPECIFICATIONS

Operating Temperature: -30 to 140° F

Humidity Range: 5 to 95% (noncondensing)

Dimensions: 4.00" x 4.00" x 1.80" with .50" NPT Nipple

Remote Dimensions: (Outside) 2.52" x 2.00", (Inside) .52" x .52"

Wire Length: 16", 600V Rated

Approvals: UL Listed, UL916, UL864, C-UL

California State Fire Marshal, CE, RoHS

Housing Rating: UL Accepted for Use in Plenum, NEMA 1

Sensor Type: External, with contact status

Sensor Threshold: Fixed, 3 Amps (RIBXJF)

Adjustable, 3-150 Amps (RIBXJA)

Sensor Range: 3-150 Amps

Max Sense Voltage: 600 Vac

Sensor Contact Status: Current below threshold: Open / LED OFF

Current above threshold: Closed / LED ON

Sensor Contact:



- Solid State Contact
- 30 Vac/dc, .4 Amp Max.
- When sensor contact is off (open), leakage <30 uA @ 30Vac/dc
- When sensor contact is on (closed), voltage drop <.3 Vac/dc @ .1 Amp <1.6 Vac/dc @ .4 Amp

CURRENT SENSORS

AC TRANSDUCER

RIBMXV

4.00" Track Mount Internal 0-20 Amp to 0-5 Vdc /
0-10 Vdc Self-Powered AC Transducer

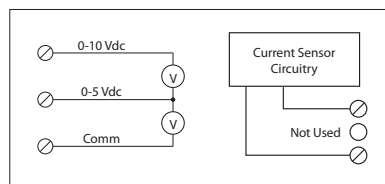

SPECIFICATIONS

Operating Temperature: -30 to 140° F

Humidity Range: 5 to 95% (noncondensing)

Dimensions: 1.700" x 4.000" x 1.250"

Track Mount: 4.000", See MT4 Series on page 152

MT4 Mounting Track Sold Separately

Approvals: UL Listed, UL916, UL864, C-UL

California State Fire Marshal, CE, RoHS

Sensor Type: Internal, with voltage output

Sensor Range: 0-20 Amps

Max Sense Voltage: 300 Vac


Sensor Output:

- Voltage output is proportional to current sensor range.
- Min. Input Impedance = 30K ohms
- Accuracy +/- 1% full scale
- Ripple < 10m Vac

AC CURRENT SWITCHES



RIBMXRF

4.00" Track Mount Solid Ring Remote Fixed
3-150 Amp AC Sensor, Self-Powered

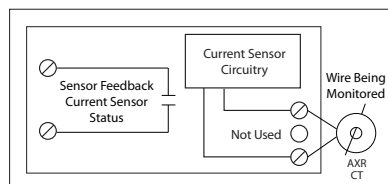

RIBMXRA

4.00" Track Mount Solid Ring Remote Adjustable
3-150 Amp AC Sensor, Self-Powered

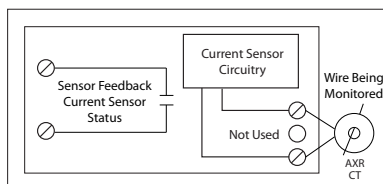

SPECIFICATIONS

Operating Temperature: -30 to 140° F

Humidity Range: 5 to 95% (noncondensing)

Dimensions: 1.700" x 4.000" x 1.250"

Track Mount: 4.000", See MT4 Series on page 152

MT4 Mounting Track Sold Separately

Wire Length: 16", 600V Rated

Approvals: UL Listed, UL916, UL864, C-UL

California State Fire Marshal, CE, RoHS

Sensor Type: External, with contact status

Inside Diameter: .75"

Outside Diameter: 2.28"

Sensor Threshold: Fixed, 3 Amps (RIBMXRF)

Adjustable, 3-150 Amps (RIBMXRA)

Sensor Range: 3-150 Amps

Max Sense Voltage: 600 Vac

Sensor Contact Status: Current below threshold: Open / LED OFF

Current above threshold: Closed / LED ON



Sensor Contact:

- Solid State Contact
- 30 Vac/dc, .4 Amp Max.
- When sensor contact is off (open), leakage <30 uA @ 30Vac/dc
- When sensor contact is on (closed), voltage drop <.3 Vac/dc @ .1 Amp <1.6 Vac/dc @ .4 Amp

RELAY & AC CURRENT SWITCH COMBO

RIBHX24BF

Enclosed 20 Amp SPST-N/O Relay/AC Sensor Combination, with 24 Vac Coil

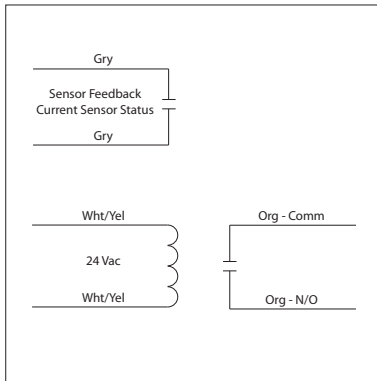

SPECIFICATIONS

Expected Relay Life: 10 million cycles minimum mechanical
Operating Temperature: -30 to 140° F
Humidity Range: 5 to 95% (noncondensing)
Operate Time: 20ms
Relay Status: Red LED On = Activated
Current Sensor Status: Pink LED On = Current Over Trip Point (0.25 Amp)
Dimensions: 1.70" x 2.80" x 1.50" with .50" NPT nipple
Wire Length: 16", 600V Rated
Approvals: UL Listed, UL916, C-UL, CE, RoHS
Housing Rating: UL Accepted for Use in Plenum, NEMA 1
Gold Flash: No

Sensor Type: Internal, with contact status
Sensor Threshold: Fixed, .25 Amp
Sensor Range: .25-20 Amps
Sensor Feedback Output: Solid State Contact 30 Vac/dc, 100 mA

Contact Ratings:
 20 Amp Resistive @ 277 Vac
 20 Amp Ballast @ 277 Vac
 16 Amp Electronic Ballast @ 277 Vac (N/O)
 10 Amp Tungsten @ 120 Vac (N/O)
 1,110 VA Pilot Duty @ 277 Vac
 770 VA Pilot Duty @ 120 Vac
 2 HP @ 277 Vac
 1 HP @ 120 Vac

Coil Current:
 128 mA @ 24 Vac
 71 mA @ 30 Vdc

Coil Voltage Input:
 24 Vac ; 50-60 Hz
 Drop Out = 3 Vac
 Pull In = 18 Vac

Sensor Contact:
 • When current sensor status is off (open), leakage < 30 uA @ 30Vac/dc
 • When current sensor status is on (closed), voltage drop < .3 Vac/dc @ .1 Amp
 < 1.6 Vac/dc @ .4 Amp


RELAY & AC CURRENT SWITCH COMBOS

RIBXLC Series


Enclosed Relay/AC Sensor Combinations, SPDT with 10-30 Vac/dc Coil




RIBXLC A, RIBXLC F, RIBXLC EA+

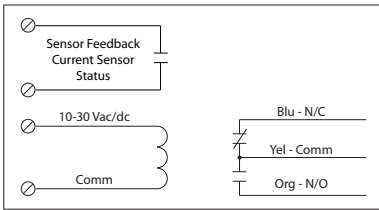



RIBXLC V, RIBXLC EV^

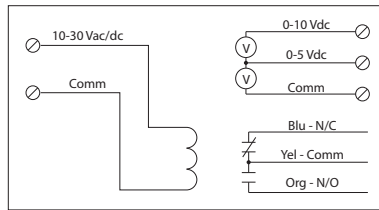

RIBXLC RA, RIBXLC RF+

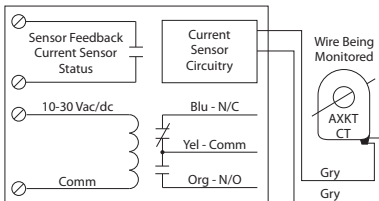

RIBXLC JA, RIBXLC JF+

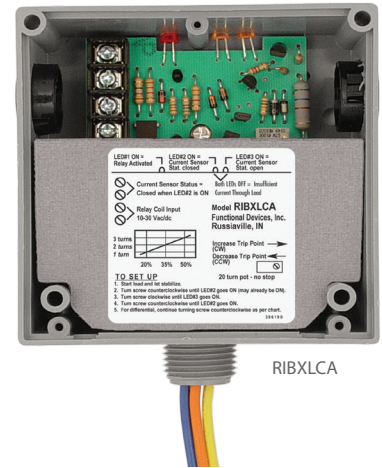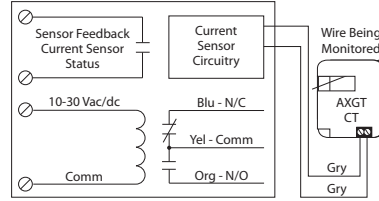

CURRENT SENSORS

SPECIFICATIONS

- # Relays & Contact Type:** One (1) SPDT Continuous Duty Coil
- Expected Relay Life:** 10 million cycles minimum mechanical
- Operating Temperature:** -30 to 140° F
- Humidity Range:** 5 to 95% (noncondensing)
- Operate Time:** 20ms
- Relay Status:** Red LED On = Activated
- Dimensions:** 4.00" x 4.00" x 1.80" with .50" NPT Nipple
- Wire Length:** 16", 600V Rated
- Approvals:** UL Listed, UL916, UL864, C-UL, California State Fire Marshal, CE, RoHS
- Housing Rating:** UL Accepted for Use in Plenum, NEMA 1
- Gold Flash:** Yes
- Override Switch:** No

Coil Current:

- 33 mA @ 10 Vac
- 35 mA @ 12 Vac
- 46 mA @ 24 Vac
- 55 mA @ 30 Vac
- 13 mA @ 10 Vdc
- 15 mA @ 12 Vdc
- 18 mA @ 24 Vdc
- 20 mA @ 30 Vdc

Coil Voltage Input:

- 10-30 Vac/dc; 50-60 Hz
- Drop Out = 2.1 Vac / 2.8 Vdc
- Pull In = 9 Vac / 10 Vdc

+ Sensor Contact:

- When current sensor status is off (open), leakage <30 uA @ 30Vac/dc
- When current sensor status is on (closed), voltage drop < .3 Vac/dc @ .1 Amp
- < 1.6 Vac/dc @ .4 Amp

^ Sensor Feedback Output:

- Voltage output is proportional to current sensor range.
- Min. Input Impedance = 30K ohms
- Accuracy +/- 3% full scale
- Vripple < 10m Vac

Notes:

- Models AXKT and AXGT CT remotes do not have contact closure circuitry and only work in conjunction with RIBXLCR and RIBXLCJ models, respectively.

RIBXLC SERIES SELECTION GUIDE

Model#	Sensing Range	Type *	Threshold	Sensor Output	Remote Style	Resistive	Contact Ratings
RIBXLCF	.50-10 Amps	Internal w/ contact status	Fixed, .50 Amp	Solid State Contact 30 Vac/dc, 0.4 Amp		10 Amp	10 Amp Resistive @ 120-277 Vac 10 Amp Resistive @ 28 Vdc 480 VA Pilot Duty @ 240-277 Vac 480 VA Ballast @ 277 Vac <i>Not rated for Electronic Ballast</i> 600 Watt Tungsten @ 120 Vac (N/O) 240 Watt Tungsten @ 120 Vac (N/C) 1/3 HP @ 120-240 Vac (N/O) 1/6 HP @ 120-240 Vac (N/C) 1/4 HP @ 277 Vac (N/O) 1/8 HP @ 277 Vac (N/C)
RIBXLC A	.50-10 Amps	Internal w/ contact status	Adjustable	Solid State Contact 30 Vac/dc, 0.4 Amp		10 Amp	
RIBXLC V	0-10 Amps	Internal w/ voltage output	Analog	0-5 Vdc 0-10 Vdc		10 Amp	
RIBXLCRF	1.25-150 Amps	External w/ contact status	Fixed, 1.25 Amp	Solid State Contact 30 Vac/dc, 0.4 Amp	Model AXKT: (Solid Core Remote CT)	10 Amp	
RIBXLCRA	1.25-150 Amps	External w/ contact status	Adjustable	Solid State Contact 30 Vac/dc, 0.4 Amp	Model AXKT: (Solid Core Remote CT)	10 Amp	
RIBXLCJF	3-150 Amps	External w/ contact status	Fixed, 3 Amp	Solid State Contact 30 Vac/dc, 0.4 Amp	Model AXGT: (Split Core Remote CT)	10 Amp	
RIBXLCJA	3-150 Amps	External w/ contact status	Adjustable	Solid State Contact 30 Vac/dc, 0.4 Amp	Model AXGT: (Split Core Remote CT)	10 Amp	
RIBXLC EA	.125-5 Amps	Internal w/ contact status	Adjustable	Solid State Contact 30 Vac/dc, 0.4 Amp		5 Amp	5 Amp Resistive @ 277 Vac 345 VA Pilot Duty @ 120/240 Vac (N/O) 268 VA Pilot Duty @ 277 Vac (N/O) 211 VA Pilot Duty @ 120/240 Vac (N/C) 175 VA Pilot Duty @ 277 Vac (N/C) 1/3 HP @ 120-240 Vac (N/O) 1/6 HP @ 120-240 Vac (N/C) 1/4 HP @ 277 Vac (N/O) 1/8 HP @ 277 Vac (N/C)
RIBXLC EV	0-5 Amps	Internal w/ voltage output	Analog	0-5 Vdc 0-10 Vdc		5 Amp	

* = Internal current sensor monitors current through common contact of relay.


RELAY & AC CURRENT SWITCH COMBOS

RIBXLS Series


Enclosed Relay/AC Sensor Combinations, SPST + Override with 10-30 Vac/dc Coil




RIBXLSA, RIBXLSF, (RIBXLSEA*)+

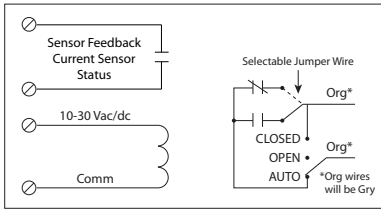


RIBXLSV, (RIBXLSEV*)^

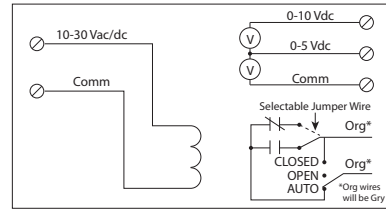

RIBXLSRA, RIBXLSRF+

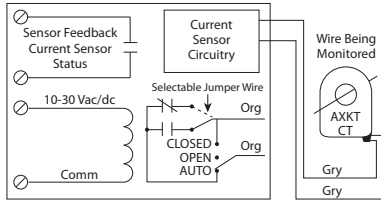

RIBXLSJA, RIBXLSJF+

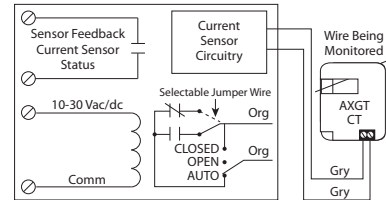

CURRENT SENSORS

SPECIFICATIONS

- # Relays & Contact Type:** One (1) SPST Continuous Duty Coil
- Expected Relay Life:** 10 million cycles minimum mechanical
- Operating Temperature:** -30 to 140° F
- Humidity Range:** 5 to 95% (noncondensing)
- Operate Time:** 20ms
- Relay Status:** Red LED On = Activated
- Dimensions:** 4.00" x 4.00" x 1.80" with .50" NPT Nipple
- Wire Length:** 16", 600V Rated
- Approvals:** UL Listed, UL916, UL864, C-UL California State Fire Marshal, CE, RoHS
- Housing Rating:** UL Accepted for Use in Plenum, NEMA 1
- Gold Flash:** Yes
- Override Switch:** Yes

- Coil Current:**
 - 33 mA @ 10 Vac
 - 35 mA @ 12 Vac
 - 46 mA @ 24 Vac
 - 55 mA @ 30 Vac
 - 13 mA @ 10 Vdc
 - 15 mA @ 12 Vdc
 - 18 mA @ 24 Vdc
 - 20 mA @ 30 Vdc
- Coil Voltage Input:**
 - 10-30 Vac/dc ; 50-60 Hz
 - Drop Out = 2.1 Vac / 2.8 Vdc
 - Pull In = 9 Vac / 10 Vdc

- + Sensor Contact:**
 - When current sensor status is off (open), leakage <30 uA @ 30Vac/dc
 - When current sensor status is on (closed), voltage drop < .3 Vac/dc @ .1 Amp
 - < 1.6 Vac/dc @ .4 Amp
- ^ Sensor Feedback Output:**
 - Voltage output is proportional to current sensor range.
 - Min. Input Impedance = 30K ohms
 - Accuracy +/- 3% full scale
 - Vripple < 10m Vac
- Notes:**
 - Normally Open or Normally Closed selected by yellow jumper wire
 - Models AXKT and AXGT CT remotes do not have contact closure circuitry and only work in conjunction with RIBXLSR and RIBXLSJ models, respectively.

RIBXLS SERIES SELECTION GUIDE

Model#	Sensing Range	Type *	Threshold	Sensor Output	Remote Style	Resistive	Contact Ratings
RIBXLSF	.50-10 Amps	Internal w/ contact status	Fixed, .50 Amp	Solid State Contact 30 Vac/dc, 0.4 Amp		10 Amp	10 Amp Resistive @ 277 Vac 480 VA Pilot Duty @ 277 Vac 480 VA Ballast @ 277 Vac
RIBXLSA	.50-10 Amps	Internal w/ contact status	Adjustable	Solid State Contact 30 Vac/dc, 0.4 Amp		10 Amp	Not rated for Electronic Ballast 600 Watt Tungsten @ 120 Vac (N/O) 240 Watt Tungsten @ 120 Vac (N/C) 1/3 HP @ 120-240 Vac (N/O) 1/6 HP @ 120-240 Vac (N/C) 1/4 HP @ 277 Vac (N/O) 1/8 HP @ 277 Vac (N/C)
RIBXLSV	0-10 Amps	Internal w/ voltage output	Analog	0-5 Vdc 0-10 Vdc		10 Amp	
RIBXLSRF	1.25-150 Amps	External w/ contact status	Fixed, 1.25 Amp	Solid State Contact 30 Vac/dc, 0.4 Amp	Model AXKT: (Solid Core Remote)	10 Amp	
RIBXLSRA	1.25-150 Amps	External w/ contact status	Adjustable	Solid State Contact 30 Vac/dc, 0.4 Amp	Model AXKT: (Solid Core Remote)	10 Amp	
RIBXLSJF	3-150 Amps	External w/ contact status	Fixed, 3 Amp	Solid State Contact 30 Vac/dc, 0.4 Amp	Model AXGT: (Split Core Remote)	10 Amp	
RIBXLSJA	3-150 Amps	External w/ contact status	Adjustable	Solid State Contact 30 Vac/dc, 0.4 Amp	Model AXGT: (Split Core Remote)	10 Amp	
RIBXLSEA	.125-5 Amps	Internal w/ contact status	Adjustable	Solid State Contact 30 Vac/dc, 0.4 Amp		5 Amp	5 Amp Resistive @ 277 Vac 345 VA Pilot Duty @ 120/240 Vac (N/O) 268 VA Pilot Duty @ 277 Vac (N/O) 211 VA Pilot Duty @ 120/240 Vac (N/C) 175 VA Pilot Duty @ 277 Vac (N/C) 1/3 HP @ 120-240 Vac (N/O) 1/6 HP @ 120-240 Vac (N/C) 1/4 HP @ 277 Vac (N/O) 1/8 HP @ 277 Vac (N/C)
RIBXLSEV	0-5 Amps	Internal w/ voltage output	Analog	0-5 Vdc 0-10 Vdc		5 Amp	

* = Internal current sensor monitors current through common contact of relay.


RELAY & AC CURRENT SWITCH COMBOS

RIBX24 Series


Enclosed 20 Amp Relay/AC Sensor Combinations, with 24 Vac/dc Coil




RIBX24BA, RIBX24BF+

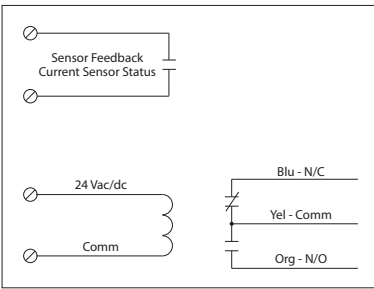



RIBX24BV^

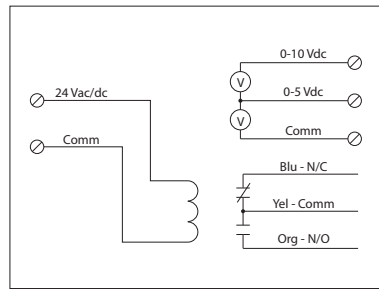

RIBX24SBA, RIBX24SBF+

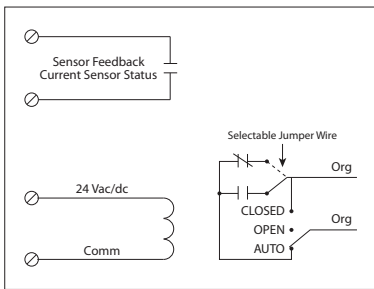

RIBX24SBV^

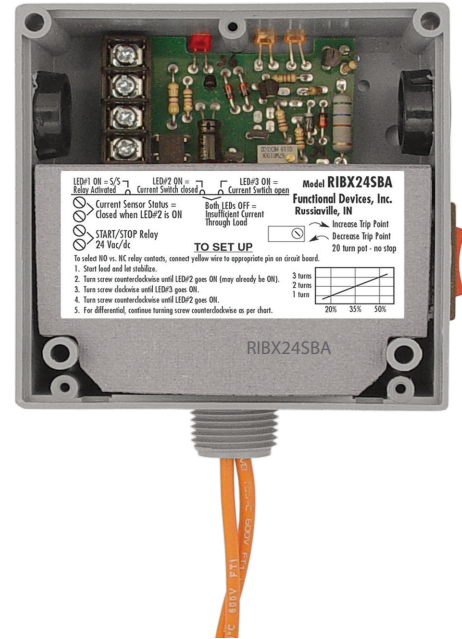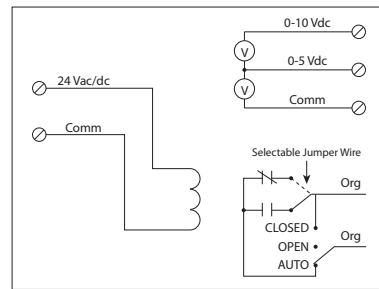

CURRENT SENSORS

SPECIFICATIONS

- Expected Relay Life:** 10 million cycles minimum mechanical
- Operating Temperature:** -30 to 140° F
- Humidity Range:** 5 to 95% (noncondensing)
- Operate Time:** 20ms
- Relay Status:** Red LED On = Activated
- Dimensions:** 4.00" x 4.00" x 1.80" with .50" NPT Nipple
- Wire Length:** 16", 600V Rated
- Approvals:** UL Listed, UL916, UL864, C-UL California State Fire Marshal, CE, RoHS
- Housing Rating:** UL Accepted for Use in Plenum, NEMA 1
- Gold Flash:** No

- Coil Current:**
 - 50 mA @ 18 Vac
 - 83 mA @ 24 Vac
 - 33 mA @ 22 Vdc
 - 35 mA @ 24 Vdc
 - 47 mA @ 30 Vdc

- Coil Voltage Input:**
 - 24 Vac/dc ; 50-60 Hz
 - Drop Out = 3 Vac / 3.8 Vdc
 - Pull In = 18 Vac / 22 Vdc

Sensor Contact: +

- When current sensor status is off (open), leakage <30 uA @ 30Vac/dc
- When current sensor status is on (closed), voltage drop <.3 Vac/dc @ .1 Amp <1.6 Vac/dc @ .4 Amp

Sensor Feedback Output: ^

- Voltage output is proportional to current sensor range.
- Min. Input Impedance = 30K ohms
- Accuracy +/- 1% full scale
- Vripple < 10m Vac

RIBX24 SERIES SELECTION GUIDE


Model#	Sensing Range	Type *	Threshold	Sensor Output	Resistive	Override Switch	Contact Ratings	Notes
RIBX24BF	.50-20 Amps	Internal w/ contact status	Fixed, .50 Amp	Solid State Contact 30 Vac/dc, 0.4 Amp	20 Amp	No	20 Amp Resistive @ 277 Vac 20 Amp Ballast @ 277 Vac 16 Amp Electronic Ballast @ 277 Vac (N/O) 10 Amp Tungsten @ 120 Vac (N/O)	
RIBX24BA	.50-20 Amps	Internal w/ contact status	Adjustable	Solid State Contact 30 Vac/dc, 0.4 Amp	20 Amp	No	1,110 VA Pilot Duty @ 277 Vac 770 VA Pilot Duty @ 120 Vac 240 Watt Tungsten @ 120 Vac (N/C) 2 HP @ 277 Vac 1 HP @ 120 Vac	
RIBX24BV	0-20 Amps	Internal w/ voltage output	Analog	0-5 Vdc 0-10 Vdc	20 Amp	No		
RIBX24SBF	.50-20 Amps	Internal w/ contact status	Fixed, .50 Amp	Solid State Contact 30 Vac/dc, 0.4 Amp	20 Amp	Yes	20 Amp Resistive @ 277 Vac 20 Amp Ballast @ 277 Vac (N/O) 10 Amp Ballast @ 277 Vac (N/C) <i>Not rated for Electronic Ballast</i>	• Normally Open or Normally Closed selected by yellow jumper wire
RIBX24SBA	.50-20 Amps	Internal w/ contact status	Adjustable	Solid State Contact 30 Vac/dc, 0.4 Amp	20 Amp	Yes	10 Amp Tungsten @ 120 Vac (N/O) 1,110 VA Pilot Duty @ 277 Vac 770 VA Pilot Duty @ 120 Vac 240 Watt Tungsten @ 120 Vac (N/C)	
RIBX24SBV	0-20 Amps	Internal w/ voltage output	Analog	0-5 Vdc 0-10 Vdc	20 Amp	Yes	2 HP @ 277 Vac 1 HP @ 120 Vac	

* = Internal current sensor monitors current through common contact of relay.

RELAY & AC CURRENT SWITCH COMBOS




RIBX243PF

Enclosed Internal **Fixed** .50-20 Amp AC Sensor + Relay 20 Amp 3PST-N/O with 24 Vac/dc Coil

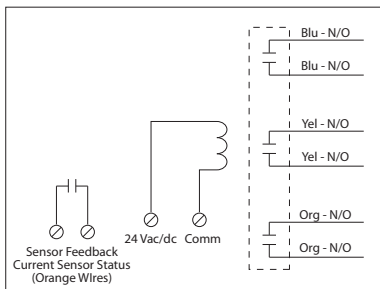

RIBX243PA

Enclosed Internal **Adjustable** .50-20 Amp AC Sensor + Relay 20 Amp 3PST-N/O with 24 Vac/dc Coil

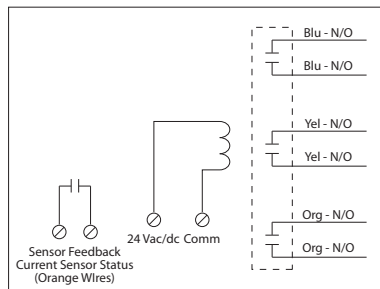

CURRENT SENSORS

SPECIFICATIONS

Relays & Contact Type: One (1) 3PST Continuous Duty Coil
Expected Relay Life: 10 million cycles minimum mechanical
Operating Temperature: -30 to 140° F
Humidity Range: 5 to 95% (noncondensing)
Operate Time: 20ms
Relay Status: Red LED On = Activated
Dimensions: 4.00" x 4.00" x 1.80" with .50" NPT Nipple
Wire Length: 16", 600V Rated
Approvals: UL Listed, UL916, C-UL
 California State Fire Marshal, CE, RoHS
Housing Rating: UL Accepted for Use in Plenum, NEMA 1
Gold Flash: No
Override Switch: No

Coil Current:

210 mA @ 24 Vac
 154 mA @ 30 Vdc

Coil Voltage Input:

24 Vac/dc ; 50-60 Hz
 Drop Out = 3 Vac / 3.8 Vdc
 Pull In = 20 Vac / 22 Vdc

Contact Ratings:

20 Amp Resistive @ 300 Vac, 28 Vdc
 20 Amp Ballast @ 277-480 Vac
Not rated for Electronic Ballast
 15 Amp Resistive @ 600 Vac
 770 VA Pilot Duty @ 120 Vac, 1 Phase
 1158 VA Pilot Duty @ 240 Vac, 1 Phase
 1110 VA Pilot Duty @ 277 Vac, 1 Phase
 1640 VA Pilot Duty @ 480 Vac, 1 Phase
 1466 VA Pilot Duty @ 240 Vac, 3 Phase
 2112 VA Pilot Duty @ 480 Vac, 3 Phase
 Heavy Pilot Duty @ 600 Vac
 7.5 HP @ 480 Vac, 3 Phase
 5 HP @ 240 Vac, 3 Phase
 3 HP @ 480-600 Vac, 1 Phase
 2 HP @ 240-277 Vac, 1 Phase
 1 HP @ 120 Vac, 1 Phase

Sensor Type: Internal, with contact status
 Current sensing on orange wires

Sensor Threshold: Fixed, .5 Amps (RIBX243PF)

Adjustable, .50-20 Amps (RIBX243PA)

Sensor Range: .50-20 Amps

Sensor Contact:

- Solid State Contact
- 30 Vac/dc, .4 Amp Max.
- When current sensor status is off (open), leakage <30 uA @ 30Vac/dc
- When current sensor status is on (closed), voltage drop < .3 Vac/dc @ .1 Amp
 < 1.6 Vac/dc @ .4 Amp


Notes:

- Order Normally Closed by adding "-NC" to end of model number

RELAY & AC TRANSDUCER COMBO

RIBX243PV

Enclosed Internal 0-20 Amp to 0-10 Vdc DC Transducer + Relay 20 Amp 3PST with 24 Vac/dc Coil

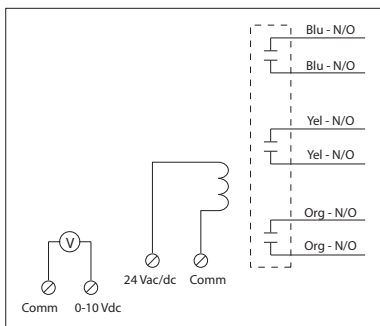

SPECIFICATIONS

Relays & Contact Type: One (1) 3PST Continuous Duty Coil
Expected Relay Life: 10 million cycles minimum mechanical
Operating Temperature: -30 to 140° F
Humidity Range: 5 to 95% (noncondensing)
Operate Time: 20ms
Relay Status: Red LED On = Activated
Dimensions: 4.00" x 4.00" x 1.80" with .50" NPT Nipple
Wire Length: 16", 600V Rated
Approvals: UL Listed, UL916, C-UL
 California State Fire Marshal, CE, RoHS
Housing Rating: UL Accepted for Use in Plenum, NEMA 1
Gold Flash: No
Override Switch: No

Coil Current:

210 mA @ 24 Vac
 154 mA @ 30 Vdc

Coil Voltage Input:

24 Vac/dc ; 50-60 Hz
 Drop Out = 3 Vac / 3.8 Vdc
 Pull In = 20 Vac / 22 Vdc

Contact Ratings:

20 Amp Resistive @ 300 Vac, 28 Vdc
 20 Amp Ballast @ 277-480 Vac
Not rated for Electronic Ballast
 15 Amp Resistive @ 600 Vac
 770 VA Pilot Duty @ 120 Vac, 1 Phase
 1158 VA Pilot Duty @ 240 Vac, 1 Phase
 1110 VA Pilot Duty @ 277 Vac, 1 Phase
 1640 VA Pilot Duty @ 480 Vac, 1 Phase
 1466 VA Pilot Duty @ 240 Vac, 3 Phase
 2112 VA Pilot Duty @ 480 Vac, 3 Phase
 Heavy Pilot Duty @ 600 Vac
 7.5 HP @ 480 Vac, 3 Phase
 5 HP @ 240 Vac, 3 Phase
 3 HP @ 480-600 Vac, 1 Phase
 2 HP @ 240-277 Vac, 1 Phase
 1 HP @ 120 Vac, 1 Phase

Sensor Type: Internal, with voltage output. Current sensing on orange wires


Sensor Range: 0-20 Amps

Sensor Feedback Output:

- Voltage output is proportional to current sensor range.
- Min. Input Impedance = 30K ohms
- Accuracy +/- 1% full scale
- Vripple < 10m Vac

Notes:

- Order Normally Closed by adding "-NC" to end of model number
- Can be ordered with 0-5 Vdc voltage output - Consult factory.

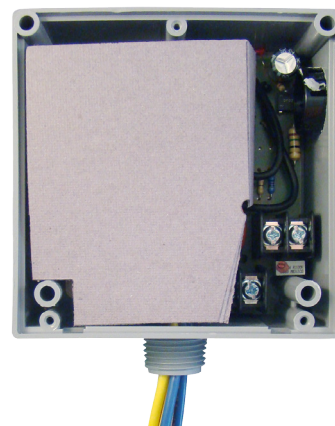


RELAY & AC CURRENT SWITCH COMBOS

RIBMX24 Series


4.00" Track Mount 20 Amp Relay/AC Sensor Combinations, with 24 Vac/dc Coil




RIBMX24BA, RIBMX24BF+

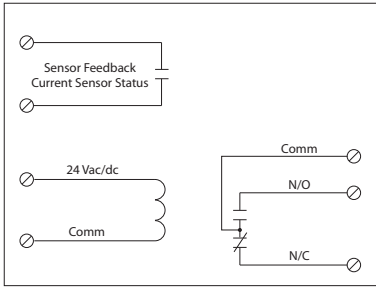



RIBMX24BV^

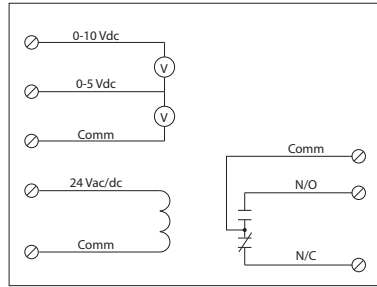

RIBMX24SBA, RIBMX24SBF+

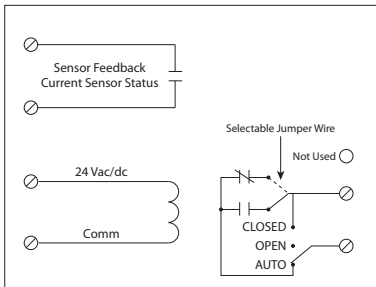

RIBMX24SBV^

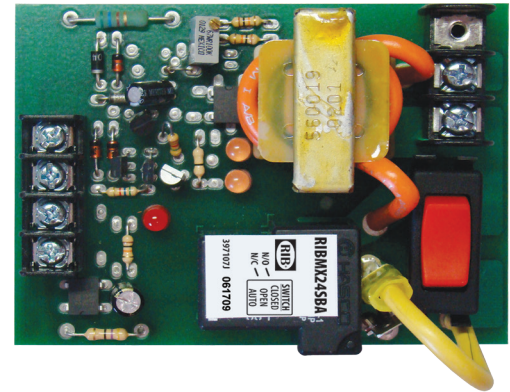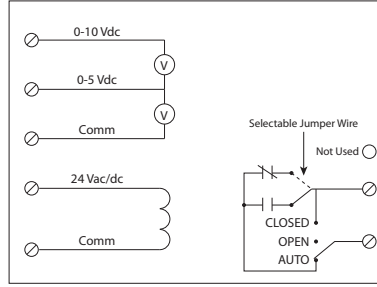

CURRENT SENSORS

SPECIFICATIONS

FUNCTIONAL DEVICES CERTIFIED FOR USE WITH ECMs

Expected Relay Life: 10 million cycles minimum mechanical
Operating Temperature: -30 to 140° F
Humidity Range: 5 to 95% (noncondensing)
Operate Time: 18ms
Relay Status: Red LED On = Activated
Dimensions: 2.95" x 4.00" x 1.25"
Track Mount: 4.000", See MT4 Series on page 152
Approvals: UL Listed, UL916, UL864, C-UL
Gold Flash: No

Coil Current:
 50 mA @ 18 Vac
 83 mA @ 24 Vac
 33 mA @ 22 Vdc
 35 mA @ 24 Vdc
 47 mA @ 30 Vdc

Coil Voltage Input:
 24 Vac/dc ; 50-60 Hz
 Drop Out = 3 Vac / 3.8 Vdc
 Pull In = 18 Vac / 22 Vdc

Sensor Contact: +

- When current sensor status is off (open), leakage < 30 uA @ 30Vac/dc
- When current sensor status is on (closed), voltage drop < .3 Vac/dc @ .1 Amp < 1.6 Vac/dc @ .4 Amp

Sensor Feedback Output: ^

- Voltage output is proportional to current sensor range.
- Min. Input Impedance = 30k ohms
- Accuracy +/- 1% full scale
- Vripple < 10m Vac

RIBMX24 SERIES SELECTION GUIDE

Model#	Sensing Range	Type	Threshold	Sensor Output	Resistive	Override Switch	Contact Type	Contact Ratings	Notes
RIBMX24BF ECMs	.50-20 Amps	Internal w/ contact status	Fixed, .50 Amp	Solid State Contact 30 Vac/dc, 0.4 Amp	20 Amp	No	SPDT	20 Amp Resistive @ 277 Vac 20 Amp Ballast @ 277 Vac 16 Amp Electronic Ballast @ 277 Vac (N/O) 10 Amp Tungsten @ 120 Vac (N/O)	
RIBMX24BA ECMs	.50-20 Amps	Internal w/ contact status	Adjustable	Solid State Contact 30 Vac/dc, 0.4 Amp	20 Amp	No	SPDT	1,110 VA Pilot Duty @ 277 Vac 770 VA Pilot Duty @ 120 Vac 240 Watt Tungsten @ 120 Vac (N/C) 2 HP @ 277 Vac 1 HP @ 120 Vac	
RIBMX24BV	0-20 Amps	Internal w/ voltage output	Analog	0-5 Vdc 0-10 Vdc	20 Amp	No	SPDT		
RIBMX24SBF ECMs	.50-20 Amps	Internal w/ contact status	Fixed, .50 Amp	Solid State Contact 30 Vac/dc, 0.4 Amp	20 Amp	Yes	SPST	20 Amp Resistive @ 277 Vac 20 Amp Ballast @ 277 Vac (N/O) 10 Amp Ballast @ 277 Vac (N/C) <i>Not rated for Electronic Ballast</i> 10 Amp Tungsten @ 120 Vac (N/O)	• Normally Open or Normally Closed selected by yellow jumper wire
RIBMX24SBA ECMs	.50-20 Amps	Internal w/ contact status	Adjustable	Solid State Contact 30 Vac/dc, 0.4 Amp	20 Amp	Yes	SPST	1,110 VA Pilot Duty @ 277 Vac 770 VA Pilot Duty @ 120 Vac 240 Watt Tungsten @ 120 Vac (N/C) 2 HP @ 277 Vac 1 HP @ 120 Vac	
RIBMX24SBV	0-20 Amps	Internal w/ voltage output	Analog	0-5 Vdc 0-10 Vdc	20 Amp	Yes	SPST		

ECMs = FDI Certified for use with electronically commutated motors

POWER SUPPLIES

AC | DC



Made in the U.S.A.
Meets the "Buy American" provisions of Section 1605 of the American Recovery and Reinvestment Act of 2009 (ARRA).

- Class 2
- On/off control
- Overcurrent protection
- LED power indicator
- High/low voltage separation
- 120Vac convenience outlets



Perfect for VAV Applications: PSH500A and PSH300A

- 5 or 3 isolated 100 VA outputs
- On/Off circuit breaker switch for each output
- UL Listed Class 2
- Fully enclosed – perfect for central location

AC POWER SUPPLIES

MODEL #	UL	TRANSFORMER(S)	INPUT POWER	HEIGHT	WIDTH	DEPTH	WEIGHT	NOTES	SPEC PAGE
PSC40AB10	• 1	40 VA	120 Vac	6.250"	5.620"	4.250"	4.40 lbs.		108
PSC100AB10	• 1	100 VA	120 Vac	6.250"	5.620"	4.250"	5.80 lbs.		108
PSH40A Series	• 1	40 VA	120 Vac	4.500"	5.438"	4.500"	3.10 lbs.		108
PSH75A Series	•	75 VA	Multi-Tap ²	4.500"	5.438"	4.500"	4.50 lbs.		109
PSH100A Series	• 1	100 VA	120 Vac	4.500"	5.438"	4.500"	4.60 lbs.		109
PSH40AB10-EXT2	• 1	40 VA	120 Vac	4.500"	5.438"	4.500"	4.00 lbs.		110
PSH100AB10-EXT2	• 1	100 VA	120 Vac	4.500"	5.438"	4.500"	4.00 lbs.		110
PSH40A40A Series	• 1	40 VA, 40 VA	120 Vac, 120 Vac	4.500"	8.625"	4.500"	5.40 lbs.		110
PSH40A75A Series	•	40 VA, 75 VA	120 Vac, Multi-Tap ²	4.500"	8.625"	4.500"	6.80 lbs.		111
PSH40A100A Series	• 1	40 VA, 100 VA	120 Vac, 120 Vac	4.500"	8.625"	4.500"	6.90 lbs.		111
PSH75A75A Series	•	75 VA, 75 VA	Multi-Tap, Multi-Tap ²	4.500"	8.625"	4.500"	8.40 lbs.		112
PSH75A100A Series	•	75 VA, 100 VA	Multi-Tap ² , 120 Vac	4.500"	8.625"	4.500"	8.50 lbs.		112
PSH100A100A Series	• 1	100VA, 100VA	120 Vac, 120 Vac	4.500"	8.625"	4.500"	8.60 lbs.		113
CTRL-PS	• 1	40 VA	120 Vac	14.500"	7.700"	3.900"	7.28 lbs.		113
MHP3903100AB10	•	100 VA	120 Vac	24.500"	12.500"	6.500"	30.65 lbs.	NEW	114
MHP3903100A100AB10	•	100VA, 100VA	120 Vac	24.500"	12.500"	6.500"	33.05 lbs.	NEW	115
PSH500A	• 1	500 VA w/ five 100 VA Outputs	480/277/240/120 Vac	12.125"	12.125"	6.000"	30.16 lbs.		116
PSH300A	• 1	300 VA w/ three 100 VA Outputs	480/277/240/120 Vac	12.125"	12.125"	6.000"	18.08 lbs.		117
PSH200A	•	200 VA w/ five 40 VA Outputs	480/347/277/240/120 Vac	12.125"	12.125"	6.000"	18.60 lbs.		118
PSM500A	• 1	500 VA w/ five 100 VA Outputs	480/277/240/120 Vac	11.330"	11.400"	5.000"	20.60 lbs.		116
PSM300A	• 1	300 VA w/ three 100 VA Outputs	480/277/240/120 Vac	11.330"	11.400"	4.500"	12.38 lbs.		117
PSM200A	•	200 VA w/ five 40 VA Outputs	480/347/277/240/120 Vac	11.330"	11.400"	5.000"	8.00 lbs.		118
PSH500A-LVC ³	• 1	500 VA w/ five 100 VA Outputs	480/277/240/120 Vac	12.125"	12.125"	6.000"	32.30 lbs.		119
PSH300A-LVC ³	• 1	300 VA w/ three 100 VA Outputs	480/277/240/120 Vac	11.330"	11.400"	4.500"	22.46 lbs.	NEW	120
PSH200A-LVC ³	•	200 VA w/ five 40 VA Outputs	480/347/277/240/120 Vac	11.330"	11.400"	5.000"	20.30 lbs.	NEW	120
PSH500AB10-LVC ³	• 1	500 VA w/ five 100 VA Outputs	480/277/240/120 Vac	12.125"	12.125"	6.000"	32.30 lbs.	NEW	121
PSH300AB10-LVC ³	• 1	300 VA w/ three 100 VA Outputs	480/277/240/120 Vac	11.330"	11.400"	4.500"	22.12 lbs.	NEW	122
PSH200AB10-LVC ³	•	200 VA w/ five 40 VA Outputs	480/347/277/240/120 Vac	11.330"	11.400"	5.000"	20.30 lbs.	NEW	123
PSB40AB10	• 1	40 VA	120 Vac	5.200"	5.250"	3.750"	2.18 lbs.		124
PSB100AB10	• 1	100 VA	120 Vac	5.200"	5.250"	3.750"	3.58 lbs.		124
PSMN40AS	• 1	40 VA	120 Vac	3.250"	2.750"	2.000"	1.60 lbs.		124
PSMN40A	• 1	40 VA	120 Vac	3.250"	2.750"	2.000"	1.60 lbs.		124

UL = Class 2 (UL Approved UL5085-3) : UL916 Energy Management USA & Canada 1 = UL508 Available 2 = 480/277/240/208/120 Vac 3 = High / Low Voltage Separation

DC POWER SUPPLIES

MODEL #	UL	VOLTAGE INPUT	VOLTAGE OUTPUT	OUTPUT CURRENT	ON/OFF SWITCH	HEIGHT	WIDTH	DEPTH	WEIGHT	NOTES	SPEC PAGE
PSP24DA	•	24 Vac	Adjustable 1.5-28 Vdc ; Non-Isolated	300 mA		2.300"	3.200"	1.800"	.30 lbs.		125
PSH24DWB10		120 Vac	Fixed 24 Vdc ; Isolated	2.5 Amp	•	4.000"	5.438"	4.500"	2.98 lbs.		125
PSH100A24DWB10		120 Vac	Fixed 24 Vdc ; Isolated + 100 VA, 24 Vac	2.5 Amp	•	4.000"	5.438"	4.500"	5.60 lbs.		126
PSMN24DA	•	24 Vac	Adjustable 1.5-28 Vdc ; Non-Isolated	300 mA	•	1.750"	2.750"	1.500"	.20 lbs.		126
PSMN24DAS	•	24 Vac	Adjustable 1.5-28 Vdc ; Non-Isolated	300 mA	•	1.750"	2.750"	1.500"	.20 lbs.		126
PSM20A12DAS	•	24 Vac	Adjustable 1.5-12 Vdc ; Isolated	300 mA	•	4.000"	2.750"	1.625"	1.10 lbs.		127
PSM24A24DAS	•	24 Vac	Adjustable 1.5-28 Vdc ; Isolated	300 mA	•	4.000"	2.750"	1.625"	1.10 lbs.		127
PSM19A24DAS	•	120 Vac	Adjustable 1.5-28 Vdc ; Isolated	300 mA	•	4.000"	2.750"	1.625"	1.10 lbs.		127
PSMN40A24DS	•	120 Vac	Fixed 24 Vdc ; Isolated	1 Amp	•	5.000"	2.750"	2.000"	1.50 lbs.		128

UL = Class 2 (UL Approved UL5085-3) : UL916 Energy Management USA & Canada


AC POWER SUPPLY

PSC40AB10

Enclosed Single 40 VA Power Supply, 120 to 24 Vac

PSC100AB10

Enclosed Single 100 VA Power Supply, 120 to 24 Vac

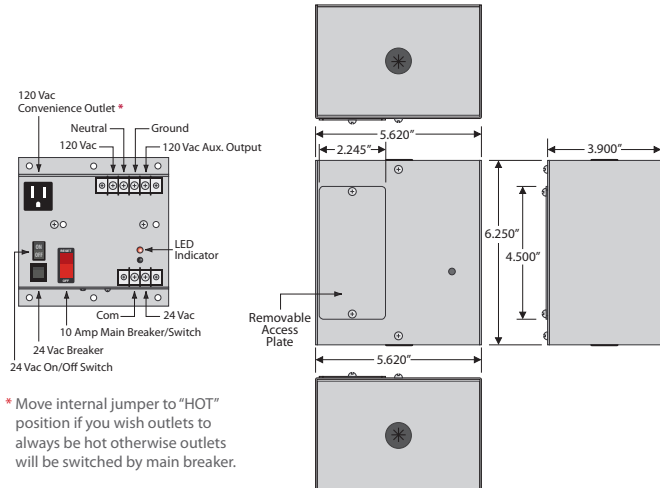

* Move internal jumper to "HOT" position if you wish outlets to always be hot otherwise outlets will be switched by main breaker.

Shown Without Cover



Shown With Cover



SPECIFICATIONS

Transformer: One 40 VA Split-Bobbin, Inherently Limited (PSC40AB10)
One 100 VA Split-Bobbin, Circuit Breaker (PSC100AB10)

Primary: 120 Vac

Secondary: 24 Vac, w/ LED Indicator

Frequency: 50/60 Hz

24 Vac ON/OFF: On / Off Switch & Breaker

Main Breaker ON/OFF: Switch / Breaker (10 Amp) (Kills power to entire unit: Outlets, Aux. Output, & Transformer)*
Total Combined Output 9A

Mounting: Mounting plate included (as shown)

Temperature: 40° C

Approvals: Class 2 (UL Approved UL5085-3), UL916, UL508 for -IC models, C-UL, CE, RoHS

Dimensions: 6.250" x 5.620" x 4.250"

Weight: 4.40 lbs. (PSC40AB10), 5.80 lbs. (PSC100AB10)


Notes:

- To order without enclosure, see PSB40AB10 & PSB100AB10.
- To order UL508, add "-IC" to end of model number.

AC POWER SUPPLY

PSH40A Series

Enclosed Single 40 VA Power Supplies, 120 to 24 Vac

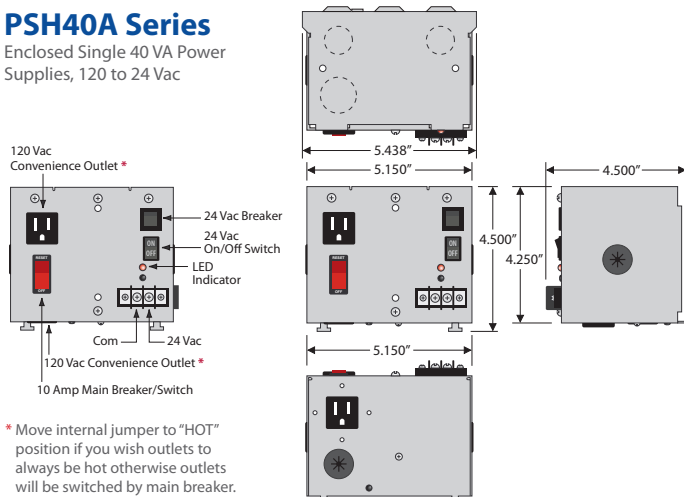

* Move internal jumper to "HOT" position if you wish outlets to always be hot otherwise outlets will be switched by main breaker.



PSH40A SERIES SELECTION GUIDE

Model #	120 Vac Outlets	Aux Output Wire	Main Breaker on Input Power	Secondary Configuration
PSH40A	-	-	-	External Terminal Strip
PSH40AN	-	-	-	External Terminal Strip
PSH40ANW	-	-	-	Internal Wires
PSH40AW	-	-	-	Internal Wires
PSH40AB10*	-	-	10 Amp Switch / Breaker	External Terminal Strip
PSH40ANB10*	-	-	10 Amp Switch / Breaker	External Terminal Strip
PSH40ANWB10*	-	-	10 Amp Switch / Breaker	Internal Wires
PSH40AWB10*	-	-	10 Amp Switch / Breaker	Internal Wires

SPECIFICATIONS

Transformer: One 40 VA Split-Bobbin

Over Current Protection: Circuit Breaker

Frequency: 50/60 Hz

24 Vac ON/OFF: On / Off Switch & Breaker

Main Breaker ON/OFF: Switch / Breaker (10 Amp) (Kills power to entire unit: Outlets, Aux. Output, & Transformer)*
Total Combined Output 9A

Temperature: 40° C

Approvals: Class 2 (UL Approved UL5085-3), UL916, UL508 for -IC models, C-UL, CE, RoHS,
▲ Special Seismic Certification of Equipment and Components:
OSP-0201-10

Dimensions: 4.500" x 5.438" x 4.500"

Weight: 4.00 lbs.

Input Wires: "B10" Models Only

Input Power Wires

BLK: 120 Vac

WHT: Neutral

GRN: Ground

Outlet Wires

BLK: 120 Vac

WHT: Neutral

GRN: Ground

Output Wires: "B10" Models Only

Auxiliary Output

BLU: 120 Vac

All Other Models

Primary Wires

BLK: 120 Vac

WHT: Common

"W" Models Only

Transformer Output

WHT/YEL: 24 Vac

WHT/BLU: Common


Notes:

- Output derating may exceed 20% due to elevated ambient temperature or heat buildup in device over time.
- To order UL508, add "-IC" to end of model number.
- Design is in accordance with ASCE 7-05 Chapter 13: ▲
www.oshpd.ca.gov/FDD/Pre-Approval/OSP-0201-10.pdf


AC POWER SUPPLY

PSH75A Series

Enclosed Single 75 VA Power Supplies, 480/277/240/208/120 to 24 Vac



* Move internal jumper to "HOT" position if you wish outlets to always be hot otherwise outlets will be switched by main breaker.

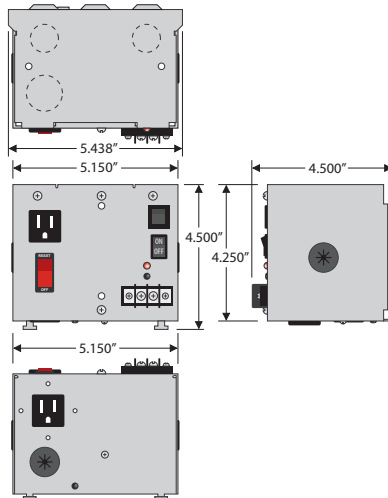

PSH75A SERIES SELECTION GUIDE

Model #	120 Vac Outlets	Aux Output Wire	Main Breaker on Input Power	Secondary Configuration
PSH75A	-	-	-	External Terminal Strip
PSH75AN	-	-	-	External Terminal Strip
PSH75ANW	-	-	-	Internal Wires
PSH75AW	-	-	-	Internal Wires
PSH75AB10*	-	-	10 Amp Switch / Breaker	External Terminal Strip
PSH75ANB10*	-	-	10 Amp Switch / Breaker	External Terminal Strip
PSH75ANWB10*	-	-	10 Amp Switch / Breaker	Internal Wires
PSH75AWB10*	-	-	10 Amp Switch / Breaker	Internal Wires

SPECIFICATIONS

Transformer: One 75 VA Split-Bobbin
Over Current Protection: Circuit Breaker

Frequency: 50/60 Hz

24 Vac ON/OFF: On / Off Switch & Breaker

Main Breaker ON/OFF: Switch / Breaker (10 Amp)
(Kills power to entire unit: Outlets, Aux. Output, & Transformer)*
Total Combined Output 9A

Approvals: Class 2 (UL Approved UL5085-3), UL916, C-UL, CE, RoHS, Special
▲ Seismic Certification of Equipment and Components: OSP-0201-10

Dimensions: 4.500" x 5.438" x 4.500"

Weight: 4.500 lbs.

Input Wires: "B10" Models Only
Input Power Wires

BLK: 120 Vac

WHT: Neutral

GRN: Ground

Outlet Wires

BLK: 120 Vac

WHT: Neutral

GRN: Ground

Output Wires: "B10" Models Only
Auxiliary Output
BLU: 120 Vac

All Other Models
Primary Wires**

GRY: 480 Vac

BRN: 277 Vac

ORG: 240 Vac

RED: 208 Vac

WHT: 120 Vac

BLK: Common

"W" Models Only
Transformer Output
WHT/YEL: 24 Vac
WHT/BLU: Common

Notes:


- Output derating may exceed 20% due to elevated ambient temperature or heat buildup in device over time.
- Design is in accordance with ASCE 7-05 Chapter 13: ▲
www.oshpd.ca.gov/FDD/Pre-Approval/OSP-0201-10.pdf
- All primary voltages other than 120 Vac will result in the disabling of convenience outlets.**

POWER SUPPLIES


AC POWER SUPPLY

PSH100A Series

Enclosed Single 100 VA Power Supplies, 120 to 24 Vac



* Move internal jumper to "HOT" position if you wish outlets to always be hot otherwise outlets will be switched by main breaker.

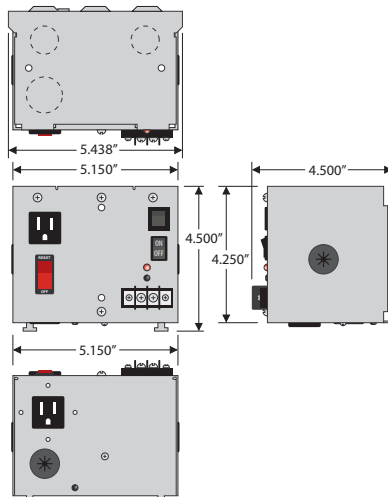

PSH100A SERIES SELECTION GUIDE

Model #	120 Vac Outlets	Aux Output Wire	Main Breaker on Input Power	Secondary Configuration
PSH100A	-	-	-	External Terminal Strip
PSH100AN	-	-	-	External Terminal Strip
PSH100ANW	-	-	-	Internal Wires
PSH100AW	-	-	-	Internal Wires
PSH100AB10*	-	-	10 Amp Switch / Breaker	External Terminal Strip
PSH100ANB10*	-	-	10 Amp Switch / Breaker	External Terminal Strip
PSH100ANWB10*	-	-	10 Amp Switch / Breaker	Internal Wires
PSH100AWB10*	-	-	10 Amp Switch / Breaker	Internal Wires

SPECIFICATIONS

Transformer: One 100 VA Split-Bobbin
Over Current Protection: Circuit Breaker

Frequency: 50/60 Hz

24 Vac ON/OFF: On / Off Switch & Breaker

Main Breaker ON/OFF: Switch / Breaker (10 Amp)
(Kills power to entire unit: Outlets, Aux. Output, & Transformer)*
Total Combined Output 9A

Temperature: 40° C

Approvals: Class 2 (UL Approved UL5085-3), UL916, UL508 for -IC models, C-UL, CE, RoHS, Special
▲ Seismic Certification of Equipment and Components: OSP-0201-10

Dimensions: 4.500" x 5.438" x 4.500"

Weight: 4.600 lbs.

Input Wires: "B10" Models Only
Input Power Wires

BLK: 120 Vac

WHT: Neutral

GRN: Ground

Outlet Wires

BLK: 120 Vac

WHT: Neutral

GRN: Ground

Output Wires: "B10" Models Only
Auxiliary Output
BLU: 120 Vac

All Other Models
Primary Wires

BLK: 120 Vac

WHT: Common

"W" Models Only
Transformer Output
WHT/YEL: 24 Vac
WHT/BLU: Common

Notes:

- Output derating may exceed 20% due to elevated ambient temperature or heat buildup in device over time.
- To order UL508, add "-IC" to end of model number.
- Design is in accordance with ASCE 7-05 Chapter 13: ▲
www.oshpd.ca.gov/FDD/Pre-Approval/OSP-0201-10.pdf


AC POWER SUPPLY

PSH40AB10-EXT2

Enclosed Single 40 VA Power Supply, 120 to 24 Vac, with Three Foot Extension Cord

PSH100AB10-EXT2

Enclosed Single 100 VA Power Supply, 120 to 24 Vac, with Three Foot Extension Cord

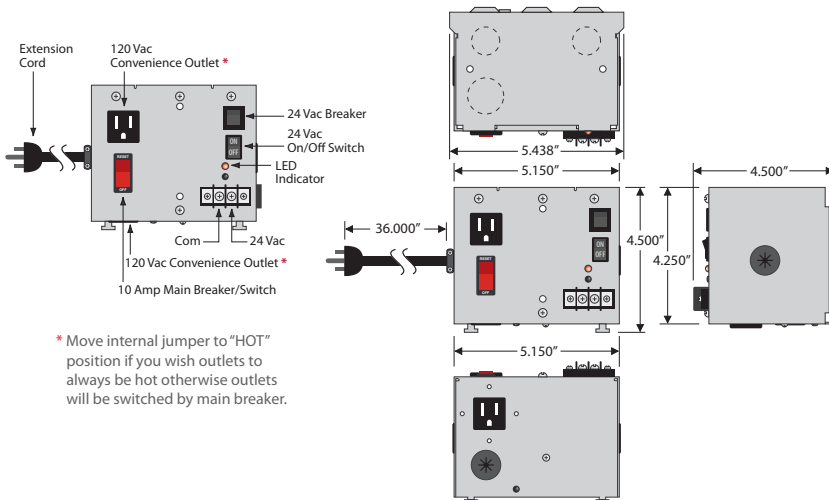

* Move internal jumper to "HOT" position if you wish outlets to always be hot otherwise outlets will be switched by main breaker.



PLUGS DIRECTLY INTO WIRED OUTLET BOX FOR USE ABOVE FALSE CEILING OR IN CONTROL PANELS

SPECIFICATIONS

Transformer: One 40 VA (PSH40AB10-EXT2) or One 100 VA (PSH100AB10-EXT2)

Over Current Protection: Circuit Breaker

Frequency: 50/60 Hz

24 Vac ON/OFF: On / Off Switch & Breaker

Main Breaker ON/OFF: Switch / Breaker (10 Amp)
(Kills power to entire unit: Outlets, Aux. Output, & Transformer)*
Total Combined Output 9A

Approvals: Class 2 (UL Approved UL5085-3), UL916, C-UL, CE, RoHS

Dimensions: 4.500" x 5.438" x 4.500"

Weight: 4.00 lbs.

Input Wires: Powercord

BLK: 120 Vac

WHT: Neutral

GRN: Ground

Output Wire: Auxiliary Load Output

BLU: 120 Vac

9 Amp, max.


Notes:

- Output derating may exceed 20% due to elevated ambient temperature or heat buildup in device over time.

AC POWER SUPPLY

PSH40A40A Series

Enclosed Dual 40 VA Power Supplies, 120 to 24 Vac

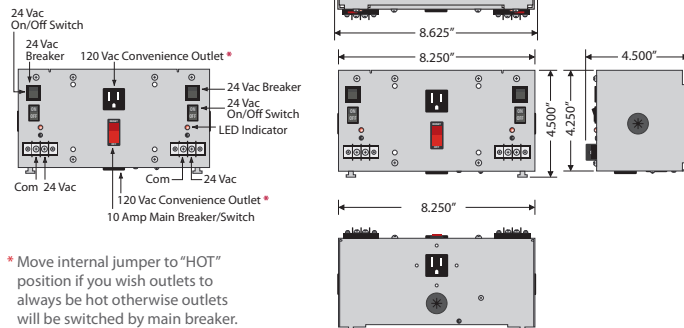

* Move internal jumper to "HOT" position if you wish outlets to always be hot otherwise outlets will be switched by main breaker.



PSH40A40A SERIES SELECTION GUIDE

Model #	120 Vac Outlets	Aux Output Wire	Main Breaker on Input Power	Secondary Configuration
PSH40A40A	•			External Terminal Strip
PSH40A40AN				External Terminal Strip
PSH40A40ANW				Internal Wires
PSH40A40AW	•			Internal Wires
PSH40A40AB10*	•	•	10 Amp Switch / Breaker	External Terminal Strip
PSH40A40ANB10*	•	•	10 Amp Switch / Breaker	External Terminal Strip
PSH40A40ANWB10*	•	•	10 Amp Switch / Breaker	Internal Wires
PSH40A40AWB10*	•	•	10 Amp Switch / Breaker	Internal Wires

SPECIFICATIONS

Transformer: Two 40 VA Split-Bobbin

Over Current Protection: Circuit Breaker

Frequency: 50/60 Hz

24 Vac ON/OFF: On / Off Switch & Breaker

Main Breaker ON/OFF: Switch / Breaker (10 Amp)
(Kills power to entire unit: Outlets, Aux. Output, & Transformer)*
Total Combined Output 9A

Temperature: 40° C

Approvals: Class 2 (UL Approved UL5085-3), UL916, UL508 for -IC models, C-UL, CE, RoHS, Special A Seismic Certification of Equipment and Components: OSP-0201-10

Dimensions: 4.500" x 8.625" x 4.500"

Weight: 5.400 lbs.

Input Wires: "B10" Models Only

Input Power Wires

BLK: 120 Vac

WHT: Neutral

GRN: Ground

Outlet Wires

BLK: 120 Vac

WHT: Neutral

GRN: Ground

Output Wires: "B10" Models Only

Auxiliary Output

BLU: 120 Vac

All Other Models

Primary Wires

BLK: 120 Vac

WHT: Common

Transformer Output

WHT/YEL: 24 Vac

WHT/BLU: Common

Notes:

- All dual models: Model number denotes location of transformer within enclosure. **PSH40A40A**

Left side | Right side

- Output derating may exceed 20% due to elevated ambient temperature or heat buildup in device over time.

- To order UL508, add "-IC" to end of model number.


- Design is in accordance with ASCE 7-05 Chapter 13: A

www.oshpd.ca.gov/FDD/Pre-Approval/OSP-0201-10.pdf


AC POWER SUPPLY

PSH40A75A Series

Enclosed 40 VA (120 to 24 Vac) and 75 VA (Multi-Tap to 24 Vac) Power Supplies



* Move internal jumper to "HOT" position if you wish outlets to always be hot otherwise outlets will be switched by main breaker.

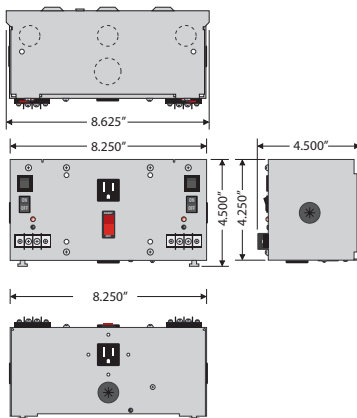

PSH40A75A SERIES SELECTION GUIDE

Model #	120 Vac Outlets	Aux Output Wire	Main Breaker on Input Power	Secondary Configuration
PSH40A75A	•			External Terminal Strip
PSH40A75AN				External Terminal Strip
PSH40A75ANW				Internal Wires
PSH40A75AW	•			Internal Wires
PSH40A75AB10*	•	•	10 Amp Switch / Breaker	External Terminal Strip
PSH40A75ANB10*	•	•	10 Amp Switch / Breaker	External Terminal Strip
PSH40A75ANWB10*	•	•	10 Amp Switch / Breaker	Internal Wires
PSH40A75AWB10*	•	•	10 Amp Switch / Breaker	Internal Wires

SPECIFICATIONS

Transformer: One 40 VA and One 75 VA Split-Bobbin

Over Current Protection: Circuit Breaker

Frequency: 50/60 Hz

24 Vac ON/OFF: On / Off Switch & Breaker

Main Breaker ON/OFF: Switch / Breaker (10 Amp)
(Kills power to entire unit: Outlets, Aux. Output, & Transformer)*

Approvals: Class 2 (UL Approved UL5085-3), UL916, C-UL, CE, RoHS, Special
▲ Seismic Certification of Equipment
and Components: OSP-0201-10

Dimensions: 4.500" x 8.625" x 4.500"

Weight: 6.800 lbs.

Input Wires: "B10" Models Only

Input Power Wires

BLK: 120 Vac

WHT: Neutral

GRN: Ground

Outlet Wires

BLK: 120 Vac

WHT: Neutral

GRN: Ground

Output Wires: "B10" Models Only

Auxiliary Output

BLU: 120 Vac

All Other Models

40 VA Primary Wires

BLK: 120 Vac

WHT: Common

75 VA Primary Wires**

GRY: 480 Vac

BRN: 277 Vac

ORG: 240 Vac

RED: 208 Vac

WHT: 120 Vac

BLK: Common

"W" Models Only

Transformer Output

WHT/YEL: 24 Vac

WHT/BLU: Common

Notes:

• All dual models: Model number denotes location of transformer within enclosure.
PSH40A75A

Left side Right side

• Output derating may exceed 20% due to elevated ambient temperature or heat buildup in device over time.

• Design is in accordance with ASCE 7-05 Chapter 13: ▲


www.oshpd.ca.gov/FDD/Pre-Approval/OSP-0201-10.pdf

• All primary voltages other than 120 Vac will result in the disabling of convenience outlets.**


AC POWER SUPPLY

PSH40A100A Series

Enclosed 40 VA and 100 VA Power Supplies, 120 to 24 Vac



* Move internal jumper to "HOT" position if you wish outlets to always be hot otherwise outlets will be switched by main breaker.

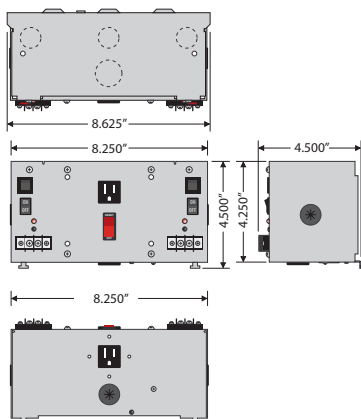

PSH40A100A SERIES SELECTION GUIDE

Model #	120 Vac Outlets	Aux Output Wire	Main Breaker on Input Power	Secondary Configuration
PSH40A100A	•			External Terminal Strip
PSH40A100AN				External Terminal Strip
PSH40A100ANW				Internal Wires
PSH40A100AW	•			Internal Wires
PSH40A100AB10*	•	•	10 Amp Switch / Breaker	External Terminal Strip
PSH40A100ANB10*	•	•	10 Amp Switch / Breaker	External Terminal Strip
PSH40A100ANWB10*	•	•	10 Amp Switch / Breaker	Internal Wires
PSH40A100AWB10*	•	•	10 Amp Switch / Breaker	Internal Wires

SPECIFICATIONS

Transformer: One 40 VA and One 100 VA Split-Bobbin

Over Current Protection: Circuit Breaker

Frequency: 50/60 Hz

24 Vac ON/OFF: On / Off Switch & Breaker

Main Breaker ON/OFF: Switch / Breaker (10 Amp)
(Kills power to entire unit: Outlets, Aux. Output, & Transformer)*

Total Combined Output 9A

Temperature: 40° C

Approvals: Class 2 (UL Approved UL5085-3), UL916, UL508 for -IC models, C-UL, CE, RoHS, Special
▲ Seismic Certification of Equipment
and Components: OSP-0201-10

Dimensions: 4.500" x 8.625" x 4.500"

Weight: 6.900 lbs.

Input Wires: "B10" Models Only

Input Power Wires

BLK: 120 Vac

WHT: Neutral

GRN: Ground

Outlet Wires

BLK: 120 Vac

WHT: Neutral

GRN: Ground

Output Wires: "B10" Models Only

Auxiliary Output

BLU: 120 Vac

All Other Models

Primary Wires

BLK: 120 Vac

WHT: Common

"W" Models Only

Transformer Output

WHT/YEL: 24 Vac

WHT/BLU: Common

Notes:

• All dual models: Model number denotes location of transformer within enclosure.
PSH40A100A

Left side Right side

• Output derating may exceed 20% due to elevated ambient temperature or heat buildup in device over time.

• To order UL508, add "-IC" to end of model number.



• Design is in accordance with ASCE 7-05 Chapter 13: ▲

www.oshpd.ca.gov/FDD/Pre-Approval/OSP-0201-10.pdf

AC POWER SUPPLY

PSH75A75A Series

Enclosed Dual 75 VA Power Supplies, 480/277/240/208/120 to 24 Vac

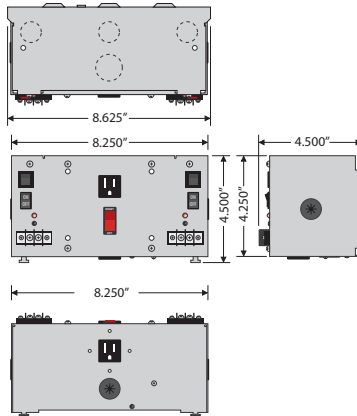

PSH75A75A SERIES SELECTION GUIDE

Model #	120 Vac Outlets	Aux Output Wire	Main Breaker on Input Power	Secondary Configuration
PSH75A75A	-	-	-	External Terminal Strip
PSH75A75AN	-	-	-	External Terminal Strip
PSH75A75ANW	-	-	-	Internal Wires
PSH75A75AW	-	-	-	Internal Wires
PSH75A75AB10*	-	-	10 Amp Switch / Breaker	External Terminal Strip
PSH75A75ANB10*	-	-	10 Amp Switch / Breaker	External Terminal Strip
PSH75A75ANWB10*	-	-	10 Amp Switch / Breaker	Internal Wires
PSH75A75AWB10*	-	-	10 Amp Switch / Breaker	Internal Wires

SPECIFICATIONS

Transformer: Two 75 VA Split-Bobbin
Over Current Protection: Circuit Breaker
Frequency: 50/60 Hz
24 Vac ON/OFF: On / Off Switch & Breaker
Main Breaker ON/OFF: Switch / Breaker (10 Amp)
 (Kills power to entire unit: Outlets, Aux. Output, & Transformer)*
 Total Combined Output 9A
Approvals: Class 2 (UL Approved UL5085-3), UL916, C-UL, CE, RoHS, Special
 ▲ Seismic Certification of Equipment and Components: OSP-0201-10
Dimensions: 4.500" x 8.625" x 4.500"
Weight: 8.400 lbs.

Input Wires: "B10" Models Only
Input Power Wires
 BLK: 120 Vac
 WHT: Neutral
 GRN: Ground
Outlet Wires
 BLK: 120 Vac
 WHT: Neutral
 GRN: Ground

Output Wires: "B10" Models Only
Auxiliary Output
 BLU: 120 Vac

All Other Models Primary Wires**
 GRY: 480 Vac
 BRN: 277 Vac
 ORG: 240 Vac
 RED: 208 Vac
 WHT: 120 Vac
 BLK: Common

"W" Models Only Transformer Output
 WHT/YEL: 24 Vac
 WHT/BLU: Common



Notes:
 • All dual models: Model number denotes location of transformer within enclosure.
PSH75A75A
 | Left side | Right side
 • Output derating may exceed 20% due to elevated ambient temperature or heat buildup in device over time.
 • Design is in accordance with ASCE 7-05 Chapter 13: ▲
www.oshpd.ca.gov/FDD/Pre-Approval/OSP-0201-10.pdf
 • All primary voltages other than 120 Vac will result in the disabling of convenience outlets.**

POWER SUPPLIES

AC POWER SUPPLY

PSH75A100A Series

Enclosed 75 VA (Multi-Tap to 24 Vac) and 100 VA (120 to 24 Vac) Power Supplies

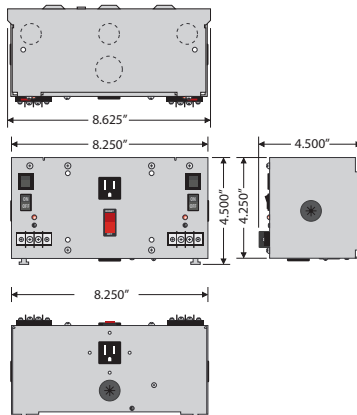

PSH75A100A SERIES SELECTION GUIDE

Model #	120 Vac Outlets	Aux Output Wire	Main Breaker on Input Power	Secondary Configuration
PSH75A100A	-	-	-	External Terminal Strip
PSH75A100AN	-	-	-	External Terminal Strip
PSH75A100ANW	-	-	-	Internal Wires
PSH75A100AW	-	-	-	Internal Wires
PSH75A100AB10*	-	-	10 Amp Switch / Breaker	External Terminal Strip
PSH75A100ANB10*	-	-	10 Amp Switch / Breaker	External Terminal Strip
PSH75A100ANWB10*	-	-	10 Amp Switch / Breaker	Internal Wires
PSH75A100AWB10*	-	-	10 Amp Switch / Breaker	Internal Wires

* Move internal jumper to "HOT" position if you wish outlets to always be hot otherwise outlets will be switched by main breaker.

SPECIFICATIONS

Transformer: One 75 VA and One 100 VA Split-Bobbin
Over Current Protection: Circuit Breaker
Frequency: 50/60 Hz
24 Vac ON/OFF: On / Off Switch & Breaker
Main Breaker ON/OFF: Switch / Breaker (10 Amp)
 (Kills power to entire unit: Outlets, Aux. Output, & Transformer)*
 Total Combined Output 9A
Approvals: Class 2 (UL Approved UL5085-3), UL916, C-UL, CE, RoHS, Special
 ▲ Seismic Certification of Equipment and Components: OSP-0201-10
Dimensions: 4.500" x 8.625" x 4.500"
Weight: 8.500 lbs.

Input Wires: "B10" Models Only
Input Power Wires
 BLK: 120 Vac
 WHT: Neutral
 GRN: Ground
Outlet Wires
 BLK: 120 Vac
 WHT: Neutral
 GRN: Ground

Output Wires: "B10" Models Only
Auxiliary Output
 BLU: 120 Vac

All Other Models 75 VA Primary Wires**
 GRY: 480 Vac
 BRN: 277 Vac
 ORG: 240 Vac
 RED: 208 Vac
 WHT: 120 Vac
 BLK: Common
100 VA Primary Wires
 BLK: 120 Vac
 WHT: Common


"W" Models Only Transformer Output
 WHT/YEL: 24 Vac
 WHT/BLU: Common

Notes:
 • All dual models: Model number denotes location of transformer within enclosure.
PSH75A100A
 | Left side | Right side
 • Output derating may exceed 20% due to elevated ambient temperature or heat buildup in device over time.
 • Design is in accordance with ASCE 7-05 Chapter 13: ▲
www.oshpd.ca.gov/FDD/Pre-Approval/OSP-0201-10.pdf
 • All primary voltages other than 120 Vac will result in the disabling of convenience outlets.**


AC POWER SUPPLY

PSH100A100A Series

Enclosed Dual 100 VA Power Supplies,
120 to 24 Vac



* Move internal jumper to "HOT" position if you wish outlets to always be hot otherwise outlets will be switched by main breaker.

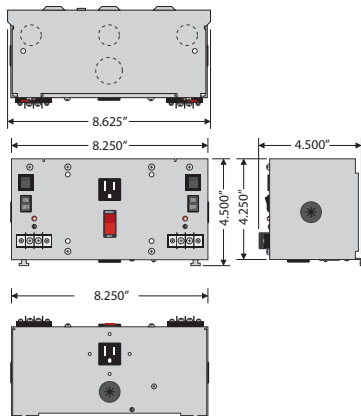

PSH100A100A SERIES SELECTION GUIDE

Model #	120 Vac Outlets	Aux Output Wire	Main Breaker on Input Power	Secondary Configuration
PSH100A100A	-	-	-	External Terminal Strip
PSH100A100AN	-	-	-	External Terminal Strip
PSH100A100ANW	-	-	-	Internal Wires
PSH100A100AW	-	-	-	Internal Wires
PSH100A100AB10*	-	-	10 Amp Switch / Breaker	External Terminal Strip
PSH100A100ANB10*	-	-	10 Amp Switch / Breaker	External Terminal Strip
PSH100A100ANWB10*	-	-	10 Amp Switch / Breaker	Internal Wires
PSH100A100AWB10*	-	-	10 Amp Switch / Breaker	Internal Wires

SPECIFICATIONS

Transformer: Two 100 VA Split-Bobbin

Over Current Protection: Circuit Breaker

Frequency: 50/60 Hz

24 Vac ON/OFF: On / Off Switch & Breaker

Main Breaker ON/OFF: Switch / Breaker (10 Amp)
(Kills power to entire unit: Outlets, Aux. Output, & Transformer)*
Total Combined Output 9A

Temperature: 40° C

Approvals: Class 2 (UL Approved UL5085-3),
UL916, UL508 for -IC models, C-UL, CE,
RoHS, Special **▲ Seismic Certification of Equipment and Components:**
OSP-0201-10

Dimensions: 4.500" x 8.625" x 4.500"

Weight: 8.600 lbs.

Input Wires: "B10" Models Only

Input Power Wires

BLK: 120 Vac

WHT: Neutral

GRN: Ground

Outlet Wires

BLK: 120 Vac

WHT: Neutral

GRN: Ground

Output Wires: "B10" Models Only

Auxiliary Output

BLU: 120 Vac

All Other Models

Primary Wires

BLK: 120 Vac

WHT: Common

"W" Models Only

Transformer Output

WHT/YEL: 24 Vac

WHT/BLU: Common

Notes:

• All dual models: Model number denotes location of transformer within enclosure.
PSH100A100A

Left side | Right side

• Output derating may exceed 20% due to elevated ambient temperature or heat buildup in device over time.

• **To order UL508, add "-IC" to end of model number.**

• Design is in accordance with ASCE 7-05 Chapter 13: **▲**



www.oshpd.ca.gov/FDD/Pre-Approval/
OSP-0201-10.pdf

POWER SUPPLIES

AC POWER SUPPLY

CTRL-PS

Kit Consisting of Model PSMN40AS and a Metal Enclosure

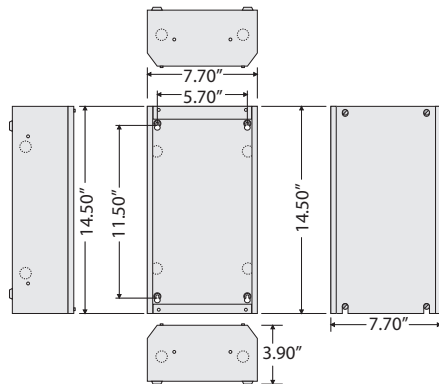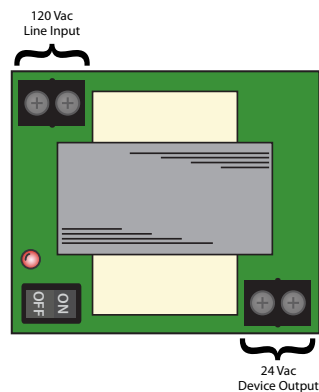

Shown With Cover

SPECIFICATIONS

Transformer: One 40 VA

Primary: 120 Vac

Secondary: 24 Vac, isolated

Frequency: 50/60 Hz

Overload Protection: Inherently Limited

Status: LED On = Activated

ON/OFF Switch: 2 Position

Operating Temperature: -30 to 140° F

Humidity Range: 5 to 95% (noncondensing)

Approvals: Class 2 (UL Approved UL5085-3),
UL916, C-UL, CE, RoHS (PSMN40AS)
UL916, C-UL, CE, RoHS (MH1000 Series)

Dimensions: 14.50" x 7.70" x 3.90"

Weight: 7.28 lbs.

Housing: NEMA 1 Metal Enclosure with screw cover

Notes:

• Track mounted power supply may be ordered separately as model PSMN40AS.

• 40 VA power supply mounted in MT212-4 track, high/low voltage barrier and 8.75" of 35 mm top hat DIN rail for mounting of desired controller in one metal enclosure.

• Controller must be 9.50" x 6.75" x 3.50" or smaller with DIN rail mounting capability, or 9.50" x 6.75" x 3.125" without DIN rail mounting capability.


• **Controller not included.**

GREAT FOR ZONE & NETWORK CONTROLLERS

AC POWER SUPPLY


MHP3903100AB10

Enclosed Single 100 VA Power Supply with Subpanel:
Models MH3900 + SP3803S + PS100AB10

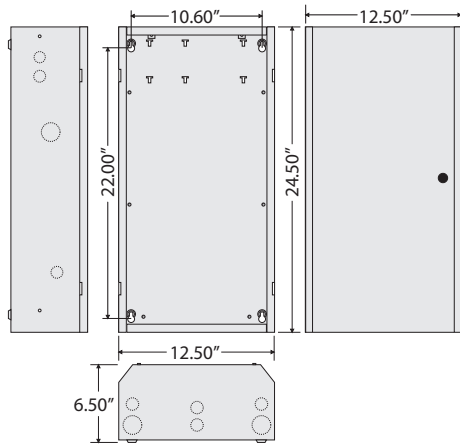

MHP3904100AB10

Enclosed Single 100 VA Power Supply with Subpanel:
Models MH3900 + SP3804S + PS100AB10

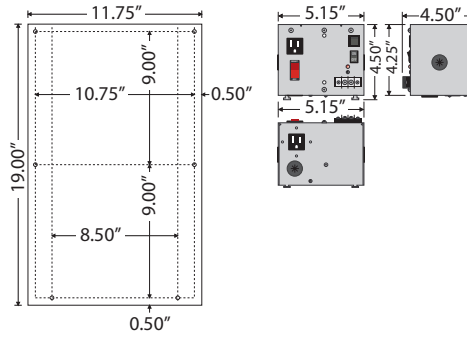

POWER SUPPLY (PS100AB10)

Transformer: One 100 VA Split-Bobbin
Over Current Protection: Circuit Breaker
Frequency: 50/60 Hz
24 Vac ON/OFF: On / Off Switch & Breaker
Main Breaker ON/OFF: Switch / Breaker (10 Amp)
 (Kills power to entire unit: Outlets, Aux. Output, & Transformer)*
Approvals: Class 2 (UL Approved UL5085-3), UL916, C-UL, CE, RoHS
Dimensions: 4.500" x 8.625" x 4.500"
Weight: 4.600 lbs.

Input Wires: Input Power Wires
 BLK: 120 Vac
 WHT: Neutral
 GRN: Ground

Outlet Wires
 BLK: 120 Vac
 WHT: Neutral
 GRN: Ground

Output Wires: Auxiliary Output
 BLU: 120 Vac

Notes:

- Output derating may exceed 20% due to elevated ambient temperature or heat buildup in device over time.
- Design is in accordance with ASCE 7-05 Chapter 13

SELECTION GUIDE

Model #	Sub-Panel
MHP3903100AB10	Polymetal
MHP3904100AB10	Perforated Steel

POLYMETAL SUB-PANEL (SP3803S)

Mounting Area: 223.25" square
Approvals: Plenum Rated
Dimensions: 19.00" x 11.75"
Weight: 1.705 lbs.

PERFORATED STEEL SUB-PANEL (SP3804S)

Mounting Area: 223.25" square
Approvals: Plenum Rated
Dimensions: 19.00" x 11.75"
Weight: 2.94 lbs.


METAL HOUSING (MH3900)

Construction: 14 Gauge Steel
Cover Type: Reversible Hook Hinge Key Latch Door
Approvals: UL Listed, C-UL, CE Approved, RoHS
Dimensions: 12.50" (W) x 24.50" (H) x 6.50" (D)
Weight: 24.30 lbs.

AC POWER SUPPLY


MHP3903100A100AB10

Enclosed Dual 100 VA Power Supplies with Subpanel:
Models MH3900 + **SP3803S** + PS100A100AB10

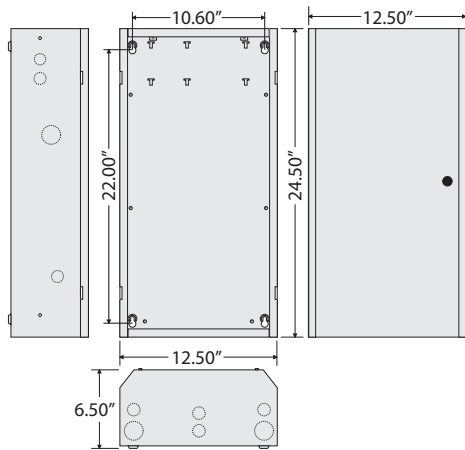

MHP3904100A100AB10

Enclosed Dual 100 VA Power Supplies with Subpanel:
Models MH3900 + **SP3804S** + PS100A100AB10

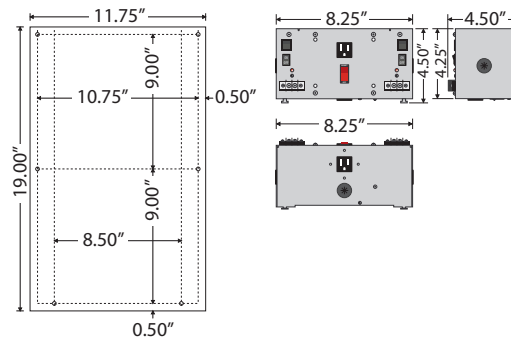

POWER SUPPLY (PS100A100AB10)

Transformer: Two 100 VA Split-Bobbin
Over Current Protection: Circuit Breaker
Frequency: 50/60 Hz
24 Vac ON/OFF: On / Off Switch & Breaker
Main Breaker ON/OFF: Switch / Breaker (10 Amp)
(Kills power to entire unit: Outlets, Aux. Output, & Transformer)*
Total Combined Output 9A
Approvals: Class 2 (UL Approved UL5085-3), UL916, C-UL, CE, RoHS
Dimensions: 4.500" x 8.625" x 4.500"
Weight: 7.000 lbs.

Input Wires: Input Power Wires
BLK: 120 Vac
WHT: Neutral
GRN: Ground

Outlet Wires
BLK: 120 Vac
WHT: Neutral
GRN: Ground

Output Wires: Auxiliary Output
BLU: 120 Vac

Notes:

- Output derating may exceed 20% due to elevated ambient temperature or heat buildup in device over time.
- Design is in accordance with ASCE 7-05 Chapter 13

SELECTION GUIDE

Model #	Sub-Panel
MHP3903100A100AB10	Polymetal
MHP3904100A100AB10	Perforated Steel

POLYMETAL SUB-PANEL (SP3803S)

Mounting Area: 223.25" square
Approvals: Plenum Rated
Dimensions: 19.00" x 11.75"
Weight: 1.705 lbs.

PERFORATED STEEL SUB-PANEL (SP3804S)

Mounting Area: 223.25" square
Approvals: Plenum Rated
Dimensions: 19.00" x 11.75"
Weight: 2.94 lbs.

METAL HOUSING (MH3900)


Construction: 14 Gauge Steel
Cover Type: Reversible Hook Hinge Key Latch Door
Approvals: UL Listed, C-UL, CE Approved, RoHS
Dimensions: 12.50" (W) x 24.50" (H) x 6.50" (D)
Weight: 24.30 lbs.

PSH500A

Enclosed 500VA Power Supply with Five 100VA Class 2 Outputs, 480/277/240/120 Vac to 24 Vac

PSMN500A

Open Style 500VA Power Supply with Five 100VA Class 2 Outputs, 480/277/240/120 Vac to 24 Vac

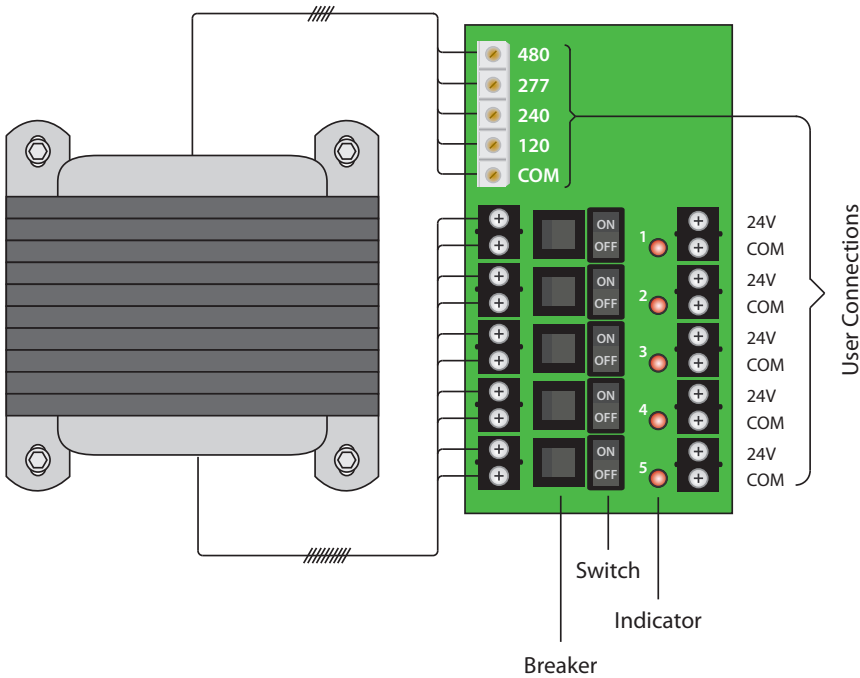


PSH500A
Shown
With
Cover



PSH500A
Shown
Without
Cover



PSMN500A



POWER SUPPLIES

SPECIFICATIONS

Transformer: One (1) 500 VA
Over Current Protection: Circuit Breaker
Primary: 480/277/240/120 Vac
Frequency: 50/60 Hz
Dimensions: 12.125" x 12.125" x 6.000" (PSH500A)
 11.330" x 11.400" x 5.000" (PSMN500A)
Approvals: Class 2 (UL Approved UL5085-3),
 UL916, UL508, C-UL, CE, RoHS, Special
 ^ Seismic Certification of Equipment and
 Components: OSP-0201-10
Sub-Panel: Plenum Rated Polymetal
 Sub-Panel (PSMN500A)
Housing: NEMA1 Metal Enclosure (PSH500A)
Weight: 30.16 lbs. (PSH500A)
 20.60 lbs. (PSMN500A)

5 Secondaries:
 24 Vac, with LED Indicators
 4 Amp breaker for each output
24 Vac ON/OFF:
 On / Off Switch & Breaker

Input:
 480/277/240/120 Vac **Finger-Safe Terminals**, 8-18 AWG

Output:
 5 Ungrounded, Isolated, 100 VA, Class 2, 24 Vac
 Outputs. Terminals accept 12-26 AWG wire.

Ambient Temperature Derating:
 4A up to 40° C ; 3A up to 50° C ; 2A up to 55° C
 (When All 5 Outputs Operated Simultaneously)

Notes:

- To order UL508, add "-IC" to end of model number.
- Open style (PSMN500A) is mounted to sub-panel SP3303 for shipping. Sub-panel may be removed to suit application.
- Primary voltage terminal cover available. See model APS53-TC on page 141.
- Design is in accordance with ASCE 7-05 Chapter 13: ^ www.oshpd.ca.gov/FDD/Pre-Approval/OSP-0201-10.pdf

Standby Wattage:
 48.515 W @ 120 Vac
 48.699 W @ 240 Vac
 49.564 W @ 277 Vac
 48.255 W @ 480 Vac

Full Load Primary Current:
 4.66 A @ 120 Vac
 2.41 A @ 240 Vac
 2.06 A @ 277 Vac
 1.17 A @ 480 Vac

Secondary Output Voltage vs. Load:
 24.0V @ 1 Amp
 23.0V @ 2 Amp
 21.8V @ 3 Amp
 21.1V @ 4 Amp

- With 240 Vac primary input voltage
- When all 5 outputs operated simultaneously, at room temperature



GREAT FOR VAV APPLICATIONS

PSH300A

Enclosed 300VA Power Supply with Three 100VA Class 2 Outputs, 480/277/240/120 Vac to 24 Vac

PSMN300A

Open Style 300VA Power Supply with Three 100VA Class 2 Outputs, 480/277/240/120 Vac to 24 Vac

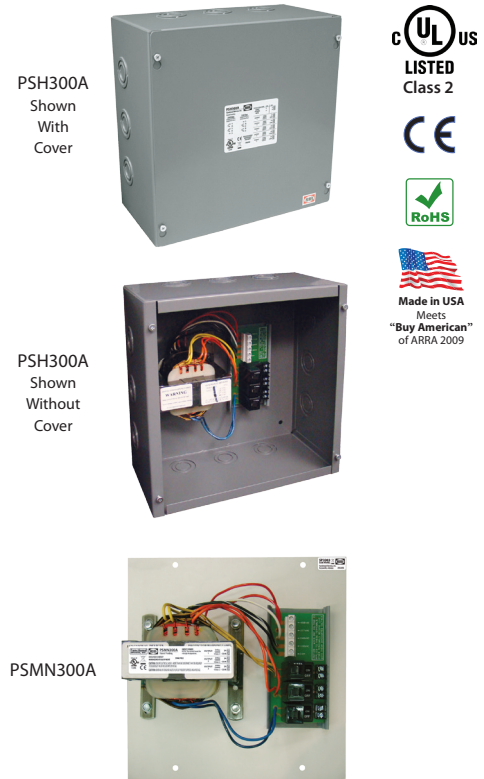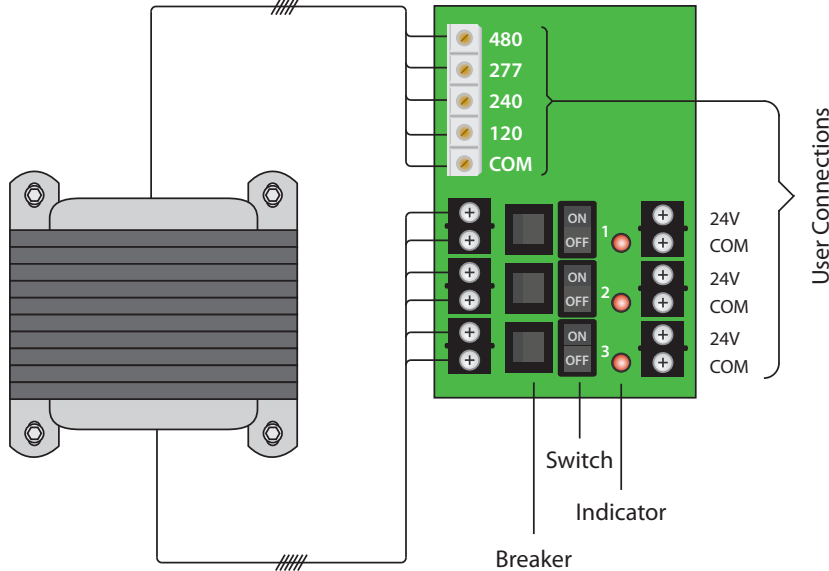

POWER SUPPLIES

SPECIFICATIONS

Transformer: One (1) 300 VA
Over Current Protection: Circuit Breaker
Primary: 480/277/240/120 Vac
Frequency: 50/60 Hz
Dimensions: 12.125" x 12.125" x 6.000" (PSH300A)
 11.330" x 11.400" x 4.500" (PSMN300A)
Approvals: Class 2 (UL Approved UL5085-3), UL916, UL508, C-UL, CE, RoHS, Special
 ▲ Seismic Certification of Equipment and Components: OSP-0201-10
Sub-Panel: Plenum Rated Polymetal Sub-Panel (PSMN300A)
Housing: NEMA1 Metal Enclosure (PSH300A)
Weight: 20.00 lbs. (PSH300A)
 11.00 lbs. (PSMN300A)

3 Secondaries:
 24 Vac, with LED Indicators
 4 Amp breaker for each output
24 Vac ON/OFF:
 On / Off Switch & Breaker

Input:
 480/277/240/120 Vac **Finger-Safe Terminals**, 8-18 AWG

Output:
 3 Ungrounded, Isolated, 100 VA, Class 2, 24 Vac Outputs. Terminals accept 12-26 AWG wire.

Ambient Temperature Derating:
 4A up to 40° C ; 3A up to 50° C ; 2A up to 55° C (When All 3 Outputs Operated Simultaneously)

- Notes:**
- To order UL508, add "-IC" to end of model number.
 - Open style (PSMN300A) is mounted to sub-panel SP3303 for shipping. Sub-panel may be removed to suit application.
 - Primary voltage terminal cover available. See model APS53-TC on page 141.
 - Design is in accordance with ASCE 7-05 Chapter 13: ▲ www.oshpd.ca.gov/FDD/Pre-Approval/OSP-0201-10.pdf

Standby Wattage:
 16.61 W @ 120 Vac
 17.70 W @ 240 Vac
 16.26 W @ 277 Vac
 19.20 W @ 480 Vac

Full Load Primary Current:
 2.66 A @ 120 Vac
 1.36 A @ 240 Vac
 1.18 A @ 277 Vac
 0.68 A @ 480 Vac

Secondary Output Voltage vs. Load:
 24.5 V @ 1 Amp
 23.5 V @ 2 Amp
 22.8 V @ 3 Amp
 22.3 V @ 4 Amp

- With 120 Vac primary input voltage
- When all 3 outputs operated simultaneously, at room temperature



GREAT FOR VAV APPLICATIONS

PSH200A

Enclosed 200VA Power Supply with Five 40VA Class 2 Outputs, 480/347/277/240/120 Vac to 24 Vac

PSMN200A

Open Style 200VA Power Supply with Five 40VA Class 2 Outputs, 480/347/277/240/120 Vac to 24 Vac

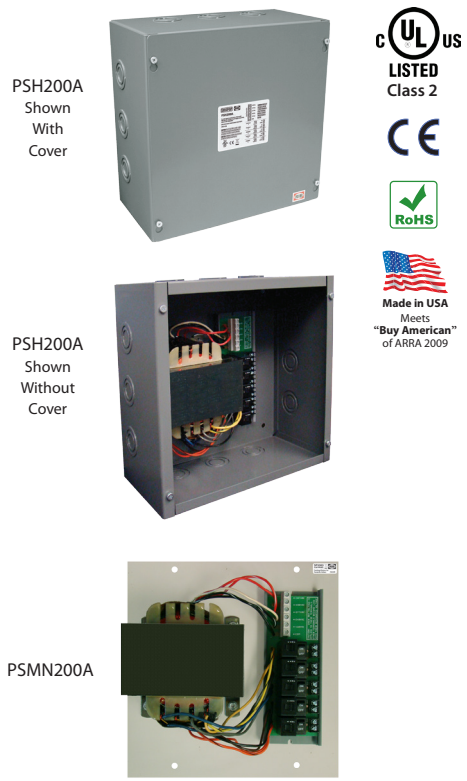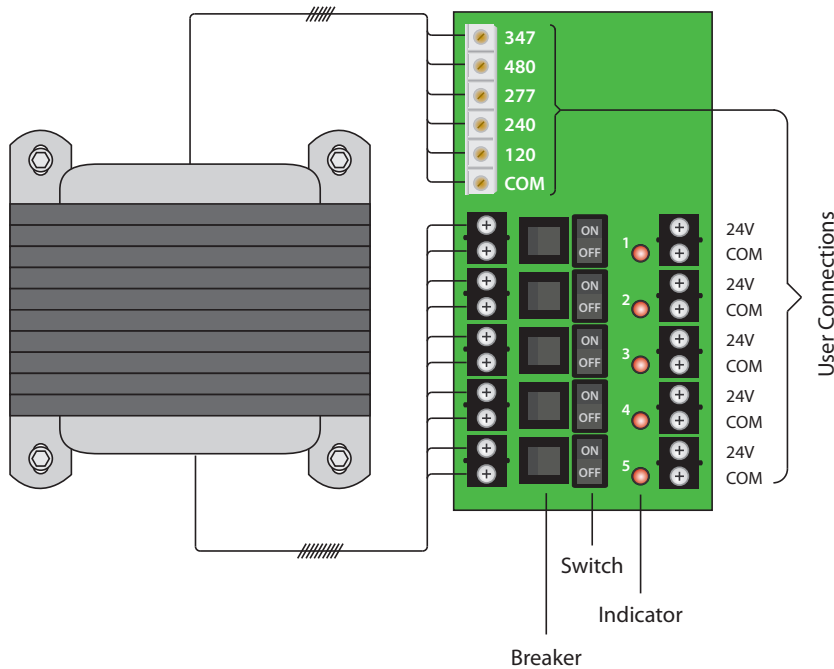

POWER SUPPLIES

SPECIFICATIONS

Transformer: One (1) 200 VA
Over Current Protection: Circuit Breaker
Primary: 480/347/277/240/120 Vac
Frequency: 50/60 Hz
Dimensions: 12.125" x 12.125" x 6.000" (PSH200A)
 11.330" x 11.400" x 5.000" (PSMN200A)
Approvals: Class 2 (UL Approved UL5085-3),
 UL916, C-UL, CE, RoHS
Sub-Panel: Plenum Rated Polymetal
 Sub-Panel (PSMN200A)
Housing: NEMA1 Metal Enclosure (PSH200A)
Weight: 18.60 lbs. (PSH200A)
 8.00 lbs. (PSMN200A)

5 Secondaries:
 24 Vac, with LED Indicators

24 Vac ON/OFF:
 On / Off Switch & Breaker

Input:
 480/347/277/240/120 Vac **Finger-Safe Terminals**,
 8-18 AWG

Output:
 5 Ungrounded, Isolated, 40 VA, Class 2, 24 Vac
 Outputs. Terminals accept 12-26 AWG wire.

Ambient Temperature Derating:
 1.6A up to 40° C ; 1.2A up to 60° C
 (When All 5 Outputs Operated Simultaneously)

Notes:

- Open style (PSMN200A) is mounted to sub-panel SP3303 for shipping. Sub-panel may be removed to suit application.
- Primary voltage terminal cover available. See model APS53-TC on page 141.

Standby Wattage:
 18.93 W @ 120 Vac
 22.08 W @ 240 Vac
 22.33 W @ 277 Vac
 23.11 W @ 347 Vac
 25.24 W @ 480 Vac

Full Load Primary Current:
 2.57 A @ 120 Vac
 1.44 A @ 240 Vac
 1.17 A @ 277 Vac
 0.95 A @ 347 Vac
 0.73 A @ 480 Vac

Secondary Output Voltage vs. Load:
 24.9V @ 0.5 Amp
 24.0V @ 1.0 Amp
 23.9V @ 1.4 Amp
 23.7V @ 1.6 Amp


- With 120 Vac primary input voltage
- When all 5 outputs operated simultaneously, at room temperature

347 VAC INPUT VOLTAGE PROVIDES DIRECT CONVERSION FROM MANY CANADIAN SYSTEMS TO CLASS 2 OUTPUTS


PERFECT FOR ISOLATING UP TO FIVE ZONE CONTROLLERS

PSH500A-LVC

Enclosed 500VA Power Supply, **High/Low Voltage Separation** with Five 100VA Class 2 Outputs, 480/277/240/120 Vac to 24 Vac

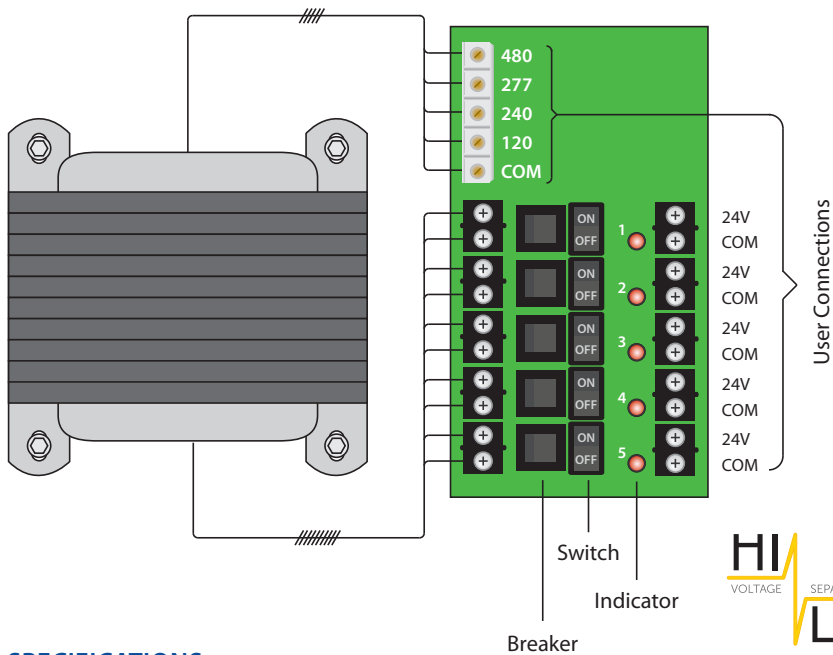

PSH500A-LVC
Shown Without
High Voltage Cover &
Low Voltage
Access Plate



PSH500A-LVC
Shown Without
Low Voltage
Access Plate



PSH500A-LVC
Shown With
Full Cover &
Access Plate



POWER SUPPLIES

SPECIFICATIONS

Transformer: One (1) 500 VA
Over Current Protection: Circuit Breaker
Primary: 480/277/240/120 Vac
Frequency: 50/60 Hz
Dimensions: 12.125" x 12.125" x 6.000"
Approvals: Class 2 (UL Approved UL5085-3), UL916, C-UL, CE, RoHS
Housing: NEMA1 Metal Enclosure with high/low separation
Weight: 32.30 lbs.

5 Secondaries:
 24 Vac, with LED Indicators
 4 Amp breaker for each output

24 Vac ON/OFF:
 On / Off Switch & Breaker

Input:
 480/277/240/120 Vac **Finger-Safe Terminals**, 8-18 AWG

Output:
 5 Ungrounded, Isolated, 100 VA Class 2, 24 Vac Outputs.
 Removable Terminals accept 16-22 AWG wire.

Ambient Temperature Derating:
 4A up to 40° C ; 3A up to 50° C ; 2A up to 55° C
 (When All 5 Outputs Operated Simultaneously)

Standby Wattage:
 48.515 W @ 120 Vac
 48.699 W @ 240 Vac
 49.564 W @ 277 Vac
 48.255 W @ 480 Vac

Full Load Primary Current:
 4.66 A @ 120 Vac
 2.41 A @ 240 Vac
 2.06 A @ 277 Vac
 1.17 A @ 480 Vac


Secondary Output Voltage vs. Load:
 24.0 V @ 1 Amp
 23.0 V @ 2 Amp
 21.8 V @ 3 Amp
 21.1 V @ 4 Amp

- With 240 Vac primary input voltage
- When all 5 outputs operated simultaneously, at room temperature



AC POWER SUPPLY

PSH300A-LVC

Enclosed 300VA Power Supply with Three 100VA Class 2 Outputs, 480/277/240/120 Vac to 24 Vac

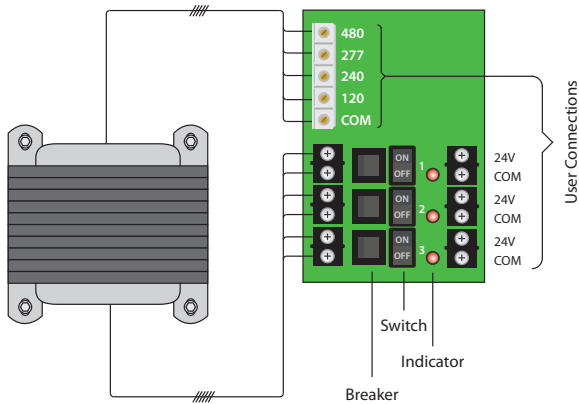

PSH300A-LVC
Shown Without
High Voltage
Cover &
Low Voltage
Access Plate



SPECIFICATIONS

Transformer: One (1) 300 VA
Over Current Protection: Circuit Breaker
Primary: 480/277/240/120 Vac
Frequency: 50/60 Hz
Dimensions: 12.125" x 12.125" x 6.000"
Approvals: Class 2 (UL Approved UL5085-3), UL916, C-UL, CE, RoHS
Housing: NEMA1 Metal Enclosure
Weight: 22.46 lbs.

3 Secondaries:
 24 Vac, with LED Indicators
 4 Amp breaker for each output

24 Vac ON/OFF:
 On / Off Switch & Breaker

Input:
 480/277/240/120 Vac **Finger-Safe Terminals**,
 8-18 AWG

Output:
 3 Ungrounded, Isolated, 100 VA, Class 2, 24 Vac
 Outputs. Terminals accept 12-26 AWG wire.

Ambient Temperature Derating:
 4A up to 40° C ; 3A up to 50° C ; 2A up to 55° C
 (When All 3 Outputs Operated Simultaneously)

Standby Wattage:
 16.61 W @ 120 Vac
 17.70 W @ 240 Vac
 16.26 W @ 277 Vac
 19.20 W @ 480 Vac

Full Load Primary Current:
 2.66 A @ 120 Vac
 1.36 A @ 240 Vac
 1.18 A @ 277 Vac
 0.68 A @ 480 Vac

Secondary Output Voltage vs. Load:
 24.5 V @ 1 Amp
 23.5 V @ 2 Amp
 22.8 V @ 3 Amp
 22.3 V @ 4 Amp


- With 120 Vac primary input voltage
- When all 3 outputs operated simultaneously, at room temperature

POWER SUPPLIES


AC POWER SUPPLY

PSH200A-LVC

Enclosed 200VA Power Supply with Five 40VA Class 2 Outputs, 480/347/277/240/120 Vac to 24 Vac

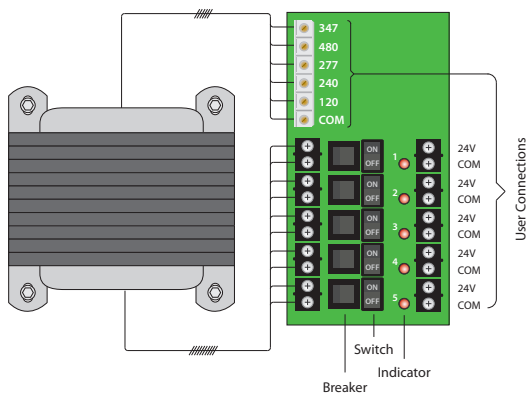

PSH200A-LVC
Shown Without
High Voltage
Cover &
Low Voltage
Access Plate



SPECIFICATIONS

Transformer: One (1) 200 VA
Over Current Protection: Circuit Breaker
Primary: 480/347/277/240/120 Vac
Frequency: 50/60 Hz
Dimensions: 12.125" x 12.125" x 6.000"
Approvals: Class 2 (UL Approved UL5085-3), UL916, C-UL, CE, RoHS
Housing: NEMA1 Metal Enclosure
Weight: 20.30 lbs.

5 Secondaries:
 24 Vac, with LED Indicators

24 Vac ON/OFF:
 On / Off Switch & Breaker

Input:
 480/347/277/240/120 Vac **Finger-Safe Terminals**,
 8-18 AWG

Output:
 5 Ungrounded, Isolated, 40 VA, Class 2, 24 Vac
 Outputs. Terminals accept 12-26 AWG wire.

Ambient Temperature Derating:
 1.6A up to 40° C ; 1.2A up to 60° C
 (When All 5 Outputs Operated Simultaneously)

Standby Wattage:
 18.93 W @ 120 Vac
 22.08 W @ 240 Vac
 22.33 W @ 277 Vac
 23.11 W @ 347 Vac
 25.24 W @ 480 Vac


Full Load Primary Current:
 2.57 A @ 120 Vac
 1.44 A @ 240 Vac
 1.17 A @ 277 Vac
 0.95 A @ 347 Vac
 0.73 A @ 480 Vac

Secondary Output Voltage vs. Load:
 24.9 V @ 0.5 Amp
 24.0 V @ 1.0 Amp
 23.9 V @ 1.4 Amp
 23.7 V @ 1.6 Amp

- With 120 Vac primary input voltage
- When all 5 outputs operated simultaneously, at room temperature

PSH500AB10-LVC

Enclosed 500VA Power Supply, **High/Low Voltage Separation** with Five 100VA Class 2 Outputs, 120 Vac to 24 Vac with 120 Vac Receptacle

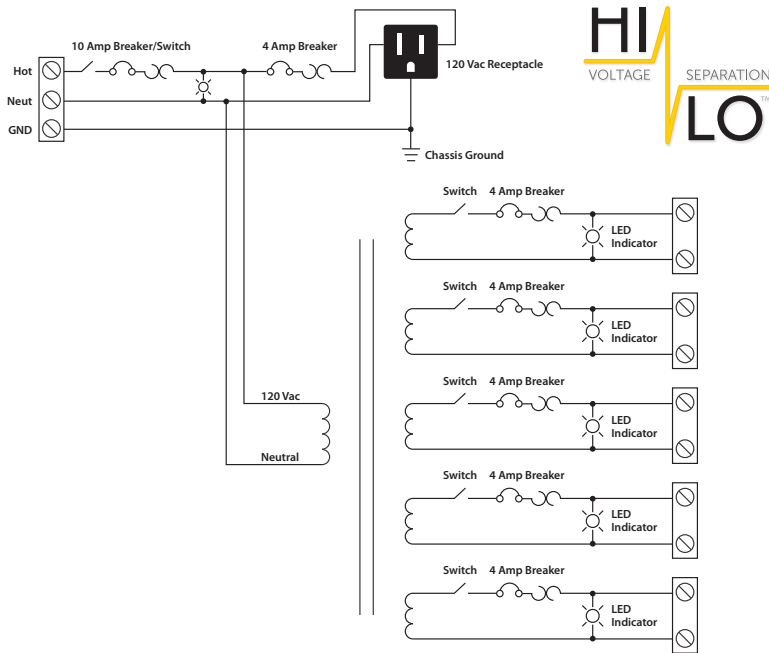

PSH500AB10-LVC
Shown With High Voltage
Cover & Low Voltage
Access Plate



POWER SUPPLIES

SPECIFICATIONS

Transformer: One (1) 500 VA
Over Current Protection: Circuit Breaker
Primary: 120 Vac
Frequency: 50/60 Hz
Main Breaker ON/OFF: Switch / Breaker (10 Amp)
 (Kills power to entire unit:
 1 Outlet & Transformer)
Approvals: Class 2 (UL Approved UL5085-3),
 UL916, C-UL, CE, RoHS
Dimensions: 12.125" x 12.125" x 6.000"
Housing: NEMA1 Metal Enclosure with
 high/low separation
Weight: 32.30 lbs.

5 Secondaries:
 24 Vac, with LED Indicators
 4 Amp breaker for each output
24 Vac ON/OFF:
 On / Off Switch & Breaker
Input:
 120 Vac **Finger-Safe Terminals**, 8-18 AWG


Output:
 5 Ungrounded, Isolated, 100 VA Class 2,
 24 Vac Outputs. Removable Terminals
 accept 16-22 AWG wire.
Ambient Temperature Derating:
 4A up to 40° C ; 3A up to 50° C ; 2A up to 55° C
 (When All 5 Outputs Operated Simultaneously)

Standby Wattage:
 48.515 W @ 120 Vac
Full Load Primary Current:
 4.66 A @ 120 Vac
Secondary Output Voltage vs. Load:
 24.0 V @ 1 Amp
 23.0 V @ 2 Amp
 21.8 V @ 3 Amp
 21.1 V @ 4 Amp
 • When all 5 outputs operated
 simultaneously, at room
 temperature
Notes:
 • 4A (Breaker protected) Convenience
 Receptacle Provided

AC POWER SUPPLY

PSH300AB10-LVC

Enclosed 300VA Power Supply, **High/Low Voltage Separation** with Three 100VA Class 2 Outputs, 120 Vac to 24 Vac with 120 Vac Receptacle

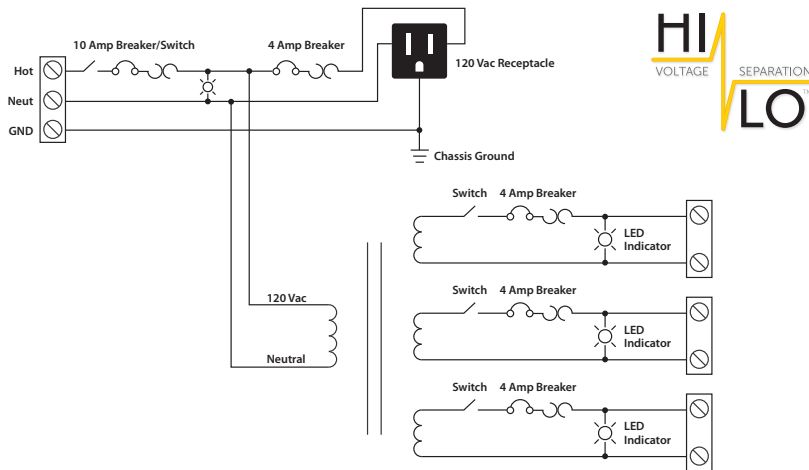

HI
VOLTAGE
SEPARATION
LO



PSH300AB10-LVC
Shown With High Voltage
Cover & Low Voltage
Access Plate



POWER
SUPPLIES

SPECIFICATIONS

Transformer: One (1) 300 VA
Over Current Protection: Circuit Breaker
Primary: 120 Vac
Frequency: 50/60 Hz
Main Breaker ON/OFF: Switch / Breaker (10 Amp)
 (Kills power to entire unit:
 1 Outlet & Transformer)
Approvals: Class 2 (UL Approved UL5085-3),
 UL916, C-UL, CE, RoHS
Dimensions: 12.125" x 12.125" x 6.000"
Housing: NEMA1 Metal Enclosure with
 high/low separation
Weight: 22.12 lbs.

3 Secondaries:
 24 Vac, with LED Indicators
 4 Amp breaker for each output

24 Vac ON/OFF:
 On / Off Switch & Breaker

Input:
 120 Vac **Finger-Safe Terminals**, 8-18 AWG

Output:
 3 Ungrounded, Isolated, 100 VA Class 2,
 24 Vac Outputs. Removable Terminals
 accept 16-22 AWG wire.

Ambient Temperature Derating:
 4A up to 40° C ; 3A up to 50° C ; 2A up to 55° C
 (When All 5 Outputs Operated Simultaneously)

Standby Wattage:
 16.61 W @ 120 Vac

Full Load Primary Current:
 2.66 A @ 120 Vac

Secondary Output Voltage vs. Load:
 24.5 V @ 1 Amp
 23.5 V @ 2 Amp
 22.8 V @ 3 Amp
 22.3 V @ 4 Amp


• When all 5 outputs operated
 simultaneously, at room
 temperature

Notes:

• 4A (Breaker protected) Convenience
 Receptacle Provided

PSH200AB10-LVC

Enclosed 200VA Power Supply, **High/Low Voltage Separation** with Five 40VA Class 2 Outputs, 120 Vac to 24 Vac with 120 Vac Receptacle

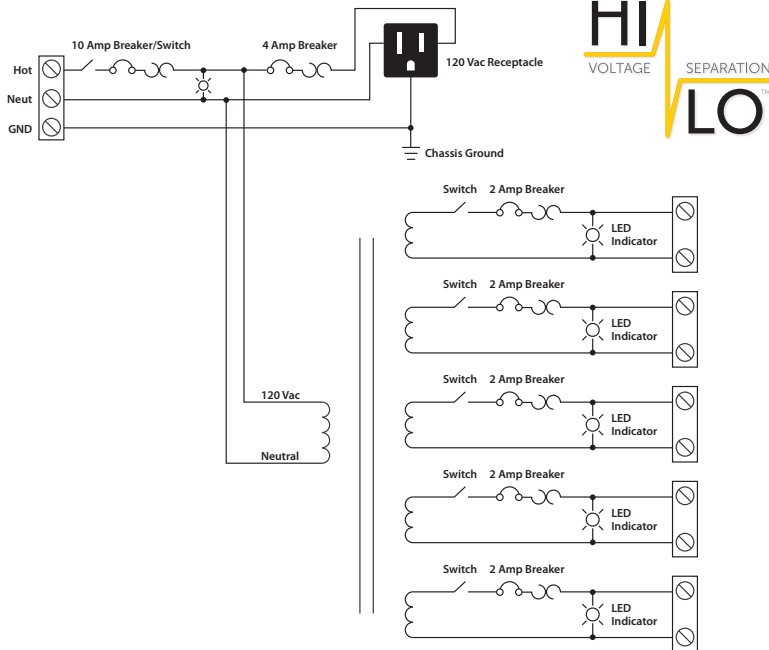

PSH200AB10-LVC
Shown With High Voltage
Cover & Low Voltage
Access Plate

POWER
SUPPLIES

SPECIFICATIONS

Transformer: One (1) 200 VA
Over Current Protection: Circuit Breaker
Primary: 120 Vac
Frequency: 50/60 Hz
Main Breaker ON/OFF: Switch / Breaker (10 Amp)
 (Kills power to entire unit:
 1 Outlet & Transformer)
Approvals: Class 2 (UL Approved UL5085-3),
 UL916, C-UL, CE, RoHS
Dimensions: 12.125" x 12.125" x 6.000"
Housing: NEMA1 Metal Enclosure with
 high/low separation
Weight: 20.30 lbs.

5 Secondaries:
 24 Vac, with LED Indicators
 2 Amp breaker for each output
24 Vac ON/OFF:
 On / Off Switch & Breaker
Input:
 120 Vac **Finger-Safe Terminals**, 8-18 AWG

Output:
 5 Ungrounded, Isolated, 40 VA Class 2,
 24 Vac Outputs. Removable Terminals
 accept 16-22 AWG wire.
Ambient Temperature Derating:
 1.6A up to 40° C ; 1.2A up to 60° C
 (When All 5 Outputs Operated Simultaneously)

Standby Wattage:
 18.93 W @ 120 Vac
Full Load Primary Current:
 2.57 A @ 120 Vac
Secondary Output Voltage vs. Load:
 24.9 V @ 0.5 Amp
 24.0 V @ 1.0 Amp
 23.9 V @ 1.4 Amp
 23.7 V @ 1.6 Amp
 • When all 5 outputs operated
 simultaneously, at room
 temperature
Notes:
 • 4A (Breaker protected) Convenience
 Receptacle Provided


AC POWER SUPPLY: 120 VAC TO 24 VAC

PSB40AB10



Panel Mount 40 VA Power Supply, 120 to 24 Vac

PSB100AB10

Panel Mount 100 VA Power Supply, 120 to 24 Vac

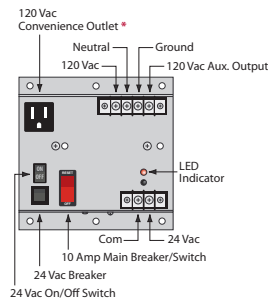

* Move internal jumper to "HOT" position if you wish outlets to always be hot otherwise outlets will be switched by main breaker.

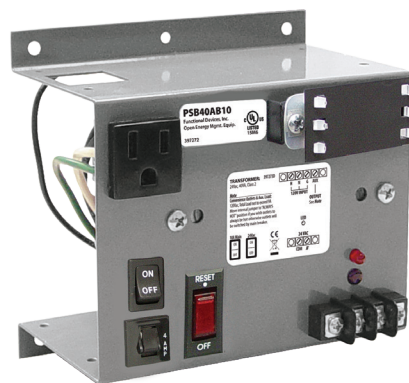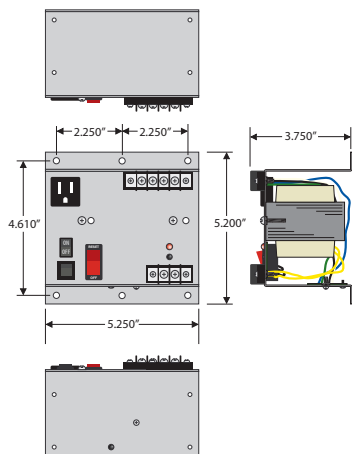

REMOVABLE TERMINAL COVER PROVIDED

SPECIFICATIONS

Transformer: One 40 VA Split-Bobbin (PSB40AB10)
One 100 VA Split-Bobbin (PSB100AB10)

Primary: 120 Vac

Secondary: 24 Vac, w/ LED Indicator

Frequency: 50/60 Hz

Over Current Protection: Inherently Limited + Circuit Breaker (PSB40AB10)
Circuit Breaker (PSB100AB10)

24 Vac ON/OFF: On / Off Switch

Main Breaker ON/OFF: Switch / Breaker (10 Amp)
(Kills power to entire unit:
Outlets, Aux. Output, & Transformer)*
Total Combined Output 9A

Mounting: Panel mount
Temperature: 40° C

Approvals: Class 2 (UL Approved UL5085-3),
UL916, UL508 for -IC models,
C-UL, CE, RoHS

Dimensions: 5.200" x 5.250" x 3.750"

Weight: 2.18 lbs. (PSB40AB10)
3.58 lbs. (PSB100AB10)

Notes:

• To order UL508, add "-IC" to end of model number.




AC POWER SUPPLY: 120 VAC TO 24 VAC

PSMN40AS

2.75" Track Mount 40 VA Power Supply,
120 Vac to 24 Vac, with Switch

PSMN40A

2.75" Track Mount 40 VA Power Supply,
120 Vac to 24 Vac

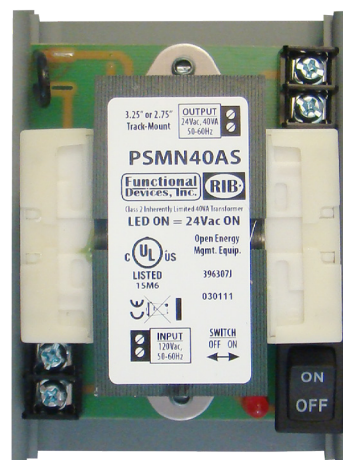

SPECIFICATIONS

Transformers: One 40 VA

Primary: 120 Vac

Secondary: 24 Vac, isolated

Frequency: 50/60 Hz

Overload Protection: Inherently limited

Operating Temperature: -30 to 140° F

Humidity Range: 5 to 95% (noncondensing)

Power Status: LED On = Secondary Voltage Present

Dimensions: 2.500" x 2.750" x 4.000" (without track)

2.800" x 2.750" x 4.000" (in track)

Track Mount: MT212-4 Mounting Track Supplied

Weight: 1.60 lbs.


ON/OFF Switch: 2 Position (PSMN40AS)

Approvals: UL916, C-UL, CE, RoHS

DC POWER SUPPLY: 24 VAC TO 1.5 - 28 VDC

PSP24DA

Enclosed **Non-Isolated** Linear DC Power Supply,
24 Vac to 1.5-28 Vdc Adjustable Output

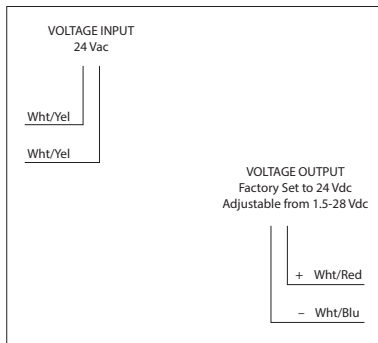

SPECIFICATIONS

Voltage Input: 24 Vac, full-wave rectified
Voltage Output: 1.5 - 28 Vdc **non-isolated**
Frequency: 50/60 Hz
Overload Protection: Electrical and Thermal, Auto-Reset
Operating Temperature: -30 to 140° F
Humidity Range: 5 to 95% (noncondensing)
Power Status: LED On = Activated
Dimensions: 2.30" x 3.20" x 1.80" with .50" NPT nipple
Wires: 16", 600V Rated
Weight: .30 lbs.
ON/OFF Switch: None
Approvals: Class 2 (UL Approved UL5085-3), UL916, C-UL, CE, RoHS
Housing Rating: UL Accepted for Use in Plenum, NEMA 1

Output Current Ratings:
 116 mA @ 10 Vdc
 125 mA @ 12 Vdc
 300 mA @ 24 Vdc

Percent Ripple:
 0.0016%, 24 Vdc @ 300 mA

Regulation:
 Load: 0.04% No Load to Full Load
 Line: 0.0125 V/V

Input Current Rating:
 550 mA Maximum


Notes:
 • Requires a separate ungrounded transformer when used in conjunction with 1/2 wave rectified power supplies, grounded 24 Vac transformers, or when 24 Vac and 24 Vdc are connected in common.

POWER SUPPLIES

DC POWER SUPPLY: 120 VAC TO 24 VDC

PSH24DWB10

Enclosed Single Switching DC Power Supply 120 to 24 Vdc @ 2.5 Amp

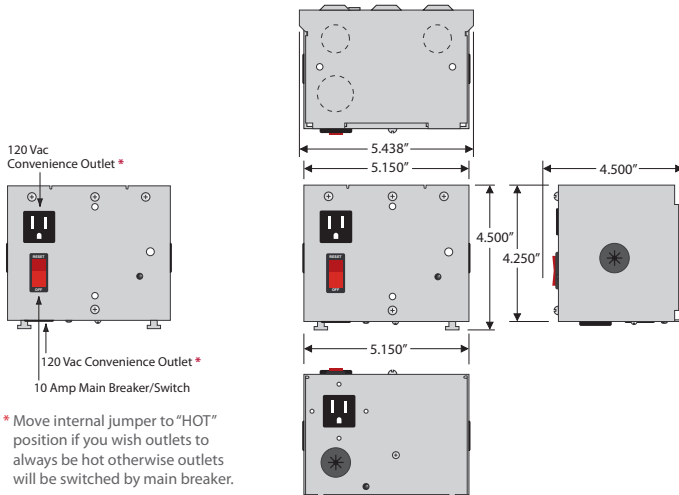

* Move internal jumper to "HOT" position if you wish outlets to always be hot otherwise outlets will be switched by main breaker.



SPECIFICATIONS

Input Voltage: 120 Vac
Frequency: 50/60 Hz
DC Output: 24 Vdc @ 2.5 Amp
Over Current Protection: Circuit Breaker
Main Breaker ON/OFF: Switch / Breaker (10 Amp) (Kills power to entire unit)*
 Total Combined Output 9A
Operating Temperature: 32 to 122° F
Dimensions: 4.500" x 5.438" x 4.500"
Weight: 2.980 lbs.

Input Wires: Input Power Wires
 BLK: 120 Vac
 WHT: Neutral
 GRN: Ground

Output Wires: DC Supply Output
 WHT/RED: 24 Vdc
 WHT/BLU: 24 Vdc COM


Notes:
 • This device is not certified for use as a Class 2 power source.

Auxiliary Output
 BLU: 120 Vac

AC & DC POWER SUPPLY: 120 VAC TO 24 VAC AND 24 VDC

PSH100A24DWB10

Enclosed Power Supply, 100 VA (120 to 24 Vac) and **Switching** 120 to 24Vdc @ 2.5 Amp

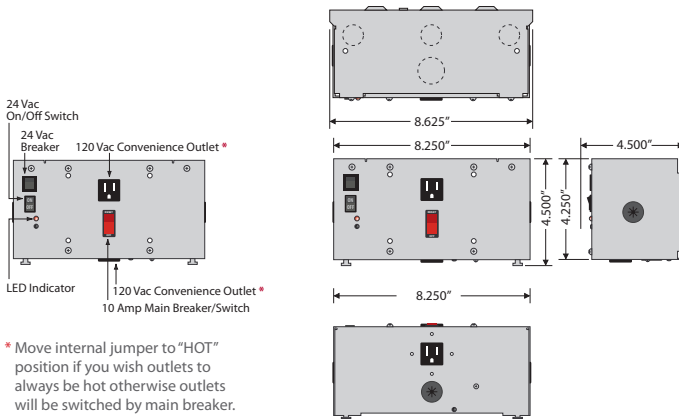

* Move internal jumper to "HOT" position if you wish outlets to always be hot otherwise outlets will be switched by main breaker.

SPECIFICATIONS

Transformer: One 100 VA Split-Bobbin

Voltage Input: 120 Vac

Frequency: 50/60 Hz

Over Current Protection: Circuit Breaker

24 Vac ON/OFF: Switch / Breaker (10 Amp)

Main Breaker ON/OFF: (Kills power to entire unit: Outlets, Aux. Output, & Transformer, and 24 Vdc)*
Total Combined Output 9A

Dimensions: 4.500" x 8.625" x 4.500"

Weight: 5.600 lbs.

Input Wires: Input Power Wires

BLK: 120 Vac

WHT: Neutral

GRN: Ground

Output Wires: DC Supply Output

WHT/RED: 24 Vdc

WHT/BLU: 24 Vdc COM

Auxiliary Output

BLU: 120 Vac

Transformer Output

WHT/YEL: 24 Vac

WHT/BLU: 24 Vac COM

Notes:

- This device is not certified for use as a Class 2 power source.

POWER SUPPLIES





DC POWER SUPPLY: 24 VAC TO 1.5 - 28 VDC

PSMN24DA

2.75" Track Mount **Non-Isolated** Linear DC Power Supply, 24Vac to 1.5-28 Vdc, 300 mA Adjustable Output

PSMN24DAS

2.75" Track Mount **Non-Isolated** Linear DC Power Supply, 24Vac to 1.5-28 Vdc, 300 mA Adjustable Output, **with Switch**

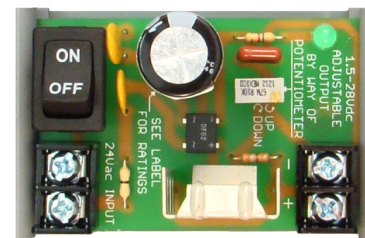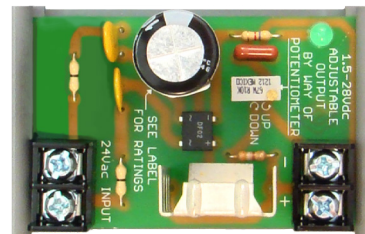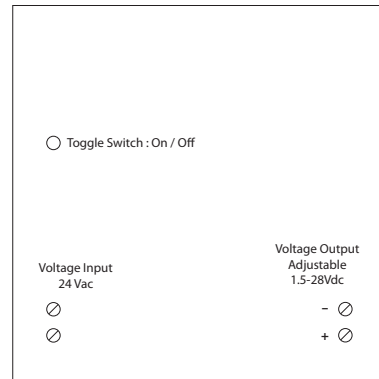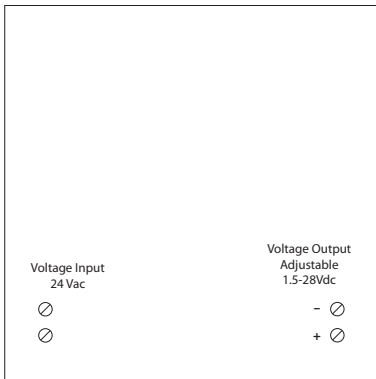

SPECIFICATIONS

Voltage Input: 24 Vac, full-wave rectified

Voltage Output: 1.5 - 28 Vdc **non-isolated**

Frequency: 50/60 Hz

Overload Protection: Electrical and Thermal, Auto-Reset

Operating Temperature: -30 to 140° F

Humidity Range: 5 to 95% (noncondensing)

Power Status: LED On = Activated

Dimensions: 1.500" x 2.750" x 1.750"

Track Mount: 2.750"

MT212-2 Mounting Track Supplied

Weight: 0.20 lbs.

ON/OFF Switch: None (PSMN24DA)

2 Position Toggle (PSMN24DAS)

Approvals: Class 2 (UL Approved UL5085-3), UL916, C-UL, CE, RoHS

Output Current Ratings:

116 mA @ 10 Vdc

125 mA @ 12 Vdc

300 mA @ 24 Vdc

Input Current Rating:

550 mA Maximum

Percent Ripple:

0.0016%, 24 Vdc @ 300 mA

Regulation:

Load: 0.04% No Load to Full Load

Line: 0.0125 V/V

Notes:



- Requires a separate ungrounded transformer when used in conjunction with 1/2 wave rectified power supplies, grounded 24 Vac transformers, or when 24 Vac and 24 Vdc are connected in common.

- See also supplementary model PSMN40AS

DC POWER SUPPLY: 24 VAC TO 1.5 - 14 VDC

PSM20A12DAS

4.00" & 2.75" Track Mount Isolated Linear DC Power Supply, 24 Vac to 1.5-14Vdc, 300 mA Adjustable Output

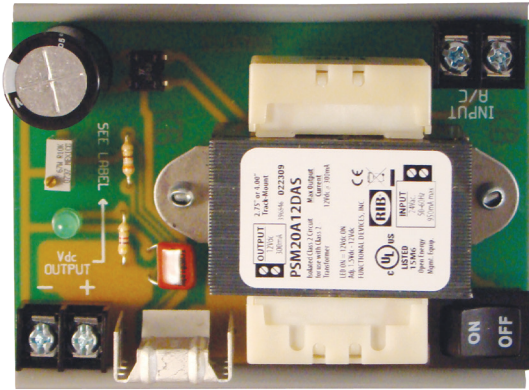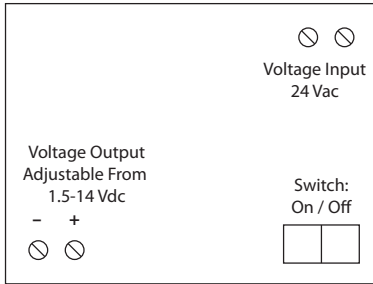

SPECIFICATIONS

Voltage Input: 24 Vac
Voltage Output: 1.5 - 14 Vdc Isolated
Frequency: 50/60 Hz
Overload Protection: Electrical and Thermal, Auto-Reset
Operating Temperature: -30 to 140° F
Humidity Range: 5 to 95% (noncondensing)
Power Status: LED On = Activated
Dimensions: 1.625" x 2.750" x 4.000"
Track Mount: 4.000" and 2.750"
 MT212-4 Mounting Track Supplied
Weight: 1.10 lbs.
ON/OFF Switch: 2 Position
Approvals: UL916, C-UL, CE, RoHS

Output Current Ratings:
 300 mA @ 12 Vdc

Input Current Rating:
 950 mA Maximum

Percent Ripple:
 0.0016%, 12 Vdc @ 300 mA


Regulation:
 Load: 0.04% No Load to Full Load
 Line: 0.0080 mV/V

POWER SUPPLIES

DC POWER SUPPLY: 120 VAC OR 24 VAC TO 1.5 - 28 VDC


PSM24A24DAS

4.00" & 2.75" Track Mount Isolated Linear DC Power Supply, 24 Vac to 1.5-28 Vdc, 300 mA Adjustable Output

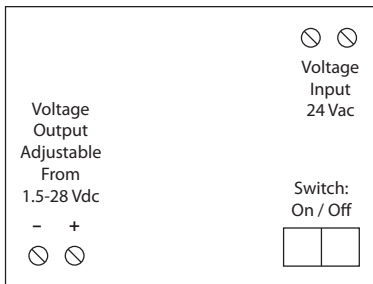

PSM19A24DAS

4.00" & 2.75" Track Mount Isolated Linear DC Power Supply, 120 Vac to 1.5-28 Vdc, 300 mA Adjustable Output

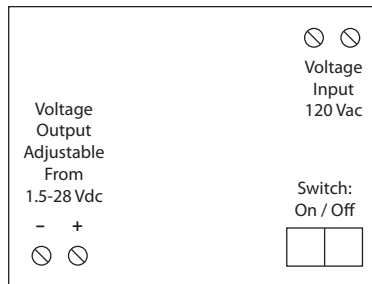

SPECIFICATIONS

Voltage Input: 24 Vac (PSM24A24DAS)
 120 Vac (PSM19A24DAS)
Voltage Output: 1.5 - 28 Vdc Isolated
Frequency: 50/60 Hz
Overload Protection: Electrical and Thermal, Auto-Reset
Operating Temperature: -30 to 140° F
Humidity Range: 5 to 95% (noncondensing)
Power Status: LED On = Activated
Dimensions: 1.625" x 2.750" x 4.000"
Track Mount: 4.000" and 2.750"
 MT212-4 Mounting Track Supplied
Weight: 1.10 lbs.
ON/OFF Switch: 2 Position
Approvals: UL916, C-UL, CE, RoHS

Output Current Ratings:
 116 mA @ 10 Vdc
 125 mA @ 12 Vdc
 300 mA @ 24 Vdc

Input Current Rating:
 950 mA Maximum (PSM24A24DAS)
 150 mA Maximum (PSM19A24DAS)



Percent Ripple:
 0.0016%, 24 Vdc @ 300 mA

Regulation:
 Load: 0.04% No Load to Full Load
 Line: 0.0080 mV/V (PSM24A24DAS)
 Line: 0.6250 mV/V (PSM19A24DAS)

DC POWER SUPPLY: 120 VAC TO 24 VDC

PSMN40A24DS

2.75" Track Mount Isolated Linear DC Power Supply, 120 Vac to 24 Vdc, 1 Amp

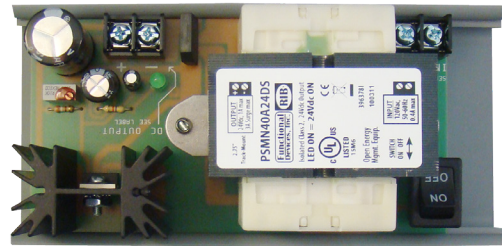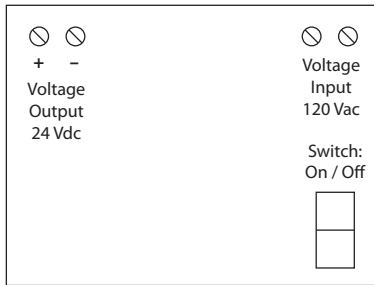

SPECIFICATIONS

Voltage Input: 120 Vac
Voltage Output: 24 Vdc Isolated
Frequency: 50/60 Hz
Overload Protection: Electrical and Thermal, Auto-Reset
Operating Temperature: -30 to 140° F
Humidity Range: 5 to 95% (noncondensing)
Power Status: LED On = Activated
Dimensions: 2.500" x 2.750" x 5.000" (without track)
2.800" x 2.750" x 5.000" (in track)
Track Mount: 2.750"
MT212-6 Mounting Track Supplied
Weight: 1.50 lbs.
ON/OFF Switch: 2 Position
Approvals: UL916, C-UL, CE, RoHS

Output Current Ratings:
1 A @ 24 Vdc


Input Current Rating:
400 mA Maximum

Percent Ripple:
0.0016%, 24 Vdc @ 1 A


Regulation:
Load: 0.50% No Load to Full Load
Line: 25.0000 mV/V

TRANSFORMERS


20 VA - 375 VA




Style 1
Single Hub
& Foot Mount




Style 2
Single Hub
& Foot Mount
with Circuit Breaker




Style 3
Single Hub
& Foot Mount
with Circuit Breaker




Style 4
Dual Hub
& Foot Mount




Style 5
Dual Hub
& Foot Mount
with Circuit Breaker




Style 6
Single Hub
& Side Opening
with Circuit Breaker




Style 7
Two Bottom Openings
& Foot Mount




Style 8
Single Hub,
Side Opening
& Foot Mount




Style 9
Single Hub
& Dual Terminal
Secondary




Style 10
Two End-Bell Openings,
& Foot Mount
with Circuit Breaker



Style 11
Two Side Openings
& Foot Mount



Style 12
Dual Hub
& Foot Mount
with Circuit Breaker



Style 13
90° Conduit Connector
& Mounting Plate
Opening

- Transformers may be foot mount, hub mount, or both. Transformers with the hub mount option will have either a single threaded hub or dual threaded hubs. Several transformers are provided with a circuit breaker and many are Class 2. Pigtail wires are standard on most models and are typically 8.00" in length¹. All transformers utilize split-bobbin construction, making them inherently isolated. Custom transformers are also available (contact factory).

Frequency: 50/60 Hz

Hub Style: .5" NPT Hub

Wire Length: 8" Typical with .5" Strip¹

Operating Temperature: -30 to 140° F

Humidity Range: 5 to 95% (noncondensing)

MTBF: 100,000 Hours @ 77° F

Construction: Split-Bobbin

Approvals: CE approved, RoHS. See chart for UL approvals.

- ¹ = • TR40VA022 = 8" Primary, 30" Secondary, with .5" Strip
 • TR50VA019 = 28" Typical with .5" Strip
 • TR100VA002-20 = 8" Primary, 20" Secondary, with .5" Strip

- Instructions inside product box include wire colors/voltages.**


- Additional information on voltage and wire colors is available in individual data sheets on website.**

<http://www.functionaldevices.com/building-automation/transformers.php>

Or scan QR code with your smart phone.



DIMENSIONS: SEE CHART.

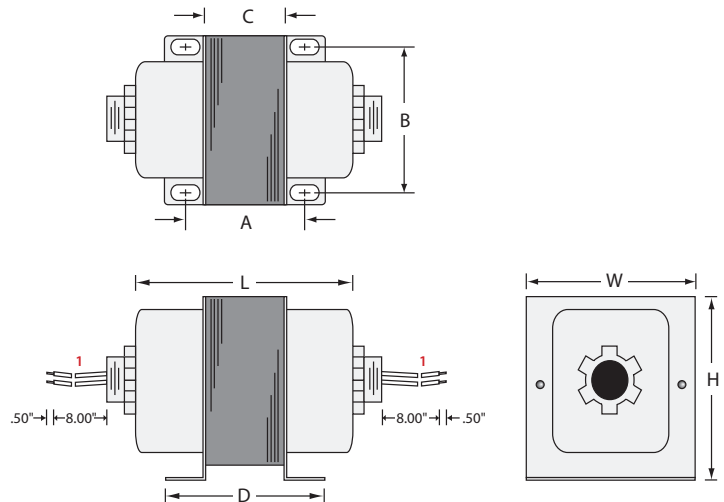

TRANSFORMERS

40 VA - 100 VA | US Manufactured




Made in the U.S.A.
Meets the "Buy American" provisions of Section 1605 of the American Recovery and Reinvestment Act of 2009 (ARRA).

US Manufactured Control Transformers

Functional Devices, Inc.™



- 40 VA through 100 VA
 - Single and dual hub
 - Foot or hub mountable
 - Circuit breaker models
 - Class 2 UL Listed
 - 24 Vac secondary
- Single and multi-tap primaries
 - Meets the "Buy American" provisions of Section 1605 of the American Recovery and Reinvestment Act of 2009 (ARRA).
ARRA Certificates available upon request.

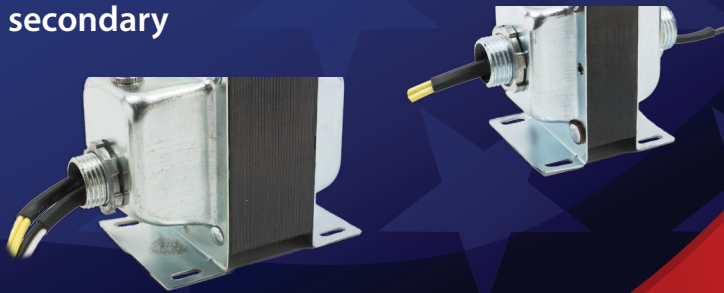

TRANSFORMERS

US MANUFACTURED TRANSFORMERS

MODEL #	MADE IN USA ¹	UL	VA RATING	STYLE	OVER CURRENT PROTECTION	CLASS 2	PRIMARY VOLTAGE (VAC)	SEC. VOLTAGE (VAC)	FOOT MOUNT	HUBS	L	W	H	A	B	C	WEIGHT
TR40VA001US	•	•	40VA	1	Inherent	•	120	24	•	1 Threaded	2.380"	2.200"	2.930"	1.720"	1.750"	.980"	1.80 lbs.
TR40VA002US	•	•	40VA	4	Inherent	•	120	24	•	2 Threaded	2.380"	2.200"	2.920"	1.720"	1.750"	.980"	1.80 lbs.
TR50VA001US	•	•	50VA	1	Fuse	•	120	24	•	1 Threaded	2.750"	2.200"	2.910"	2.060"	1.750"	1.330"	2.20 lbs.
TR50VA005US	•	•	50VA	2	Circuit Brkr.	•	120	24	•	1 Threaded	3.270"	2.525"	3.250"	2.210"	2.000"	1.130"	2.60 lbs.
TR50VA022US NEW	•	•	50VA	5	Circuit Brkr.	•	480/277/240/208/120	24	•	2 Threaded	3.260"	2.525"	3.290"	2.190"	2.000"	1.120"	2.65 lbs.
TR100VA001US	•	•	96VA	2	Circuit Brkr.	•	120	24	•	1 Threaded	3.780"	2.500"	3.290"	2.740"	2.000"	1.630"	3.40 lbs.
TR100VA002US	•	•	96VA	5	Circuit Brkr.	•	120	24	•	2 Threaded	3.750"	2.500"	3.290"	2.690"	2.000"	1.600"	3.40 lbs.
TR100VA009US NEW	•	•	96VA	5	Circuit Brkr.	•	480/277/240/208/120	24	•	2 Threaded	3.500"	2.500"	3.250"	2.720"	2.000"	1.630"	3.60 lbs.

¹ = Made in USA. Meets "Buy American" of ARRA 2009

FOR MORE TRANSFORMERS, SEE NEXT PAGE.



Enclosed Power Control Centers

- Two 120 Vac grounded convenience outlets
- 4 or 10 Amp switch / circuit breaker
- Outlets can be continuously powered or controlled by the switch / circuit breaker
- True override switch on load side of relay
- Auxiliary outputs are provided for convenient control panel installations

Track Mount Circuit Breaker Switches

- Track mount circuit breaker switches provide a convenient addition to control panels
- Circuits can be low voltage (24 Vac) or line voltage (120 Vac)

Prepackaged Switches

- Standard configurations to provide simple switching schemes
- Labels can be ordered with custom content to fit your project

UPS Interface

- Functional Devices provides a 550 VA commercial UPS along with an enclosure and an interface board, which allows the installer to hardwire line voltage to the provided UPS while giving the ability to hardwire the UPS to the final load.

ENCLOSED POWER CONTROL CENTERS

MODEL #	UL	CONVENIENCE OUTLETS	SWITCH	CIRCUIT BREAKER	NOTES	SPEC PAGE
PSPT2RB4	•	2, 120 Vac	On / Off	4 Amp		134
PSPW2RB4	•	2, 120 Vac	On / Off	4 Amp		134
PSPT2RB10	•	2, 120 Vac	On / Off	10 Amp		134
PSPW2RB10	•	2, 120 Vac	On / Off	10 Amp		134

TRACK MOUNT CIRCUIT BREAKER SWITCHES

MODEL #	UL	POWER INPUT	SWITCH	LED	CIRCUIT BREAKER	NOTES	SPEC PAGE
PSMN01SB4	•	120 Vac	On / Off	•	4 Amp		134
PSMN01SB10	•	120 Vac	On / Off	•	10 Amp		134
PSMN24SB4	•	24 Vac	On / Off	•	4 Amp		134
PSMN24SB10	•	24 Vac	On / Off	•	10 Amp		134

PREPACKAGED SWITCHES

MODEL #	UL	ENCLOSED	TRACK MOUNT	CONVENIENCE OUTLETS	SWITCH	CIRCUIT BREAKER	NOTES	SPEC PAGE
PSMS1	•		•		5 A, Maintained 3 Position			135
SIB02S	•	•			20 A, Maintained 3 Position			135
SIB04S	•	•			20 A, Maintained 2 Position (On / On)			135
SIB05S	•	•			20 A, Maintained 2 Position (On / Off)			135
SIBLS	•	•			5 A, Maintained 3 Position			135

UPS INTERFACE


MODEL #	UL	ENCLOSURE	RELAY OUTPUT (STATUS)	UPS	CIRCUIT BREAKER	120 OUTLET	NOTES	SPEC PAGE
PSH550-UPS (Kit)		•		•	•	•		136
PSH2RB10	•	•			•	•		136
PSM2RB10	•				•	•		137
PSH550-UPS-STAT (Kit)		•	2	•	•	•		137
PSH2C2RB10	•	•	2		•	•		138
PSMN2C2RB10	•		2		•	•		138
PSH850-UPS-STAT (Kit)		•	2	•	•	•		139
PSH2C2RB10-L	•	•	2		•	•		139

UL = UL Listed : UL916 Energy Management; UL Listed Canada

SWITCH / CIRCUIT BREAKER COMBOS


PSPT2RB4

Enclosed Power Control Center, 4 Amp Switch / Circuit Breaker, 120 Vac, 2 Outlets, **Terminals**

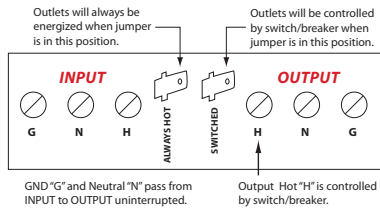


PSPT2RB10

Enclosed Power Control Center, 10 Amp Switch / Circuit Breaker, 120 Vac, 2 Outlets, **Terminals**

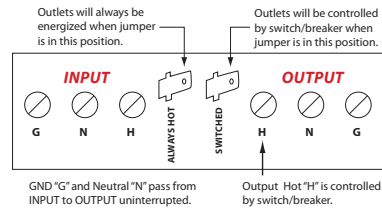



PSPW2RB4

Enclosed Power Control Center, 4 Amp Switch / Circuit Breaker, 120 Vac, 2 Outlets, **Wires**

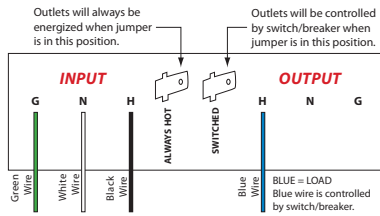

PSPW2RB10

Enclosed Power Control Center, 10 Amp Switch / Circuit Breaker, 120 Vac, 2 Outlets, **Wires**

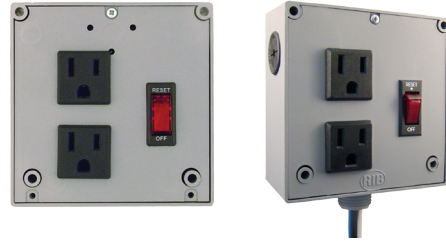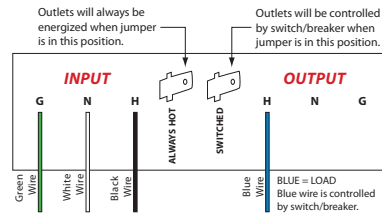

SPECIFICATIONS

Operating

Temperature: -30 to 140° F

Humidity Range: 5 to 95% (noncondensing)

Circuit Breaker: 4 Amp Max. or 10 Amp Max.

Dimensions: 4.000" x 4.000" x 1.800"
(w/ .500" NPT Nipple - PSPW2RB4 & PSPW2RB10)

Wires: 16", 600V Rated (PSPW2RB4 & PSPW2RB10)

Approvals: UL Listed, UL916, C-UL, CE, RoHS

Housing Rating: UL Accepted for Use in Plenum, NEMA 1

Terminals: Ground "G" and Neutral "N" pass from INPUT to OUTPUT uninterrupted.
Output (PSPT2RB4 & PSPT2RB10)
Hot "H" is controlled by the switch/breaker.

Notes:

- Indicator light will illuminate when switch/breaker is ON (RESET position) indicating power has been transferred from INPUT to OUTPUT by the switch/breaker. If it is desired for the indicator light to be illuminated continuously to indicate the presence of input (Line) power, INPUT and OUTPUT may be reversed -- connect input power from line to OUTPUT and connect output load to INPUT (operation of the jumpers above also reverses).

PSP SERIES


Model #	Circuit Breaker	Terminals	Wires
PSPT2RB4	4 Amps	•	
PSPT2RB10	10 Amps	•	
PSPW2RB4	4 Amps		•
PSPW2RB10	10 Amps		•

POWER CONTROL

PREPACKAGED CIRCUIT BREAKER SWITCHES



PSMN01S SERIES

2.75" Track Mount Switch, 2 Position Maintained, On/Off, Circuit Breaker, 120 Vac

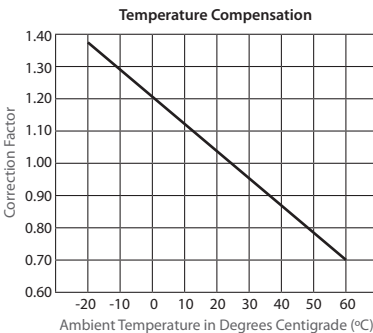

PSMN24S SERIES

2.75" Track Mount Switch, 2 Position Maintained, On/Off, Circuit Breaker, 24 Vac

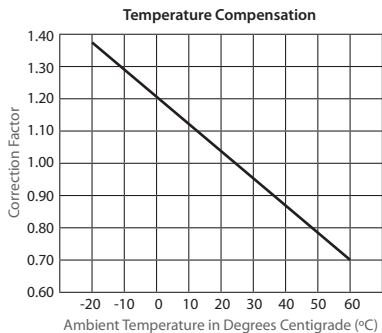

SPECIFICATIONS

Operating Temperature: -30 to 140° F

Humidity Range: 5 to 95% (noncondensing)


Circuit Breaker: 4 Amp and 10 Amp

Dimensions: 2.750" x 1.350" x 2.061"

Track Mount: MT212-2 Mounting Track Provided

Approvals: UL Listed, UL916, C-UL

OVER CURRENT / SHORT CIRCUIT PROTECTION AND SWITCHING

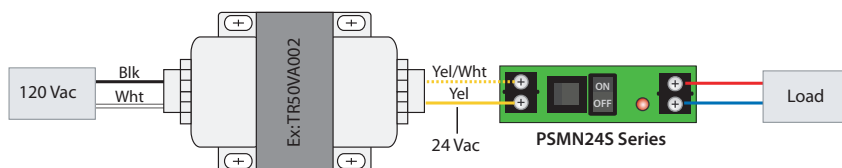

PSMN01S SERIES

Model #	Circuit Breaker
PSMN01SB4	4 Amps
PSMN01SB10	10 Amps


PSMN24S SERIES

Model #	Circuit Breaker
PSMN24SB4	4 Amps
PSMN24SB10	10 Amps

PREPACKAGED SWITCH

PSMS1

4.000" Track Mount Switch 5 Amp, 30 Vac/dc,
3 Position Maintained

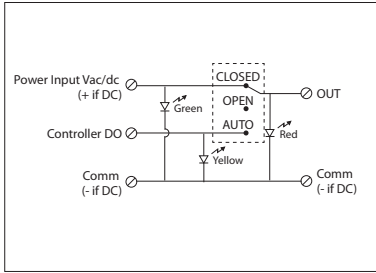


SPECIFICATIONS

- Operating Temperature:** -30 to 140° F
Humidity Range: 5 to 95% (noncondensing)
Dimensions: 1.275" x 4.000" x 1.750"
Track Mount: 4.000", See MT4 Series on page 152
Switch Status: Green LED On = Power Input present
 Yellow LED On = Controller DO ON
 Red LED On = Output Signal ON
Approvals: UL Listed, UL916, C-UL, CE, RoHS
- Switch Ratings:**
 5 Amp @ 30 Vac/dc

PREPACKAGED SWITCHES


SIB02S

Enclosed Switch 20 Amp, 3 Position Maintained,
On/Off/On

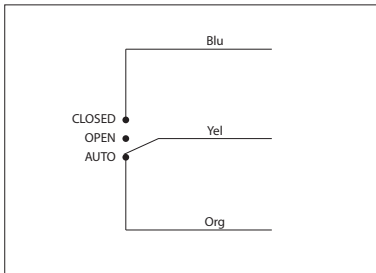


SIB04S

Enclosed Switch 20 Amp, 2 Position Maintained,
On/On, 3 Wires

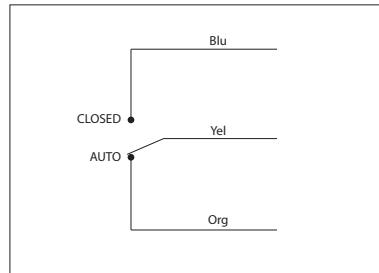



SIB05S

Enclosed Switch 20 Amp, 2 Position Maintained,
On/Off, 2 Wires

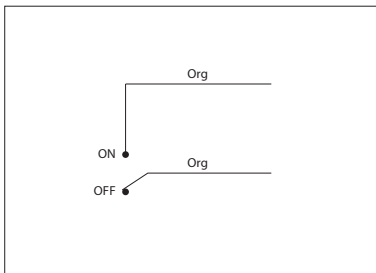

SIBLS

Enclosed Switch 5 Amp, 30 Vac/dc, 3 Position
Maintained, On/Off/On with LED Indicator

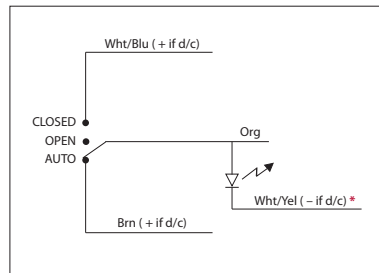

POWER CONTROL

- SIB02S-RD
 - SIB04S-RD
 - SIB05S-RD
 - SIBLS-RD
- Red housing

SPECIFICATIONS

- Operating Temperature:** -30 to 140° F
Humidity Range: 5 to 95% (noncondensing)
Dimensions: 1.700" x 2.800" x 1.500"
 (w/ .500" NPT Nipple)
Wires: 16", 600V Rated
Approvals: UL Listed, UL916, C-UL, CE, RoHS
Housing Rating: UL Accepted for Use in Plenum,
NEMA 1

- SIB02S, SIB04S, RIB05S**
Switch Ratings:
 20 Amp Resistive @ 277 Vac
 1110 VA Pilot Duty @ 277 Vac
 770 VA Pilot Duty @ 120 Vac
 20 Amp Ballast @ 277 Vac
 10 Amp Tungsten @ 120 Vac
 2 HP @ 277 Vac
 1 HP @ 120 Vac


- SIBLS Switch Ratings:**
 5 Amp @ 30 Vac/dc

- Notes:**
- Switch position label can be custom printed according to your needs, simply consult factory
 - Connection to Wht/Yel may be omitted if LED is not needed (SIBLS) *

UNINTERRUPTIBLE POWER SUPPLY KIT

PSH550-UPS

Kit Consisting of Enclosed Power Control Center Model PSH2RB10 (10 Amp Switch / Circuit Breaker, Two (2) 120 Vac Outlets, Terminals, 120 Vac Input) with a 550 VA UPS. (No Status Contacts)

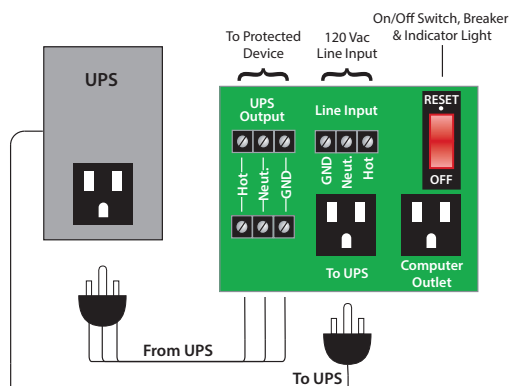

SPECIFICATIONS

UPS

UPS: 550VA

Backup Time: 3 Min. @ Full 550 VA Load
15 Min. @ 1/2 Load

Input: 120 Vac, 12 Amp

Output: 120 Vac, 4.6 Amp

Max Load: 330 Watt

Frequency: 50/60 Hz

Temperature Rating of UPS: 32 to 104° F

UPS Transfer Time: 6ms

Approvals: UL Listed, UL1778

PSH2RB10

Operating Temperature: -30 to 140° F

Humidity Range: 5 to 95% (noncondensing)

Main Breaker ON/OFF: Switch / Breaker (10 Amp)

Approvals: UL Listed, UL916, C-UL, CE, RoHS

Dimensions: 12.000" x 14.000" x 6.000"
Metal Housing with Screw Cover


Shipping Weight:
28 lbs.

Product Weight:
22.5 lbs.

Notes:

- To order without UPS, so that any other commercial UPS with appropriate ratings and within housing space limitations may be used, see model PSH2RB10.
- To order interface board for replacement or for separate use, order model PSM2RB10.
- Average battery life: 3-5 years depending on the number of discharge cycles and environmental temperature

ESTIMATED BACKUP TIME VS. LOAD

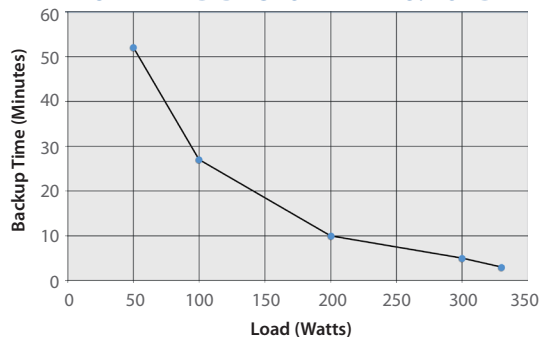


POWER CONTROL

ENCLOSED UPS INTERFACE MODULE

PSH2RB10

Enclosed 4.00" Track Mount Power Control Center, 10 Amp Switch / Circuit Breaker, Two (2) 120 Vac Outlets, Terminals, 120 Vac Input. (No Status Contacts)

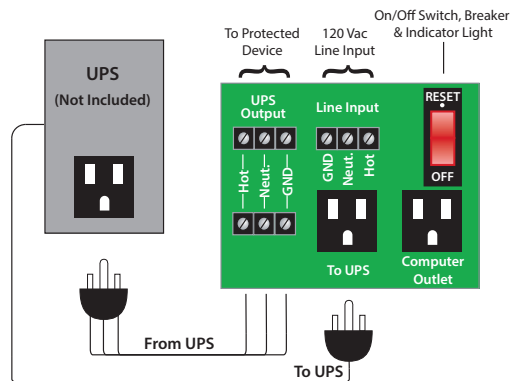

SPECIFICATIONS

Operating Temperature: -30 to 140° F

Humidity Range: 5 to 95% (noncondensing)

Main Breaker ON/OFF: Switch / Breaker (10 Amp)

Approvals: UL Listed, UL916, C-UL, CE, RoHS

Dimensions: 12.000" x 14.000" x 6.000"

Metal Housing with Screw Cover

Weight: 13.10 lbs.


Notes:

- Track mounted interface board may be ordered separately as model PSM2RB10, to be used with any commercial UPS with appropriate ratings for the circuit breaker.
- Circuit breaker for short protection.
- 14/3 Line Cord included (3').
- Use with UPS devices rated 1000 VA or less.
 - Max. size: 12.000" x 7.250" x 5.500"
 - 120 Vac max., 600 W max., 8.3 Amp max.
- UPS is not included.


UPS INTERFACE MODULE

PSM2RB10

4.00" Track Mount Power Control Center, with 10 Amp Switch / Circuit Breaker, Two (2) 120 Vac Outlets, Terminals, 120 Vac Input. **(No Status Contacts)**

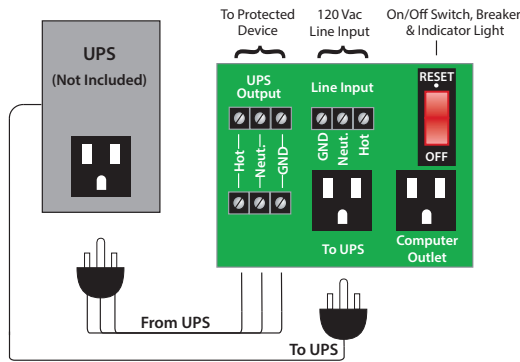

**BUY SEPARATELY
AND PLACE IN
AN ENCLOSURE
OF YOUR CHOICE**

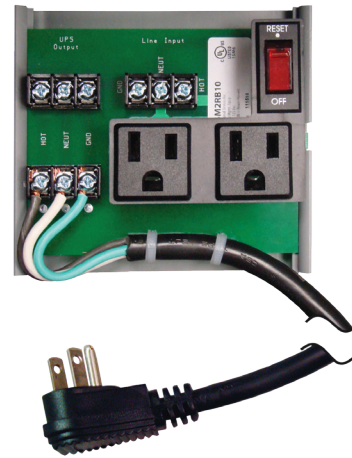

Made in USA
Meets
"Buy American"
of ARRA 2009

SPECIFICATIONS

Operating Temperature: -30 to 140° F

Humidity Range: 5 to 95% (noncondensing)

Main Breaker ON/OFF: Switch / Breaker (10 Amp)

Dimensions: 4.000" x 3.250" x 1.750"

Track Mount: 3.250" x 4.000"

MT4-4N Mounting Track Included

Approvals: UL Listed, UL916, C-UL, CE, RoHS


Notes:

- Circuit breaker for short protection.
- 14/3 Line Cord included (3').
- Use with UPS devices rated 1000 VA or less.
- UPS is not included.


UNINTERRUPTIBLE POWER SUPPLY IN KIT

PSH550-UPS-STAT

Kit Consisting of Enclosed Power Control Center Model PSH2C2RB10 (10 Amp Switch / Circuit Breaker, Two (2) 120 Vac Outlets, Terminals, 120 Vac Input) with a 550 VA UPS. **(Status Contacts)**

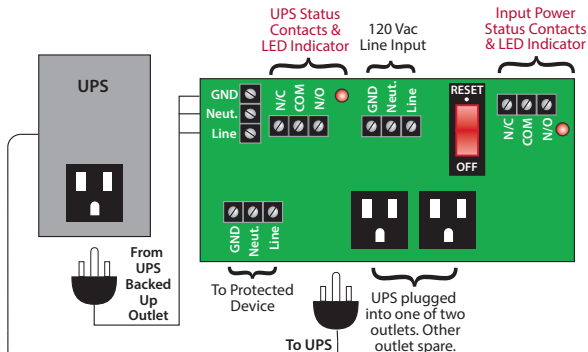

Shown
Without
Cover

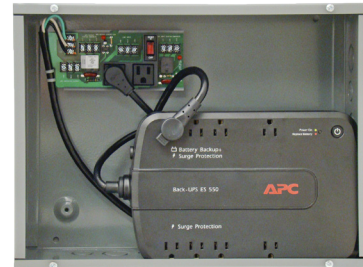

Shown
With
Cover



Made in USA
Meets
"Buy American"
of ARRA 2009

**POWER
CONTROL**

SPECIFICATIONS

UPS

UPS: 550VA

Backup Time: 3 Min. @ Full 550 VA Load
15 Min. @ 1/2 Load

Input: 120 Vac, 12 Amp

Output: 120 Vac, 4.6 Amp

Max Load: 330 Watt

Frequency: 50/60 Hz

Temperature Rating of UPS: 32 to 104° F

UPS Transfer Time: 6ms

Approvals: UL Listed, UL1778

Weight: 12 lbs.

PSH2C2RB10

Operating Temperature: -30 to 140° F

Humidity Range: 5 to 95% (noncondensing)

Main Breaker ON/OFF: Switch / Breaker (10 Amp)

Approvals: UL Listed, UL916, C-UL,
CE, RoHS

Dimensions: 12.000" x 16.000" x 6.000"
Metal Housing with
Screw Cover

Line Input Status Contacts and UPS


Output Status Contacts Rated:

- 10 Amp @ 277 Vac General Use
- 10 Amp @ 30 Vdc (N/O)
- 7 Amp @ 30 Vdc (N/C)
- 1/2 HP @ 125 Vac
- 1/4 HP @ 277 Vac
- 1000 VA @ 120 Vac Magnetic Ballast (N/C)
- C300 Pilot Duty
- 16.8 VA @ 24 Vac Pilot Duty

Notes:

- To order without UPS, so that any other commercial UPS with appropriate ratings and within housing space limitations may be used, see model PSH2C2RB10.
- To order interface board for replacement or for separate use, order model PSMN2C2RB10.
- **Average battery life: 3-5 years** depending on the number of discharge cycles and environmental temperature


ESTIMATED BACKUP TIME VS. LOAD

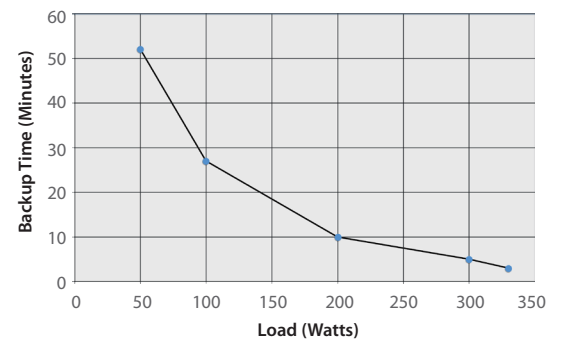


ENCLOSED UPS INTERFACE MODULE

PSH2C2RB10

Enclosed 2.75" Track Mount Power Control Center, with 10 Amp Switch / Circuit Breaker, Two (2) 120 Vac Outlets, Terminals, 120 Vac Input. (Status Contacts)

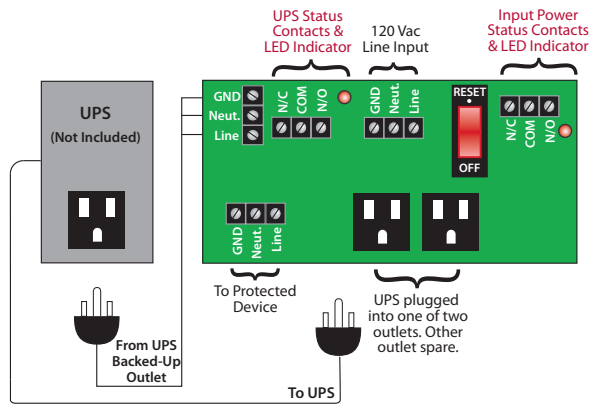

Shown Without Cover



Shown With Cover



SPECIFICATIONS

Operating Temperature: -30 to 140° F

Humidity Range: 5 to 95% (noncondensing)

Main Breaker ON/OFF: Switch / Breaker (10 Amp)
UL Listed, UL916, C-UL, CE, RoHS

Approvals: UL Listed, UL916, C-UL, CE, RoHS
Dimensions: 12.000" x 16.000" x 6.000"
Metal Housing with Screw Cover

Weight: 14.14 lbs.

Line Input Status Contacts and UPS

Output Status Contacts Rated:
10 Amp @ 277 Vac General Use
10 Amp @ 30 Vdc N/O
7 Amp @ 30 Vdc N/C
1/2 HP @ 125 Vac
1/4 HP @ 277 Vac
100 VA @ 120 Vac Ballast N/C
C300 Pilot Duty
16.8 VA @ 24 Vac Pilot Duty



Notes:

- Track mounted interface board may be ordered separately as model PSMN2C2RB10, to be used with any commercial UPS with appropriate ratings for the circuit breaker.
- Circuit breaker for short-circuit protection.
- 14/3 Line Cord included (3').
- Use with UPS devices rated 1000 VA or less.
 - Max. size: 8.000" x 16.000" x 5.500"
 - 120 Vac max., 600 W max., 8.3 Amp max.
- UPS is not included.

UPS INTERFACE MODULE

PSMN2C2RB10

2.75" Track Mount Power Control Center, with 10 Amp Switch / Circuit Breaker, Two (2) 120 Vac Outlets, Terminals, 120 Vac Input. (Status Contacts)

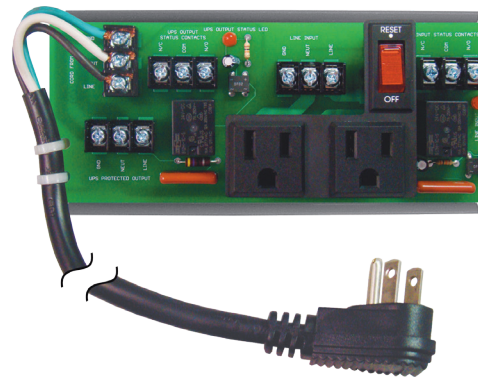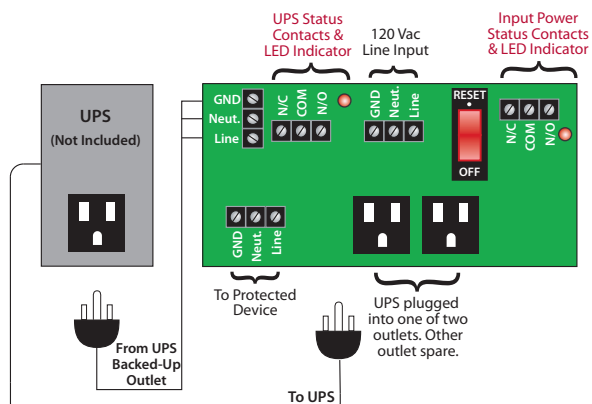

BUY SEPARATELY AND PLACE IN AN ENCLOSURE OF YOUR CHOICE

SPECIFICATIONS

Operating Temperature: -30 to 140° F

Humidity Range: 5 to 95% (noncondensing)

Main Breaker ON/OFF: Switch / Breaker (10 Amp)

Dimensions: 2.750" x 6.655" x 1.750"
Track Mount: 2.750" x 6.000"
MT212-6N Mounting Track Included

Approvals: UL Listed, UL916, C-UL, CE, RoHS

Line Input Status Contacts and UPS

Output Status Contacts Rated:
10 Amp @ 277 Vac General Use
10 Amp @ 30 Vdc N/O
7 Amp @ 30 Vdc N/C
1/2 HP @ 125 Vac
1/4 HP @ 277 Vac
100 VA @ 120 Vac Ballast N/C
C300 Pilot Duty
16.8 VA @ 24 Vac Pilot Duty


Notes:

- Circuit breaker for short-circuit protection.
- 14/3 Line Cord included (3').
- Use with UPS devices rated 1000 VA or less.
- UPS is not included.

UNINTERRUPTIBLE POWER SUPPLY IN KIT

PSH850-UPS-STAT

Kit Consisting of Enclosed Power Control Center Model PSH2C2RB10-L (10 Amp Switch / Circuit Breaker, Two (2) 120 Vac Outlets, Terminals, 120 Vac Input) with a 850 VA UPS. (Status Contacts)

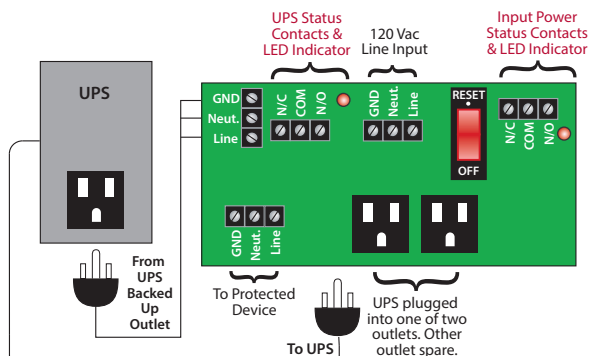

**SINUSOIDAL
OUTPUT OR
PURE SINE
WAVE OUTPUT**




SPECIFICATIONS

- UPS**
 UPS: 850VA
 Backup Time: 2 Min. @ Full 850 VA Load
 8 Min. @ 1/2 Load
 Input: 120 Vac, 12 Amp
 Sine Wave Output: 120 Vac, 7.1 Amp
 Max Load: 510 Watt
 Frequency: 50/60 Hz
 Temperature Rating of UPS: 32 to 95° F
 UPS Transfer Time: 10ms
 Approvals: UL Listed, UL1778
 Weight: 15 lbs.
 Model: Cyber Power Model 850PFCLCD
PSH2C2RB10-L
 Operating Temperature: -30 to 140° F
 Humidity Range: 5 to 95% (noncondensing)
 Main Breaker ON/OFF: Switch / Breaker (10 Amp)
 Approvals: UL Listed, UL916, C-UL, CE, RoHS
 Dimensions: 14.000" x 16.000" x 6.000"
 Metal Housing with Screw Cover

- Line Input Status Contacts and UPS Output Status Contacts Rated:**
 10 Amp @ 277 Vac General Use
 10 Amp @ 30 Vdc (N/O)
 7 Amp @ 30 Vdc (N/C)
 1/2 HP @ 125 Vac
 1/4 HP @ 277 Vac
 1000 VA @ 120 Vac Magnetic Ballast (N/C)
 C300 Pilot Duty
 16.8 VA @ 24 Vac Pilot Duty

- Notes:**
 • To order without UPS, so that any other commercial UPS with appropriate ratings and within housing space limitations may be used, see model PSH2C2RB10-L.
 • To order interface board for replacement or for separate use, order model PSMN2C2RB10.
 • Typical battery life: 3-6 years, depending on number of discharge/recharge cycles

ESTIMATED BACKUP TIME VS. LOAD

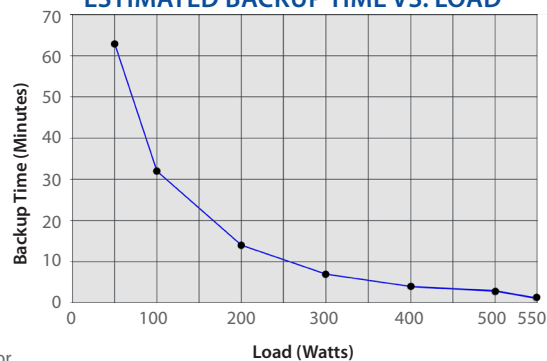


**POWER
CONTROL**

ENCLOSED UPS INTERFACE MODULE

PSH2C2RB10-L

Enclosed 2.75" Track Mount Power Control Center, with 10 Amp Switch / Circuit Breaker, Two (2) 120 Vac Outlets, Terminals, 120 Vac Input. (Status Contacts)

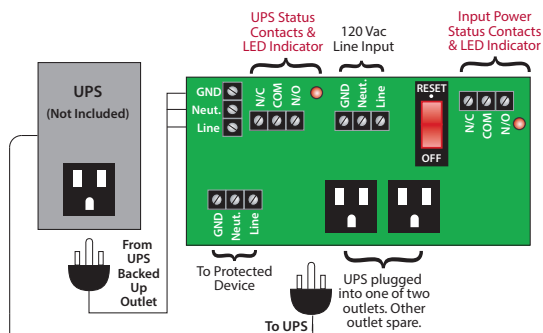

SPECIFICATIONS

- Operating Temperature: -30 to 140° F
 Humidity Range: 5 to 95% (noncondensing)
 Main Breaker ON/OFF: Switch / Breaker (10 Amp)
 Approvals: UL Listed, UL916, C-UL, CE, RoHS
 Dimensions: 14.000" x 16.000" x 6.000"
 Metal Housing with Screw Cover
 Weight: 14.76 lbs.

- Line Input Status Contacts and UPS Output Status Contacts Rated:**
 10 Amp @ 277 Vac General Use
 10 Amp @ 30 Vdc N/O
 7 Amp @ 30 Vdc N/C
 1/2 HP @ 125 Vac
 1/4 HP @ 277 Vac
 1000 VA @ 120 Vac Magnetic Ballast N/C
 C300 Pilot Duty
 16.8 VA @ 24 Vac Pilot Duty

- Notes:**
 • Track mounted interface board may be ordered separately as model PSMN2C2RB10, to be used with any commercial UPS with appropriate ratings for the circuit breaker.
 • Circuit breaker for short-circuit protection.
 • 14/3 Line Cord included (3').
 • Use with UPS devices rated 1000 VA or less.
 • Max. size: 14.000" x 10.000" x 5.500"
 • 120 Vac, 600 W max., 8.3 Amp max.
 • UPS is not included.
 • To order a kit with a UPS, see PSH850-UPS-STAT.

ENCLOSURES

Plastic | Metal



Made in the U.S.A.
Meets the "Buy American" provisions of Section 1605 of the American Recovery and Reinvestment Act of 2009 (ARRA).

NEMA 1 and NEMA 4 Metal & Plastic Enclosures

- All enclosures are NEMA 1 or NEMA 4 rated and are UL Listed. Smaller enclosures have an abundance of knockouts and metal enclosures are stackable vertically and horizontally. Available in a variety of sizes, these enclosures provide many useful features. Small metal enclosure sizes have screw covers and the larger sizes are equipped with key-lock latch doors, most of which are full-hinge.

ENCLOSURES





MODEL #	UL	NEMA RATING	COVER / DOOR	HEIGHT	WIDTH	DEPTH	GAUGE	NOTES	SPEC PAGE
PE6000 Series	•	NEMA 1 / NEMA 4/4X	Screw Down Cover	4.28"	7.00"	2.00"			141
MH1000 Series	•	NEMA 1	Screw Down Cover	14.50"	7.70"	3.90"	18		142
MH1200 Series	•	NEMA 1	Screw Down Cover	8.30"	7.70"	3.90"	18		142
MH2204-N4	•	NEMA 4/4X	Hinge Key Latch Door	9.84"	7.87"	3.98"	16		142
MH3100-M1	•	NEMA 1	Screw Down Cover	12.00"	12.00"	6.00"	16		143
MH3204-N4	•	NEMA 4/4X	Hinge Key Latch Door	15.75"	11.81"	5.91"	16		143
MH3300 Series	•	NEMA 1	Vertical Lift Screw Down Cover	12.50"	12.50"	7.00"	18		143
MH3500 Series	•	NEMA 1	Reversible Hook Hinge Key Latch Door	24.50"	10.25"	3.90"	18		144
MH3800 Series	•	NEMA 1	Reversible Hook Hinge Key Latch Door	24.50"	12.50"	6.50"	18		144
MH4400 Series	•	NEMA 1	Full Hinge Key Latch Door	18.00"	18.00"	7.00"	16		144
MH5500 Series	•	NEMA 1	Full Hinge Key Latch Door	25.00"	25.00"	9.50"	14		145
MH5800 Series	•	NEMA 1	Full Hinge Key Latch Door	36.00"	25.00"	9.50"	14		145

UL = UL Listed : UL916 Energy Management ; USA & Canada

ENCLOSURE

PE6000 Series

Plastic Housing, .75" NPT Nipple, 4.28" H x 7.00" W x 2.00" D

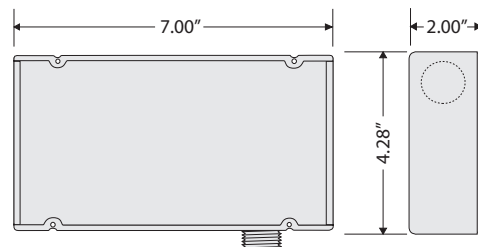

PE6000 SERIES ASSEMBLIES				
Model #	Enclosure	Plastic Snap Track	NEMA Type	Weight
PE6000	PE6000		NEMA 1	.656 lbs.
PE6010	PE6000	MT4-4 (4.00"W)	NEMA 1	.717 lbs.
PE6020	PE6000	MT212-6 (2.75"W)	NEMA 1	.769 lbs.
PE6000-N4	PE6000-N4		NEMA 4/4X	.656 lbs.
PE6010-N4	PE6000-N4	MT4-4 (4.00"W)	NEMA 4/4X	.717 lbs.
PE6020-N4	PE6000-N4	MT212-6 (2.75"W)	NEMA 4/4X	.769 lbs.

SPECIFICATIONS


Cover Type: Screw Down Cover
Approvals: UL Listed, C-UL, CE Approved, RoHS
Housing Rating: UL Accepted for Use in Plenum, NEMA 1, Also available NEMA 4 / 4X

Notes:
 • Comes with transparent lid. To order with gray opaque lid, add "-GY" to end of model number.

ENCLOSURE

MH1000 Series

Metal Housing, NEMA 1, 14.50" H x 7.70" W x 3.90" D

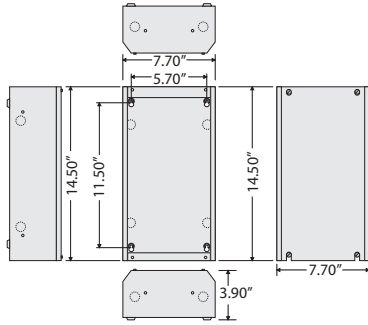

MH1000 SERIES ASSEMBLIES

Model #	Enclosure	Plastic Snap Track	Weight
MH1000	MH1000		6.00 lbs.
MH1010	MH1000	MT4-12 (4.00" W)	6.30 lbs.
MH1020	MH1000	MT212-12 (2.75" W)	6.25 lbs.



SPECIFICATIONS

Construction: 18 Gauge Steel

Cover Type: Screw Down Cover

Approvals: UL Listed, C-UL, CE Approved, RoHS


Notes:

• Consult factory for custom colors for large orders.

ENCLOSURE

MH1200 Series

Metal Housing, NEMA 1, 8.30" H x 7.70" W x 3.90" D

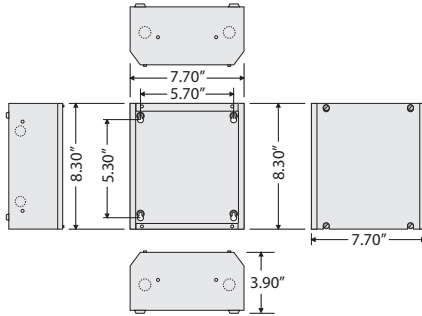

MH1200 SERIES ASSEMBLIES

Model #	Enclosure	Plastic Snap Track	Weight
MH1200	MH1200		3.86 lbs.
MH1210	MH1200	MT4-8 (4.00" W)	4.06 lbs.
MH1220	MH1200	MT212-8 (2.75" W)	4.00 lbs.



SPECIFICATIONS

Construction: 18 Gauge Steel

Cover Type: Screw Down Cover

Approvals: UL Listed, C-UL, CE Approved, RoHS

Notes:


• Consult factory for custom colors for large orders.

ENCLOSURES

ENCLOSURE

MH2204-N4

Metal Housing, NEMA 4/4X, 9.84" H x 7.87" W x 3.98" D

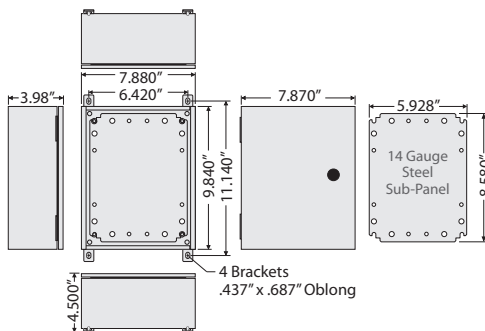

SPECIFICATIONS

Construction: 16 Gauge Steel

Weight: 7.70 lbs.


Cover Type: Hinge Key Latch Door

Approvals: UL Listed, C-UL, CE Approved, RoHS

ENCLOSURE

MH3100-M1

Metal Housing, NEMA 1, 12.00" H x 12.00" W x 6.00" D, Mounting Option 1

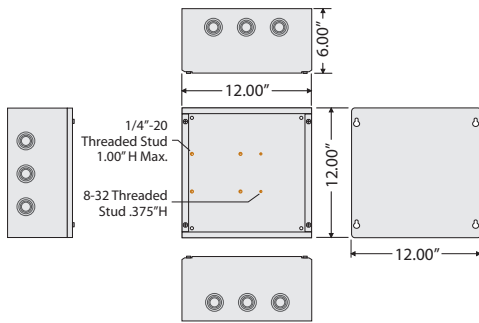

MH3100-M1 ASSEMBLY		
Model #	Enclosure	Plastic Snap Track
MH3100-M1 *	MH3100	6 Threaded Studs

* MH3100-M1 + PSMN500A = PSH500A
 MH3100-M1 + PSMN300A = PSH300A



SPECIFICATIONS

Construction: 16 Gauge Steel

Weight: 12 lbs.

Cover Type: Screw Down Cover

Approvals: UL Listed, C-UL, CE Approved, RoHS


Notes:

- To convert panel-mounted power supply to enclosed, simply remove the sub-panel and mount to enclosure with provided screw pack. *

ENCLOSURE

MH3204-N4

Metal Housing, NEMA 4/4X, 15.75" H x 11.81" W x 5.91" D

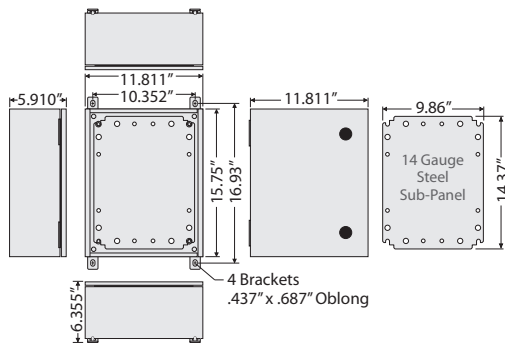

SPECIFICATIONS

Construction: 16 Gauge Steel

Weight: 17 lbs.


Cover Type: Hinge Key Latch Door

Approvals: UL Listed, C-UL, CE Approved, RoHS

ENCLOSURE

MH3300 Series

Metal Housing, NEMA 1, 12.50" H x 12.50" W x 7.00" D

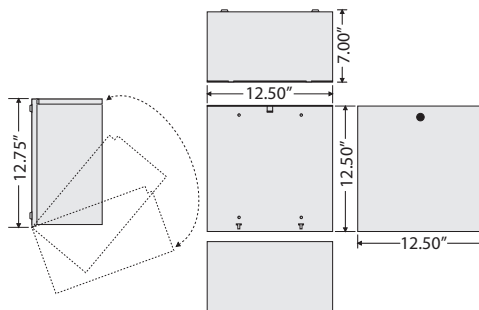

MH3300 SERIES ASSEMBLIES				
Model #	Enclosure	Cover Type	Sub-Panel	Weight
MH3300	MH3300	Vertical Lift Screw Down		10.5 lbs.
MH3300K	MH3300K	Vertical Lift Key Latch		10.7 lbs.
MH3303	MH3300	Vertical Lift Screw Down	SP3303 ¹	11.8 lbs.
MH3304	MH3300	Vertical Lift Screw Down	SP3304 ²	11.8 lbs.
MH3303K	MH3300K	Vertical Lift Key Latch	SP3303 ¹	12.5 lbs.
MH3304K	MH3300K	Vertical Lift Key Latch	SP3304 ²	12.5 lbs.

¹ = Polymetal
 11.33" H x 11.40" W

² = Perforated Steel
 11.33" H x 11.40" W



SPECIFICATIONS

Construction: 18 Gauge Steel

Approvals: UL Listed, C-UL, CE Approved, RoHS

Notes:


- Consult factory for custom colors for large orders.

ENCLOSURES

ENCLOSURE

MH3500 Series

Metal Housing, NEMA 1, 24.50" H x 10.25" W x 3.90" D

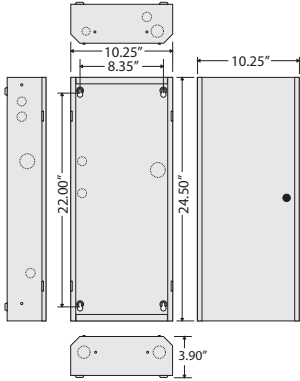

MH3500 SERIES ASSEMBLIES			
Model #	Enclosure	Plastic Snap Track	Weight
MH3500	MH3500		11.1 lbs.
MH3510	MH3500	MT4-24 (4.00" W)	11.7 lbs.
MH3520	MH3500	MT212-24 (2.75" W)	11.5 lbs.



SPECIFICATIONS

Construction: 18 Gauge Steel

Cover Type: Reversible Hook Hinge Key Latch Door

Approvals: UL Listed, C-UL, CE Approved, RoHS


Notes:

- Consult factory for custom colors for large orders.
- Order with coin latch by adding "-L4" to end of model number.

ENCLOSURE

MH3800 Series

Metal Housing, NEMA 1, 24.50" H x 12.50" W x 6.50" D

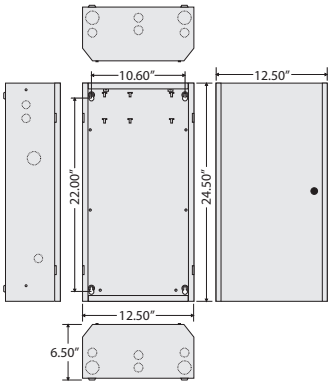

MH3800 SERIES ASSEMBLIES			
Model #	Enclosure	Plastic Snap Track / Sub-Panel	Weight
MH3800	MH3800		16.6 lbs.
MH3810	MH3800	MT4-18 (4.00" W)	16.9 lbs.
MH3820	MH3800	MT212-18 (2.75" W)	16.8 lbs.
MH3803S	MH3800	SP3803S ¹	18.1 lbs.
MH3803L	MH3800	SP3803L ¹	18.5 lbs.
MH3804S	MH3800	SP3804S ²	19.9 lbs.
MH3804L	MH3800	SP3804L ²	20.3 lbs.

1 = Polymetal

Model S: 19.00" H x 11.75" W
Model L: 23.00" H x 11.75" W

2 = Perforated Steel

Model S: 19.00" H x 11.75" W
Model L: 23.00" H x 11.75" W



SPECIFICATIONS

Construction: 18 Gauge Steel

Cover Type: Reversible Hook Hinge Key Latch Door

Approvals: UL Listed, C-UL, CE Approved, RoHS


Notes:

- Consult factory for custom colors for large orders.
- Order with coin latch by adding "-L4" to end of model number.

ENCLOSURE

MH4400 Series

Metal Housing, NEMA 1, 18.00" H x 18.00" W x 7.00" D

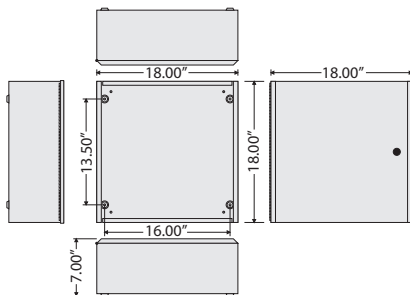

MH4400 SERIES ASSEMBLIES			
Model #	Enclosure	Sub-Panel	Weight
MH4400	MH4400		22.5 lbs.
MH4403L	MH4400	SP4403L ¹	24.7 lbs.
MH4404L	MH4400	SP4404L ²	26.3 lbs.

1 = Polymetal

16.875" H x 15.75" W

2 = Perforated Steel

16.875" H x 15.75" W



SPECIFICATIONS

Construction: 16 Gauge Steel

Cover Type: Full Hinge Key Latch Door

Approvals: UL Listed, C-UL, CE Approved, RoHS


Notes:

- Consult factory for custom colors for large orders.
- Order with coin latch by adding "-L4" to end of model number.

ENCLOSURE

MH5500 Series

Metal Housing, NEMA 1, 25.00" H x 25.00" W x 9.50" D

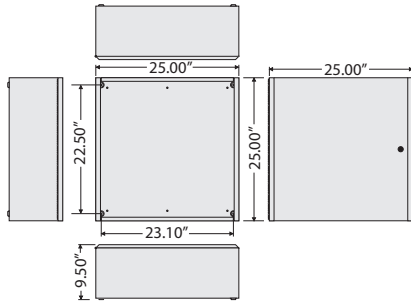

MH5500 SERIES ASSEMBLIES			
Model #	Enclosure	Sub-Panel	Weight
MH5500	MH5500		50.7 lbs.
MH5503L	MH5500	SP5503L ¹	56.4 lbs.
MH5504L	MH5500	SP5504L ²	60.0 lbs.

¹ = Polymetal

23.00" H x 22.50" W

² = Perforated Steel

23.00" H x 22.50" W



SPECIFICATIONS

Construction: 14 Gauge Steel

Cover Type: Full Hinge Key Latch Door

Approvals: UL Listed, C-UL, CE Approved, RoHS


Notes:

- Consult factory for custom colors for large orders.
- Order with coin latch by adding "-L4" to end of model number.

ENCLOSURE

MH5800 Series

Metal Housing, NEMA 1, 36.00" H x 25.00" W x 9.50" D

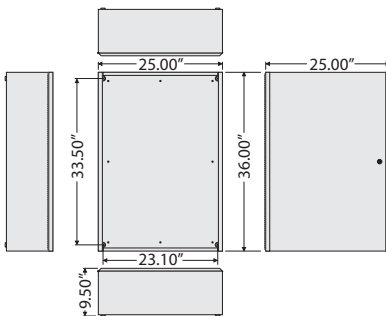

MH5800 SERIES ASSEMBLIES			
Model #	Enclosure	Sub-Panel	Weight
MH5800	MH5800		68.5 lbs.
MH5803L	MH5800	SP5803L ¹	74.2 lbs.
MH5804L	MH5800	SP5804L ²	80.8 lbs.

¹ = Polymetal

34.125" H x 22.50" W

² = Perforated Steel

34.125" H x 22.50" W



SPECIFICATIONS

Construction: 14 Gauge Steel

Cover Type: Full Hinge Key Latch Door

Approvals: UL Listed, C-UL, CE Approved, RoHS

Notes:

- Consult factory for custom colors for large orders.
- Order with coin latch by adding "-L4" to end of model number.

ACCESSORIES

Sub-Panels | Mounting Supplies | Replacement Parts



Made in the U.S.A.
Meets the "Buy American" provisions of Section 1605 of the American Recovery and Reinvestment Act of 2009 (ARRA).

Sub-Panels

- Two types of sub-panel material are available - polymetal and perforated steel. Both the polymetal and perforated steel sub-panels are Plenum Rated and designed to mount in model "MH" metal housings and the mounting holes are pre-drilled, ready to install. Sub-panels can be ordered pre-installed in your choice of "MH" enclosures. See the general specifications for pre-assembled enclosure kit model numbers.

Replacement Parts

- Replacement parts are available for several products including remote sensors, enclosures, and more.

Mounting Supplies

- Mounting options include plastic track for snap-mounting circuit boards. One style of track can be mounted to the back surface of any cabinet and is available in 4.00" or 2.75" widths. Another style of track, AdapTrack®, snaps onto any of the three most popular DIN rails. In turn, it can accommodate a 4.00" wide circuit board.

SUB-PANELS

MODEL #	USE WITH ENCLOSURE	MATERIAL	HEIGHT	WIDTH	THICKNESS	MOUNTING AREA	WEIGHT	NOTES	SPEC PAGE
SP3303	MH3300 or MH3300K	Polymetal	11.330"	11.400"	.130"	129.16" square	.932 lbs.		148
SP3304	MH3300 or MH3300K	Perforated Steel	11.330"	11.400"	.250"	129.16" square	1.662 lbs.		148
SP3803S	MH3800	Polymetal	19.000"	11.750"	.130"	223.25" square	1.705 lbs.		148
SP3803L	MH3800	Polymetal	23.000"	11.750"	.130"	270.25" square	2.140 lbs.		149
SP3804S	MH3800	Perforated Steel	19.000"	11.750"	.250"	223.25" square	2.940 lbs.		149
SP3804L	MH3800	Perforated Steel	23.000"	11.750"	.250"	270.25" square	3.520 lbs.		149
SP4403L	MH4400	Polymetal	16.875"	15.750"	.130"	265.78" square	2.100 lbs.		150
SP4404L	MH4400	Perforated Steel	16.875"	15.750"	.250"	265.78" square	3.520 lbs.		150
SP5503L	MH5500	Polymetal	23.000"	22.500"	.130"	517.50" square	3.940 lbs.		150
SP5504L	MH5500	Perforated Steel	23.000"	22.500"	.250"	517.50" square	6.560 lbs.		151
SP5803L	MH5800	Polymetal	34.125"	22.500"	.130"	767.81" square	5.875 lbs.		151
SP5804L	MH5800	Perforated Steel	34.125"	22.500"	.250"	767.81" square	9.720 lbs.		151

MOUNTING SUPPLIES

MODEL #	DESCRIPTION	NOTES	SPEC PAGE
MT212 Series	• 2.75" wide screw mounted snap-in track for mounting relays, current sensors and power supplies		152
MT4 Series	• 4.00" wide screw mounted snap-in track for mounting relays, current sensors and power supplies		152
AT4 Series	• 4.00" wide AdapTrack® for DIN rail mounting relays, current sensors and power supplies		152
DS8062	Self-tapping 5/8" drill screws for mounting devices to all polymetal sub-panels	1	153

REPLACEMENT PARTS

MODEL #	DESCRIPTION	NOTES	SPEC PAGE
MKL Series	Locking latch assemblies for use with Functional Devices metal enclosures	1	153
KEYSET	One set of 2 keys for use with any of the key latch metal enclosures	1	153
AXK	Remote mini current sensor assembly (Wire Output)		153
AXKT	Remote mini current sensor assembly (Terminal Output)		153
AXG	Split ring remote current sensor assembly (Wire Output)		153
AXGT	Split ring remote current sensor assembly (Terminal Output)		153
AXR	Remote current sensor assembly (Wire Output)		153
TS-AN	Pluggable terminal strips for RIBAN Series		153
APS53-TC	Primary voltage terminal cover for use with 300 VA and 500 VA power supplies		153


= UL Component Recognized ; USA & Canada

1 = Does not meet "Buy American" of ARRA 2009

SUB-PANEL

SP3303

Polymetal Sub-Panel, 11.330" H x 11.400" W x .130" Thick



SPECIFICATIONS

Mounting Area: 129.16" square
Weight: .932 lbs.
Approvals: Plenum Rated



Enclosure Assemblies: MH3303
MH3300 Enclosure with SP3303
Sub-Panel pre-mounted

MH3303K
MH3300K Enclosure with SP3303
Sub-Panel pre-mounted

SUB-PANEL

SP3304

Perforated Steel Sub-Panel, 11.330" H x 11.400" W x .250" Thick

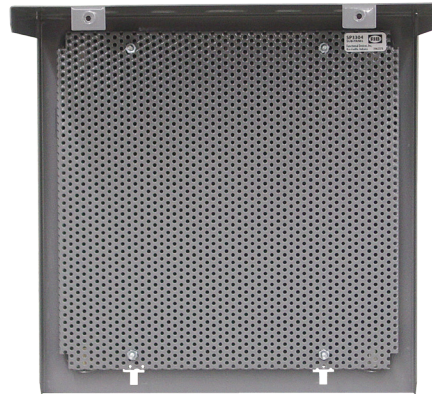

SPECIFICATIONS

Mounting Area: 129.16" square
Weight: 1.662 lbs.
Approvals: Plenum Rated


Enclosure Assemblies: MH3304
MH3300 Enclosure with SP3304
Sub-Panel pre-mounted

MH3304K
MH3300K Enclosure with SP3304
Sub-Panel pre-mounted

SUB-PANEL

SP3803S

Polymetal Sub-Panel, 19.000" H x 11.750" W x .130" Thick

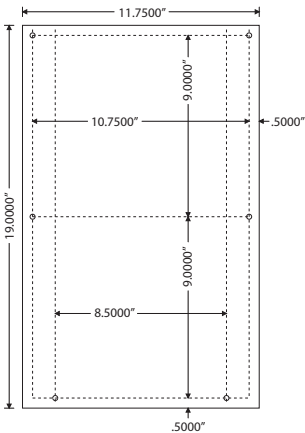

SPECIFICATIONS


Mounting Area: 223.25" square
Weight: 1.705 lbs.
Approvals: Plenum Rated

Enclosure Assemblies: MH3803S
MH3800 Enclosure with SP3803S
Sub-Panel pre-mounted

SUB-PANEL

SP3804S

Perforated Steel Sub-Panel, 19.000" H x 11.750" W x .250" Thick

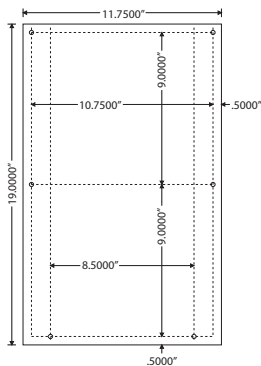

SPECIFICATIONS


Mounting Area: 223.25" square
Weight: 2.94 lbs.
Approvals: Plenum Rated

Enclosure Assemblies: MH3804S
MH3800 Enclosure with SP3804S
Sub-Panel pre-mounted

SUB-PANEL

SP3803L

Polymetal Sub-Panel, 23.000" H x 11.750" W x .130" Thick

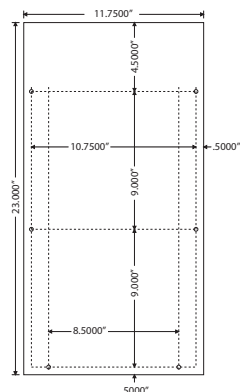

SPECIFICATIONS



Mounting Area: 270.25" square
Weight: 2.14 lbs.
Approvals: Plenum Rated

Enclosure Assemblies: MH3803L
MH3800 Enclosure with SP3803L
Sub-Panel pre-mounted

SUB-PANEL

SP3804L

Perforated Steel Sub-Panel, 23.000" H x 11.750" W x .250" Thick

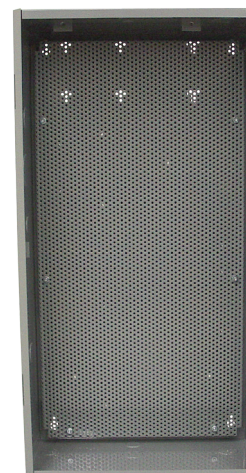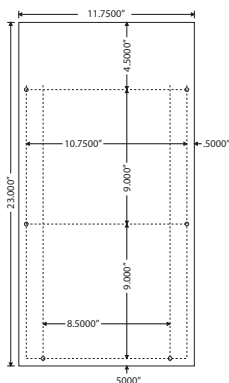

SPECIFICATIONS

Mounting Area: 270.25" square
Weight: 3.52 lbs.
Approvals: Plenum Rated



Enclosure Assemblies: MH3804L
MH3800 Enclosure with SP3804L
Sub-Panel pre-mounted

ACCESSORIES

SUB-PANEL

SP4403L

Polymetal Sub-Panel, 16.875" H x 15.750" W x .130" Thick

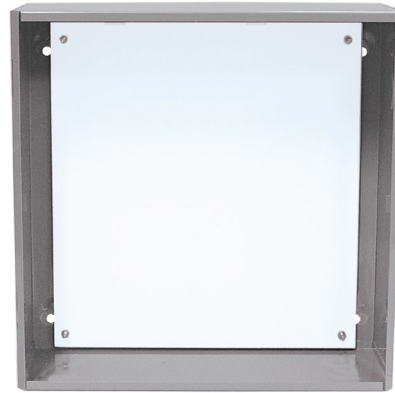

SPECIFICATIONS

Mounting Area: 265.78" square

Weight: 2.10 lbs.

Approvals: Plenum Rated

Enclosure Assemblies: [MH4403L](#)


MH4400 Enclosure with SP4403L

Sub-Panel pre-mounted

SUB-PANEL

SP4404L

Perforated Steel Sub-Panel, 16.875" H x 15.750" W x .250" Thick



SPECIFICATIONS

Mounting Area: 265.78" square

Weight: 3.52 lbs.

Approvals: Plenum Rated

Enclosure Assemblies: [MH4404L](#)


MH4400 Enclosure with SP4404L

Sub-Panel pre-mounted

SUB-PANEL

SP5503L

Polymetal Sub-Panel, 23.000" H x 22.500" W x .130" Thick

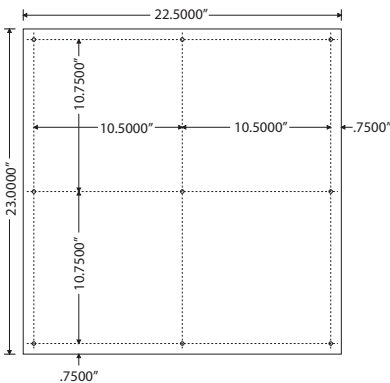

SPECIFICATIONS

Mounting Area: 517.50" square

Weight: 3.94 lbs.

Approvals: Plenum Rated

Enclosure Assemblies: [MH5503L](#)


MH5500 Enclosure with SP5503L

Sub-Panel pre-mounted

SUB-PANEL

SP5504L

Perforated Steel Sub-Panel, 23.000" H x 22.500" W x .250" Thick

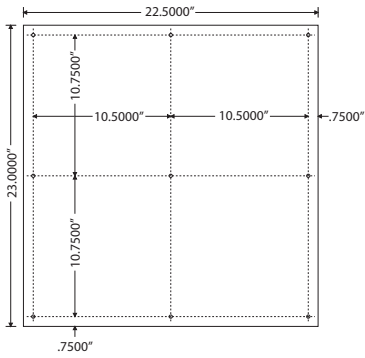

SPECIFICATIONS

Mounting Area: 517.50" square

Weight: 6.56 lbs.

Approvals: Plenum Rated


Enclosure Assemblies: MH5504L

MH5500 Enclosure with SP5504L
Sub-Panel pre-mounted

SUB-PANEL

SP5803L

Polymetal Sub-Panel, 34.125" H x 22.500" W x .130" Thick

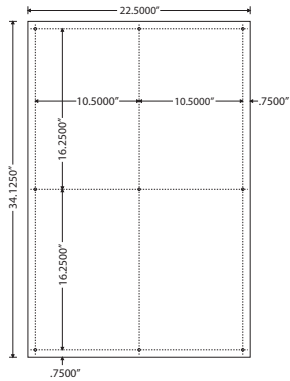

SPECIFICATIONS

Mounting Area: 767.81" square

Weight: 5.875 lbs.

Approvals: Plenum Rated


Enclosure Assemblies: MH5803L

MH5800 Enclosure with SP5803L
Sub-Panel pre-mounted

SUB-PANEL

SP5804L

Perforated Steel Sub-Panel, 34.125" H x 22.500" W x .250" Thick

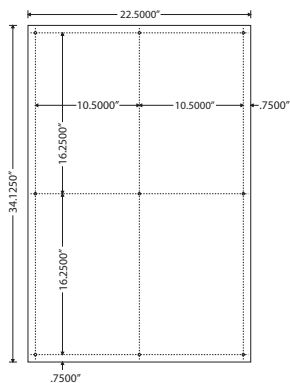

SPECIFICATIONS

Mounting Area: 767.81" square

Weight: 9.72 lbs.

Approvals: Plenum Rated


Enclosure Assemblies: MH5804L

MH5800 Enclosure with SP5804L
Sub-Panel pre-mounted

MOUNTING TRACK

MT212 Series

2.75" Wide Mounting Track for Relays, Current Sensors, and Power Supplies

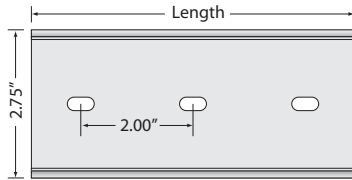

SPECIFICATIONS

Flame Rated: 94-5V

Approvals: UL Component Recognized, USA & Canada
CE Approved, RoHS

Mounting: MT212 Series track can be screw-mounted to any flat surface to provide mounting for 2.75" wide track-mountable relays, current sensors, or power supplies.


MT212 SERIES SELECTION GUIDE

Model #	Width	Length	Distance Between Hole Centers
MT212-2	2.75"	2.00"	2.00" Center to Center
MT212-4	2.75"	4.00"	2.00" Center to Center
MT212-6	2.75"	6.00"	2.00" Center to Center
MT212-8	2.75"	8.00"	2.00" Center to Center
MT212-12	2.75"	12.00"	2.00" Center to Center
MT212-18	2.75"	18.00"	2.00" Center to Center
MT212-24	2.75"	24.00"	2.00" Center to Center
MT212-48	2.75"	48.00"	2.00" Center to Center

MOUNTING TRACK

MT4 Series

4.00" Wide Mounting Track for Relays, Current Sensors, and Power Supplies



SPECIFICATIONS

Flame Rated: 94-5V

Approvals: UL Component Recognized, USA & Canada
CE Approved, RoHS

Mounting: MT4 Series track can be screw-mounted to any flat surface to provide mounting for 4.00" wide track-mountable relays, current sensors, or power supplies.



MT4 SERIES SELECTION GUIDE

Model #	Width	Length	Distance Between Hole Centers
MT4-2	4.00"	2.00"	2.00" Center to Center
MT4-4	4.00"	4.00"	2.00" Center to Center
MT4-6	4.00"	6.00"	2.00" Center to Center
MT4-8	4.00"	8.00"	2.00" Center to Center
MT4-12	4.00"	12.00"	2.00" Center to Center
MT4-18	4.00"	18.00"	2.00" Center to Center
MT4-24	4.00"	24.00"	2.00" Center to Center
MT4-48	4.00"	48.00"	2.00" Center to Center

MOUNTING TRACK

AT4 Series

4.00" Wide AdapTrack® for Relays, Current Sensors, and Power Supplies



SPECIFICATIONS

Flame Rated: 94-5V

DIN Rail Sizes: 32 mm x 15 mm asymmetrical DIN rail EN50035
35 mm x 7.5 mm symmetrical DIN rail EN50022
22.4 mm x 6.9 mm symmetrical NEMA A Series rail

Approvals: UL Component Recognized, USA & Canada
CE Approved, RoHS

Mounting: AT4 Series AdapTrack® snaps onto the three most common DIN rail sizes to provide mounting for 4.00" wide track-mountable relays, current sensors, or power supplies.

AT4 SERIES SELECTION GUIDE

Model #	Width	Length	DIN Rail Sizes
AT4-2	4.00"	2.00"	3 Most Common (see general specs to the left)
AT4-6	4.00"	6.00"	3 Most Common (see general specs to the left)
AT4-12	4.00"	12.00"	3 Most Common (see general specs to the left)
AT4-24	4.00"	24.00"	3 Most Common (see general specs to the left)
AT4-48	4.00"	48.00"	3 Most Common (see general specs to the left)

MKL Series

Lock Assemblies for use with RIB® Metal Enclosures



MKL-1
Locking key-latch assembly for use with all metal enclosures except MH3300K



MKL-2
Locking key-hook latch assembly for use with metal enclosure MH3300K



MKL-3
Metal locking key-latch assembly for use with all metal enclosures except MH3300K



MKL-4
Coin locking key-latch assembly for use with all metal enclosures except MH3300K

LOCK ASSEMBLIES

KEYSET

Set of Two Replacement Keys

KEY SET



SPECIFICATIONS

- Quantity:** Two keys and one ring per set
- For Use With:** Any of the key-lock enclosures
- Advantages:** Works with any Functional Devices, Inc. key-lock enclosures

DS80625

Number 8 Self-Tapping Drill Screws

SPECIFICATIONS

- Size:** No. 8 x 5/8"
- For Use With:** All polycarbonate sub-panels
- Advantages:** Self-tapping, eliminates mushrooming

SCREW SET



AXK

Replacement for any damaged or lost sensor. For use with models listed below *

SPECIFICATIONS

Dimensions: (Inside Diameter) .50"
(Outside) 1.86" x 1.46" x 1.50"

- *Only For Use With:** RIBXLCRA, RIBXLCRF, RIBXLSRA, RIBXLSRF, RIBXRA, RIBXRF
- Purpose:** Can replace any damaged or lost sensor. For use with the models listed above.

REPLACEMENT



AXKT

Replacement for any damaged or lost sensor. For use with models listed below *

SPECIFICATIONS

Dimensions: (Inside Diameter) .50"
(Outside) 2.05" x 1.46" x 1.50"

- *Only For Use With:** RIBXLCRA, RIBXLCRF, RIBXLSRA, RIBXLSRF, RIBXRA, RIBXRF
- Purpose:** Can replace any damaged or lost sensor. For use with the models listed above.

REPLACEMENT



AXG

Replacement for any damaged or lost sensor. For use with models listed below *

SPECIFICATIONS

Dimensions: (Inside) .52" x .52"
(Outside) 2.52" x 2.00" x 1.75"

- *Only For Use With:** RIBXJA, RIBXJF, RIBXLCJA, RIBXLCJF, RIBXLSJA, RIBXLSJF
- Purpose:** Can replace any damaged or lost sensor. For use with the models listed above.

REPLACEMENT



AXGT

Replacement for any damaged or lost sensor. For use with models listed below *

SPECIFICATIONS

Dimensions: (Inside) .52" x .52"
(Outside) 2.52" x 2.00" x 1.75"

- *Only For Use With:** RIBXJA, RIBXJF, RIBXLCJA, RIBXLCJF, RIBXLSJA, RIBXLSJF
- Purpose:** Can replace any damaged or lost sensor. For use with the models listed above.

REPLACEMENT



AXR

Replacement for any damaged or lost sensor. For use with models listed below *

SPECIFICATIONS

Dimensions: (Inside Diameter) .75"
(Outside Diameter) 2.28"

- *Only For Use With:** RIBMXRA, RIBMXRF
- Purpose:** Can replace any damaged or lost sensor. For use with the models listed above.

REPLACEMENT




TS-AN

Replacement for any damaged or lost pluggable terminal strips for RIBAN Series. For use with models listed below *

SPECIFICATIONS

- *Only For Use With:** RIBAN12C, RIBAN24C
- Installation Instructions:** Plug the terminal strips into the headers found on the RIBAN Series product.

REPLACEMENT



APS53-TC


Primary Voltage Terminal Cover for use with 300 VA and 500 VA Power Supplies

SPECIFICATIONS

Includes: (2) Self-Tapping Drill Screws for Installation

For Use With: PSMN300A, PSMN300A-IC, PSMN500A, PSMN500A-IC, PSH300A, PSH300A-IC, PSH500A, PSH500A-IC

TERMINAL COVER



WIRELESS DEVICES



Made in the U.S.A.
Meets the "Buy American" provisions of Section 1605 of the American Recovery and Reinvestment Act of 2009 (ARRA).

Short Range Wireless Devices

- EnOcean® enabled wireless relay receivers work in conjunction with many switching devices that are EnOcean® enabled with 902 MHz transmitters.
- Wireless wall switches, occupancy sensors, thermostats, key card switches, patio and door switches are all devices which can activate the RIB® wireless control relays by using EnOcean's "energy harvesting" technology. Energy harvesting refers to the process by which energy is captured and stored, then used to transmit a wireless signal, which in turn is received by the RIB® wireless relay.



enocean® alliance

No Wires. No Batteries. No Limits.

WIRELESS CONTROL RELAYS

MODEL #	UL	COIL VOLTAGE		RELAYS	CONTACTS	REPEAT FUNCTION	DRY CONTACT INPUT	BALLAST SIZE ENCLOSURE	NOTES	SPEC PAGE
		AC/DC	AC							
RIBW01B-EN3	•		120	1	SPDT	•	•		NEW	156
RIBW208B-EN3	•		208	1	SPDT	•	•		NEW	156
RIBW240B-EN3	•		240	1	SPDT	•	•		NEW	156
RIBW277B-EN3	•		277	1	SPDT	•	•		NEW	156
RIBW24B-EN3	•	24		1	SPDT	•	•		NEW	156
RIBW01C-EN3	•		120	1	SPST	•		•	NEW	157
RIBW02C-EN3	•		208-277	1	SPST	•		•	NEW	157

WIRELESS TRANSMITTERS

MODEL #	UL	POWER INPUT	ENOCEAN® ENERGY HARVESTING	FREQUENCY	COLOR	WIRELESS SWITCH COVER PLATE ¹	NOTES	SPEC PAGE
WWS-EN3		Self-Powered	•	902 MHz	White	WSTP-W	NEW	157
WDWS-EN3		Self-Powered	•	902 MHz	White		NEW	158

UL = UL Listed : UL916 Energy Management, UL864 Fire ; USA & Canada

¹ = Sold separately

* For other loads, see data sheet.

WIRELESS DEVICES

WIRELESS CONTROL RELAYS WITH TWO-WAY COMMUNICATION

RIBW01B-EN3

Enclosed EnOcean® Enabled Wireless Relay Transceiver / Repeater 20 Amp SPDT, 120 Vac Power, with Dry Contact Input

RIBW208B-EN3

Enclosed EnOcean® Enabled Wireless Relay Transceiver / Repeater 20 Amp SPDT, 208 Vac Power, with Dry Contact Input

RIBW240B-EN3



Enclosed EnOcean® Enabled Wireless Relay Transceiver / Repeater 20 Amp SPDT, 240 Vac Power, with Dry Contact Input

RIBW277B-EN3

Enclosed EnOcean® Enabled Wireless Relay Transceiver / Repeater 20 Amp SPDT, 277 Vac Power, with Dry Contact Input

RIBW24B-EN3

Enclosed EnOcean® Enabled Wireless Relay Transceiver / Repeater 20 Amp SPDT, 24 Vac/dc Power, with Dry Contact Input

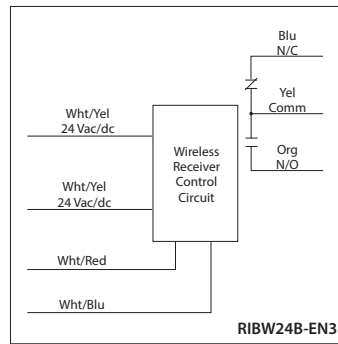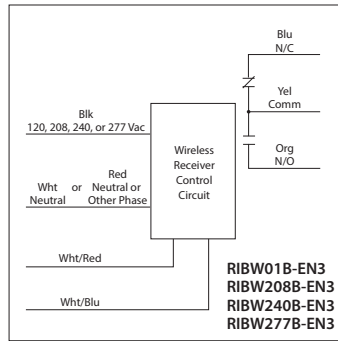

enoclean alliance

RELAY HAS BUILT-IN REPEATER FUNCTION. RELAY RECEIVES SIGNAL FROM WIRELESS SWITCH TRANSMITTER AND REBROADCASTS THE SIGNAL TO THE NEXT RELAY RECEIVER.

SPECIFICATIONS

Relays & Contact Type: One (1) SPDT Continuous Duty Coil

Expected Relay Life: 10 million cycles minimum mechanical

Operating Temperature: -30 to 140° F

Humidity Range: 5 to 95% (noncondensing)

Red LED: Relay Status / Learn Mode Status (Flashing)

Dimensions: 2.30" x 3.20" x 1.80" with .50" NPT Nipple

Wires: 16", 600V Rated

Approvals: UL Listed, UL916, C-UL, RoHS,

Agency Compliance: FCCID: SZV-TCM3200
IC: 5713A-TCM3200

Housing Rating: UL Accepted for Use in Plenum, NEMA 1

Gold Flash: No

Override Switch: No

Frequency: 902 MHz

Receiver Sensitivity: -93 dBm typical

Conducted Power: 5 mW typical

Built-in Switch Modes: Alarm, Repeater, Delay, Rocker, Momentary, and Toggle

Contact Ratings:

20 Amp Resistive @ 277 Vac

20 Amp Ballast @ 277 Vac

16 Amp Electronic Ballast @ 277 Vac (N/O)

10 Amp Tungsten @ 120 Vac (N/O)

770 VA Pilot Duty @ 120 Vac

1,110 VA Pilot Duty @ 277 Vac

2 HP @ 277 Vac

1 HP @ 120 Vac

Power Input Ratings:

73 mA @ 120 Vac ; 60 Hz (RIBW01B-EN3)

80 mA @ 208 Vac ; 60 Hz (RIBW208B-EN3)

80 mA @ 240 Vac ; 60 Hz (RIBW240B-EN3)

80 mA @ 277 Vac ; 60 Hz (RIBW277B-EN3)

139 mA @ 24 Vac (RIBW24B-EN3)

69 mA @ 24 Vdc (RIBW24B-EN3)

Notes:

- Compatible with EnOcean® 902 MHz Switches/Transmitters.

- Typical range: 50-150 ft.

- Open area transmission could be farther.

Consult factory for more information.

- Repeater function only rebroadcasts original EnOcean® transmission. Up to two repeaters can be used.

- Version 1.5 firmware or later implements Functional Devices, Inc.'s EnOcean® Manufacturer ID of 0x055.

- For setup instructions, see website for


-EN3 Series Application Manual:

www.functionaldevices.com/pdf/bulletins/B1867_393231.pdf

or scan QR code with your smart phone.



APPLICATION FOR WIRELESS CONTROL & FEEDBACK IN A BUILDING AUTOMATION SYSTEM

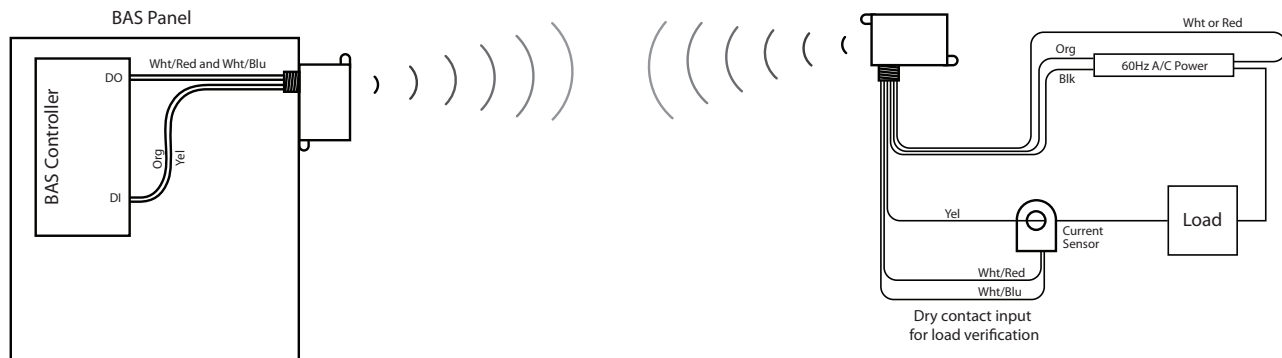


WIRELESS DEVICES

WIRELESS CONTROL RELAYS WITH TWO-WAY COMMUNICATION


RIBW01C-EN3

Enclosed EnOcean® Enabled Wireless Relay Receiver / Repeater 5 Amp SPST-N/O, 120 Vac Power Input

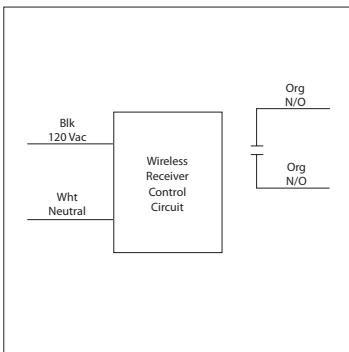

RIBW02C-EN3

Enclosed EnOcean® Enabled Wireless Relay Receiver / Repeater 5 Amp SPST-N/O, 208-277 Vac Power Input

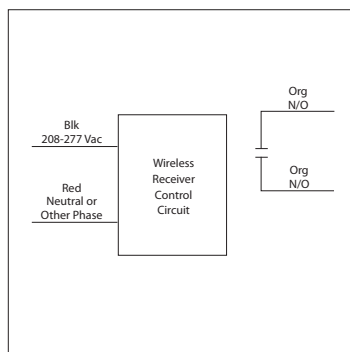

SMALLER SIZE DESIGN TO FIT INSIDE BALLAST HOUSING OF FLUORESCENT LIGHT FIXTURE.

SPECIFICATIONS

Relays & Contact Type: One (1) SPST Continuous Duty Coil
Expected Relay Life: 10 million cycles minimum mechanical
Operating Temperature: -30 to 140° F
Humidity Range: 5 to 95% (noncondensing)
Red LED: Relay Status / Learn Mode Status (Flashing)
Dimensions: 4.60" x 1.20" x 1.70"
Wires: 16", 600V Rated
Approvals: UL Listed, UL916, C-UL
Agency Compliance: FCCID: SZV-TCM3200
 IC: 5713A-TCM3200
Gold Flash: No
Override Switch: No
Frequency: 902 MHz
Receiver Sensitivity: -93 dBm typical
Conducted Power: 5 mW typical
Built-in Switch Modes: Alarm, Repeater, Delay, Rocker, Momentary, and Toggle

Contact Ratings:
 5 Amp Ballast @ 120/277 Vac
 5 Amp Tungsten @ 120 Vac
 5 Amp Electronic Ballast @ 120 Vac
Power Input Ratings:
 75 mA @ 120 Vac ; 60 Hz (RIBW01C-EN3)
 100 mA @ 208-277 Vac ; 60 Hz (RIBW02C-EN3)

Notes:

- Compatible with EnOcean® 902 MHz Switches/Transmitters.
- Typical range: 50-150 ft.
- Open area transmission could be farther. Consult factory for more information.
- Repeater function only rebroadcasts original EnOcean® transmission. Up to two repeaters can be used.
- Version 1.5 firmware or later implements Functional Devices, Inc.'s EnOcean® Manufacturer ID of 0x055.
- For setup instructions, see website for -EN3 Series:
www.functionaldevices.com/pdf/bulletins/B1867_393231.pdf or scan QR code with your smart phone.



WIRELESS ROCKER SWITCH TRANSMITTER & COVER PLATE

WWS-EN3

EnOcean® Enabled Wireless Wall Switch Transmitter Switch, 902 MHz

Switch Colors Available:




White

WSTP-W

Cover Plate Colors Available:



White



SPECIFICATIONS

Operating Modes: On/Off, Toggle, Scene control
Power Supply: Powered by finger press (Electrodynamic Energy Harvester)
Frequency: 902 MHz
Antenna: Integrated antenna, 15cm
Transmission Power: Max. 10mw EIRP
Energy Bowtravel/Operating Force: 50,000 actuations tested to EN60669 / VDE 0632
Operating Temperature: -25 to 65° C
Relative Humidity: 5 to 92% (noncondensing)
Dimensions: 2.75" x 4.50" x 0.62"
Weight: 3 oz.
Agency Compliance: FCCID: SZV-PTM 210U
 IC: 5713A-PTM210U

Notes:

- Control one load or one group of loads with a single rocker style Wireless Switch Transmitter.
- Typical range: 50-150 ft.
- Open area transmission could be farther. Consult factory for more information.
- Switch cover plate sold separately.
- Do not use metal switch plate covers due to interference with wireless signal.
- Mount with screws or double sided tape.
- For use with EN3 Series Relays.
- EEP F6-02-02

WDWS-EN3

EnOcean® Enabled Wireless Solar Door / Window Sensor, 902 MHz

SPECIFICATIONS

- Charge Time before Linking:** 2.7 hours @ 10 lux
3.7 minutes @ 200 lux
- Light Required to Sustain Operation:** 15 lux for 6 actuations/hour
50 lux for 30 actuations/hour
100 lux for 60 actuations/hour
- Charge Time for Full Charge:** 21 hours @ 200 lux (after startup)
42 hours @ 200 lux (cold start)
- Operating Life in Darkness (after full charge):** 174 hours heartbeat only
67 hours @ 10 actuations/hour
10 hours @ 100 actuations/hour
- Maximum Sensor Gap:** 0.25" (6.4mm)
- Dimensions (Sensor):** 3.15" L x 0.83" W x 0.59" D (80mm x 21mm x 15mm)
- Dimensions (Magnet):** 3.15" L x 0.47" W x 0.50" D (80mm x 12mm x 13mm)
- Weight (Total):** 0.97 oz. (27.5 g)
- Environment:** Indoor use only
32° to 131° F (0° to 55° C)
5 to 95% relative humidity (noncondensing)
- Agency Compliance:** FCC ID: SZV-STM 320U
IC: 5713A-STM 320U

Notes:

- Typical range: 80 ft.
 - Open area transmission could be farther. Consult factory for more information.
- Only for use with -EN3 Series relays.
- EEP D5-00-01



www.functionaldevices.com/pdf/bulletins/B1877_393233.pdf
or scan QR code with your smart phone.



ENERGY SAVING DEVICES

Half-Light® Ballast Controllers




Made in the U.S.A.
Meets the "Buy American" provisions of Section 1605 of the American Recovery and Reinvestment Act of 2009 (ARRA).

Half-Light® Ballast Controllers


- Providing independent control for multiple ballast light fixtures from a single existing wall switch or from a lighting controller output, the Half-Light® Ballast Controllers can significantly reduce a building's light output, enabling professional lighting users to cost-effectively enjoy the benefits of lighting control with just a simple toggle of their wall-based light switch. Easy to use and install, Half-Light® Ballast Controllers from Functional Devices are fully compatible with the market's range of popular fluorescent and HID lamps and represent a simple and affordable alternative to the industry's costlier and more complicated dimming systems and components.



HALF-LIGHT® BALLAST CONTROLLERS

MODEL #	 ¹	POWER INPUT	CONTROL INPUT	RELAYS	CONTACTS	ENCLOSED	NOTES	SPEC PAGE
HAF2	•	120 / 208-277 Vac		1	SPST	•		160
HAF3	•	120 / 208-277 Vac		2	SPST	•		160
HAF-AI	•	24 Vac	0-10 Vdc / 0-5 Vdc	2	SPST	•		162

¹ = UL Listed : UL916 Energy Management ; USA & Canada

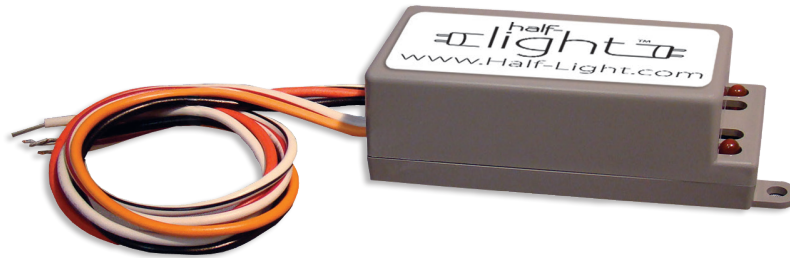


Plug & Play Energy Saving Device for Lighting

Up to 50% Energy Savings & Works with All Lighting

TWO STAGE & THREE STAGE HALF-LIGHT® BALLAST CONTROLLERS


HAF2

Enclosed Independent Control for Multiple Ballast Light Fixtures from One Existing Wall Switch, **Two Stage**; 120/208-277 Vac Power Input

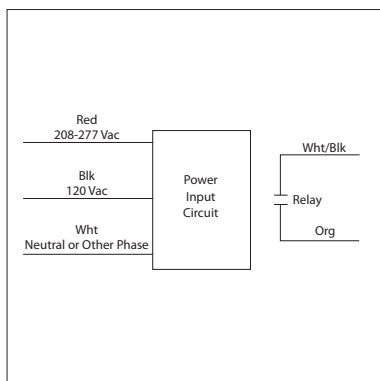

HAF3

Enclosed Independent Control for Multiple Ballast Light Fixtures from One Existing Wall Switch, **Three Stage**; 120/208-277 Vac Power Input

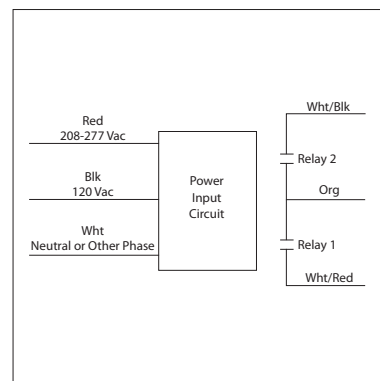

SPECIFICATIONS


Input Power: 120 / 208-277 Vac
Contact Ratings: 5 Amp Ballast @ 120-277 Vac
 5 Amp Incandescent @ 120 Vac
Operating Temperature: -30 to 140° F
Humidity Range: 5 to 95% (noncondensing)

Dimensions: 3.75" x 1.66" x 1.18"
Weight: 0.20 lbs. (HAF2); 0.24 lbs. (HAF3)
Wire Length: 6.00"
Approvals: UL Listed, UL916, C-UL, CE Approved, RoHS
Power Consumption: Refer to www.Half-Light.com for details

ENERGY
SAVING

THREE APPLICATIONS

MULTIPLE BALLAST LIGHT FIXTURES CLASSROOMS, OFFICES & HIGH BAY FLUORESCENT FIXTURES





TWO STAGE HALF-LIGHT®

- Switch ON
activates Ballast 1 Only (50% light)
- Switch OFF, then ON
activates Both Ballasts (Full light)


Wall switch can be replaced by switching devices such as contactors, relays, or controllers.

THREE STAGE HALF-LIGHT®

- Switch ON
activates Ballast 1 Only
- Switch OFF, then ON
activates Ballast 2 Only
- Switch OFF, then ON
activates Both Ballasts (Full light)

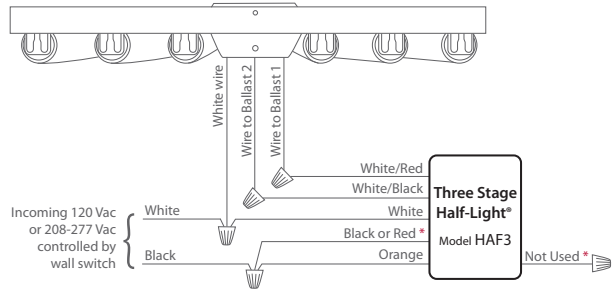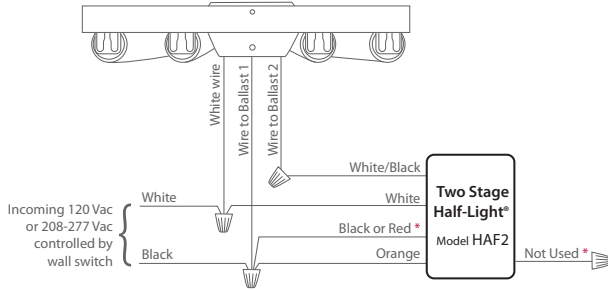


STEP DIMMING BALLAST CONTROL ELIMINATES DUAL WALL SWITCH CONTROL



TWO STAGE HALF-LIGHT®


- Switch ON
50% Light
- Switch OFF, then ON
Full Light

Wall switch can be replaced by switching devices such as contactors, relays, or controllers.

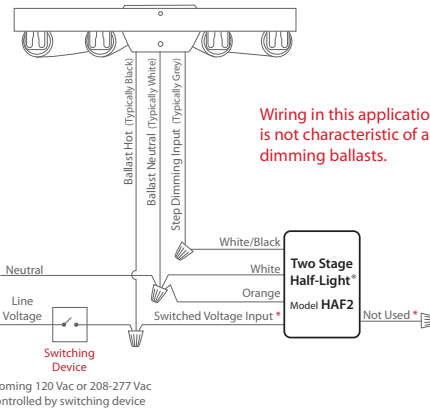

Wiring in this application note is not characteristic of all step dimming ballasts.

ALTERNATE FIXTURE CONTROL HIGH BAY FIXTURES IN BOX STORES, GYMNASIUMS, EXHIBITION HALLS & WAREHOUSES




TWO STAGE HALF-LIGHT®

- Switch ON
Every Other Light On
- Switch OFF, then ON
All Lights On

Wall switch can be replaced by switching devices such as contactors, relays, or controllers.

Start up and restart times may vary depending on fixture.

Lights 2, 4, and 6 controlled by switch only.
Half-Light® controls lights 1, 3, and 5.

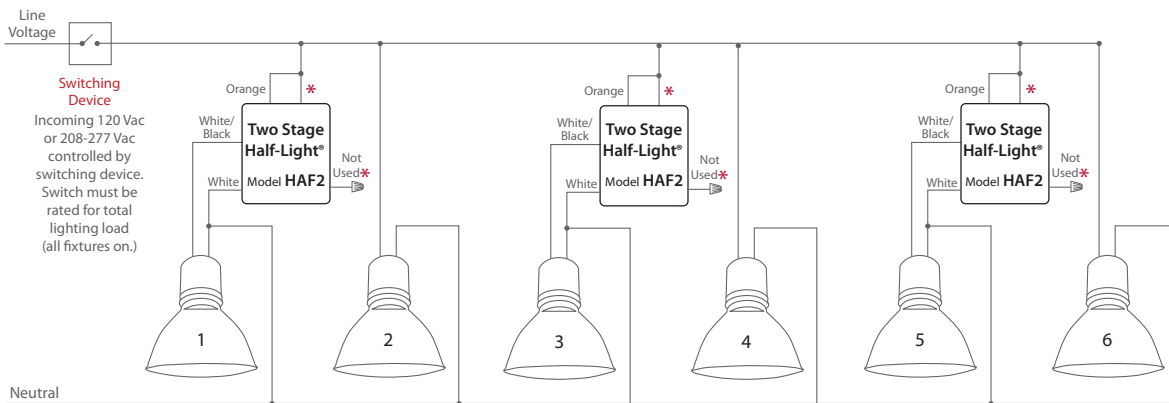

* For 120 Vac systems, Black wire is used, Red wire is not used. For 208-277 Vac systems, Red wire is used, Black wire is not used.


ENERGY
SAVING

half-light®

THREE STAGE HALF-LIGHT® BALLAST CONTROLLER WITH ANALOG INPUT

HAF-AI

Enclosed Independent Control for Multiple Ballast Light Fixtures with Analog Input for Stage Selection (0-10 Vdc / 0-5 Vdc); Three Stage; 24 Vac/dc Power Input

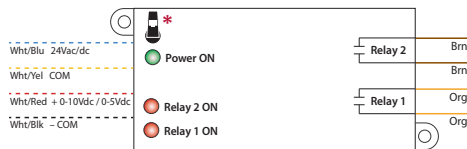

0-10 VDC CONTROL VOLTAGE	0-5 VDC * CONTROL VOLTAGE	RELAY 1 STATUS	RELAY 2 STATUS
0 - 2.117Vdc	0 - 1.058Vdc	OFF	OFF
2.745 - 4.627Vdc	1.373 - 2.313Vdc	ON	OFF
5.255 - 7.137Vdc	2.628 - 3.568Vdc	OFF	ON
7.765 - 10.000Vdc	3.883 - 5.000Vdc	ON	ON

HALF-LIGHT® BALLAST CONTROLLER WITH ANALOG INPUT FOR USE WITH CONTROLLER OUTPUT



SPECIFICATIONS


Relays & Contact Type: Two (2) SPST-NO Continuous Duty Coil
Expected Relay Life: 10 million cycles minimum mechanical
Operating Temperature: -30 to 140° F
Humidity Range: 5 to 95% (noncondensing)
Relay Status: Green LED On = Power On
 Red LEDs On = Relays Activated
Dimensions: 3.750" x 1.660" x 1.800"
Wire Length: 6.00"
Approvals: UL Listed, UL916, C-UL, CE, RoHS
Gold Flash: No
Override Switch: No

Contact Ratings:
 10 Amp General Use @ 277 Vac
 10 Amp Resistive @ 30 Vdc (N/O)
 7 Amp Resistive @ 30 Vdc (N/C)
 1/2 HP @ 125 Vac
 1 HP @ 250 Vac
 1/4 HP @ 277 Vac
 470 VA Pilot Duty @ 125 Vac
 770 VA Pilot Duty @ 250 Vac

Power Input:
 24 Vac/dc; 50-60 Hz
 100mA max.

Notes:
 • Custom programming available for large orders.
 • For Normally Closed, add -NC to end of model number
 • **Must move jumper for 0-5Vdc.***

MULTIPLE BALLAST LIGHT FIXTURES
 CLASSROOMS, OFFICES & HIGH BAY FLUORESCENT FIXTURES

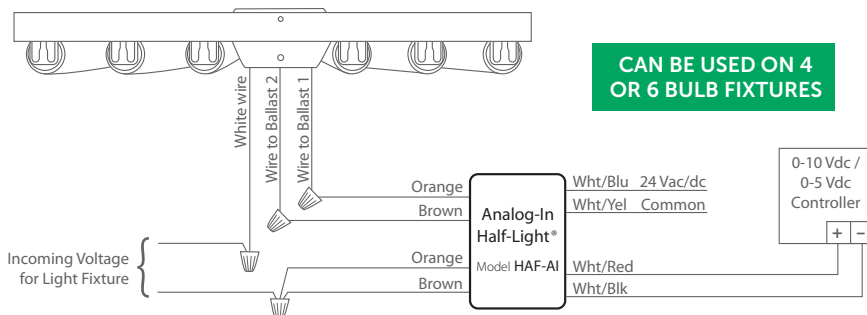

CAN BE USED ON 4 OR 6 BULB FIXTURES

ENERGY SAVING

INDEX

APS53-TC	153	PSMN01SB10	134	RIBH1CW	12	RIBMN24S	19
AT4 Series	152	PSMN01SB4	134	RIBH1S	6	RIBMN24S-4T	20
AXG	153	PSMN200A	118	RIBH15C	7	RIBMN24S-FA	58
AXGT	153	PSMN24DA	126	RIBH15M-250	6	RIBMN24S-J	20
AXK	153	PSMN24DAS	126	RIBH2C	5	RIBMN24ZL	40
AXKT	153	PSMN24SB10	134	RIBHX24BF	100	RIBMNA1D0	90
AXR	153	PSMN24SB4	134	RIBL12B	45	RIBMNH1C	21
CTRL-PS	113	PSMN2C2RB10	138	RIBL12BM	45	RIBMNH1S	22
DS8062	153	PSMN300A	117	RIBL12SB	45	RIBMNLB	84
HAF-AI	162	PSMN40A	124	RIBL12SBM	45	RIBMNLB-1	87
HAF2	160	PSMN40A24DS	128	RIBL1C-DC	8	RIBMNLB-2	85
HAF3	160	PSMN40AS	124	RIBL24B	46	RIBMNLB-2NO	86
KEYSET	153	PSMNS00A	116	RIBL24BM	46	RIBMNLB-4	85
MH1000 Series	142	PSMS1	135	RIBL24SB	46	RIBMNLB-4NO	86
MH1200 Series	142	PSP24DA	125	RIBL24SBM	46	RIBMNLB-6	85
MH2204-N4	142	PSPT2RB10	134	RIBL3C	5	RIBMNLB-6NO	86
MH3100-M1	143	PSPT2RB4	134	RIBL4C	5	RIBMNU1C	21
MH3204-N4	143	PSPW2RB10	134	RIBLB	84	RIBMNU1S	22
MH3300 Series	143	PSPW2RB4	134	RIBLB-2	85	RIBMNW24B-BCAI	75
MH3500 Series	144	RIB013P	29	RIBLB-4	85	RIBMNW24B-MBAI	82
MH3800 Series	144	RIB01BDC	60	RIBLB-6	85	RIBMNDW12-BC	78
MH4400 Series	144	RIB01P	26	RIBM013PN	41	RIBMNDW12-BCDI	77
MH5500 Series	145	RIB01P30	32	RIBM013PNDC	64	RIBMNX2401B-BC	73
MH5800 Series	145	RIB01P30-S	32	RIBM01ZNDC	64	RIBMNX2401SB-LN	68
MHP3903100A100AB10	115	RIB01SBDC	61	RIBM023PN	42	RIBMNX2402B-BC	74
MHP3903100AB10	114	RIB01SBDC	61	RIBM02ZNDC	64	RIBMNX2402SB-LN	69
MKL Series	153	RIB023P	29	RIBM043PN	42	RIBMNU1C	16
MT212 Series	152	RIB02BDC	60	RIBM043PN-HD	43	RIBMNU1S	17
MT4 Series	152	RIB02P	27	RIBM12C	15	RIBMNU15C	18
PE6000 Series	141	RIB02P30	32	RIBM12S	15	RIBMNU1SM-250	18
PSB100AB10	124	RIB02SBDC	61	RIBM2401B	38	RIBMNU2C	17
PSB40AB10	124	RIB02SBDC	61	RIBM2401D	16	RIBMW24B-44-BC	79
PSC100AB10	108	RIB043P	30	RIBM2401SB	38	RIBMW245B-LNAI	70
PSC40AB10	108	RIB04P	28	RIBM2401SBC	39	RIBMW245B-LNT2	71
PSH100A Series	109	RIB12C-FA	56	RIBM2402B	38	RIBMW245B-LNT3	71
PSH100A100A Series	113	RIB12P	31	RIBM2402D	16	RIBMXX24BA	105
PSH100A24DWB10	126	RIB12P30	31	RIBM2402SB	38	RIBMXX24BF	105
PSH100AB10-EXT2	110	RIB12S-FA	56	RIBM2402SBC	39	RIBMXX24BV	105
PSH200A	118	RIB21CDC	60	RIBM243PN	41	RIBMXX24SBA	105
PSH200A-LVC	120	RIB2401B	24	RIBM24C	15	RIBMXX24SBF	105
PSH200AB10-LVC	123	RIB2401D	7	RIBM24S	15	RIBMXX24SBV	105
PSH24DWB10	125	RIB2401SB	25	RIBM24ZL	40	RIBMXXRA	99
PSH2C2RB10	138	RIB2401SBC	26	RIBM24ZN	39	RIBMXXRF	99
PSH2C2RB10-L	139	RIB2402B	24	RIBME2401B	53	RIBMXXV	99
PSH2RB10	136	RIB2402D	7	RIBME2401P	54	RIBT2401B	33
PSH300A	117	RIB2402SB	25	RIBME2401SB	54	RIBT2401D	13
PSH300A-LVC	120	RIB2402SBC	26	RIBME2402B	53	RIBT2401SB	34
PSH300AB10-LVC	122	RIB2421B	25	RIBME2402P	54	RIBT2401SBC	34
PSH40A Series	108	RIB2421C	8	RIBME2402SB	54	RIBT2402B	33
PSH40A100A Series	111	RIB2421SB	25	RIBM11C	16	RIBT2402SB	34
PSH40A40A Series	110	RIB243P	28	RIBM11S	17	RIBT2402SBC	34
PSH40A75A Series	111	RIB24C-FA	56	RIBM115C	18	RIBT242B	36
PSH40AB10-EXT2	110	RIB24P	31	RIBM11SM-250	18	RIBT243B	36
PSH500A	116	RIB24P-FA	57	RIBM12C	17	RIBT243P	37
PSH500A-LVC	119	RIB24P30	31	RIBM12S	19	RIBT24B	33
PSH500AB10-LVC	121	RIB24S-FA	56	RIBM12C-FA	58	RIBT24B-FA	57
PSH550-UPS (Kit)	136	RIB24Z	30	RIBM12S	19	RIBT24P	36
PSH550-UPS-STAT (Kit)	137	RIB347P	27	RIBM12S-FA	58	RIBT245B	33
PSH75A Series	109	RIBAN12C	14	RIBM2401D	21	RIBT24Z	37
PSH75A100A Series	112	RIBAN24C	14	RIBM24C	19	RIBTD2401B	35
PSH75A75A Series	112	RIBD01BDC	62	RIBM24C-4T	20	RIBTE01B	49
PSH850-UPS-STAT (Kit)	139	RIBD01BDC-DOB	63	RIBM24C-FA	58	RIBTE01P	52
PSM19A24DAS	127	RIBD02BDC	62	RIBM24Q2C	88	RIBTE01P-S	53
PSM20A12DAS	127	RIBD02BDC-DOB	63	RIBM24Q3C	88	RIBTE01SB	50
PSM24A24DAS	127	RIBD2421C	9	RIBM24Q4C	89	RIBTE02B	49
PSM2RB10	137	RIBH1C	4	RIBM24Q4C-PX	89	RIBTE02P	52

INDEX

RIBTE02P-S	53	RIBXGA	94	TR100VA002-20	131
RIBTE02SB	51	RIBXGA-SCAL	94	TR100VA002US	130
RIBTE24B	48	RIBXGFL	94	TR100VA004	131
RIBTE24P	51	RIBXGFL	94	TR100VA005	131
RIBTE24SB	50	RIBXGHA	93	TR100VA008	131
RIBTELC	48	RIBXGHF	93	TR100VA009	131
RIBTELS	48	RIBXGHTA	93	TR100VA009US	130
RIBTH1C	11	RIBXGHTF	93	TR100VA015	131
RIBTH1S	12	RIBXGTA	94	TR150VA001	131
RIBTH1SC	13	RIBXGTA-SCAL	94	TR150VA002	131
RIBTH2C	11	RIBXGTF	94	TR150VA008	131
RIBTU1C	11	RIBXGTFL	94	TR175VA001	131
RIBTU1S	12	RIBXGTV10	96	TR175VA002	131
RIBTU1SC	13	RIBXJA	99	TR175VA003	131
RIBTU2C	11	RIBXJF	99	TR20VA001	131
RIBTW2401B-BC	72	RIBXK420-100	96	TR20VA002	131
RIBTW2401B-LN	66	RIBXK420-20	96	TR20VA003	131
RIBTW2401B-WIUI-N4	81	RIBXK420-50	96	TR20VA004	131
RIBTW2401SB-LN	67	RIBXKA	93	TR20VA007	131
RIBTW2402B-BC	72	RIBXKF	93	TR240VA001	131
RIBTW2402B-LN	66	RIBXKTA	93	TR300VA002	131
RIBTW2402SB-LN	67	RIBXKTF	93	TR375VA001	131
RIBTW24B-BCAI	75	RIBXKTV5-10	95	TR40VA001	131
RIBTW24B-BCAO	76	RIBXKTV5-100	95	TR40VA001US	130
RIBTW24B-MBAI	82	RIBXKTV5-20	95	TR40VA002	131
RIBTW24B-WI-N4	80	RIBXKTV5-50	95	TR40VA002US	130
RIBTW245B-LNAI	70	RIBXLCA	101	TR40VA003	131
RIBTW245B-LNT2	71	RIBXLCEA	101	TR40VA004	131
RIBTW245B-LNT3	71	RIBXLCEV	101	TR40VA013	131
RIBTWX2401B-BC	73	RIBXLCF	101	TR40VA015	131
RIBTWX2401SB-LN	68	RIBXLCJA	101	TR40VA022	131
RIBTWX2402B-BC	74	RIBXLCJF	101	TR40VA040	131
RIBTWX2402SB-LN	69	RIBXLCRA	101	TR50VA001	131
RIBU1C	4	RIBXLCRF	101	TR50VA001US	130
RIBU1CW	12	RIBXLCV	101	TR50VA002	131
RIBU1S	6	RIBXLSA	102	TR50VA003	131
RIBU1SC	7	RIBXLSEA	102	TR50VA004	131
RIBU1SM-250	6	RIBXLSEV	102	TR50VA005	131
RIBU2C	5	RIBXLSF	102	TR50VA005US	130
RIBU2S2	10	RIBXLSJA	102	TR50VA006	131
RIBU2SC	10	RIBXLSJF	102	TR50VA007	131
RIBW01B-EN3	156	RIBXLSRA	102	TR50VA008	131
RIBW01C-EN3	157	RIBXLSRF	102	TR50VA009	131
RIBW02C-EN3	157	RIBXLSV	102	TR50VA014	131
RIBW208B-EN3	156	RIBXRA	98	TR50VA015	131
RIBW240B-EN3	156	RIBXRF	98	TR50VA016	131
RIBW24B-EN3	156	RIBXV	98	TR50VA017	131
RIBW277B-EN3	156	SIB02S	135	TR50VA018	131
RIBX243PA	104	SIB04S	135	TR50VA019	131
RIBX243PF	104	SIB05S	135	TR50VA022US	130
RIBX243PV	104	SIBLS	135	TR75VA001	131
RIBX24BA	103	SP3303	148	TR75VA002	131
RIBX24BF	103	SP3304	148	TR75VA003	131
RIBX24BV	103	SP3803L	149	TR75VA004	131
RIBX24SBA	103	SP3803S	148	TR75VA005	131
RIBX24SBF	103	SP3804L	149	TR75VA007	131
RIBX24SBV	103	SP3804S	149	TS-AN	153
RIBXA	98	SP4403L	150	WDWS-EN3	158
RIBXF	98	SP4404L	150	WWS-EN3	157
RIBXG21A	95	SP5503L	150		
RIBXG21F	95	SP5504L	151		
RIBXG21TA	95	SP5803L	151		
RIBXG21TF	95	SP5804L	151		
RIBXG420-100	97	TR100VA001	131		
RIBXG420-20	97	TR100VA001US	130		
RIBXG420-50	97	TR100VA002	131		