

LJ8950W LIGHT-DUTY COMMERCIAL JACKSHAFT DOOR OPERATOR FOR ROLLING DOORS

SECTION 08 71 13



KEY FEATURES

STANDARD APPLICATION

Ideal for applications using smaller, lighter commercial rolling overhead doors and grilles with light-duty cycle requirements

RATED DUTY CYCLE

Light-duty: Up to 10 cycles/hour; fewer than 25 cycles per day

OPERATOR SPEED

7.5-8.5 Inches per second

LIMIT SETTINGS

Electronic

EMERGENCY DISCONNECT FOR MANUAL OPERATION

Emergency release rope with handle

EMERGENCY DISCONNECT WITH AUTO-RECONNECT

To reconnect, pull down on the handle again to re-engage

PROGRAMMING

Tactile buttons

CIRCUIT BOARD

Solid-state circuit board

MOTOR OPERATOR WALL CONTROL

Single-button control station

PUSH BUTTON STATION

Single-push button control

SPECIFICATIONS

RADIO RECEIVER

Security+ 2.0® technology standard on-board with tri-band frequency; accepts up to (40) single button remote controls plus up to (4) wireless keypads or an unlimited number of DIP switch remotes

VOLTAGE CONNECTIONS

120VAC

DRIVE REDUCTION

Heavy-duty 12VDC

WARRANTY

2 years

INSTALLATION FEATURES

UNIVERSAL MOUNTING

Yes, can be mounted to either the right or left side of the door without the need for any special accommodations

MAXIMUM DOOR HEIGHT

14 feet

MAXIMUM DOOR WIDTH

18 feet

MAXIMUM ALLOWABLE SQUARE FOOTAGE

180 square feet

INTERNET CONNECTIVITY

myQ® Technology enables remote monitoring and control of the commercial door via a smartphone, tablet, or computer***

This commercial door operator must feature constant pressure to close or be equipped with an external monitored entrapment protection device. Use only LiftMaster monitored entrapment protection devices itemized on the accessory page of the operators installation manual to meet UL 325 requirements.

***Operator directly connects via built-in wi-fi, myQ app required.

DATA SHEET


JACKSHAFT DOOR OPERATOR FOR COMMERCIAL
ROLLING SHEET DOOR APPLICATION

LiftMaster

LJ8950W LIGHT-DUTY COMMERCIAL JACKSHAFT DOOR OPERATOR FOR ROLLING DOORS

SECTION 08 71 13

DIMENSIONS

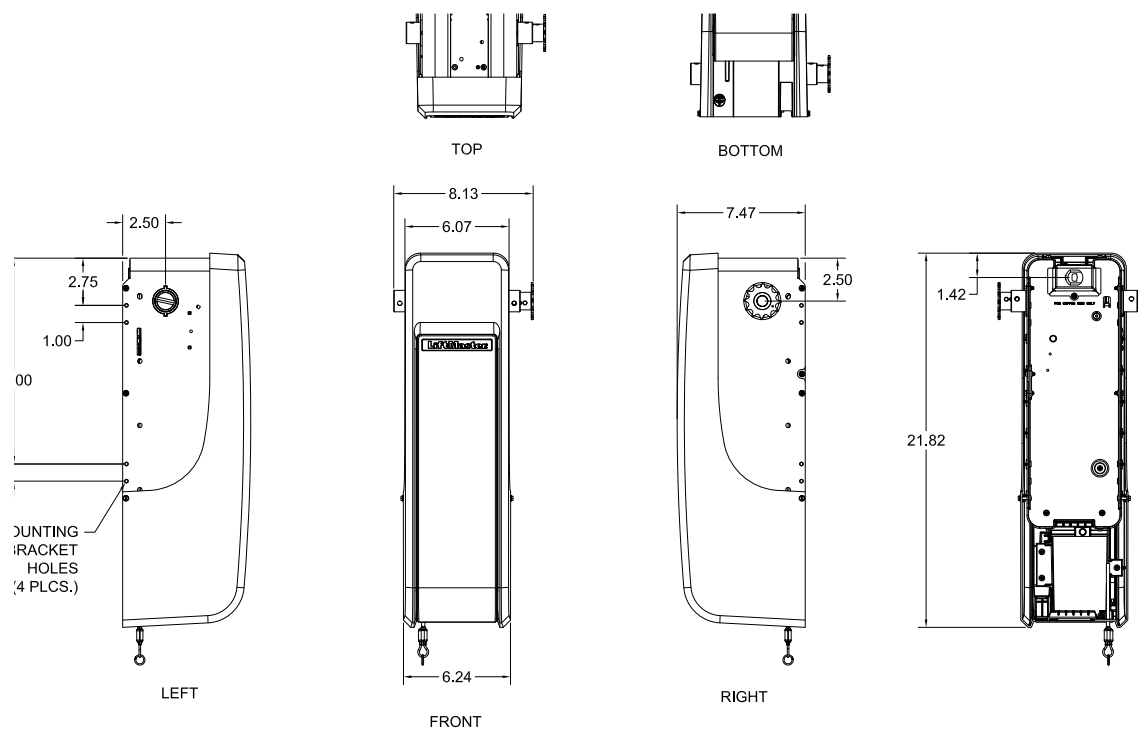

CAPACITY

MAXIMUM DOOR AREA (SQ. FT.)			
	MAX. HEIGHT	MAX. WIDTH	MAX. SQ FT.
ROLLING	14 FT. OR 18 FT.		180 FT. TOTAL
	HEADROOM CLEARANCE REQUIRED: 3 IN. FROM CENTER OF TORSION BAR MAX. DOOR WEIGHT: 850 LBS.		

Recommended duty cycle: 10 cycles per hour; fewer than 25 cycles/day.