

USER GUIDE




m519
5G WIFI 6 ROUTER

SETTING UP

1 Insert Cards & Power On

When powered up, your m519 router will broadcast both 2.4GHz and 5GHz Wi-Fi signal with the SSID: **CSG-xxxx** and **CSG-xxxx-5G**.

❗ Hot plug for TF card and Nano-SIM card are not supported for this router.

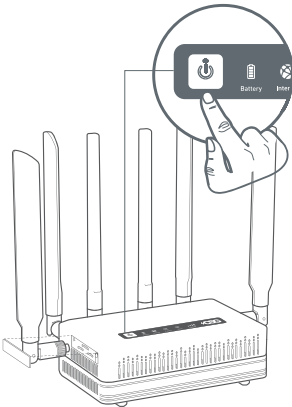

⚡ After inserting cards, turn on the router by pressing the power button

2 Connect via Wi-Fi

Connect to the Wi-Fi called **CSG-xxxx** or **CSG-xxxx-5G**, and then input the default Wi-Fi password which is the last 8 digits of the serial number and is also printed on the bottom label of the router.

Wi-Fi

☐

✓ CSG-xxxx

☒


Search the SSID and connect to it

Password

••••••••

Connect via LAN

or



Plug the cable connecting to your computer into LAN port

3 Advanced Settings

While connected to your router, visit <http://192.168.8.1> in your browser to access advanced settings and configuration options.

http://192.168.8.1

GL·iNet

深圳市广联智通科技有限公司

产品名称	XE3000说明书
物料编码	505-1113
单位/比例	mm/1:1
尺寸	100*158±1mm
材质	157g铜版纸/4C印刷+过油(用于CSG定制)
日期	2023/06/02