


35  
SINCE 1981  
YEARS  
Anniversary

2016



# POWER ACOUSTIK®


SUBWOOFERS | AMPLIFIERS | SPEAKERS | SOURCE UNITS | ACCESSORIES

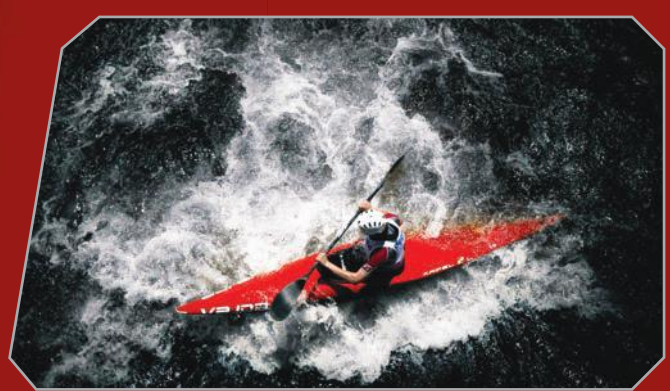





New in 2016, Power Acoustik introduces the Incite series head units. Incite operating systems use an advanced microprocessors and central processing unit bringing lightning fast reaction time into automotive multimedia entertainment systems. Premium Incite units feature built-in advanced GPS Navigation with MobileLink 2-way MHL complete smart phone integration, or Sirius/XM satellite radio ready interface. Standards for all Incite models include Bluetooth V3.0 for hands-free calling, Adaptive Fast Charging of enabled mobile devices, and more. Select Incite units add multi-color illumination or an advanced audio staging equalizer. Each universal 2-DIN model uses a 6.2" Active Matrix LCD display with adjustable LED backlighting. 1-DIN models available in summer 2016 include motorized 7" and detachable 3.4" LCD.



### Adaptive Fast Charging

We demand top performance of our mobile devices to meet our social media and content streaming needs. To keep up with rapidly changing design trends, our mobile devices tend to rely on limited energy capacity, utilizing every efficiency to prolong the charge of the battery. AptiX source units feature USB Adaptive Fast Charge technology, reducing necessary down time to get you moving again. AFC has the potential to recharge enabled mobile device batteries from zero to up to 50% in about 30 minutes. (USB cable not included)



### Bluetooth V3.0 Hands-Free Calling

Bluetooth V3.0 with Enhanced Data Rate increases traditional data transfer rates to 2.1 Mbit/s. This lightning quick information transfer increases clarity & virtually eliminates unwanted distortion during calls and wireless MP3 audio playback. Most Bluetooth enabled Smartphones will transfer phone book contacts, view recent call logs, and stream MP3 audio tracks.

### PD-621XB

2-DIN DVD, Sirius/XM Ready, Bluetooth, CD/USB/MP3 Car Stereo w/ 6.2" LCD



### ADDITIONAL SERIES DETAILS:

Bluetooth V3.0 Hands-Free Calling from Enabled Phone  
A2DP Wireless MP3 Audio Playback from Enabled Device  
Built-in Microphone & External Microphone Included  
Accepts OEM Steering Wheel Control Interfaces  
Advanced FM/AM Tuner with RDBS  
Playback from DVD & CD of MP3 & MP4  
Playback from 64GB SD/USB of MP3 & MP4  
ID3 MP3 Tag Reading for Track & Artist Information  
AUX Audio Input for Personal Media Devices




### PDN-621HB

2-DIN GPS Navigation, MHL MobileLink X2, DVD, Bluetooth, CD/USB/MP3 Car Stereo w/ 6.2" LCD



### GPS Navigation Enjoy the drive

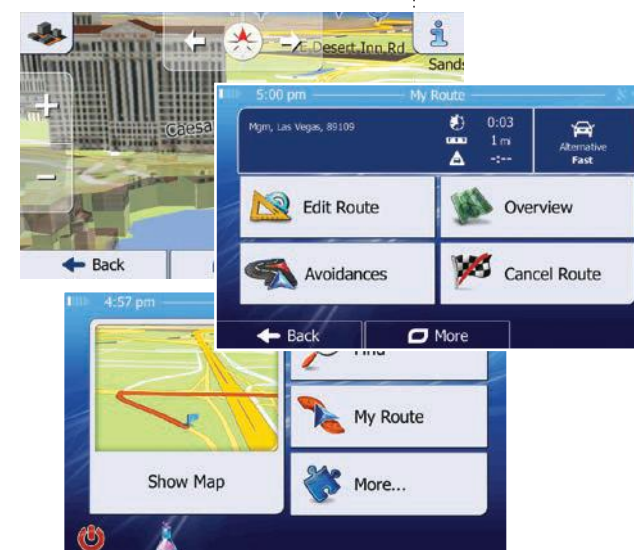

PDN-621HB features GPS turn-by turn navigation for USA, Canada, & Mexico. Set your destination and follow the commands by text-to-speech directions, including lane guidance. Additional features include favorites list, programmable home destination, destination fuel estimates, multi-lingual, multi-gender voices, speed limit warnings, and more!

### MHL 2-Way

PDN-621HB also includes MHL MobileLink X2 mobile device integration, enabling complete control of your smartphones and tablets. Conveniently launch any application, post social media updates, or play your own videos and all other content on your mobile device. Your smart device display is mirrored to the head units larger LCD screen via USB, and all commands are sent via Bluetooth 3.0 connection. MHL MobileLink X2 ensures safe, hands-free operation of your smart device without the distractions of locating & handling a device.



Multi-band Audio Equalizer w/ Presets  
Front & Rear Pre-Amp Audio Outputs  
Variable Subwoofer Pre-Amp Output  
Video Output for Auxiliary Devices  
Rear View Camera Input w/ Trigger  
300w 4ch. MOSFET Speaker Outputs  
Custom Backgrounds & Screen Savers  
Multi-Region FM Frequency Stepping  
800x480 Widescreen Resolution  
400NIT LED Backlight

Digital Signal Processing features include a digital 10-band equalizer with 14dB boost or cut, custom presets, & factory presets. Additional DSP functions include variable subwoofer level control, reverb optimization, loudness adjustment, & sound staging controls.





# MOBILE LINK X2 AVN

## SOURCE UNITS

MobileLink X2 AVN models feature GPS turn-by-turn navigation for USA, Canada, & Mexico. Set your destination and follow the commands by text-to-speech directions, including lane guidance. Additional features include favorites list, programmable home destination, destination fuel estimates, multi-lingual, multi-gender voices, speed limit warnings, and more.



**MHL 2-Way**

MHL MobileLink X2 mobile device integration enables complete control of your smartphones and tablets. Conveniently launch any application, post social media updates, or play your own videos and all other content on your mobile device. Your smart device display is mirrored to the head units larger LCD screen via USB, and all commands are sent via Bluetooth 3.0 connection. MHL MobileLink X2 ensures safe, hands-free operation of your smart device without the distractions of locating & handling the device.




**TOUCH SCREEN**



Bluetooth V3.0 with Enhanced Data Rate increases traditional data transfer rates to 2.1 Mbit/s. This lightning quick information transfer increases clarity & virtually eliminates unwanted distortion during calls and wireless MP3 audio playback.

Digital Signal Processing features include a digital 10-band equalizer with 14dB boost or cut, custom presets, & factory presets. Additional DSP functions include variable subwoofer level control, reverb optimization, loudness adjustment, & sound staging controls.

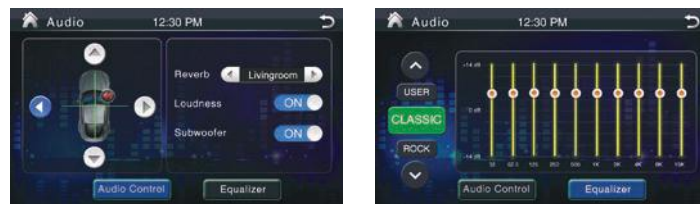

### MHL MobileLink Interface Cables

**HDM-i4** ~ iPhone4, iPhone4S, iPad2, & iPad3

**HDM-A2** ~ Galaxy 2 & Select 5-Pin Android Devices

**HDM-A3** ~ Galaxy 3, 4, 5, & Select 11-PIN Android Devices

5ft interface cable unlocks 1080p video and audio playback from MHL enabled appropriate micro connector for your mobile device. Farenheit MobileLink MHL interface cables also charge your mobile device. Available for select iOS and Android devices.

**MHL**  
Mobile High-Definition Link



# MOBILE LINK X2 AVN

## SOURCE UNITS

### PDN-626B

2-DIN GPS Navigation, MHL MobileLink X2, DVD, Bluetooth, CD/USB/MP3 Car Stereo w/ 6.2" LCD



**Mobile LINK**

**TOUCH SCREEN**

**MAPS**  
Enjoy the drive



**Bluetooth** **DVD** **USB** **AUX INPUT** **X300 WATT 4CH. AMPLIFIER**

### PDN-726B

1-DIN GPS Navigation, MHL MobileLink X2, DVD, Bluetooth, CD/USB/MP3 Car Stereo w/ Motorized 7" LCD



**TOUCH SCREEN**

**Mobile LINK**

**MAPS**  
Enjoy the drive

**Bluetooth** **DVD** **USB** **AUX INPUT** **X300 WATT 4CH. AMPLIFIER**



#### ADDITIONAL SERIES DETAILS:

Turn-by-Turn GPS Navigation of USA, Canada, & Mexico  
12 Million Points of Interest Database Included  
Complete Integration of Select Android Enabled Devices  
Bluetooth V3.0 Hands-Free Calling from Enabled Phone  
A2DP Wireless MP3 Audio Playback from Enabled Device  
Built-in Microphone & External Microphone Included  
Accepts OEM Steering Wheel Control Interfaces

Advanced FM/AM Tuner with RDBS  
Playback from DVD & CD of MP3 & MP4  
Playback from 64GB SD/USB of MP3 & MP4  
ID3 MP3 Tag Reading for Track Information  
AUX Audio Input for Personal Media Devices  
10-Band Audio Equalizer w/ User Presets  
Front & Rear Pre-Amp Audio Outputs  
Variable Subwoofer Pre-Amp Output

Video Output for Auxiliary Devices  
Rear View Camera Input w/ Trigger  
300w 4ch. MOSFET Speaker Outputs  
Custom Backgrounds & Screen Savers  
Multi-Region FM Frequency Stepping  
800x480 Widescreen Resolution  
400NIT LED Backlight



# MOBILE LINK X2

## SOURCE UNITS






**MHL 2-Way**  
Mobile High-Definition Link

MHL MobileLink X2 mobile device integration enables complete control of your smartphones and tablets. Conveniently launch any application, post social media updates, or play your own videos and all other content on your mobile device. Your smart device display is mirrored to the head units larger LCD screen via USB, and all commands are sent via Bluetooth 3.0 connection. MHL MobileLink X2 ensures safe, hands-free operation of your smart device without the distractions of locating & handling the device. MHL MobileLink X2 integration cables are available for select Android enabled devices.



Bluetooth V3.0 with Enhanced Data Rate increases traditional data transfer rates to 2.1 Mbit/s. This lightning quick information transfer increases clarity & virtually eliminates unwanted distortion during calls and wireless MP3 audio playback. Most Bluetooth enabled Smartphones will transfer phone book contacts, view recent call logs, and stream MP3 audio tracks.

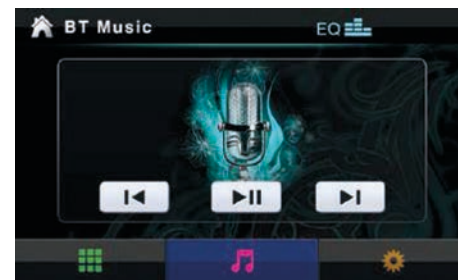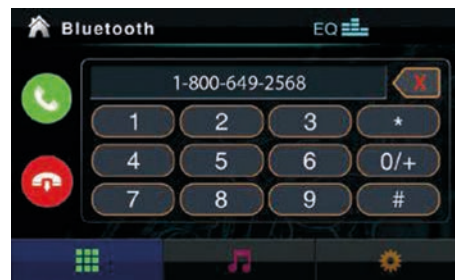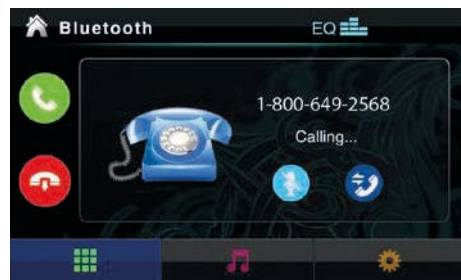

**DVD**



### MHL MobileLink Interface Cables

**HDM-i4** ~ iPhone4, iPhone4S, iPad2, & iPad3

**HDM-A2** ~ Galaxy 2 & Select 5-Pin Android Devices

**HDM-A3** ~ Galaxy 3, 4, 5, & Select 11-PIN Android Devices



5ft interface cable unlocks 1080p video and audio playback from MHL enabled appropriate micro connector for your mobile device. Fahrenheit MobileLink MHL interface cables also charge your mobile device. Available for select iOS and Android devices.

# MOBILE LINK X2

## SOURCE UNITS

### PD-62H2B

2-DIN MHL MobileLink X2, DVD, Bluetooth, CD/USB/MP3 Car Stereo w/ 6.2" LCD



**DVD**



### PD-72H2B

1-DIN MHL MobileLink X2, DVD, Bluetooth, CD/USB/MP3 Car Stereo w/ Motorized 7" LCD



**DVD**



#### ADDITIONAL SERIES DETAILS:

Complete Integration of Select Android Enabled Devices (requires MHL MobileLink accessory cable, sold separate)  
Bluetooth V3.0 Hands-Free Calling from Enabled Phone  
A2DP Wireless MP3 Audio Playback from Enabled Phone  
Built-in Microphone & External Microphone Included  
Accepts OEM Steering Wheel Control Interfaces

Advanced FM/AM Tuner with RDBS Receiver  
Playback from DVD & CD of MP3 & MP4  
Playback from 64GB SD/USB of MP3 & MP4  
ID3 MP3 Tag Reading for Track Information  
AUX Audio Input for Personal Media Devices  
Front & Rear Pre-Amp Audio Outputs  
Variable Subwoofer Pre-Amp Output

Video Output for Auxiliary Devices  
Rear View Camera Input w/ Trigger  
300w 4ch. MOSFET Speaker Outputs  
Multi-Region FM Frequency Stepping  
800x480 Widescreen Resolution  
400NIT LED Backlight



# MOBILE LINK X1

## SOURCE UNITS



MHL MobileLink X1 opens mirroring of smartphones and tablets to enabled in-car entertainment systems. Share with other passengers your own movies, social networking content, internet videos, or anything else your mobile device displays. Easily follow your smartphone's navigation commands on the larger head unit LCD instead of the smaller smart phone display. MHL MobileLink X1 replicates the image of your smart device onto the LCD screen of several in-car entertainment products, including select MobileLink X1 source units, headrests, and overhead displays. MHL MobileLink integration cables are available for select Android and iOS smart devices.



### PD-624HB

2-DIN MHL MobileLink X1, DVD, Bluetooth, CD/USB/MP3 Car Stereo w/ 6.2" LCD




### PD-724HB

1-DIN MHL MobileLink X1, DVD, Bluetooth, CD/USB/MP3 Car Stereo w/ Motorized 7" LCD



Bluetooth V3.0 with Enhanced Data Rate increases traditional data transfer rates to 2.1 Mbit/s. This lightning quick information transfer increases clarity & virtually eliminates unwanted distortion during calls and wireless MP3 audio playback. Most Bluetooth enabled Smartphones will transfer phone book contacts, view recent call logs, and stream MP3 audio tracks.

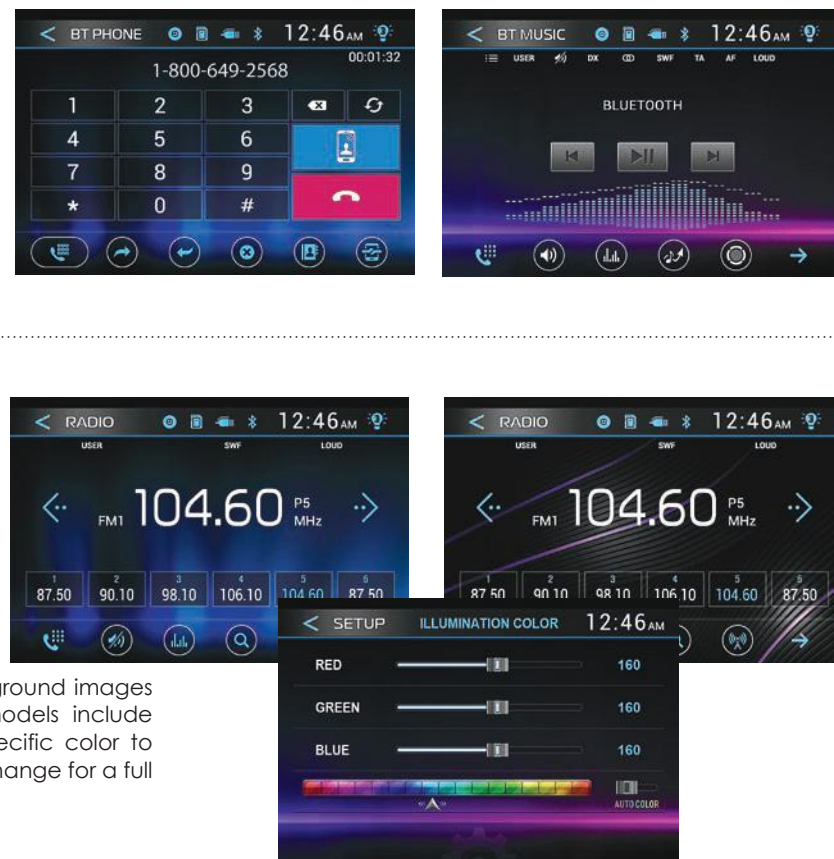

Customizing options include several preloaded background images & color changing graphic user interface. Select models include variable color front panel illumination. Choose a specific color to match your interior lighting scheme or random color change for a full color spectrum effect.

## MHL MobileLink Interface Cables

**HDM-i4** ~ iPhone4, iPhone4S, iPad2, & iPad3

**HDM-A2** ~ Galaxy 2 & Select 5-Pin Android Devices

**HDM-A3** ~ Galaxy 3, 4, 5, & Select 11-PIN Android Devices



5ft interface cable unlocks 1080p video and audio playback from MHL enabled appropriate micro connector for your mobile device. Farenheit MobileLink MHL interface cables also charge your mobile device. Available for select iOS and Android devices.



### ADDITIONAL SERIES DETAILS:

On-Screen Mirroring of Select Android Smart Devices (requires MHL MobileLink accessory cable, sold separate)  
Bluetooth V3.0 Hands-Free Calling from Enabled Phone  
A2DP Wireless MP3 Audio Playback from Enabled Devices  
Accepts OEM Steering Wheel Control Interfaces  
Custom Backgrounds & RGB Color Changing GUI  
Advanced FM/AM Tuner with RDBS Receiver

Playback from DVD & CD of MP3 & MP4  
Playback from 32GB SD/USB of MP3 & MP4  
ID3 MP3 Tag Reading for Track & Information  
AUX Audio Input for Personal Media Devices  
RCA A/V Input for Auxiliary Sources  
4-Band Audio Equalizer w/ User Presets  
Front & Rear Pre-Amp Audio Outputs  
Variable Subwoofer Pre-Amp Output

Variable Subwoofer Low Pass Crossover  
Video Output for Auxiliary Devices  
Rear View Camera Input w/ Trigger  
300w 4ch. MOSFET Speaker Outputs  
Multi-Region FM Frequency Stepping  
800x480 Widescreen Resolution  
400NIT LED Backlight




# MULTIMEDIA

## SOURCE UNITS



Bluetooth V3.0 with Enhanced Data Rate increases traditional data transfer rates to 2.1 Mbit/s. This lightning quick information transfer increases clarity & virtually eliminates unwanted distortion during calls and wireless MP3 audio playback. Most Bluetooth enabled Smartphones will transfer phone book contacts, view recent call logs, and stream MP3 audio tracks.

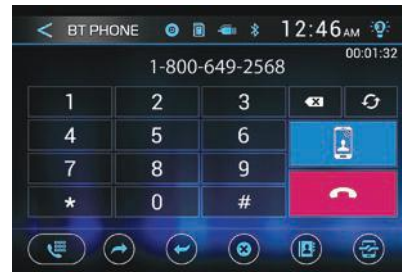

Customizing options include several preloaded background images & color changing graphic user interface. Select models include variable color front panel illumination. Choose a specific color to match your interior lighting scheme or random color change for a full color spectrum effect.

### PD-624B

2-DIN DVD, CD/MP3, SD/USB, AM/FM Receiver, w/ 6.2" LCD, & Bluetooth



# MULTIMEDIA

## SOURCE UNITS

### PD-724B

1-DIN DVD, CD/MP3, SD/USB, AM/FM Receiver, w/ Motorized 7" LCD, & Bluetooth



### PD-454B

1-DIN DVD, CD/MP3, SD/USB, AM/FM Receiver w/ Detachable 4.5" LCD & Bluetooth



#### ADDITIONAL SERIES DETAILS:

Bluetooth V3.0 Hands-Free Calling from Enabled Phone  
A2DP Wireless MP3 Audio Playback from Enabled Phone  
Accepts OEM Steering Wheel Control Interfaces  
Custom Backgrounds & RGB Color Changing GUI  
Advanced FM/AM Tuner with RDS Receiver  
Playback from DVD & CD of MP3 & MP4

Playback from 32GB SD/USB of MP3 & MP4  
ID3 MP3 Tag Reading for Track & Information  
AUX Audio Input for Personal Media Devices  
RCA A/V Input for Auxiliary Sources  
4-Band Audio Equalizer w/ User Presets  
Front & Rear Pre-Amp Audio Outputs  
Variable Subwoofer Low Pass Crossover

Variable Subwoofer Pre-Amp Output  
Video Output for Auxiliary Devices  
Rear View Camera Input w/ Trigger  
300w 4ch. MOSFET Speaker Outputs  
Multi-Region FM Frequency Stepping  
800x480 Widescreen Resolution  
400NIT LED Backlight



# MULTIMEDIA

## SOURCE UNITS

### PD-651B

2-DIN Multimedia Source Unit w/ 6.5" LCD Touch Screen w/ Bluetooth



TOUCH SCREEN Bluetooth DVD USB AUX INPUT X300 WATT 4CH. AMPLIFIER

### PD-342B

2-DIN DVD, CD/MP3, USB/SD, AM/FM Receiver & 3.4" LCD w/ Bluetooth



Bluetooth DVD USB AUX INPUT X300 WATT 4CH. AMPLIFIER



#### ADDITIONAL SERIES DETAILS:

Bluetooth V2.0 Hands Free Calling From Enabled Devices  
A2DP Wireless MP3 Audio Playback From Enabled Devices  
Accepts OEM Steering Wheel Control Interface  
Playback from DVD & CD of MP3 & MP4  
Playback from 32GB SD/USB of MP3 & MP4  
ID3 MP3 Tag Reading for Track & Artist Information  
AUX A/V Input for Personal Media Devices  
Front & Rear Pre-Amp Audio Outputs

### PTID-8920B

1-DIN Multimedia Source Unit w/ 7" Flip-Up LCD Touch Screen w/ Bluetooth



### PD-710

PD-710B (w/ Bluetooth V2.0)

1-DIN Multimedia Source Unit w/ Detachable 7" LCD Touch Screen



TOUCH SCREEN Bluetooth DVD USB AUX INPUT X300 WATT 4CH. AMPLIFIER



TOUCH SCREEN Bluetooth DVD USB AUX INPUT X300 WATT 4CH. AMPLIFIER

Subwoofer Pre-Amp Audio Output  
Video Output for Auxiliary Devices  
Rear View Camera Input w/ Trigger  
300w 4ch. MOSFET Speaker Outputs  
Custom & Preset Equalizer Settings  
Multi-Region FM Frequency Stepping  
800x480 Widescreen Resolution  
400 NIT LED Brightness



# MULTIMEDIA

## SOURCE UNITS

### PD-344 PD-344B (w/ Bluetooth V2.0)

1-DIN A/V Source Unit w/ Detachable 3.4" LCD Screen



1-DIN Multimedia Receiver w/ High Definition 3.4" LCD Display  
Theft Deterrent Detachable Faceplate w/ Carry Case  
Bluetooth V2.0 Hands Free Calling From Enabled Devices  
A2DP Wireless MP3 Audio Playback From Enabled Devices  
Playback from DVD & CD of MP3 & MP4  
Playback from 32GB SD/USB of MP3 & MP4  
MP3 ID3 Tag Reading of MP3 Files  
AUX A/V Input for Personal Media Devices  
Front & Rear Pre-Amp Audio Outputs  
Video Output for Auxiliary Devices  
Rear View Camera Input w/ Trigger  
52w x 4 MOSFET Speaker Outputs  
Custom & Preset Equalizer Settings  
Multi-Region FM Frequency Stepping  
720x420 High Definition Widescreen Resolution  
400 NIT Energy Efficient LED Display Backlight



### PD-930B

1-DIN Multimedia Source Unit w/ Detachable 9.3" LCD Touch Screen



Motorized 9.3" LCD Touchscreen w/ Angle Adjustment  
Theft Deterrent Detachable Faceplate w/ Carry Case  
Standard & Extended Installation Sleeve & Trim Ring Included  
iGlass Low Glare Anti-Reflection LCD Touch Screen Technology  
Accepts Fahrenheit OEM & Steering Wheel Control Interface  
Bluetooth V2.0 Hands Free Calling From Enabled Devices  
A2DP Wireless MP3 Audio Playback From Enabled Devices  
Playback from DVD & CD of MP3 & MP4  
Playback from 32GB SD/USB of MP3 & MP4  
ID3 MP3 Tag Reading for Track & Artist Information  
AUX A/V Input for Personal Media Devices  
90° Angle USB & AUX A/V Input Cable Included  
Front & Rear Pre-Amp Audio Outputs  
Variable Subwoofer Pre-Amp Output  
Video Output for Auxiliary Devices  
Rear View Camera Input w/ Trigger  
52w x 4 MOSFET Speaker Outputs  
Custom & Preset Equalizer Settings  
Multi-Region FM Frequency Stepping  
800x480 High Definition Widescreen Resolution  
400 NIT Energy Efficient LED Display Backlight



# DIGITAL MEDIA

## SOURCE UNITS

### PDR-654B

2-DIN Digital Media Receiver w/ 6.5" LCD Touch Screen w/ Bluetooth



### PDR-780B

1-DIN Digital Media Receiver w/ 7" Flip-Up LCD Touch Screen w/ Bluetooth



### PDR-340B

1-DIN Digital Media Receiver w/ Detachable 3.4" LCD Screen w/ Bluetooth



**ADDITIONAL SERIES DETAILS:**  
Bluetooth Hands Free Calling from Enabled Phone  
A2DP MP3 Audio Playback from Enabled Device  
Accepts OEM Steering Wheel Control Interface  
Playback from 32GB SD/USB of MP3 & MP4  
720p HD Video Playback of MP4, AVI & More

Audio Playback of MP3, AAC, AC3, & WMA  
Picture Viewer of JPEG, PNG & GIF  
ID3 Tag Reading for Track & Artist Information  
AUX Audio Input for Personal Media Devices  
18 FM / 12 AM Station Memory  
52w x 4 MOSFET Powered Speaker Level Outputs

Front & Rear Pre-Amp Audio Outputs  
Fixed 80Hz Subwoofer Output (ex. 340)  
Custom Audio Staging & EQ Controls  
Multi-Region FM/AM Frequency Stepping  
800x480 HD Resolution  
400 NIT LCD Brightness



# CD AUDIO

## SOURCE UNITS

### PCD-52B

2-DIN CD/MP3, AM/FM Receiver w/ SD/USB Playback w/ Bluetooth

NEW



### ADDITIONAL SERIES DETAILS:

Bluetooth V2.0 Hands Free Calling from Enabled Phone  
A2DP MP3 Audio Playback from Enabled Device  
Playback from 32GB USB of MP3 & WMA  
Playback from CD, CDR, CDRW of MP3 & WMA  
AUX Audio Input for Personal Media Devices  
Front & Rear Pre-Amp Output  
300w 4ch MOSFET Speaker Outputs  
Custom & Pre-Set Equalizer Settings  
Audio Staging Controls  
12/24 Hour Digital Clock  
Remote Control Included  
Theft Deterrent detachable face (1-Din Only)  
Faceplate Carry Case Included

### PCD-51

PCD-51B (w/ Bluetooth V2.0)

1-DIN CD/MP3 Player, AM/FM Receiver w/ SD/USB Playback

NEW



# DIGITAL AUDIO

## SOURCE UNITS

### PL-52B

2-DIN Digital Media Receiver w/ SD/USB Playback & AM/FM Receiver w/ Bluetooth

NEW



### ADDITIONAL SERIES DETAILS:

Bluetooth V3.0 Hands Free Calling From Enabled Devices  
A2DP Wireless MP3 Audio Playback From Enabled Devices  
Playback from 32GB SD/USB of MP3 & MP4  
ID3 MP3 Tag Reading for Track & Artist Information  
AUX Audio Input for Personal Media Devices  
Front & Rear Pre-Amp RCA Outputs  
Subwoofer Pre-Amp RCA Output  
300w 4ch. MOSFET Speaker Outputs  
Custom & Preset Equalizer Settings  
Remote Control Included  
Theft Deterrent detachable face (1-Din Only)  
Multi-Region FM Frequency Stepping



### PL-50 Fixed Panel

PL-51B Detachable (w/ Bluetooth V2.0)

1-DIN Digital Media Receiver w/ SD/USB Playback & AM/FM Receiver

NEW



### PADVD-390

1-DIN DVD Player w/32GB SD/USB Playback

Playback from DVDR/RW of MP4 &  
Playback from 32GB USB of MP4, &  
In-Dash, Floor, & Vertical Mounting Brackets Included  
DIN Size Trim Ring For In-Dash Mounting Included  
Flash Memory for Last Position Recall  
Remote Control & IR Repeater Included  
OSD On Screen Display  
Digital Anti-shock  
A/V Pre-amp Outputs, 2V  
Dimensions: 6.4" x 6.2" x 2"



DVD





# OVERHEAD ENTERTAINMENT

## PMD-143H

Ceiling Mount DVD Entertainment System w/  
High Definition 14.3" LCD & MHL MobileLink Input

Interchangeable Color Skins (beige, black, grey)  
Car-Spec DVD Drive for Extreme Temperature Exposure  
MHL MobileLink Input for Smart Device Connectivity  
Playback from DVDR/RW of 720p MP4  
Playback from 32GB SD Card or USB of 720p MP4  
Flash Memory for Last Position Recall  
Single Channel Wireless IR Transmitter (use HIR-1 or HP-11S)  
8-ch FM Stereo Transmitter for OEM Integration  
RCA A/V Input for Auxiliary Sources  
RCA A/V Output for Multiple Component Integration  
Triggered Bright White LED Dome Light  
NTSC / PAL Auto Selection  
1,366 x 768 16:9 Widescreen Resolution  
400 NIT Screen Brightness  
Dimensions: 12.75" w x 7.5" d x 2" h



## MHL MobileLink Interface Cables

**HDM-i4** ~ iPhone4, iPhone4S, iPad2, & iPad3

**HDM-A2** ~ Galaxy 2 & Select 5-Pin Android Devices

**HDM-A3** ~ Galaxy 3, 4, 5, & Select 11-PIN Andriod Devices

5ft interface cable unlocks 1080p video and audio playback from MHL enabled appropriate micro connector for your mobile device. Farenheit MobileLink MHL interface cables also charge your mobile device. Available for select iOS and Android devices.



## PMD-112

Ceiling Mount DVD Entertainment System w/ 11.2" LCD

## PT-110CM

Ceiling Mount 11.2" LCD Monitor

Interchangeable Color Skins (beige, black, grey)  
Color Matched Trim Rings for Sculptured Ceilings Included  
45°/45° Swivel Screen for Angled Viewing  
Playback from DVDR/RW of 720p MP4  
Playback from 32GB SD Card or USB of 720p MP4  
Flash Memory for Last Position Recall  
Single Channel Wireless IR Transmitter (use HIR-1 or HP-11S)  
8-ch FM Stereo Transmitter for OEM Integration  
A/V Input for Auxiliary Sources  
Rear Panel RCA A/V Input for Game Console  
A/V Output for Multiple Component Integration  
Rear Panel Play/Pause Control  
Triggered Bright White LED Dome Light  
Full Function Remote Control Included  
NTSC / PAL Auto Selection  
800 x 480 16:9 Widescreen Resolution  
400 NIT Screen Brightness  
Dimensions: 14" w x 12.5" d x 2.5" h



# OVERHEAD ENTERTAINMENT

## PMD-104X

Ceiling Mount DVD Entertainment System w/ 10.3" LCD

10.3" High Resolution LCD Screen  
1,024 x 600 16:9 Widescreen Resolution  
Interchangeable Color Skins (beige, black, grey)  
Automotive-Spec DVD Transport for Extreme Conditions  
Playback from DVDR/RW of MP4 & AVI  
Playback from 32GB SD/MMC or USB of 1080p MP4, AVI, or  
RCA A/V Input from Auxiliary Sources  
Rear Panel RCA A/V Input from Game Console  
Pre-Amp Audio Outputs  
Single Channel Wireless IR Transmitter (use HIR-1 or HP-11S)  
330 Ch. FM Stereo Transmitter for OEM Integration  
Full Function Remote Control Included  
NTSC / PAL Auto Selection  
400 NIT Screen Brightness  
Dimensions: 13" w x 11" d x 2.5" h



## PMD-102X

Ceiling Mount DVD Entertainment System w/ 10.2" LCD

Interchangeable Color Skins (beige, black, grey)  
45°/270° Swivel Screen for Angled Viewing  
Playback from DVDR/RW of 720p MP4  
Playback from 32GB USB of 720p MP4  
Flash Memory for Last Position Recall  
FM Stereo Transmitter for OEM Integration  
Single Channel Wireless IR Transmitter (use HIR-1 or HP-11S)  
A/V Output for Multiple Component Integration  
A/V Inputs for Auxiliary Sources  
Rear Panel RCA A/V Input for Game Console  
Rear Panel Play/Pause Control  
Triggered Bright White LED Dome Light  
Full Function Remote Control Included  
NTSC / PAL Auto Selection  
1,024x600 16:9 Widescreen Resolution  
400 NIT Screen Brightness  
Dimensions: 11.5" w x 11" d x 2.5" h



## NEW PMD-90

Ceiling Mount DVD Entertainment System w/ 9" LCD

Interchangeable Color Skins (beige, black, grey)  
Color Matched Trim Ring for Sculptured Ceiling Included  
45°/45° Swivel Screen for Angled Viewing  
Playback from DVDR/RW of 720p MP4 & Other Video Formats  
Playback from 32GB SD/USB of 720p MP4 & Other Video Formats  
Single Channel Wireless IR Transmitter (use HIR-1 or HP-11S)  
8-ch FM Stereo Transmitter for OEM Integration  
A/V Input for Auxiliary Sources  
A/V Output for Multiple Component Integration  
Triggered Bright White LED Dome Light  
NTSC / PAL Auto Selection  
800 x 480 16:9 Widescreen Resolution  
400 NIT Screen Brightness  
Dimensions: 11" w x 9.75" d x 2.5" h






# REAR SEAT ENTERTAINMENT

**NEW** **HDVD-94T**  
Universal Replacement Headrest w/ DVD Player & 9" Touchscreen LCD



DVD



**ADDITIONAL SERIES DETAILS:**  
Forward/Backwards Tilting Headrest w/ 9" Touchscreen LCD  
3 Changeable Color Skins Included (grey, beige, black)  
Playback from DVDR/RW or 720p MP4 (HDVD only)  
Playback from 32GB SD Card or USB of MP4 (HDVD only)  
Dual Channel Wireless IR Transmitter (use HIR-2 or HP-12S)  
FM Stereo Transmitter for OEM Integration (HDVD only)  
AUX A/V Input for Game Console or Personal Media Devices  
RCA A/V Input for Auxiliary Source or Opposite Headrest


RCA A/V Output to Auxiliary Source or Opposite Headrest  
3/8" Locking Pole w/ 1/2" & 9/16" Adapters  
4.75" ~ 8.25" Pole Width Adjustment  
NTSC / PAL Auto Selection  
800 x 480 16:9 Widescreen Resolution  
400 NIT Screen Brightness  
Dimensions: 11.5" w x 8.5" h x 5" d

# REAR SEAT ENTERTAINMENT

**NEW** **HDVD-94** Universal Replacement Headrest w/ DVD Player & 9" LCD  
**H-94** Universal Replacement Headrest w/ 9" LCD



DVD

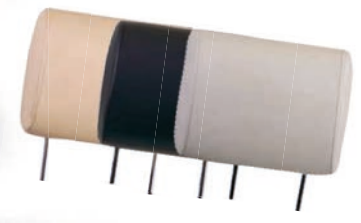



# REAR SEAT

## ENTERTAINMENT

### HDVD-91CC

Universal Replacement Headrest w/ DVD Player & 9" LCD

### HDVD-71CC

Universal Replacement Headrest w/ DVD Player & 7" LCD

### H-91CC

Universal Replacement Headrest w/ 9" LCD

### H-71CC

Universal Replacement Headrest w/ 7" LCD



DVD

USB

A/V  
INPUT

IR  
Transmitter

FM  
Transmitter

#### ADDITIONAL SERIES DETAILS:

Forward/Backwards Tilting Headrest  
3 Changeable Color Skins Included (grey, beige, black)  
Playback from DVDR/RW of 720p MP4 (HDVD only)  
Playback from 32GB SD Card or USB of MP4 (HDVD only)  
Dual Channel Wireless IR Transmitter (use HIR-2 or HP-12S)  
FM Stereo Transmitter for OEM Integration (HDVD only)  
AUX A/V Input for Game Console or Personal Media Devices  
RCA A/V Input for Auxiliary Source or Opposite Headrest

RCA A/V Output to Auxiliary Source or Opposite Headrest  
Hardwired Headphone Output  
3/8" Locking Pole w/ 1/2" & 9/16" Adapters  
4.75" ~ 8.25" Pole Width Adjustment  
NTSC / PAL Auto Selection  
800 x 480 16:9 Widescreen Resolution  
400 NIT Screen Brightness  
Dimensions: 11.5"w x 8.5"h x 6"d (91CC)  
Dimensions: 10"w x 7"h x 5.5"d (71CC)

# REAR SEAT

## ENTERTAINMENT

### HDVD-71HD

Universal Replacement Headrest Preloaded w/ DVD Player, 7" LCD, & MHL MobileLink



Mobile  
LINK

DVD

USB

A/V  
INPUT

IR  
Transmitter

FM  
Transmitter

#### ADDITIONAL DETAILS:

Forward/Backwards Tilting Headrest w/ 7" LCD & DVD  
MobileLink Input for Mobile Device Screen Mirroring  
2A Charging of Applicable Mobile Devices by USB  
(requires MobileLink interface cable, sold separate)  
3 Changeable Color Skins Included (grey, beige, black)  
Playback from DVD or DVD-R of 720p MP4 & Other Formats  
Playback from USB of 720p MP4 & Other Video Formats  
AUX A/V Input for Game Console or Personal Media Devices  
RCA A/V Input for Auxiliary Source or Opposite Headrest

RCA A/V Output to Auxiliary Source or Opposite Headrest  
Dual Channel Wireless IR Transmitter (use HIR-2 or HP-12S)  
Built-in FM Stereo Transmitter for OEM Integration  
3.5mm Headphone Output on Front Panel  
3/8" Locking Pole w/ 1/2" & 9/16" Adapters  
4.375" ~ 8.25" Pole Width Adjustment  
Automatic NTSC & PAL Video Playback  
800 x 480 16:9 Widescreen Resolution  
400 NIT Screen Brightness  
Dimensions: 10"w x 7"h x 5.50"d

#### MHL MobileLink Interface Cables

**HDM-i4** ~ iPhone4, iPhone4S, iPad2, & iPad3

**HDM-A2** ~ Galaxy 2 & Select 5-Pin Android Devices

**HDM-A3** ~ Galaxy 3, 4, 5, & Select 11-PIN Android Devices

5ft interface cable unlocks 1080p video and audio playback from MHL enabled appropriate micro connector for your mobile device. Fahrenheit MobileLink MHL interface cables also charge your mobile device. Available for select iOS and Android devices.

MHL  
Mobile High-Definition Link






# REAR SEAT ENTERTAINMENT

## PHAD-7

Universal Headrest Mount DVD Player w/ 7" LCD

Bracket Mount DVD Player Solution for Vehicles w/ Active Headrest  
Front Loading DVD Player for DVD/RW 720P Playback  
32GB USB & SD Card Readers for MP4 Playback  
Dual Channel Wireless IR Transmitter (use HP-12S)  
FM Stereo Transmitter for Easy OEM Integration  
AUX A/V Input for Game Console or Personal Media Devices  
RCA A/V Input for Auxiliary Source or Opposite Headrest  
RCA A/V Output to Auxiliary Source or Opposite Headrest  
3.5mm Hardwired Headphone Output Jack  
3 Changeable Colors Skins Included (grey, beige, & black)  
4.75"-8.25" Pole Width Adjustment  
Various Pole Diameter Adapters Included  
NTSC / PAL Auto Selection  
800 x 480 16:9 Widescreen Resolution  
400 NIT Screen Brightness

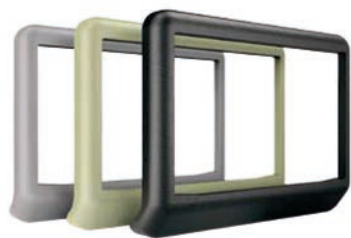

DVD

USB

A/V  
INPUT

IR  
Transmitter

FM  
Transmitter

## PT-712IRA

7" Dual Channel IR Headrest Monitor

Two Auxiliary A/V Input  
Dual Channel IR Transmitter  
Wired Headphone Output  
Low Reflection TFT-LCD Monitor  
Ultra Bright LED Backlighting  
Selectable Aspect Modes

Preset/Manual Image Control  
Dimmer Control  
Remote Control  
NTSC/PAL Selection  
480 x 234 (16:9) Image Resolution  
Cutout Dimensions: 7"w x 4.75"h x .75"d



## PT-700MHR

7" LCD Headrest Monitor

7" Amorphous Active Matrix TFT/LCD Monitor  
Ultra Bright LED Backlighting  
Ignition Power On/Off Optional  
Single Video Input  
Selectable Aspect Modes  
Preset/Manual Image Control  
NTSC/PAL Selection

Sculptured Trim Ring Included  
Remote Control Included  
480 x 234 (16:9) Image Resolution  
400NIT Panel Brightness  
Cutout Dimension: 7"w x 4.5"h x 1"d



# WIRELESS HEADPHONES



## HP-10S Single 1ch. IR Headphone

EVA hard carrying case included  
Foldable Ear Pads for Compact Storage  
On/Off Switch Saves Battery Life  
Auto Power Off Function  
Auto Mute Function  
Variable Volume Control  
ALC Auto Level Control



## HP-12S Single 2ch. IR Headphone

Adjustable Headphone Straps  
Channel Selectable From Each Headphone  
Ear Pads Fold Flat for Seat Pocket Storage  
EVA hard Carry Case Included  
MP-3 Player Input Via 3.5mm Jack  
On/Off Switch Saves Battery Life  
Auto Power Off Function  
Auto Mute Function  
Variable Volume Control  
ALC Auto Level Control



## WLHP-100 Single 1ch. IR Headphone WLHP-200 Single 2ch. IR Headphone

Adjustable Headphone Straps  
Single Channel UHF IR Receiver  
ON/OFF Switch Saves Battery Life  
Variable Volume Control  
ALC Auto Level Control  
Auto Off and Auto Mute



Single 1ch. IR Headphone - White  
Single 1ch. IR Headphone - Black  
Single 2ch. IR Headphone - White  
Single 2ch. IR Headphone - Black

**HIR-1W**  
**HIR-1B**  
**HIR-2W**  
**HIR-2B**

Single 1ch or 2ch Infrared Headphone  
Available in Graphite Black or Snow White  
Independently Swiveling Ear Cup  
Ear Cup Fold Flat for Convenient Storage  
Soft Comfortable Faux Leather Ear Pad  
Adjustable Headband w/ Silicone Headliner  
Built-in Momentary Mute Switch  
25ft Maximum Operational Range

Auto Off Timer Increases Battery Life  
40mm Mylar Extended Frequency Driver  
Variable Volume Level Control  
Soft Touch Cinch Carry Bag Included  
Requires 2 AAA Batteries (included)  
Ch. 1: L 2.3mHz, R 2.8mHz  
Ch. 2: L 3.2mHz, R 3.8mHz

## HP-11S Single 1ch. IR Headphone HP-22IRT Pair 1ch. IR Headphones and Transmitter

Ear Pads Fold Flat for Seat Pocket Storage  
Adjustable Headphone Straps  
EVA hard Carry Case Included  
MP-3 Player Input Via 3.5mm Jack  
On/Off Switch Saves Battery Life  
Auto Power Off Function  
Auto Mute Function  
Variable Volume Control  
ALC Auto Level Control



## HP-900S Single 2ch. 900MHz Headphone HP-902RFT Pair 2ch. 900MHz Headphones & Transmitter

Dual Stereo Audio Inputs  
Channel Selectable From Each Headphone  
100ft. Operational Distance  
Adjustable Headphone Straps  
Ear Pads Fold Flat for Seat Pocket Storage  
EVA hard Carry Case Included  
MP-3 Player Input Via 3.5mm Jack  
On/Off Switch Saves Battery Life  
Auto Power Off Function  
Auto Mute Function  
Variable Volume Control  
ALC Auto Level Control





# REAR VIEW CAMERAS

## LP-2CSB

License Plate Frame w/ Night Vision Camera, Back-Up Sensors, On-Screen Distance Gauge, & Proximity Alerts

U.S. Patent #7,106,183 B2  
3 Object Sensors w/ Proximity Alert  
1/4" CCD Color Camera  
0.5 LUX Low Light Lens  
Waterproof Camera Housing  
Waterproof External Wire Connections  
Vertically Pivoting Camera Housing  
7' Effective Viewing Distance  
Inconspicuous Speaker for Alerts  
8 IR LEDs for Night Viewing  
On-Screen Distance Gauge  
130° Capture Angle  
RCA Video Output  
Cast Steel Alloy Frame  
Reversed Image  
640 x 480 Resolution



## L-3CSB

License Plate Mount Night Vision Camera w/ Back-Up Sensors, On-Screen Distance Gauge, & Proximity Alerts

U.S. Patent #7,106,183 B2  
2 Object Sensors w/ Proximity Alert  
1/4" CCD Color Camera  
0.5 LUX Low Light Lens  
Waterproof Camera Housing  
Waterproof Wire Connections  
Vertically Pivoting Camera Housing  
7' Effective Viewing Distance

Inconspicuous Speaker for Alerts  
130° Capture Angle  
8 IR LEDs for Night Viewing  
On-Screen Distance Gauge  
RCA Video Output  
Cast Steel Alloy  
Reversed Image  
640 x 480 Resolution



## CAM-4LF

Black Chrome License Plate Frame with Camera

Zinz Alloy Metal License Plate Frame  
Vertically Pivoting Camera Housing  
On-Screen Distance Gauge  
1/4" CCD Wide View Color Camera  
0.1 LUX Low Light Lens  
163° Capture Angle  
RCA Video Output  
Reversed Image  
648 x 488 Resolution



## CAM-3L

Black Chrome License Plate Trim with Camera

Zinz Alloy Metal License Plate Trim  
Vertically Pivoting Camera Housing  
On-Screen Distance Gauge  
1/4" CCD Wide View Color Camera  
0.1 LUX Low Light Lens  
163° Capture Angle  
RCA Video Output  
Reversed Image  
648 x 488 Resolution



## CAM-2

1" Surface Mount Rear View Camera

Vertically Pivoting Mounting Bracket  
Waterproof Zinc Camera Housing  
On-Screen Distance Gauge  
1/4" CCD Color Camera  
0.1 Lux Low Light Lens  
163° Capture Angle  
RCA Video Outputs  
Reversed Image  
648 x 488 Resolution



## CAM-1

1" Under Trunk Lid Rear View Camera

Threaded Under Trunk Lid Mounting  
Waterproof Zinc Camera Housing  
On-Screen Distance Gauge  
1/4" CCD Color Camera  
0.1 Lux Low Light Lens  
163° Capture Angle  
RCA Video Outputs  
Reversed Image  
648 x 488 Resolution



## CCD-4XS

1" Surface Mount Rear View Camera

Vertically Pivoting Mounting Bracket  
Waterproof Camera Housing  
On-Screen Distance Gauge  
1/4" CCD Color Camera  
0.1 Lux Low Light Lens  
163° Capture Angle  
RCA Video Outputs  
Reversed Image  
648 x 488 Resolution



## CCD-6XS

Water-Proof Surface Mount Rear View Camera

1/3" CCD GHIGH Definition Color Camera by PixelPlus  
IP67 Waterproof Nickel Plated Zinc Alloy Housing  
Threaded Mounting System for Easy DIY Installation  
Vertical Image Inversion for Front/Rear Application  
Optional On-Screen Distance Gauges  
Rear View Image Pre-Reversed  
RCA Video Output  
163° Viewing Angle  
0.1 LUX Low Light Lens  
682x496 Resolution



## CCD-1

Water-Proof Surface Mount Rear View Camera

Vertically Pivoting Stand for Angled Installation  
Waterproof Camera Housing  
8 IR LEDs for Night Viewing  
1/3" Sharp CCD Color Camera  
0.1 LUX Low Light Lens  
RCA Video Output  
Reversed Image  
512 x 582 Resolution



## EFM-02

PLL FM Modulator

PLL Phase Lock Loop Tuner Outputs  
Frequency Settings Via Slide Switch  
Ground Loop Isolator Circuit  
Shielded Metal Housing For Noise Rejection



## VB-1

One In & Four Output Video Signal Booster

Four Individual Output Trimmer Gain Controls  
Shielded Metal Housing For Noise Rejection  
4 Video Output Gain control





# BAMF


AMPLIFIERS

## MAKE YOURSELF HEARD!

NEW

Class A/B Full Range & Class D Monoblock Amplifiers  
Die-Cast Aluminum Alloy Heatsink for Optimum Dissipation  
2-ohm Stereo & 4-ohm Bridged Full Range Operation  
1-ohm Stable Monoblock Operation for MAX Power  
Bridge 2 Monoblocks Together for Double Power!  
MOSFET Power Supply w/ Audiophile Grade IR™ Transistors  
Military Grade SMT PCB Maintains Dynamic Performance  
Direct Short, Thermal, & Overload Circuits Protect Amplifier  
Easy DIY Install Single Sided Terminals & Controls  
Angled Wire Terminals Secure Wire Connections  
Chassis Integrated Aluminum Mounting Points  
Variable 12dB High Pass, Low Pass, & Subsonic Crossovers  
200mV-6V Low Level RCA Inputs  
4g Power Wire & 8g Speaker Wire Outputs  
12dB Bass Boost Increases Low Octave Harmonics  
180° Phase Shift Improves Low Octave Dynamics (monoblock)  
Dash Mount Gain Control Module Included (select models)

Class A/B	Max Power	RMS Power	RMS Power	RMS Power	Dimensions	Gain Control
Full Range	(watts)	4Ω Bridged, 14.4V	2Ω, 14.4V	4Ω, 14.4V	(2.25"h x 8.5"w)	Included
BAMF4-1200	1,200w	2 x 300	4 x 150	4 x 75	11.25"	-
BAMF4-1800	1,800w	2 x 450	4 x 225	4 x 110	13.25"	-
BAMF5-2500	2,500w	2 x 200+ 1 x 850 (2Ω)	4 x 100 + 1 x 850	4 x 50 + 1 x 425	17"	Included
BAMF1-3000D	3,000w	1 x 1,500 (1Ω)	1 x 1,000	1 x 700	11.25"	Included
BAMF1-5000D	5,000w	1 x 2,500 (1Ω)	1 x 1,700	1 x 1,100	13.25"	Included
BAMF1-8000D	8,000w	1 x 4,000 (1Ω)	1 x 2,700	1 x 1,800	17"	Included

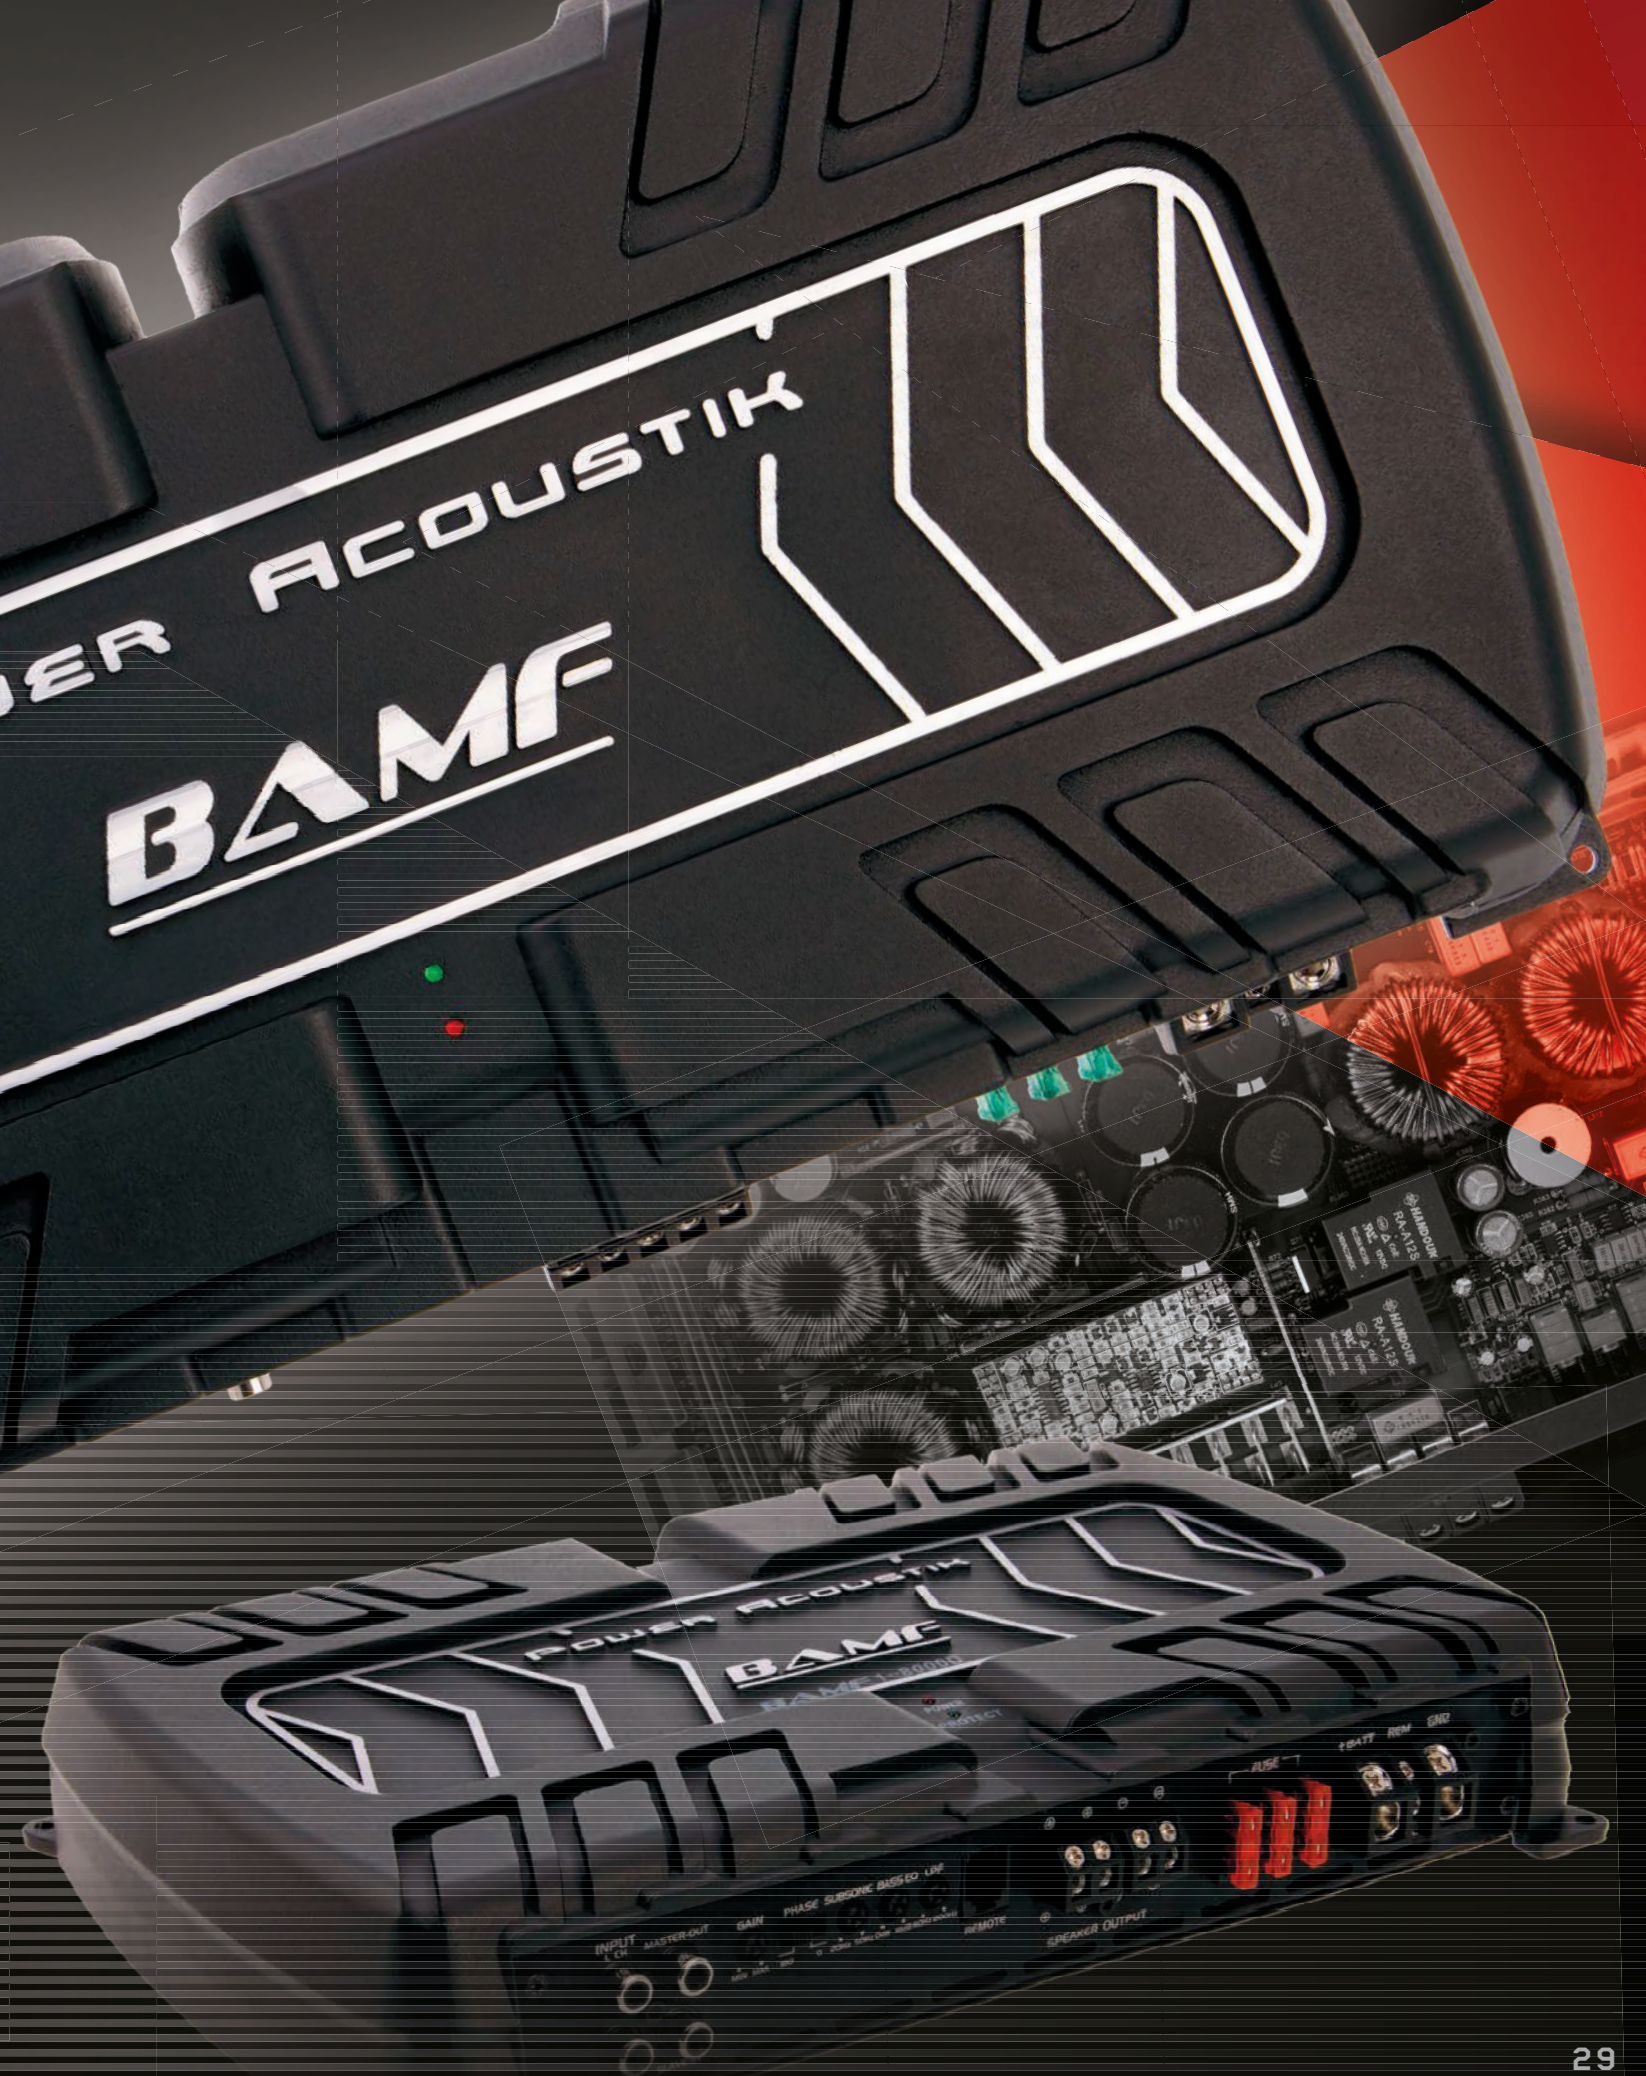




# EDGE

## AMPLIFIERS

New for 2016, Edge amplifiers are the next step in performance and value. Taking advantage of our tried and true class A/B full range and improved efficiency class d monoblock platforms, Edge amplifiers continue down the road of reliability and longevity you know well. Satin silver chassis, engraving, and accents teetering on the edges bring a high end appeal to traditional performance.

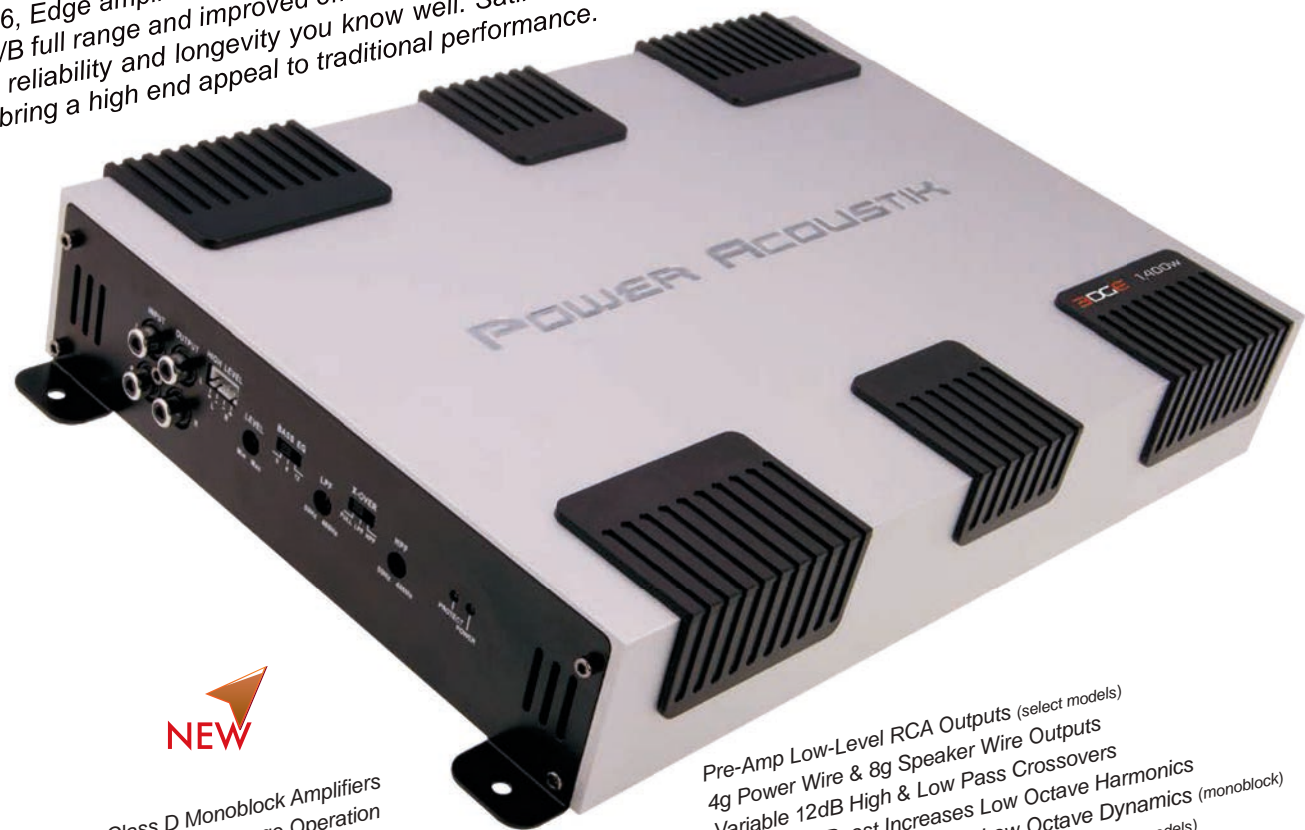

NEW

Class A/B Full Range & Class D Monoblock Amplifiers  
2-ohm Stereo & 4-ohm Bridged Full Range Operation  
1-ohm Stable Monoblock Operation for MAX Power  
Bridge 2 Monoblocks Together for Double Power!  
Military Grade PCB w/ PWM MOSFET Power Supply  
Direct Short, Thermal, & Overload Circuit Protection  
High/Speaker Level & Low Level/RCA Input  
200mV-6V Low Level RCA Input

Edge Amplifiers	Max Power (watts)	RMS Power 4Ω Bridged, 14.4V	RMS Power 2Ω, 14.4V	RMS Power 4Ω, 14.4V	Dimensions (2.25" h x 9" w)	Gain Control Included
EG2-1400	1,400w	1 x 700	2 x 350	2 x 175	12.75"	-
EG4-1000	1,000w	2 x 250	4 x 125	4 x 65	10.25"	-
EG4-1500	1,500w	2 x 370	4 x 185	4 x 95	12.75"	-
EG5-2800	2,800w	2 x 320 + 1 x 760 2Ω	4 x 160 + 1 x 380	4 x 80 + 1 x 380	19.75"	Included
EG1-2500D	2,500w	2,250 x 1 (1Ω)	800 x 1	400 x 1	10"	Included
EG1-4500D	4,500w	2,250 x 1 (1Ω)	1,500 x 1	750 x 1	13"	Included
EG1-7000D	7,000w	3,500 x 1 (1Ω)	2,300 x 1	1,100 x 1	16.25"	Included
EG1-10000D	10,000w	5,000 x 1 (0.5Ω)	3,300 x 1 (1Ω)	1,600 x 1 (2Ω)	20.5"	Included

Pre-Amp Low-Level RCA Outputs (select models)  
4g Power Wire & 8g Speaker Wire Outputs  
Variable 12dB High & Low Pass Crossovers  
12dB Bass Boost Increases Low Octave Harmonics  
180° Phase Shift Improves Low Octave Dynamics (monoblock)  
Dash Mount Remote Control Included (select models)



Dash Mount Gain Control Included

# RAZOR

## AMPLIFIERS

We're in a time where small is "in". Smaller, more economic vehicles are more and more desirable. But that doesn't mean you have to sacrifice big power for your system. Razor amplifiers pack huge power into small chassis thanks to efficient Full-Range Class D topology and SMT circuitry. Complimented with every possible preamp adjustment, the Razor amplifiers leave nothing to be desired...

Newest additions include a 3,000w 4ch model, and a 1-ohm stable 3,500w monoblock...



Dash Mount Gain Control Included

Installs in Virtually ANY Location!  
90% Efficient Full Range Class D Technology



Compact 4.75" Chassis Design for Installation Versatility  
MOSFET Power Supply w/ Audiophile Grade IR™ Transistors  
Military Grade SMT PCB Maintains Dynamic Performance  
2-ohm Stereo & 4-ohm Bridged Full Range Operation  
2-ohm Minimum Impedance Stability (monoblocks)  
Direct Short, Thermal, & Overload Circuits Protect Amplifier  
200mv-6V Low Level RCA Inputs  
High Level Input w/ Signal Sense Auto Turn-on  
Variable 12dB High Pass & Low Pass Crossovers  
10-50Hz Variable 12dB Subsonic Crossover Protects Subwoofers  
12dB Bass Boost Increases Low Octave Harmonics (monoblocks)  
Dash Mount Gain Control Module Included (select models)

RAZOR CLASS D	Max Power (watts)	RMS Power 4Ω Bridged, 14.4V	RMS Power 2Ω, 14.4V	RMS Power 4Ω, 14.4V	Dimensions (4.75" w x 1.625" h)	Gain Control Included
RZ2-1300D	1,300	1 x 540	2 x 270	2 x 185	5.5"	-
RZ4-1200D	1,200	2 x 300	4 x 150	4 x 100	9"	-
RZ4-2000D	2,000	2 x 500	4 x 250	4 x 190	11"	-
RZ4-3000D	3,000	2 x 750	4 x 375	4 x 285	12.25"	-
RZ5-2500D	2,500	300 x 2 + 600 x 1	150 x 4 + 600 x 1	100 x 4 + 400 x 1	12.25"	Included
RZ1-1500D	1,500	-	1 x 900	1 x 600	10"	Included
RZ1-2300D	2,300	-	1 x 1,400	1 x 900	11"	Included
RZ1-3500D	3,500	1 x 2,100	1 x 1,400	1 x 900	12.25"	Included



# Crypt

## AMPLIFIERS

Don't let these little monsters fool you. The latest and greatest of class D full range technology allows us to pack 10lbs of KICK YOUR ASS in less than 2lb chassis. Once regarded as "dirty power", class Ds stable performance, thanks to high power capability, maximum efficiencies, and low tolerance components, rivals traditional full range applications. Minimal power requirements, ultra micro footprint, unbelievable sound quality, and easy install make Crypt amplifiers great for any car, motorcycle, boat, or off-road vehicle...



90%+ Efficient  
Class D Full Range  
**ONLY 3" x 6" !**  
Install-Me-Anywhere  
Micro Footprint

Hybrid Aluminum Alloy Heatsink for Optimum Dissipation  
2-ohm Stereo & 4-ohm Bridged Full Range Operation  
2-ohm Minimum Impedance Monoblock Operation  
MOSFET Power Supply w/ Audiophile Grade IRTM Transistors  
Military Grade SMT PCB Maintains Dynamic Performance  
Direct Short, Thermal, & Overload Circuits Protect Amplifier

CRYPT CLASS D	Max Power (watts)	RMS Power 4Ω Bridged, 14.4V	RMS Power 2Ω, 14.4V	RMS Power 4Ω, 14.4V	Dimensions (3"w x 1.5"h)	Remote Gain Control
CA4-1600D	1,600	2 x 400	4 x 200	4 x 130	6"	-
CA1-1200D	1,200	-	1 x 550	1 x 350	6"	Included



Dash Mount Gain Control Included (monoblock)

200mV-12V High Level or Low Level RCA Input  
Quick Disconnect RCA/High Level Wire Harness  
Quick Disconnect Power and Speaker Output Harness  
Variable 12dB High Pass, Low Pass, & Subsonic Crossovers  
12dB Bass Boost Increases Low Octave Harmonics (monoblock)  
Dash Mount Gain Control Module Included (select models)

# blade

## AMPLIFIERS

Class D full range amplifier technology continues to improve, yielding bigger punch in smaller packages. Blade amplifiers are an extension of that growing trend. These compact die cast chassis hold inside a painstakingly engineered amplifier capable of delivering crushing power. Challenge Blade amplifiers against traditional class A/B surfboards and you'll feel the difference...



90%+ Efficient  
Class D Full Range  
**ONLY 5" x 8" !**  
Install-Me-Anywhere  
Micro Footprint

Compact 5" Chassis Design for Installation Versatility  
Hybrid Aluminum Alloy Diecast Heatsink for Optimum Dissipation  
MOSFET Power Supply w/ Audiophile Grade IRTM Transistors  
Military Grade SMT PCB Maintains Dynamic Performance  
2-ohm Stereo & 4-ohm Bridged Full Range Operation  
2-Ohm Stable Class A/B Monoblock Operation  
Direct Short, Thermal, & Overload Circuits Protect Amplifier  
200mv-6V Low Level RCA Inputs  
12dB High Pass or Low Pass Crossovers  
Quick Disconnect Speaker Output Harness  
8g Power/ Ground Wire Terminals  
Dash Mount Gain Control Module Included (BLADE1-1200D)

BLADE Amplifiers	Max Power (watts)	RMS Power 4Ω Bridged, 14.4V	RMS Power 2Ω, 14.4V	RMS Power 4Ω, 14.4V	Dimensions (5"w x 2"h)	Remote Gain Included
BLADE4-1200D	1,200w	-	4 x 150	4 x 100	8"	-
BLADE1-1200D	1,200w	2 x 300	1 x 600	1 x 400	8"	Included



Dash Mount Gain Control Included (monoblock)



# mofo SUBWOOFER

MOFO X subwoofers are refined and increase efficiency dramatically! MOFO-X subs use a composite sandwich cone with a polypropylene surface for durability and Spruce pulp backing for smooth low bass. Like the original MOFOs, the new models still use an aluminum dustcap that couples to the voice coil former and extends over the cone. Why? The fins brace the cone and eliminate cone flex during high excursion. And since they are aluminum and couple to the voice coil, they act as a heatsink or heat extractor. Using the latest materials, the new MOFO subs yield superior performance. Cast aluminum baskets? Of course! Increased bottom octave output? You Bet! Louder than the original design? Duh!!

Overcompensating Motor Sturcture for Increased Magnetic Strength  
12mm T-Yoke & Top Plate Improve Low Frequency Dynamics  
Vented T-Yoke & Frame Reduces Voice Coil Heat Build-up  
Die Cast Aluminum Heatsink Dust Cap Absorbs Voice Coil Heat  
Aluminum Dust Cap Fins Dissipate Heat & Strengthen Cone  
Non-Magnetic Non-Resonate Die-Cast Aluminum Frame  
2.5" 4-Layer Voice Coil w/ Large Gauge Wire Increases Power Handling  
High-Temperature Tolerance Adhesives Resist Thermal Failure  
Nickel Plated 8ga Spring-Loaed Compression Wire Terminals  
Non-Transfer Spruce Pulp Cone w/ UV & Chemical Protection  
High Density Polyether Foam Surround w/ UV & Chemical Protection  
Dual Poly-Cotton Suspension Dampen Violent Accelerations  
Stitched Voice Coil Leads Prevent Potential Damage  
1-pc Gasket/Trim Ring w/ Concealed Mounting Holes Included



Pre-Assembled Re-cone Kit Available



MOFO Subwoofers	Max Power Handling	RMS Power Handling	Efficiency (1w/1m)	Voice Coil Configuration	Motor Volume	Mounting Depth	Optimum Sealed Enclosure ft³	Optimum Ported Enclosure ft³
MOFO-122X	2,700	1,500	85.37	2.50" Dual 2Ω	373oz.	6.875"	1.00	2.00
MOFO-124X	2,700	1,500	85.40	2.50" Dual 4Ω	373oz.	6.875"	1.00	2.00
MOFO-152X	3,000	1,700	86.90	2.50" Dual 2Ω	373oz.	8.125"	2.00	4.00
MOFO-154X	3,000	1,700	86.97	2.50" Dual 4Ω	373oz.	8.125"	2.00	4.00

# BAMF SUBWOOFER

BAMF subwoofers are the newest secret weapon for you bass BURP fanatics! These beasts are engineered for the most extreme conditions. Massive 3" 4-layer voice coils built on an aluminum former can take the heat. Freakishly oversized motor structures provide more magnetic inertia than is ever necessary for a woofer. Spruce tree pulp cones, high density extended excursion foam surround, and hybrid suspension dampers work together to contain the momentum to a shattering roar...



Overcompensating Motor Sturcture for Increased Magnetic Strength  
12mm T-Yoke & Top Plate Improve Low Frequency Dynamics  
Vented T-Yoke & Frame Reduces Voice Coil Heat Build-up  
Non-Magnetic Non-Resonate Die-Cast Aluminum Frame  
3" 4-Layer Voice Coil w/ Direct Connect Wire Increases Power Handling  
High-Temperature Tolerance Adhesives Resist Thermal Failure

Non-Transfer Spruce Pulp Cone w/ UV & Chemical Protection  
Stitched and Glued Surround/Cone Joints for Strongest Bonding  
Extended Excursion Polyether Foam Surround w/ UV Protection  
Dual Poly-Cotton Suspension Dampen Violent Accelerations  
Stitched Voice Coil Leads Prevent Potential Damage  
1-pc Gasket/Trim Ring w/ Concealed Mounting Holes Included

BAMF Subwoofers	Max Power Handling	RMS Power Handling	Efficiency (1w/1m)	Voice Coil Configuration	Motor Volume	Mounting Depth	Optimum Sealed Enclosure ft³	Optimum Ported Enclosure ft³
BAMF-122	3,500w	1,750w	81.30	3" Dual 2Ω	204oz.	6.00"	1.50	2.50
BAMF-152	3,800w	1,900w	83.60	3" Dual 2Ω	254oz.	6.50"	2.50	3.50



# GOthic SUBWOOFER



## Twisted & Woven Flax Fiber Cone

All Gothic woofers use torsion twisted Flax fibers woven together for ultimate strength and less elasticity. A heavy soaking in epoxy combined with the sonic qualities of pulp paper, Flax proves itself worthy of any system.

## Extended Excursion NBR Surround

A strong and flexible heat resistant compound, nitrile butadiene rubber is used widely in automotive applications. Gothic woofers utilize an extended excursion NBR surround for it's strength and flexible properties during extreme movement.

## Back Plate & T-Yoke Venting

Heat build-up is a leading cause of catastrophic woofer failure. Venting built into the T-Yoke, back plate, and voice coil extract and dissipate heat, ensuring Gothic woofers keep their cool.

## Overcast Stitched Cone Assembly

Surrounds of Gothic woofers are double overcast stitched directly to the Flax cone surface. In addition to superior adhesives, overcast stitching improves the conventional bond between cone and surround.

## 100% OFC 4-Layer Voice Coil

Gothic woofers use generous 1.50" long, 2.5" diameter 100% OFC Copper voice coils. A vented Aluminum former extract and dissipate any heat build-up, resulting in improved power handling.

Gothic Subwoofers	Max Power Handling	RMS Power Handling	Efficiency (1w/1m)	Voice Coil Configuration	Motor Volume	Mounting Depth	Optimum Sealed Enclosure ft³	Optimum Ported Enclosure ft³
GW3-10	2,200	1,000	81.30	2.50" Dual 2Ω	204oz.	6.00"	1.00	1.50
GW3-12	2,500	1,200	83.60	2.50" Dual 2Ω	254oz.	6.50"	1.50	2.25
GW3-15	3,000	1,400	84.00	2.50" Dual 2Ω	254oz.	7.50"	2.75	3.25

# Crypt SUBWOOFER



Injection Molded Polypropylene Cone  
Overcast Stitched Cone Assembly  
Closed Cell Polyurethane Foam Surround  
100% OFC 4-Layer Voice Coil  
Back Plate & T-Yoke Venting  
Embossed Dust Cap

Crypt Subwoofers	Max Power Handling	RMS Power Handling	Efficiency (1w/1m)	Voice Coil Configuration	Motor Volume	Mounting Depth	Optimum Sealed Enclosure ft³	Optimum Ported Enclosure ft³
CW2-104	1,800	720	88.40	2.00" Dual 4Ω	162oz.	5.875"	1.00	1.50
CW2-124	2,000	850	89.90	2.00" Dual 4Ω	190oz	6.375"	1.25	1.75
CW2-154	2,200	1,000	88.90	2.00" Dual 4Ω	190oz	7.25"	2.50	3.00

# THIN SUBWOOFER



An addition to the THIN family, this shallow mount 12" subwoofer yields the performance of most conventional 12" subwoofers, but needs only 3" for mounting. Consider THIN-124 optimum for pre-fab under seat and behind rear seat shallow enclosures.

Spruce Paper Cone for Dynamic, Natural Sound Quality  
Semi-Circular Frame Venting Maintains Thermal Control  
Internal Motor Assembly Reduces Mounting Depth  
3" Mounting Depth to Install in Any Vehicle Type  
2" 4-ohm DVC for Multiple Woofer Application

THIN-124 Subwoofer	Max Power Handling	RMS Power Handling	Efficiency (1w/1m)	Voice Coil Configuration	Motor Volume	Mounting Depth	Optimum Sealed Enclosure ft³	Optimum Ported Enclosure ft³
THIN-124	2,000	850	86dB	2.00" Dual 4Ω	104oz.	3.00"	1.00	2.00



## THIN-120BXA Powered Enclosure

Pre-loaded Enclosure w/ 12" Subwoofer  
4 Ohm Impedance  
650W Built in Amp  
Carpeted Black w/ Embroidered Accents  
29.75"l x 14.5" h x 5.75"/2.25"d

NEW

## THIN-8A Preloaded Enclosure

Pre-loaded Active Enclosure w/ 8" Subwoofer  
500w MAX Monoblock Amplifier Built-In  
Cast Aluminum Chassis  
Hi-Speaker Level Inputs  
200mV-6V Low Level RCA Input  
Variable 2dB Low Pass Crossover  
1800 Phase Inversion Switch  
Dash Mount Gain Control Included  
3"h x 9.5"w x 13.5"L





# GOTHIC

## SPEAKERS



GF-60C

High Efficiency PP Coated Paper Cone  
1" Kapton Voice Coil  
Reinforced Cloth Surround  
1" Swivel Dome Tweeter  
Flush or Surface Mounting  
12dB In-Line Crossover Included  
PTC Tweeter Protection



GF-653

High Efficiency PP Coated Paper Cone  
1" Kapton Voice Coil  
Reinforced Cloth Surround  
2" Paper Cone Midrange  
Balanced Dome Tweeter  
6dB In-Line Crossover



GF-693

Gothic Speakers	Size & Type	MAX Power	Frequency Response	Efficiency (1w/1m dB)	Mounting Depth
GF-60C	6.5" Component	350w	75-20kHz	91dB	2.125"
GF-693	6"x9" 3-way	500w	65-20kHz	93dB	2.875"
GF-653	6.5" 3-way	350w	75*20kHz	91dB	2.125"

# EDGE

## SPEAKERS

### EF-60C

#### 6.5" Component System

500w Max Power Handling  
Improved Efficiency Diaphragm & Magnet Structure  
Carbon Fiber Injection Molded Polypropylene Cone  
Treated Woven Cloth Surround  
1" Voice Coil on Aluminum Former  
4-ohm System Impedance

Quick Disconnect Terminals  
1" Flush Mount Dome Tweeter  
Passive Crossover Included  
Speaker Grill Included  
Freq-Response: 70-20kHz  
Sensitivity: 93dB  
Mounting Depth: 2.5"



NEW



EF-694

NEW

EF-653

EF-42

EF-573

Improved Efficiency Diaphragm & Magnet Structure  
Carbon Fiber Injection Molded Polypropylene Cone  
Treated Woven Cloth Surround  
1" Voice Coil on Aluminum Former  
4-ohm System Impedance  
Quick Disconnect Terminals  
2" Balanced Dome Mylar Midrange (EF-694)  
1" Balanced Dome Mylar Tweeter  
1/2" Dome Super Tweeter (select models)

Edge Speakers	Size & Type	MAX Power	Frequency Response	Efficiency (1w/1m dB)	Mounting Depth
EC-60C	6.5" Component	500w	65-20kHz	92dB	1.75"
EF-694	6"x9" 4-way	800w	45-20kHz	93dB	3.25"
EF-573	6.5" 3-way	500w	65-20kHz	92dB	1.75"
EF-653	5.25" 2-way	400w	80-20kHz	92dB	2.125"
EF-52	4" 2-way	300w	100-20kHz	90dB	1.75"
EF-42	4" 2-way	250w	100-20kHz	90dB	1.75"



# TWEETERS

## PROFESSIONAL AUDIO

### NB-1 2-Way Mount Tweeter 200 Watts

Niobium Rare Earth Ferroelectric Transducer Magnet  
Polypropylene Diaphragm  
100 Watts R.M.S.  
Freq. Resp. 5kHz to 25KHz  
Imp. 4 Ohm  
Surface/Angle Mount  
SPL 97 dB  
Built in Crossover

### NB-2 3-Way Mount Tweeter 200 Watts

Niobium Rare Earth Ferroelectric Transducer Magnet  
Polypropylene Diaphragm  
100 Watts R.M.S.  
Freq. Resp. 5kHz to 25KHz  
Imp. 4 Ohm  
Surface/Angle Mount/Flush Mount  
SPL 97 dB  
Built in Crossover

### NB-4 4-Way Mount Tweeter 250 Watts

Niobium Rare Earth Ferroelectric Transducer Magnet  
Swivel/Surface/Angle Mount/Flush Mount  
Polypropylene Diaphragm  
Built in Crossover  
Freq. Resp. 5kHz to 25KHz  
Imp. 4 Ohm  
SPL 97 dB

### NX-5 Bullet Tweeter 200 Watts MAX

1" Horn Loaded Bullet tweeter  
Machined Aluminum Chassis  
Titanium Dome Diaphragm  
1" High Temperature Voice Coil  
Acrylic Phase Plug

High Strength Neodymium Magnet  
Freq. Resp 3kHz-20kHz  
Impedance: 3 ohm  
Efficiency: 109dB  
Sold in pairs

### XPS-104 4" Midrange

300 watts max  
.75" Voice Coil  
Freq. Resp. 450 Hz. to 10kHz.  
15 oz. Magnet  
Imp. 4 Ohm  
SPL 92 dB  
Mounting Depth: 1.75"  
Sold Individually

### NX-3 Horn Tweeter 200 Watts MAX

1.75" Aluminum Dome Diaphragm  
Phase Inversion Plug  
6dB Crossover Capacitor Included  
Freq. Resp 3kHz - 20KHz  
4-Ohm Impedance  
Efficiency: 106dB (NX-4)  
Efficiency: 109dB (NX-3)  
Sold Individually

## PRO Audio Midrange Speakers

Pro Audio	Size & Type	MAX Power	Impedance	Frequency Response	Efficiency (1w/1m dB)	Mounting Depth
Mid-Range	6.5"	300w	4Ω	150-15kHz	96dB	2.75"
MID-65	8"	350w	4Ω	1202-8kHz	98dB	3.25"
MID-80	6.5"	170w	4Ω	150-10kHz	96dB	2.75"
PRO-654	8"	200w	4Ω	120-8kHz	97dB	3.25"
PRO-804	8"	350w	4Ω	100-5kHz	98dB	4.25"
PRO-104	10"					



# EQUALIZERS



**PWM-70 7-Band 1/2 DIN Equalizer**

2 Selectable Balanced Inputs  
Selectable Input Sensitivity  
7 bands +/- 18dB Parametric Equalizer  
Independent Volume & Fader Control  
Independent Subwoofer Output and Level Control  
Selectable Subwoofer Low-Pass Crossover  
8V MAX Front, Rear, & Subwoofer Outputs  
Low Noise BI-FET Op-Amp for Minimum Distortion  
20dB Headroom, 30V Bipolar Power Supply  
Blue LED Backlighting  
S/N Ratio 110dB @1V  
THD:0.05%



**PWM-20 4-Band 1/2 DIN Equalizer**

2 Selectable Balanced Inputs  
Variable Stereo Input Sensitivity  
4 Variable Frequency Bands +/- 18dB Parametric Equalizer  
Independent Volume & Fader Control  
Independent Subwoofer Output and Level Control  
Variable Subwoofer Low-Pass Crossover  
8V MAX Front, Rear, & Subwoofer Outputs  
Low Noise BI-FET Op-Amp for Minimum Distortion  
20dB Headroom, 30V Bipolar Power Supply  
Blue LED Backlighting  
Quick Disconnect Wire Harness  
S/N Ratio 115dB @1V  
THD:0.05%



**PWM-19 4-Band 1/2 DIN Equalizer**

2 Selectable Balanced Inputs  
Variable Stereo Input Sensitivity  
4 bands +/- 18dB Parametric Equalizer  
Independent Volume & Fader Control  
Independent Subwoofer Output and Level Control  
Variable Subwoofer Low-Pass Crossover  
7V MAX Front, Rear, & Subwoofer Outputs  
Low Noise BI-FET Op-Amp for Minimum Distortion  
20dB Headroom, 30V Bipolar Power Supply  
Selectable Green/Amber Illumination  
Quick Disconnect Wire Harness  
Under Dash Mounting Hardware Included  
S/N Ratio 110dB @5V  
THD:0.05%



**PWM-16 4-Band 1/2 DIN Equalizer**

2 Selectable Balanced Inputs & Front Panel AUX Input  
4 bands +/- 18dB Parametric Equalizer  
Independent Volume & Fader Control  
Independent Subwoofer Output and Level Control  
Variable Subwoofer Low-Pass Crossover  
7V MAX Front, Rear, & Subwoofer Outputs  
Blue LED Backlighting  
Quick Disconnect Wire Harness  
S/N Ratio 80dB @5V  
THD:0.05%

# BASS PROCESSORS

**BASSBOX-8**

Chrome Finish w/ Illuminated Badge  
PWM High Head Room Power Supply  
27-63Hz Parametric Bass Boost  
Variable Bandwidth Adjustment  
Max Output Level: 13.5 volt  
Dash Mount Remote Control  
LED MAX Bass Indicators  
35-80Hz Variable Subsonic Filter  
Balanced RCA Inputs  
Selectable Input Ground Sources  
Selectable Grounding Isolation  
Frequency Response: 10~100kHz  
THD: 0.003%  
S/N Ratio: 130dB



**BASS-10C Bass Maximizer**

PWM High Head Room Power Supply  
27-63Hz Parametric Bass Boost  
Variable Bandwidth Adjustment  
Max Output Level: 13.5 volt  
Dash Mount Remote Control  
LED MAX Bass Indicators  
Selectable Subsonic Filter  
Balanced RCA Inputs  
Selectable Input Ground Sources  
Selectable Grounding Isolation  
Frequency Response: 10~100kHz  
THD: 0.003%  
S/N Ratio: 130dB  
Input Noise Rejection: 60 dB



**BASS-12C Bass Maximizer**

Chrome Finish w/ Illuminated Badge  
PWM High Head Room Power Supply  
27-63Hz Parametric Bass Boost  
Variable Bandwidth Adjustment  
Max Output Level: 13.5 volt  
Dash Mount Remote Control  
LED MAX Bass Indicators  
35-80Hz Variable Subsonic Filter  
Balanced RCA Inputs  
Selectable Input Ground Sources  
Selectable Grounding Isolation  
Frequency Response: 10~100kHz  
THD: 0.003%  
S/N Ratio: 130dB



**BASSBOX-6**

PWM High Head Room Power Supply  
27-63Hz Parametric Bass Boost  
Variable Bandwidth Adjustment  
Max Output Level: 13.5 volt  
Dash Mount Remote Control  
LED MAX Bass Indicators  
Selectable Subsonic Filter  
Balanced RCA Inputs  
Selectable Input Ground Sources  
Selectable Grounding Isolation  
Frequency Response: 10~100kHz  
THD: 0.003%  
S/N Ratio: 130dB  
Input Noise Rejection: 60 dB



**C-30XR 3-Way 12dB Electronic Crossover**

6-Channel Low-Level Input  
6-Channel Low-Level Output w/ 5V Gain  
2/4 Channel Input Selection  
Independent Front/Rear High Pass  
Independent Subwoofer Low Pass  
Stereo or Mono Subwoofer Output Selection  
180° Phase Switch  
Variable Frequency & Gain Bass Boost  
Dash Mount Remote Subwoofer Gain Module  
S/N Ratio: 95dB  
Channel Separation: 60dB





# INSTALLATION

## ACCESSORIES

### Amplifier Wire Kits

- AK-0** 0g Amplifier Wire Kit w/ 200A ANL Fuse
- AK-4** 4ga Amplifier Wire Kit w/ 120A MANL Fuse
- AK-8** 8ga Amplifier Wire Kit w/ 80A MANL Fuse

#### Each Wire Kit Includes:

- 17ft Power Wire w/ Ring Terminal
- 3ft Ground Wire w/ Ring Terminal
- 17ft Twisted Pair RCA Interconnect
- 17ft Remote Turn-on Wire
- 25ft 16g Split Speaker Wire
- Full Size MANL Fuse Holder
- ANL or MANL Fuse Included
- Assorted Installation Accessories

NEW



### Capacitors

**PC1.5F** 1.5 Farad Power Capacitor



- Terminal Post for Ring Terminal
- Digital Voltage Meter
- Translucent Mounting Brackets
- Brushed Aluminum Finish

**PC2.0F** 2 Farad Power Capacitor



- 12-16 DC Volts Operation
- Terminal Post for Ring Terminal
- Digital Voltage Meter
- Translucent Mounting Brackets
- Chrome Plated Finish

**PCX-3F** 3 Farad Power Capacitor  
**PCX-5F** 5 Farad Power Capacitor

- 12-16 DC Volts Operation
- Terminal Post for Ring Terminal
- Digital Voltage Meter
- Polarity & Voltage Protection
- Protection Alert Indicator
- LED Accent Lighting
- Satin Finish w/ Chrome Accents



**PCX-30F** 30 Farad Hybrid Power Capacitor

- 12-16 DC Volts Operation
- Internally Stacked Carbon-Foil Capacitors
- Direct Connect 0 ga. Terminals & 4 ga. Reducers
- Digital Voltage Meter
- Polarity & Voltage Protection
- Protection Alert Indicator
- LED Accent Lighting
- Satin Finish w/ Chrome Accents



# marine audio

**MCD-41B** (w/ Bluetooth V2.0)  
1-DIN Marine CD Player w/32GB USB Playback

- CD/MP3, AM/FM & USB Receiver
- Conformal Coated PCB and Faceplate
- Theft Deterrent Detachable Faceplate
- Bluetooth V2.0 Hands Free Calling from Smart Phone
- A2DP MP3 Audio Playback from Enabled Device
- Playback from 32GB USB of MP3 & WMA
- Playback from CD, CDR, CDRW of MP3 & WMA
- Aux Audio Input for Personal Media Devices
- Front & Rear Pre-Amp Output
- 52w x 4 MOSFET Speaker Outputs
- Custom & Pre-Set Equalizer Settings
- Audio Staging Controls
- 12/24 Hour Digital Clock
- Remote Control Included
- Faceplate Carry Case Included



USB Bluetooth AUX INPUT X300 WATT 4CH. AMPLIFIER

# RAZOR



## MARINE AMPLIFIER

- Compact 4.75" Chassis Design for Installation Versatility
- Splash Resistant Conformal Coated Circuit Boards
- MOSFET Power Supply w/ Audiophile Grade IR™ Transistors
- Military Grade SMT PCB Maintains Dynamic Performance
- 2-ohm Stereo & 4-ohm Bridged Full Range Operation
- 2-Ohm Stable Class A/B Monoblock Operation
- 1-ohm Stable Class D Monoblock Operation
- Direct Short, Thermal, & Overload Circuits Protect Amplifier
- 200mv-6V Low Level RCA Inputs
- High Level Input w/ Signal Sense Auto Turn-on
- Variable 12dB High Pass & Low Pass Crossovers
- 10-50Hz Variable 12dB Subsonic Crossover Protects Subwoofers
- 12dB Bass Boost Increases Low Octave Harmonics (monoblocks)
- Dash Mount Gain Control Module Included (select models)

RAZOR CLASS D	Max Power (watts)	RMS Power 4Ω Bridged, 14.4V	RMS Power 2Ω, 14.4V	RMS Power 4Ω, 14.4V	Dimensions (4.75" w x 1.625" h)	Gain Control Included
MA4-3000D	3,000	2 x 750	4 x 375	4 x 285	12.25"	-
MA5-2500D	2,500	300 x 2 + 600 x 1	150 x 4 + 600 x 1	100 x 4 + 400 x 1	12.25"	Included
MA1-2300D	2,300	-	1 x 1,400	1 x 900	11"	Included
MA1-3500D	3,500	1 x 2,100	1 x 1,400	1 x 900	12.25"	Included



# Wake Tower Speakers

# Marine Audio



## MARINE WATERPROOF SPEAKERS

Marine Speakers	MAX Power	RMS Power	Frequency Response	Efficiency (1w/1m dB)	Overall Size (WxHxL)
MF-65WT	300w	150w	60-20kHz	91dB	7.5" x 7.5" x 2.5"

Marine Grade Waterproof 6.5" Coaxial Speaker  
High Density ABS Construction w/ UV Coating  
100% Waterproof Sealed Back Speaker Frame  
Stainless Steel Mounting Hardware Included  
Injection Molded Polypropylene speaker cone  
Rubber Surround & Tweeter Pole Gasket  
1" Titanium Dome Tweeter  
White and Titanium Grills Included  
Quick Disconnect Terminals  
Meets ROHS and CE Certifications  
4-ohm System Impedance

## MARINE WATERPROOF SUBWOOFER

Marine Subwoofer	MAX Power	RMS Power	Frequency Response	Efficiency (1w/1m dB)	Overall Size (WxHxL)
MW-10WT	600w	300w	30-4kHz	91dB	10.5" x 10.5" x 6"

Marine Grade Waterproof 10" Subwoofer  
High Density ABS Construction w/ UV Coating  
100% Waterproof Sealed Back Speaker Frame  
Stainless Steel Mounting Hardware Included  
IMPP Polypropylene Cone & Rubber Surround  
White and Titanium Grills Included  
Quick Disconnect Terminals  
Meets ROHS and CE Certifications  
4-ohm System Impedance

Wake Tower Speakers	Size & Color	MAX Power	RMS Power	Frequency Response	Efficiency (1w/1m dB)	Overall Size (HxWxL)
MWT-65W	6.5" White	500w	250w	40-20kHz	90dB	8.5" x 8.5" x 9"
MWT-65T	6.5" Titanium	500w	250w	40-20kHz	90dB	8.5" x 8.5" x 9"
MWT-80W	8" White	750w	375w	30-20kHz	91dB	10" x 10" x 9.5"
MWT-80T	8" Titanium	750w	375w	30-20kHz	91dB	10" x 10" x 9.5"



# AUTOMOTIVE ACCESSORIES

## WINDOW FILM TINT

### *Automotive and Commercial Application Window Tint*

Our window film uses infused color chips and twin UV inhibitors in the initial manufacturing process. This insures maximum benefit for your interior. Traditional manufacturing process uses clear chips and adds dyes, pigments, or spray-on colors, and a UV inhibitor in the adhesive.

### **Additional Benefits**

*Color-stable film that never bubbles, peels, or turns purple over time*

*Malleable for seamless attachment to curved surfaces*

*American made adhesives for impervious seal and undistorted views*

*Reduces heat, glare and overall energy costs when used in home or auto*

*Eliminate harmful UV by 99% to protect interior materials in home or auto*

*Lifetime Warranty with Everlast Series, Made in U.S.A.*

*4-Year Prorated Warranty with Elite Series*

*Available in 20", 24", 36", 40" Width, all in 100ft. length*

*Everlast Series Available in 60" Width*

#### Everlast Series

EV-05	6% VLT
EV-15	16% VLT
EV-20	21% VLT
EV-35	35% VLT
EV-50	51% VLT

#### Elite Series

LT-05	6% VLT
LT-20	22% VLT
LT-35	33% VLT
LT-50	51% VLT



## XENON BULBS SUPERWHITE BULBS



**H1**  
12V 100W



**H3**  
12V 100W



**H4**  
12V 100W/90W



**H7**  
12V 100W



**H8**  
12V 35W



**H9**  
12V 65W



**H11**  
12V 55W



**9004**  
12V 100/80W



**9005**  
12V 100W



**9006**  
12V 80W



**9007**  
12V 100/80W



**H13/9008**  
12V 65W/55W



**880**  
12V 27W



ALL MODELS COME IN PAIRS