

LOW VOLTAGE SERIES

Modular Lighting System 48V combines aesthetics with a multitude of configuration options and effortless installation.

The outcome is an ecosystem of quality components perfect for spaces where constant flexibility and high performance are required.



MODULAR
SYSTEM **48V**



LAMP DISPLAY

TRACK LIGHT

SYSTEM

01 TRACKS

02 LUMINAIRES

03 MOUNTING OPTIONS

04 COLORS



SLIM RAIL - TYPE 1

DEEP RAIL - TYPE 2




Modular Lighting System 48V combines unornamented aesthetics with a multitude of configuration options and effortless installation. The outcome is an ecosystem of quality components perfect for spaces where constant flexibility and high performance are required.



light colors

Choose from a wide range of color temperatures, CRI values and dimming protocols.

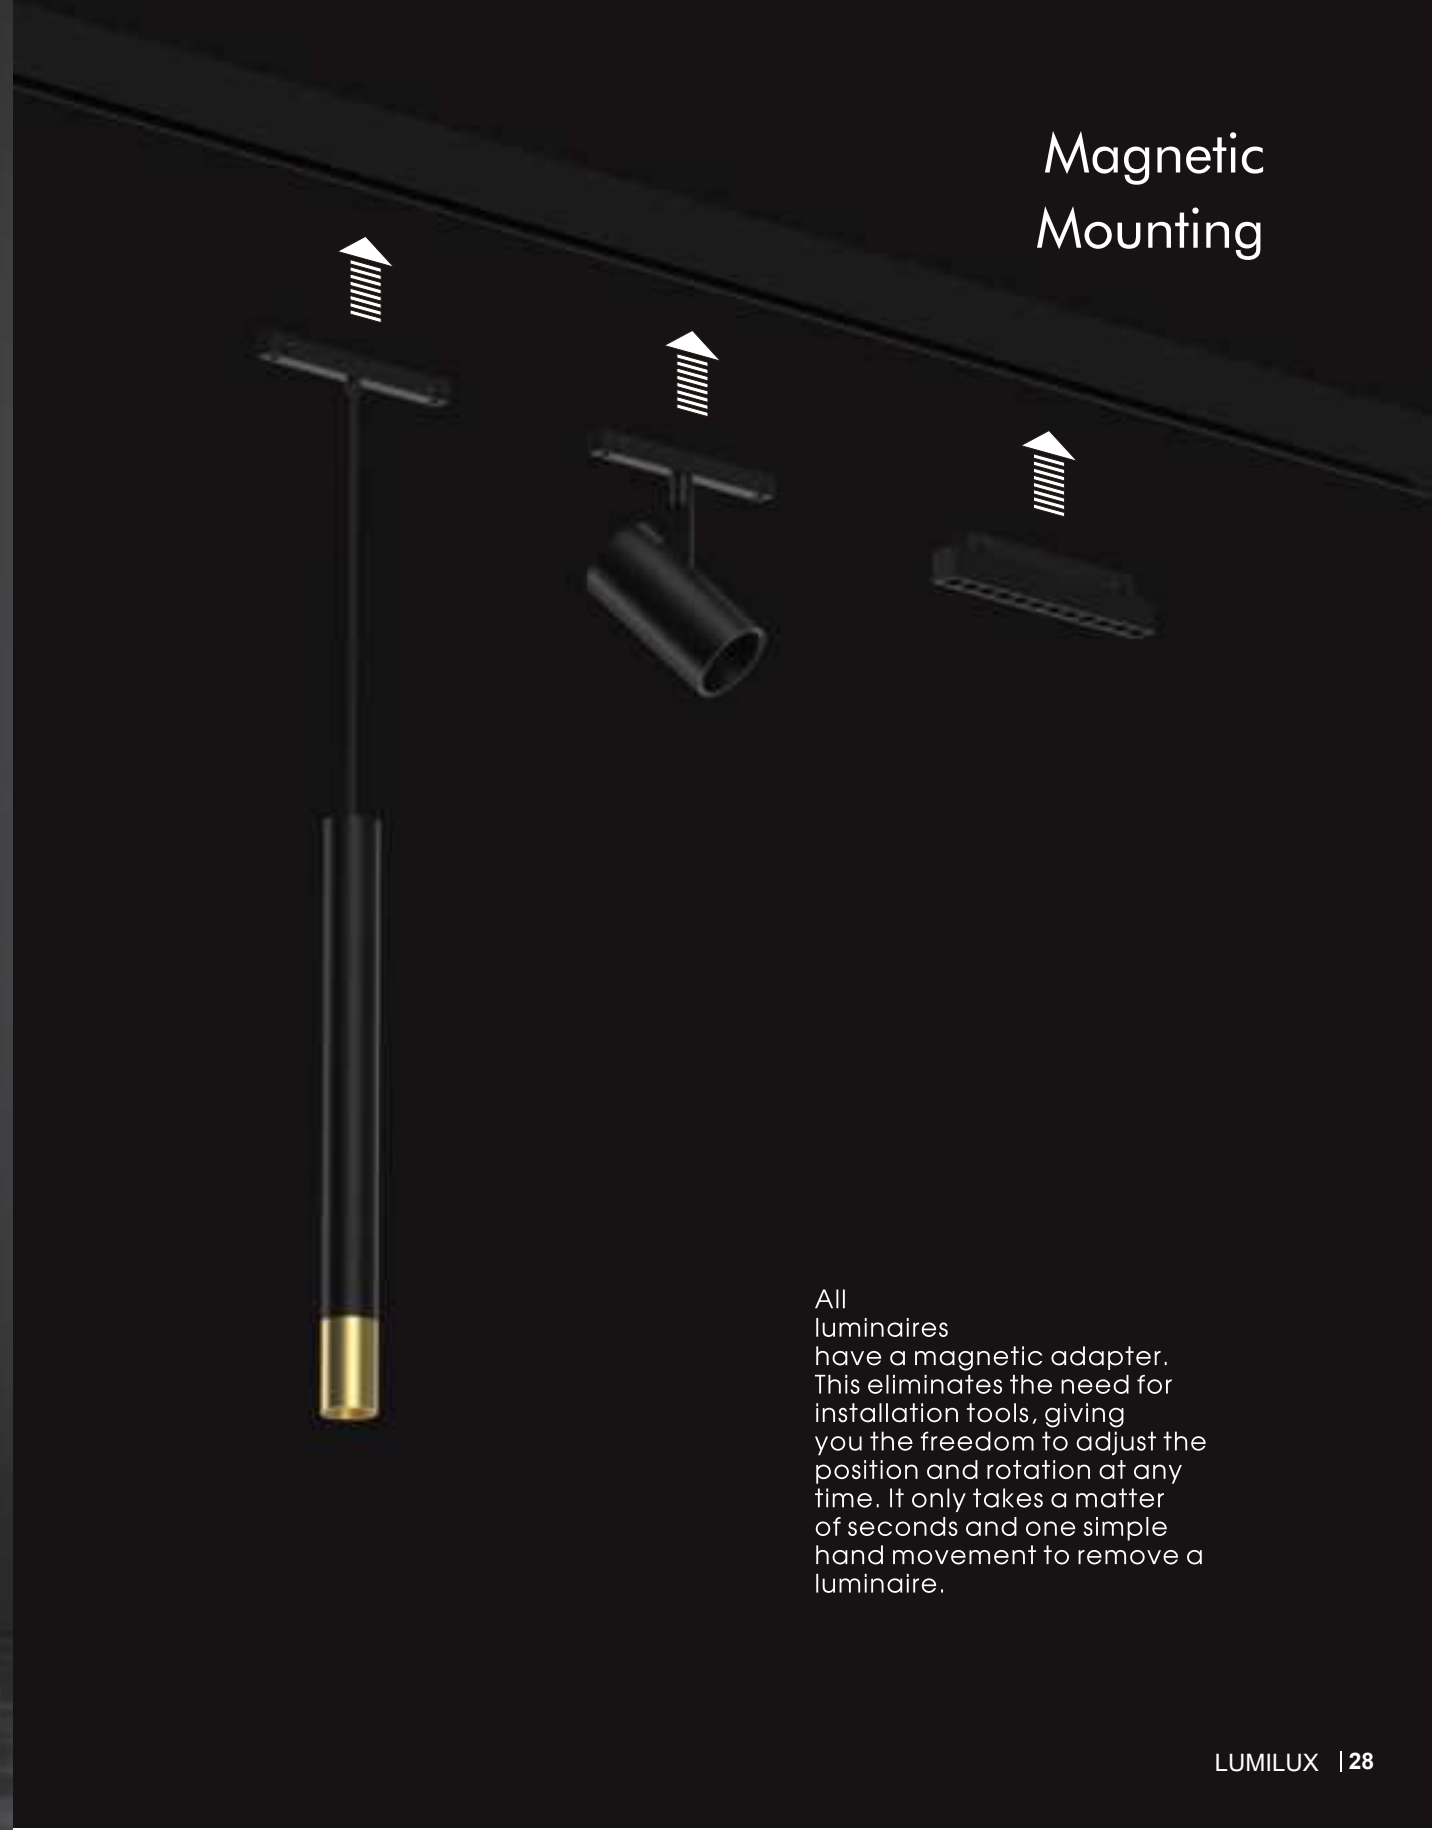

Magnetic Mounting

All luminaires have a magnetic adapter. This eliminates the need for installation tools, giving you the freedom to adjust the position and rotation at any time. It only takes a matter of seconds and one simple hand movement to remove a luminaire.

wireless controls

Seamless and instant control and dimming with the remote app for iOS and Android.



DALI Compatible:
The low voltage track system with integrated databus allows individual spotlights to be controlled with various driver options including Fixed Output and DALI. This will allow user-friendly light management for multi application.


APPLICATION CASE
VILLA RESIDENCE

LUMINAIRES

01 TRACK LIGHT

02 PENDANT LIGHT

03 LINEAR LIGHT

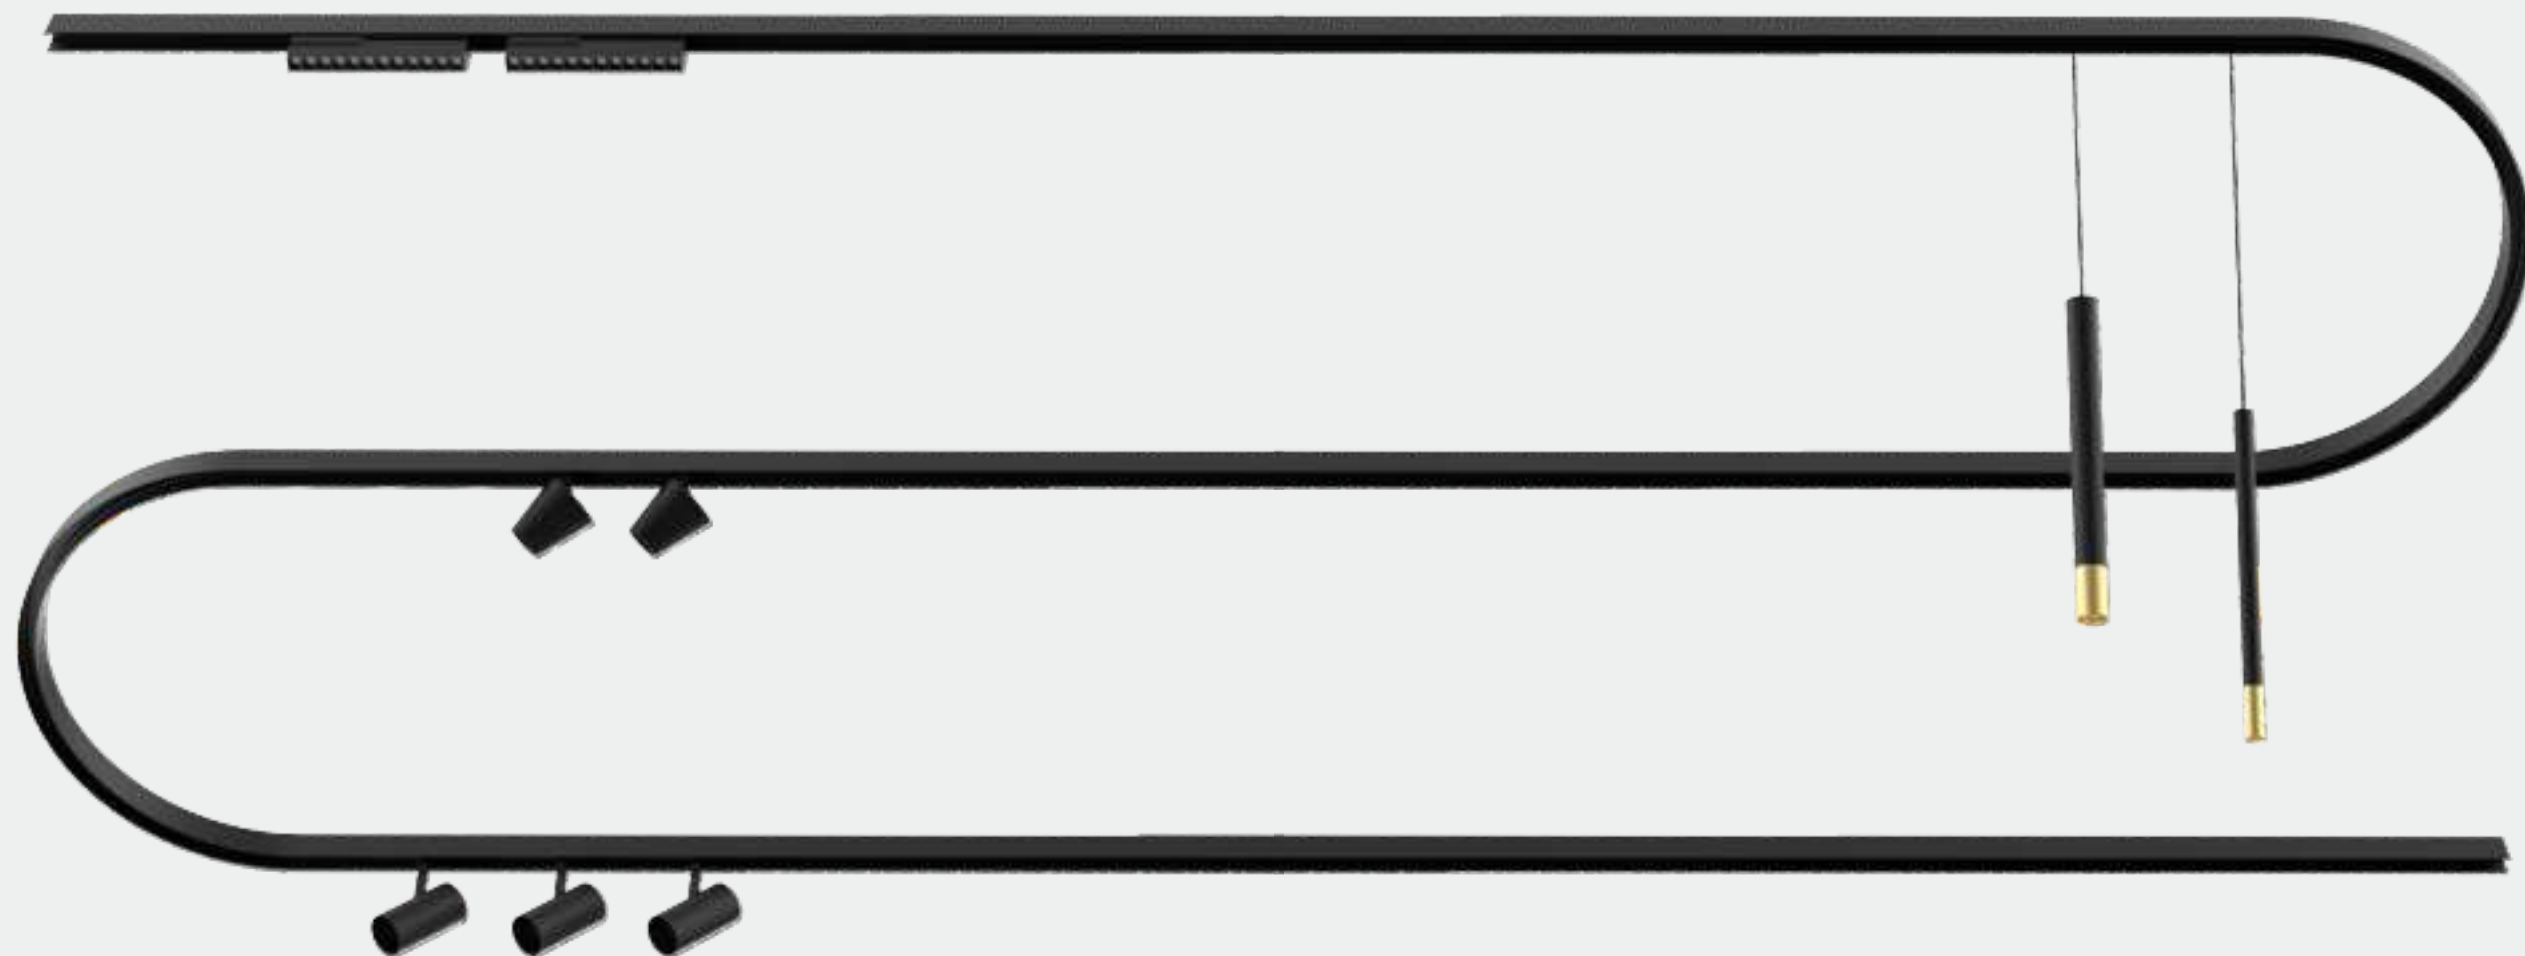



LX.DC.TS0103-1



LX.DC.TS0103-T2



LX.DC.TS0108-1



LX.DC.TS0108-T2

Input mA·W	DC700mA 1x3W	DC700mA 2x3W	DC500mA 1x8W	DC500mA 2x8W
Luminous flux lm	130lm/3000K	2x130lm/3000K	375lm/3000K	2x375lm/3000K
Beam Angle	15°/24°/30°	15°/24°/30°	15°/24°/30°	15°/24°/30°
CRI	Ra≥95	Ra≥95	Ra≥90	Ra≥90
Lamp	LUMINUS	LUMINUS	CREE	CREE
Available Dimming	0-10V/DALI	0-10V/DALI	0-10V/DALI	0-10V/DALI



LX.DC.TS0206-C



LX.DC.TS0206-T2



LX.DC.TS0210-C



LX.DC.TS0210-T2

Input mA·W	DC150mA 1x6W	DC150mA 2x6W	DC250mA 1x10W	DC250mA 2x10W
Luminous flux lm	420lm/3000K	2x420lm/3000K	660lm/3000K	2x660lm/3000K
Beam Angle	15°/24°/36°	15°/24°/36°	15°/24°/36°/50°	15°/24°/36°/50°
CRI	Ra≥95	Ra≥95	Ra≥95	Ra≥95
Lamp	Honourtek	Honourtek	Honourtek	Honourtek
Available Dimming	0-10V/DALI	0-10V/DALI	0-10V/DALI	0-10V/DALI



LX.DC.TF0403-1



LX.DC.TF0406-1



LX.DC.TF0409-1



LX.DC.TF0412-1

Input mA·W	DC150mA 1x3W	DC250mA 1x6W	DC350mA 1x9W	DC500mA 1x12W
Luminous flux lm	155lm/3000K	212lm/3000K	310lm/3000K	417lm/3000K
Beam Angle	120°	120°	120°	120°
CRI	Ra≥90	Ra≥90	Ra≥90	Ra≥90
Lamp	OSRAM	OSRAM	OSRAM	OSRAM
Available Dimming	0-10V/DALI	0-10V/DALI	0-10V/DALI	0-10V/DALI



LX.DC.TS0110-C



LX.DC.TS0110-T2



LX.DC.TS0115-C



LX.DC.TS0120-C



LX.DC.TS0130-C

DC250mA 1x10W	DC250mA 2x10W	DC350mA 1x15W	DC500mA 1x20W	DC700mA 1x30W
921lm/3000K	2x921lm/3000K	1212lm/3000K	1734lm/3000K	2251lm/3000K
15°/24°/36°/50°	15°/24°/36°/50°	15°/24°/36°	15°/24°/36°	15°/24°/36°
Ra≥95	Ra≥95	Ra≥95	Ra≥90	Ra≥90
Honourtek	Honourtek	Honourtek	LUMINUS	LUMINUS
0-10V/DALI	0-10V/DALI	0-10V/DALI	0-10V/DALI	0-10V/DALI



LX.DC.TB0308-1



LX.DC.TB0315-1



LX.DC.TS0308-1



LX.DC.TS0315-1



LX.DC.TB0315-X

DC150mA 1x6W	DC350mA 1x15W	DC150mA 1x6W	DC350mA 1x15W	DC350mA 1x15W
440lm/3000K	1016lm/3000K	440lm/3000K	1016lm/3000K	906lm/3000K
24°/45°	24°/45°	24°/45°	24°/45°	32x40°
Ra≥90	Ra≥90	Ra≥90	Ra≥90	Ra≥90
OSRAM	OSRAM	OSRAM	OSRAM	OSRAM
0-10V/DALI	0-10V/DALI	0-10V/DALI	0-10V/DALI	0-10V/DALI



LX.DC.PS0108-1



LX.DC.PS0110-C



LX.DC.PS0206-C



LX.DC.PF0104-1



LX.DC.PF0204-1

DC500mA 1x8W	DC250mA 1x10W	DC150mA 1x6W	DC150mA 1x4W	DC150mA 1x4W
375lm/3000K	921lm/3000K	420lm/3000K	160lm/3000K	210lm/3000K
15°/24°/36°	20°/36°	15°/24°/36°	120°	120°
Ra≥90	Ra≥95	Ra≥95	Ra≥90	Ra≥90
CREE	Honourtek	Honourtek	OSRAM	OSRAM
0-10V/DALI	0-10V/DALI	0-10V/DALI	0-10V/DALI	0-10V/DALI



LX.DC.TS0103-1

0.07 III F CE IP20




Material	Input	Luminous Flux	CRI	Lamp
Aluminum	DC700mA 1x3W	130lm/3000K	Ra≥95	LUMINUS

LX.DC.TS0103-T2


0.12 III F CE IP20

Material	Input	Luminous Flux	CRI	Lamp
Aluminum	DC700mA 2x3W	2x130lm/3000K	Ra≥95	LUMINUS


Color : □ White ■ Black



h(m)	E(lx)	D(m)
1	374	0.40
2	93	0.80
3	41	1.20
4	23	1.60



h(m)	E(lx)	D(m)
1	207	0.53
2	51	1.06
3	23	1.59
4	12	2.12



h(m)	E(lx)	D(m)
1	120	0.74
2	29	1.48
3	13	2.22
4	7	2.96



LX.DC.TS0108-1

0.22 III F CE IP20




Material	Input	Luminous Flux	CRI	Lamp
Aluminum	DC500mA 1x8W	375lm/3000K	Ra≥90	CREE

LX.DC.TS0108-T2


0.42 III F CE IP20

Material	Input	Luminous Flux	CRI	Lamp
Aluminum	DC500mA 2x8W	2x375lm/3000K	Ra≥90	CREE


Color : □ White ■ Black



h(m)	E(lx)	D(m)
1	1216	0.46
2	304	0.91
3	135	1.37
4	76	1.83



h(m)	E(lx)	D(m)
1	708	0.62
2	177	1.23
3	78	1.85
4	44	2.46



h(m)	E(lx)	D(m)
1	459	0.72
2	114	1.43
3	51	2.15
4	28	2.87

Optional Accessories



Honeycomb
Size: Ø19 x 3



LX.DC.TS0110-C

0.28 III F CE IP20


Material	Input	Luminous Flux	CRI	Lamp
Aluminum	DC250mA 1x10W	92lm/3000K	Ra≥95	Honourtek




LX.DC.TS0110-T2

0.54 III F CE IP20

Material	Input	Luminous Flux	CRI	Lamp
Aluminum	DC250mA 2x10W	2x92lm/3000K	Ra≥95	Honourtek

Color : □ White ■ Black

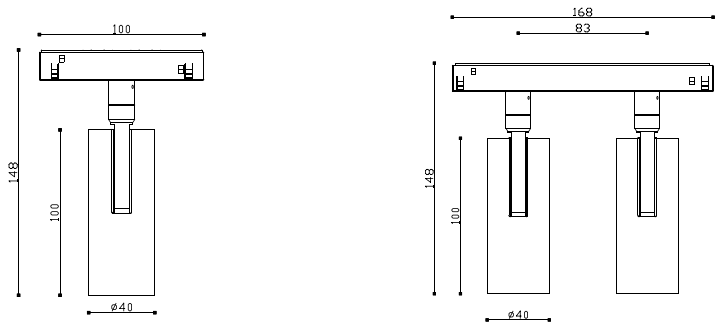


	<table><tr><th>h(m)</th><th>E(lx)</th><th>D(m)</th></tr><tr><td></td><td></td><td>15°</td></tr><tr><td>1</td><td>4439</td><td>0.31</td></tr><tr><td>2</td><td>1109</td><td>0.63</td></tr><tr><td>3</td><td>493</td><td>0.94</td></tr><tr><td>4</td><td>277</td><td>1.25</td></tr></table>	h(m)	E(lx)	D(m)			15°	1	4439	0.31	2	1109	0.63	3	493	0.94	4	277	1.25		<table><tr><th>h(m)</th><th>E(lx)</th><th>D(m)</th></tr><tr><td></td><td></td><td>24°</td></tr><tr><td>1</td><td>3364</td><td>0.42</td></tr><tr><td>2</td><td>841</td><td>0.85</td></tr><tr><td>3</td><td>373</td><td>1.27</td></tr><tr><td>4</td><td>210</td><td>1.70</td></tr></table>	h(m)	E(lx)	D(m)			24°	1	3364	0.42	2	841	0.85	3	373	1.27	4	210	1.70
h(m)	E(lx)	D(m)																																					
		15°																																					
1	4439	0.31																																					
2	1109	0.63																																					
3	493	0.94																																					
4	277	1.25																																					
h(m)	E(lx)	D(m)																																					
		24°																																					
1	3364	0.42																																					
2	841	0.85																																					
3	373	1.27																																					
4	210	1.70																																					
	<table><tr><th>h(m)</th><th>E(lx)</th><th>D(m)</th></tr><tr><td></td><td></td><td>36°</td></tr><tr><td>1</td><td>2336</td><td>0.56</td></tr><tr><td>2</td><td>584</td><td>1.12</td></tr><tr><td>3</td><td>259</td><td>1.68</td></tr><tr><td>4</td><td>146</td><td>2.24</td></tr></table>	h(m)	E(lx)	D(m)			36°	1	2336	0.56	2	584	1.12	3	259	1.68	4	146	2.24		<table><tr><th>h(m)</th><th>E(lx)</th><th>D(m)</th></tr><tr><td></td><td></td><td>50°</td></tr><tr><td>1</td><td>1187</td><td>0.78</td></tr><tr><td>2</td><td>296</td><td>1.56</td></tr><tr><td>3</td><td>131</td><td>2.34</td></tr><tr><td>4</td><td>74</td><td>3.31</td></tr></table>	h(m)	E(lx)	D(m)			50°	1	1187	0.78	2	296	1.56	3	131	2.34	4	74	3.31
h(m)	E(lx)	D(m)																																					
		36°																																					
1	2336	0.56																																					
2	584	1.12																																					
3	259	1.68																																					
4	146	2.24																																					
h(m)	E(lx)	D(m)																																					
		50°																																					
1	1187	0.78																																					
2	296	1.56																																					
3	131	2.34																																					
4	74	3.31																																					

Optional Accessories



Optional Colors for Baffle





LX.DC.TS0115-C

0.41 III F CE IP20

Material	Input	Luminous Flux	CRI	Lamp
Aluminum	DC350mA 1x15W	1212lm/3000K	Ra≥95	Honourtek

Color : □ White ■ Black





	<table><tr><th>h(m)</th><th>E(lx)</th><th>D(m)</th></tr><tr><td>1</td><td>10003</td><td>0.30</td></tr><tr><td>2</td><td>2500</td><td>0.60</td></tr><tr><td>3</td><td>1111</td><td>0.90</td></tr><tr><td>4</td><td>625</td><td>1.20</td></tr></table>	h(m)	E(lx)	D(m)	1	10003	0.30	2	2500	0.60	3	1111	0.90	4	625	1.20		<table><tr><th>h(m)</th><th>E(lx)</th><th>D(m)</th></tr><tr><td>1</td><td>6981</td><td>0.40</td></tr><tr><td>2</td><td>1745</td><td>0.81</td></tr><tr><td>3</td><td>775</td><td>1.21</td></tr><tr><td>4</td><td>436</td><td>1.61</td></tr></table>	h(m)	E(lx)	D(m)	1	6981	0.40	2	1745	0.81	3	775	1.21	4	436	1.61
h(m)	E(lx)	D(m)																															
1	10003	0.30																															
2	2500	0.60																															
3	1111	0.90																															
4	625	1.20																															
h(m)	E(lx)	D(m)																															
1	6981	0.40																															
2	1745	0.81																															
3	775	1.21																															
4	436	1.61																															
	<table><tr><th>h(m)</th><th>E(lx)</th><th>D(m)</th></tr><tr><td>1</td><td>3252</td><td>0.63</td></tr><tr><td>2</td><td>813</td><td>1.26</td></tr><tr><td>3</td><td>361</td><td>1.89</td></tr><tr><td>4</td><td>203</td><td>2.52</td></tr></table>	h(m)	E(lx)	D(m)	1	3252	0.63	2	813	1.26	3	361	1.89	4	203	2.52																	
h(m)	E(lx)	D(m)																															
1	3252	0.63																															
2	813	1.26																															
3	361	1.89																															
4	203	2.52																															

Optional Accessories



Optional Colors for Baffle






LX.DC.TS0120-C




Material	Input	Luminous Flux	CRI	Lamp
Aluminum	DC500mA 1x20W	1734lm/3000K	Ra≥90	LUMINUS


Color : □ White ■ Black




h(m)	E(lx)	D(m)
1	10502	0.32
2	2652	0.65
3	1166	0.97
4	656	1.30



h(m)	E(lx)	D(m)
1	8275	0.42
2	2068	0.84
3	919	1.27
4	517	1.69



h(m)	E(lx)	D(m)
1	6233	0.55
2	1558	1.09
3	692	1.64
4	389	2.19




LX.DC.TS0130-C




Material	Input	Luminous Flux	CRI	Lamp
Aluminum	DC700mA 1x30W	2251lm/3000K	Ra≥90	LUMINUS


Color : □ White ■ Black



h(m)	E(lx)	D(m)
1	13737	0.32
2	3434	0.64
3	1526	0.96
4	858	1.28



h(m)	E(lx)	D(m)
1	10473	0.42
2	2618	0.84
3	1163	1.26
4	654	1.68



h(m)	E(lx)	D(m)
1	8333	0.55
2	2083	1.10
3	952	1.65
4	520	2.20

Optional Accessories



Honeycomb
Size: Ø52 x 3




Combed Glass
Size: Ø52 x 3



Woven Glass
Size: Ø52 x 3

Optional Colors for Baffle



White



Golden



Black









UGR < 4



SIMPLE STYLE




LX.DC.TB0308-1


0.10 III V CE IP20

Material	Input	Luminous Flux	CRI	Lamp
Aluminum	DC150mA 1x6W	440lm/3000K	Ra≥90	OSRAM

Color : □ White ■ Black



h(m)	E(lx)	D(m)
1	1447	0.45
2	361	0.91
3	160	1.36
4	90	1.82




h(m)	E(lx)	D(m)
1	906	0.71
2	226	1.43
3	100	2.14
4	56	2.85

LX.DC.TB0315-1


0.25 III V CE IP20

Material	Input	Luminous Flux	CRI	Lamp
Aluminum	DC350mA 1x15W	1016lm/3000K	Ra≥90	OSRAM


Color : □ White ■ Black



h(m)	E(lx)	D(m)
1	3208	0.49
2	802	0.98
3	356	1.48
4	200	1.97



h(m)	E(lx)	D(m)
1	2270	0.67
2	567	1.34
3	252	2.01
4	141	2.67




LX.DC.TB0308-1


0.32 III F CE IP20

Material	Input	Luminous Flux	CRI	Lamp
Aluminum	DC150mA 1x6W	440lm/3000K	Ra≥90	OSRAM


Color : □ White ■ Black



h(m)	E(lx)	D(m)
1	1447	0.45
2	361	0.91
3	160	1.36
4	90	1.82



h(m)	E(lx)	D(m)
1	906	0.71
2	226	1.43
3	100	2.14
4	56	2.85




LX.DC.TB0315-1


0.55 III F CE IP20

Material	Input	Luminous Flux	CRI	Lamp
Aluminum	DC350mA 1x15W	1016lm/3000K	Ra≥90	OSRAM

Color : □ White ■ Black




h(m)	E(lx)	D(m)
1	3208	0.49
2	802	0.98
3	356	1.48
4	200	1.97



h(m)	E(lx)	D(m)
1	2270	0.67
2	567	1.34
3	252	2.01
4	141	2.67






LX.DC.TF0403-1




Material	Input	Luminous Flux	CRI	Lamp
Aluminum	DC150mA 1x3W	155lm/3000K	Ra≥90	OSRAM

Color : □ White ■ Black



h(m)	E(lx)	D(m)
		120°
1	48	2.73
2	12	5.47
3	5	8.20
4	3	10.94




LX.DC.TF0406-1




Material	Input	Luminous Flux	CRI	Lamp
Aluminum	DC250mA 1x6W	212lm/3000K	Ra≥90	OSRAM

Color : □ White ■ Black



h(m)	E(lx)	D(m)
		120°
1	77	2.76
2	19	5.52
3	8	8.28
4	4	11.03

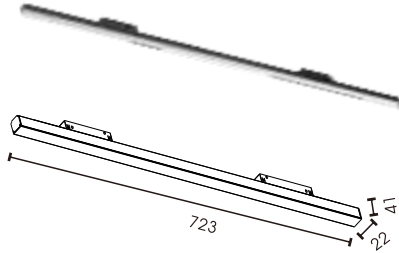


LX.DC.TF0409-1




Material	Input	Luminous Flux	CRI	Lamp
Aluminum	DC350mA 1x9W	310lm/3000K	Ra≥90	OSRAM

Color : □ White ■ Black



h(m)	E(lx)	D(m)
		120°
1	113	2.80
2	28	5.60
3	12	8.40
4	7	11.21

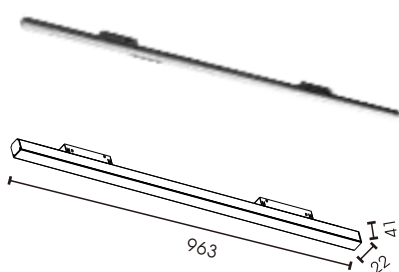


LX.DC.TF0412-1




Material	Input	Luminous Flux	CRI	Lamp
Aluminum	DC500mA 1x12W	417lm/3000K	Ra≥90	OSRAM


Color : □ White ■ Black



h(m)	E(lx)	D(m)
		120°
1	149	2.82
2	37	5.63
3	16	8.45
4	9	11.26

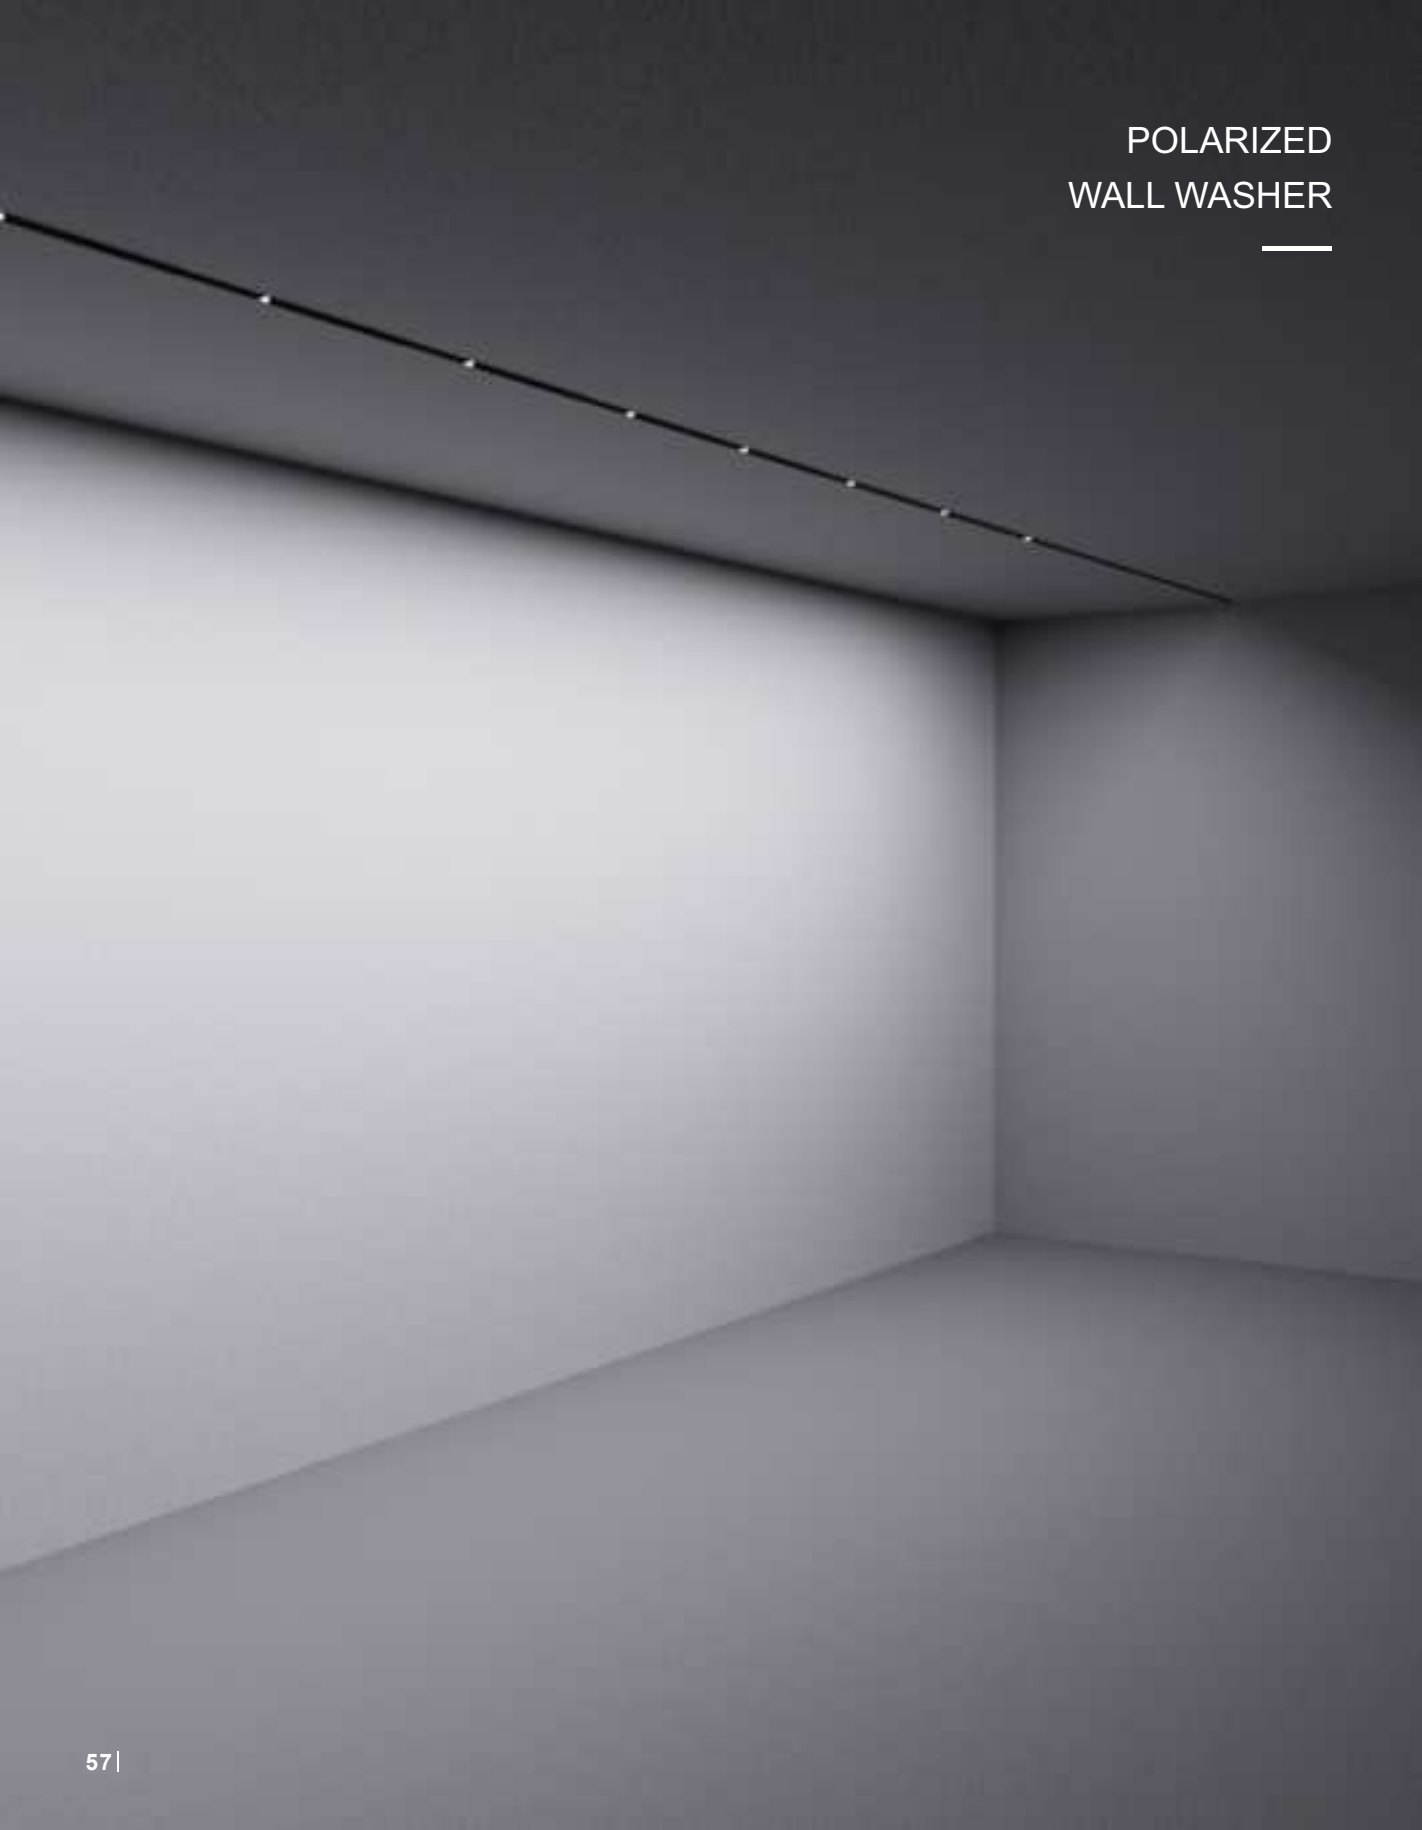

POLARIZED
WALL WASHER




LX.DC.TB0315-X

0.30 III F CE IP20

Material	Input	Luminous Flux	CRI	Lamp
Aluminum	DC350mA 1x15W	906lm/3000K	Ra≥90	OSRAM

Color : ☐ White ☒ Black



h(m)	E(lx)	D(m)
		32x40°
1	2083	0.72
2	520	1.44
3	231	2.16
4	130	2.87







Product profile

Item Code	Input	Luminous Flux	Lamp	Beam Angle	Available Dimming
LX.DC.PS0108-1	DC500mA 1x8W	375lm	CREE	15°/24°/36°	0-10V/Dali
LX.DC.PS0110-C	DC250mA 1x10W	921lm	Honourtek	20°/36°	0-10V/Dali



Size

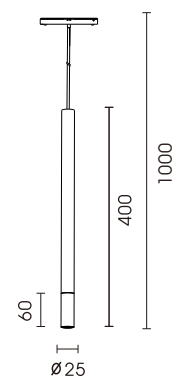

DC.PS0108-1

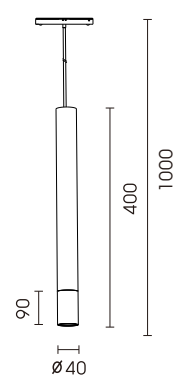

DC.PS0110-C

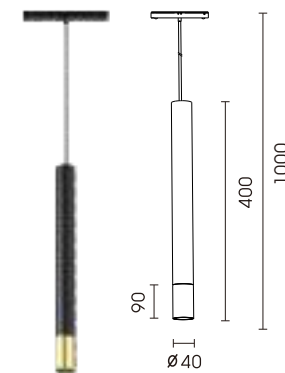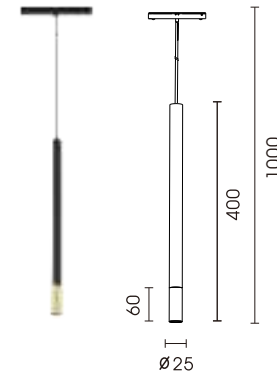


LX.DC.PS0108-1




Material	Input	Luminous Flux	CRI	Lamp
Aluminum	DC500mA 1x8W	375lm/3000K	Ra≥90	CREE


Color : □ White ■ Black



h(m)	E(lx)	D(m)
1	1067	0.42
2	269	0.84
3	119	1.26
4	67	1.68



h(m)	E(lx)	D(m)
1	685	0.53
2	171	1.06
3	76	1.59
4	42	2.12




h(m)	E(lx)	D(m)
1	471	0.62
2	118	1.25
3	52	1.87
4	29	2.49

LX.DC.PS0110-C




Material	Input	Luminous Flux	CRI	Lamp
Aluminum	DC250mA 1x10W	921lm/3000K	Ra≥95	Honourtek

Color : □ White ■ Black



h(m)	E(lx)	D(m)
1	2823	0.36
2	705	0.72
3	313	1.08
4	176	1.44



h(m)	E(lx)	D(m)
1	1476	0.63
2	368	1.26
3	164	1.89
4	92	2.52

Optional Accessories



Honeycomb
Size: Ø19 x 3
Size: Ø33 x 3

Combed Glass
Size: Ø19 x 3
Size: Ø33 x 3

Woven Glass
Size: Ø19 x 3
Size: Ø33 x 3

Optional Colors for Baffle



White

Golden

Black




Color : ☐ White ☒ Black


Product profile

Item Code	Input	Luminous Flux	Lamp	Beam Angle	Available Dimming
LX.DC.PS0206-C	DC150mA 1x6W	420lm	Honourtek	15°/24°/36°	0-10V/Dali
LX.DC.PS0210-C	DC250mA 1x10W	660lm	Honourtek	15°/24°/36°/50°	0-10V/Dali



Size



DC.PS0206-C



DC.PS0210-C




LX.DC.PS0206-C

0.25 III V CE IP20

Material	Input	Luminous Flux	CRI	Lamp
Aluminum	DC150mA 1x6W	420lm/3000K	Ra≥95	Honourtek

Color : ☐ White ☒ Black

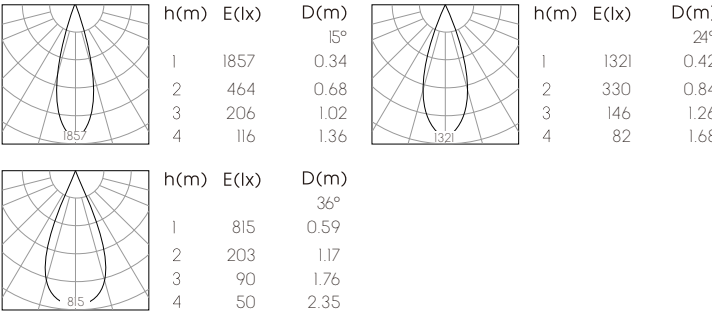


LX.DC.PS0210-C

0.33 III V CE IP20

Material	Input	Luminous Flux	CRI	Lamp
Aluminum	DC250mA 1x10W	660lm/3000K	Ra≥95	Honourtek

Color : ☐ White ☒ Black

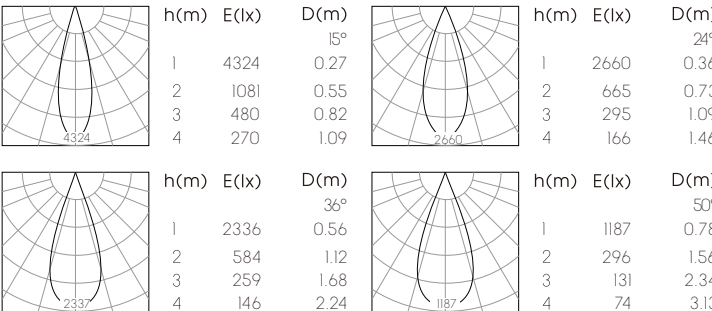






Color : ☐ White ☒ Black


Product profile

Item Code	Input	Luminous Flux	Lamp	Beam Angle	Available Dimming
LX.DC.PF0104-1	DC150mA 1x4W	160lm	OSRAM	120°	0-10V/Dali
LX.DC.PF0204-1	DC150mA 1x4W	210lm	OSRAM	120°	0-10V/Dali


Size



DC.PF0104-1



DC.PF0204-1




LX.DC.PF0104-1


0.35 III F CE IP20

Material	Input	Luminous Flux	CRI	Lamp
Aluminum	DC150mA 1x4W	160lm/3000K	Ra≥90	OSRAM

Color : ☐ White ☒ Black



h(m)	E(lx)	D(m)
		120°
1	102	1.85
2	25	3.69
3	11	5.54
4	6	7.39




LX.DC.PF0204-1

0.62 III F CE IP20

Material	Input	Luminous Flux	CRI	Lamp
Aluminum	DC150mA 1x4W	210lm/3000K	Ra≥90	OSRAM

Color : ☐ White ☒ Black





h(m)	E(lx)	D(m)
		120°
1	129	1.59
2	32	3.18
3	14	4.77
4	8	6.36



TRACKS

TRACKS
ACCESSORIES
DIMENSIONS
DIAGRAM

INSTALLATION

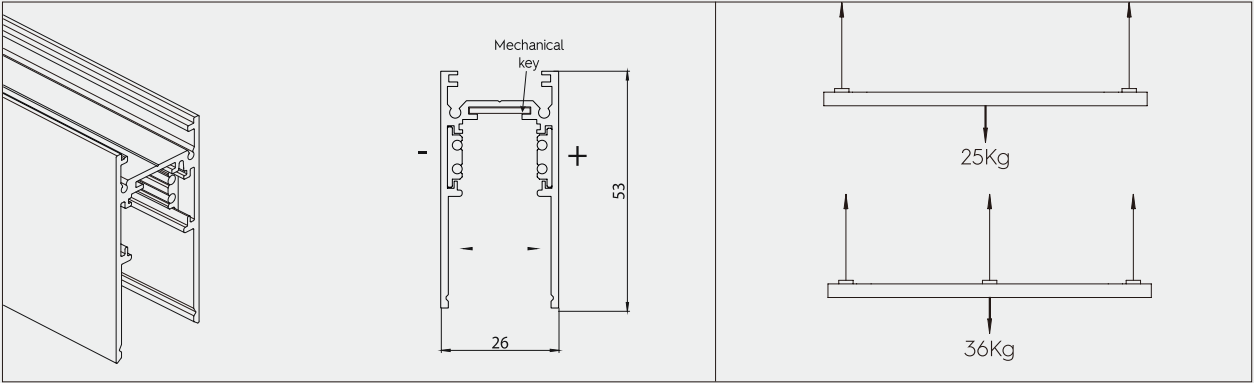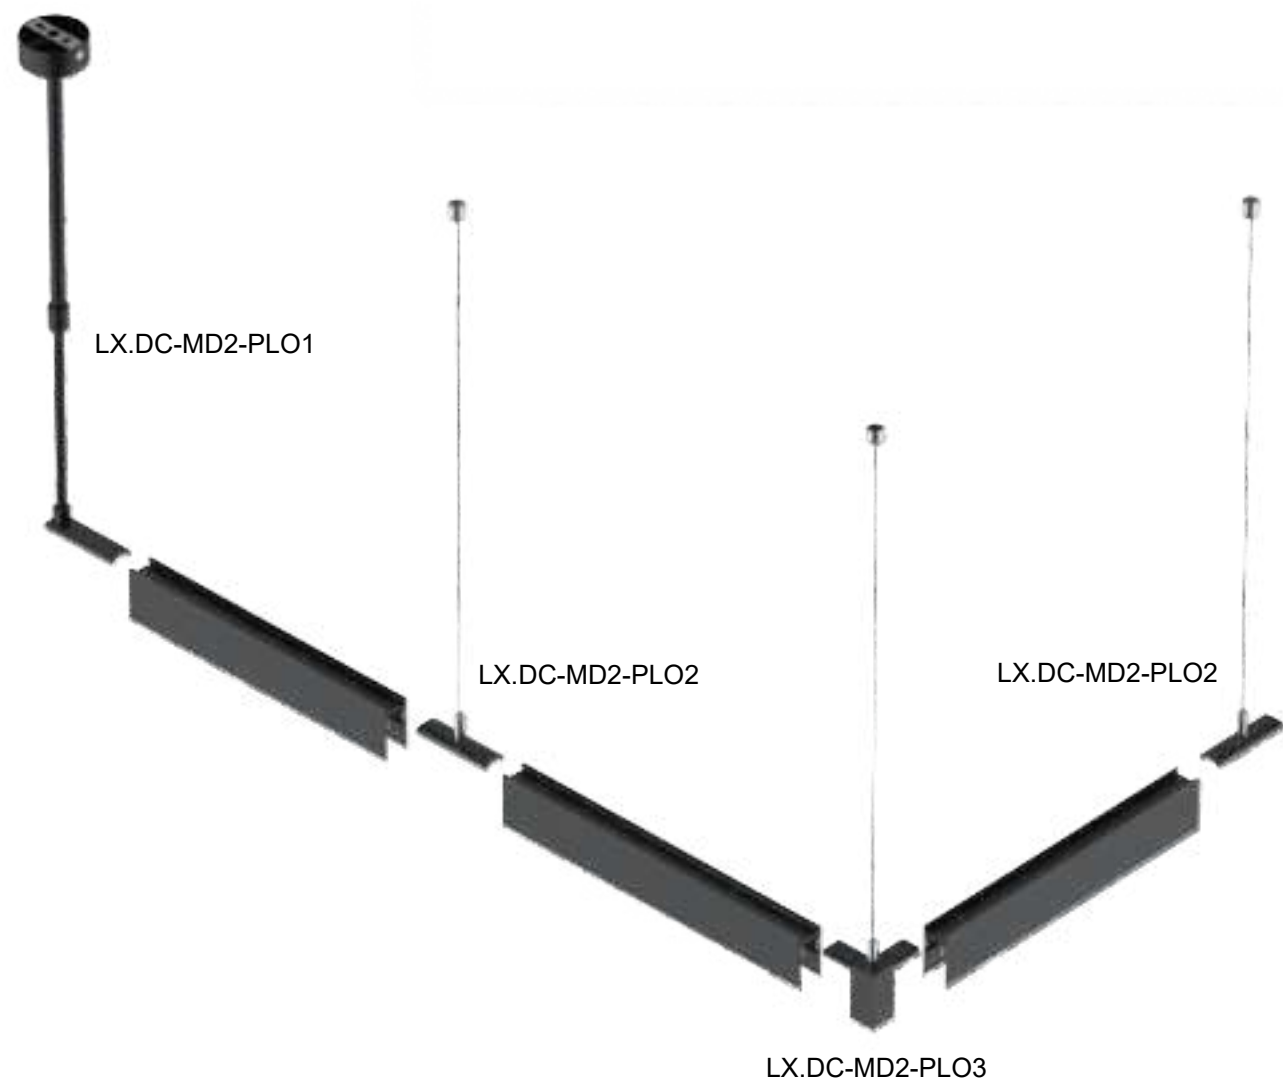

LX.DC-MD02

Dimensions
1M,2M,3M,

W B



LX.DC-LD01

Feeder Type

W B



LX.DC-LD02

I Connector Type

W B



LX.DC-LD03

L Connector Type

W B



LX.DC-LD06

flexiable connector


W B



LX.DC-LD03



track cover

B

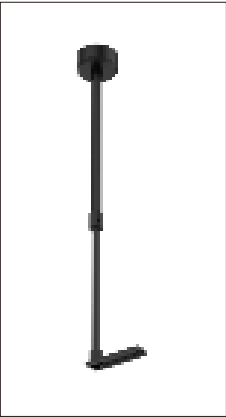


LX.DC-MD2-PL01

- Includes:
- ceiling hook
 - metal stem (L=1500mm)

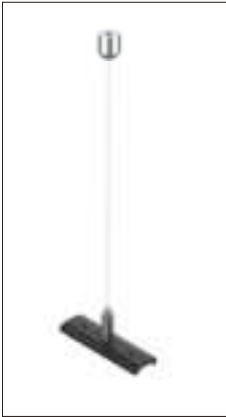


LX.DC-MD2-PL02



- Includes:
- ceiling hook
 - Wire Rope (L=1500mm)



LX.DC-MD2-PL03

- Includes:
- ceiling hook
 - Wire Rope (L=1500mm)



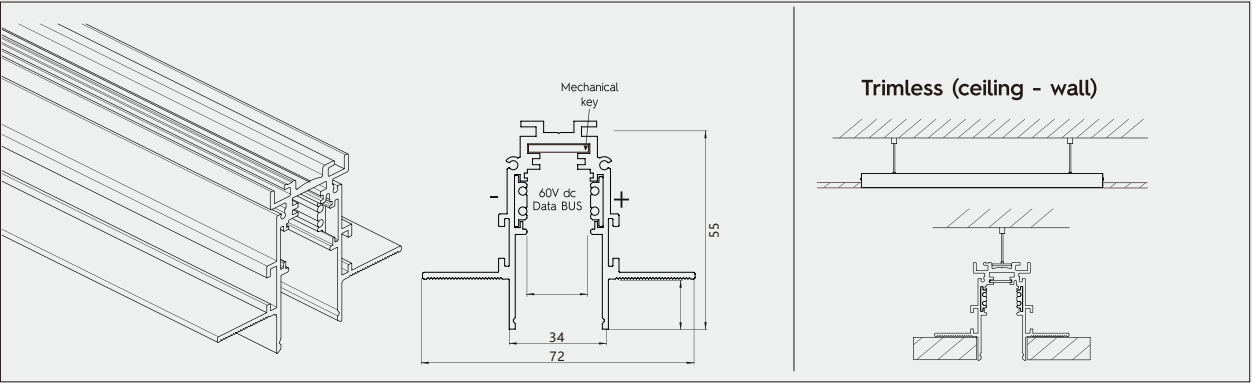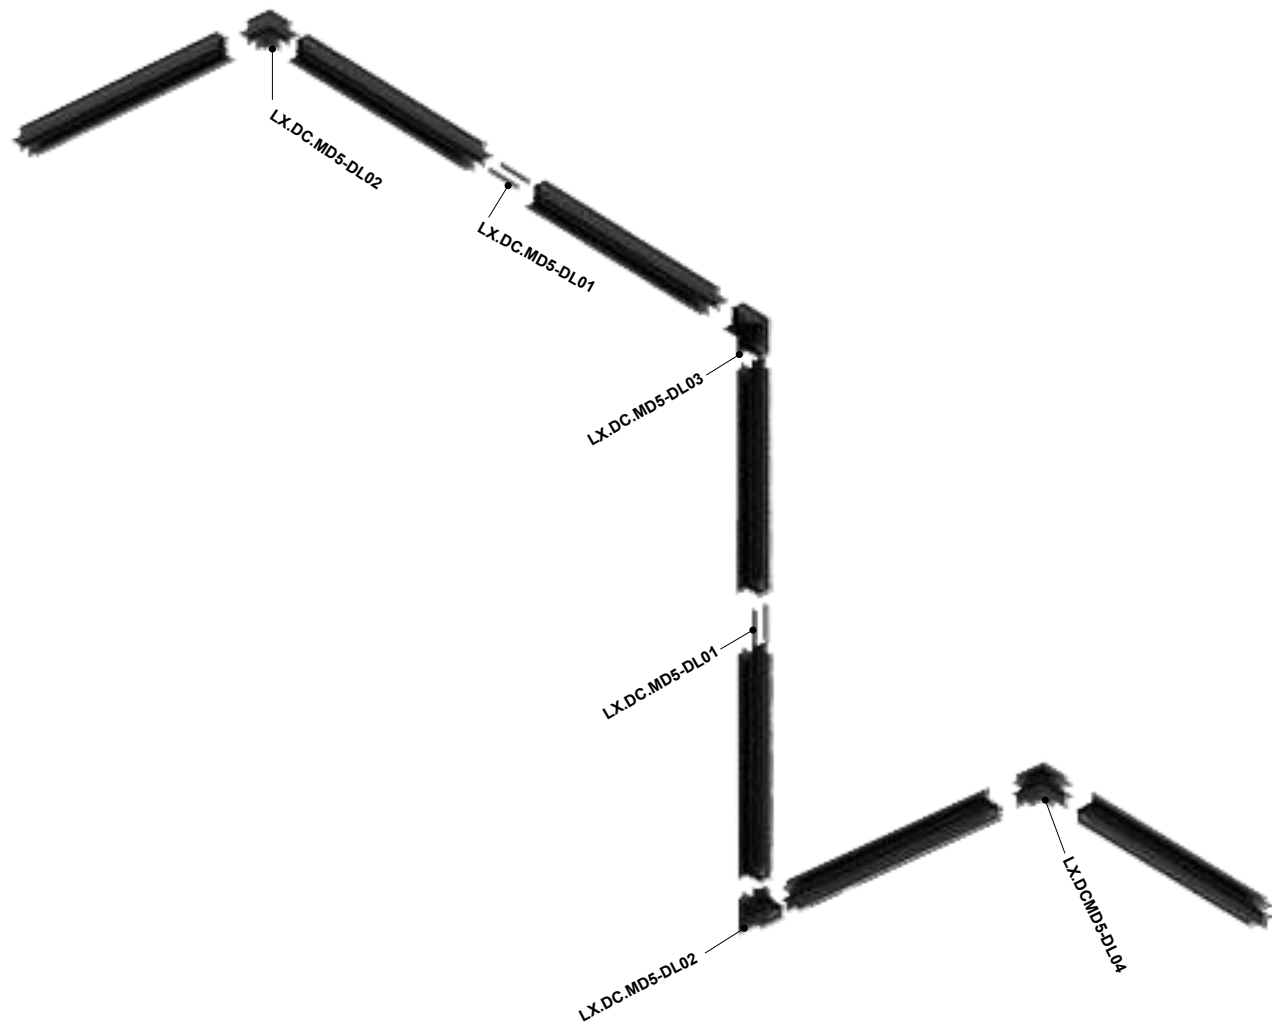

LX.DC-MD05

Dimensions
1M,2M,3M,

W B



LX.DC-LD01

Feeder Type

W B



LX.DC-LD02

I Connector Type

W B



LX.DC-LD03

L Connector Type

W B



LX.DC-LD06

flexiable connector

W B



LX.DC-LD04

flexiable connector


W B



LX.DC-LD09


track cover

B

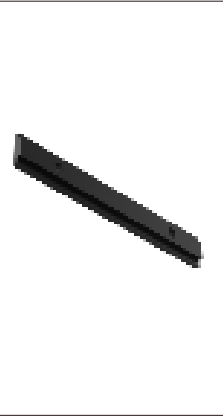

LX.DC.MD5-DL01

Connector Bracket




W B



LX.DC.MD5-DL02

Vertical Corner Joint




W B



LX.DC.MD5-DL03

Internal Vertical Corner Joint




W B




LX.DC.MD5-DL01

External Vertical Corner Joint




W B

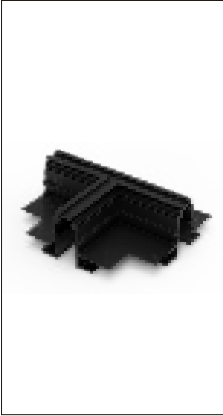

LX.DC.MD5-DL05

T Angle Connection Position



W B

Remote 48V Transformer

	LRS-35	35W Single Output Switching Power Supply AC95-264V 50-60HZ DC48V 99X82X30mm
	LRS-50	50W Single Output Switching Power Supply AC95-264V 50-60HZ DC48V 99X82X30mm
	LRS-100	100W Single Output Switching Power Supply AC95-264V 50-60HZ DC48V 128X97X30mm
	LRS-200	200W Single Output Switching Power Supply AC95-264V 50-60HZ DC48V 215X115X30mm

Integrated 48V Transformer

	CXD20-60W	60W Single Output Switching Power Supply AC100-240V 50-60HZ DC48V 130x23x26mm
	CXD20-100W	100W Single Output Switching Power Supply AC100-240V 50-60HZ DC48V 220x23x26mm
	CXD20-200W	200W Single Output Switching Power Supply AC100-240V 50-60HZ DC48V 310x23x26mm
	CXD20-400W	400W Single Output Switching Power Supply AC100-240V 50-60HZ DC48V 310x23x46mm

EN1812 DALIGATE

