



# CONSTRUCTION ATTACHMENTS, INC.

PROUDLY MADE IN THE USA

## PRODUCT GUIDE

ATTACHMENT AND APPLICATION SELECTION



1160 CAL COURT, LENOIR, NORTH CAROLINA 28645 USA

[www.ConstructionAttachments.com](http://www.ConstructionAttachments.com)

sales@calmfg.com | ph (828) 758-2674 | fax (828) 754-1887



# HYDRAULIC BREAKERS



DESIGNED FOR AIDING IN CONSTRUCTION AND DEMOLITION OF CONCRETE STRUCTURES, ROCKS, ASPHALT, ETC.

## FOR COMPACT EXCAVATORS, TRACTOR LOADER BACKHOES AND MID/LARGE EXCAVATORS

### PRODUCT FEATURES:

- More power, more impact energy per dollar than any hammer on the market
- Designed with fewer parts to insure quicker and less costly maintenance
- Excavator models come complete with mounting bracket, hoses and 1 point of choice.  
(additional charge for post driver and asphalt cutter)

**WARNING:** Chisel paste must be used with hydraulic breakers. Using high temperature grease as a substitution for chisel paste will cause damage to components of breaker.



| Item #      | Description                 | Operating Pressure PSI | Oil Flow Required GPM | Machine Weight Class lbs | Tool Dia. | Hose Diameter & Length | Est Weight lbs |
|-------------|-----------------------------|------------------------|-----------------------|--------------------------|-----------|------------------------|----------------|
| 1BR225F-EX  | CAL 225F Hydraulic Breaker  | 1,305-1,740            | 3.76-6.6              | 1,400-3,000              | 1.77"     | 1/2"x80"               | 294            |
| 1BR500F-EX  | CAL 500F Hydraulic Breaker  | 1,280-1,710            | 7.0-16.0              | 3,000-8,000              | 2.24"     | 1/2"x80"               | 406            |
| 1BR650F-EX  | CAL 650F Hydraulic Breaker  | 1,565-2,347            | 9.25-18.49            | 5,000-9,000              | 2.76"     | 3/4"x80"               | 546            |
| 1BR850F-EX  | CAL 850F Hydraulic Breaker  | 1,740-2,393            | 10.57-22.1            | 5,000-11,000             | 2.95"     | 3/4"x80"               | 836            |
| 1BR1000F-EX | CAL 1000F Hydraulic Breaker | 2,030-2,465            | 14.6-24.8             | 7,000-15,000             | 3.15"     | 3/4"x80"               | 1020           |
| 1BR1200F-EX | CAL 1200F Hydraulic Breaker | 2,030-2,465            | 15.9-26.4             | 10,000-20,000            | 3.54"     | 3/4"x80"               | 1220           |
| 1BR2200F-EX | CAL 2200F Hydraulic Breaker | 2,030-2,610            | 23.8-37.1             | 20,000-32,000            | 4.14"     | 3/4"x80"               | 2186           |

Models 225D-2200D are available with a quick coupler or pin-on hitch. Specify make and model of host machine when ordering. Weights may vary based on selected hitch styles.

\* Product design subject to change

# HYDRAULIC BREAKERS



DESIGNED FOR AIDING IN CONSTRUCTION AND DEMOLITION OF CONCRETE STRUCTURES, ROCKS, ASPHALT, ETC.

## FOR COMPACT EXCAVATORS, TRACTOR LOADER BACKHOES AND MID/LARGE EXCAVATORS (CONT'D)

**WARNING:** Chisel paste must be used with hydraulic breakers. Using high temperature grease as a substitution for chisel paste will cause damage to components of breaker.

| Item #       | Description                  | Operating Pressure PSI | Oil Flow Required GPM | Machine Weight Class lbs | Tool Dia. | Hose Diameter & Length | Est Weight lbs |
|--------------|------------------------------|------------------------|-----------------------|--------------------------|-----------|------------------------|----------------|
| 1BR2200F-EX  | CAL 2200F Hydraulic Breaker  | 3,030-2,610            | 23.8-37.1             | 20,000-32,000            | 4.14"     | 3/4"x80"               | 2186           |
| 1BR3200F-EX  | CAL 3200F Hydraulic Breaker  | 2,320-2,750            | 34.4-68.7             | 32,000-44,000            | 4.92"     | 1"x90"                 | 3490           |
| 1BR4500F-EX  | CAL 4500F Hydraulic Breaker  | 2,320-2,750            | 34.4-68.7             | 36,000-56,000            | 5.32"     | 1"x90"                 | 4294           |
| 1BR6000F-EX  | CAL 6000F Hydraulic Breaker  | 2,320-2,750            | 14.6-73.9             | 44,000-70,000            | 5.90"     | 1-1/4"x108"            | 5764           |
| 1BR8000F-EX  | CAL 8000F Hydraulic Breaker  | 2,320-2,750            | 47.6-84.5             | 70,000-90,000            | 6.10"     | 1-1/4"x108"            | 6430           |
| 1BR11000F-EX | CAL 11000F Hydraulic Breaker | 2,320-2,750            | 68.7-105.7            | 88,000-140,000           | 6.89"     | 1-5/8"x110"            | 7810           |
| 1BR18000F-EX | CAL 18000F Hydraulic Breaker | 2,320-2,750            | 95.0-119.0            | 132,000-220,000          | 8.26"     | 1-5/8"x110"            | 15432          |

## AUTO LUBE SYSTEMS



item# 6BPCAUTOLUBE5



item# 6BPCAUTOLUBE6



item# 6BPCAUTOLUBEX12

|                 |                                                     |                      |
|-----------------|-----------------------------------------------------|----------------------|
| 6BPCAUTOLUBE5   | Hammer mounted refillable vibratory auto lube       | CAL 550 - CAL 2200   |
| 6BPCAUTOLUBE6   | Hammer mounted large refillable vibratory auto lube | CAL 3200 - CAL 18000 |
| 6BPCAUTOLUBEX12 | Electric adjustable machine mounted 12V auto lube   | CAL 1200 - CAL 18000 |
| 6BPCAUTOLUBEX24 | Electric adjustable machine mounted 24V auto lube   | CAL-1200 - CAL-18000 |

Models 3200F - 18000F come standard with pin-on mounts with pins and locking collar. Specify make and model of host machine when ordering. Weights may vary based on selected hitch styles.

\* Product design subject to change

# HYDRAULIC BREAKERS



DESIGNED FOR AIDING IN CONSTRUCTION AND DEMOLITION OF CONCRETE STRUCTURES, ROCKS, ASPHALT, ETC.

## FOR SKID STEER LOADERS

### PRODUCT FEATURES:

- More power, more impact energy per dollar than any hammer on the market
- Designed with fewer parts to insure quicker and less costly maintenance
- Skid steer models come complete with skid steer mounting bracket, hoses, flat faced couplers and 1 point of choice.

**(additional charge for post driver and asphalt cutter)**

**WARNING:** Chisel paste must be used with hydraulic breakers. Using high temperature grease as a substitution for chisel paste will cause damage to components of breaker.



SHOWN WITH BREAKER STAND (SOLD SEPARATELY)

| Item #      | Description                 | Operating Pressure<br>PSI | Oil Flow Required<br>GPM | Machine Weight Class<br>lbs | Tool Dia. | Hose Diameter & Length | Est Weight<br>lbs |
|-------------|-----------------------------|---------------------------|--------------------------|-----------------------------|-----------|------------------------|-------------------|
| 1BR225F-SS  | CAL 225F Hydraulic Breaker  | 1,305-2,000               | 3.76-6.6                 | 1,400-3,000                 | 1.77"     | 1/2"x80"               | 296               |
| 1BR500F-SS  | CAL 500F Hydraulic Breaker  | 1,280-2,500               | 6.08-16.0                | 3,000-8,000                 | 2.24"     | 1/2"x80"               | 724               |
| 1BR650F-SS  | CAL 650F Hydraulic Breaker  | 1,565-3,500               | 9.25-18.49               | 5,000-9,000                 | 2.76"     | 3/4"x120"              | 846               |
| 1BR850F-SS  | CAL 850F Hydraulic Breaker  | 2,000-3,500               | 10.57-22.1               | 5,000-11,000                | 2.95"     | 3/4"x120"              | 968               |
| 1BR1000F-SS | CAL 1000F Hydraulic Breaker | 2,030-3,500               | 14.6-24.8                | 7,000-15,000                | 3.15"     | 3/4"x120"              | 1220              |


Specify make and model of host machine when ordering.

\* Product design subject to change

DESIGNED FOR AIDING IN CONSTRUCTION AND DEMOLITION OF CONCRETE STRUCTURES, ROCKS, ASPHALT, ETC.

## Hydraulic Breaker Accessories

### MOUNTING BRACKETS

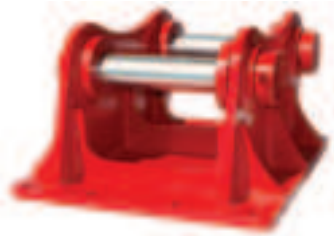

**Pin-on Excavator**

- Available for all Excavator models
- Pins and locking collars come standard



**Skid Steer Universal**


- Available for all Skid Steer models
- Comes standard on all Skid Steer model breakers



**Dual Mounting Bracket**


- Available for all Compact Excavator, Backhoe, and Skid Steer models
- Allows for quick change between Compact Excavator, Backhoe, and Skid Steer machines

### CHISEL TOOLS FOR HYDRAULIC BREAKERS

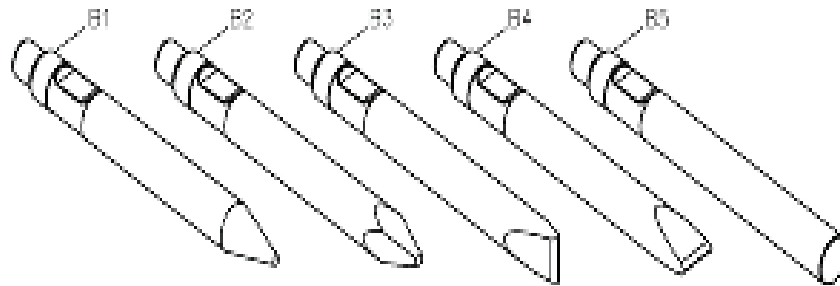

Item      Description      Available Models

|    |                  |                    |
|----|------------------|--------------------|
| B1 | Conical Point    | All Models         |
| B2 | Moil Point       | All Models         |
| B3 | Cross-Cut Chisel | All Models         |
| B4 | In-Line Chisel   | All Models         |
| B2 | Blunt Point      | All Models         |
| B7 | Asphalt Cutter   | CAL 650 - CAL 1200 |
| B9 | Post Driver      | CAL 850            |

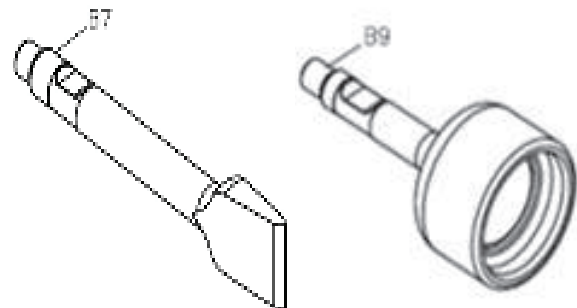

\* Product design subject to change

# HYDRAULIC ROTARY BRUSH CUTTERS



LAND CLEARING MACHINES, POWERFUL, AND VERSATILE ENOUGH TO CUT THROUGH OVERGROWN BRUSH, TREES, AND DENSE TERRAIN

## For Mini Skid Steer



|                       | 42"<br>Cutter | 48"<br>Cutter |
|-----------------------|---------------|---------------|
| Overall Cutter Width  | 50"           | 56"           |
| Overall Cutter Depth  | 53"           | 61"           |
| Overall Cutter Height | 22"           |               |



### EXCAVATOR CUTTER PRODUCT FEATURES:

- One piece top deck design for strength and structural durability
- 1/2" thick serrated blade carrier
- Recessed carrier design for bolt head protection
- Heavy duty brush guard
- Available with Bobcat MT or Mini Universal Hitch (Dingo)

| Item # | Description                      | # of<br>Blades | Cutting<br>Capacity<br>Diameter | True<br>Cut<br>Width | Min<br>Cut<br>Height | Oil Flow<br>Required<br>GPM | Tip<br>Speed<br>FPM | Est<br>Weight<br>(lbs) |
|--------|----------------------------------|----------------|---------------------------------|----------------------|----------------------|-----------------------------|---------------------|------------------------|
| 1BCM42 | 42" Mini Skid Steer Brush Cutter | 2              | 4"                              | 42"                  | 2.5"                 | 10-18                       | 11,000-18,000       | 521                    |
| 1BCM48 | 48" Mini Skid Steer Brush Cutter | 3              |                                 | 48"                  |                      |                             |                     | 628                    |



- Blade Size: 6" wide x 11.94" long
- Blade, Bolt, Lock Washer, and Nut (Nuts must be welded)

• 42" Mini Cutter Blade Carrier

• 48" Mini Cutter Blade Carrier

\* Product design subject to change

\* Product design subject to change

# HYDRAULIC ROTARY BRUSH CUTTERS



LAND CLEARING MACHINES, POWERFUL, AND VERSATILE ENOUGH TO CUT THOUGH OVERGROWN BRUSH, TREES, AND DENSE TERRAIN

## For Skid Steer and Compact Track Loaders



Powered by:



|                       | 60"<br>Cutter | 72"<br>Cutter |
|-----------------------|---------------|---------------|
| Overall Cutter Width  | 70"           | 82"           |
| Overall Cutter Depth  | 77"           | 84"           |
| Overall Cutter Height | 25"           |               |

| Item #     | Description                                    | # of<br>Blades | Cutting<br>Capacity<br>Diameter | True Cut<br>Width | Min<br>Cut<br>Height | Oil Flow<br>Required<br>GPM | Tip<br>Speed<br>FPM | Est<br>Weight<br>(lbs) |
|------------|------------------------------------------------|----------------|---------------------------------|-------------------|----------------------|-----------------------------|---------------------|------------------------|
| 1BCSS60    | 60" Skid Steer Cutter Standard Flow            | 3              | 8"                              | 60"               | 2"                   | 16-25                       | 7,700-<br>13,600    | 1626                   |
| 1BCSS60T   | 60" Skid Steer Cutter Standard Flow with Teeth |                |                                 | 1636              |                      |                             |                     |                        |
| 1BCSS72    | 72" Skid Steer Cutter Standard Flow            |                |                                 | 1964              |                      |                             |                     |                        |
| 1BCSS72T   | 72" Skid Steer Cutter Standard Flow with Teeth |                |                                 | 1974              |                      |                             |                     |                        |
| 1BCSS72HF  | 72" Skid Steer Cutter High Flow                | 3              | 8"                              | 72"               | 2"                   | 24-45                       | 7,700-<br>14,600    | 1994                   |
| 1BCSS72HFT | 72" Skid Steer Cutter HighFlow with Teeth      |                |                                 |                   |                      |                             |                     | 2004                   |

### PRODUCT FEATURES:

- 5/8" thick serrated blade carrier
- 5/8" x 1-1/2" long shank mulching teeth
- 12 teeth per carrier both 60" and 72" models
- Carbide tip cutting surface: 1/2"
- Carbide tip cutting depth: 7/8"
- Wire guard installed for gear box seal protection



- Blade Size: 6" wide x 14.375" Long
- Blade, Bolt, Lock Washer, and Nut (Nuts must be welded)



- Replacement Mulching Teeth

\* Product design subject to change

# HYDRAULIC ROTARY BRUSH CUTTERS



LAND CLEARING MACHINES, POWERFUL, AND VERSATILE ENOUGH TO CUT THROUGH OVERGROWN BRUSH, TREES, AND DENSE TERRAIN

## For Mini / Compact Excavators



|                       | 42"<br>Cutter | 48"<br>Cutter |
|-----------------------|---------------|---------------|
| Overall Cutter Width  | 48"           | 54"           |
| Overall Cutter Depth  | 48"           | 54"           |
| Overall Cutter Height | 24"           |               |



### EXCAVATOR CUTTER PRODUCT FEATURES:

- Wire guard installed on carrier
- 1/2" thick blade carrier
- Integrated deck and hitch with new thumb design
- Recessed carrier design for bolt head protection

| Item #       | Description                         | # of<br>Blades | Cutting<br>Capacity<br>Diameter | True<br>Cut<br>Width | Min<br>Cut<br>Height | Oil Flow<br>Required<br>GPM | Tip<br>Speed<br>FPM | Est<br>Weight<br>(lbs) |
|--------------|-------------------------------------|----------------|---------------------------------|----------------------|----------------------|-----------------------------|---------------------|------------------------|
| 1BCEX42-41QC | 42" Mini EX Brush Cutter 41cc Motor | 2              | 6"                              | 42"                  | 1"                   | 10-18                       | 11,000-18,000       | 655                    |
| 1BCEX48-41QC | 48" Mini EX Brush Cutter 41cc Motor | 3              |                                 | 48"                  |                      |                             |                     | 728                    |
| 1BCEX42-63QC | 42" Mini EX Brush Cutter 63cc Motor | 2              | 6"                              | 42"                  | 1"                   | 19-29                       | 11,000-18,000       | 670                    |
| 1BCEX48-63QC | 48" Mini EX Brush Cutter 63cc Motor | 3              |                                 | 48"                  |                      |                             |                     | 743                    |



- Blade Size: 6" wide x 11.94" long
- Blade, Bolt, Lock Washer, and Nut (Nuts must be welded)



• 42" Excavator Cutter Blade Carrier



• 48" Excavator Cutter Blade Carrier

\* Product design subject to change

DIGGING • HILL SCRAPING • TRENCHING • LOADING • BACK GRADING • EXCAVATING

**Specifically designed for increased machine performance  
and long term durability**



## EXCAVATOR BUCKET PRODUCT FEATURES:

- 1" beveled C1060 front cutting edge
- AR plate front side cutters, side plates and wear strips
- Integrated hitch backing plate and square top tube design add additional strength
- Weld-on style teeth (shanks, tooth tip, and side pins)
- Smooth edge also available
- Available widths: 12", 16", 18", 24", 30", 36" and 48"
- Available loader size (LBS): Kubota 040 (6-10k), Kubota 057 (11-15k), and Kubota 080 (16-20k)
- Quick attach or pin-on available



- Shown with select pin on mount



### 6-10K BUCKETS

- Available widths: 12" - 36"
- Product weight range: 158 – 380 lbs
- Shown with Kubota KX 040QC mount



### 11-15K BUCKETS

- Available widths: 12" - 48"
- Product weight range: 190– 587 lbs
- Shown with Kubota KX 057QC mount



### 16-20K BUCKETS

- Available widths: 18" - 48"
- Product weight range: 472– 1323 lbs
- Shown with Kubota KX 080QC mount

\* Product design subject to change

DIGGING • HILL SCRAPING • TRENCHING • LOADING • BACK GRADING • EXCAVATING

**Specifically designed for increased machine performance  
and long term durability**

## KUBOTA STYLE COUPLER

### PRODUCT FEATURES:


- Turn your pin on excavators into a quick attach
- Available loader sizes: 6-10k, 11-15k, 16-20k



## HYDRAULIC THUMB

### PRODUCT FEATURES:

- Enhanced durability and operator accuracy during clamping
- Constructed of AR plate material
- Integral design increases surface area when clamping
- Larger diameter cylinder rod for increased clamping force
- Ridged / radical tooth design for aggressive applications
- Available in hydraulic only
- Available loader sizes: 6-10k, 11-15k, 16-20k

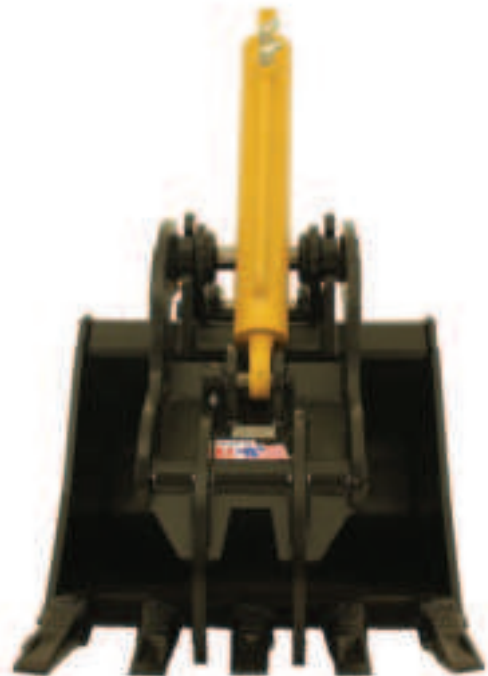

\* Product design subject to change

DIGGING • HILL SCRAPING • TRENCHING • LOADING • BACK GRADING • EXCAVATING

**Specifically designed for increased machine performance  
and long term durability**

## EXCAVATOR BUCKET PRODUCT FEATURES:

- 1" beveled C1060 front cutting edge
- AR plate front side cutters, side plates and wear strips
- Integrated hitch backing plate and square top tube design add additional strength
- CAT style teeth
- Smooth edge also available
- Available widths: 12", 16", 18", 24", 30", and 36"
- Available loader sizes: JD35G, JD50G, JD60G (also fits Hitachi)
- Wedge lock style mount available
- Forged D-Ring comes standard

### JD 35G BUCKETS

- Available widths: 12" - 36"
- Product weight range: 158 - 380 lbs
- Shown with John Deere 35G mount



### JD 50G BUCKETS

- Available widths: 12" - 36"
- Product weight range: 190 - 492 lbs
- Shown with John Deere 50G mount



### JD 60G BUCKETS

- Available widths: 12" - 36"
- Product weight range: 190 - 492 lbs
- Shown with John Deere 60G mount



\* Product design subject to change

# THE "HOOK UP" ADAPTER



DESIGN ALLOWS THE USE OF MOST SKID STEER ATTACHMENTS TO ADAPT TO MINI EXCAVATORS



## SKID STEER ADAPTER "THE HOOKUP"

- Skid steer universal adapter for excavators
- For excavators up to 20,000 lbs
- Product weight: 264 lbs



***The Hookup host hitch can be unbolted from the skid steer attachment, rotated 180 degrees, allowing the attachment to be used for:***

- |                 |              |
|-----------------|--------------|
| ✓ Back grading  | ✓ Digging    |
| ✓ Back hauling  | ✓ Trenching  |
| ✓ Back filling  | ✓ Loading    |
| ✓ Hill scraping | ✓ Excavating |

## HOOK UP PRODUCT FEATURES:

- Incorporates standard 2 pin universal skid steer latching system
- Mount in reversible for working toward and away from the host machine
- Shipped fully assembled and ready to work

\* Product design subject to change

# GENERAL PURPOSE BUCKETS



DIGGING • LEVELING • LOADING • GRADING • CARRYING • DUMPING



## MINI SKID STEER STANDARD BOTTOM

- Available widths: 36", 42", 48", 54"
- Product weight range: 160 – 263 lbs


## GENERAL-PURPOSE BUCKET ATTACHMENT OPTIONS:

- reversible bolt-on cutting edge
- bolt-on teeth
- bolt-on large teeth
- weld-on teeth
- bolt-on tooth bar
- bolt-on extended tooth bar



## MINI SKID STEER HIGH CAPACITY

- Available widths: 36", 42", 48", 54"
- Product weight range: 263 – 386 lbs

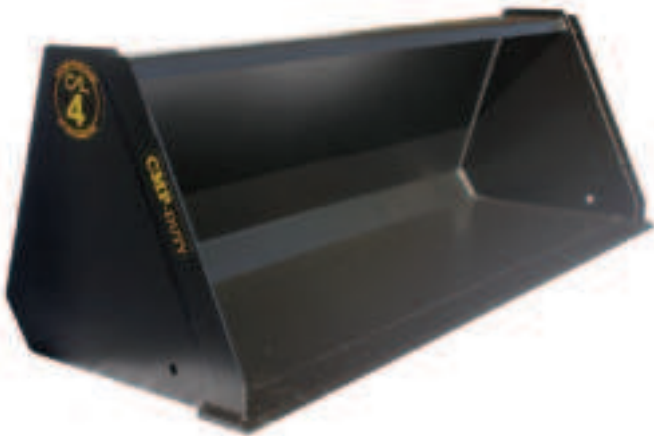

## COMPACT GENERAL PURPOSE

- Available widths: 54", 60", 66", 72"
- Product weight range: 156 – 356 lbs



## XTREME DUTY EXTENDED BOTTOM LOW PROFILE

- Available widths: 62", 66", 72", 78", 84"
- Product weight range: 477 – 972 lbs

\* Product design subject to change

# GENERAL PURPOSE BUCKETS



DIGGING • LEVELING • LOADING • GRADING • CARRYING • DUMPING



## XTREME DUTY STANDARD BOTTOM LOW PROFILE

- Available widths: 62", 66", 72", 78", 84"
- Product weight range: 434 – 896 lbs



## XTREME DUTY HIGH CAPACITY SCRAP

- Available widths: 66", 72", 78", 84"
- Product weight range: 512 – 704 lbs



## XTREME DUTY HIGH CAPACITY / LIGHT MATERIAL

- Available widths: 66", 72", 78", 84"
- Product weight range: 523 – 756 lbs
- Shown with optional bolt-on edge



## ULTRA DUTY LOW PROFILE

- Available widths: 73", 78", 84"
- Product weight range: 949– 1228 lbs
- Bolt-on side cutters come standard



## SEVERE XTREME DUTY LOW PROFILE

- Available widths: 67", 73", 78", 84", 88"
- Product weight range: 676 – 1036 lbs



## XTREME DUTY NURSERY

- Available widths: 73"
- 4" x 1/2" solide edge material
- Removeable top guard
- Product weight range: 563 lbs

\* Product design subject to change

# GENERAL PURPOSE BUCKETS



DIGGING • LEVELING • LOADING • GRADING • CARRYING • DUMPING



## XTREME DUTY AGRICULTURAL STANDARD BACK

- Available widths: 74", 84", 93"
- Product weight range: 494 – 600 lbs



## SEVERE XTREME DUTY AGRICULTURAL STANDARD BACK

- Available widths: 74", 84", 93"
- Product weight range: 592 – 863 lbs



## XTREME DUTY AGRICULTURAL HIGH CAPACITY LITTER

- Available widths: 74", 84", 93", 108"
- Product weight range: 786 – 946 lbs
- Optional rub rail available; see Parts and Accessories



## INDUSTRIAL TRACTOR LOADER BACKHOE

- Available widths: 84", 88", 93"
- Product weight range: 919 – 1083 lbs



## ULTRA DEEP HIGH CAPACITY LANDSCAPE

- Available widths: 74", 84", 93"
- Product weight range: 2188 – 2660 lbs

\* Product design subject to change

# 4-IN-1 MULTI-PURPOSE BUCKETS



SCRAPING • BOTTOM DUMPING • CLAMPING • DIGGING • BULL DOZING • CLAM LOADING • BACK FILLING

## STANDARD FEATURES INCLUDE:

- Reversible bolt-on dozer edge (excludes the mini 4in1 bucket)
- Radius moldboard for improved material loading and unloading
- Pre-drilled high carbon steel (C1064) front cutting edge to accommodate all bolt-on options

## MULTI-PURPOSE BUCKET

### ATTACHMENT OPTIONS

Our buckets include product specific options:

- reversible bolt-on cutting edge
- bolt-on teeth
- bolt-on large teeth
- weld-on teeth
- bolt-on tooth bar
- bolt-on extended tooth bar



### MINI EXTENDED BOTTOM

- Available widths: 42", 48", 54"
- Product weight range: 416- 553 lbs



### XTREME DUTY LOW CAPACITY

- Available widths: 60", 67", 73"
- Product weight range: 674 – 854 lbs
- Optional spill-guard available for additional capacity



### COMPACT STANDARD BOTTOM

- Available widths: 54", 60", 66", 72"
- Product weight range: 430 - 625 lbs

\* Product design subject to change

# 4-IN-1 MULTI-PURPOSE BUCKETS




SCRAPING • BOTTOM DUMPING • CLAMPING • DIGGING • BULL DOZING • CLAM LOADING • BACK FILLING



## XTREME DUTY LOW PROFILE

- Available widths: 67", 73", 76"
- Product weight range: 884 – 1152 lbs

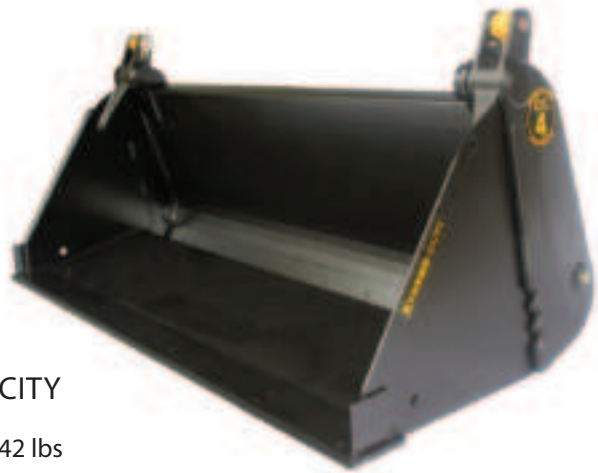

## XTREME DUTY HIGH CAPACITY

- Available widths: 67", 73", 76"
- Product weight range: 858 – 1142 lbs



## SEVERE XTREME DUTY LOW PROFILE

- Available widths: 67", 73", 76", 80", 84"
- Product weight range: 1018 – 1398 lbs
- Shown with optional bolt-on edge and bolt-on side cutters



## SEVERE XTREME DUTY EXTENDED BOTTOM

- Available widths: 67", 73", 76", 80", 84"
- Product weight range: 1112 – 1384 lbs
- Available with bolt-on side cutters

\* Product design subject to change

# 4-IN-1 MULTI-PURPOSE BUCKETS



SCRAPING • BOTTOM DUMPING • CLAMPING • DIGGING • BULL DOZING • CLAM LOADING • BACK FILLING



## SEVERE XTREME DUTY HIGH CAPACITY

- Available widths: 80", 84"
- Product weight range: 989 – 1322 lbs
- Shown with optional bolt-on edge and bolt-on side cutters

## ULTRA DUTY LOW PROFILE

- Available widths: 73", 76", 80", 84"
- Product weight range: 1308 – 1653 lbs
- Bolt-on side cutters come standard



## INDUSTRIAL TRACTOR LOADER BACKHOE

shown with optional swing over pallet forks

## INDUSTRIAL TRACTOR LOADER BACKHOE

- Available widths: 88", 93"
- Product weight range: 1288 – 1496 lbs
- Shown with optional bolt-on teeth



\* Product design subject to change

# GRAPPLES



HANDLING LOOSE MATERIAL • SORTING DEBRIS • DEMOLITION SITE CLEAN-UP • LAND CLEARING




## MINI ROOT GRAPPLE

- Available widths: 36", 42", 48", 54"
- Product weight range: 195 – 275 lbs
- 48" and 54" models are available with dual lid design (36" and 42" models come standard with single lid design)



## COMPACT ROOT GRAPPLE

- Available widths: 54", 60", 66", 72"
- Product weight range: 444 – 582 lbs

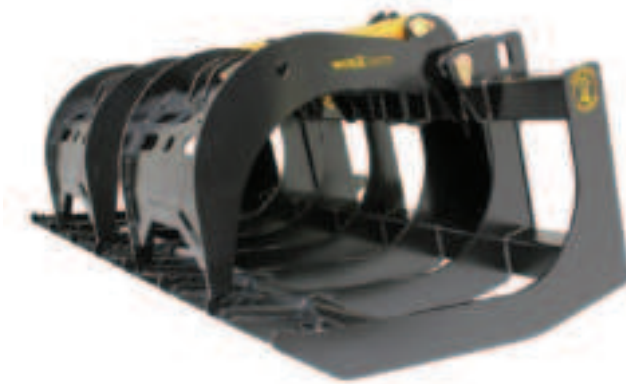

## WORX DUTY ROOT GRAPPLE

- Available widths: 66", 73", 78", 84"
- Product weight range: 794 – 946 lbs



## XTREME DUTY ROOT GRAPPLE

- Available widths: 66", 73", 78", 84"
- Product weight range: 990 – 1142 lbs



## SEVERE XTREME DUTY ROOT GRAPPLE

- Available widths: 66", 73", 78", 84"
- Product weight range: 1140 – 1292 lbs
- Designed for high repetition duty cycles

\* Product design subject to change

# GRAPPLES



HANDLING LOOSE MATERIAL • SORTING DEBRIS • DEMOLITION SITE CLEAN-UP • LAND CLEARING



## MINI GRAPPLE BUCKET

- Available widths: 36", 42", 48", 54"
- Product weight range: 246 – 312 lbs
- 48" and 54" models are available with dual lid design (36" and 42" models come standard with single lid design)



## COMPACT GRAPPLE BUCKET

- Available widths: 54", 60", 66", 72"
- Product weight range: 566 – 764 lbs



## XTREME DUTY GRAPPLE BUCKET

- Available widths: 60", 67", 73", 82"
- Product weight range: 962 – 1390 lbs
- High carbon steel (C1084) bolt-on reversible front cutting edge standard



## WORX DUTY GRAPPLE BUCKET

- Available widths: 60", 67", 73", 82"
- Product weight range: 915 – 1090 lbs
- High carbon steel (C1084) bolt-on reversible front cutting edge standard

## SEVERE XTREME DUTY GRAPPLE BUCKET

- Available widths: 60", 67", 73", 82"
- Product weight range: 1112 – 1540 lb
- High carbon steel (C1084) bolt-on reversible front cutting edge standard



\* Product design subject to change

# GRAPPLES



HANDLING LOOSE MATERIAL • SORTING DEBRIS • DEMOLITION SITE CLEAN-UP • LAND CLEARING



## COMPACT ROOT RAKE WITH GRAPPLE

- Available widths: 60", 66", 72"
- Product weight range: 470– 576 lbs
- Also available without Grapple; see Specialty Attachments



## XTREME ROOT RAKE WITH GRAPPLE

- Available widths: 74", 80", 86"
- Product weight range: 1172– 1288 lbs
- Also available without Grapple; see Specialty Attachments



## MINI SKELETON GRAPPLE

- Available widths: 36", 48", 56"
- Product weight range: 216 – 336 lbs
- Also available without Grapple; see Specialty Attachments



## XTREME DUTY SKELETON GRAPPLE

- Available widths: 66", 73", 82"
- Product weight range: 900 – 1092 lbs
- Also available without Grapple; see Specialty Attachments



## SEVERE XTREME DUTY STUMP GRAPPLE BUCKET

- 55" plus grapple opening
- Product weight range: 1008 lbs
- Also available without Grapple; see Specialty Attachments

\* Product design subject to change

# PALLET FORKS



LIFTING • CARRYING  
COME FULLY ASSEMBLED

## COMPACT

- Fork lift capacity: 2,200 lbs
- Available fork length: 42"



## WORX DUTY

- Fork lift capacity: 4,200 lbs
- Available fork length: 42", 48"
- Skid steer universal hitch only
- Optional custom name cutout



## XTREME DUTY STANDARD FRAME

For Skid Steer Universal Hitch

- Fork lift capacity: 4,200, 5,500, \*6,400 lbs
- Available fork length: 42", 48", 60", 72", \*96"
- Frame width: 45-1/2"



\* Product design subject to change

# PALLET FORKS



LIFTING • CARRYING  
COME FULLY ASSEMBLED



## XTREME DUTY WIDE FRAME

For Skid Steer Universal Hitch

- Fork lift capacity: 4,200, 5,500, \*6,400 lbs
- Available fork length: 42", 48", 60", 72", \*96"
- Frame width: 57"



## XTREME DUTY STANDARD FRAME

For AG Style Hitch

- Fork lift capacity: 4,200, 5,500, \*6,400 lbs
- Available fork length: 42", 48", 60", 72", \*96"
- Frame width: 45-1/2"



## XTREME DUTY WIDE FRAME

For AG Style Hitch

- Fork lift capacity: 4,200, 5,500, \*6,400 lbs
- Available fork length: 42", 48", 60", 72", \*96"
- Frame width: 57"

\* Product design subject to change

# PALLET FORKS



LIFTING • CARRYING  
COME FULLY ASSEMBLED



## XTREME DUTY WALK-THROUGH

- Fork lift capacity: 4,200, 5,500, \*6,400 lbs
- Available fork length: 42", 48", 60", 72", \*96"
- 14" opening for easy machine access



## XTREME DUTY SHAFT MOUNT

- Fork lift capacity: 4,200 -5,500 lbs
- Available fork length: 48"
- 1-3/4" diameter shaft
- Ball fork sleeves available  
(see Specialty Attachments section)



## XTREME DUTY HYDRAULIC

- Fork lift capacity: 5,500 lbs
- Available fork length: 48"
- Dual fork carrier shaft's
- Ball fork sleeves available  
(see Specialty Attachments section)

\* Product design subject to change

# PALLET FORKS



LIFTING • CARRYING



## XTREME DUTY THREE POINT HITCH

- Fork lift capacity: 4,200 lbs
- Available fork length: 48"
- Fixed 22" spaced forks equipped with category 1 lower pins



## INDUSTRIAL DUTY

- Fork lift capacity: 5,500 lbs - 6,400 lbs
- Available fork length: 42", 48"
- Come fully assembled



## XTREME DUTY SWING OVER FORK ASSEMBLY

Pallet forks shown installed on bucket; bucket not included

- Fork lift capacity: 5,500 lbs
- Available fork length: 42"
- Forks mount on bucket for quick use then fold over and latch for storage

\* Product design subject to change

# SPECIALTY ATTACHMENTS



NURSERIES • FARMS • FORESTRY • LANDSCAPING • CONSTRUCTION • SNOW AND ICE



## XTREME DUTY SINGLE BALE SPEAR

- Rated spear capacity: 3,500 lbs @ 23" from collar
- 43.5" usable spear length



## XTREME DUTY WIDE FRAME SINGLE BALE SPEAR

- Rated spear capacity: 3,500 lbs @ 23" from collar
- 43.5" usable spear length



## XTREME DUTY DUAL BALE SPEAR

- Rated spear capacity: 3,500 lbs @ 23" from collar
- Usable spear length 43.5"
- 30" spacing between spears



## XTREME DUTY WIDE FRAME DUAL BALE SPEAR

- Rated spear capacity: 3,500 lbs @ 23" from collar
- 43.5" usable spear length
- 30" spacing between spears

\* Product design subject to change

# SPECIALTY ATTACHMENTS



NURSERIES • FARMS • FORESTRY • LANDSCAPING • CONSTRUCTION • SNOW AND ICE




## XTREME DUTY WIDE FRAME TRIPLE BALE SPEAR

- Rated spear capacity: 3,500 lbs @ 23" from collar
- Usable spear length 43.5"
- 23.25" spacing between spears



## XTREME DUTY WIDE FRAME QUADRUPLE BALE SPEAR

- Rated spear capacity: 3,500 lbs @ 23" from collar
- Usable spear length 43.5"
- 30" spacing between spears

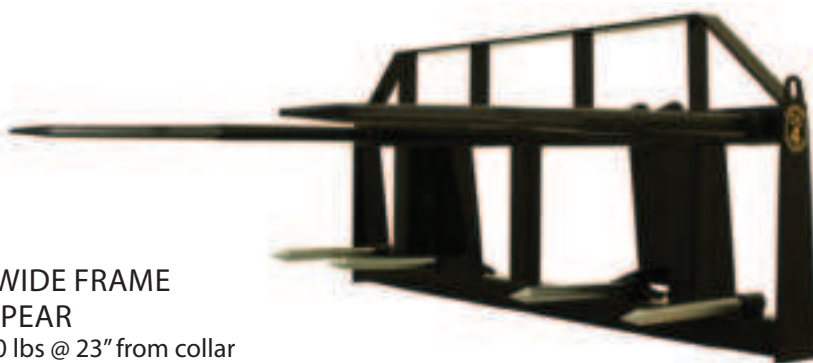

## XTREME DUTY ULTRA WIDE FRAME DOUBLE SINGLE BALE SPEAR


- Rated spear capacity: 3,500 lbs @ 23" from collar
- Usable spear length 43.5"
- 60" spacing between spears

\* Product design subject to change

# SPECIALTY ATTACHMENTS



NURSERIES • FARMS • FORESTRY • LANDSCAPING • CONSTRUCTION • SNOW AND ICE

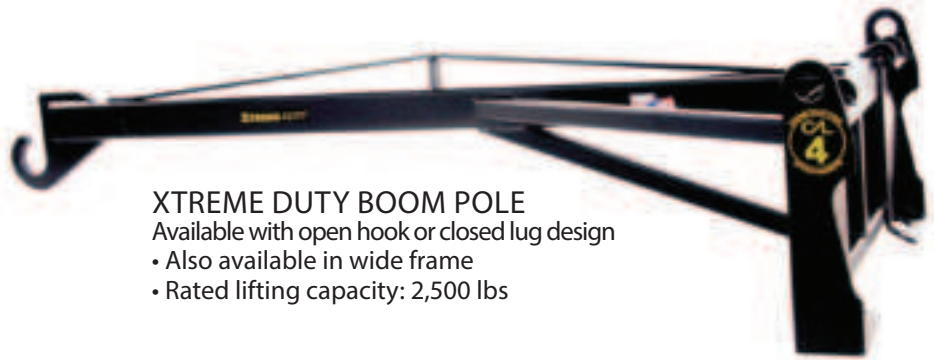

## XTREME DUTY BOOM POLE

- Available with open hook or closed lug design
- Also available in wide frame
- Rated lifting capacity: 2,500 lbs



## XTREME DUTY TREE BOOM

- Adds 62" to lifting height of the machine
- Rated lifting capacity: 2,500 lbs



## XTREME DUTY REAR STABILIZER

- Provides additional stability to the rear of skid steer loaders



## XTREME DUTY TRAILER RELOCATOR

- Maximum gross towing weight of 10,000 lbs
- 2" square receiver tube
- Product weight: 180 lbs

## XTREME DUTY BALL FORK SLEEVES

- Shown on pallet frame; pallet frame not included
- Designed to work with standard class II forks
- Used for transporting nursery stock
- Available sleeve length 64", 72" 84"



\* Product design subject to change

# SPECIALTY ATTACHMENTS



NURSERIES • FARMS • FORESTRY • LANDSCAPING • CONSTRUCTION • SNOW AND ICE



## WORX DUTY STUMP BUCKET

- Standard 3/4" x 6" cutting Edge with three weld-on shanks with replaceable teeth
- 400 lbs



## XTREME DUTY STUMP BUCKET

- Standard 3/4" x 6" cutting edge with three weld-on shanks with replaceable teeth
- 578 lbs



## MINI SKELETON BUCKET

- Available widths: 36", 48", 56"
- Product weight range: 163- 254 lbs



## XTREME DUTY SKELETON BUCKET

- Available widths: 66", 73", 82"
- 2-7/16" tine spacing for screening
- Product weight range: 568 - 694 lbs



## COMPACT ROOT RAKE

- Available widths: 60", 66", 72"
- Product weight range 250- 299 lbs



## XTREME DUTY ROOT RAKE

- Available widths: 74", 80", 86"
- Product weight range: 634 - 740 bs

\* Product design subject to change

# SPECIALTY ATTACHMENTS




NURSERIES • FARMS • FORESTRY • LANDSCAPING • CONSTRUCTION • SNOW AND ICE



## MINI SNOW BLADE

- Available widths: 36", 48", 54"
- Product weight range: 158 - 274 lbs
- Available in manual or hydraulic angle operation

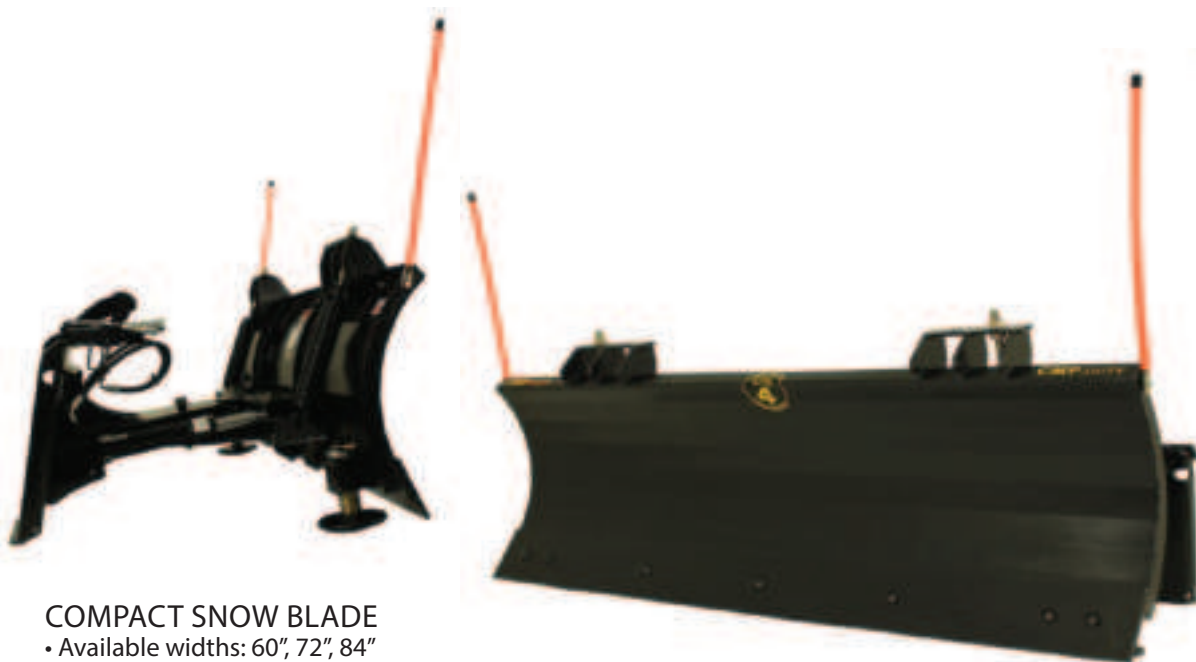

## COMPACT SNOW BLADE

- Available widths: 60", 72", 84"
- Product weight range: 382 - 532 lbs
- Available in manual or hydraulic angle operation

\* Product design subject to change

# SPECIALTY ATTACHMENTS



NURSERIES • FARMS • FORESTRY • LANDSCAPING • CONSTRUCTION • SNOW AND ICE



## XTREME DUTY SNOW BLADE

- Available widths: 84", 93", 108"
- Product weight range: 738 - 1225 lbs
- Available in manual or hydraulic angle operation



## MINI LAND LEVELER

- Available widths: 42", 48", 54"
- For mini skid steers
- Product weight range: 220 - 266 lbs

\* Product design subject to change

## TOOTH BARS



### COMPACT DUTY BOLT-ON TOOTH BAR

- Available widths: 30" - 75"
- Designed to accommodate compact tractor buckets up to 1/2" thick front edge
- Equipped with case 2A tooth



### XTREME DUTY BOLT-ON TOOTH BAR

- Available widths: 48" - 85"
- Designed to accommodate 3/4" weld-on edges
- Equipped with 23 series tooth



### XTREME DUTY BOLT-ON EXTENDED TOOTH BAR


- Available widths: 48" - 85"
- Designed to accommodate both weld-on and bolt-on edges, combined thickness of 1-1/2"
- Equipped with 23 series tooth

## BOLT-ON EDGES



### BOLT-ON REVERSIBLE CUTTING EDGES

- Designed to work with Construction Attachments general purpose, multi-purpose, and grapple buckets
- Adds protection and longevity to your original front edge

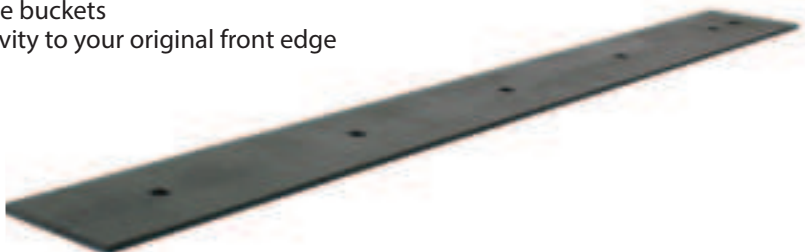

### BOLT-ON REVERSIBLE SNOW BLADE EDGES

- Designed to work with Construction Attachments snow blades
- Available in rubber or steel

## BOLT-ON TEETH



### REGULAR BOLT-ON TEETH

- Designed to work with Construction Attachments general purpose, and multi-purpose buckets
- Necessary when loosening compacted soil, digging, or excavating

### LARGE BOLT-ON TEETH

- Designed to work with Construction Attachments general purpose, and multi-purpose buckets
- Necessary when loosening compacted soil, digging, or excavating

## HITCH PLATES




### EURO STYLE - DELUXE SOLID HITCH PLATE ASSEMBLY

- Single plate design, pre-located hooks
- 3/8" plate backing material



### UNIVERSAL STYLE - BLANK HITCH PLATE ASSEMBLY

- Constructed of two independent hitch plates for reduced weight
- 3/8" plate material with a full length top rail

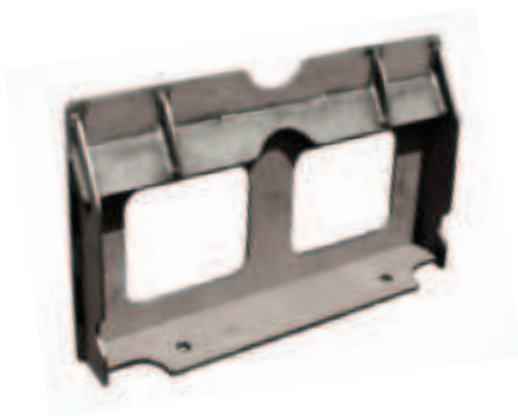

### MINI UNIVERSAL - BLANK HITCH PLATE ASSEMBLY

- Designed for mini skid steer (Vermeer and Toro Dingo)
- 5/16" plate material with a full length 3/8" top rail



### UNIVERSAL STYLE - DELUXE SOLID HITCH PLATE ASSEMBLY

- Designed for heavier applications
- 3/8" plate backing material

\* Product design subject to change

## ONE TOUCH KITS



### D03 DIRECT FIT ONE TOUCH HYDRAULIC KIT

- For tractors with 14 gpm of auxiliary flow
- Kit pictured for a Kubota LA-524
- Sold with standard 2 button handle
- Optional 4 button handle
- Specify make and model of host machine



### D05 DIRECT FIT ONE TOUCH HYDRAULIC KIT

- For tractors with 14.1 - 25 gpm of auxiliary flow
- Kit pictured for a Kubota 1353 Cab
- Sold with standard 2 button handle
- Optional 4 button handle
- Specify make and model of host machine



### UNIVERSAL DIVERTER TYPE ONE TOUCH HYDRAULIC KIT

- For tractors with 20gpm of auxiliary flow
- Specify make and model of host machine
- Sold with standard 2 button handle
- Optional 4 button handle
- Specify make and model of host machine



### D03 DIRECT FIT ONE TOUCH PARTIAL HYDRAULIC KIT

- For tractors with 14 gpm of auxiliary flow
- Partial kit does not include hoses
- Sold with standard 2 button handle
- Optional 4 button handle
- Specify make and model of host machine

\* Product design subject to change



## 2 BUTTON ROCKER SWITCH HANDLE FOR DIRECT FIT ONE TOUCH HYDRAULIC KITS

- Optional
- Additional charge applies
- Specify make and model of host machine



## 4 BUTTON HANDLE FOR DIRECT FIT ONE TOUCH HYDRAULIC KITS

- Optional
- Additional charge applies
- Specify make and model of host machine

## OTHER



### RUB RAILS

- Designed for use on Construction Attachments High Capacity Litter Buckets
- Made of 1/2" x 8" UHMW polyethylene plastic material



### SNOW BLADE HYDRAULIC KIT

- Designed for use on Construction Attachments Mini, Compact and Xtreme Duty snow blades

# CONSTRUCTION

//////ATTACHMENTS, INC.®



Construction Attachments is the leading manufacturer of construction and agricultural grade attachments for tractors, compact excavators, skid steer loaders, tractor loader backhoes, and large excavators.

**"THE BITTERNESS OF POOR QUALITY LINGERS LONG AFTER  
THE SWEETNESS OF A CHEAP PRICE IS FORGOTTEN!"**



**1160 CAL COURT, LENOIR, NORTH CAROLINA 28645 USA**  
**[www.ConstructionAttachments.com](http://www.ConstructionAttachments.com)**  
sales@calmfg.com | ph (828) 758-2674 | fax (828) 754-1887

