


INSTALLATION MANUAL


High-Performance Indoor Green Square Exit Button with LED Indicator for Door Access Control, Featuring NC, COM, and NO Outputs



Front View



Side View

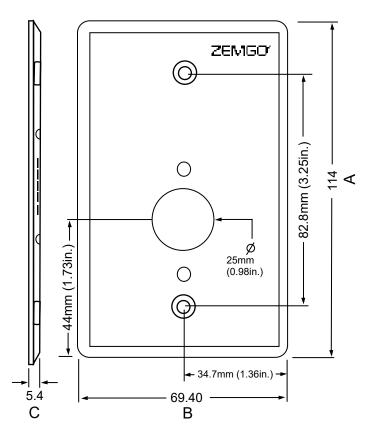

Length (A): 114.0mm (4.46 Inch)

Width (B): 69.40mm (2.73 Inch)

Depth (C): 5.4mm (0.21 Inch)

Disclaimer: ZEMGO reserve the right to go ahead with any modifications of models or features or price without forewarning. All the information and specifications stated in this document are current at the time of publication. **Attention:** We are not responsible for the improper installation of this product. If you are not handy with electrical equipment you should contact a professional electrician. You will also need to check with your local Fire authority to see if you need anything else to comply with local Fire Codes. We are not responsible for any damage or fees that can occur.







Push to Exit Button Wiring Diagram



+:Red

-: Black

COM : Green N.O.: White

N.C.: Orange

- (1) Push-button dry contact rating: 10A/125VAC For safe operations, do not exceed the ratings above.
- (2) For normally open requirements, connect wires to N.O dry contact of PUSH-BUTTON
- (3) For normally closed requirements, connect wire to N.C dry contact of PUSH-BUTTON

How to Replace the Plastic Sheet






Rotary switch Counterclockwise



2

Remove the switch
Push the white plastic
Push out the white plastic
seat





Open the cover with a screwdriver





Replace the plastic sheet