


PROJECT

QUANTITY

# P3F Fresnel Light (Clamp)

90W LED/ 15°- 45°

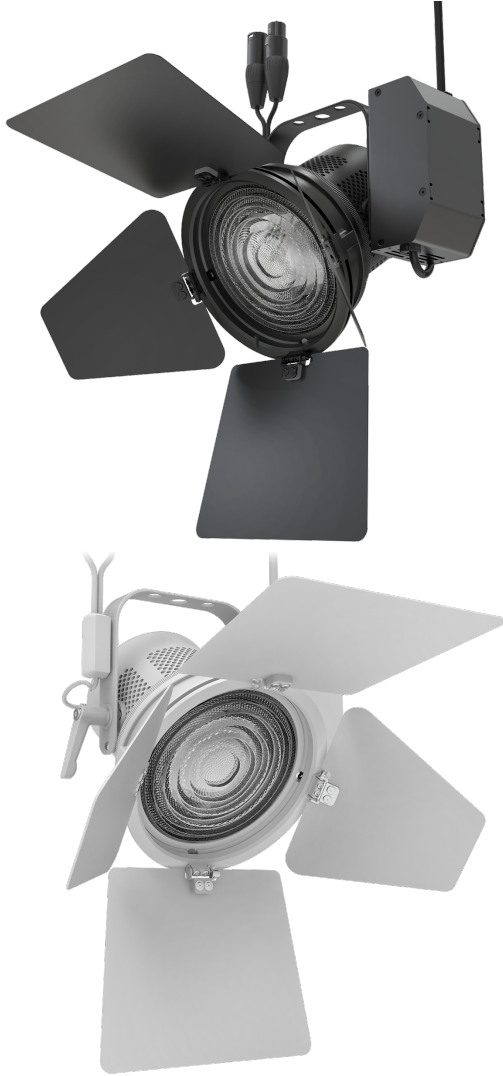

## ORDERING GUIDE

FLXP3F -  -  - CLP - PSV -

### Mode

|      |                       |
|------|-----------------------|
| CLR  | All Modes             |
| EZ   | All EZ Modes          |
| RGB  | RGB Mode Only         |
| CCT  | Tunable CCT Mode Only |
| 3200 | Fixed 3200K           |
| 5600 | Fixed 5600K           |

### Finish

|    |       |
|----|-------|
| WH | White |
| BK | Black |

### Mount

|     |             |
|-----|-------------|
| CLP | Clamp Mount |
|-----|-------------|

### Power Supply & Control

|     |              |
|-----|--------------|
| PSV | Power Supply |
|-----|--------------|

### Plug/Connection


|    |         |
|----|---------|
| US | US 120V |
| EU | EU 220V |

## SPECIFICATIONS

|                                    |                                   |
|------------------------------------|-----------------------------------|
| Beam Angle                         | 15°- 45°                          |
| CRI / TLCI                         | 95/90 typical                     |
| Dimming                            | 100% - 0% flicker free            |
| AC Power Draw                      | 90W max                           |
| AC Input                           | 100 - 240V AC, 50 - 60Hz          |
| Remote Control                     | DMX 512                           |
| Cooling                            | Fan Cooled                        |
| Acoustic Noise                     | 19 dBA (Auto Mode)                |
| Operating Temp.                    | 32 - 104°F (0 - 40°C)             |
| Weight<br>(Fixture + Power Supply) | 4.4lb / 2.0kg                     |
| Approved Regulatory Standards      | cETLus, FCC, CE, UKCA, RoHS, WEEE |

- Cine-Grade Light Quality
- Point-Source LED
- DMX Controllable
- 90W Power Draw
- Compact (< 8" of Vertical Space)

## MECHANICAL FIGURES

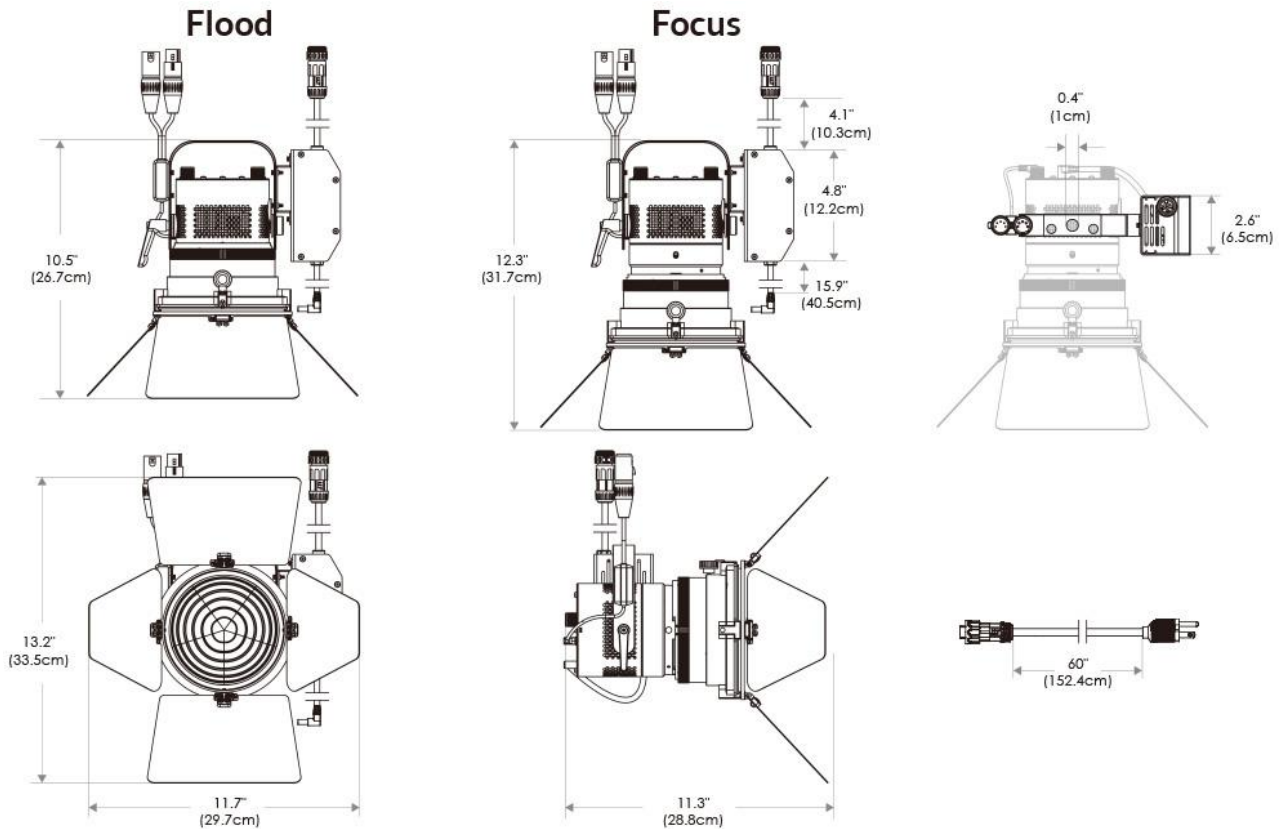

\*All -CLP configuration models come with standard DC cables of 16" and AC cables of 5'.



## PHOTOMETRIC DATA

### Focus

| Distance      |     | 3'<br>(~0.9 m)    | 10'<br>(~3.0 m)   | 15'<br>(~4.6 m)   |
|---------------|-----|-------------------|-------------------|-------------------|
| @3200K        | fc  | 2604              | 241               | 117               |
|               | lux | 28027             | 2591              | 1257              |
| @5600K        | fc  | 2690              | 249               | 121               |
|               | lux | 28960             | 2678              | 1299              |
| Beam Diameter |     | Ø 0.8'<br>(~0.2m) | Ø 2.6'<br>(~0.8m) | Ø 4.1'<br>(~1.2m) |

### Flood

| Distance      |     | 3'<br>(~0.9 m)    | 10'<br>(~3.0 m)   | 15'<br>(~4.6 m)    |
|---------------|-----|-------------------|-------------------|--------------------|
| @3200K        | fc  | 546               | 54                | 29                 |
|               | lux | 5876              | 578               | 314                |
| @5600K        | fc  | 564               | 55                | 30                 |
|               | lux | 6071              | 597               | 324                |
| Beam Diameter |     | Ø 2.2'<br>(~0.7m) | Ø 7.4'<br>(~2.3m) | Ø 11.4'<br>(~3.5m) |

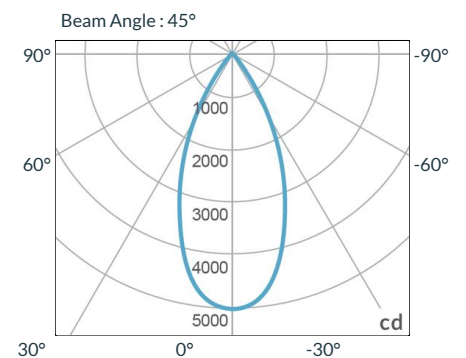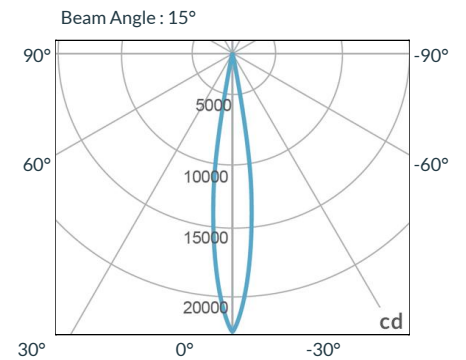

ACCESSORIES

(specify finish by adding -BK or -WH)



**6x8 Softbox  
FLXP3-6x8SB**