


# SMARTCRAFT CONNECT GATEWAY INSTALLATION MANUAL

**IMPORTANT:** This document guides our dealers, boatbuilders, and company service personnel in the proper installation or service of our products. If you have not been trained in the recommended servicing or installation procedures for these or similar Mercury Marine products, have the work performed by an authorized Mercury Marine dealer technician. Improper installation or servicing of the Mercury product could result in damage to the product or personal injury to those installing or operating the product.

## Components in Kit

**NOTE:** The termination band on the 10-pin connector cable only applies to under cowl mounted modules.

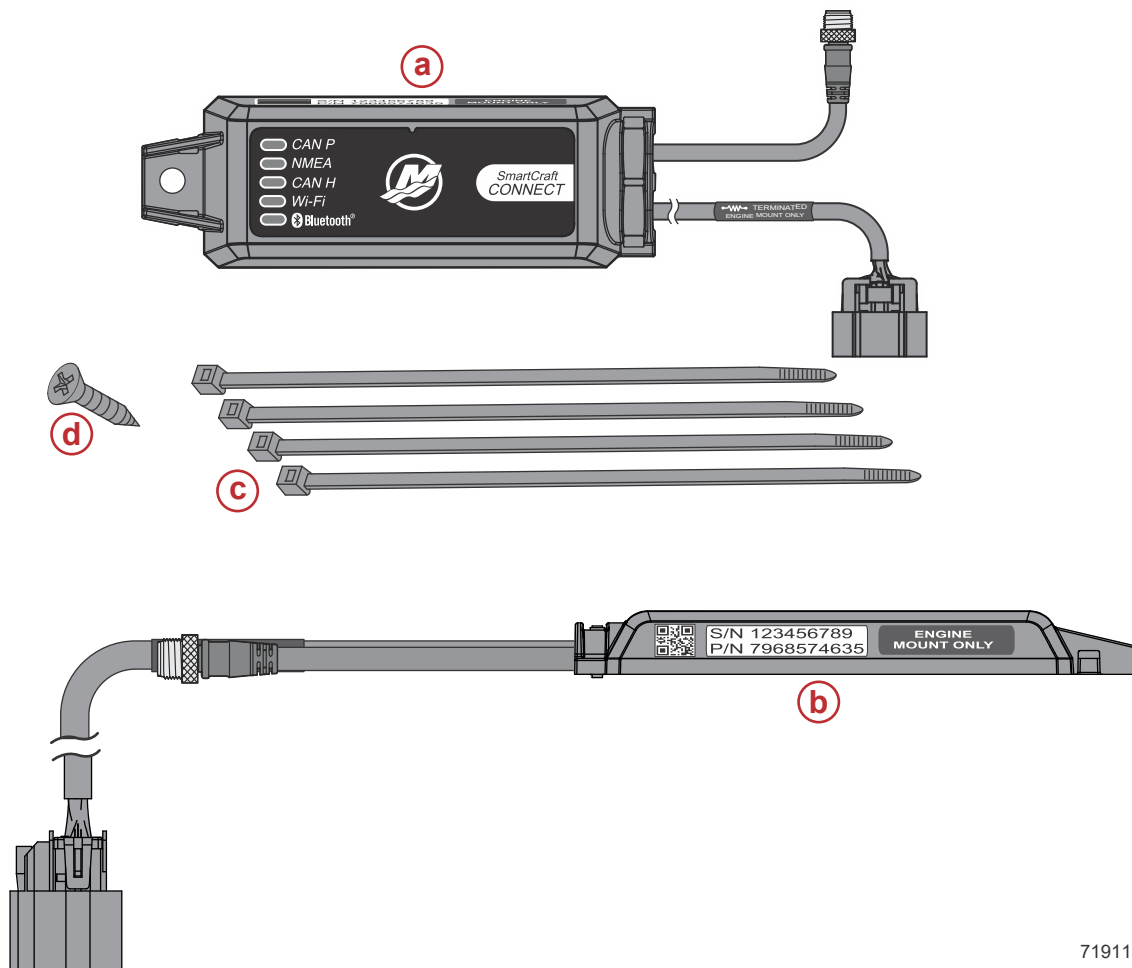

71911

- a** - SmartCraft CONNECT module
- b** - SmartCraft CONNECT module - side view
- c** - Cable ties - 4
- d** - #10 x .88" stainless steel wood screw

## Features


The CAN P, CAN H, and NMEA lights will turn on when data is being transmitted through the Gateway.

**NOTE:** This manual covers the installation of CAN P only - engine mounted module (single). The helm mount module will default out of the box to CAN P, and must be dealer or OEM configured to use CAN H. CAN H is applicable to Dual, Triple, and Quad DTS engine applications.

## SmartCraft CONNECT Module—Single- through Quad-Engine

**NOTE:** The Connect module does not provide power for any device on the NMEA 2000 network. The NMEA 2000 network will require its own power source. The NMEA 2000 network power input must have appropriate circuit protection for the devices on the NMEA 2000 network.

**NOTE:** The termination band on the 10-pin connector cable only applies to under cowl mounted modules.

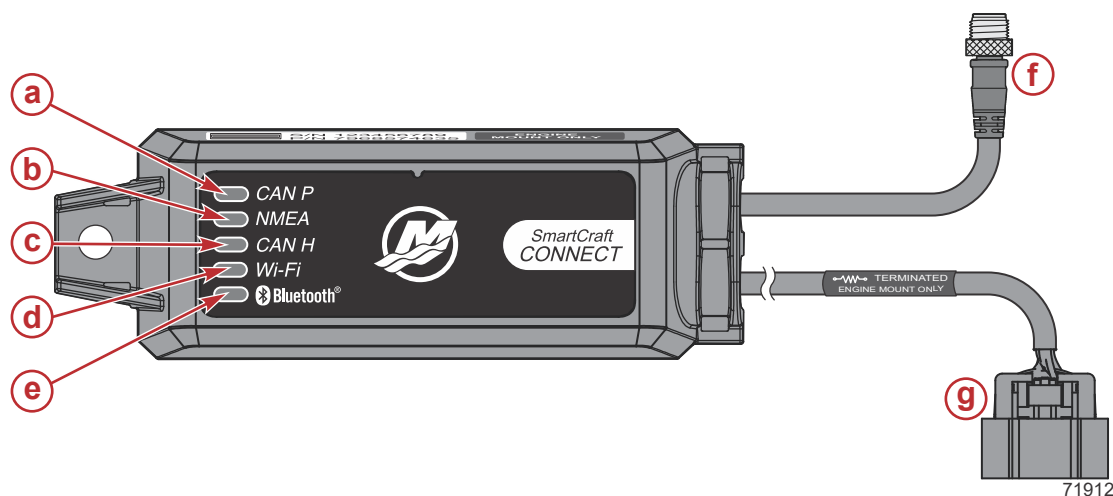


- a - CAN P connection light
- b - NMEA connection light
- c - CAN H connection light
- d - Wi-Fi connection light
- e - Bluetooth® connection light
- f - NMEA 2000® connector
- g - 10-pin connector

## Module Harness Connections

1. Connect the SmartCraft CONNECT module in one of the two following ways:
  - a. Connect the CAN 10-pin harness connector to the SmartCraft junction box. Refer to the following diagram.
  - b. Connect the CAN 10-pin harness connector to the helm harness SmartCraft 10-pin connection using a male-male adapter harness.

2. Connect the module NMEA 2000 harness connector to the NMEA 2000 network.

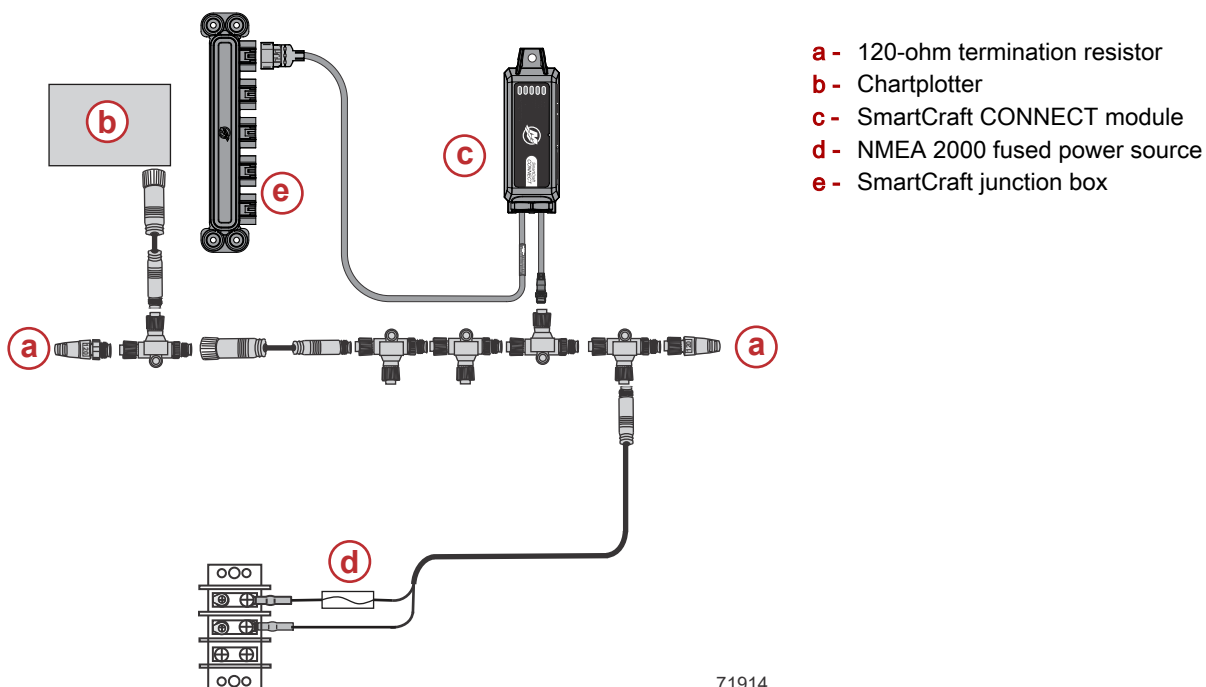

71914

## On-Engine Mounting Guidelines

### Mounting Requirements

**NOTE:** The 10-pin on-engine terminator must be removed from the engine harness before installation of this module.


- The SmartCraft CONNECT module must be mounted in a location that allows for connection to the 10-pin connector on the engine harness. No additional 10-pin harnessing may be used in the installation of this product.
- All routing must adhere to harness installation bend parameter specifications. The minimum bend radius of any portion of the harness must be no less than 13 mm (0.5 in.).
- Two cable ties to secure the SmartCraft CONNECT module must be used to prevent unwanted movement during normal operation of the propulsion package.
- The following locations must be **avoided** when installing the SmartCraft CONNECT module.
  - Any location which can be exposed to water
  - Any location that is subject to high heat during operation of the power package
  - Near Ignition coils
  - Near spark plug wires
  - Near shift/throttle cables
  - Where harnessing could contact belts
  - Secured to fuel lines

## Module Configuration

**IMPORTANT:** For configuration of the SmartCraft CONNECT Module, a mobile device with Wi-Fi connection and access to the internet is required.


1. Log onto the internet and download the **SmartCraft Manager** from your iOS App Store or Google Play Store.
2. After the app has been downloaded to your device, open the app to begin the configuration process.

3. Begin by entering the dealer number and licence number.

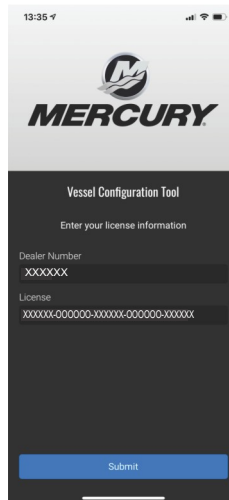

72604


4. Sign into the appropriate existing account with the email and password credentials.

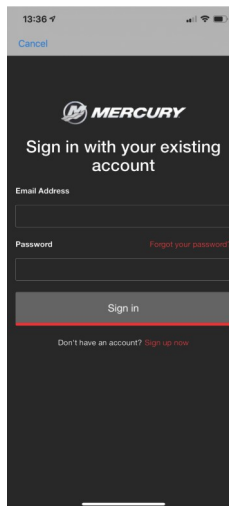

72605

5. Continue entering additional data on the next screen.
6. Power up the system with the key in the **ON** position.

7. Check that the SmartCraft CONNECT module and all other items on the boat are powered up. When these conditions are met, select **Find My Device**.

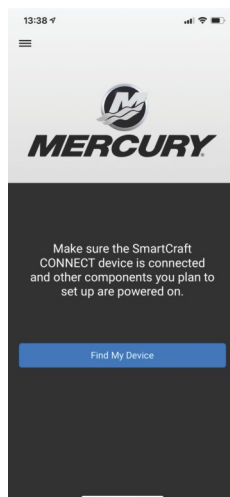


72606

8. The CONNECT module will appear on-screen along with a list of available Wi-Fi networks. Select a trusted network and connect.


**NOTE:** Networks that do not require a password are acceptable to use. Captive portal Wi-Fi networks cannot be used to configure this module.

**NOTE:** The device name uses the last 3 digits of the module serial number for identification.

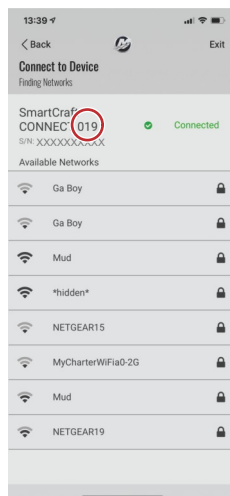


72607

9. Enter the network password and select **Connect**.

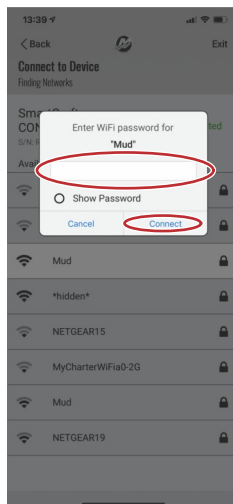

72608


10. The mobile device will connect. Depending on the network strength, this may take a minute.

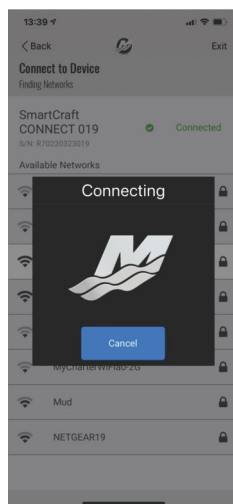

72609


11. The menu screen will appear. The network will automatically query the Mercury site for any updates to the firmware. If any updates are needed, there will be an exclamation point in the upper right corner of the **Update Firmware** tile. In this event, click on that tile and any updates will begin.

**NOTE:** The app will say update complete when the module reflash is downloaded to the module. It will then restart, and may take a few minutes to perform the update. Do not remove battery power during this time.

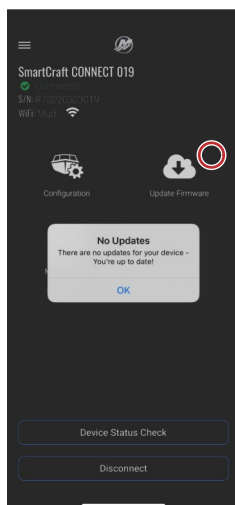

72610


12. Select **Configure Engines > Start**.

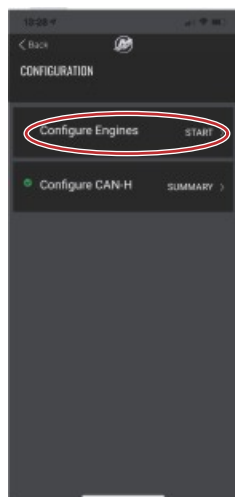

72814

13. Enter the correct information for the **Engine Type**, and **Engine Model**. Review your selections, and if everything is correct, select **Save**.

14. Continue by entering the engine serial number for the engine(s) supported by the module.

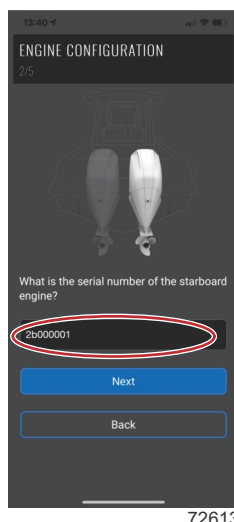

15. Next, configure the CAN H connection by following the prompts on the screen.

**NOTE:** CAN H configuration only applies to boats with steer-by-wire systems; Joystick Piloting, outboard, sterndrive, or Zeus. If the boat is DTS or Non-DTS, the CAN H gateway should be disabled.

## Troubleshooting

### LED Lighting

The device contains 5 LEDs for indicating the status of CAN P, NMEA, CAN H, Wi-Fi, and Bluetooth®.

1. **CAN P**

- **Flashing:** The LED will flash continuously once power is applied.
- **Solid:** Once the bus communication is established, the LED will remain on.

2. **NMEA**

- **Flashing:** The LED will flash continuously once power is applied.
- **Solid:** Once the bus communication is established, the LED will remain on.

3. **CAN H**

**NOTE:** The CAN H LED will not function on engine mount models.

- **Flashing:** The LED will flash continuously once power is applied.
- **Solid:** Once the bus communication is established, the LED will remain on.

4. **Wi-Fi**

- **Off:** No connection.
- **On:** Wi-Fi connection established.

5. **Bluetooth**

- **Flashing:** The Bluetooth LED will flash while in pairing mode, indicating it is not currently connected.
- **Solid:** The Bluetooth LED will remain on continuously while connected.

## SmartCraft CONNECT Module Protocol Description

The software is capable of transmitting (TX) information to, and receiving (RX) information from various parameter group number (PGN) products.

| SmartCraft CONNECT Module Modes                      |                                                             |
|------------------------------------------------------|-------------------------------------------------------------|
| Transmit (TX)                                        | Receive (RX)                                                |
| Transmits Mercury data to NMEA 2000 display devices. | Receives data from NMEA 2000 to display on Mercury devices. |

| Description                             | Value |
|-----------------------------------------|-------|
| NMEA 2000 Load Equivalency Number (LEN) | 1     |

| Mercury Engine Data to NMEA 2000 Capable Products |                                                                                                                                                                                                                                                               |                |       |
|---------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|-------|
| Signal                                            | Special Information                                                                                                                                                                                                                                           | NMEA 2000 PGN  | Mode  |
| Rated RPM                                         |                                                                                                                                                                                                                                                               | 127498/0x1F20A | TX    |
| Coolant pressure                                  |                                                                                                                                                                                                                                                               | 127489/0x1F201 | TX    |
| Speed over water (paddle and pitot)               |                                                                                                                                                                                                                                                               | 128259/0x1F503 | TX    |
| RPM (rapid update)                                |                                                                                                                                                                                                                                                               | 127488/0x1F200 | TX    |
| Voltage                                           |                                                                                                                                                                                                                                                               | 127489/0x1F201 | TX    |
| Coolant temperature                               |                                                                                                                                                                                                                                                               | 127489/0x1F201 | TX    |
| Fuel pressure                                     |                                                                                                                                                                                                                                                               | 127489/0x1F201 | TX    |
| Fuel level (percent, type)                        | 2 tanks per engine up to 4 engines, tank 1 for each engine is type fuel 0X00, tank 2 for each engine is data not available 0X0F, Gateway will always assign STBD engine tanks 1 and 2 to NMEA tanks 0 and 1. PORT engine tanks 1 and 2 to NMEA tanks 2 and 3. | 127505/0x1F211 | TX    |
| Fuel tank size                                    |                                                                                                                                                                                                                                                               | 127505/0x1F211 | TX    |
| Fuel flow                                         |                                                                                                                                                                                                                                                               | 127489/0x1F201 | TX    |
| Oil pressure                                      |                                                                                                                                                                                                                                                               | 127489/0x1F201 | TX    |
| Oil temperature                                   |                                                                                                                                                                                                                                                               | 127489/0x1F201 | TX    |
| Gear temp                                         |                                                                                                                                                                                                                                                               | 127493/0x1F205 | TX    |
| Gear pressure                                     |                                                                                                                                                                                                                                                               | 127493/0x1F205 | TX    |
| Boost pressure                                    |                                                                                                                                                                                                                                                               | 127488/0x1F200 | TX    |
| Trim position                                     |                                                                                                                                                                                                                                                               | 127488/0x1F200 | TX    |
| Rudder angle                                      |                                                                                                                                                                                                                                                               | 127245/0x1F10D | TX    |
| Depth                                             |                                                                                                                                                                                                                                                               | 128267/0x1F50B | TX    |
| Depth offset                                      |                                                                                                                                                                                                                                                               | 128267/0x1F50B | TX    |
| Seawater temp                                     |                                                                                                                                                                                                                                                               | 130310/0x1FD06 | TX    |
| Engine hours                                      |                                                                                                                                                                                                                                                               | 127489/0x1F201 | TX    |
| Manufacturer ID                                   | Address claim (0 x 90 = Mercury)                                                                                                                                                                                                                              | 060928/0xEE00  | TX    |
| Alarm data                                        | NMEA 2000 alarm data is limited and will only display "Check Engine" when an alarm is activated. Refer to the Mercury SmartCraft Gauges for descriptive fault text.                                                                                           | 127489/0x1F201 | TX    |
| Tabs                                              |                                                                                                                                                                                                                                                               | 130576/0x1FE10 | TX    |
| Course over ground                                |                                                                                                                                                                                                                                                               | 129026/0x9F802 | RX/TX |
| Speed over ground                                 |                                                                                                                                                                                                                                                               | 129026/0x9F802 | RX/TX |
| GPS position                                      |                                                                                                                                                                                                                                                               | 129025/0x1F801 | RX    |
| Product info                                      |                                                                                                                                                                                                                                                               | 126996/0x1F014 | TX    |
| Gear position                                     |                                                                                                                                                                                                                                                               | 127493/0x1F205 | TX    |
| Engine load (diesel)                              |                                                                                                                                                                                                                                                               | 127489/0x1F201 | TX    |

| SmartCraft CONNECT Module to NMEA 2000 Capable Products |                     |                |       |
|---------------------------------------------------------|---------------------|----------------|-------|
| Signal                                                  | Special Information | NMEA 2000 PGN  | Mode  |
| Course over ground (COG)                                |                     | 129026/0x1F802 | RX/TX |
| Speed over ground (SOG)                                 |                     | 129026/0x1F802 | RX/TX |
| GPS position (lat/long)                                 |                     | 129025/0x1F801 | RX/TX |
| Heading                                                 |                     | 127250/0x1F112 | RX/TX |
| Waypoint ID                                             |                     | 129284/0x1F904 | RX/TX |

## FCC and ISED Regulatory Information

This device complies with Part 15 of the FCC Rules and Innovation, Science and Economic Development Canada License-exempt RSS standard(s). Operation is subject to the following two conditions: 1) This device may not cause harmful interference, and 2) This device must accept any interference received, including interference that may cause undesired operation.

Cet appareil est conforme aux normes RSS exemptes de licence d'Innovation, Science et Développement économique Canada. Son fonctionnement est soumis aux deux conditions suivantes: 1) cet appareil ne doit pas provoquer d'interférences, et 2) cet appareil doit accepter toute interférence, y compris les interférences susceptibles de provoquer un fonctionnement indésirable de l'appareil.

Warning: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

## **RF Exposure Considerations**

To comply with FCC and Innovation, Science and Economic Development Canada RF exposure limits for general population / uncontrolled exposure, the antenna must be installed to provide a separation distance of at least 20cm from all persons and operating in conjunction with any other antenna or transmitter, except in accordance with FCC multi-transmitter product procedures.

Pour se conformer aux limites d'exposition aux RF de la FCC et d'Industrie Canada pour la population générale / exposition non contrôlée, l'antenne(s) utilisée pour ce transmetteur doit être installée pour fournir une distance de séparation d'au moins 20cm de toutes les personnes et fonctionnant conjointement avec une autre antenne ou émetteur, sauf en conformité avec les procédures de produits multi-émetteur FCC.