
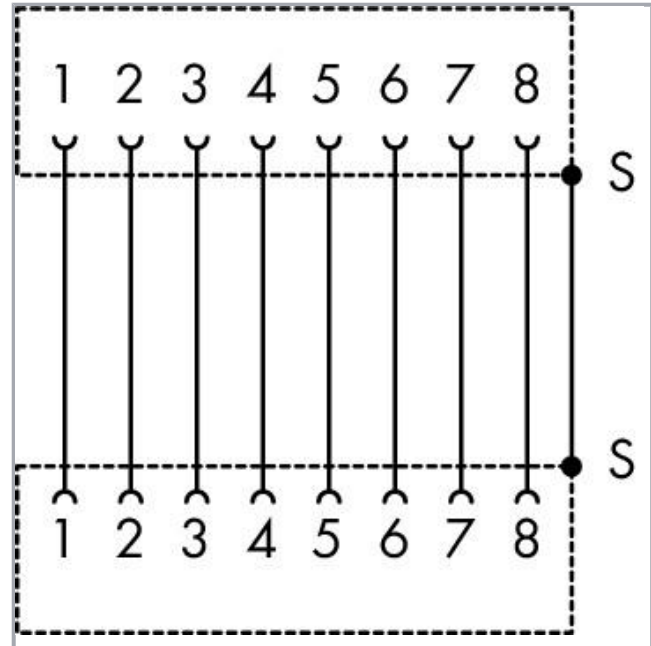


Data sheet | Item number: 289-172

Interface module; RJ-45; RJ-45; Cat. 5; in mounting carrier

www.wago.com/289-172

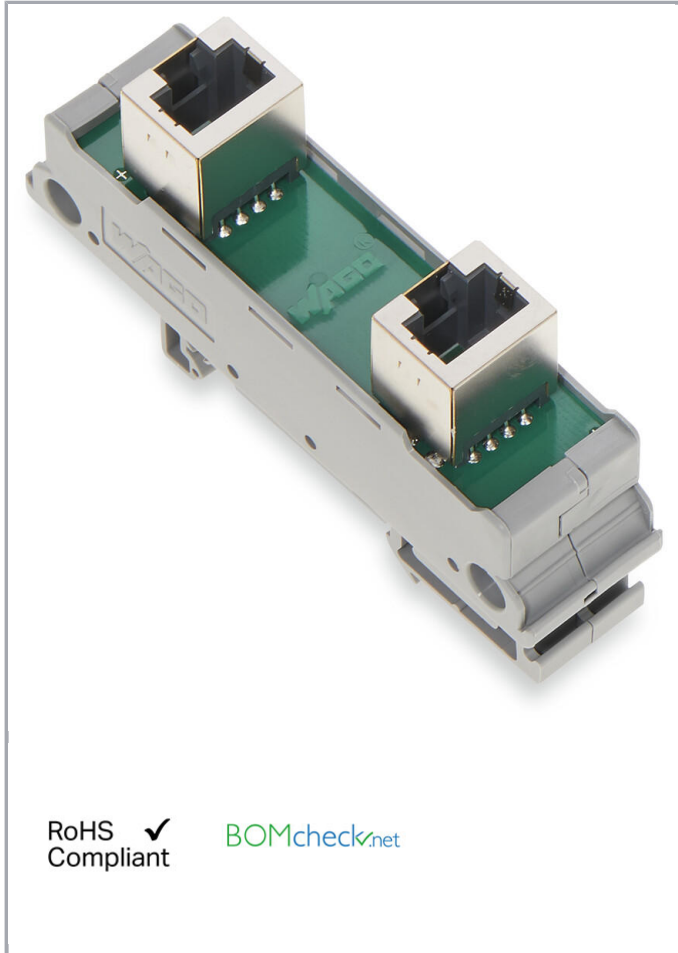


RoHS
Compliant

BOMcheck.net

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.

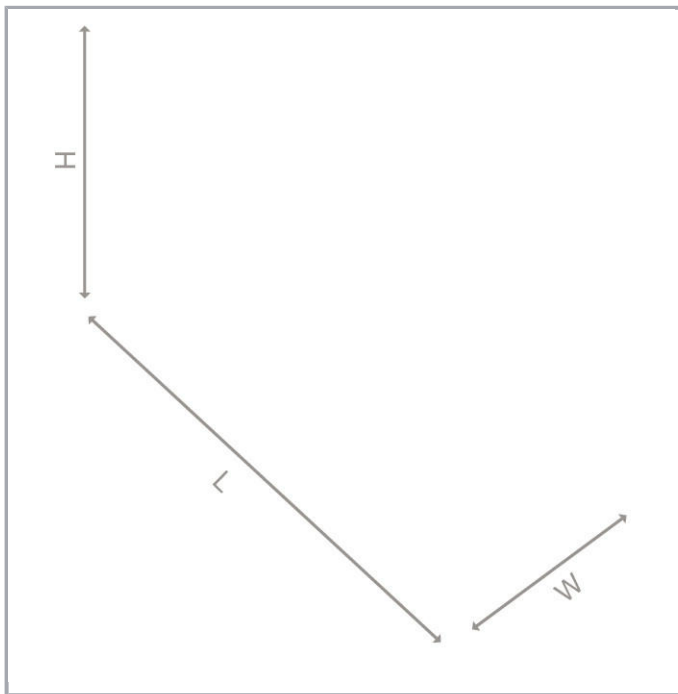

Data

Electrical Data

Operating voltage	$\leq$ AC 30 V; $\leq$ DC 42 V
Nominal current	1.5 A
Insulation resistance	$\geq$ 500 M Ω

Safety and protection:

Dielectric strength, contact/contact (AC, 1 min)	1
--	---

Connection data

Connection type (1)	System
Pole No.	8
Pluggable connectors	RJ-45 (shielded)
Connection type 2	System
Pole number 2	8
Connector 2	RJ-45 (shielded)
Mating cycles	500
Transmission length (max.)	100 m
Connection cable	Cat. 5 (min.)

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Geometrical Data

Width	20,5 mm / 0.807 inch
Height from upper-edge of DIN-rail	51 mm / 2.008 inch
Depth	85 mm / 3.346 inch

Mechanical data

Mounting type	DIN-35 rail
Housing design	Mounting carrier

Material Data

Fire load	0.482 MJ
Weight	28.3 g

Environmental Requirements

Surrounding air temperature (operation)	-40 ... 85 °C
Surrounding air temperature (storage)	-40 ... 85 °C
Surrounding air (operating) temperature for UL	-40 ... 70 °C
Relative humidity	≤ 85% (non-condensing)

Standards and specifications

Standards/specifications	UL 840
--------------------------	--------

Commercial data

Product Group	6 (Interface Electronics)
Packaging type	BOX
Country of origin	DE
GTIN	4045454317478
Customs tariff number	85366990990

Approvals / Certificates

UL-Approvals

Logo	Approval	Additional Approval Text	Certificate name
	UL Underwriters Laboratories Inc. (ORDINARY LOCATIONS)	UL 508	E175199 Vol.2 Sec. 1

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.

Counterpart

Compatible products

Marking accessories

	Item no.: 709-177 Marking strips; on reel; 7.5 mm wide; not stretchable; plain; snap-on type; translucent	www.wago.com/709-177
	Item no.: 709-178 Marking strips; on reel; 7.5 mm wide; not stretchable; plain; snap-on type; white	www.wago.com/709-178
	Item no.: 709-196 Marking strips; for laser printer; translucent	www.wago.com/709-196
	Item no.: 709-198 Marking strips; white	www.wago.com/709-198

Downloads

Documentation

Bid Text

289-172 doc - Datei	Feb 9, 2015	doc 25.6 kB	Download
289-172 GAEB X81 - Datei	Feb 19, 2019	xml 3.4 kB	Download

Instruction Leaflet

		pdf 1.3 MB	Download
--	--	---------------	--------------------------

CAD/CAE-Data

CAD data

2D/3D Models 289-172	URL	Download
----------------------	-----	--------------------------

CAE data

EPLAN Data Portal 289-172	URL	Download
---------------------------	-----	--------------------------

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Installation Notes

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.