



LG xboom Stage 301

Portable Bluetooth Speaker




Specification

STAGE301



COV30131642
2412_Rev01

www.lg.com
Copyright © 2025 LG Electronics Inc.
All Rights Reserved.

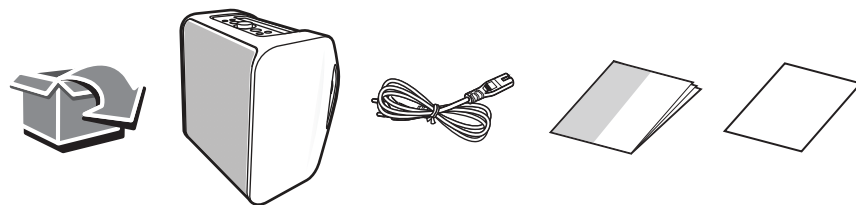

Download Manual
Tải xuống tài liệu hướng dẫn
ดาวน์โหลดคู่มือการใช้งาน



Download App
Tải xuống ứng dụng
ดาวน์โหลดแอป



<iOS>



ENGLISH

Specification

Power requirements

- Refer to the main label.
- Rechargeable battery

Power consumption: Refer to the main label.

Dimensions (W x H x D):

Approx. 312 mm x 311 mm x 282 mm

Bus Power Supply (USB): 5 V $\equiv$ 500 mA

Amplifier (Total RMS Output power): 120 W RMS

Operating Temperature: 5 °C to 35 °C

Operating Humidity: 5 % to 80 % RH

Ingress Protection: IPX4

- Liquid: Protected against splashing water.
- During charging, the water resistance of the speaker is limited. Do not charge when exposed to splashing water.

Battery life: Up to 12 hours

- Based on 50 % volume, no lighting and Voice Enhance EQ. (Internal test result.) Actual usage time may vary.

TIẾNG VIỆT

Thông số kỹ thuật

Yêu cầu nguồn điện

- Tham khảo nhãn chính.
- Rechargeable battery

Mức tiêu thụ điện: Tham khảo nhãn chính.

Kích thước (Rộng x Cao x Sâu):

Xấp xỉ 312 mm x 311 mm x 282 mm

Bộ cấp nguồn Bus (USB): 5 V $\equiv$ 500 mA

Âm li (Tổng công suất Đầu ra RMS): 120 W RMS

Nhiệt độ vận hành: 5 °C đến 35 °C

Độ ẩm vận hành: 5 % đến 80 % RH

Bảo vệ xâm nhập: IPX4

- Chất lỏng: Bảo vệ chống nước bắn vào.
- Khi sạc pin, chức năng chịu nước bị hạn chế, vì vậy hãy sử dụng sản phẩm ở nơi không tiếp xúc với nước.

Thời lượng pin: Khoảng 12 giờ

- Dựa trên âm lượng 50 %, không bật đèn và EQ Nâng cao giọng nói. (Kết quả kiểm tra nội bộ.) Thời gian sử dụng thực tế có thể thay đổi.

ไทย

รายละเอียดจำเพาะ

การจ่ายไฟที่ต้องการ

- อ้างอิงฉลากข้อมูลหลัก
- แบตเตอรี่แบบชาร์จได้ในตัว

การสิ้นเปลืองพลังงาน: อ้างอิงฉลากข้อมูลหลัก

ขนาด (กว้าง x สูง x ลึก):

ประมาณ 312 มม. x 311 มม. x 282 มม.

สายป้อนสำหรับจ่ายไฟ (USB): 5 โวลต์ $\equiv$ 500 มิลลิแอมป์

เครื่องขยายเสียง (ผลรวมค่าเฉลี่ยกำลังสอง ค่ากำลังไฟฟ้าขาออก):

120 วัตต์ ค่าเฉลี่ยกำลังสอง

อุณหภูมิในการทำงาน: 5 °C ถึง 35 °C

ความชื้นขณะทำงาน: 5 % ถึง 80 % RH

การป้องกันการไหลเข้า: IPX4

- ของเหลว: ป้องกันน้ำกระเซ็น
- ในขณะที่ชาร์จ ฟังก์ชันการกันน้ำจะมีความจำกัด ดังนั้นจึงควรใช้งานในสถานที่ที่ไม่โดนน้ำ

ระยะเวลาการใช้งานแบตเตอรี่: ประมาณ 12 ชั่วโมง

- อ้างอิงจากระดับเสียง 50% ไม่เปิดไฟและใช้ Voice Enhance EQ (ผลการทดสอบภายใน) การใช้งานจริงอาจแตกต่างกันไป

POWER: This unit operates on a mains supply of 100 - 240 V ~ 50 / 60 Hz.

Wiring: This unit is supplied with a BS 1363 approved main plug. When replacing the fuse, always use a fuse of the same rating and approved to BS 1362. Never use this plug with the fuse cover omitted. To obtain a replacement fuse cover contact your dealer. If the type of plug supplied is not suitable for the mains sockets in your home, then the plug should be removed and a suitable type fitted. Please refer to the wiring instructions below:

Warning: A mains plug removed from the mains lead of this unit must be destroyed. A mains plug with bared wires is hazardous if inserted in a mains socket. Do not connect either wire to the earth pin, marked with the letter E or with the earth symbol $\perp$ or coloured green or green and yellow. If any other plug is fitted, use same rating of fuse in the plug.

Important: The wires in this mains lead are coloured in accordance with the following codes:

- **BLUE: NEUTRAL, BROWN: LIVE** - As the colours of the wires in the mains lead of this unit may not correspond with the coloured marking identifying the terminals in your plug, proceed as follows: The wire which is coloured blue must be connected to the terminal which is marked with the letter N or coloured black. The wire which is coloured brown must be connected to the terminal which is marked with the letter L or coloured red.