



## JTSE

### Power Hot Air Station

This Plug & Play Guide corresponds to the following references:

Ref.

JTSE-9B (100 V)  
JTSE-1B (120 V)  
JTSE-2B (230 V)

#### Station

More Information at the  
product web page



#### Video Guide

Watch the  
product video.



## Packing List

The following items are included according purchased station reference:



**JTSE**  
**Hot Air Control Unit** ..... 1 unit  
 Ref. JTSE-9UA (100 V)  
 Ref. JTSE-1UA (120 V)  
 Ref. JTSE-2UA (230 V)



**JTS**  
**Stand** ..... 1 unit  
 Ref. JT-SF



**JTT**  
**Heater Hose Set** ..... 1 unit  
 Ref. JT-T1A (100V / 120V)  
 Ref. JT-T2A (230V)



**JN2015**  
**JTT Bent Nozzle Ø 4 mm - 18 °** .... 1 unit  
 Ref. JN2015



**JN2012**  
**JTT Bent Nozzle Ø 6 mm - 18 °** .... 1 unit  
 Ref. JN2012



**JN2020**  
**JTT Straight Nozzle Ø 8 mm** ..... 1 unit  
 Ref. JN2020



**PH217**  
**Kapton Tape** ..... 1 unit  
 Ref. PH217



**PH218**  
**Thermocouple Type K** .....1 unit  
 Ref. PH218



**ESHT**  
**Magazine for**  
**Protectors & Extractors** ..... 1 unit  
 Ref. ESHT-A

## Installation




**JTS**  
 Stand for JTT  
 Heater Hose Set


**JTSE**  
 Power Hot Air  
 Control Unit



**Power Cord**  
 included in JTSE Control Unit

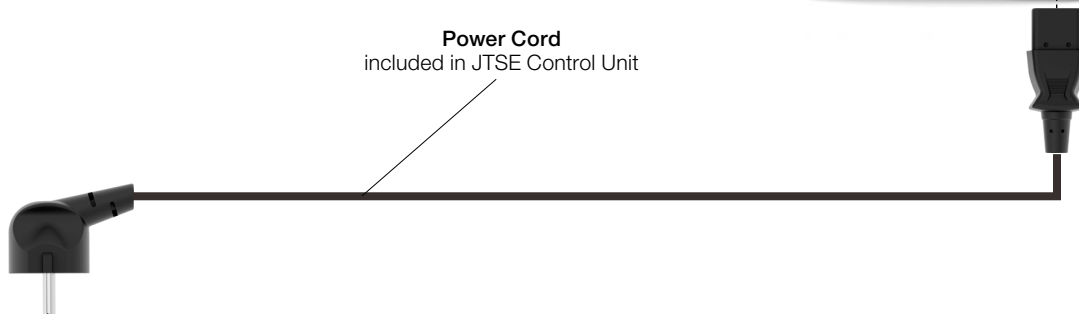

Installation

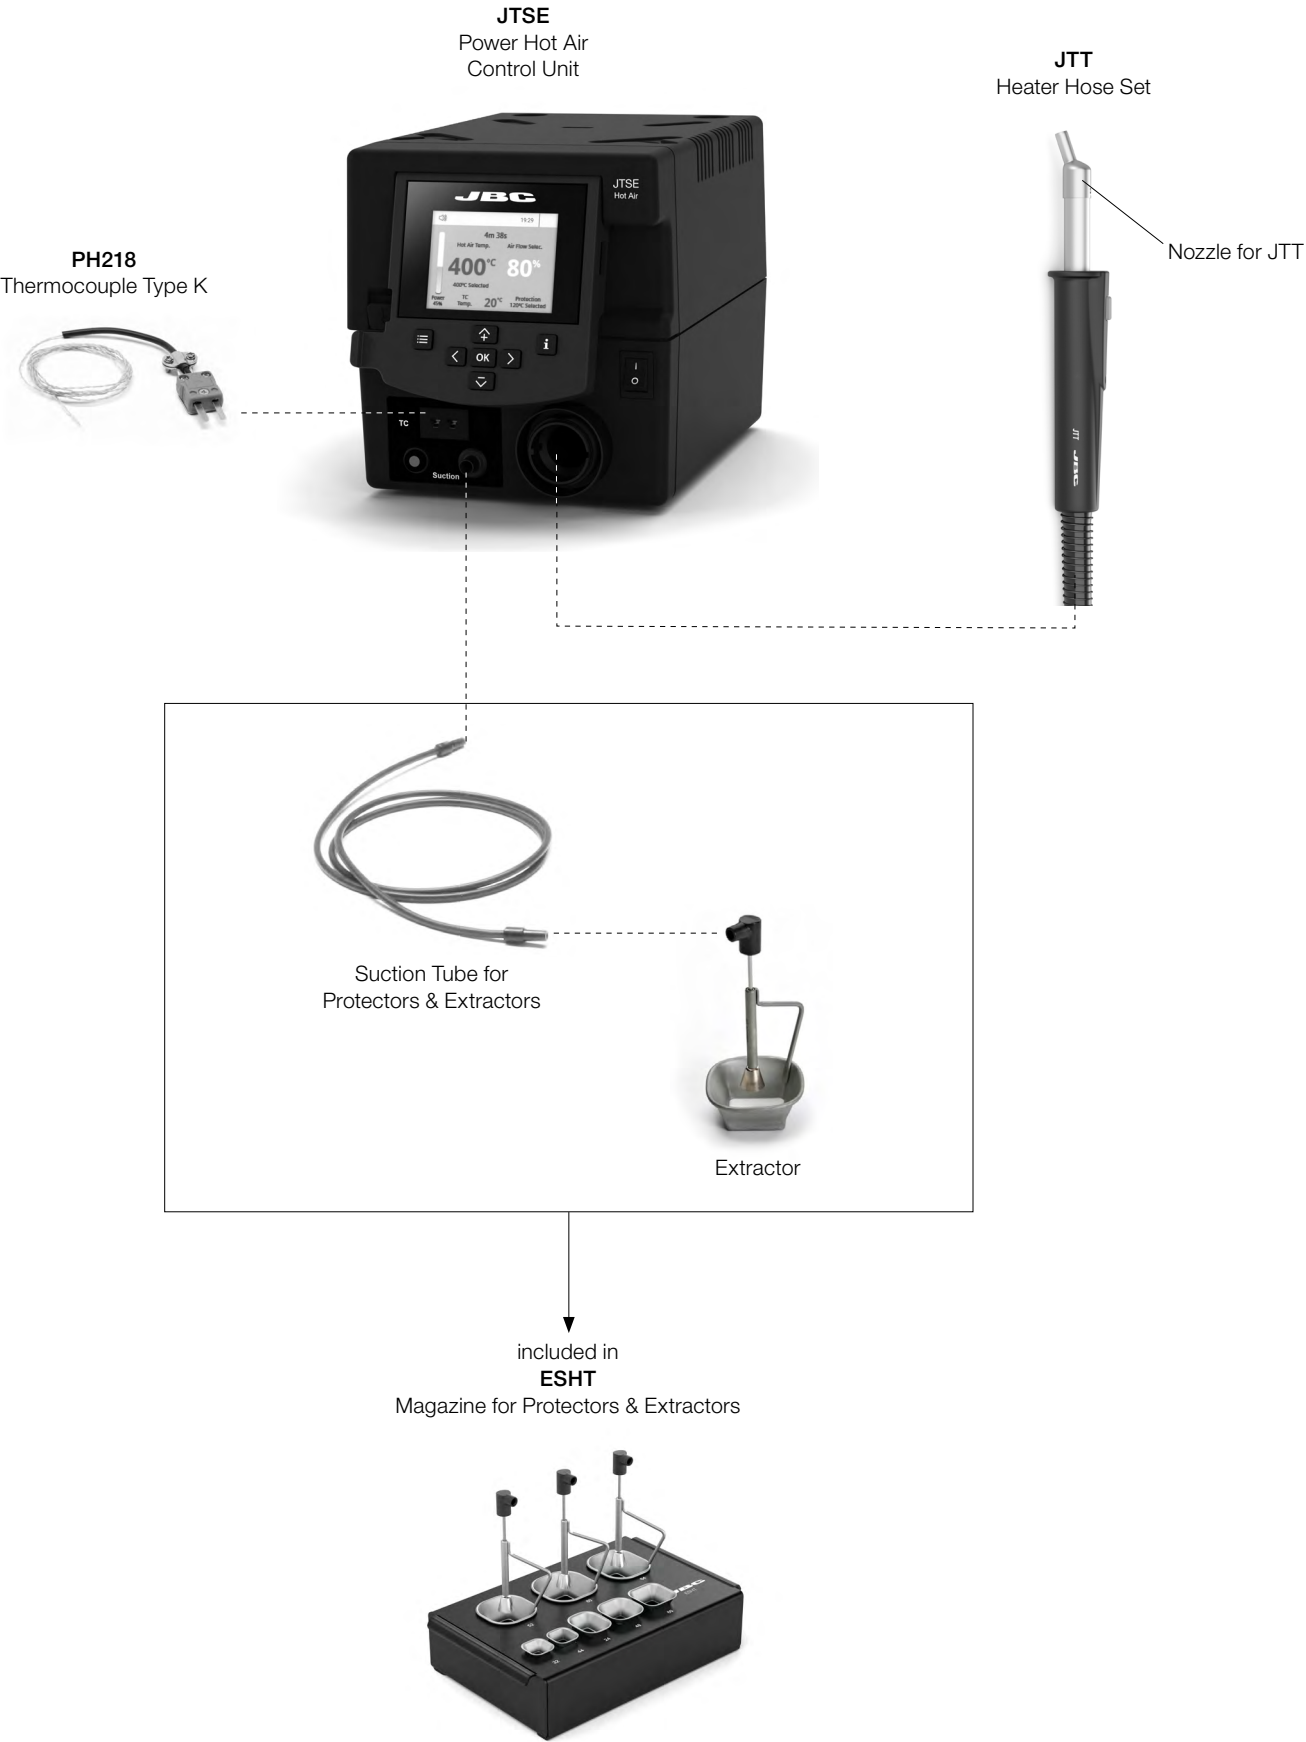

# Specifications

|                                                                        |                                  |
|------------------------------------------------------------------------|----------------------------------|
| <b>JTSE</b>                                                            |                                  |
| <b>Power Hot Air Station</b>                                           |                                  |
| Ref. <b>JTSE-9B</b> (100 V) 50/60Hz. Input fuse: 8A. Rated current: 7A |                                  |
| Ref. <b>JTSE-1B</b> (120 V) 50/60Hz. Input fuse: 8A. Rated current: 7A |                                  |
| Ref. <b>JTSE-2B</b> (230 V) 50/60Hz. Input fuse: 4A. Rated current: 3A |                                  |
|                                                                        |                                  |
| - Package Dimensions / Weight:                                         | 545 x 345 x 275 mm / 7.89 kg     |
| (L x H x W)                                                            | 21.5 x 16.6 x 10.8 in / 17.39 lb |
| Complies with CE standards.                                            |                                  |
| ESD safe.                                                              |                                  |