

## IR Mini Dome Network Camera

MODEL: VIGI C230I Mini



**3MP | H.265+**

VIGI C230I Mini (2.8mm)



Human & Vehicle  
Classification



Smart Detection



IK08



Two-Way Audio



Onboard Storage\*

## // Human & Vehicle Classification


Intelligently distinguishes humans and vehicles from other objects, so you receive more accurate event notifications.



## // Smart Detection




Motion Detection



Area Intrusion



Object Removal



Line-Crossing



Camera Tampering



Abandoned Object

## // SmartVid



### Smart IR

Keeps objects from being under-rendered when far away or overexposed when close to camera at night.



### Wide Dynamic Range

Adjusts for lighting contrast to minimize shadowing effects and renders images true to life.




### 3D DNR

Removes abnormal pixelation to provide clearer video and eliminate distortion.

## // VIGI Surveillance Solution

The VIGI professional surveillance system by TP-Link is dedicated to protecting the business that you've worked hard to build—whenever, wherever.

Outstanding functions, reliable quality guarantees, and simplified installation work together to ensure your business stays safe and sound.

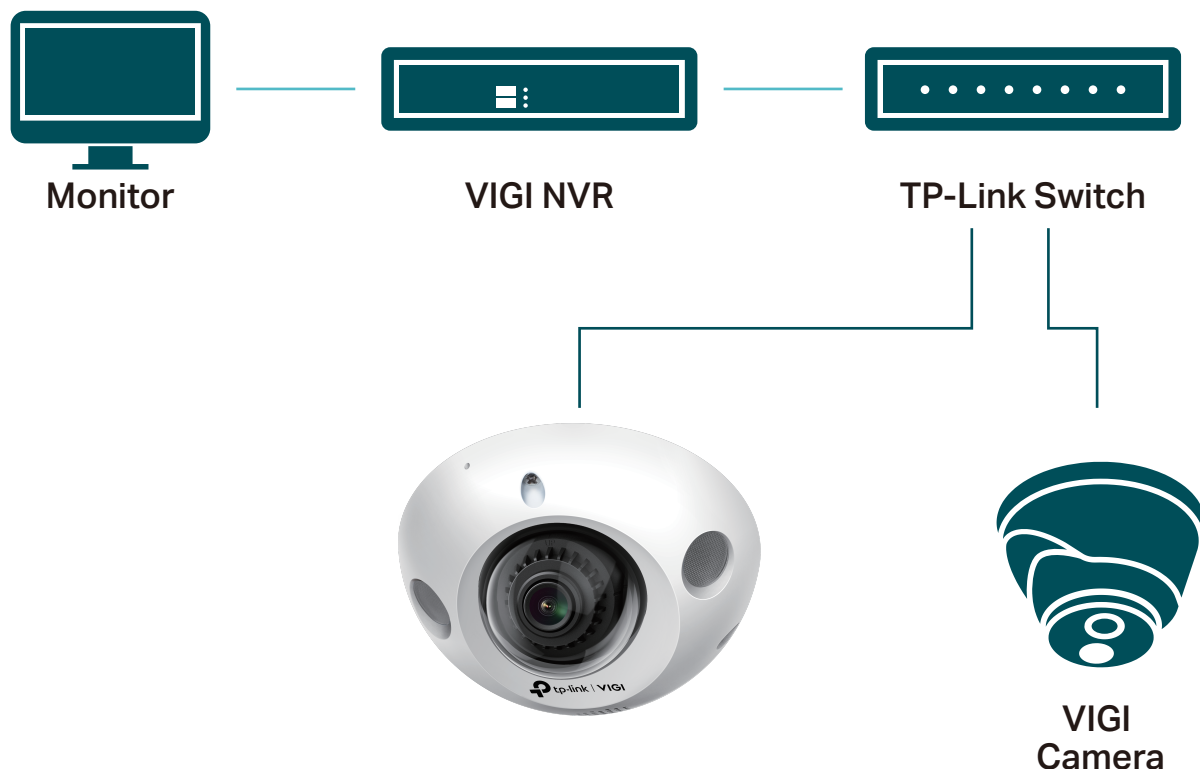

## // Flexible Installation

Easily route your camera's cable into a dropped ceiling or avoid drilling by slotting it through the camera's side outlet.



## // Specifications

Camera	
Image Sensor	1/2.8" Progressive Scan CMOS
Min. Illumination	Color: 0.1 Lux; 0 Lux with IR
Day & Night	IR Cut Filter
Digital Noise Reduction	3D DNR
WDR	DWDR
Lens	
Focal length	2.8 mm
Aperture	F1.6
Focus	Fixed
FOV	Horizontal FOV: 106.9°, Vertical FOV: 56.9°, Diagonal FOV: 127.9°
Lens Mount	M12
IR	
IR Range	30m
Wavelength	850nm
Compression Standard	
Video Compression	Main stream: H.265+/H.265/H.264+/H.264 Sub-Stream: H.265/H.264
H.264 Type	Main Profile/High Profile
H.264+	Main Stream Supported
H.265 Type	Main Profile
H.265+	Main Stream Supported
Video Bit Rate	64 Kbps to 4 Mbps
Smart Feature-set	
Smart Event	Human & Vehicle Classification, Area Intrusion Detection, Line-Crossing Detection, People Detection, Area Entrance Detection, Area Exiting Detection, Abandoned Object Detection, Object Removal Detection, Vehicle Detection

Basic Event	Motion Detection, Video Tampering Detection, Exception ( illegal login)
Linkage Method	Trigger Notification: ONVIF, HTTPS
Region of Interest	1 Region
<b>Image</b>	
Max. Resolution	3MP (2304 × 1296)
Main Stream	Frame Rate: 1fps, 5fps, 10fps, 15fps, 20fps, 25fps, 30fps Resolution: 2304x1296, 2048x1280, 1920x1080, 1280x720
Sub-Stream	Frame Rate: 1fps, 5fps, 10fps, 15fps, 20fps, 25fps, 30fps Resolution: 704x576, 640x480, 352x288, 320x240
Image Enhancement	BLC/3D DNR/HLC/SmartIR
Image Settings	Mirror, brightness, contrast, saturation, sharpness, exposure, WDR, white balance, HLC adjustable by client software, Rotation(90°/270°)
Day/Night Switch	Day/Night/Auto/Schedule
<b>Network</b>	
Protocols	TCP/IP, UDP, ICMP, HTTP, HTTPS, DHCP, DNS, RTSP, NTP, UPnP, UDP, SSL/TLS
General Function	Two Streams, Mirror, Privacy Masks, Password Reset via E-mail, HTTP Listening
API	ONVIF
Security	Password Protection, HTTPS Encryption, IP Address Filter, Digest Authentication
Simultaneous Live View	3 Main Streams & 3 Sub-Streams
Client	VIGI APP, VIGI Security Manager, VIGI NVR, Web
<b>Interface</b>	
Communication Interface	1 RJ45 10/100M Self-Adaptive Ethernet Port
Video Output	No
Built-In Microphone	Yes
Built-In Speaker	Yes

On-board Storage	Built-In Memory Card Slot, Support MicroSD Card, Up to 256 GB
Reset Button	Yes
<b>General</b>	
Operating Temperature	-30–60 °C
Power Supply	12V DC ± 5%, 5.5mm Coaxial Power Plug PoE (802.3af/at, class 0)
Power Consumption	12V DC: Max 7.5W PoE: Class 0
Audio Communication	Two-Way Audio
Vandal Resistant	IK08
Material	Plastic
Product Dimensions	114 × 114 × 58 mm
Certifications	CE/VCCI/BSMI/KC/ONVIF

Specifications are subject to change without notice and can be found at [www.tp-link.com](http://www.tp-link.com).

©2022 TP-Link