

General Description

The AP21X1A and AP21X1AD are integrated high-side power switches optimized for Universal Serial Bus (USB) and other hot-swap applications. The family of devices complies with USB 2.0 and is available with both polarities of Enable input. They offer current and thermal limiting and short circuit protection, as well as controlled rise time and undervoltage lockout functionality. A 7ms deglitch capability on the open-drain Flag output prevents false overcurrent reporting and does not require any external components.

Applications

- Consumer electronics – LCD TVs & monitors, game machines
- Communications – set-top-boxes, GPS, smartphones
- Computing – laptops, desktops, servers, printers, docking stations, HUBs

Key Features

- Single USB Port Power Switches with Output Discharge
- Overcurrent and Thermal Protection
- 0.8A accurate Current Limiting
- Fast Transient Response
- Reverse Current Blocking
- 90mΩ On-Resistance
- Input Voltage Range: 2.7V - 5.5V
- 0.6ms Typical Rise Time
- Very Low Shutdown Current: 1μA (max)
- Fault Report (FLG) with Blanking Time (7ms typ)
- ESD Protection: 4kV HBM, 300V MM
- Active High (ex. AP2191A/AP2191D) or Active Low (ex. AP2181A/AP2181D) Enable
- Ambient Temperature Range -40°C to +85°C
- SOT25, SO-8, MSOP-8EP (Exposed Pad), and U-DFN2018-6: Available in "Green" Molding Compound (No Br, Sb)
 - **Totally Lead-Free & Fully RoHS Compliant (Notes 1 & 2)**
 - **Halogen and Antimony Free. "Green" Device (Note 3)**
- 15kV ESD Protection per IEC 61000-4-2 (with external capacitance)
- UL Recognized, File Number E322375
- IEC60950-1 CB Scheme Certified

Notes:

1. No purposely added lead. Fully EU Directive 2002/95/EC (RoHS), 2011/65/EU (RoHS 2) & 2015/863/EU (RoHS 3) compliant.
2. See <https://www.diodes.com/quality/lead-free/> for more information about Diodes Incorporated's definitions of Halogen- and Antimony-free, "Green" and Lead-free.
3. Halogen- and Antimony-free "Green" products are defined as those which contain <900ppm bromine, <900ppm chlorine (<1500ppm total Br + Cl) and <1000ppm antimony compounds.

Typical Applications Circuit

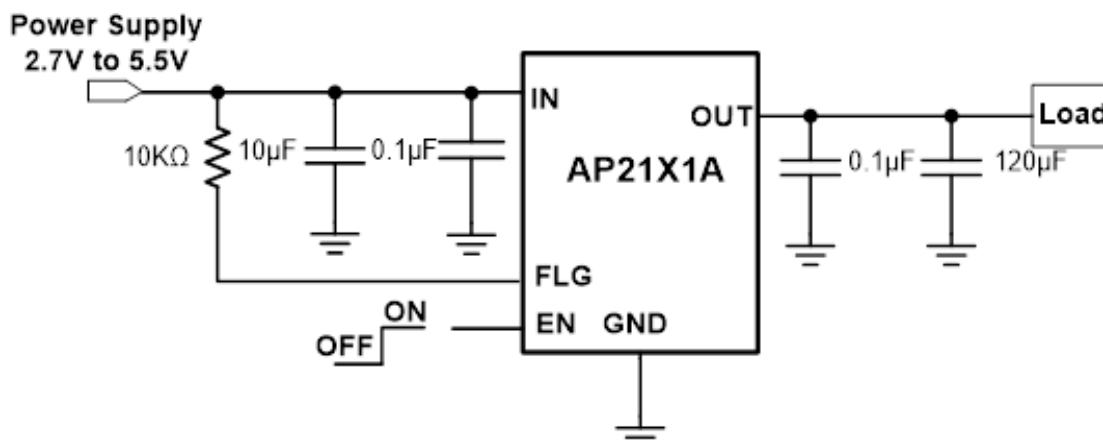


Figure 1: Typical Applications Circuit

Recommended Operating Conditions

Symbol	Characteristic	Min	Max	Rating	Unit
V_{IN}	Input Voltage	2.7	5.5	6.5	V
V_{OUT}	Output Voltage	-	-	$V_{IN} + 0.3$	V
V_{EN}, V_{FLG}	Enable and Flag Voltage	-	-	6.5	V
I_{LOAD}	Maximum Continuous Load Current	-	-	1.5	A
T_A	Operating Ambient Temperature	-40	+85	+150	°C

Ordering Information

Device	Package Code	Output Current (A)	Enable	Package	EVM Part Number
AP2181AW-7	W	1.5	Low	SOT25	AP21X1AW-EVM
AP2181AS-13	S	1.5	Low	SOP-8	AP21X1AS-EVM
AP2181AMP-13	MP	1.5	Low	MSOP8-EP	AP21X1AMP-EVM
AP2181AFM-7	FM	1.5	Low	U-DFN2018-6	AP21X1AFM-EVM
AP2191AW-7	W	1.5	High	SOT25	AP21X1AW-EVM
AP2191AS-13	S	1.5	High	SOP-8	AP21X1AS-EVM
AP2191AMP-13	MP	1.5	High	MSOP8-EP	AP21X1AMP-EVM
AP2191AFM-7	FM	1.5	High	U-DFN2018-6	AP21X1AFM-EVM
AP2181DWG-7	W	1.5	Low	SOT25	AP21X1AW-EVM
AP2181DSG-13	S	1.5	Low	SOP-8	AP21X1AS-EVM
AP2181DM8G-13	MP	1.5	Low	MSOP8	AP21X1AMP-EVM
AP2181DMPG-13	MP	1.5	Low	MSOP8-EP	AP21X1AMP-EVM
AP2181DFMG-7	FM	1.5	Low	U-DFN2018-6	AP21X1AFM-EVM
AP2191DWG-7	W	1.5	High	SOT25	AP21X1AW-EVM
AP2191DSG-13	S	1.5	High	SOP-8	AP21X1AS-EVM
AP2191DM8G-13	MP	1.5	High	MSOP8	AP21X1AMP-EVM
AP2191DMPG-13	MP	1.5	High	MSOP8-EP	AP21X1AMP-EVM
AP2191DFMG-7	FM	1.5	High	U-DFN2018-6	AP21X1AFM-EVM

Evaluation Board

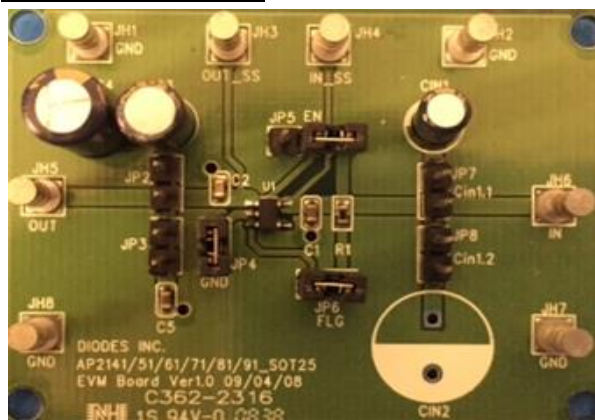


Figure 1. AP21X1AW-EVM

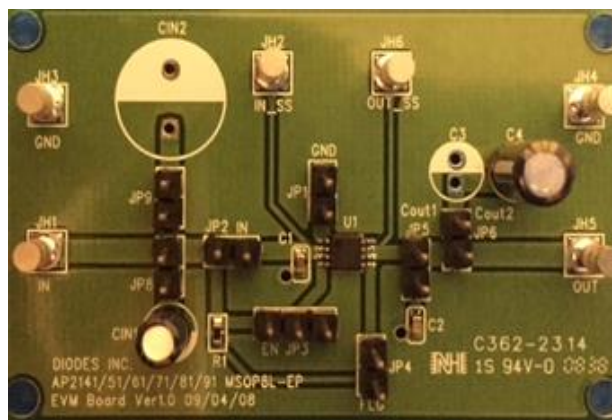


Figure 2. AP21X1AMP-EVM



Figure 3. AP21X1AFM-EVM

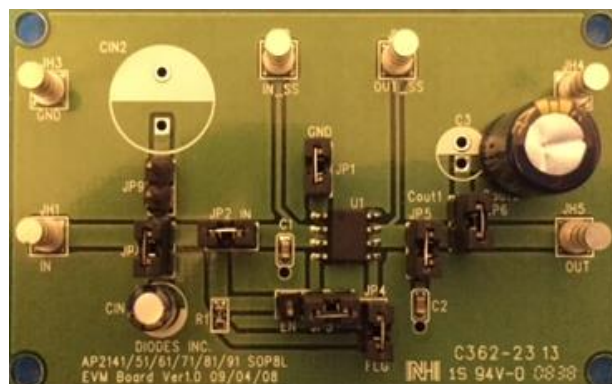


Figure 4. AP21X1AS-EVM



Figure 5. AP21X1AW-EVM



Figure 6. AP21X1AMP-EVM

Evaluation Board (continued)



Figure 7. AP21X1AS-EVM



Figure 8. AP21X1AFM-EVM

Quick Start Guide

1. Insert jumpers to configure the input capacitance and output capacitance as described in the Application Information sections of the device datasheet.
2. Place the Enable jumper in the enable position.
3. Connect a +5V power supply between the IN and GND terminals. Make sure the power supply is turned off.
4. Connect an adjustable current or resistive load to the OUT and GND terminals.
5. Turn on the power supply.
6. Increase the load current and observe that the load current will stop increasing after reaching certain level. That is an indication that the device is limiting the load current.
7. Use an oscilloscope or a voltage meter to check that the FLG pin becomes low when the current limit is reached.

Evaluation Board Schematic

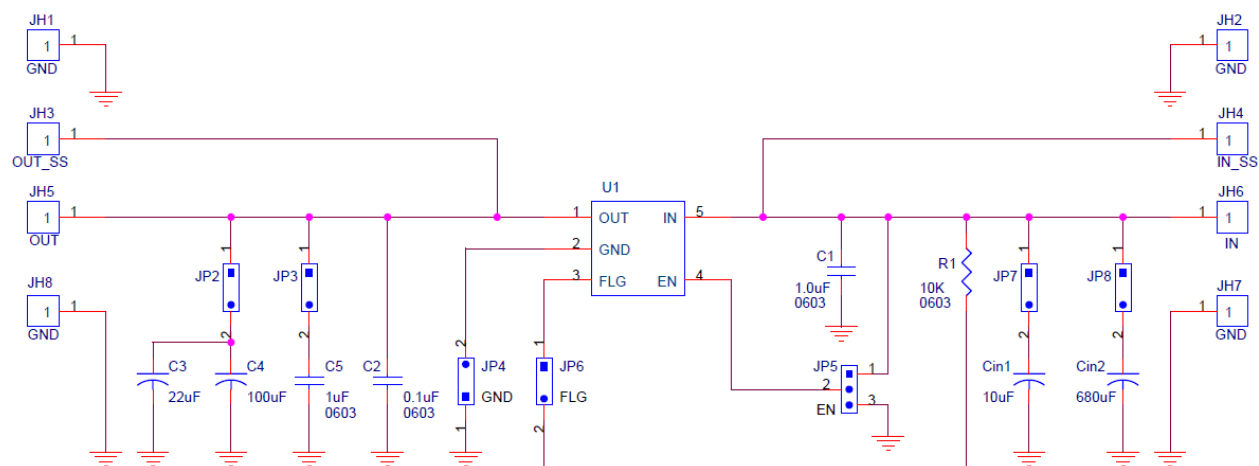


Figure 9. AP21X1AW-EVM

Evaluation Board Schematic (continued)

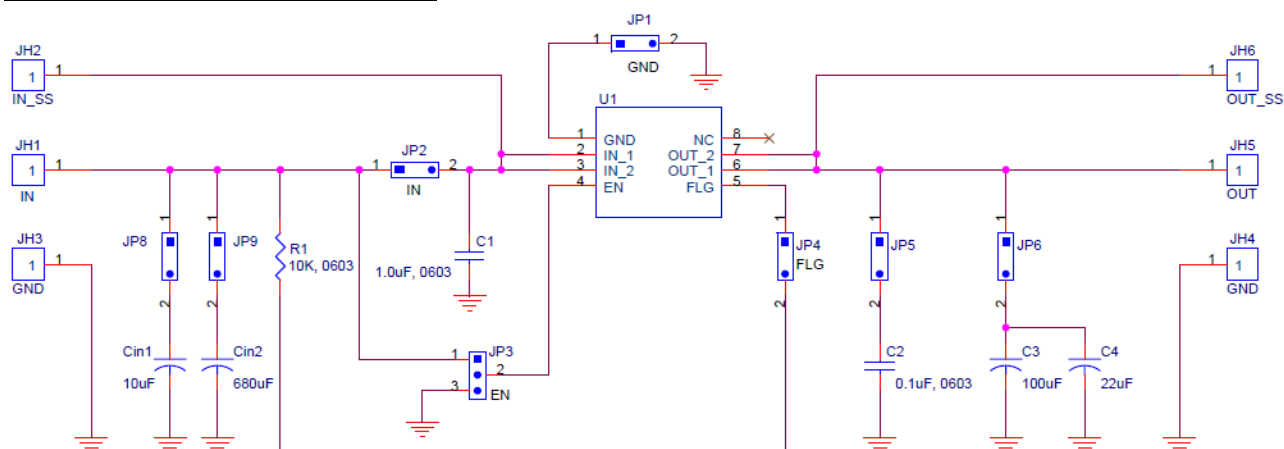


Figure 10. AP21X1AS-EVM & AP21X1AMPG-EVM

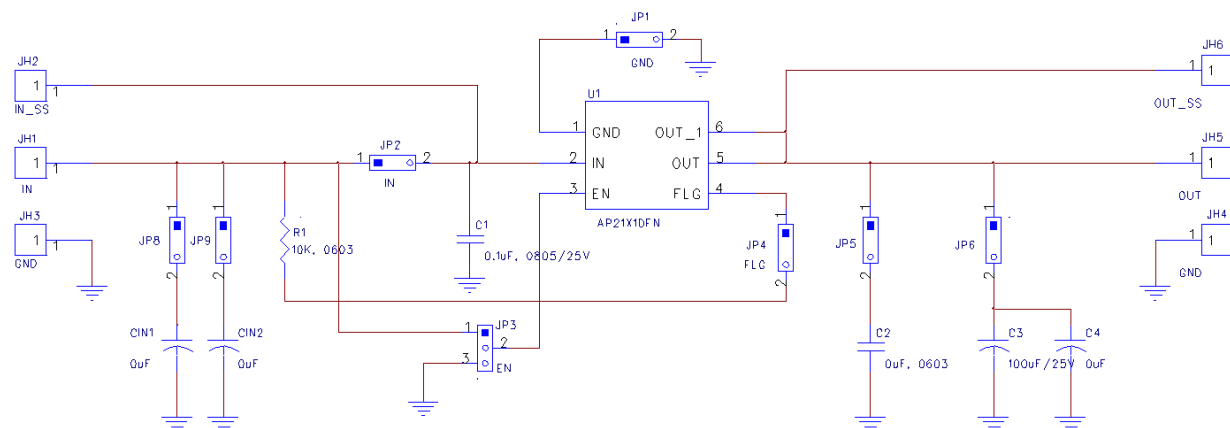


Figure 11. AP21X1AFM-EVM

Evaluation Board Schematic (continued)

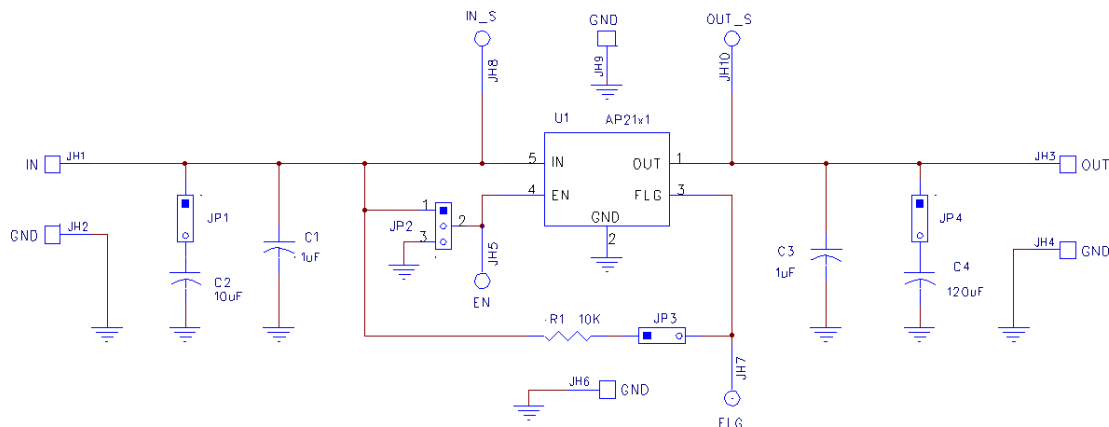


Figure 12. AP21X1AW-EVM

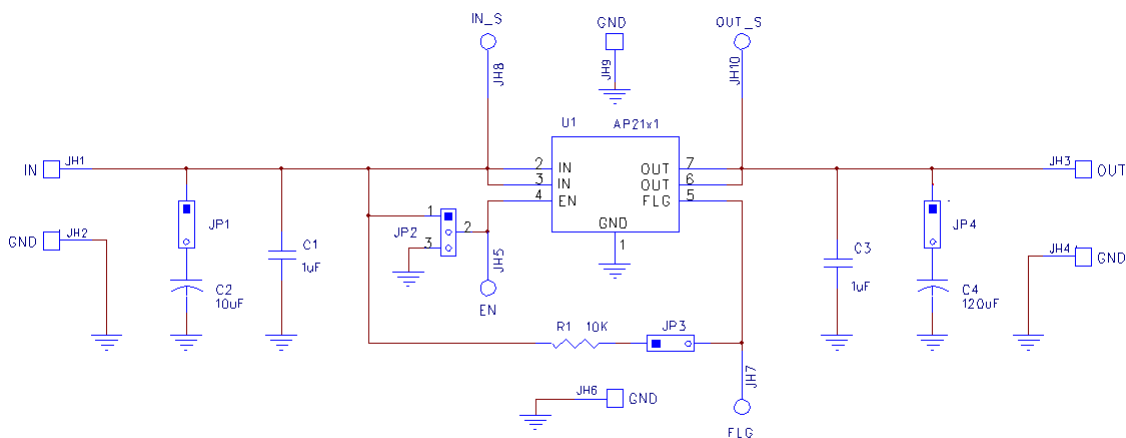


Figure 13. AP21X1AMP-EVM

Evaluation Board Schematic (continued)

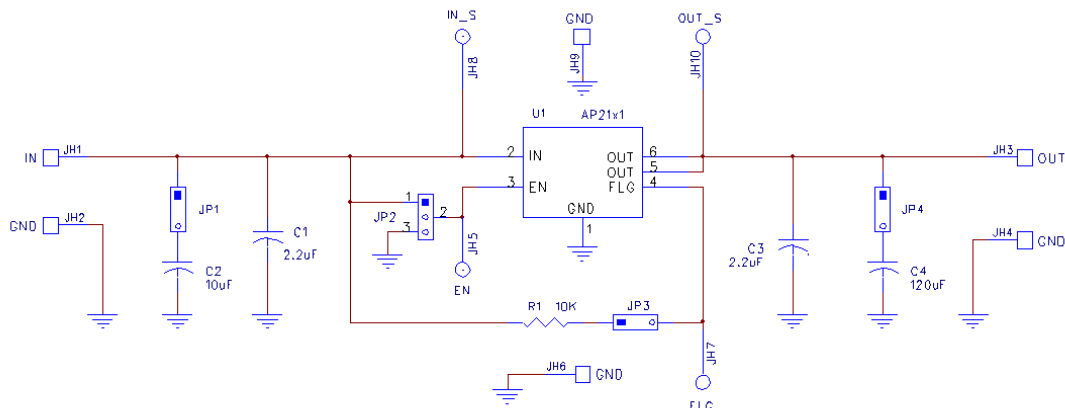


Figure 14. AP21X1AFM-EVM

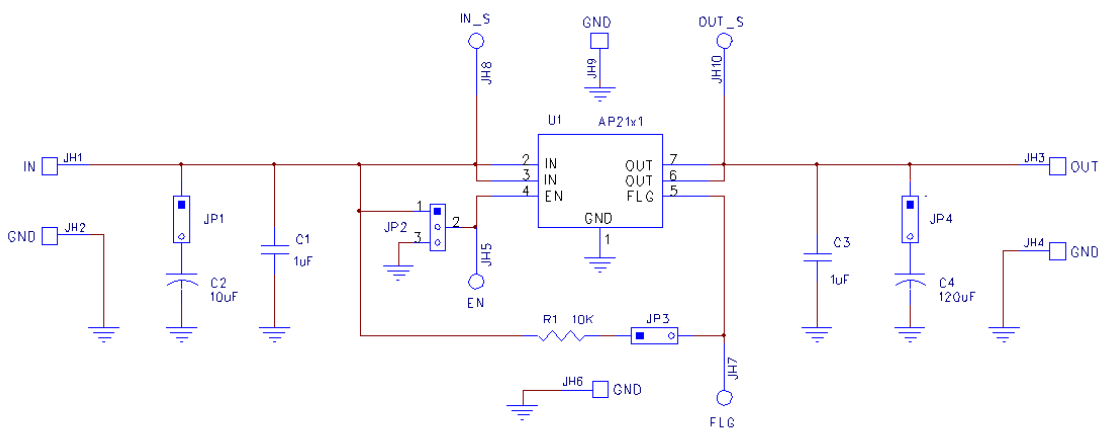


Figure 15. AP21X1AS-EVM

Bill Of Materials for AP21X1AW-EVM

Item	Qty	Reference	Value	Part #	Manufacturer	Description
1	3	C1, C2, C5	0.1μF	0603YC104KAT2A	AVX	Ceramic Capacitor, 0603, 16V, X7R, 10%
3	1	CIN1	10μF	EEA-FC1E100	STD/Panasonic	Electrolytic Capacitor
4	1	C4	120μF	EEU-FC1V121	STD/Panasonic	Electrolytic Capacitor, 35V
5	1	R1	10KΩ	ERJ-3EKF1002V	Panasonic	Resistor, 0603, 1%
6	1	JP5		2340-6211TG	3M	PCB Header, Straight 40 POS, 1X3
7	6	JP2,JP3,JP4,JP6,JP7,JP8		2340-6211TG	3M	PCB Header, Straight 40 POS, 1X2
8	8	JH1,JH2,JH3,JH4,JH5,JH6,JH7,JH8		1598-2	Keystone Electronics	Circuit Board Hardware - PCB TERM .094X1/16
9	1	U1		AP21X1AW-7	Diodes	AP21X1A, SOT25

Bill Of Materials for AP21X1AMP-EVM

Item	Qty	Reference	Value	Part #	Manufacturer	Description
1	2	C1, C2	0.1μF	0603YC104KAT2A	AVX	Ceramic Capacitor, 0603, 16V, X7R, 10%
2	1	CIN1	10μF	EEA-FC1E100	STD/Panasonic	Electrolytic Capacitor
3	1	C3	120μF	EEU-FC1V121	STD/Panasonic	Electrolytic Capacitor, 35V
4	1	R1	10KΩ	ERJ-3EKF1002V	Panasonic	Resistor, 0603, 1%
5	1	JP3		2340-6211TG	3M	PCB Header, Straight 40 POS, 1X3
6	4	JP2,JP8,JP5,JP6		2340-6211TG	3M	PCB Header, Straight 40 POS, 1X2
7	6	JH1,JH2,JH3,JH4,JH5,JH6		1598-2	Keystone Electronics	Circuit Board Hardware - PCB TERM .094X1/16
9	1	U1		AP21X1AMP-13	Diodes	AP21X1A, MSOP-EP

Bill Of Materials for AP21X1AFM-EVM

Item	Qty	Reference	Value	Part #	Manufacturer	Description
1	2	C1, C2	0.1μF	0603YC104KAT2A	AVX	Ceramic Capacitor, 0603, 16V, X7R, 10%
2	1	CIN1	10μF	EEA-FC1E100	STD/Panasonic	Electrolytic Capacitor
3	1	C3	120μF	EEU-FC1V121	STD/Panasonic	Electrolytic Capacitor, 25V
4	1	R1	10KΩ	ERJ-3EKF1002V	Panasonic	Resistor, 0603, 1%
5	1	JP3		2340-6211TG	3M	PCB Header, Straight 40 POS, 1X3
6	6	JP1,JP2,JP4,JP5,JP6,JP8		2340-6211TG	3M	PCB Header, Straight 40 POS, 1X2
7	6	JH1,JH2,JH3,JH4,JH5,JH6		1598-2	Keystone Electronics	Circuit Board Hardware - PCB TERM .094X1/16
9	1	U1		AP21X1AFM-7	Diodes	AP21X1A, DFN2018-6

Bill Of Materials for AP21X1AS-EVM

Item	Qty	Reference	Value	Part #	Manufacturer	Description
1	2	C1, C2	0.1μF	0603YC104KAT2 A	AVX	Ceramic Capacitor, 0603, 16V, X7R, 10%
2	1	CIN1	10μF	EEA-FC1E100	STD/Panasonic	Electrolytic Capacitor
3	1	C3	120μF	EEU-FC1V121	STD/Panasonic	Electrolytic Capacitor, 35V
4	1	R1	10KΩ	ERJ-3EKF1002V	Panasonic	Resistor, 0603, 1%
5	1	JP3		2340-6211TG	3M	PCB Header, Straight 40 POS, 1X3
6	4	JP2,JP8,JP5,JP6		2340-6211TG	3M	PCB Header, Straight 40 POS, 1X2
7	6	JH1,JH2,JH3,JH4,JH5,JH6		1598-2	Keystone Electronics	Circuit Board Hardware - PCB TERM .094X1/16
9	1	U1		AP21X1AS-13	Diodes	AP21X1A, SOP8

Bill Of Materials for AP21X1AS/FM/W/MP-EVM

Item	Qty	Reference	Value	Part #	Manufacturer	Description
1	2	C1, C3	1μF	EMK107B7105KA-T	Taiyo Yuden	Ceramic Capacitor, 0603, 16V, X7R, 10%
2	1	C2	10μF	EEA-FC1E100	STD/Panasonic	Electrolytic Capacitor
3	1	C4	120μF	EEU-FC1V121B	STD/Panasonic	Electrolytic Capacitor
4	1	R1	10KΩ	ERJ-3EKF1002V	Panasonic	Resistor, 0603, 1%
5	1	JP2		2340-6211TG	3M	PCB Header, Straight 40 POS, 1X3
6	3	JP1,JP3,JP4		2340-6211TG	3M	PCB Header, Straight 40 POS, 1X2
7	6	T1		1598-2	Keystone Electronics	Circuit Board Hardware - PCB TERM .094X1/16
8	4	T2		1573-2	Keystone Electronics	Circuit Board Hardware - PCB 3 Turret Term .082"
9	1	U1		AP21X1A	Diodes	AP21X1A

PCB Layout

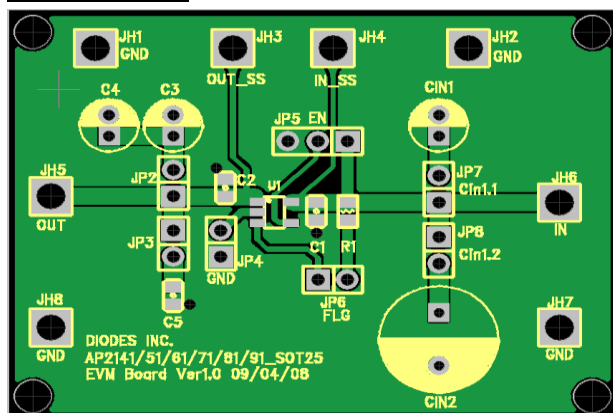


Figure 16. AP21X1AW-EVM – Top Layer

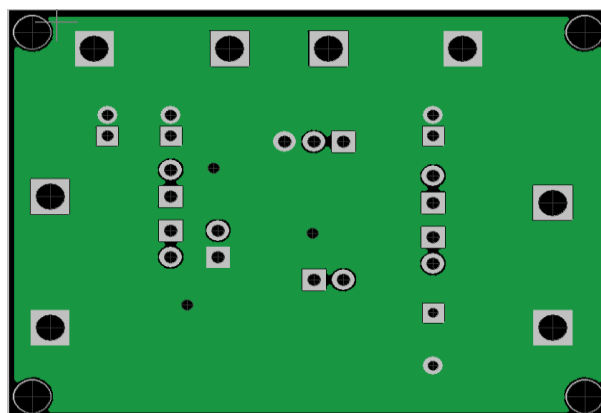


Figure 17. AP21X1AW-EVM – Bottom Layer

PCB Layout (continued)

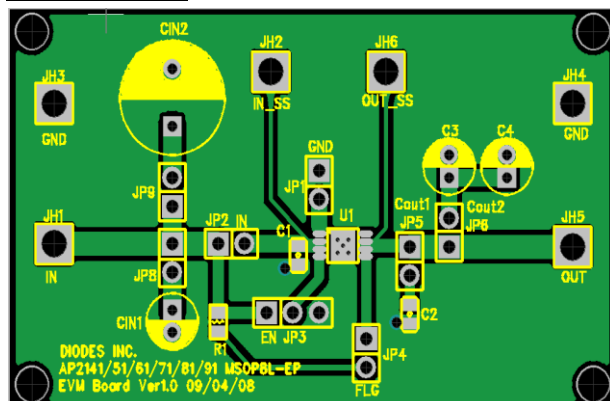


Figure 18. AP21X1AMP-EVM – Top Layer

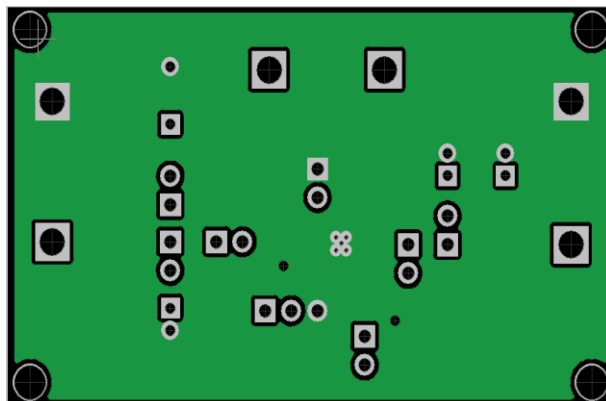


Figure 19. AP21X1AMP-EVM – Bottom Layer

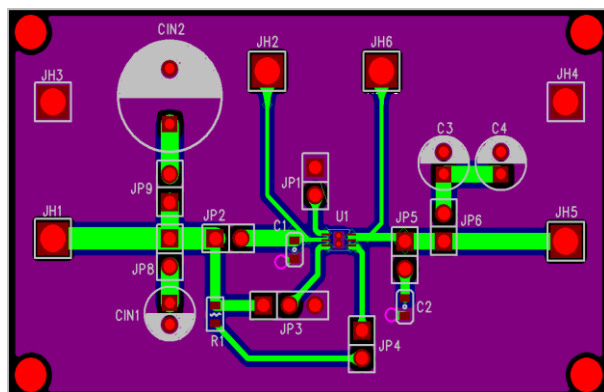


Figure 20. AP21X1AFM-EVM – Top Layer

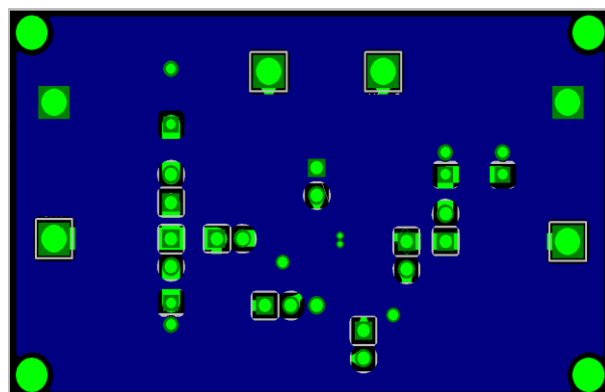


Figure 21. AP21X1AFM-EVM – Bottom Layer

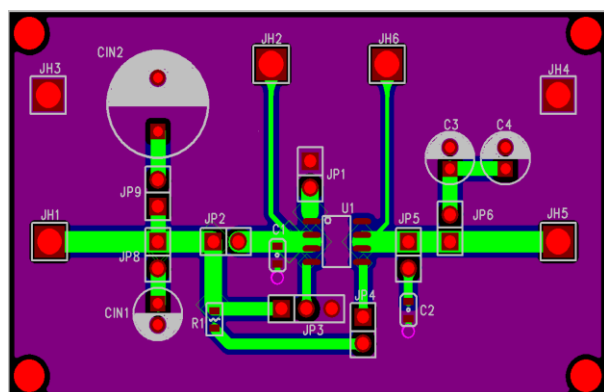


Figure 22. AP21X1AS-EVM – Top Layer

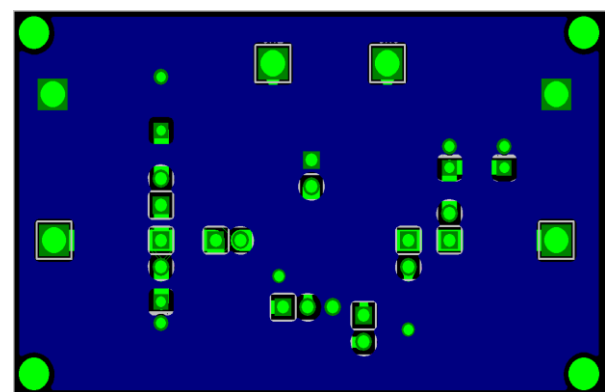


Figure 23. AP21X1AS-EVM – Bottom Layer

PCB Layout (continued)

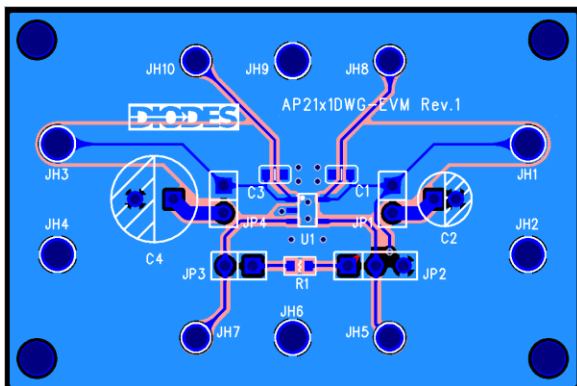


Figure 24. AP21X1AW-EVM – Top Layer

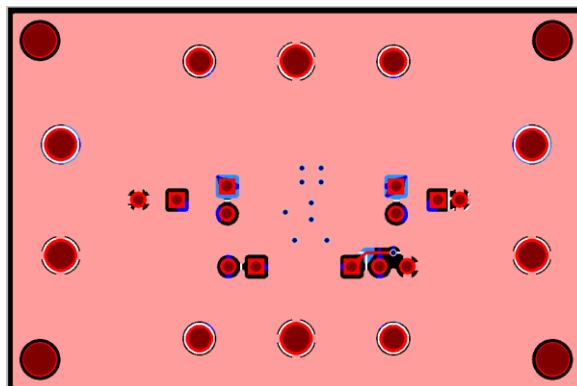


Figure 25. AP21X1AW-EVM – Bottom Layer

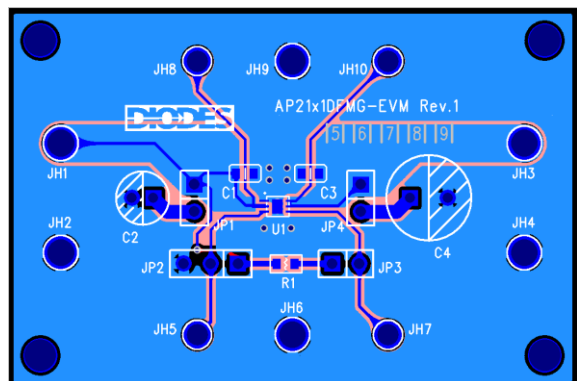


Figure 26. AP21X1AFM-EVM – Top Layer

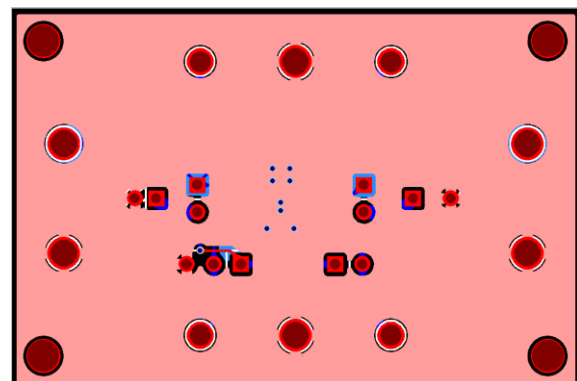


Figure 27. AP21X1AFM-EVM – Bottom Layer

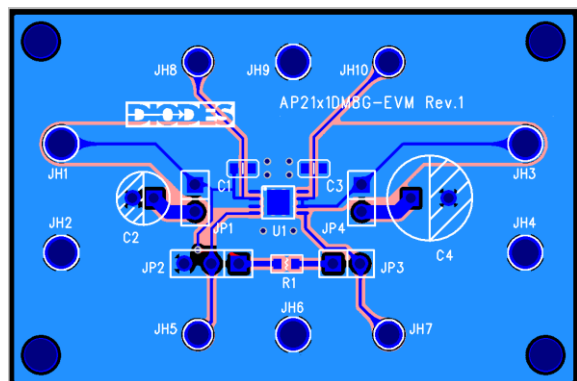


Figure 28. AP21X1AMP-EVM –Top Layer

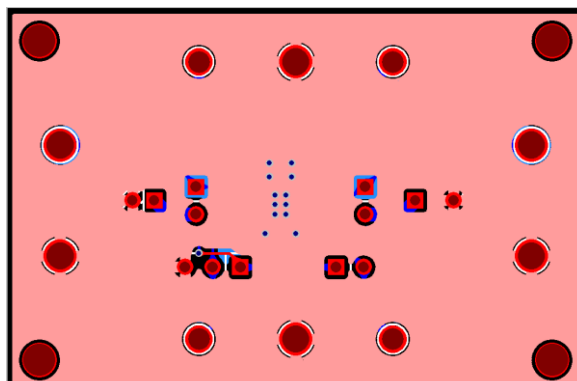


Figure 29. AP21X1AMP-EVM – Bottom Layer

PCB Layout (continued)

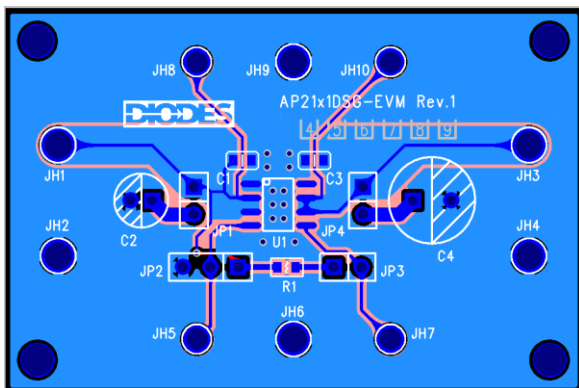


Figure 30. AP21X1AS-EVM – Top Layer

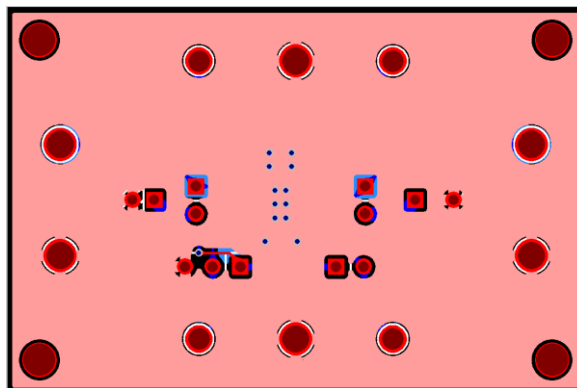


Figure 31. AP21X1AS-EVM – Bottom Layer

IMPORTANT NOTICE

1. DIODES INCORPORATED (Diodes) AND ITS SUBSIDIARIES MAKE NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARDS TO ANY INFORMATION CONTAINED IN THIS DOCUMENT, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION).
2. The Information contained herein is for informational purpose only and is provided only to illustrate the operation of Diodes' products described herein and application examples. Diodes does not assume any liability arising out of the application or use of this document or any product described herein. This document is intended for skilled and technically trained engineering customers and users who design with Diodes' products. Diodes' products may be used to facilitate safety-related applications; however, in all instances customers and users are responsible for (a) selecting the appropriate Diodes products for their applications, (b) evaluating the suitability of Diodes' products for their intended applications, (c) ensuring their applications, which incorporate Diodes' products, comply the applicable legal and regulatory requirements as well as safety and functional-safety related standards, and (d) ensuring they design with appropriate safeguards (including testing, validation, quality control techniques, redundancy, malfunction prevention, and appropriate treatment for aging degradation) to minimize the risks associated with their applications.
3. Diodes assumes no liability for any application-related information, support, assistance or feedback that may be provided by Diodes from time to time. Any customer or user of this document or products described herein will assume all risks and liabilities associated with such use, and will hold Diodes and all companies whose products are represented herein or on Diodes' websites, harmless against all damages and liabilities.
4. Products described herein may be covered by one or more United States, international or foreign patents and pending patent applications. Product names and markings noted herein may also be covered by one or more United States, international or foreign trademarks and trademark applications. Diodes does not convey any license under any of its intellectual property rights or the rights of any third parties (including third parties whose products and services may be described in this document or on Diodes' website) under this document.
5. Diodes' products are provided subject to Diodes' Standard Terms and Conditions of Sale (<https://www.diodes.com/about/company/terms-and-conditions/terms-and-conditions-of-sales/>) or other applicable terms. This document does not alter or expand the applicable warranties provided by Diodes. Diodes does not warrant or accept any liability whatsoever in respect of any products purchased through unauthorized sales channel.
6. Diodes' products and technology may not be used for or incorporated into any products or systems whose manufacture, use or sale is prohibited under any applicable laws and regulations. Should customers or users use Diodes' products in contravention of any applicable laws or regulations, or for any unintended or unauthorized application, customers and users will (a) be solely responsible for any damages, losses or penalties arising in connection therewith or as a result thereof, and (b) indemnify and hold Diodes and its representatives and agents harmless against any and all claims, damages, expenses, and attorney fees arising out of, directly or indirectly, any claim relating to any noncompliance with the applicable laws and regulations, as well as any unintended or unauthorized application.
7. While efforts have been made to ensure the information contained in this document is accurate, complete and current, it may contain technical inaccuracies, omissions and typographical errors. Diodes does not warrant that information contained in this document is error-free and Diodes is under no obligation to update or otherwise correct this information. Notwithstanding the foregoing, Diodes reserves the right to make modifications, enhancements, improvements, corrections or other changes without further notice to this document and any product described herein. This document is written in English but may be translated into multiple languages for reference. Only the English version of this document is the final and determinative format released by Diodes.
8. Any unauthorized copying, modification, distribution, transmission, display or other use of this document (or any portion hereof) is prohibited. Diodes assumes no responsibility for any losses incurred by the customers or users or any third parties arising from any such unauthorized use.
9. This Notice may be periodically updated with the most recent version available at <https://www.diodes.com/about/company/terms-and-conditions/important-notice>

The Diodes logo is a registered trademark of Diodes Incorporated in the United States and other countries.
All other trademarks are the property of their respective owners.
© 2025 Diodes Incorporated. All Rights Reserved.

www.diodes.com