



DTU-BLE

User Manual

Data Transfer unit Series



1. Introduction

DTU-BLE is a TBB's standard Bluetooth module for external installation purpose. It's designed as slim and compact whilst easy to be installed. It's able to connect directly with communication port which with power supply. It's compatible with TBB's M series lithium battery to allow to use M Lithium battery mobile APP.

2. Installation and connection

2.1 Installation

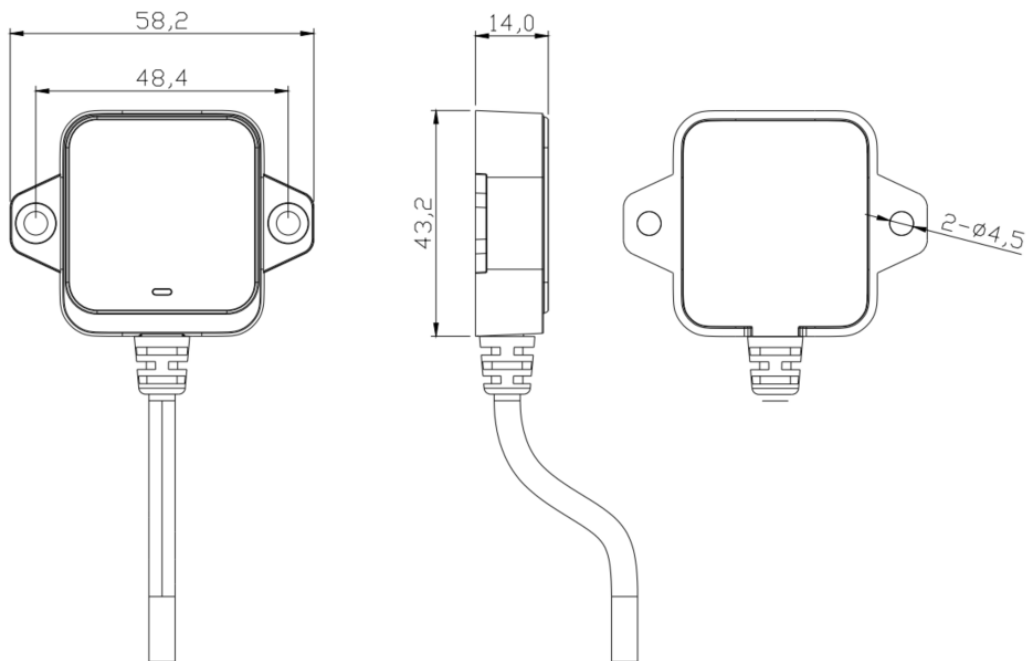


Fig.2-1 Product dimension

Installation steps:

- (1) Find a proper location where with flat surface
- (2) And then fix it by screw provided by TBB Power

2.2 Connection

2.2.1 Connection steps when with TBB battery switch

- (1) Connect DTU with a 3-way converter via an Ethernet cable (this 3-way converter is also provided by TBB Power)
- (2) Connect battery switch with above 3-way converter via another Ethernet cable
- (3) Connect above 3-way converter with Display port on battery via another Ethernet cable (8-pin one)
- (4) Leave switch on battery stayed at ON, meanwhile turn on battery switch then DTU module will be powered ON and ready to work

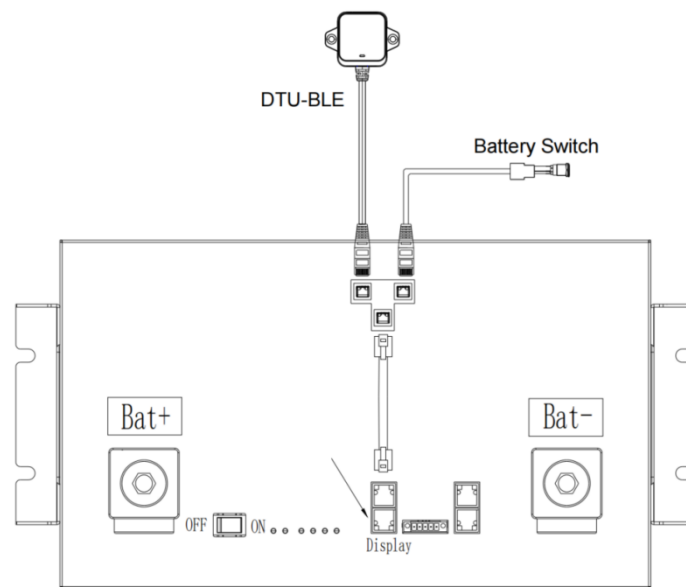


Fig.2-2-1 Connection diagram when with TBB battery switch

2.2.2 Connection steps when via dry contacts on M battery

The user is also allowed to control battery ON/OFF via dry contacts on M battery if TBB battery switch is not selected. Here is the steps of connection when via dry contacts

- (1) Connect DTU-BLE module with Display port on battery via an Ethernet cable
- (2) Use an external switch to connect with dry contacts of "Dry Contact" which next to Display port

Remarks: External switch needs to be self-locking type switch for example push-button switch

- (3) Leave switch on battery at ON meanwhile turn on external switch then DTU module will be powered ON and ready to work

Remarks: When use dry contact and external battery switch to control TBB M battery, the BMS software version must be V1.47 or above

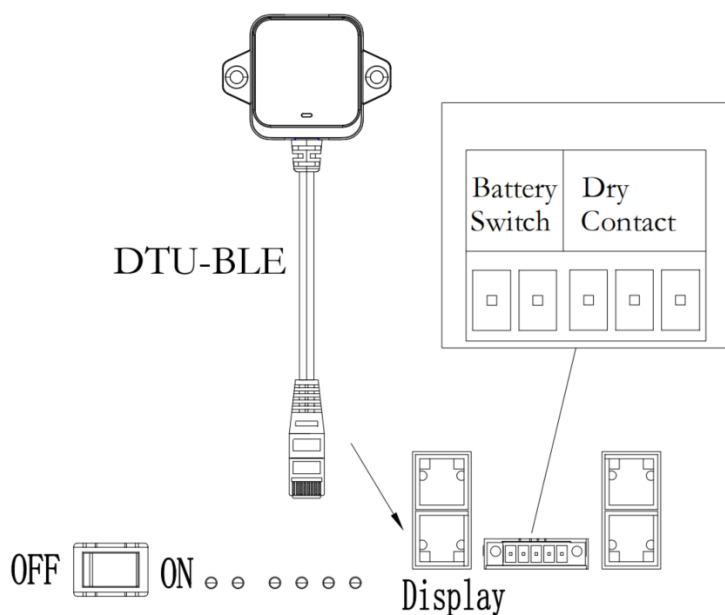


Fig.2-2-2 Connection diagram when via dry contacts on M battery

3. LED indicators

| Description | LED indicator | Status |
|-------------------------------|---------------|-------------------------------------|
| No Bluetooth device connected | Blue | Cycling as ON 200ms and OFF 200ms |
| Bluetooth device connected | Blue | Cycling as ON 1000ms and OFF 1000ms |
| Firmware upgrade is done | Green | Solid ON |

4. Parameter

| Model No. | DTU-BLE |
|------------------------------|----------------------|
| Rated input voltage | 12V |
| Input voltage range | 6~16V |
| Input current | 50mA |
| Average consumption current | 10mA |
| Default Bluetooth check code | 0000 |
| IP Rating | IP20 |
| Dimension | 58.2 x 43.2 x 14.0mm |

| | |
|---------------------|----------|
| Weight | 100g |
| Storage temperature | -30~80°C |
| Working temperature | -20~60°C |
| Altitude | 5000m |

5. Mobile APP access

DTU-BLE Bluetooth module is compatible with TBB's M lithium battery and other devices. Below please find access of M lithium battery mobile APP. For access of other TBB's product, please consult TBB sales or TBB's dealer.

TBB M lithium battery

1) Access in Google Play

https://play.google.com/store/apps/details?id=com.dtu.battery.dtu_battery

2) Access in Apple Store

<https://apps.apple.com/us/app/tbb-battery/id6475022851>



QR code for Google Play



QR code for Apple Store