

SOM-2532

Intel Atom® x6000, Pentium® and Celeron® x6000 Series Processor SMARC Module

NEW



Features

- Intel Atom® x6000, Pentium® and Celeron® x6000 Series processor
- SMARC2.1.1 pinout, small size
- Dual-CH LPDDR4 3200MT/s up to 16GB, support IB ECC
- Triple displays up to 4K2K (DP++, HDMI, LVDS/eDP/MIPI-DSI)
- Multiple I/O expansion: PCIe gen3, USB3.2 Gen2, USB2.0, SATA
- On board eMMC up to 64GB
- Supports iManager, Embedded Software APIs and Wise-DeviceOn

Software APIs:




Windows Embedded

iManager WISE-DeviceOn C E FC

Specifications

Form Factor	Form Factor	SMARC2.1.1				
	PCB Size	82 mm x 50 mm				
Processor System	CPU	Atom® X6425E	Atom® X6425RE	Atom® x6200FE	Celeron® J6413	Pentium® N6415
	Base Frequency	1.8 GHz	1.9 GHz	1.0 GHz	1.8 GHz	1.2 GHz
	Burst Frequency	3.0 GHz	N/A	N/A	3.0 GHz	3.0 GHz
	Cores	4	4	2	4	4
	Cache	1.5MB L2 Cache	1.5MB L2 Cache	1 MB L2 Cache	1.5MB L2 Cache	1.5MB L2 Cache
	CPU TDP	12W	12W	4.5W	10W	6.5W
	IB ECC	Yes	Yes	Yes	N/A	N/A
Memory	BIOS	AMI UEFI 256Mbit				
	Technology	LPDDR4	LPDDR4	LPDDR4	LPDDR4	LPDDR4
	Speed	3200	3200	3200	3200	3200
	ECC Support	IB ECC supported by Specific CPU SKUs				
	Max. Capacity	Max. 16GB				
	Channel / Socket	Dual channel / Memory down				
Graphics	Controller	Intel® UHD Graphics for 10th Gen Intel® Processors				
	Base Frequency	500MHz	400MHz	N/A	400MHz	350MHz
	Burst Frequency	750 MHz	N/A	N/A	800MHz	800MHz
	3D/HW Acceleration	OpenGL® 4.5, DirectX® 12, OpenCL® 1.2, Vulkan 1.1				
Display	LCD (LVDS/eDP/MIPI-DSI)	1 Port LVDS: 1920 x 1200 @ 60Hz/eDP: 4096 x 2160 @ 60Hz (Optional/MIPI-DSI)				
	DP++	1 Port (up to 4096 x 2160 @ 60 Hz)				
	HDMI	1 Port HDMI 1.4b: Up to 3840 x 2160 @ 30 Hz, DP 1.2: Up to 4096 x 2160 @ 60 Hz (Optional)				
	Multiple Display	Triple Simultaneous Independent Display				
Expansion	PCI Express x1 (Gen3)	4 PCIe1 (PCIe2 colay SERDES 1, PCIe3 colay SERDES 0 by BOM option)				
	Audio Interface	Intel HD Audio/ up to 2 I2S				
	eSPI	eSPI				
Serial Bus	SMBus	N/A				
	I2C Bus	Yes				
Ethernet	Gigabit	2 Ports I210 (10/100/1000BASE-T), Support TSN by specific SKUs				
I/O	SATA3.0	1 Port (6 Gbps)				
	USB3.2 (Gen2)	2 Ports (10 Gbps)				
	USB2.0	6 Ports (480 Mbps)				
	SPI Bus	Yes. For BIOS EEPROM and TPM				
	Onboard Storage	eMMC (Default 32GB, up to 64GB)				
	GPIO	14-bit				
	Watchdog	65536 level, 0 ~ 65535 sec				
	COM Port	4 Ports (2 Ports 4-wire / 2 Ports 2-wire)				
	TPM	Yes				
	CAN-FD	2 Ports (Only by Linux)				
	Smart Fan	N/A				
Power	Type	ATX/ATX: Vin				
	Supply Voltage	Vin: 4.75-5.25V, RTC Battery: 2.0V ~ 3.3V				
	Power Consumption (Max.)	TBD				
	Power Consumption (Idle)	TBD				
Environment	Operating Temperature	Standard: 0 ~ 60 °C (32 ~ 140 °F) Extend: -40 ~ 85 °C (-40 ~ 185 °F)				
	Storage Temperature	-40 ~ 85 °C (-40 ~ 185 °F)				
	Humidity	Operating: 40 °C @ 95% relative humidity, non-condensing Storage: 60 °C @ 95%relative humidity, non-condensing				
	Vibration Resistance	3.5 Grms				
Mechanical	Dimensions	82 mm x 50 mm				

Block Diagram

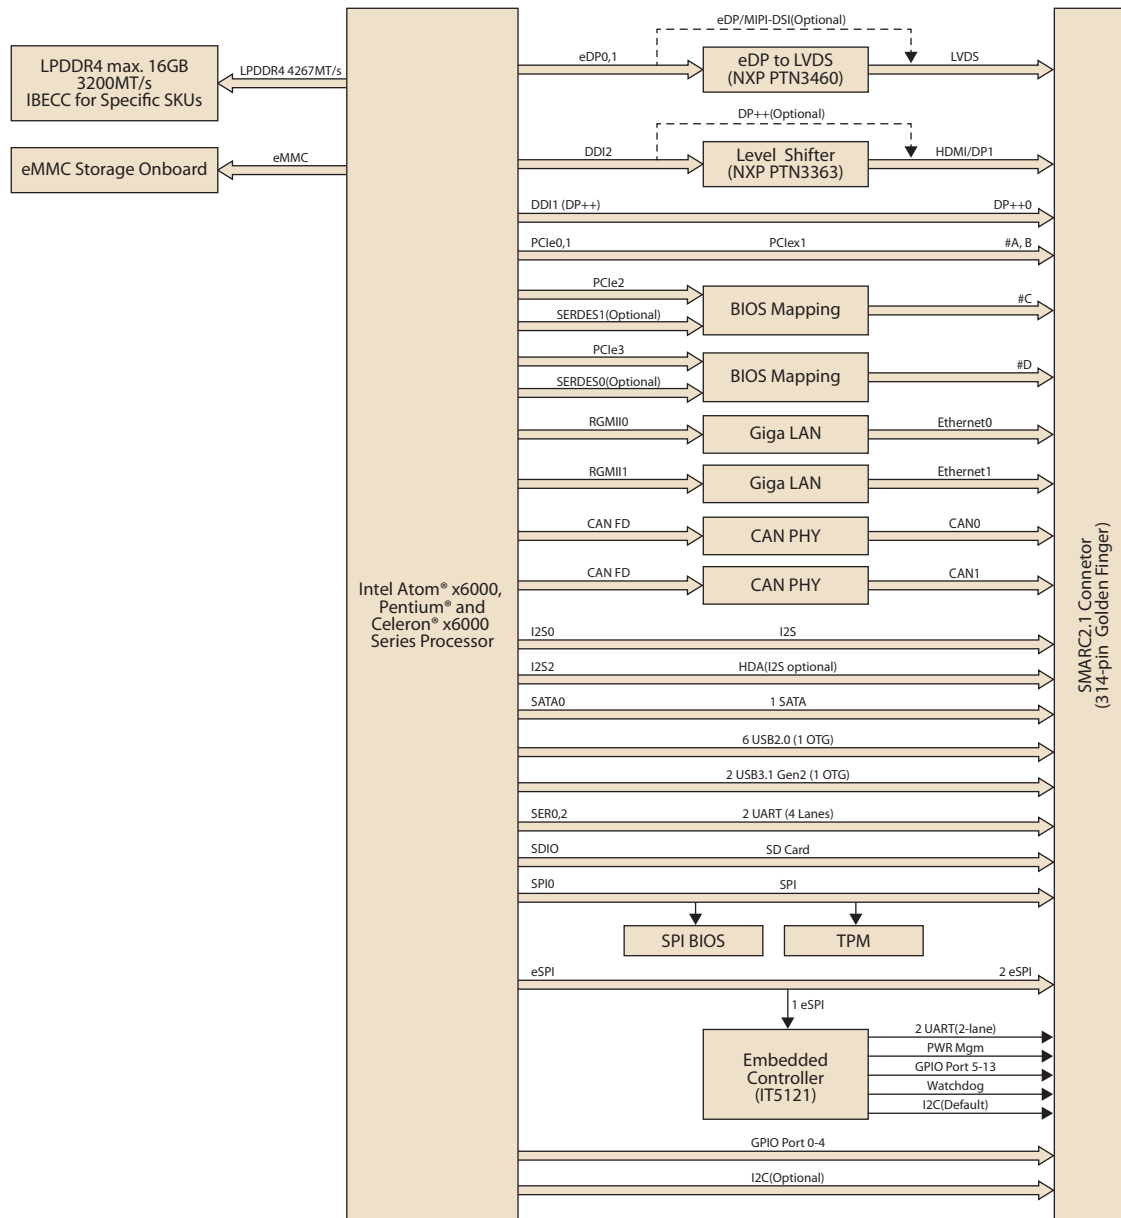

Ordering Information

Part No.	CPU	Core	Graphics	Base Freq.	Max. Boost Freq.	GFX HFM	GFX Burst Mode	CPU TDP	Onboard Memory	EMMC	IBECC	TCC	FUSA	Thermal solution	Operating Temp.
SOM-2532CCBX-S9A1	Atom® x6425RE	4	32EU	1.9GHz	N/A	400MHz	N/A	12W	8GB	32GB	Yes	Yes	No	Passive	-40 ~ 85 °C
SOM-2532DCBX-U0A1	Atom® x6425E	4	32EU	2.0GHz	3.0GHz	500MHz	750MHz	12W	16GB	32GB	Yes	No	No	Passive	-40 ~ 85 °C
SOM-2532CCBX-S5A1	Atom® x6413E	4	16EU	1.5GHz	3.0GHz	500MHz	750MHz	9W	8GB	32GB	Yes	No	No	Passive	-40 ~ 85 °C
SOM-2532CCBX-S3A1	Atom® X6211E	2	16EU	1.3GHz	3.0GHz	350MHz	750MHz	6W	8GB	32GB	Yes	No	No	Passive	-40 ~ 85 °C
SOM-2532BCBX-S0A1	Atom® x6200FE	2	N/A	1.0GHz	N/A	N/A	N/A	4.5W	4GB	32GB	Yes	Yes	Yes	Passive	-40 ~ 85 °C
SOM-2532CCBC-S9A1	Atom® x6425RE	4	32EU	1.9GHz	N/A	400MHz	N/A	12W	8GB	32GB	Yes	Yes	No	Passive	0 ~ 60 °C
SOM-2532DCBC-U0A1	Atom® x6425E	4	32EU	2.0GHz	3.0GHz	500MHz	750MHz	12W	16GB	32GB	Yes	No	No	Passive	0 ~ 60 °C
SOM-2532CCBC-U0A1	Atom® x6425E	4	32EU	2.0GHz	3.0GHz	500MHz	750MHz	12W	8GB	32GB	Yes	No	No	Passive	0 ~ 60 °C
SOM-2532CNBC-U0A1	Pentium® J6426	4	32EU	2.0GHz	3.0GHz	400MHz	850MHz	10W	8GB	32GB	No	No	No	Passive	0 ~ 60 °C
SOM-2532CCBC-S5A1	Atom® x6413E	4	16EU	1.5GHz	3.0GHz	500MHz	750MHz	9W	8GB	32GB	Yes	No	No	Passive	0 ~ 60 °C
SOM-2532CCBC-S3A1	Atom® X6211E	2	16EU	1.3GHz	3.0GHz	350MHz	750MHz	6W	8GB	32GB	Yes	No	No	Passive	0 ~ 60 °C
SOM-2532CNBC-S8A1	Celeron® J6413	4	16EU	1.8GHz	3.0GHz	400MHz	800MHz	10W	8GB	32GB	No	No	No	Passive	0 ~ 60 °C
SOM-2532CNBC-S2A1	Pentium® N6415	4	16EU	1.2GHz	3.0GHz	350MHz	800MHz	6.5W	8GB	32GB	No	No	No	Passive	0 ~ 60 °C
SOM-2532BCBC-S0A1	Atom® x6200FE	2	N/A	1.0GHz	N/A	N/A	N/A	4.5W	4GB	32GB	Yes	Yes	Yes	Passive	0 ~ 60 °C

*Any other SKUs or combination is project based support. Please contact sales for details.

Optional Accessories

Part No.	Description
TBD	Semi-Heatsink

Development Board

Part No.	Description
SOM-DB2500	SMARC Development Board, SMARC2.0 & 2.1 compliance

Packing List

Part No.	Description	Quantity
1970005009N001/ 1970005010N001	Heatspreader IHS/Heatspreader NON-I	1


Embedded OS

OS	Part No.	Description
Win10	TBD	TBD

Reliable Embedded BIOS Solutions

Custom BIOS services with long-term support

Advantech's high-quality embedded BIOS solutions deliver rapid execution and feature expert BIOS team support. These solutions feature multi-functional designs that ensure security and enable power/boot management. Advantech further provides 10+ years of BIOS version management, internal management, and longevity support for both hardware and BIOS — enhancing application efficiency, diversifying functionality, and optimizing performance.

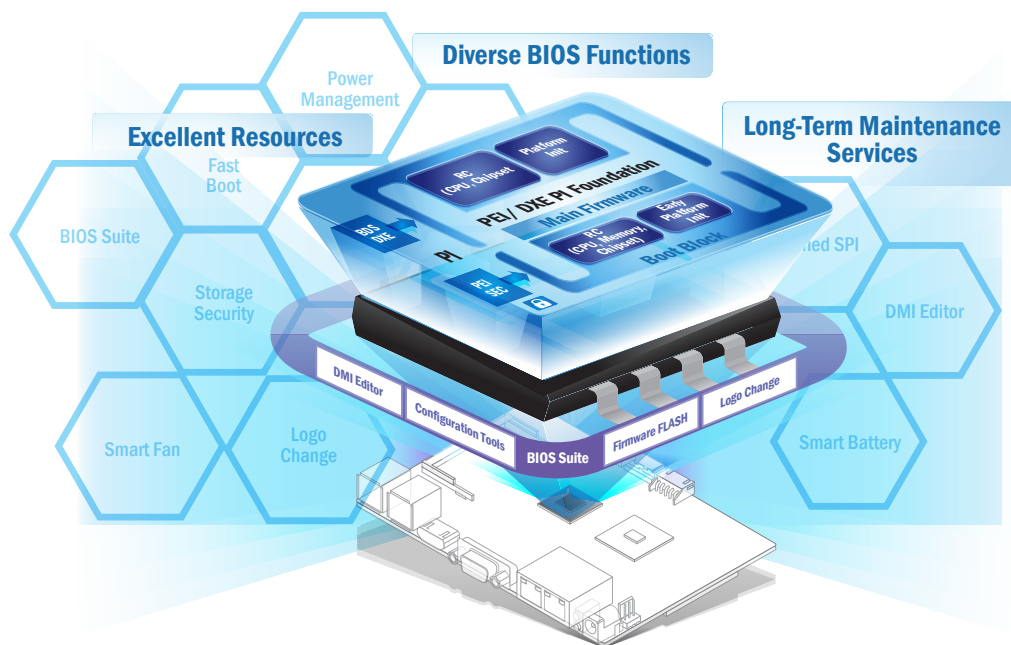

Embedded BIOS Solution Advantages

Sufficient Sources

- Strong partnership with BIOS vendors
- 50+ engineers with extensive industrial BIOS experience


Diverse BIOS Functions

- Multi-layer security
- 3 second fast boot
- Power management
- BIOS suite utility

Long-Term Maintenance Services

- Platform longevity support
- 10-year BIOS version control
- BIOS remote backup

Value-Added Customization Process

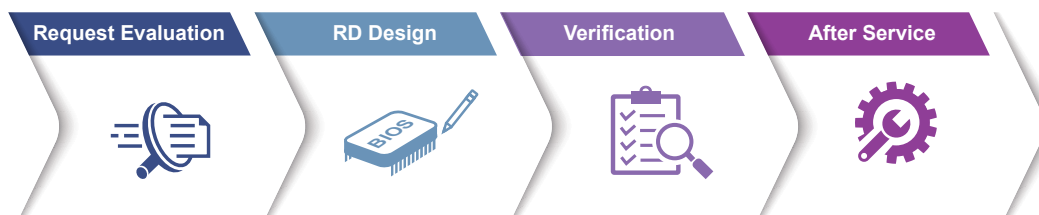

WISE-DeviceOn

Massive IoT Device Management Utility

IoT deployment and management typically involves numerous disparate devices installed on multiple sites. These devices require effective monitoring, managing, and tracking. Advantech's easy-to-use WISE-DeviceOn interface enables users to remotely monitor device health, troubleshoot problems, and send software/firmware updates over-the-air (OTA). In sum, DeviceOn empowers quick real-time responsiveness to emerging problems.



Features

Comprehensive Management	Remote Access	Efficient Operations
• Devices status • Peripherals/firmware • Open for extension	• Real-time monitoring • Remote controls • Troubleshooting	• Zero-touch on-boarding • OTA updates • Batch control

Product Highlights



SOM-6883

High-performance 11th Gen Intel® COMe Type 6 Module



MIO-5375

Compact 11th Gen Intel® Outdoor Focused 3.5" SBC



EPC-B5587

10th Gen Intel® Xeon® based Edge server



EPC-R3220

Arm based IoT Edge Gateway

Edge AI Suite

AI development for diverse application at the Edge

Increasing demand for AI inference/analytic capabilities at the Edge make AI training models, software development environments, and hardware configuration key factors in successful solution deployment. Advantech's Edge AI Suite helps users build AI demo devices quickly and choose optimal hardware solutions easily.



5x Performance Boost	All-in-one Installation	One Click AI Experience	Plug-and-play Environment	Discover Cost-effective Hardware
- Integrated Intel® OpenVINO™ technology - Boost AI using Advantech hardware	- Build AI environment in under 5 minutes - Ready-to-use configuration	- User friendly configuration guidance - One-click Benchmark acquisition	- Easy access to 100+ AI inference extensions - Software development package available	- Diverse CPU/RAM options - Find hardware solutions for AI development

Embedded Linux Support and Design-in Services

Hardware Certified Ubuntu and Yocto with Eco Partner Services

Linux is the most popular embedded OS for transportation, outdoor services, factory automation, and mission critical applications. Its open source and kernel reliability features ease security updates, and make it particularly adaptable to new AI and Edge computing technology. Advantech has cooperated with Canonical and other software partners to provide hardware certified Ubuntu image and Yocto BSP as Linux offerings. The Advantech, Embedded Linux, and Android Alliance (ELAA) delivers local software services and consultation.



Features

Certified OS and BSP	Licensed Services	Numerous AI and Edge Resources	Local Partner Alliance
- Platform compatibility tests - Preloaded functional driver and software stacks	- License authorized Canonical delivers 10-years of bug fixes and security updates - In-house bundled service	- Containerized technology for service provision and deployment - AI resources from Caffe, TensorFlow, and mxnet	Embedded Linux and Android Alliance (ELAA)