



PRODUCT GUIDE

DH 20-35-65-120

CONDENSATION DEHUMIDIFIERS FOR A WIDE RANGE OF COMMERCIAL AREAS
AND SWIMMING POOL BUILDINGS

DH 20



DH 20

The compact DH 20 condensation dehumidifier is designed to manage excess moisture in small commercial areas. It can remove up to 12.6 litres of moisture per day at 20°C and 60% relative humidity, effectively controlling humidity levels to prevent mould and mildew growth.

The wall-mounted unit has an easy-to-use control system that lets you set your desired humidity level. It features a durable aluminium housing with cataphoresis-painted coils for corrosion resistance as well as an electronic humidistat for precise control.




- Aluminium housing and cataphoresis painted coils for corrosion resistance
- Electronic humidistat for improved humidity control
- Designed for wall mounting
- Direct water drainage
- User-friendly dashboard
- Modern design
- Easy to install and use



DH 20

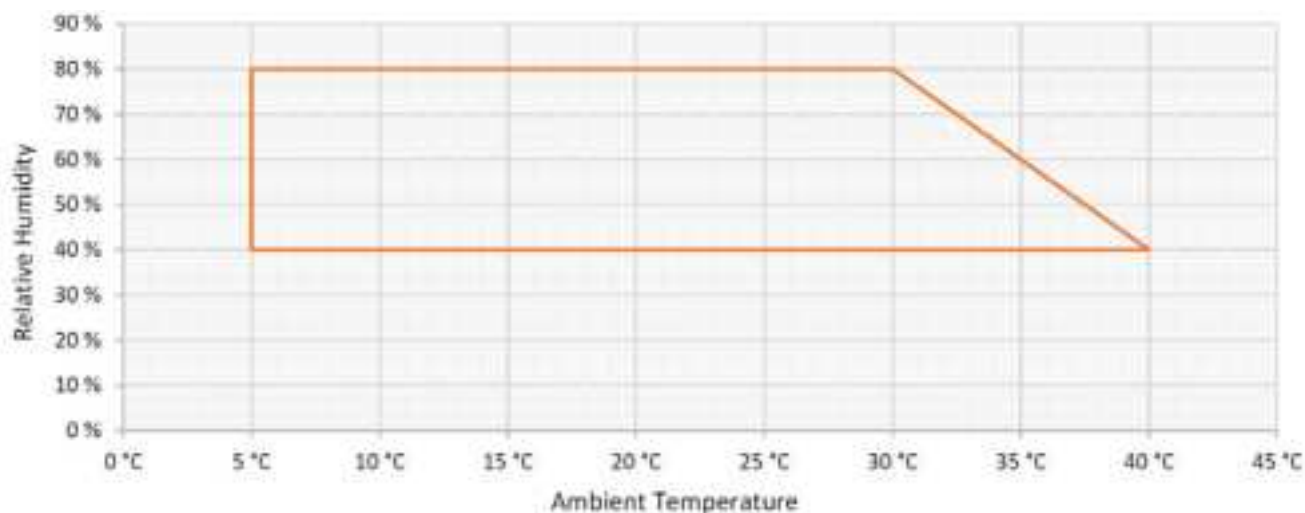

Operational range

Specifications	Units	DH 20
Operating temperature range	°C	5-40
Operating humidity range	%	40-80
Air flow	m ³ /h	375
Sound pressure level @ 1 m	dB(A)	48
Dehumidification capacity*	l/24h	18.4
Dehumidification capacity**	l/24h	12.6
Specific Energy Consumption*	kWh/l	0.66
Specific Energy Consumption**	kWh/l	0.82
R290C gas weight/CO ₂ equivalent	kg/t	0.15/0.0005
Power supply	V/Hz	230/1ph/50
Power consumption, max	kW	0.51
Current, max.	A	2.3
Product size (W x D x H)	mm	900 x 350 x 365
Weight	kg/t	33

*30°C/60% RH, **20°C/60% RH

DH 35-65



DH 35-65

The DH 35/65 condensation dehumidifiers are designed to manage excess moisture in swimming pool areas as well as commercial and industrial spaces. The wall-mounted units can remove up to 40,4 (DH 35) and 58,3 (DH 65) litres of moisture per day, effectively controlling humidity levels to prevent mould and mildew growth.

The dehumidifiers have been fitted with an easy-to-use control system that lets you set your desired humidity level. They feature a durable aluminium housing with cataphoresis-painted coils for corrosion resistance as well as an electronic humidistat for precise control. The factory-installed heating coil ensures a constant temperature within the room.




- Aluminium housing and cataphoresis painted coils for corrosion resistance
- Electronic humidistat for improved humidity control
- Factory fitted electrical and LPHW heating coils specified for 55°C water temperature
- Designed for wall mounting
- Direct water drainage
- User friendly dashboard
- Modern design
- Easy to install and use



DH 35

DH 65

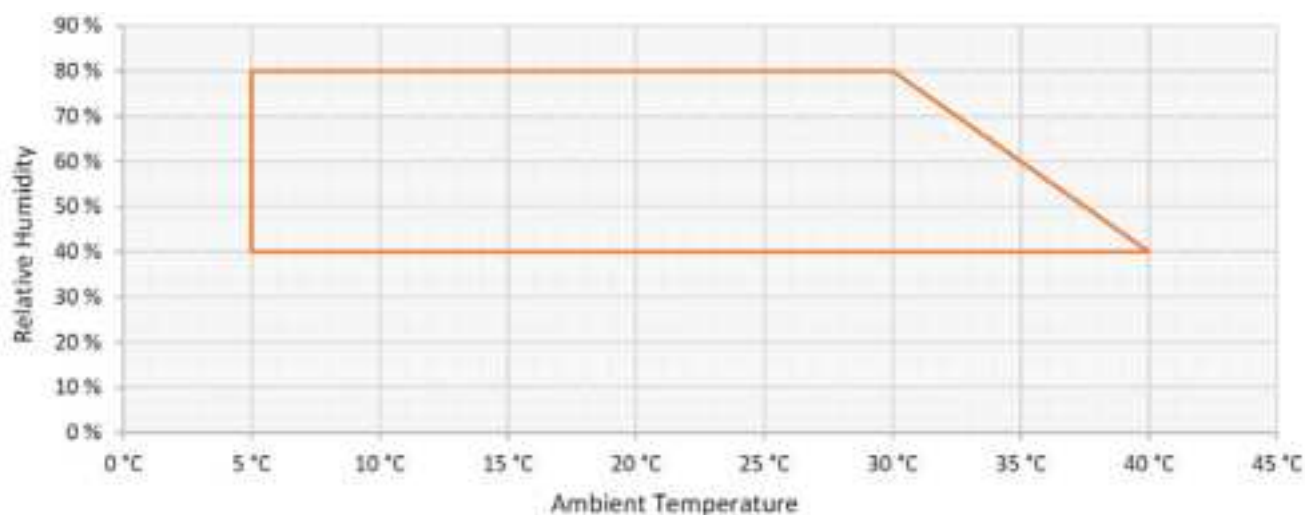

Operational range

Specifications	Units	DH 35	DH 65
Operating temperature range	°C	5-40	5-40
Operating humidity range	%	40-80	40-80
Air flow	m ³ /h	500	800
Sound pressure level @ 1 m	dB(A)	51	54
Dehumidification capacity*	l/24h	29.3	41.6
Dehumidification capacity**	l/24h	20.2	29.0
Dehumidification capacity***	l/24h	40.4	58.3
Specific Energy Consumption*	kWh/l	0.72	0.63
Specific Energy Consumption**	kWh/l	0.83	0.72
R454C gas weight/CO ₂ equivalent	kg/t	0.5/0.074	0.8/0.118
Power supply	V/Hz	230/1ph/50	230/1ph/50
Power consumption, max	kW	1.0	1.2
Current, max.	A	4.3	5.3
Product size (W x D x H)	mm	885 x 265 x 720	1306 x 265 x 720
Weight	kg/t	50	76

*30°C/60% RH, **20°C/60% RH ***30°C/80% RH

DH 120



DH 120


The DH 120 is a powerful condensation dehumidifier designed to manage excess moisture in swimming pool areas as well as commercial and industrial spaces. The floor-standing dehumidifier can remove up to 164.3 litres of moisture per day, effectively controlling humidity levels to prevent mould and mildew growth.


The dehumidifier has been fitted with an easy-to-use control system that lets you set your desired humidity level. It features a durable aluminium housing with cataphoresis-painted coils for corrosion resistance, an electronic humidistat for precise control, and the two fan speed modes Comfort and Boost.

The factory-installed low-pressure hot water heating coil is designed for water temperatures of 55°C.



- Aluminium housing and cataphoresis painted coils for corrosion resistance
- Electronic humidistat for improved humidity control
- Two fan speed modes – Comfort and Boost
- Factory-fitted LPHW heating coil specified for 55°C water temperature
- Designed as a floor-standing unit
- Direct water drainage
- User friendly dashboard
- Modern design
- Easy to install and use
- Modern design



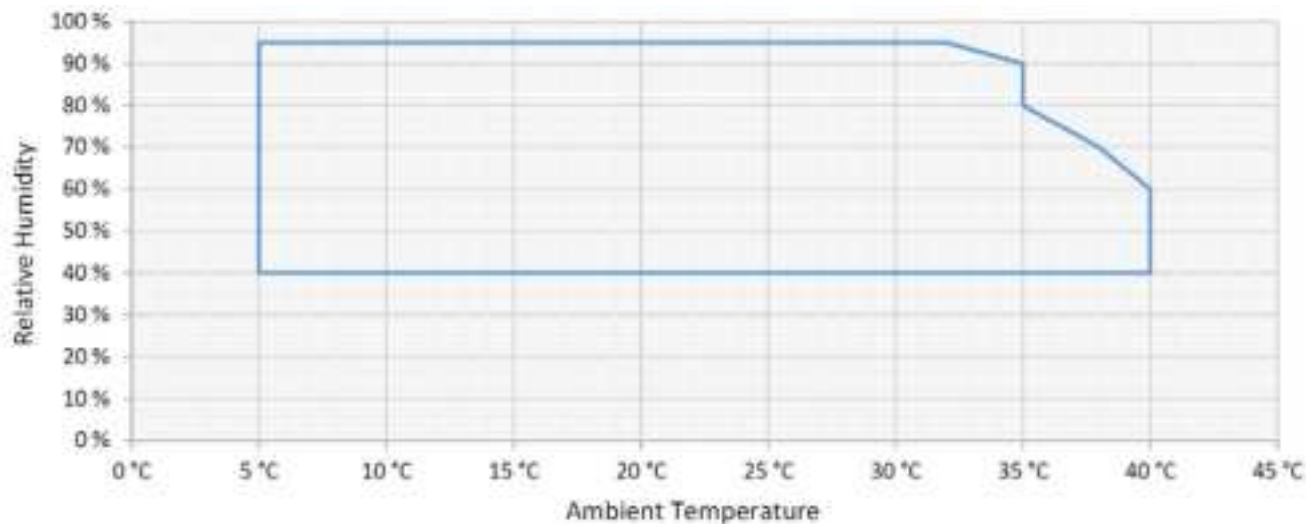
Operational range

Specifications	Units	DH 120
Operating temperature range	°C	5-40
Operating humidity range	%	40-95
Air flow (comfort / boost)	m ³ /h	800 / 1200
Sound pressure level @ 1 m	dB(A)	51 / 56
Dehumidification capacity*	l/24h	92.5
Dehumidification capacity**	l/24h	66.0
Dehumidification capacity***	l/24h	164.3
Specific Energy Consumption*	kWh/l	0.51
Specific Energy Consumption**	kWh/l	0.56
R454C gas weight/CO ₂ equivalent	kg/t	1.6/0.237
Power supply (incl. E plug and 3 m cable)	V/Hz	230/1ph/50
Power consumption, max	kW	2.6
Current, max.	A	11.7
Product size (W x D x H)	mm	1410 × 365 × 860
Weight	kg/t	130


*30°C/60% RH, **20°C/60% RH ***35°C/80% RH

Dehumidification capacity


DH 20

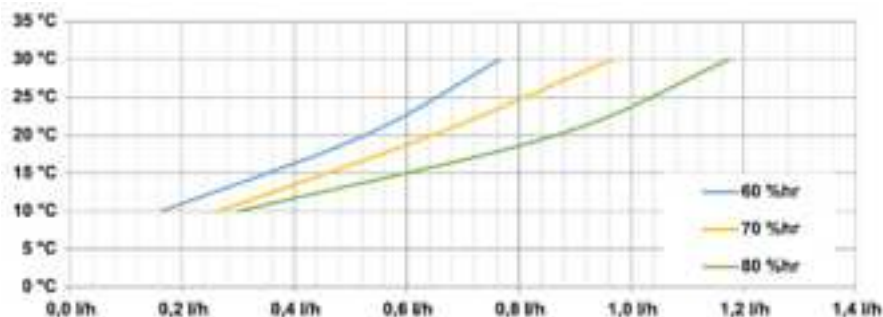

DH 35

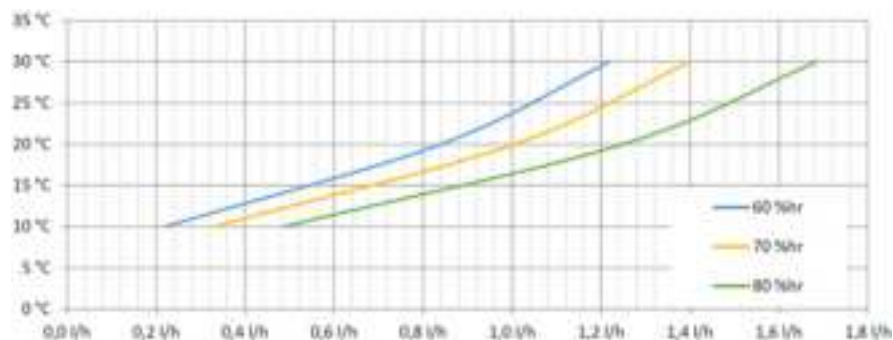


DH 65

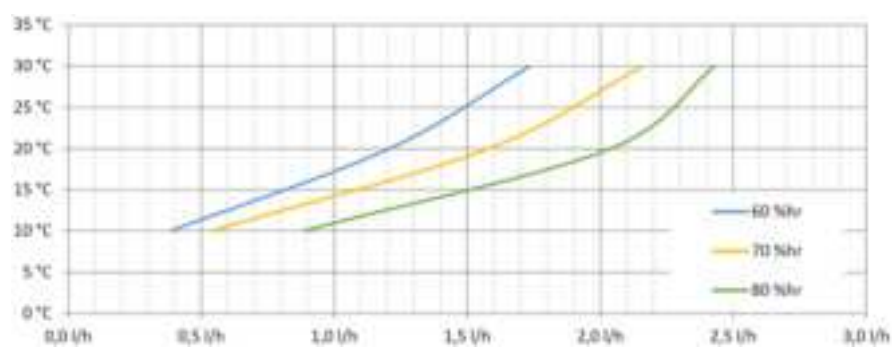






DH 120

"Comfort" mode

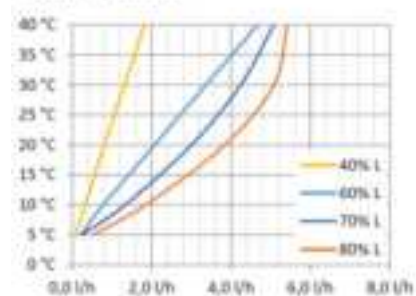

"Boost" mode

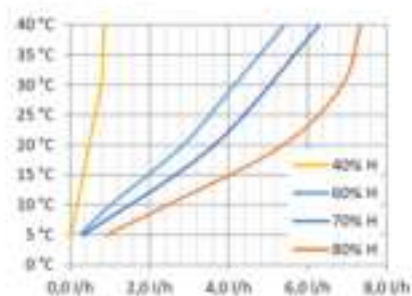

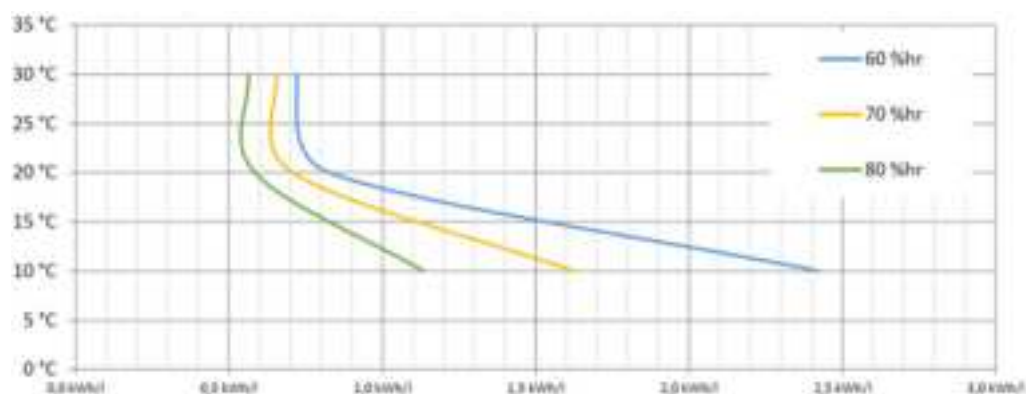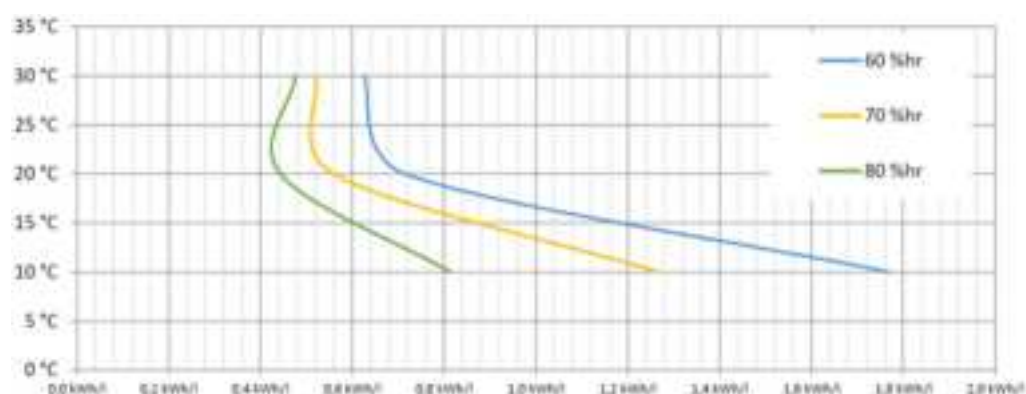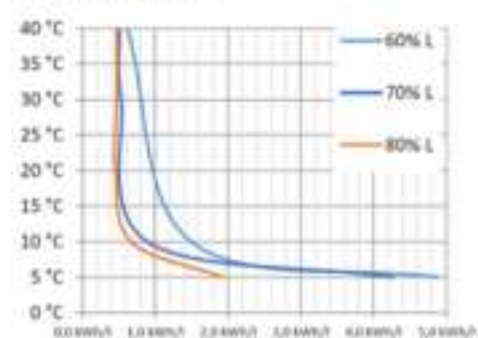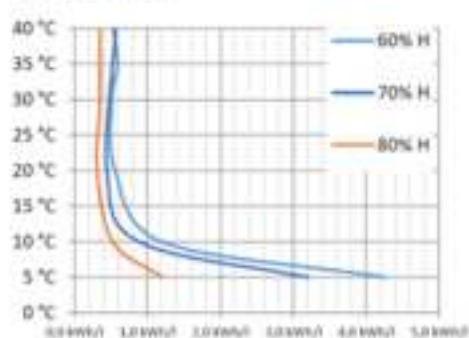Energy factor**DH 35****DH 65****DH 120****"Comfort" mode****"Boost" mode**

DENMARK

Dantherm Denmark A/S
DK-7800 Skive
+45 96 14 37 00
sales.dk@danthermgroup.com

GERMANY

Trotec GmbH
52525 Heinsberg
+49 2452 962-0
vertrieb.de@danthermgroup.com

FRANCE

Dantherm Group SAS
69694 Vénissieux Cedex
+33 4 78 47 11 11

67850 Herrlisheim
+33 3 90 29 48 18
sales.fr@danthermgroup.com

SPAIN

Dantherm Group SP SAU
28108 Alcobendas, Madrid
+34 91 661 45 00

46980 Paterna, Valencia
+34 961 524 866
sales.es@danthermgroup.com

UNITED KINGDOM

Dantherm Group Ltd
Maldon CM9 4XD
+44 (0)1621 856611
sales.uk@danthermgroup.com

ITALY

Dantherm Group S.p.A.
37010 Pastrengo (VR)
+39 045 6770533
sales.it@danthermgroup.com

POLAND

Dantherm Group Sp. z o.o.
62-023 Gądki
+48 61 65 44 000
sales.pl@danthermgroup.com

NORWAY

Dantherm Group AS
3138 Skallestad
+47 33 35 16 00
sales.no@danthermgroup.com

SWEDEN

Dantherm Group AB
602 13 Norrköping
+46 (0)11 19 30 40
sales.se@danthermgroup.com

SWITZERLAND

Dantherm Group AG
CH-5405 Baden Dättwil
+41 43 500 00 50
sales.ch@danthermgroup.com

Sales contact: