



ArmstrongFlooring™

Kingswood™ Australis
Hybrid Plank

Salted Gum

Kingswood™ Australis

Hybrid Plank

Kingswood™ Australis is a premium hybrid flooring collection featuring an extended 1.8m plank length ideal for open-plan interiors where scale and durability matter. With a robust 0.55mm commercial-grade wear layer, this flooring is made for busy interiors.

Crafted to complement a wide range of design aesthetics, this versatile range showcases Australian-inspired timber look designs that bring the warmth and texture of natural wood into any space, without the high maintenance thanks to the scratch and stain resistance properties.

Engineered for performance and style, Kingswood™ Australis is a low maintenance, highly durable solution that works hard while looking effortlessly elegant. This plank flooring is suitable for both residential and commercial environments, including homes, apartments, retail spaces, education facilities, healthcare and retirement living.

Features & Benefits



EASY CLEAN

Low maintenance properties make cleaning easier



SCRATCH RESISTANT

Protection so your floors look newer for longer



STAIN RESISTANT

For peace of mind for life's mishaps




ACOUSTIC BENEFITS

Helps absorb noise for a quieter space



HIGHLY DURABLE

Designed for foot traffic and offers longevity



WATERPROOF SURFACE

Ideal for spill prone areas such as kitchens*



A-LITE CORE

20% lighter than standard hybrid products



RESIDENTIAL WARRANTY

25-Year residential warranty^ Commercial warranty on request

*Subject to proper installation and care and maintenance as set out in the Armstrong Flooring Installation Instructions and Cleaning and Care Instructions.

^All warranties are in addition to any rights consumers may have under consumer laws. Terms and conditions apply-for full information in respect to the scope of the residential warranty, please see [AU website](#) or contact our Head Office. For the commercial warranty, contact your Armstrong Flooring representative.



Sanded Blackbutt

Kingswood™ Australis

Linen Gum


A soft natural hue that evokes a warm and organic feel with a refined look.



Kingswood™ Australis

Salted Gum

Offers a calm, mineral toned balance that brings a coastal yet timeless elegance.

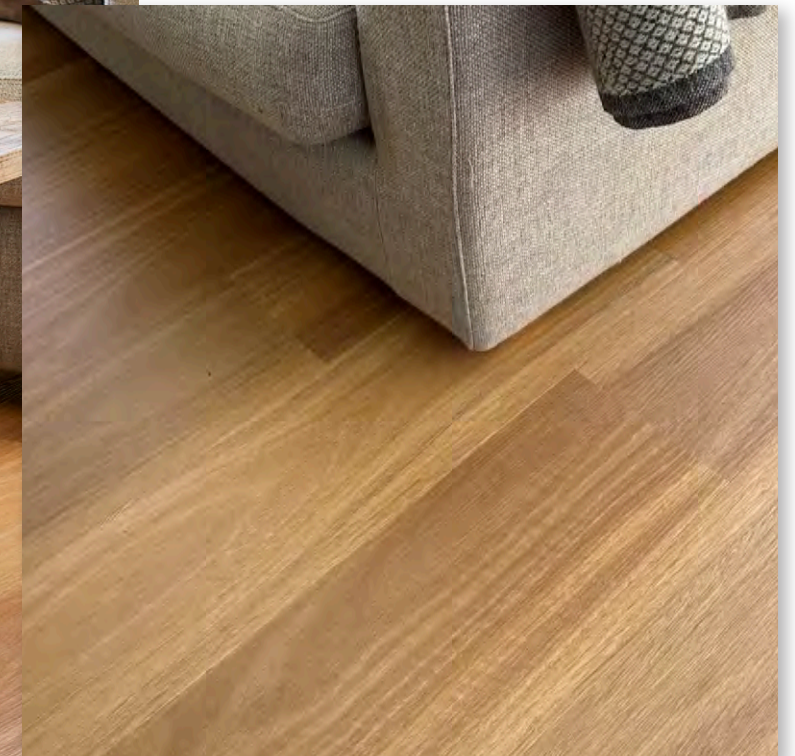

Kingswood™ Australis

Colour Palette

Plank size: 1830mm x 180mm x 6.5mm



Linen Gum

LRV 38.06



Somerset Blackbutt

LRV 33.67



Natural Blackbutt

LRV 36.39



Wormy Chestnut

LRV 24.53



Sanded Blackbutt

LRV 25.29



Salted Gum

LRV 24.14



Blackbutt Traditional

LRV 27.38



Silky Gum

LRV 20.52

Colour swatches and photographic images may vary between digital brochure to real life product and are to be used as a guide only. All colours will display a strong variation of colour from plank to plank – refer to our [Colour Variation Factsheet](#)
It is recommended you view the actual product in store - visit our [AU Store Locator](#)

Kingswood™ Australis

Colour Palette

Plank size: 1830mm x 180mm x 6.5mm



Spotted Gum Traditional

LRV 16.45



Ancient Gum

LRV 19.58

Colour swatches and photographic images may vary between digital brochure to real life product and are to be used as a guide only. All colours will display a strong variation of colour from plank to plank – refer to our [Colour Variation Factsheet](#). It is recommended you view the actual product in store - visit our [AU Store Locator](#)



Blackbutt Traditional

Kingswood™ Australis


Room Visualiser

Flooring is the foundation of any space and an element you want to get right. Our Room Visualiser tool will bring your vision to life and help make the decision-making process easier, all from the convenience of your desktop, mobile or tablet device.

Simply upload a photo of your space or select one of our pre-existing room scenes, and then choose the flooring colour you are interested in. Watch the space transform as you immerse yourself in the various flooring colours and design options.

Start designing today by clicking below.

GO TO VISUALISER

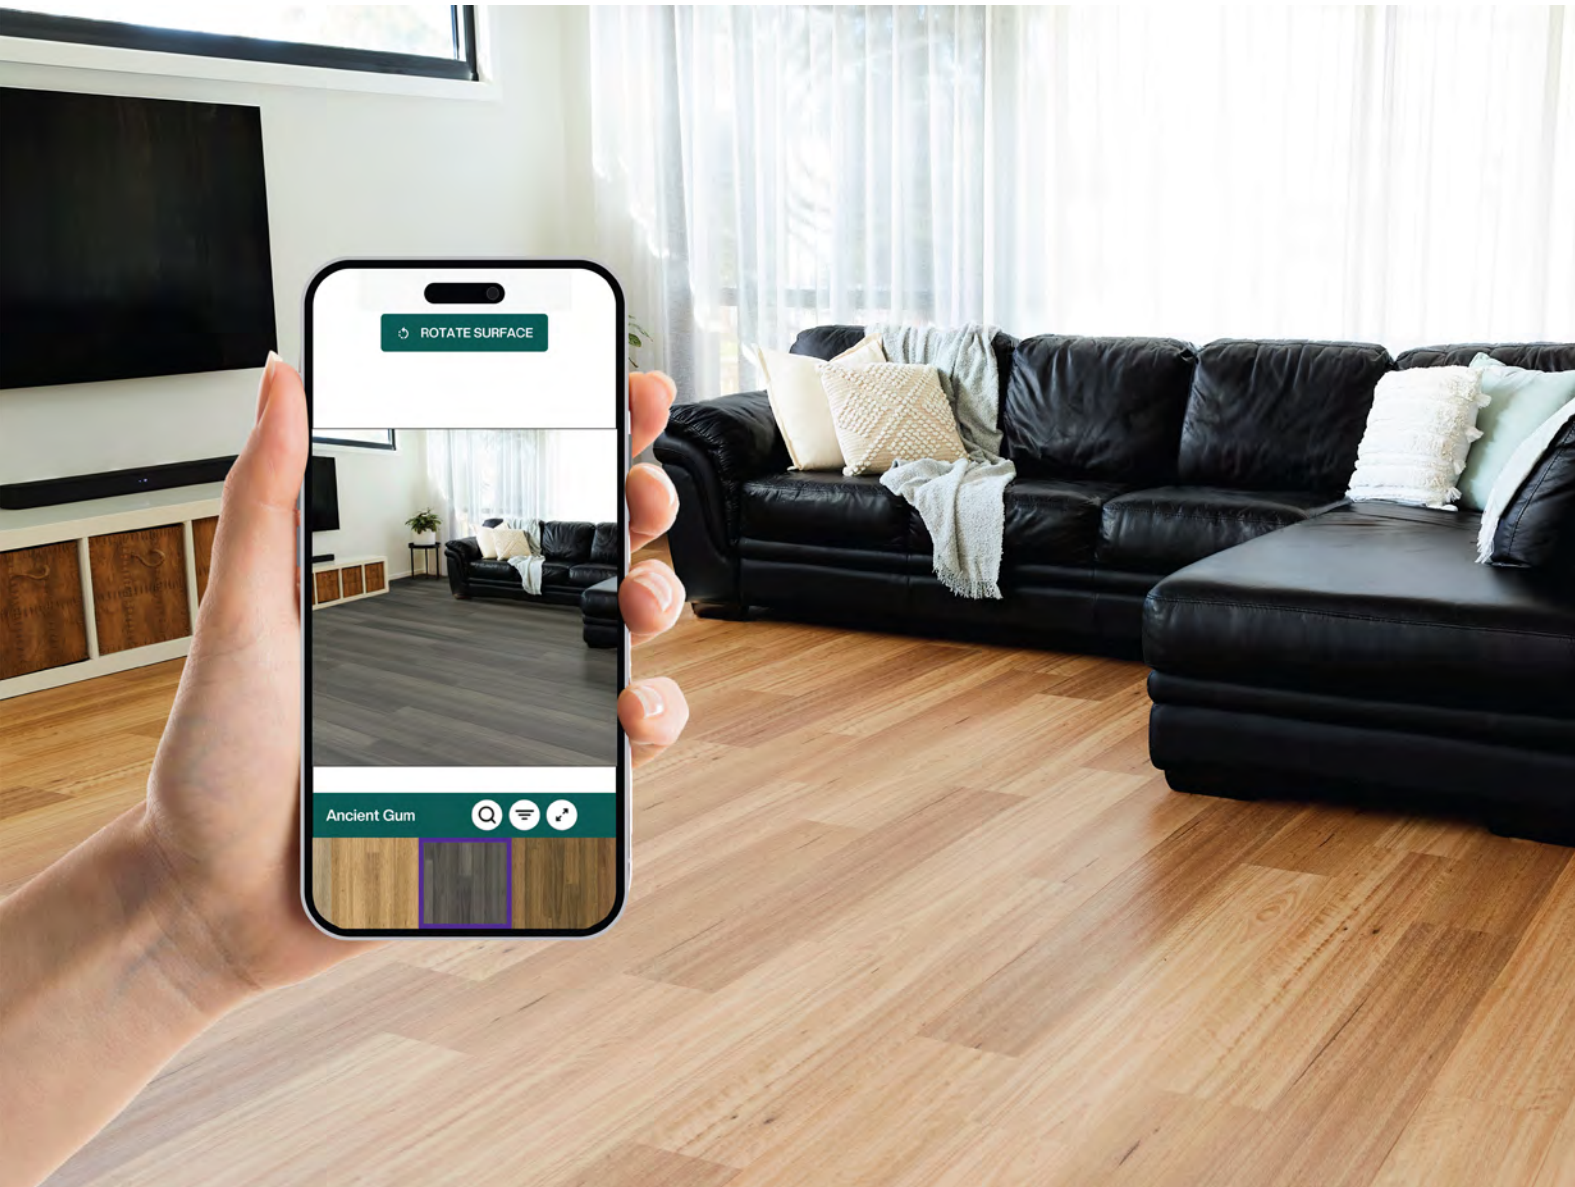

Kingswood™ Australis

Technical Data

Product Classification		
Type of floor covering		Hybrid flooring
Classification (Use Area)	ISO 10874	Domestic: 23 (Heavy) Commercial: 33 (Heavy)
Warranty*	Residential Commercial - available upon request	25 years 15 years
*All warranties are in addition to any rights consumers may have under Australian consumer laws. Terms and conditions apply - for full information in respect to the scope of the residential warranty, please see armstrongflooring.au or contact our Head Office. For the commercial warranty, contact your Armstrong Flooring representative.		

Physical Properties		
Surface Treatment		Cerashield® Surface Technology
Colours (Standard)		10
Overall thickness (mm)	ISO 24346	6.5
Wear layer (mm)	ISO 24340	0.55
Bevel		Micro
Core type		A-Lite Core Technology®
Locking system		Angle/Angle - Side Tap (Manufactured under license from Unilin BV)
Backing type		1.50mm XFD Acoustic Backing®
Dimensions (mm)	ISO 24342	1830 x 180
Planks/carton		6
m²/carton		1.98
m²/pallet		128.7
kg/carton		17.8

Installation		
To current AS/NZS 1884 and Armstrong Flooring Hybrid Installation Instructions		
Sustainability		
Global GreenTag		GreenRate Level A
TVOC Emissions		Compliant with Green Building Council low emitting VOC emission rates

Technical Performance		
Slip Resistance	AS 4586 Wet Pendulum (Appendix A)	P3
Fire Resistance (Floor)	AS ISO 9239-1 Critical Radiant Flux (CHF Value) Smoke Development Rate	≥ 4.5kW/m² ≤ 750%.min
Acoustic	ISO 10140-3 & ISO 717-2 Impact sound insulation	L _{n,w} = 40dB (150mm concrete with drop ceiling - 288mm cavity, 50mm glass wool insulation, 12mm gypsum board)
	ASTM E989-21 Impact insulation class	IIC = 70 (150mm concrete and drop ceiling - 288mm cavity, 50mm glass wool insulation, 12mm gypsum board)
	ISO 712-2 Improvement of impact sound insulation	ΔL _w = 20dB (200mm concrete slab)
Other		
Colour fastness	ISO 105-B02, Method 3	≥ 6

Accreditation		
Manufactured under accredited ISO 9001 quality, ISO 14001 environmental and ISO 45001 OHS management systems		

All specifications are current as at date of publication and may be changed without notice. For current and complete specifications please visit armstrongflooring.au
All Armstrong Flooring products must be installed in accordance with the relevant Australian applicable standards and the Armstrong Flooring Installation Instructions.
Variations may occur between samples, photographic images, and batches in terms of colour, shade, pattern or similar.



Learn more

www.armstrongflooring.au/australis



ArmstrongFlooring™

Australia

29-39 Mills Road, Braeside VIC 3195
1800 632 624
customerservices@armstrongflooring.au
www.armstrongflooring.au

New Zealand

39/332 Great North Road, Grey Lynn, Auckland 1021
0800 449 649
customerservices@armstrongflooring.co.nz
www.armstrongflooring.co.nz