

Job Name/Location:

Tag No.:

Date:

For: File Resubmit

PO No.:

Approval Other

Architect:

GC:

Engr:

Mech:

Rep:

(Company)

(Project Manager)

PREMTBB10

LG Standard III Black Wired Remote Controller



Electrical:

Power Supply 12VDC Power From Indoor Unit

Operating Environment:

Operating Temperature 32°F ~ 104°F (0°C ~ 40°C)
Storage Temperature -4°F ~ +140°F (-20°C ~ +60°C)
Humidity 0 ~ 90 % (RH)

Unit Data:

Dimensions 4-3/4" W x 4-3/4" H x 5/8" D
Mum Number of Indoor Units (per controller) 16
Maximum Number of Controllers (per Indoor Unit) 2

Standard Features:

- 4-5/16" Color Display
- Time Display
- Touch Button
- Operation On / Off Status LED

Basic Functions:

- Room Temperature and Humidity Sensing and Display
- Operation - On / Off
- Mode - Auto / Cool / Dry / Heat / Fan Only
- Ventilation Mode (For Ventilator Unit)
- Occupied Cooling and Heating Temperature Setpoint
- Unoccupied Cooling and Heating Setback Temperature Setpoint
- Fan Speed - Auto / Low / Med / High
- Discharge Vanes - Auto / Swing / Fixed
- Controller Lock Function
- Static Pressure Installer Setting
- Error Code Display During Unit or System Malfunction
- Auto Restart on Power Failure
- Manual Central Control Addressing

Advanced Functions:

- Time of Day Scheduling, Five (5) Events per Day with Control of Occupied / Unoccupied, On / Off, Mode, Setpoints, and Fan Speed
- Two Setpoint Autochangeover (For Heat Recovery Systems)
- Minimum Difference between Setpoints (0 ~ 10°) Adjustable Dead-band
- Home Leave Function for Temporary Unoccupied Status
- Sub-function Setting
- Comfort Level Display
- External Equipment Control via One (1) Digital Output
- Filter Sign Check and Initialization
- Time Limit Control (30 minutes ~ 540 minutes, 30 minute units)
- AP Mode Setting for LG Wi-Fi Modem Installation

Optional Accessories (Sold Separately):

- ☐ PZCWRC1 - 33-foot Extension Cable Assembly
- ☐ PZCWRG3 - Group Control Cable Kit

Must follow installation instructions in the applicable LG installation manual.

For continual product development, LG reserves the right to change specifications without notice.

© LG Electronics U.S.A., Inc., Englewood Cliffs, NJ. All rights reserved. "LG Life's Good" is a registered trademark of LG Corp. / www.lghvac.com

Connectivity:


LG Communications 1 Channel for V-Net,
Wi-Fi with ThinQ Capability

Communications Cable Specifications (V-Net):


Type Three (3) Conductor (Red: 12V, Yellow: Signal, Black: GND),
Stranded, Twisted, Unshielded
Size AWG 22-3
Length² Up to 164 feet

AWG - American Wire Gauge

Controller Screen and Buttons:

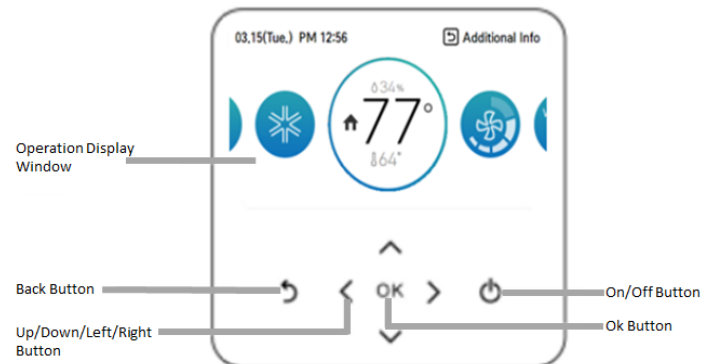

Dimensions:

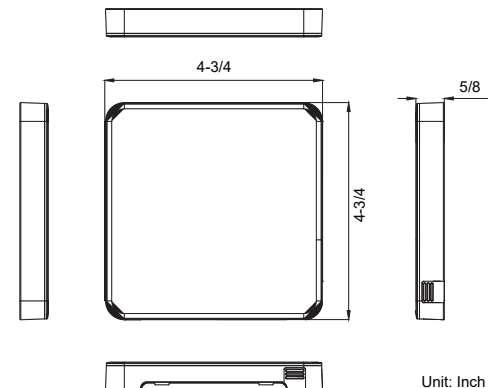

Unit: Inch

Notes:

1. Available functions / features may differ based on connected system.
2. Communication cable can be extended to a maximum of 164 feet, between controller and indoor unit, by using field-supplied wire or the Wired Remote Group Control Cable Assembly (PZCWRG3) or Wired Remote Extension Cable (PZCWRC1), maximum of four (4).
3. Must follow installation instructions in the applicable LG installation manual.
4. Centralized controller (AC Smart / ACP Series) and Premium PDI are required for energy target display function.

SB_Std_III_BlackWiredRemoteController_PREMTBB10_2022_11_03_090947