



DALS LIGHTING

Canada
80, de la Seigneurie blvd., E.
Blainville, Quebec J7C 4N1

U.S.A.
4383, NW 124th Ave.,
Coral Springs, Florida 33065

877.430.1818
info@dals.com
dals.com

MODEL LWB12-CC-V

NAME Brooklyn

12in Square Wall Sconce

The key design element of our new LED cylinder is the removable lens. This feature allows for three distinctive styles during installation.



PROJECT


TYPE

DATE

QTY

NOTES

LIGHT DISTRIBUTION

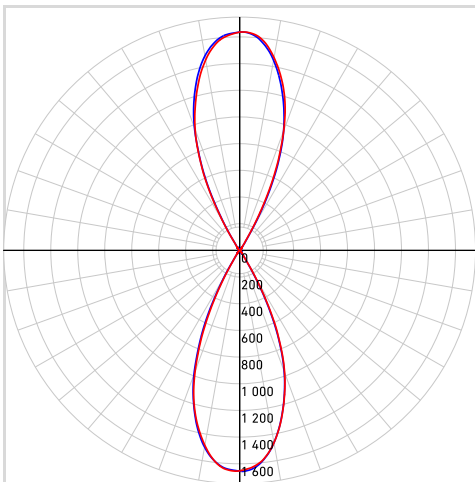

*Lumen output measured at 3000k

QUICK SPECS

Size	12"
Watts (W)	30
Delivered lumens*	1980
CRI	90
Voltage (v)	120/277/347
Beam angle (deg)	115
Mounting	Screwed in
Lifespan (hrs)	50 000
Binning	5 SCDM
LED model	COB
Light direction	up and downlight
Color temperature	2200K/2700K/3000K/3500K/4000K

ELECTRICAL DETAILS

Environment	Wet
Location	Indoor/Outdoor
Operating temp. (° C)	-30 to 40
IP rating	IP65
Input voltage (V)	120-347
Output voltage (V)	30-40
Output current (mA)	700
Power factor	90
Driver type	Constant current
THD	≤ 20%
Certifications	ETL, FCC, ICES, T24/JA8

ORDERING GUIDE

LEDWALL-B-CC-V

-

Finish

BK - Black



CONSTRUCTION

Lens material	Glass
Lens type	Frosted
Finish type	Powder coated
Housing material	Aluminum

