



Bathroom extract fans SILENT Series

Serial SILENT.

SILENT-200 CZ (220-240V 50) RE

Range of axial fans with low noise level, up to 26.5dB, flow rate up to 280 m³/h, built-in automatic shutter, operating pilot light, 230V-50Hz motor with ball bearings, mounted on silent-blocks to reduce vibrations and noise, IP45, electrical protection class II, and motor with integrated thermal protection to work at temperatures up to 40°C.


Electrical safety certification according to IEC 60335-1 & IEC 60335-2-80 issued by a notified body.

Possibility of choosing different colors of finishes.

High-quality ABS plastic.

Several versions available with adjustable timer, humidity sensor, or presence detector.

Possibility of 12V SILENT-100 versions: IP57, for safety zone 1



Technical data


Acoustic characteristics

Unfortunately an error occurred.

Technical characteristics

Unfortunately an error occurred.

Curves

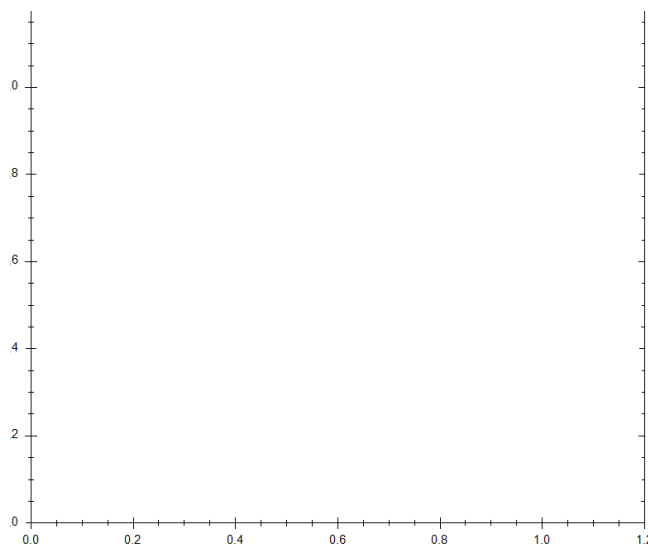

Dimensions

Unfortunately an error occurred.

Model Features

	CZ	CRZ	CRIZ	CHZ	CHZ VISUAL	CDZ	CZ 12V
PILOT LIGHT	•	•	•	•	•	•	•
BACKDRAFT SHUTTER	•	•	•	•	•	•	•
ADJUSTABLE RUN-ON-TIMER (1-30 MIN)		•		•	•	•	*
AUTOMATIC TIMER			•				
ADJUSTABLE HUMIDISTAT				•	•		
DETECTOR MOVEMENT						•	
BALL BEARINGS	•	•	•	•	•	•	•

ErP Information

Unfortunately an error occurred.