



Slide Compound Miter Saw LS0816F



LED job light with cut line guide function



Max cutting width:

305 mm

Max cutting height:

65 mm

LED job light with cut line guide function



LED job light casts a shadow of the saw blade onto the workpiece as an exact cutting line. By aligning the shadow with the ink line on the workpiece, you can make an exact cut.

Lever (for bevel angle)




Slide style sub fence (left side only)



Sub base
can be pulled out for more stable cutting of wide workpiece.

Carrying handle


Soft grip

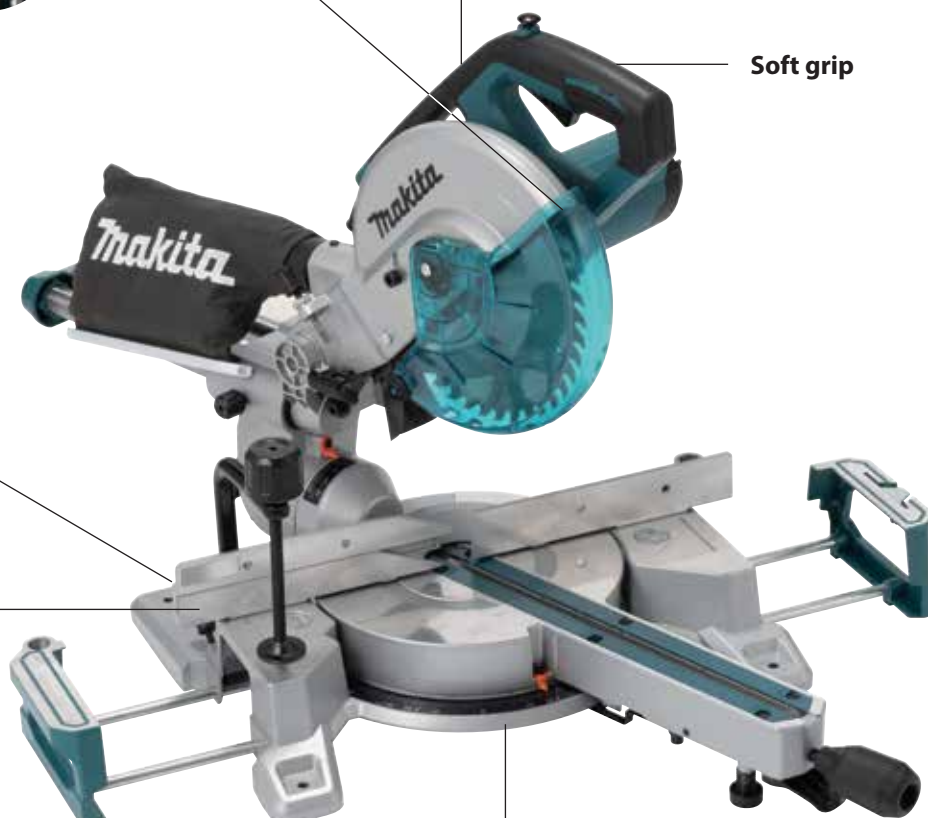

Miter range of 47° left and 47° right


Max. cutting capacity (height x width)

Cross Cut



65 x 305 mm
(2-9/16 x 12")


Miter Cut (left & right)



Miter 45°
left / right

65 x 215mm
(2-9/16 x 8-1/2")

Bevel Cut (left & right)




Miter 0°
Bevel 45° left

36 x 305mm
(1-7/16 x 12")

Miter 0°
Bevel 2° right

60 x 305mm
(2-3/8 x 12")

Compound Cut

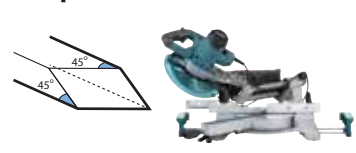


Miter 45° left / right
Bevel 45° left

36 x 215mm
(1-7/16 x 8-1/2")

Bevel range of 47° left and 2° right

Easy bevel angle change from 45° to 47° left and from 0° (right angle) to 2° right with simple operation of a push-button

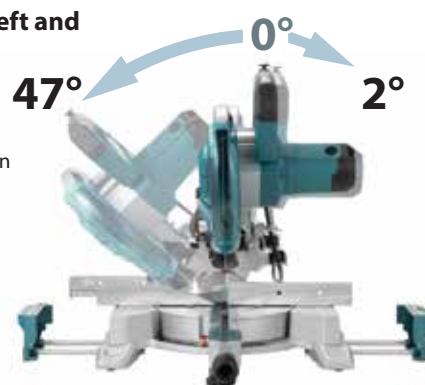

Slide Compound Miter Saw

LS0816F 216 mm (8-1/2")

	Double Insulation	Continuous rating Input	1,200W
	Dust Collection	Wheel diameter	216 mm (8-1/2")
	Built-in Job Light	Hole diameter	30 mm (1-3/16")
		Bevel angle	47° L 2° R
		Miter angle	47° L 47° R
		No load speed (RPM)	5,000
		Sound pressure level	91 dB (A)
		Sound power level	102 dB (A)
		Dimensions (L x W x H)	705 x 476 x 521 mm (27-3/4 x 18-3/4 x 20-1/2")
		Net weight	13.9 kg (30.6 lbs.)
		Power supply cord	2.0 m (6.6 ft)
Standard Equipment :		Dust bag (JM00000535), TCT saw blade 216X25.4X40 (D-77350), hex wrench 6mm (JM00000445).	

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table. Items of standard equipment and specifications may vary by country or area.

A4-092023-2

CÔNG TY TNHH MAKITA VIỆT NAM

Kho 4-5-6, Block 16, 18/12 Đường số 3, KCN VSP, P. Hòa Phú, TP. Thủ Đức, Bình Dương
ĐT: 0274 362 8338 - Fax: 0274 362 8339 - Website: www.makita.com.vn

CHI NHANH CTY TNHH MAKITA VN TẠI MIỀN BẮC
Khu 5, Số 1, Đường Số 6, KCN - DT - DV VSP Bắc Ninh, P. Phú Chấn,
TP. Từ Sơn, T. Bắc Ninh,
ĐT: 0222 376 5942 Fax: 0222 376 5941

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG
CHI NHANH HÀ NỘI
65 Trường Chinh, P. Phương Liệt, Q. Thanh Xuân, TP. Hà Nội,
ĐT: 0243 202 2585

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG
CHI NHANH ĐÀ NẴNG
Số 40, Đường Chi Lăng, P. Hải Châu, Q. Hải Châu, TP. Đà Nẵng
ĐT: 0236 352 5078 / 0236 352 5178 Fax: 0236 352 5479

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG
CHI NHANH CẦN THƠ
386 Võ Văn Kiệt, Khu Vực S, P. An Thới, Q. Bình Thủy,
TP. Cần Thơ,
ĐT: 0292 389 4358 Fax: 0292 389 4359

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG
CHI NHANH BÙN MA THUẬT
88 Lê Đức Thọ, P. Thống Nhất, TP. Bùn Ma Thuật, T. Bắc Lã,
ĐT: 0262 355 4556 Fax: 0262 355 4557

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG
CHI NHANH HẢI PHÒNG
Số 01 Lô OH-01, Dự án Hoàng Huy Riverside, P. Thượng Lý,
Q. Hồng Bàng, TP. Hải Phòng,
ĐT: 0225 883 1529

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG
CHI NHANH NHÀ TRANG
Lô 36/38 đường B6, Khu đô thị Vĩnh Diêm Trung, Xã Vĩnh Ngọc,
TP. Nhà Trảng, T. Khánh Hòa
ĐT: 0258 220 0039

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG
CHI NHANH HỒ CHÍ MINH
Số 12 Trịnh Văn Cấn, P. Cầu Ông Lãnh, Q. 1, TP. Hồ Chí Minh,
ĐT: 0283 821 5191