

Assembly Manual



What's In The Box

Please inspect the contents of your shipped package to ensure you have received everything that is listed below.



Flowline Master with Pro Vest



Bag Packing

All rights reserved.

No part of this document may be reproduced, stored in a retrieval system, or transmitted by any form or by any means, electronic, mechanical, photo-copying, recording, or otherwise, except as may be expressly permitted by the applicable copyright statutes or in writing by the Publisher.

Flycam Flowline Master





Flycam Flowline Master Setup

NOTE: It is recommended to attach the minimum required weight (4kg / 9lb) for pulling down the balancing rope to ensure proper operation of your Flycam Flowline system.

NOTE: Using **Placid (FLCM-FLN-PLA)** or **Edge V1 (FLCM-EDGE-V1)** with this Flowline model will impact the minimum and maximum payload capacities.

Support Bar Assembly

- Join support bar with body support by push-fit technique.

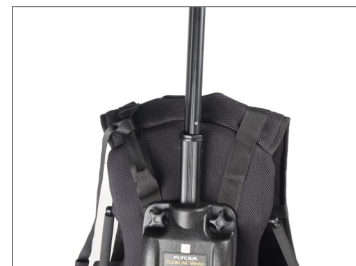


- Now your jacket is ready to use.



Support Bar Height Adjustment

- Loosen all four Adjustment Knobs provided on the back of Support Jacket.
- Then, adjust the height (Upward/Downward) of the Support Bar.

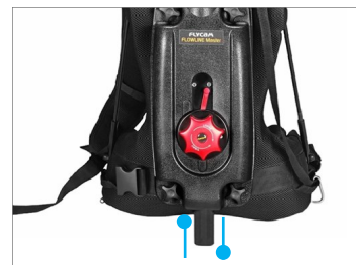

- Once the support bar is at a desired height re-tighten all four Adjustment Knobs to secure it.



Height Adjustable Support Bar




Side Support Adjustment

- Rotate the side support rod 360° for adjust the body support fitment.



- Loosen or tighten the side support as per your requirement.

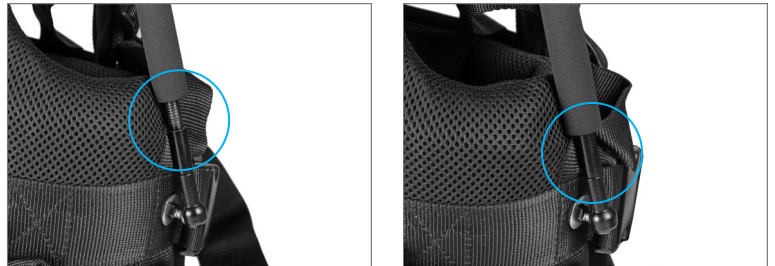

- Put on the support jacket and tighten the buckles provided at the waist and chest.



- Then, adjust the jacket as per your convenience.



Camera Mounting

- Attach the Camera (Not Included) to the hook and tighten using the provided knob to ensure a slip-free connection.





NOTE: It is recommended to attach the minimum required weight (4kg / 9lb) for pulling down the balancing rope to ensure proper operation of your Flycam Flowline system.



- Through the balance adjustment Knob, you can adjust the balance anti-clockwise according to the weight of your setup.

CAUTION: Do not release the lever without removing the setup. It may result in severe damage to the camera.

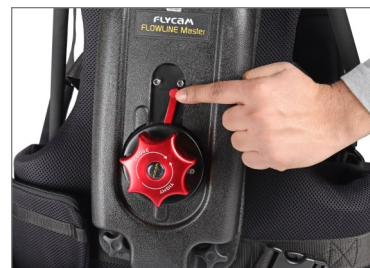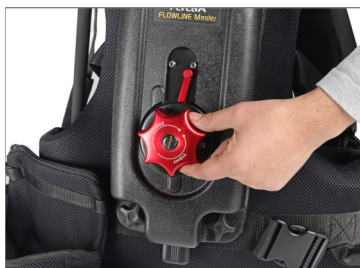

NOTE: By sliding the knob front or back you can adjust the position of camera.



YOUR FLYCAM FLOWLINE MASTER FOR CAMERA GIMBALS ALL DRESSED UP AND READY TO GO!



(SHOWN WITH OPTIONAL ACCESSORIES)

Warranty: We offer a one-year warranty on our products from the date of purchase. During this period, we will repair the product free of charge for labor or parts. The warranty does **not** cover transportation costs or products that have been misused or accidentally damaged. All warranty repairs are subject to inspection and evaluation by our team.

Liability: We are not liable for any damage caused by third-party products, mishandling during transit, accidents, misuse, neglect, or unauthorized servicing of the product.

Contact Us: In case of any dissatisfaction, please contact us immediately. We are committed to providing the utmost support and care to ensure your satisfaction with our product.