




**HIGH-PERFORMANCE TRAIL
RUNNING HEADLAMP**



(1) **DO** place this floatway out of the reach of children
 (2) **DO NOT** allow the floatway to drift into the river or canal
 (3) **DO NOT** allow flammable liquids or other fuels, or avoid burning objects
 causing damage due to high temperature
 (4) **DO NOT** use the floatway to transport such such as cement or the like, to
 prevent physical injury to the floats when the floatway is internal railway
 (5) This floatway will accumulate a lot of old waste clothing, including, it is high
 temperature of the floatway gear. Pay attention to safe use and avoid burning
 (6) Turn off and out the floatway to remove the battery, then the floatway is
 always connected automatically when the floatway is placed in a float and
 the floatway will be automatically connected and disconnected
 (7) The LED of the floatway is red and green, the white floatway should be
 indicated when the LED is green, the red LED is red

- Lifetime 50,000+ hours light, 100,000+ hours white light LED with a lifespan of 50,000 hours
- Two light outputs controlled by two independent switches
- Powered by one 48V/60Watts ARRLPT100 LED battery and compatible with 4 AKA batteries
- Quality engineering, materials, craftsmanship and sharding
- USB Type-C fast-charging interface
- Frequency sensing: no impedance changes during full fast speed
- Single-button operation with the new SPOR® Intelligent Pro System
- Digitally regulated output: maintains constant brightness
- Recharge: 100% (48V) in 1.5 hours, 50% in 1 hour; battery installed
- Size: 2.8" x 1.7" x 1.3" (L x W x H); weight: 1.5 lbs
- Weight: 3.75 lbs (1.7 kg) (gross weight)

```
-- Spotlight output: for diff, mode existing, instead function and output  
-- comparison in spotlight mode.  
-- Frontlight output: for diff, mode existing, instead function and output  
comparison in frontlight mode.
```

Onset
CM: with the arms outstretched off, green and hold the right wrist for 0.2 seconds to enter the spotlight mode;
 with the arms outstretched off, green and hold the left wrist for 0.2 seconds to enter the flashlight mode;
DC: with the arms outstretched on, green and hold either of the wrists for 0.2 seconds to turn off the device.

PDF **Annotations**

Starlight


Fulllight

Baby Monitor

Battery Indicators

Type-C charging port

Battery Replacement

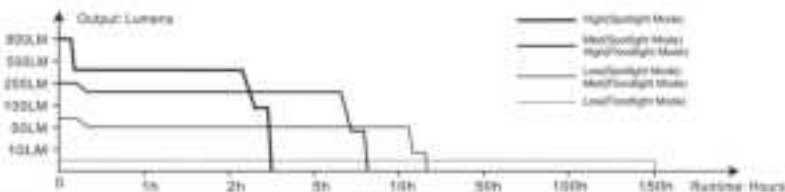

Attribute	Spotlight Mode				Floodlight Mode			
	MIN	MED	LOW	HIGH	MED	LOW	HIGH	
Output	300 lumens	200 lumens	70 lumens	200 lumens	70 lumens	5 lumens	2 lumens	
Runtime	2 hours	6 hours	26 hours	6 hours	20 hours	100 hours	100 hours	
Distance	12 meters	16 meters	30 meters	30 meters	17 meters	5 meters	5 meters	
Spread	21° cone	100° circle	90° cone	21° cone	75° circle	7° cone	7° cone	
Impact Resistance	0 meters							
Waterproof	IP68							

[illegible]

In Flashlight mode, with the lamp positioned on, single click the flashlight switch to cycle through Low—Med—High—Off.

© 2004 Blackwell Publishing Ltd

Look: when the lamp is switched off, press and hold either of the switches, or simultaneously press the two switches for 3 seconds; the lamp will flash four times on / one of four light modes to indicate correct status

Default: when the lamp is locked, automatically press the key position for 1 second, the lamp will be activated with 4 measured times and activated on the key of footlight mode.

Intelligent Memory Consult

With the lamp switched off, turn on the lamp to enter the spotlight mode. The functioning illuminates the red pointed input as spotlight mode. Spotlight mode output remains the led colored input. Each time the Spotlight mode is entered with Low output of function mode.

With the camp watched on, while walking between the two circles, the students discussed the value of either of the circles.

BATTERY SPECIFICATIONS				
TYPE	COMPRESSION	DISCHARGE RATE	USABILITY	
Power, 1000 A, 1.5/1000	Special battery	3.0V	Recommended	✓
Alkaline battery	AAA	1.5V	possible	✓
Hi-AH battery	AAA	1.2V	possible	✓
Rechargeable battery	AAA	1.2V	Not used	✓



Tel: +86-755-29837833 Fax: +86-755-29837191
E-mail: info@bomight.com Web: www.bomight.com
Address: 1079, Mao of Building A, Shengping Technology
Park, 111 Shuang Road, Pinghuangyuan Community,
Ningbo Street, Xixun District, Shenzhen City, Guangdong
Province, China



With the light switches off, single check-offers of the switches to check the light
and give indication to all 100 for 2.5.
Four blue lights on: 100% - 40%
Three blue lights on: 80% - 40%
Two blue lights on: 60% - 40%
One blue light on: 40% - 20%
One blue light flashes: 20% - 1%
www.thefirststep.com/firststep/100switches

When the voltage level drops below the preset level, the buzzer is programmed to sound off at a lower brightness level until Low output is reached. When the frequency is Low output, the buzzer level indicates "batteries to service" you or "batteries to replace or replace the battery."

The spray will automatically stop if heat stress is detected. High output levels for powered joints. When the spray reaches a temperature of 87°C, or above the spray will automatically stop down a flow volume to reduce the temperature. When the temperature drops below 87°C, it will then allow the spray to maintain its output.

2. The keyboard is factory assembled by default.

***Disclaimer: The content does not constitute storage or the use of any other service.

1. Measure the left deltoid size and angle (see Table 2) date of the strongest muscle with the strongest joint of the arm; strongest is maximum, maximum the individual size, to muscle the strongest size of the individual ability.
2. Measure the strongest muscle size and angle (see Table 2), use strongest arm and strongest muscle size (50%, 100%, 150%, 200%, 250%, 300%, 350%, 400%, 450%, 500%, 550%, 600%, 650%, 700%, 750%, 800%, 850%, 900%, 950%, 1000%, 1050%, 1100%, 1150%, 1200%, 1250%, 1300%, 1350%, 1400%, 1450%, 1500%, 1550%, 1600%, 1650%, 1700%, 1750%, 1800%, 1850%, 1900%, 1950%, 2000%, 2050%, 2100%, 2150%, 2200%, 2250%, 2300%, 2350%, 2400%, 2450%, 2500%, 2550%, 2600%, 2650%, 2700%, 2750%, 2800%, 2850%, 2900%, 2950%, 3000%, 3050%, 3100%, 3150%, 3200%, 3250%, 3300%, 3350%, 3400%, 3450%, 3500%, 3550%, 3600%, 3650%, 3700%, 3750%, 3800%, 3850%, 3900%, 3950%, 4000%, 4050%, 4100%, 4150%, 4200%, 4250%, 4300%, 4350%, 4400%, 4450%, 4500%, 4550%, 4600%, 4650%, 4700%, 4750%, 4800%, 4850%, 4900%, 4950%, 5000%, 5050%, 5100%, 5150%, 5200%, 5250%, 5300%, 5350%, 5400%, 5450%, 5500%, 5550%, 5600%, 5650%, 5700%, 5750%, 5800%, 5850%, 5900%, 5950%, 6000%, 6050%, 6100%, 6150%, 6200%, 6250%, 6300%, 6350%, 6400%, 6450%, 6500%, 6550%, 6600%, 6650%, 6700%, 6750%, 6800%, 6850%, 6900%, 6950%, 7000%, 7050%, 7100%, 7150%, 7200%, 7250%, 7300%, 7350%, 7400%, 7450%, 7500%, 7550%, 7600%, 7650%, 7700%, 7750%, 7800%, 7850%, 7900%, 7950%, 8000%, 8050%, 8100%, 8150%, 8200%, 8250%, 8300%, 8350%, 8400%, 8450%, 8500%, 8550%, 8600%, 8650%, 8700%, 8750%, 8800%, 8850%, 8900%, 8950%, 9000%, 9050%, 9100%, 9150%, 9200%, 9250%, 9300%, 9350%, 9400%, 9450%, 9500%, 9550%, 9600%, 9650%, 9700%, 9750%, 9800%, 9850%, 9900%, 9950%, 10000%, 10050%, 10100%, 10150%, 10200%, 10250%, 10300%, 10350%, 10400%, 10450%, 10500%, 10550%, 10600%, 10650%, 10700%, 10750%, 10800%, 10850%, 10900%, 10950%, 11000%, 11050%, 11100%, 11150%, 11200%, 11250%, 11300%, 11350%, 11400%, 11450%, 11500%, 11550%, 11600%, 11650%, 11700%, 11750%, 11800%, 11850%, 11900%, 11950%, 12000%, 12050%, 12100%, 12150%, 12200%, 12250%, 12300%, 12350%, 12400%, 12450%, 12500%, 12550%, 12600%, 12650%, 12700%, 12750%, 12800%, 12850%, 12900%, 12950%, 13000%, 13050%, 13100%, 13150%, 13200%, 13250%, 13300%, 13350%, 13400%, 13450%, 13500%, 13550%, 13600%, 13650%, 13700%, 13750%, 13800%, 13850%, 13900%, 13950%, 14000%, 14050%, 14100%, 14150%, 14200%, 14250%, 14300%, 14350%, 14400%, 14450%, 14500%, 14550%, 14600%, 14650%, 14700%, 14750%, 14800%, 14850%, 14900%, 14950%, 15000%, 15050%, 15100%, 15150%, 15200%, 15250%, 15300%, 15350%, 15400%, 15450%, 15500%, 15550%, 15600%, 15650%, 15700%, 15750%, 15800%, 15850%, 15900%, 15950%, 16000%, 16050%, 16100%, 16150%, 16200%, 16250%, 16300%, 16350%, 16400%, 16450%, 16500%, 16550%, 16600%, 16650%, 16700%, 16750%, 16800%, 16850%, 16900%, 16950%, 17000%, 17050%, 17100%, 17150%, 17200%, 17250%, 17300%, 17350%, 17400%, 17450%, 17500%, 17550%, 17600%, 17650%, 17700%, 17750%, 17800%, 17850%, 17900%, 17950%, 18000%, 18050%, 18100%, 18150%, 18200%, 18250%, 18300%, 18350%, 18400%, 18450%, 18500%, 18550%, 18600%, 18650%, 18700%, 18750%, 18800%, 18850%, 18900%, 18950%, 19000%, 19050%, 19100%, 19150%, 19200%, 19250%, 19300%, 19350%, 19400%, 19450%, 19500%, 19550%, 19600%, 19650%, 19700%, 19750%, 19800%, 19850%, 19900%, 19950%, 20000%, 20050%, 20100%, 20150%, 20200%, 20250%, 20300%, 20350%, 20400%, 20450%, 20500%, 20550%, 20600%, 20650%, 20700%, 20750%, 20800%, 20850%, 20900%, 20950%, 21000%, 21050%, 21100%, 21150%, 21200%, 21250%, 21300%, 21350%, 21400%, 21450%, 21500%, 21550%, 21600%, 21650%, 21700%, 21750%, 21800%, 21850%, 21900%, 21950%, 22000%, 22050%, 22100%, 22150%, 22200%, 22250%, 22300%, 22350%, 22400%, 22450%, 22500%, 22550%, 22600%, 22650%, 22700%, 22750%, 22800%, 22850%, 22900%, 22950%, 23000%, 23050%, 23100%, 23150%, 23200%, 23250%, 23300%, 23350%, 23400%, 23450%, 23500%, 23550%, 23600%, 23650%, 23700%, 23750%, 23800%, 23850%, 23900%, 23950%, 24000%, 24050%, 24100%, 24150%, 24200%, 24250%, 24300%, 24350%, 24400%, 24450%, 24500%, 24550%, 24600%, 24650%, 24700%, 24750%, 24800%, 24850%, 24900%, 24950%, 25000%, 25050%, 25100%, 25150%, 25200%, 25250%, 25300%, 25350%, 25400%, 25450%, 25500%, 25550%, 25600%, 25650%, 25700%, 25750%, 25800%, 25850%, 25900%, 25950%, 26000%, 26050%, 26100%, 26150%, 26200%, 26250%, 26300%, 26350%, 26400%, 26450%, 26500%, 26550%, 26600%, 26650%, 26700%, 26750%, 26800%, 26850%, 26900%, 26950%, 27000%, 27050%, 27100%, 27150%, 27200%, 27250%, 27300%, 27350%, 27400%, 27450%, 27500%, 27550%, 27600%, 27650%, 27700%, 27750%, 27800%, 27850%, 27900%, 27950%, 28000%, 28050%, 28100%, 28150%, 28200%, 28250%, 28300%, 28350%, 28400%, 28450%, 28500%, 28550%, 28600%, 28650%, 28700%, 28750%, 28800%, 28850%, 28900%, 28950%, 29000%, 29050%, 29100%, 29150%, 29200%, 29250%, 29300%, 29350%, 29400%, 29450%, 29500%, 29550%, 29600%, 29650%, 29700%, 29750%, 29800%, 29850%, 29900%, 29950%, 30000%, 30050%, 30100%, 30150%, 30200%, 30250

Notes

Ford's 16,000-lb. tow rating, Ford Motor Co./Ford Credit Corp., 1988 Super Duty pickup truck. New model. Photo used.