

DESCRIPTION

The ALL-PRO™ LED Wall Pack Series incorporates advanced LED technology and optical design to bring you a slim-profile luminaire with uncompromising performance. Multiple control options are available, including integral photo control for dusk-to-dawn operation and flood for switch control. This fixture provides area coverage equivalence up to 100W Metal Halide while achieving substantial energy and maintenance savings. Perfect for illuminating residential, light commercial, apartments and hotel buildings.

Catalog #		Type
Project		
Comments		Date
Prepared by		

SPECIFICATION FEATURES

Construction

Durable, die-cast aluminum housing formed to optimize thermal management. Internal heat sinking design maximizes LED and driver performance for prolonged and maintenance-free operation. Installation design allows for safe and easy electrical connections. Back cover mounts to the following types of recessed junction boxes: 4 in. square, 4 in. round, 4 in. octagonal, 3-1/2 in. square / octagonal, masonry, 2-3/4 in. hole pattern boxes, and single gang outlet. Cover plate included. Versatile mounting options includes wall or ground mount. Available in bronze finish.

Electrical

Electrical operating voltage 120V AC, external supply wiring rated for 75°C minimum. Power consumption for the two models are 12.3W, and 19W. Maintenance-free LEDs with 50,000 hours of life; fixture operating temperature range from -20°C to 40°C; UL and CUL listed for wet locations. Meets ENERGY STAR® requirements.

Optical

The 12.5W configuration produces up to 1000 lumens; 19W configuration produces up to 1600 lumens. Available in 5000K CCT, this product is ideally suited for security and general outdoor illumination for either residential or commercial applications.

Warranty

Five-year limited warranty.



LED WALL PACK SERIES


Dusk to Dawn



Security Floodlight

DIMENSIONS

Floodlight




Front View



Side View

Dusk to Dawn



ORDERING INFORMATION

Product Sample Number: WP1050LPC

Series WP	Wattage 10 = 12.3W 18 = 18W	CCT 50 = 5000K CCT	Lamp Type L = LED	Controls Blank = Flood PC = Photo Control
---------------------	--	------------------------------	-----------------------------	--



CERTIFICATION DATA

UL/CUL Wet Location Listed
ENERGY STAR® models
Lighting Facts® Approved

TECHNICAL DATA

120V only
-20°C to 40°C Temperature Rating
External Supply Wiring 75° Minimum
Wall and Ground Mount



TECHNICAL INFORMATION

Model	Color	Voltage	Power	Delivered Lumens	Efficacy Lumen/ Watt	LED Color Temperature (K)	CRI
LED Wall Pack	Bronze	120V	12.3	1000	81.3	5000K	73
		120V	18.7	1600	85.6	5000K	73

OPTICAL PERFORMANCE


Optics provide highly directional and controlled area coverage.

Photometry assumes 10' mounting height over a level surface.


ILLUMINANCE
(Footcandles)



1000 LUMEN CONFIGURATION

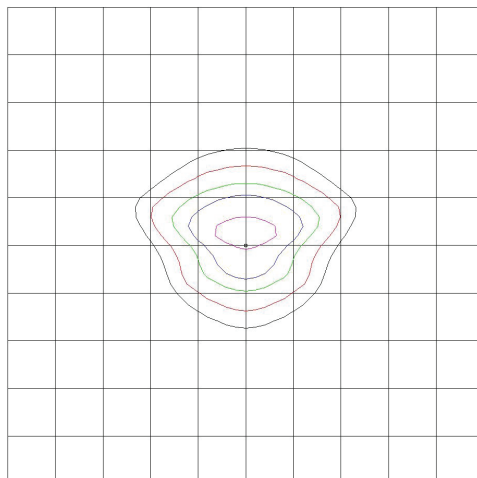

1600 LUMEN CONFIGURATION

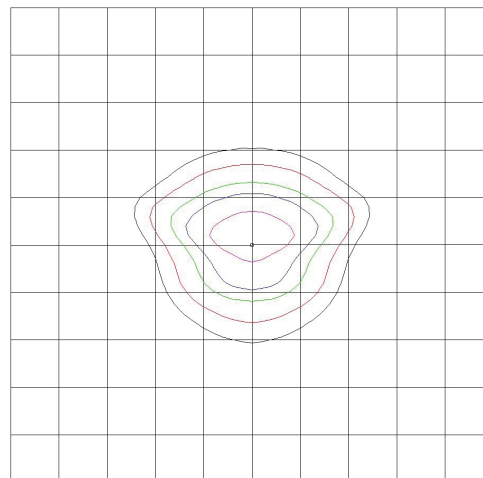

DESCRIPTION

The ALL-PRO™ LED Wall Pack Series incorporates advanced LED technology and optical design to bring you a slim-profile luminaire with uncompromising performance. Multiple control options are available, including integral photo control for dusk-to-dawn operation and flood for switch control. This fixture provides area coverage equivalence up to 100W Metal Halide while achieving substantial energy and maintenance savings. Perfect for illuminating residential, light commercial, apartments and hotel buildings.

Catalog #		Type
Project		
Comments		Date
Prepared by		

SPECIFICATION FEATURES

Construction

Durable, die-cast aluminum housing formed to optimize thermal management. Internal heat sinking design maximizes LED and driver performance for prolonged and maintenance-free operation. Installation design allows for safe and easy electrical connections. Back cover mounts to the following types of recessed junction boxes: 4 in. square, 4 in. round, 4 in. octagonal, 3-1/2 in. square / octagonal, masonry, 2-3/4 in. hole pattern boxes, and single gang outlet. Cover plate included. Versatile mounting options includes wall or ground mount. Available in bronze finish.

Electrical

Electrical operating voltage 120V AC, external supply wiring rated for 75°C minimum. Power consumption for the two models are 12.3W, and 19W. Maintenance-free LEDs with 50,000 hours of life; fixture operating temperature range from -20°C to 40°C; UL and CUL listed for wet locations. Meets ENERGY STAR® requirements.

Optical

The 12.5W configuration produces up to 1000 lumens; 19W configuration produces up to 1600 lumens. Available in 5000K CCT, this product is ideally suited for security and general outdoor illumination for either residential or commercial applications.

Warranty

Five-year limited warranty.



LED WALL PACK SERIES


Dusk to Dawn



Security Floodlight

DIMENSIONS

Floodlight




Front View



Side View

Dusk to Dawn



ORDERING INFORMATION

Product Sample Number: WP1050LPC

Series WP	Wattage 10 = 12.3W 18 = 18W	CCT 50 = 5000K CCT	Lamp Type L = LED	Controls Blank = Flood PC = Photo Control
---------------------	--	------------------------------	-----------------------------	--



CERTIFICATION DATA

UL/CUL Wet Location Listed
ENERGY STAR® models
Lighting Facts® Approved

TECHNICAL DATA

120V only
-20°C to 40°C Temperature Rating
External Supply Wiring 75° Minimum
Wall and Ground Mount



TECHNICAL INFORMATION

Model	Color	Voltage	Power	Delivered Lumens	Efficacy Lumen/ Watt	LED Color Temperature (K)	CRI
LED Wall Pack	Bronze	120V	12.3	1000	81.3	5000K	73
		120V	18.7	1600	85.6	5000K	73

OPTICAL PERFORMANCE


Optics provide highly directional and controlled area coverage.

Photometry assumes 10' mounting height over a level surface.

ILLUMINANCE
(Footcandles)



1000 LUMEN CONFIGURATION

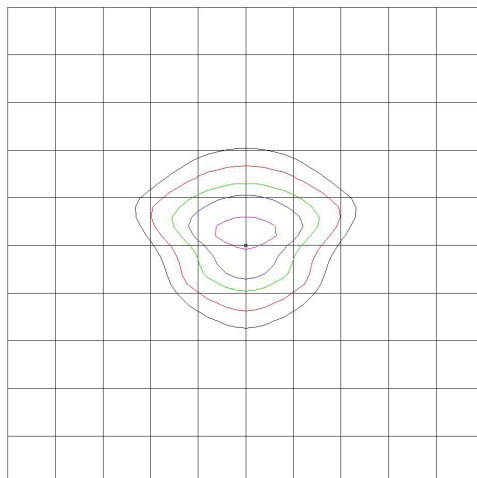

1600 LUMEN CONFIGURATION

