

- (Eng) Installation guide
 (F) Guide d'installation
 (E) Guía de instalación




Only with UL listed
SALTO mortise lock or latch

BHMA
CERTIFIED

A156.25 grade 1
Only with SALTO LA1T
mortise lock.

Ai 650 m 00 ff t x h r series
 Ai 656 m 00 ff t x h r
 Ai 658 m dd ff t x h r
 Ai 660 m 00 ff t x h r
 Ai 666 m 00 ff t x h r
 Ai 668 m dd ff t x h r

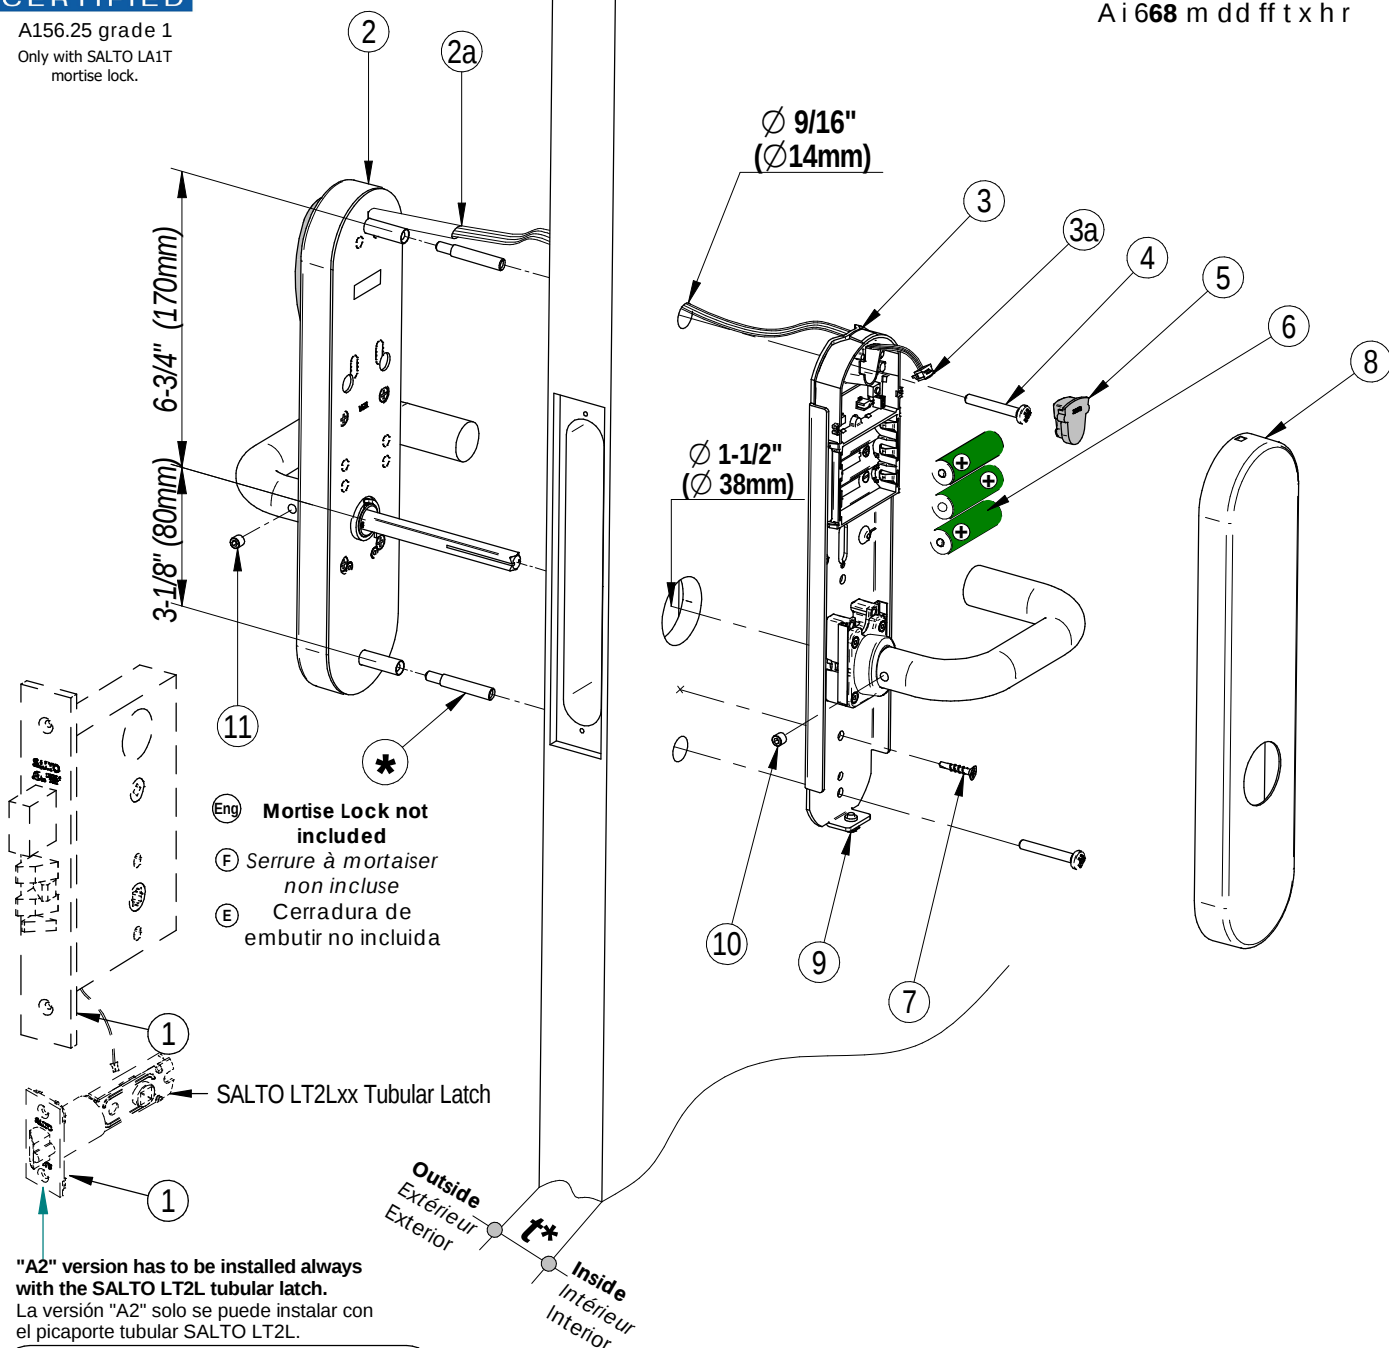

- (Eng) Mortise Lock not included
 (F) Serrure à mortaiser non incluse
 (E) Cerradura de embutir no incluida

SALTO LT2Lxx Tubular Latch

"A2" version has to be installed always
 with the SALTO LT2L tubular latch.
 La versión "A2" solo se puede instalar con
 el picaporte tubular SALTO LT2L.

SALTO LT2Lxx Tubular latch With Ai6xxA2.. Only!


To be used only with
 SALTO compatible
 escutcheons!
 A utiliser uniquement
 avec les ensembles
 plaques-béquilles
 SALTO compatibles!
 ¡Utilizar solamente
 con escudos SALTO
 compatibles!



Ø25
 Ø1"



- (Eng) (*) Only for door thickness > 2-3/8" (60mm).
 (F) (*) Seulement pour portes de épaisseur > 2-3/8" (60mm).
 (E) (*) Solo para grosor de puerta > 2-3/8" (60mm).




SALTO recommends the use of a mortise lock, with a maximum 4° pre-turn.


SALTO recommande d'utiliser des serrures à mortaiser avec un angle au repos de 4° maximum.


SALTO recomienda utilizar cerraduras con un pregiro máximo de 4°.


(Eng) Select handing (F) Choisir le sens de la bèleuille (E) Seleccione mano

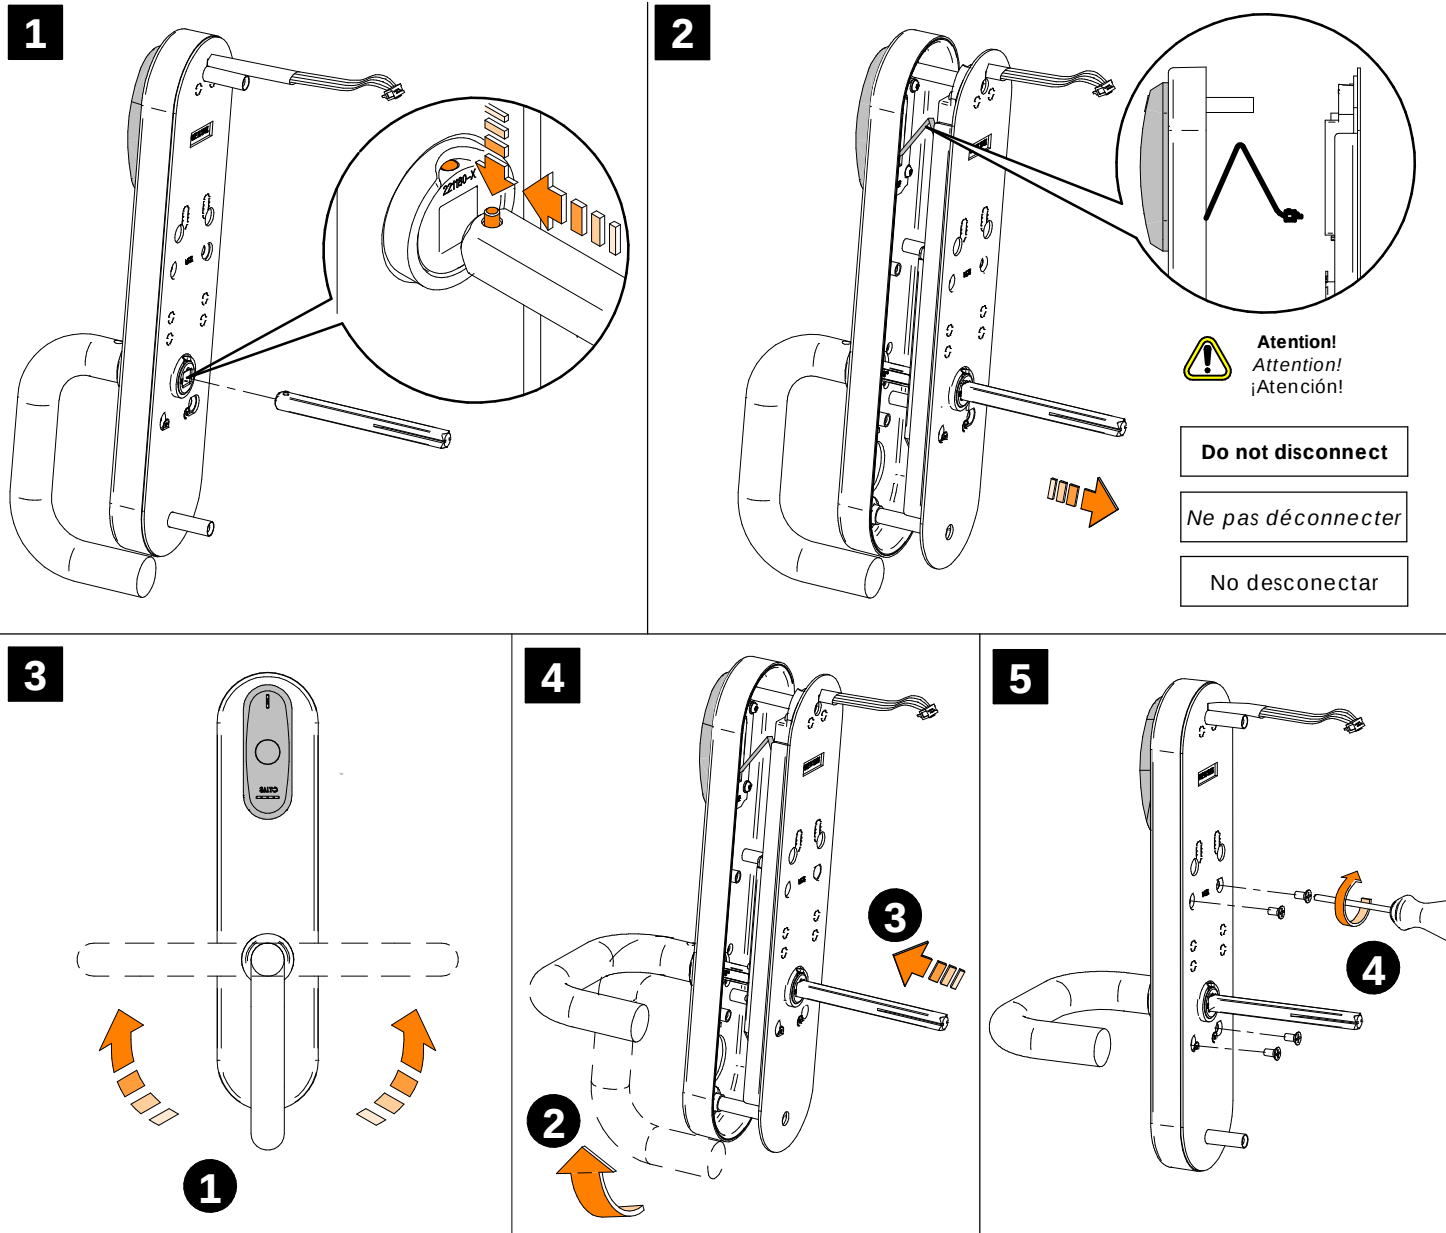


(Eng) Installation (F) Installation (E) Instalación

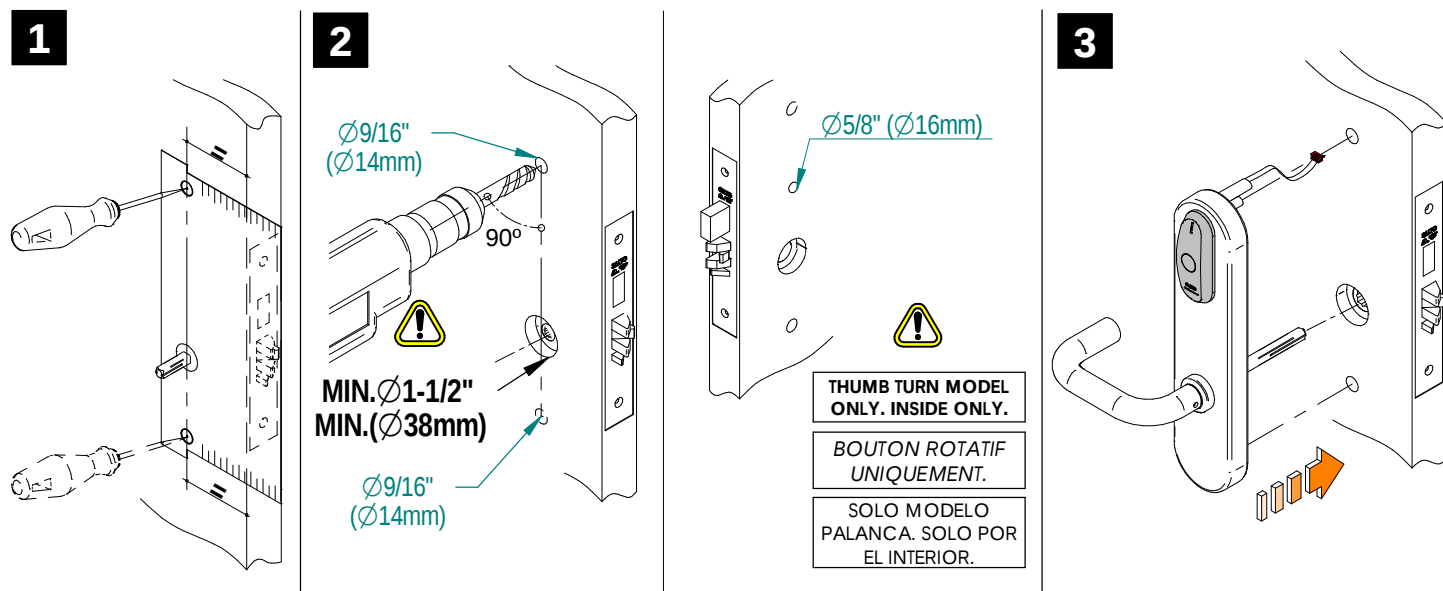

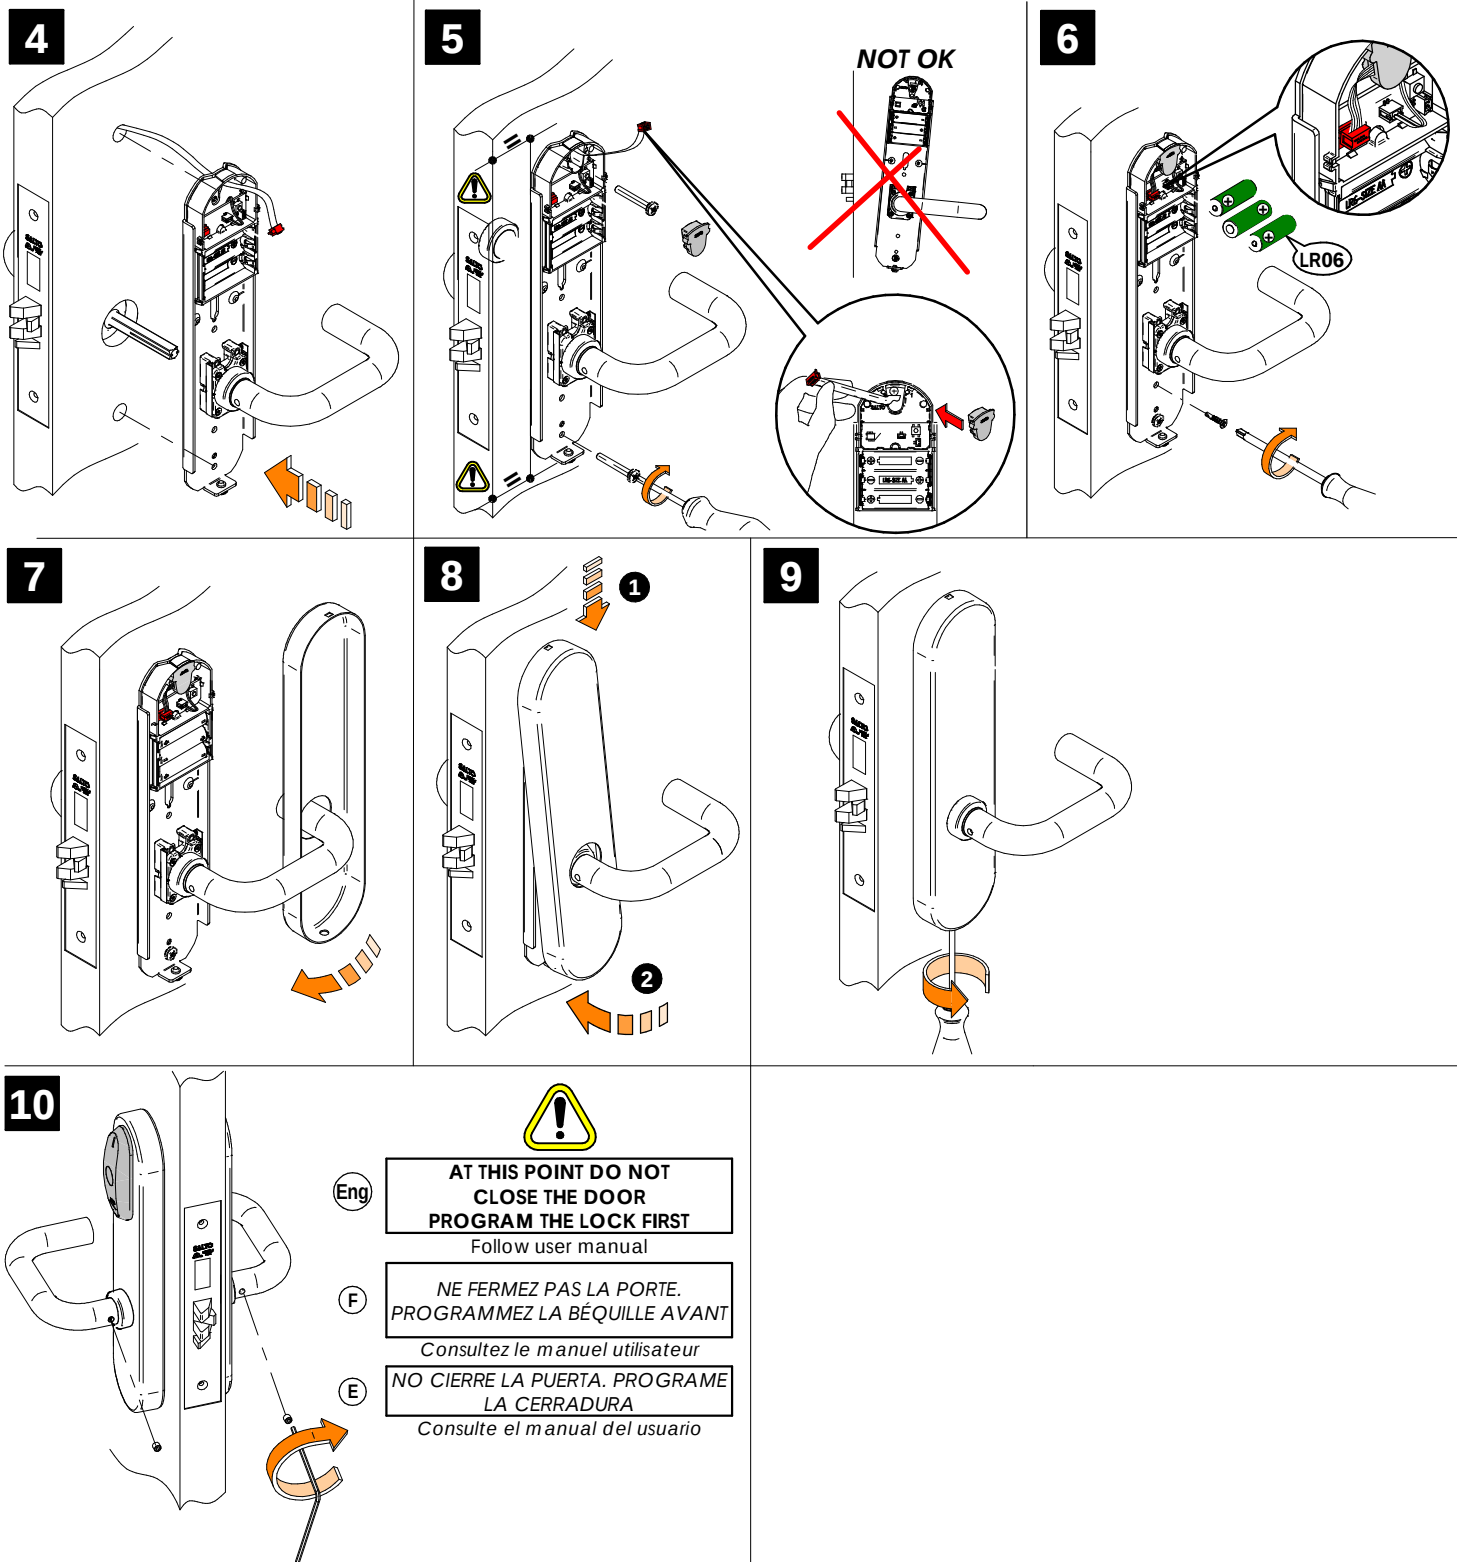

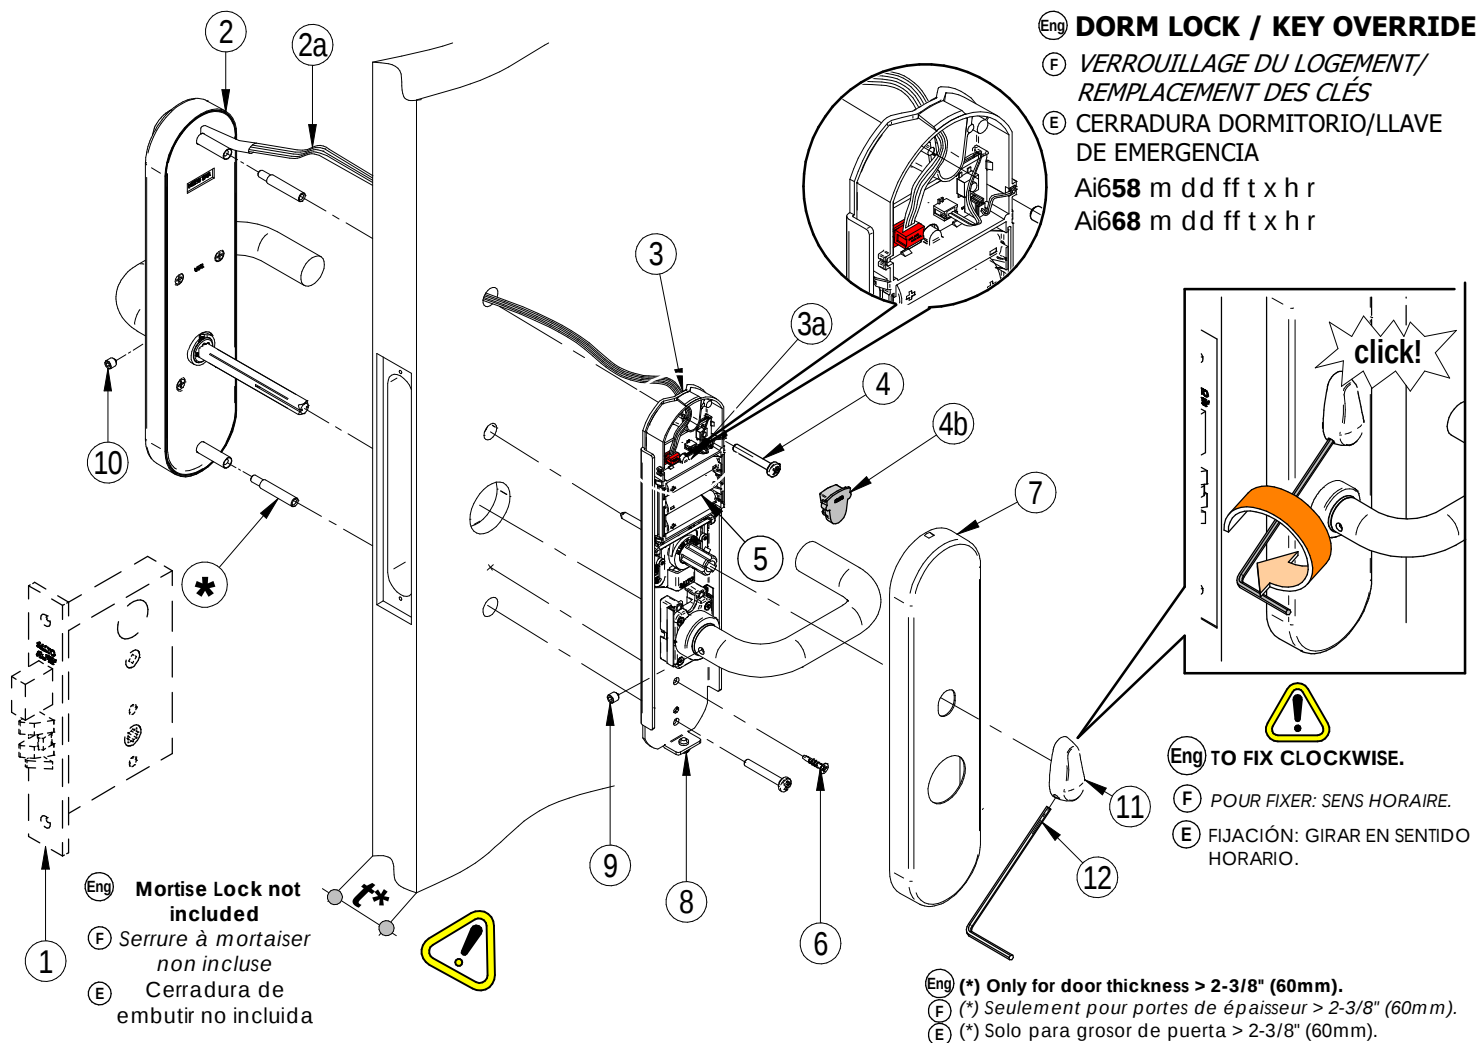

WIRELESS

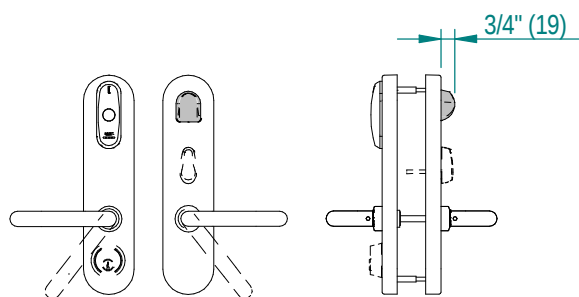

Ai 650 m 00 ff t x h W series
 Ai 656 m 00 ff t x h W
 Ai 658 m dd ff t x h W
 Ai 660 m 00 ff t x h W
 Ai 666 m 00 ff t x h W
 Ai 668 m dd ff t x h W

