

# **FANUC SERVO AMPLIFIER $\alpha$ i series**

## **DESCRIPTIONS**

- No part of this manual may be reproduced in any form.
- All specifications and designs are subject to change without notice.

The products in this manual are controlled based on Japan's "Foreign Exchange and Foreign Trade Law". The export from Japan may be subject to an export license by the government of Japan.

Further, re-export to another country may be subject to the license of the government of the country from where the product is re-exported. Furthermore, the product may also be controlled by re-export regulations of the United States government.

Should you wish to export or re-export these products, please contact FANUC for advice.

In this manual we have tried as much as possible to describe all the various matters.

However, we cannot describe all the matters which must not be done, or which cannot be done, because there are so many possibilities.

Therefore, matters which are not especially described as possible in this manual should be regarded as "impossible".

### General Safety Precautions

- When an abnormality such as an alarm or a hardware failure occurs, the operations described in the specifications are not guaranteed unless otherwise specifically noted. When action corresponding to the abnormality is specifically described, take the action. When no action is described, please contact FANUC.

- The signals and functions described in the specifications cannot be used separately for safety functions unless otherwise described as being usable for the safety functions. Their specifications are not assumed to be used as the safety functions in this case, an unexpected danger may be caused. For information about the safety functions, please contact FANUC.

Generally, the safety functions represent functions that protect the operators from machine danger.

- A wrong device connection or setting can lead to unpredictable operation. When starting to operate the machine for the first time after assembling the machine, replacing components, or modifying parameter settings, exercise the greater care by, for example, reducing the torque limit value, error detection level, or operating speed or by operating the machine in such a way that an emergency stop can be made quickly.

# SAFETY PRECAUTIONS

---

This "Safety Precautions" section describes the precautions which must be observed to ensure safety when using FANUC servo amplifiers (including spindle amplifiers). Users of any control motor amplifier model are requested to read the "Safety Precautions" carefully before first using the amplifier. Users should also read the relevant description in this manual to become fully familiar with the functions of the servo amplifier.

The users are basically forbidden to do any behavior or action not mentioned in the "Safety Precautions." They are invited to ask FANUC previously about what behavior or action is prohibited.

## Contents

|                                                  |      |
|--------------------------------------------------|------|
| DEFINITION OF WARNING, CAUTION, AND NOTE .....   | s-2  |
| WARNINGS AND CAUTIONS RELATING TO MOUNTING ..... | s-3  |
| Warning.....                                     | s-3  |
| Caution.....                                     | s-5  |
| Note.....                                        | s-7  |
| WARNINGS AND CAUTIONS RELATING TO A PILOT RUN .. | s-8  |
| Warning.....                                     | s-8  |
| Caution.....                                     | s-9  |
| WARNINGS AND CAUTIONS RELATING TO                |      |
| MAINTENANCE .....                                | s-10 |
| Warning.....                                     | s-10 |
| Caution.....                                     | s-12 |
| Note.....                                        | s-13 |

## DEFINITION OF WARNING, CAUTION, AND NOTE

---

This manual includes safety precautions for protecting the user and preventing damage to the machine. Precautions are classified into Warning and Caution according to their bearing on safety. Also, supplementary information is described as a Note. Read the Warning, Caution, and Note thoroughly before attempting to use the machine.

**WARNING**

Applied when there is a danger of the user being injured or when there is a danger of both the user being injured and the equipment being damaged if the approved procedure is not observed.

**CAUTION**

Applied when there is a danger of the equipment being damaged, if the approved procedure is not observed.

**NOTE**

The Note is used to indicate supplementary information other than Warning and Caution.

- Read this manual carefully, and store it in a safe place.



---

## WARNINGS AND CAUTIONS RELATING TO MOUNTING

---

### Warning

---



#### WARNING

- **Check the specification code of the amplifier.**  
Check that the delivered amplifier is as originally ordered.
- **Mount a ground fault interrupter.**  
To guard against fire and electric shock, fit the factory power supply or machine with a ground fault interrupter (designed for use with an inverter).
- **Securely ground the amplifier.**  
Securely connect the ground terminal and metal frame of the amplifier and motor to a common ground plate of the power magnetic cabinet.
- **Be aware of the weight of the amplifier and other components.**  
Control motor amplifiers and AC reactors are heavy. When transporting them or mounting them in the cabinet, therefore, be careful not to injured yourself or damage the equipment. Be particularly carefull not to jam your fingers between the cabinet and amplifier.
- **Never ground or short-circuit either the power supply lines or power lines.**  
Protect the lines from any stress such as bending. Handle the ends appropriately.
- **Ensure that the power supply lines, power lines, and signal lines are securely connected.**  
A loose screw, loose connection, or the like will cause a motor malfunction or overheating, or a ground fault.  
Be extremely careful with power supply lines, motor power lines, and DC link connections through which a large amount of current passes, because a loose screw (or poor contact in a connector or poor connection between a connector terminal and a cable) may cause a fire.
- **Insulate all exposed parts that are charged.**
- **Never touch the regenerative discharge resistor or radiator directly.**  
The surface of the radiator and regenerative discharge unit become extremely hot. Never touch them directly. An appropriate structure should also be considered.

 **WARNING**

- **Close the amplifier cover after completing the wiring.**  
Leaving the cover open presents a danger of electric shock.
- **Confirm that the input voltage meets the specifications of the amplifier before making connection.**  
If the input voltage exceeds the specified value (for example, if the input voltage for a 200-V input amplifier is 400 V), an internal component may be damaged and burnt out.
- **Prevent conductive, flammable, or corrosive foreign matters, mists, or water droplets from entering the unit**  
If conductive or flammable foreign matters enter the unit, explosion or corruption may be caused.  
If corrosive or conductive mists or water droplets are attached to an electronic circuit, unexpected operation may be caused in the circuit.  
The electronic circuit portion must be installed in an environment of pollution level 2 specified by IEC60664-1. To achieve pollution level 2 in a severe machine tool environment, it is generally necessary to install the portion in a cabinet that satisfies IP54.

## Caution

---



### CAUTION

- **Do not step or sit on the amplifier.**  
Also, do not stack unpacked amplifiers on top of each other.
- **Use the amplifier in an appropriate environment.**  
See the allowable ambient temperatures and other requirements, given in the corresponding descriptions.
- **Protect the amplifier from impact.**  
Do not place anything on the amplifier.
- **Do not disassemble the amplifier.**
- **Do not block the air inlet to the radiator.**
- **Take appropriate measures to prevent coolant, oil mist, or chips from being adhered to the radiator and fan motors that are exposed to the outside of the power magnetics cabinet.**  
A deposit of coolant, oil mist, or chips on the air inlet will result in a reduction in the cooling efficiency. In some cases, the required efficiency cannot be achieved. The deposit may also lead to a reduction in the useful life of the fan motors or semiconductors. Especially, when outside air is drawn in, mount filters on both the air inlet and outlet. These filters must be replaced regularly.  
So, an easy-to-replace type of filter should be used.
- **Connect the power supply lines and power lines to the appropriate terminals and connectors.**
- **Connect the signal lines to the appropriate connectors.**
- **Ensure that the cables used for the power supply lines and power lines are of the appropriate diameter and temperature ratings.**
- **Do not apply an excessively large force to plastic parts.**  
If a plastic section breaks, it may cause internal damage, thus interfering with normal operation. The edge of a broken section is likely to be sharp and, therefore, presents a risk of injury.
- **Before connecting the power supply wiring, check the supply voltage.**  
Check that the supply voltage is within the range specified in this manual, then connect the power supply lines.
- **Ensure that the combination of motor and amplifier is appropriate.**

 **CAUTION**

- **Ensure that valid parameters are specified.**  
Specifying an invalid parameter for the combination of motor and amplifier may not only prevent normal operation of the motor but also result in damage to the amplifier.
- **Ensure that the amplifier and peripheral equipment are securely connected.**  
Check that the magnetic contactor, circuit breaker, and other devices mounted outside the amplifier are securely connected to each other and that those devices are securely connected to the amplifier.
- **Check that the amplifier is securely mounted in the power magnetic cabinet.**  
If any clearance is left between the power magnetic cabinet and the surface on which the amplifier is mounted, dust entering the gap may build up and prevent the normal operation of the amplifier.
- **Apply appropriate countermeasures against noise.**  
Adequate countermeasures against noise are required to maintain normal operation of the amplifier. For example, signal lines must be routed away from power supply lines and power lines.

**Note**

---

**NOTE**

- **Keep the nameplate clearly visible.**
- **Keep the legend on the nameplate clearly visible.**
- **After unpacking the amplifier, carefully check for any damage.**
- **Mount the amplifier in a location where it can be easily accessed periodic inspection and daily maintenance.**
- **Leave sufficient space around the machine to enable maintenance to be performed easily.**  
Do not place any heavy objects such that they would interfere with the opening of the doors.
- **Keep the parameter table and spare parts at hand.**  
Also, keep the specifications at hand. These items must be stored in a location where they can be retrieved immediately.
- **Provide adequate shielding.**  
A cable to be shielded must be securely connected to the ground plate, using a cable clamp or the like.

## WARNINGS AND CAUTIONS RELATING TO A PILOT RUN

---

### Warning

---



#### WARNING

- **Before turning on the power, check that the cables connected to the power magnetic cabinet and amplifier, as well as the power lines and power supply lines, are securely connected. Also, check that no lines are slack.**
- **Before turning on the power, ensure that the power magnetic cabinet is securely grounded.**
- **Before turning on the power, check that the door of the power magnetic cabinet and all other doors are closed.**  
Ensure that the door of the power magnetic cabinet containing the amplifier, and all other doors, are securely closed. During operation, all doors must be closed and locked.
- **Apply extreme caution if the door of the power magnetic cabinet or another door must be opened.**  
Only a person trained in the maintenance of the corresponding machine or equipment should open the door, and only after shutting off the power supply to the power magnetic cabinet (by opening both the input circuit breaker of the power magnetic cabinet and the factory switch used to supply power to the cabinet). If the machine must be operated with the door open to enable adjustment or for some other purpose, the operator must keep his or her hands and tools well away from any dangerous voltages. Such work must be done only by a person trained in the maintenance of the machine or equipment.
- **When operating the machine for the first time, check that the machine operates as instructed.**  
To check whether the machine operates as instructed, first specify a small value for the motor, then increase the value gradually. If the motor operates abnormally, perform an emergency stop immediately.
- **After turning on the power, check the operation of the emergency stop circuit.**  
Press the emergency stop button to check that the motor stops immediately, and that the power being supplied to the amplifier is shut off by the magnetic contactor.
- **Before opening a door or protective cover of a machine to enable adjustment of the machine, first place the machine in the emergency stop state and check that the motor has stopped.**

## Caution

---

### CAUTION

- **Note whether an alarm status relative to the amplifier is displayed at power-up or during operation.**  
If an alarm is displayed, take appropriate action as explained in the maintenance manual. If the work to be done requires that the door of the power magnetic cabinet be left open, the work must be carried out by a person trained in the maintenance of the machine or equipment. Note that if some alarms are forcibly reset to enable operation to continue, the amplifier may be damaged. Take appropriate action according to the contents of the alarm.
- **Before operating the motor for the first time, mount and adjust the position and speed sensors.**  
Following the instructions given in the maintenance manual, adjust the position and speed sensors for the spindle so that an appropriate waveform is obtained.  
If the sensors are not properly adjusted, the motor may not rotate normally or the spindle may fail to stop as desired.
- **If the motor makes any abnormal noise or vibration while operating, stop it immediately.**  
Note that if operation is continued in spite of there being some abnormal noise or vibration, the amplifier may be damaged. Take appropriate corrective action, then resume operation.
- **Observe the ambient temperature and output rating requirements.**  
The continuous output rating or continuous operation period of some amplifiers may fall as the ambient temperature increases. If the amplifier is used continuously with an excessive load applied, the amplifier may be damaged.

## WARNINGS AND CAUTIONS RELATING TO MAINTENANCE

---

### Warning

---



#### WARNING

- **Read the maintenance manual carefully and ensure that you are totally familiar with its contents.**  
The maintenance manual describes daily maintenance and the procedures to be followed in the event of an alarm being issued. The operator must be familiar with these descriptions.
- **Notes on replacing a fuse or circuit board**
  - 1) Before starting the replacement work, ensure that the circuit breaker protecting the power magnetic cabinet is open.
  - 2) Check that the red LED that indicates that charging is in progress is not lit.  
The position of the charging LED on each model of amplifier is given in this manual. While the LED is lit, hazardous voltages are present inside the unit, and thus there is a danger of electric shock.
  - 3) Some circuit board components become extremely hot. Be careful not to touch these components.
  - 4) Ensure that a fuse having an appropriate rating is used.
  - 5) Check the specification code of a circuit board to be replaced. If a modification drawing number is indicated, contact FANUC before replacing the circuit board.  
Also, before and after replacing a circuit board, check its pin settings.
  - 6) After replacing the fuse, ensure that the screws are firmly tightened. For a socket-type fuse, ensure that the fuse is inserted correctly.
  - 7) After replacing the circuit board, ensure that it is securely connected.
  - 8) Ensure that all power lines, power supply lines, and connectors are securely connected.
- **Take care not to lose any screws.**  
When removing the case or circuit board, take care not to lose any screws. If a screw is lost inside the unit and the power is turned on, the machine may be damaged.



 **WARNING**

- **Notes on replacing the battery of the absolute Pulsecoder**  
Replace the battery only while the power is on. If the battery is replaced while the power is turned off, the stored absolute positioning data will be lost. Some  $\alpha i$  series servo amplifier modules have batteries in their servo amplifiers. To replace the battery of any of those models, observe the following procedure: Open the door of the power magnetic cabinet; Leave the control power of the power supply module on; Place the machine in the emergency stop state so that the power being input to the amplifier is shut off; Then, replace the battery. Replacement work should be done only by a person who is trained in the related maintenance and safety requirements. The power magnetic cabinet in which the servo amplifier is mounted has a high-voltage section. This section presents a severe risk of electric shock.
- **Check the number of any alarm.**  
If the machine stops upon an alarm being issued, check the alarm number. Some alarms indicate that a component must be replaced. If the power is reconnected without first replacing the failed component, another component may be damaged, making it difficult to locate the original cause of the alarm.
- **Before resetting an alarm, ensure that the original cause of the alarm has been removed.**
- **Contact FANUC whenever a question relating to maintenance arises.**

## Caution

---

### CAUTION

- **Ensure that all required components are mounted.**  
When replacing a component or circuit board, check that all components, including the snubber capacitor, are correctly mounted. If the snubber capacitor is not mounted, for example, the IPM will be damaged.
- **Tighten all screws firmly.**
- **Check the specification code of the fuse, circuit board, and other components.**  
When replacing a fuse or circuit board, first check the specification code of the fuse or circuit board, then mount it in the correct position. The machine will not operate normally if a fuse or circuit board having other than the correct specification code is mounted, or if a fuse or circuit board is mounted in the wrong position.
- **Mount the correct cover.**  
The cover on the front of the amplifier carries a label indicating a specification code. When mounting a previously removed front cover, take care to mount it on the unit from which it was removed.
- **Notes on cleaning the heat sink and fan**
  - 1) A dirty heat sink or fan results in reduced semiconductor cooling efficiency, which degrades reliability. Periodic cleaning is necessary.
  - 2) Using compressed air for cleaning scatters the dust. A deposit of conductive dust on the amplifier or peripheral equipment will result in a failure.
  - 3) To clean the heat sink, do so only after turning the power off and ensuring that the heat sink has cooled to room temperature. The heat sink becomes extremely hot, such that touching it during operation or immediately after power-off is likely to cause a burn. Be extremely careful when touching the heat sink.
- **Notes on removing the amplifier**  
Before removing the amplifier, first ensure that the power is shut off. Be careful not to jam your fingers between the power magnetic cabinet and amplifier.
- **Unless otherwise specified, do not insert or remove any connector while the power is turned on. Otherwise, the amplifier may fail.**

## Note

---

### NOTE

- **Ensure that the battery connector is correctly inserted.**  
If the power is shut off while the battery connector is not connected correctly, the absolute position data for the machine will be lost.
- **Store the manuals in a safe place.**  
The manuals should be stored in a location where they can be accessed immediately if so required during maintenance work.
- **Notes on contacting FANUC**  
Inform FANUC of the details of an alarm and the specification code of the amplifier so that any components required for maintenance can be quickly secured, and any other necessary action can be taken without delay.



# TABLE OF CONTENTS

|                                                       |            |
|-------------------------------------------------------|------------|
| <b>SAFETY PRECAUTIONS</b>                             | <b>s-1</b> |
| DEFINITION OF WARNING, CAUTION, AND NOTE              | s-2        |
| WARNINGS AND CAUTIONS RELATING TO MOUNTING            | s-3        |
| Warning                                               | s-3        |
| Caution                                               | s-5        |
| Note                                                  | s-7        |
| WARNINGS AND CAUTIONS RELATING TO A PILOT RUN         | s-8        |
| Warning                                               | s-8        |
| Caution                                               | s-9        |
| WARNINGS AND CAUTIONS RELATING TO MAINTENANCE         | s-10       |
| Warning                                               | s-10       |
| Caution                                               | s-12       |
| Note                                                  | s-13       |
| <b>1 CONFIGURATION</b>                                | <b>1</b>   |
| 1.1 FEATURES OF THE SERVO AMPLIFIER $\alpha i$ SERIES | 2          |
| 1.2 CONFIGURATION                                     | 3          |
| 1.2.1 200-V Input Series                              | 3          |
| 1.2.2 400-V Input Series                              | 6          |
| 1.3 SERVO AMPLIFIERS                                  | 8          |
| 1.4 LINEUP                                            | 10         |
| <b>2 SPECIFICATIONS</b>                               | <b>11</b>  |
| 2.1 INPUT POWER                                       | 12         |
| 2.2 ENVIRONMENTAL CONDITIONS                          | 25         |
| 2.3 SPECIFICATIONS OF THE MODULES                     | 33         |
| 2.3.1 $\alpha i$ PS series                            | 33         |
| 2.3.2 $\alpha i$ SV series                            | 37         |
| 2.3.3 $\alpha i$ SP series                            | 40         |
| 2.4 WEIGHT                                            | 43         |
| <b>3 ORDERING INFORMATION</b>                         | <b>45</b>  |
| 3.1 SERVO AMPLIFIER                                   | 46         |
| 3.1.1 200-V Input Series                              | 46         |
| 3.1.1.1 $\alpha i$ PS series                          | 46         |
| 3.1.1.2 $\alpha i$ PS <sub>R</sub> series             | 46         |
| 3.1.1.3 $\alpha i$ SV series                          | 47         |
| 3.1.1.4 $\alpha i$ SP series                          | 49         |
| 3.1.2 400-V Input Series                              | 50         |
| 3.1.2.1 $\alpha i$ PS series                          | 50         |
| 3.1.2.2 $\alpha i$ SV series                          | 51         |
| 3.1.2.3 $\alpha i$ SP series                          | 53         |
| 3.1.3 Others                                          | 54         |
| 3.1.3.1 AC reactor                                    | 54         |
| 3.1.3.2 AC line filter                                | 56         |
| 3.1.3.3 Sub module SW                                 | 57         |

|          |                                                                                             |            |
|----------|---------------------------------------------------------------------------------------------|------------|
| 3.1.3.4  | Sub module SM .....                                                                         | 57         |
| 3.1.3.5  | Connectors .....                                                                            | 58         |
| 3.1.3.6  | Fuses .....                                                                                 | 64         |
| 3.1.3.7  | Power transformer .....                                                                     | 65         |
| 3.1.3.8  | Regenerative discharge unit.....                                                            | 69         |
| 3.1.3.9  | Cables .....                                                                                | 70         |
| 3.1.3.10 | Circuit breaker and magnetic contactor .....                                                | 71         |
| 3.1.3.11 | Lightning surge protector .....                                                             | 74         |
| 3.1.3.12 | Noise filter .....                                                                          | 75         |
| 3.1.3.13 | Sensors for servo .....                                                                     | 75         |
| 3.1.3.14 | Sensors for spindle.....                                                                    | 76         |
| 3.1.3.15 | Power line switch unit .....                                                                | 77         |
| 3.1.3.16 | Battery for absolute Pulsecoder .....                                                       | 78         |
| <b>4</b> | <b>HOW TO SELECT THE MODULE .....</b>                                                       | <b>79</b>  |
| 4.1      | HOW TO SELECT THE $\alpha i$ SV SERIES (SERVO AMPLIFIER) .....                              | 80         |
| 4.1.1    | 200-V Input Series.....                                                                     | 81         |
| 4.1.2    | 400-V Input Series.....                                                                     | 82         |
| 4.1.3    | How to Select the Dynamic Brake Module (DBM) .....                                          | 83         |
| 4.2      | HOW TO SELECT THE $\alpha i$ SP series (SPINDLE AMPLIFIER).....                             | 84         |
| 4.2.1    | 200-V Input Series.....                                                                     | 85         |
| 4.2.2    | 400-V Input Series.....                                                                     | 85         |
| 4.3      | HOW TO SELECT THE $\alpha i$ PS series (POWER SUPPLY) .....                                 | 86         |
| 4.3.1    | How to Obtain the $\alpha i$ PS series rated output capability .....                        | 87         |
| 4.3.2    | How to Obtain the $\alpha i$ PS series maximum output capability .....                      | 87         |
| 4.3.3    | How to Obtain the $\alpha i$ PS series peak maximum output capability.....                  | 88         |
| 4.3.4    | Number of Connected $\alpha i$ SV series and $\alpha i$ SP Series .....                     | 89         |
| 4.3.5    | Notes on 400-V Input $\alpha i$ PS series selection.....                                    | 89         |
| 4.4      | HOW TO SELECT THE $\alpha i$ PSR series (POWER SUPPLY, RESISTANCE DISCHARGE TYPE).....      | 90         |
| 4.4.1    | How to Obtain the $\alpha i$ PS <sub>R</sub> series Rated Output Capability.....            | 91         |
| 4.4.2    | How to Obtain the $\alpha i$ PS <sub>R</sub> series Maximum Output Capability .....         | 91         |
| 4.4.3    | Number of Connected $\alpha i$ SV series and $\alpha i$ SP series .....                     | 92         |
| 4.4.4    | Selecting a Regenerative Discharge Unit .....                                               | 93         |
| 4.5      | LIST OF MOTOR OUTPUT CAPACITIES FOR $\alpha i$ PS AND $\alpha i$ PSR series SELECTION ..... | 96         |
| 4.5.1    | Servo Motor Continuous Rated Outputs and Maximum Outputs at Acceleration .                  | 96         |
| 4.5.2    | Spindle Motor Continuous Rated Outputs and Maximum Outputs at Acceleration.....             | 100        |
| <b>5</b> | <b>INSTALLATION .....</b>                                                                   | <b>102</b> |
| 5.1      | LEAKAGE CURRENT .....                                                                       | 103        |
| 5.2      | GROUND.....                                                                                 | 104        |
| 5.2.1    | Ground Systems .....                                                                        | 104        |
| 5.2.2    | Grounding Method .....                                                                      | 105        |
| 5.2.3    | Notes on Connecting .....                                                                   | 107        |
| 5.3      | NOISE PREVENTION .....                                                                      | 108        |
| 5.3.1    | Separation of Signal Lines .....                                                            | 108        |
| 5.3.2    | Cable Clamp and Shield Processing.....                                                      | 109        |
| 5.3.3    | Cabinet .....                                                                               | 113        |
| 5.3.4    | Others .....                                                                                | 116        |

|          |                                                                          |            |
|----------|--------------------------------------------------------------------------|------------|
| 5.4      | AMPLIFIER INSTALLATION .....                                             | 117        |
| 5.5      | AMPLIFIER INSTALLATION NOTES RELATING TO SAFETY<br>STANDARDS.....        | 118        |
| 5.5.1    | Requirements of EN and IEC Standards .....                               | 118        |
| 5.5.1.1  | Classification in standards on insulation design .....                   | 118        |
| 5.5.1.2  | Protection against electric shock.....                                   | 119        |
| 5.5.1.3  | Protective grounding.....                                                | 121        |
| 5.5.1.4  | EMC.....                                                                 | 121        |
| 5.5.1.5  | Notes on the emergency stop circuit configuration .....                  | 121        |
| 5.5.1.6  | Reduction of load ratio to ambient temperature .....                     | 122        |
| 5.5.1.7  | Overload protection .....                                                | 122        |
| 5.5.1.8  | External overload protection device .....                                | 122        |
| 5.5.1.9  | Over-speed protection.....                                               | 122        |
| 5.5.1.10 | 24-V power supply .....                                                  | 122        |
| 5.5.1.11 | Screw tightening torque.....                                             | 122        |
| 5.5.2    | Requirements of UL Standards .....                                       | 123        |
| 5.5.2.1  | Classification in standards on insulation design .....                   | 123        |
| 5.5.2.2  | Protection against electric shock.....                                   | 124        |
| 5.5.2.3  | Protective grounding.....                                                | 124        |
| 5.5.2.4  | Overload protection .....                                                | 124        |
| 5.5.2.5  | External overload protection device .....                                | 124        |
| 5.5.2.6  | Short-circuit protection.....                                            | 125        |
| 5.5.2.7  | Over-speed protection.....                                               | 125        |
| 5.5.2.8  | 24-V power supply .....                                                  | 125        |
| 5.5.2.9  | Screw tightening torque.....                                             | 125        |
| 5.6      | NOTES ON COOLANT (REFERENCE) .....                                       | 126        |
| <b>6</b> | <b>HEAT DISSIPATION .....</b>                                            | <b>127</b> |
| 6.1      | 200-V INPUT SERIES .....                                                 | 128        |
| 6.1.1    | $\alpha i$ PS series.....                                                | 128        |
| 6.1.2    | $\alpha i$ SV series .....                                               | 129        |
| 6.1.3    | $\alpha i$ SP series.....                                                | 133        |
| 6.2      | 400-V INPUT SERIES .....                                                 | 134        |
| 6.2.1    | $\alpha i$ PS series.....                                                | 134        |
| 6.2.2    | $\alpha i$ SV series .....                                               | 135        |
| 6.2.3    | $\alpha i$ SP series.....                                                | 139        |
| <b>7</b> | <b>COOLING .....</b>                                                     | <b>140</b> |
| <b>8</b> | <b>EXTERNAL DIMENSIONS AND MAINTENANCE AREA .....</b>                    | <b>141</b> |
| 8.1      | OUTLINE DRAWINGS .....                                                   | 142        |
| 8.1.1    | Outline Drawings of Amplifiers, Panel Cut-out, and Maintenance Area..... | 142        |
| 8.1.2    | AC Reactor Unit.....                                                     | 148        |
| 8.1.3    | AC Line Filter .....                                                     | 158        |
| 8.1.4    | Power Transformer.....                                                   | 159        |
| 8.1.5    | Regenerative Discharge Unit.....                                         | 165        |
| 8.1.6    | Dynamic Brake Module (DBM).....                                          | 168        |
| 8.1.7    | Circuit Breaker .....                                                    | 170        |
| 8.1.8    | Magnetic Contactors.....                                                 | 172        |
| 8.1.9    | Lightning Surge Protector .....                                          | 179        |
| 8.1.10   | Noise Filter.....                                                        | 182        |
| 8.2      | PANEL CUT-OUT DIAGRAMS.....                                              | 185        |

|          |                                                                                                                                                   |            |
|----------|---------------------------------------------------------------------------------------------------------------------------------------------------|------------|
| <b>9</b> | <b>CONNECTION.....</b>                                                                                                                            | <b>192</b> |
| 9.1      | TOTAL CONNECTION DIAGRAM .....                                                                                                                    | 193        |
| 9.2      | CONNECTOR LOCATION .....                                                                                                                          | 195        |
| 9.2.1    | <i>αi</i> PS series.....                                                                                                                          | 195        |
| 9.2.2    | <i>αi</i> SV series .....                                                                                                                         | 200        |
| 9.2.3    | <i>αi</i> SP Series .....                                                                                                                         | 203        |
| 9.3      | CABLE CONNECTION DETAILS .....                                                                                                                    | 207        |
| 9.3.1    | <i>αi</i> PS Series Connection Diagram.....                                                                                                       | 207        |
| 9.3.1.1  | Details of cable K1 (power supply line).....                                                                                                      | 213        |
| 9.3.1.2  | Details of short bar K2.....                                                                                                                      | 220        |
| 9.3.1.3  | Details of cable K3 .....                                                                                                                         | 225        |
| 9.3.1.4  | Details of cable K69 .....                                                                                                                        | 226        |
| 9.3.1.5  | Details of cable K6 .....                                                                                                                         | 227        |
| 9.3.1.6  | Details of cable K7 .....                                                                                                                         | 228        |
| 9.3.1.7  | Details of cable K70 .....                                                                                                                        | 230        |
| 9.3.1.8  | Detailed description of the connection of cables K41 (for regenerative discharge resistance), K42 (for thermostat), and K43 (for fan motor) ..... | 231        |
| 9.3.1.9  | Details of cable K100 (for power failure detection output).....                                                                                   | 233        |
| 9.3.2    | <i>αi</i> SV series Connection Diagram.....                                                                                                       | 234        |
| 9.3.2.1  | Details of cable K2 .....                                                                                                                         | 237        |
| 9.3.2.2  | Details of cable K4 .....                                                                                                                         | 237        |
| 9.3.2.3  | Details of cable K69 .....                                                                                                                        | 237        |
| 9.3.2.4  | Details of cable K21 .....                                                                                                                        | 238        |
| 9.3.2.5  | Details of cable K22 .....                                                                                                                        | 243        |
| 9.3.2.6  | Details of cable K24 .....                                                                                                                        | 248        |
| 9.3.2.7  | Details of cable K25 .....                                                                                                                        | 249        |
| 9.3.2.8  | Details of cable K26 .....                                                                                                                        | 250        |
| 9.3.2.9  | Details of cable K27 .....                                                                                                                        | 251        |
| 9.3.2.10 | Connecting the battery (for the absolute Pulsecoder) .....                                                                                        | 252        |
| 9.3.2.11 | Details of cable K70 .....                                                                                                                        | 258        |
| 9.3.3    | <i>αi</i> SP Series Connection Diagram.....                                                                                                       | 259        |
| 9.3.3.1  | Details of cable K2 .....                                                                                                                         | 260        |
| 9.3.3.2  | Details of cable K69 .....                                                                                                                        | 260        |
| 9.3.3.3  | Details of cable K10 (power cable) .....                                                                                                          | 260        |
| 9.3.3.4  | Details of cable K70 .....                                                                                                                        | 263        |
| 9.3.3.5  | Details of cable K11 .....                                                                                                                        | 263        |
| 9.3.3.6  | Details of cable K12 .....                                                                                                                        | 264        |
| 9.3.3.7  | Details of cable K14 .....                                                                                                                        | 267        |
| 9.3.3.8  | Details of cable K16 .....                                                                                                                        | 271        |
| 9.3.3.9  | Details of cable K17 .....                                                                                                                        | 273        |
| 9.3.3.10 | Details of cable K33 .....                                                                                                                        | 281        |
| 9.3.3.11 | Details of cable K36 .....                                                                                                                        | 287        |
| 9.3.3.12 | Details of cable K71 .....                                                                                                                        | 290        |
| 9.3.3.13 | Details of cable K86 .....                                                                                                                        | 293        |
| 9.3.3.14 | Details of cable K88 .....                                                                                                                        | 294        |
| 9.3.3.15 | Details of cable K90 .....                                                                                                                        | 295        |
| 9.3.3.16 | Details of cable K96 .....                                                                                                                        | 296        |
| 9.3.3.17 | Details of cable K97 .....                                                                                                                        | 297        |
| 9.3.3.18 | Spindle Motor Feedback Cable Connection .....                                                                                                     | 299        |
| 9.4      | DETAILS OF CONNECTORS .....                                                                                                                       | 301        |
| 9.4.1    | 20-Pin Half-Pitch Connectors .....                                                                                                                | 301        |
| 9.4.2    | Tyco Electronics AMP D-5000 Series Connector.....                                                                                                 | 302        |



|           |                                                                              |            |
|-----------|------------------------------------------------------------------------------|------------|
| <b>10</b> | <b>SPINDLE-RELATED OPTIONS .....</b>                                         | <b>304</b> |
| 10.1      | SPINDLE ORIENTATION .....                                                    | 305        |
| 10.2      | POWER LINE SWITCH CIRCUIT .....                                              | 306        |
| 10.2.1    | Overview .....                                                               | 306        |
| 10.2.2    | Switch Circuit Configuration .....                                           | 306        |
| 10.2.3    | Power Line Switch Unit .....                                                 | 308        |
| 10.2.3.1  | Specification .....                                                          | 308        |
| 10.2.4    | Outside and Mounting Dimension Diagrams .....                                | 309        |
| 10.2.5    | Connection .....                                                             | 313        |
| 10.2.6    | Notes .....                                                                  | 314        |
| 10.3      | SUB MODULE SW .....                                                          | 316        |
| 10.3.1    | Configuration .....                                                          | 316        |
| 10.3.2    | Specification .....                                                          | 317        |
| 10.3.3    | External Dimensions .....                                                    | 319        |
| 10.3.4    | Connector Installation Diagram (for Combination with $\alpha$ i SP 15) ..... | 321        |
| 10.3.5    | Connection .....                                                             | 322        |
| 10.4      | SUB MODULE SM .....                                                          | 323        |
| 10.4.1    | Specifications .....                                                         | 324        |
| 10.4.2    | Outline Drawing .....                                                        | 325        |
| 10.4.3    | Panel Cut-out .....                                                          | 326        |
| 10.4.4    | Connection .....                                                             | 326        |
| <b>11</b> | <b>SENSOR .....</b>                                                          | <b>327</b> |
| 11.1      | SENSOR FOR THE SERVO SYSTEM .....                                            | 328        |
| 11.1.1    | Absolute $\alpha$ iCZ Sensor (Separate Sensor) .....                         | 328        |
| 11.1.1.1  | Specifications .....                                                         | 329        |
| 11.1.1.2  | Connection block diagram (common to three models) .....                      | 335        |
| 11.1.1.3  | Connection specifications .....                                              | 336        |
| 11.1.1.4  | Rotation direction of the absolute $\alpha$ iCZ sensor .....                 | 338        |
| 11.1.1.5  | Installation .....                                                           | 340        |
| 11.1.1.6  | Notes on use .....                                                           | 345        |
| 11.1.1.7  | Output signal check method .....                                             | 348        |
| 11.2      | SENSOR FOR THE SPINDLE .....                                                 | 350        |
| 11.2.1    | Position Coder .....                                                         | 350        |
| 11.2.1.1  | $\alpha$ i position coder .....                                              | 350        |
| 11.2.1.2  | $\alpha$ position coder S .....                                              | 353        |
| 11.2.1.3  | Installation conditions and notes .....                                      | 356        |
| 11.2.2    | $\alpha$ iBZ Sensor (A860-2150-T*** and A860-2155-T***) .....                | 358        |
| 11.2.3    | $\alpha$ iCZ Sensor (for the Spindle) .....                                  | 367        |
| 11.2.3.1  | Names and specification numbers .....                                        | 368        |
| 11.2.3.2  | Absolute maximum ratings .....                                               | 368        |
| 11.2.3.3  | Specifications .....                                                         | 368        |
| 11.2.3.4  | System configuration and connection block diagram .....                      | 380        |
| 11.2.3.5  | Connection specifications .....                                              | 381        |
| 11.2.3.6  | Rotation direction of the $\alpha$ iCZ sensor .....                          | 384        |
| 11.2.3.7  | Machine start-up procedure (outline) .....                                   | 385        |
| 11.2.3.8  | Installation .....                                                           | 386        |
| 11.2.3.9  | Interpolation error learning .....                                           | 391        |
| 11.2.3.10 | Notes .....                                                                  | 392        |
| 11.2.3.11 | Maintenance target parts .....                                               | 393        |
| 11.2.3.12 | Output signal check method .....                                             | 394        |
| 11.2.3.13 | Spindle alarms .....                                                         | 396        |

**APPENDIX**

|          |                                                                                                   |            |
|----------|---------------------------------------------------------------------------------------------------|------------|
| <b>A</b> | <b>FITTING A LIGHTNING SURGE PROTECTION DEVICE .....</b>                                          | <b>399</b> |
| A.1      | 200-V INPUT SERIES POWER SUPPLY .....                                                             | 400        |
| A.2      | 400-V INPUT SERIES POWER SUPPLY .....                                                             | 402        |
| A.3      | CAUTIONS .....                                                                                    | 403        |
| <b>B</b> | <b>CABLES .....</b>                                                                               | <b>404</b> |
| B.1      | 10-PAIR CABLE .....                                                                               | 405        |
| B.2      | COMPOSITE 7-CORE CABLE .....                                                                      | 407        |
| B.3      | COMPOSITE 10-CORE CABLE .....                                                                     | 415        |
| B.4      | COMPOSITE 12-CORE CABLE .....                                                                     | 417        |
| B.5      | COMPOSITE 16-CORE CABLE .....                                                                     | 419        |
| B.6      | 10-PAIR CABLE .....                                                                               | 420        |
| <b>C</b> | <b>EXTERNAL DIMENSIONS OF EACH CONNECTOR.....</b>                                                 | <b>421</b> |
| <b>D</b> | <b>FEEDBACK CABLE LENGTH.....</b>                                                                 | <b>431</b> |
| D.1      | SPINDLE CABLE LENGTH<br>(WHEN RECOMMENDED CABLES ARE USED) .....                                  | 432        |
| D.2      | SERVO CABLE LENGTH<br>(WHEN RECOMMENDED CABLES ARE USED) .....                                    | 433        |
| <b>E</b> | <b>POWER LINE FOR SERVO MOTOR AND AMPLIFIER.....</b>                                              | <b>434</b> |
| E.1      | SELECTING A POWER CABLE .....                                                                     | 435        |
| <b>F</b> | <b>MEASURES AGAINST NOISE FROM SERVO AMPLIFIERS .....</b>                                         | <b>438</b> |
| F.1      | NOISE OCCURRENCE IN SERVO AMPLIFIERS.....                                                         | 439        |
| F.2      | NOISE TYPES.....                                                                                  | 440        |
| F.3      | ANTI-NOISE MEASURES .....                                                                         | 442        |
| F.3.1    | Pre-Installation Arrangement .....                                                                | 442        |
| F.3.2    | Anti-Noise Measures .....                                                                         | 443        |
| F.3.3    | Concrete Examples of Anti-Noise Measures.....                                                     | 444        |
| F.3.4    | Anti-Noise Measures for Power Supply Equipment and Grounding .....                                | 446        |
| F.3.5    | Anti-Noise Devices .....                                                                          | 449        |
| F.4      | MISCELLANEOUS .....                                                                               | 450        |
| <b>G</b> | <b>EXAMPLES OF RECOMMENDED POWER MAGNETICS<br/>CABINETS FOR SERVO AMPLIFIER INSTALLATION.....</b> | <b>451</b> |
| G.1      | OVERVIEW .....                                                                                    | 452        |
| G.2      | DESCRIPTIONS.....                                                                                 | 453        |
| G.2.1    | Power Magnetics Cabinet Seal-up.....                                                              | 453        |
| G.2.2    | Environments for Amplifier Heat Sink Sections .....                                               | 458        |
| G.2.3    | Environments for Amplifier Installation .....                                                     | 460        |
| <b>H</b> | <b>DC LINK TERMINAL BOARD SECTION PROTECTIVE COVER .....</b>                                      | <b>462</b> |
| H.1      | OVERVIEW .....                                                                                    | 463        |
| H.2      | HOW TO MOUNT .....                                                                                | 464        |

|          |                                                                                   |            |
|----------|-----------------------------------------------------------------------------------|------------|
| <b>I</b> | <b>POWER FAILURE DETECTION FUNCTION .....</b>                                     | <b>465</b> |
| I.1      | OVERVIEW .....                                                                    | 466        |
| I.2      | POWER FAILURE DETECTION SPECIFICATION .....                                       | 467        |
| I.3      | APPLICATION TO PREVENTION OF VERTICAL AXES FROM FALLING<br>AT POWER FAILURE ..... | 469        |
| I.3.1    | Procedure.....                                                                    | 469        |
| I.3.2    | Brake Circuit .....                                                               | 470        |
| I.3.3    | Method for Keeping Vertical Axis Motors Energized .....                           | 473        |
| I.3.4    | Cautions.....                                                                     | 476        |
| I.3.5    | Confirming Effect.....                                                            | 477        |
| I.3.6    | Method for Supplying External Power to the Amplifier .....                        | 479        |
| I.4      | USE IN COMBINATION WITH THE DUAL CHECK SAFETY FUNCTION .....                      | 481        |
| <b>J</b> | <b>SENSOR (OLD SPECIFICATIONS).....</b>                                           | <b>482</b> |
| J.1      | SENSOR FOR THE SYNCHRONOUS BUILT-IN SERVO MOTOR AND<br>SEPARATE SENSOR .....      | 483        |
| J.1.1    | Absolute $\alpha$ iCZ Sensor (Serial Output, A860-2142-T***) .....                | 483        |
| J.2      | SENSOR FOR THE SPINDLE.....                                                       | 498        |
| J.2.1.1  | $\alpha$ iBZ Sensor (Conventional Dimensions, A860-2120-T***) .....               | 498        |
| J.2.2    | $\alpha$ iCZ Sensor (Analog Output, A860-2140-T***) .....                         | 503        |
| <b>K</b> | <b>MAGNETIC SENSOR SIGNAL CONVERSION ADAPTER.....</b>                             | <b>515</b> |
| K.1      | ORDERING INFORMATION .....                                                        | 516        |
| K.2      | SPECIFICATIONS.....                                                               | 516        |
| K.3      | DIMENSIONS .....                                                                  | 517        |
| K.4      | CONNECTION.....                                                                   | 518        |
| K.5      | METHOD OF ADJUSTMENT .....                                                        | 520        |
| <b>L</b> | <b>HARMONIC LEAKAGE CURRENT .....</b>                                             | <b>521</b> |



# 1

## CONFIGURATION

---

Chapter 1, "CONFIGURATION", consists of the following sections:

|     |                                                        |    |
|-----|--------------------------------------------------------|----|
| 1.1 | FEATURES OF THE SERVO AMPLIFIER $\alpha i$ SERIES..... | 2  |
| 1.2 | CONFIGURATION .....                                    | 3  |
| 1.3 | SERVO AMPLIFIERS .....                                 | 8  |
| 1.4 | LINEUP .....                                           | 10 |

## 1.1 FEATURES OF THE SERVO AMPLIFIER $\alpha i$ SERIES

---

The servo amplifier  $\alpha i$  series employs a modular structure, and is thinner, conserves more space, outputs less heat, and saves more energy.

### Compact

- (1) Use of a latest low-loss power device and a newly developed highly-efficient radiator makes it possible to reduce the depth of the fin to 100 mm, therefore reducing the depth of the amplifier.
- (2) The width of the amplifier is reduced, and therefore the amplifier requires an average of approximately 30% smaller installation space in the cabinet than the conventional amplifiers.
- (3) The shape of the cable connector is improved to reduce the length of cable projection into the control board.

### Reduction in cabling

- (1) Amplifiers can be connected with one cable.
- (2) A ground connection from the motor output terminal block to the flange is included, so external cabling for this connection is no longer required. (A connection from the top of the flange to the system ground on the control board is required.)

### Connector attachment to power lines

- (1) Connectors are attached to input power lines and motor power lines. (For the large-capacity models, terminal blocks are used.) The time required for power line attachment to and detachment from the servo amplifier cabinet is substantially reduced.

### Improved maintainability

- (1) A fan motor can now be replaced in an instant manner, so that the time required to replace a fan motor is reduced substantially.
- (2) Connectors are attached to input power lines and motor power lines, so that the time required for servo amplifier replacement is reduced substantially.
- (3) The need to perform reference position return operation after servo amplifier replacement is eliminated.  
The servo amplifier  $\alpha i$  series has a built-in backup capacitor in the Absolute Pulsecoder as standard. The capacitor enables absolute position detection operation for about 10 minutes, so that reference position return operation after servo amplifier or feedback cable replacement is unnecessary.

## 1.2 CONFIGURATION


---

The FANUC  $\alpha i$  series consists of the following units and parts:

### 1.2.1 200-V Input Series

---


- (1)  $\alpha i$  PS series (Power Supply).....(Basic)
- (2)  $\alpha i$  PS<sub>R</sub> series (Power Supply) [resister discharge type] ....(Basic)
- (3)  $\alpha i$  SV series (Servo Amplifier).....(Basic)
- (4)  $\alpha i$  SP series (Spindle Amplifier).....(Basic)
- (5) AC reactor.....(Basic)
- (6) Connectors (for connection cables) .....(Basic)
- (7) Fuses .....(Basic)
- (8) Power transformer .....(Optional)
- (9) AC line filter .....(Basic)
- (10) Regenerative discharge unit.....(Basic)
- (11) DBM (Dynamic brake module) .....(Basic)

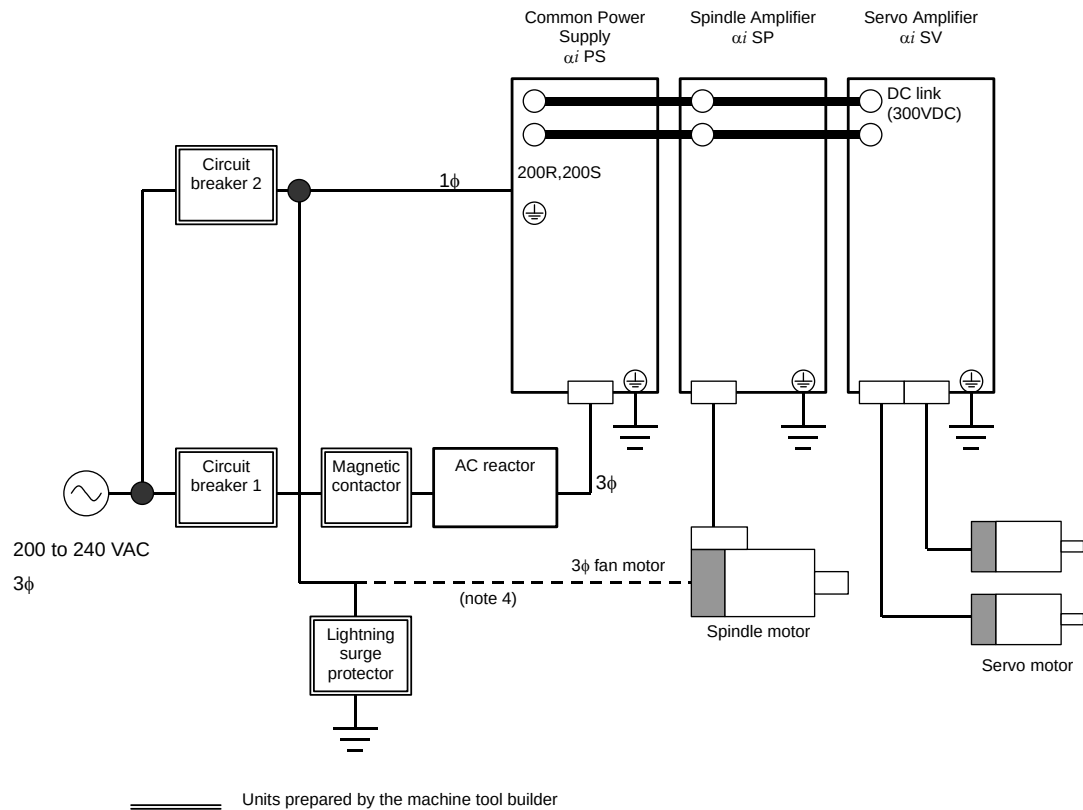Basic configuration using  $\alpha i$  PS (example)**NOTE**

- 1 For how to use the  $\alpha i$  PS together with the  $\alpha i$  SV and  $\alpha i$  SP, see Chapter 4, "HOW TO SELECT THE MODULE".
- 2 A magnetic contactor, AC line filter, and circuit breakers are always required.
- 3 To protect the unit from surge currents caused by lightning, connect surge absorbers between lines, and between the lines and ground, at the power inlet of the power magnetic cabinet. See APPENDIX A for details.
- 4 When using the 3 $\phi$  fan motor, breaker 2 can be shared.



### Basic configuration using $\alpha i$ PS<sub>R</sub> (example)

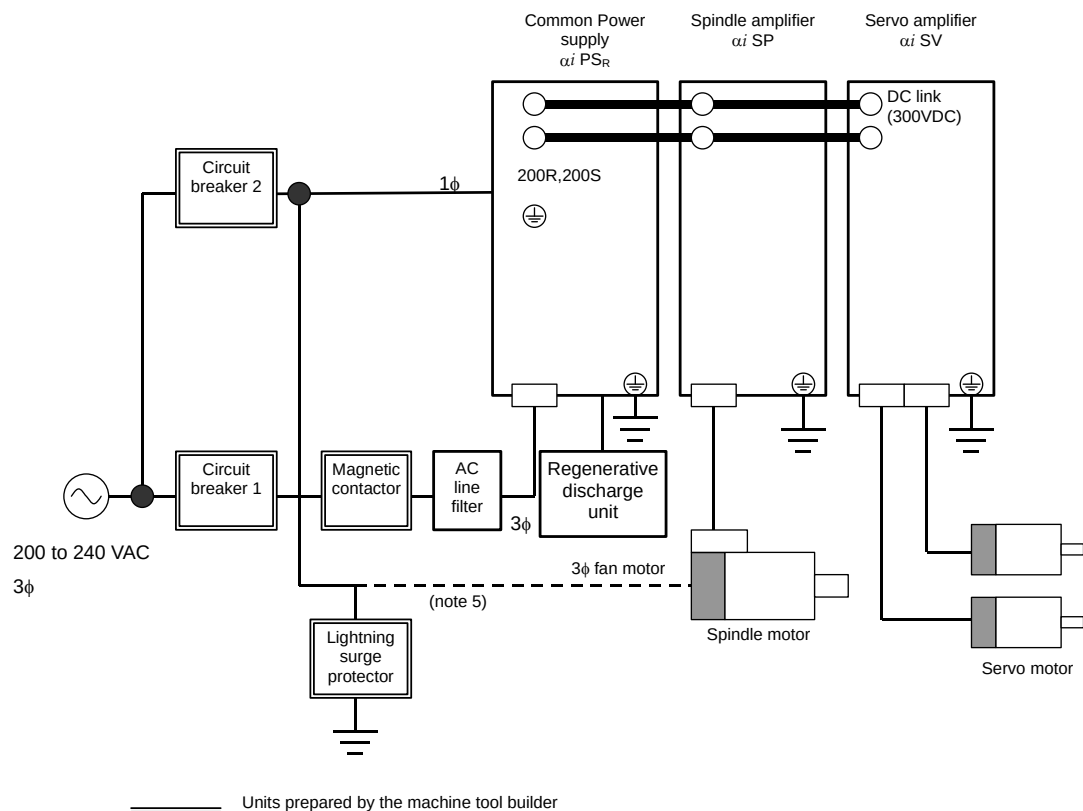


## NOTE

- 1 For how to use the  $\alpha i$  PS<sub>R</sub> together with the  $\alpha i$  SV and  $\alpha i$  SP, see Chapter 4, "HOW TO SELECT THE MODULE".
- 2 A magnetic contactor, AC line filter, and circuit breakers are always required.
- 3 To protect the unit from surge currents caused by lightning, connect surge absorbers between lines, and between the lines and ground, at the power inlet of the power magnetic cabinet. See APPENDIX A for details.
- 4 When an insulating transformer is installed, high-frequency noise to the Power Supply is reduced, so the AC line filter is not required. If the insulating transformer is installed outside the power magnetic cabinet, and the cable connecting the amplifier is exposed, the cable must be covered with a grounded metal duct, or an AC line filter must be installed.
- 5 When using the 3 $\phi$  fan motor, breaker 2 can be shared.

## 1.2.2 400-V Input Series

---

- (1)  $\alpha i$  PS series (Power Supply) .....(Basic)
- (2)  $\alpha i$  SV series (Servo Amplifier).....(Basic)
- (3)  $\alpha i$  SP series (Spindle Amplifier).....(Basic)
- (4) AC reactor.....(Basic)
- (5) Connectors (for connection cables) .....(Basic)
- (6) Fuses .....(Basic)
- (7) DBM (Dynamic brake module) .....(Basic)

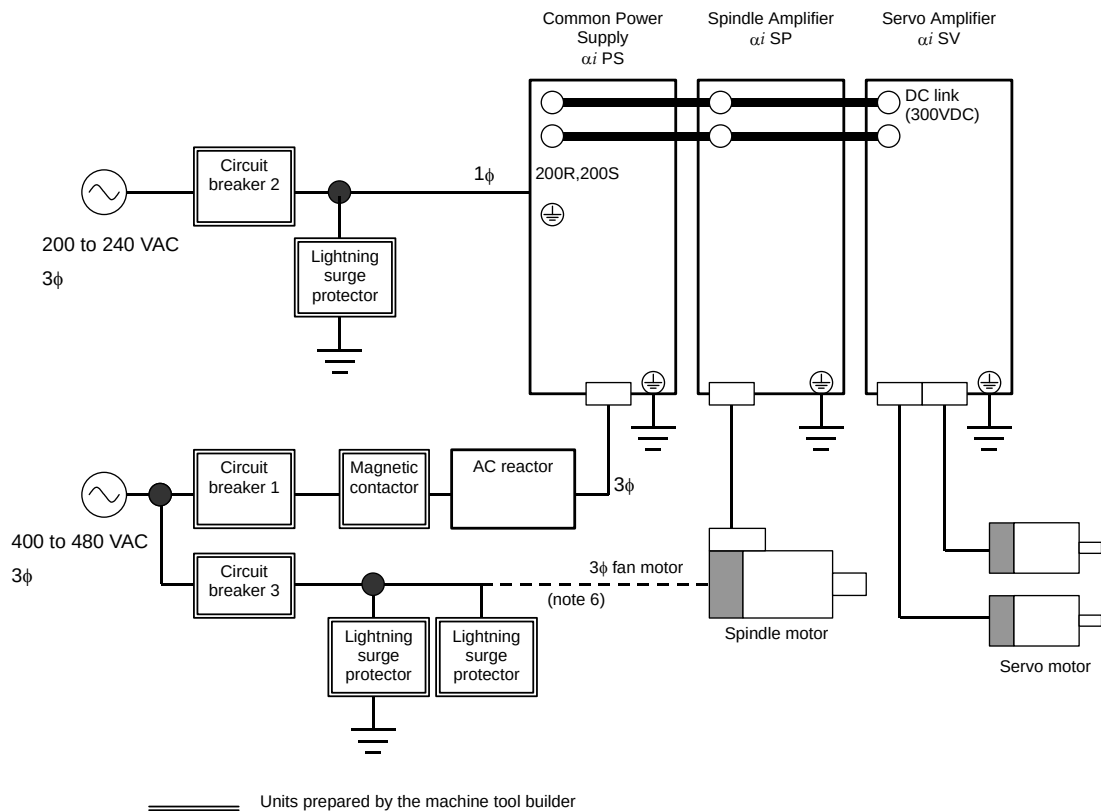Basic configuration using  $\alpha i$  PS (example)**NOTE**

- 1 For the control Power Supply, single-phase 200VAC is required.
- 2 For how to use the  $\alpha i$  PS together with the  $\alpha i$  SV and  $\alpha i$  SP, see Chapter 4, "HOW TO SELECT THE MODULE".
- 3 A magnetic contactor, AC line filter, and circuit breakers are always required.
- 4 To protect the unit from surge currents caused by lightning, connect surge absorbers between lines, and between the lines and ground, at the power inlet of the power magnetic cabinet. See APPENDIX A for details.
- 5 Measures must be taken to detect the operation (trip) of circuit breaker 3.
- 6 When using the 3 $\phi$  fan motor, breaker 2 can be shared.

## 1.3 SERVO AMPLIFIERS

### $\alpha i$ PS series (Power Supply)

The  $\alpha i$  PS series power supplies are used as a main power supply of motor power and as a common power supply to supply control power to servo amplifiers. Select an appropriate Power Supply according to the output levels of the servo motor and spindle motor used.

There are three types of  $\alpha i$  PS series, as follows:

<1> 200-V input series

This Power Supply is designed to provide a main power supply of 200 to 240 V. The module uses power regeneration that returns energy to the power supply during motor deceleration (regeneration).

<2> 400-V input series

This Power Supply can be connected to a main power supply of 400 to 480V without a transformer. The module uses power regeneration that returns energy to the power supply during motor deceleration (regeneration). It is used together with a  $\alpha i$  SV series and  $\alpha i$  SP series of the 400-V input series.

<3>  $\alpha i$  PS<sub>R</sub> series

This Power Supply is designed to provide a main power supply of 200 to 240 V. The module uses resistance regeneration that allows energy to be consumed by resistance during motor deceleration (regeneration).

<4> Regenerative discharge unit

This unit is a resistance used to consume energy during motor deceleration (regeneration). This unit is required whenever the  $\alpha i$  PS<sub>R</sub> is used.

$\alpha i$  PS - x HV

(A) (B) (C)

(A) Model name: PS = Power Supply

PS<sub>R</sub> = Power Supply (resistor discharge type)

(B) Rated output: Numeric value representing a continuous rating in kW

(C) For a 400-V input series, "HV" is added.

## **$\alpha i$ SV series (Servo Amplifier)**

The  $\alpha i$  SV series amplifiers are used to drive a servo motor. Select an appropriate amplifier according to the servo motor connected.

There are two types of  $\alpha i$  SV series, as follows:

### <1> 200-V input series

This Amplifier drives a servo motor of the 200-V input series.

Amplifiers for one axis, two axes, and three axes are available.

### <2> 400-V input series

This Amplifier drives a servo motor of the 400-V input series.

Amplifiers for one axis and two axes are available.

$\alpha i$  SV   x   /   x   /   x   HV L  
(A)   (B)   (C)   (D) (E)(F)

(A) Model name:   SV = Servo amplifier

(B) L-axis maximum output current value [Apeak]

(C) M-axis maximum output current value [Apeak]

(D) N-axis maximum output current value [Apeak]

(E) For an amplifier supporting 400-V input, "HV" is added.

(F) For an amplifier supporting HRV4 control, "L" is added.

## **$\alpha i$ SP series (Spindle Amplifier)**

The  $\alpha i$  SV series amplifiers are used to drive a spindle motor. Select an appropriate amplifier according to the spindle motor connected.

There are two types of  $\alpha i$  SP series, as follows:

### <1> 200-V input series

This Amplifier drives a spindle motor of the 200-V input series.

### <2> 400-V input series

This Amplifier drives a spindle motor of the 400V input series.

$\alpha i$  SP   x   HV  
(A)   (B) (C)

(A) Model name:   SP = Spindle amplifier module

(B) Output:   Numeric value representing the 30-minutes rating of a matching standard motor ( $\alpha i$ ) in kW

(C) For an amplifier supporting 400-V input, "HV" is added.

## 1.4 LINEUP

| Size                              | Input power supply | $\alpha i$ PS | $\alpha i$ PS <sub>R</sub> | $\alpha i$ SP  | $\alpha i$ SV                                   |                                                                              |                   |
|-----------------------------------|--------------------|---------------|----------------------------|----------------|-------------------------------------------------|------------------------------------------------------------------------------|-------------------|
| 60mm-wide<br>Without external fin | 200V               |               | 3                          |                | 4, 20                                           | 4/4, 4/20<br>20/20                                                           | 4/4/4<br>20/20/20 |
|                                   | 400V               |               |                            |                | 10HV                                            | 10/10HV                                                                      |                   |
| 60mm-wide<br>With external fin    | 200V               | 5.5           | 5.5                        | 2.2, 5.5       | 40, 80<br>160, 20L<br>40L, 80L                  | 20/40, 40/40<br>40/80, 80/80<br>20/20L<br>20/40L<br>40/40L                   | 20/20/40          |
|                                   | 400V               |               |                            | 5.5HV          | 20HV<br>40HV<br>80HV<br>10HVL<br>20HVL<br>40HVL | 20/20HV<br>10/10HVL                                                          |                   |
| 90mm-wide<br>With external fin    | 200V               | 11, 15        |                            | 11, 15         | 160L                                            | 80/160<br>160/160<br>40/80L<br>80/80L                                        |                   |
|                                   | 400V               | 11HV, 18HV    |                            | 11HV, 15HV     | 80HVL                                           | 20/40HV<br>40/40HV<br>40/80HV<br>80/80HV<br>20/20HVL<br>20/40HVL<br>40/40HVL |                   |
| 150mm-wide<br>With external fin   | 200V               | 26, 30, 37    |                            | 22, 26, 30, 37 | 360                                             |                                                                              |                   |
|                                   | 400V               | 30HV, 45HV    |                            | 30HV, 45HV     | 180HV                                           |                                                                              |                   |
| 300mm-wide<br>With external fin   | 200V               | 55            |                            | 45, 55         |                                                 |                                                                              |                   |
|                                   | 400V               | 75HV, 100HV   |                            | 75HV, 100HV    | 360HV                                           |                                                                              |                   |

# 2

## SPECIFICATIONS

---

Chapter 2, "SPECIFICATIONS", consists of the following sections:

|     |                                     |    |
|-----|-------------------------------------|----|
| 2.1 | INPUT POWER .....                   | 12 |
| 2.2 | ENVIRONMENTAL CONDITIONS .....      | 25 |
| 2.3 | SPECIFICATIONS OF THE MODULES ..... | 33 |
| 2.4 | WEIGHT .....                        | 43 |

## 2.1 INPUT POWER

### Power supply of 200-V input series


#### (1) Power specification

| Item                                       | Specification                                                                                                                                   |
|--------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------|
| Main power supply voltage                  | Three-phase 200 VAC to 240 VAC                                                                                                                  |
| Power supply voltage for the control       | Single-phase 200 VAC to 240 VAC (input from connector CX1A)                                                                                     |
| Allowable voltage deviation                | -15% to +10% (including voltage variation due to load)                                                                                          |
| Instantaneous power failure guarantee time | 3ms                                                                                                                                             |
| Power frequency                            | 50/60Hz, $\pm 1$ Hz                                                                                                                             |
| Power supply unbalance                     | $\pm 5\%$ of the rated voltage or less                                                                                                          |
| Power supply impedance (Note)              | The voltage variation must be within $\pm 7\%$ when a maximum output is produced for voltage at non-load time (power running and regeneration). |

#### NOTE

When the power supply impedance is high, and the voltage variation exceeds the specified values, an alarm (DC link undervoltage alarm or DC link overvoltage alarm) can be issued in  $\alpha i$  PS, or the output of the motor can decrease.

[Method of checking power supply impedance]

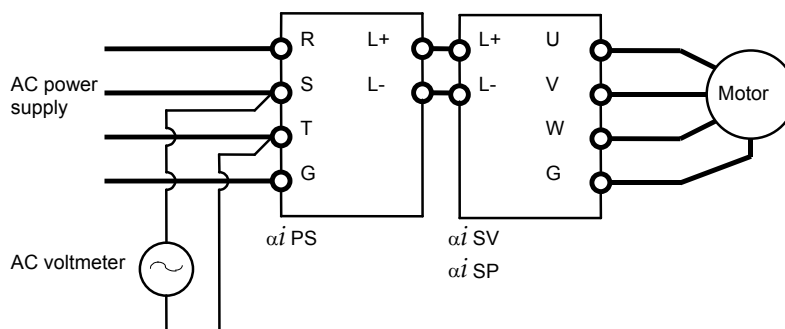

$$\frac{E0 - E1}{E0} \times 100(\%) < 7(\%)$$

E0 : Voltage at non-load time

E1 : Voltage at maximum output time (power running and regeneration)

- (2) The power supply for  $\alpha i$  PS control (power supply input of CX1A) must be turned on before or at the same time when the CNC is turned on. For the timing of power-on at the same time when the CNC is turned on, refer to the chapter of the power supply in the hardware connection manual of the CNC used.



- (3) It is recommended that a capacitor unit for power-factor improvement not be installed. This is because the capacitor unit for power-factor improvement may adversely affect power regeneration.
- (4) The rated output of the motor is guaranteed for the rated input voltage. If the input voltage changes, the rated output may not appear even when the input voltage change is within the allowable range.
- (5) When the power supply is used in an area where the input voltage is not within the range of 200 to 240 VAC, a power transformer is required. When a power transformer is to be provided by the user, the power must satisfy the specifications listed below.

 $\alpha iPS$ 

|                              | $\alpha iPS$<br>5.5 | $\alpha iPS$<br>11 | $\alpha iPS$<br>15 | $\alpha iPS$<br>26 | $\alpha iPS$<br>30 | $\alpha iPS$<br>37 | $\alpha iPS$ 55<br>(45kW output) | $\alpha iPS$ 55<br>(55kW output) |
|------------------------------|---------------------|--------------------|--------------------|--------------------|--------------------|--------------------|----------------------------------|----------------------------------|
| Rated capacity (kVA)         | 9                   | 17                 | 22                 | 37                 | 44                 | 53                 | 64                               | 79                               |
| Secondary current (A)        | 26                  | 49                 | 63                 | 106                | 127                | 153                | 185                              | 228                              |
| Secondary output voltage     | 200 to 240V         |                    |                    |                    |                    |                    |                                  |                                  |
| Secondary voltage regulation | 5%                  |                    |                    |                    |                    |                    |                                  |                                  |
| Secondary voltage deviation  | $\pm 3\%$           |                    |                    |                    |                    |                    |                                  |                                  |

 $\alpha iPS_R$ 


|                              | $\alpha iPS_R$ 3<br>(2kW output) | $\alpha iPS_R$ 3<br>(3kW output) | $\alpha iPS_R$ 5.5<br>(5.5kW output) | $\alpha iPS_R$ 5.5<br>(7.5kW output) |
|------------------------------|----------------------------------|----------------------------------|--------------------------------------|--------------------------------------|
| Rated capacity (kVA)         | 3.5                              | 5                                | 9                                    | 12                                   |
| Secondary current (A)        | 10                               | 14.5                             | 26                                   | 35                                   |
| Secondary output voltage     | 200 to 240V                      |                                  |                                      |                                      |
| Secondary voltage regulation | 5%                               |                                  |                                      |                                      |
| Secondary voltage deviation  | $\pm 3\%$                        |                                  |                                      |                                      |

\* The secondary current indicates the current value observed when the secondary output voltage is 200 V.

- (6) Ground  
The main circuit and 200V control power supply must be grounded through the neutral point or one phase of the three-phase power supply.
- (7) Noise filter  
To satisfy the EMC regulation enforced in the EU countries, a noise filter must be installed in the power supply input section.

## Power supply of 400-V input series


### (1) Power specification

| Item                                       | Specification                                                                                                                                                                                    |
|--------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Main power supply voltage                  | Three-phase 400 VAC to 480 VAC<br>Star connection, neutral grounding (For details, see Items (5) and (6).)<br> |
| Power supply voltage for the control       | Single-phase 200 VAC to 240 VAC (input from connector CX1A)<br>(For details, see Item (7).)                                                                                                      |
| Allowable voltage deviation                | -15% to +10% (including voltage variation due to load)                                                                                                                                           |
| Instantaneous power failure guarantee time | 3ms                                                                                                                                                                                              |
| Power frequency                            | 50/60Hz, $\pm 1$ Hz                                                                                                                                                                              |
| Power supply unbalance                     | $\pm 5\%$ of the rated voltage or less                                                                                                                                                           |
| Power supply impedance (Note)              | The voltage variation must be within $\pm 7\%$ when a maximum output is produced for voltage at non-load time (power running and regeneration).                                                  |

### NOTE

When the power supply impedance is high, and the voltage variation exceeds the specified values, alarm (DC link undervoltage alarm or DC link overvoltage alarm) can be issued in  $\alpha i$  PS, or the output of the motor can decrease.

[Method of checking power supply impedance]

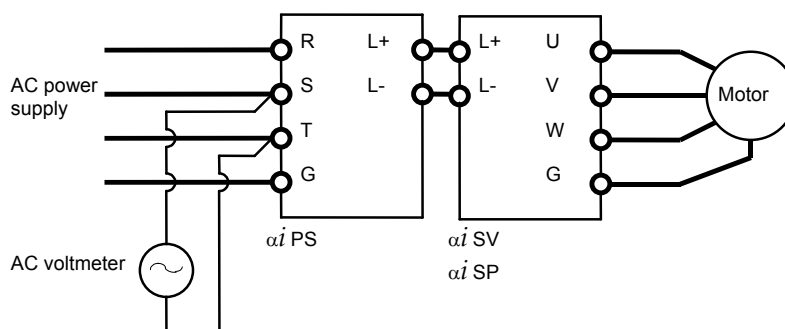

$$\frac{E0 - E1}{E0} \times 100(\%) < 7(\%)$$

E0 : Voltage at non-load time

E1 : Voltage at maximum output time (power running and regeneration)

- (2) The power supply for  $\alpha i$  PS control (power supply input of CX1A) must be turned on before or at the same time when the CNC is turned on. For the timing of power-on at the same time when the CNC is turned on, refer to the chapter of the power supply in the hardware connection manual of the CNC used.
- (3) It is recommended that a capacitor unit for power-factor improvement not be installed. This is because the capacitor unit for power-factor improvement may adversely affect power regeneration.
- (4) The rated output of the motor is guaranteed for the rated input voltage. If the input voltage changes, the rated output may not appear even when the input voltage change is within the allowable range.
- (5) Power supply voltage for the main circuit
  - The power specification of the main circuit for the 400-V input series of the  $\alpha i$  series servo amplifier is as follows:
    - <1> Star connection
    - <2> Neutral grounding on the power supply side
    - <3> A PE is provided on the power line. (The PE of the amplifier and motor is connected to the PE of the power line.)
    - <4> The inter-phase voltage of the power supply is 400 VAC to 480 VAC (-15%, +10%).
  - If the power supply does not satisfy the conditions above, the power supply needs to be converted to a power supply for neutral grounding by using a star connection and an isolating-transformer.
  - The 400-V input series of the  $\alpha i$  series servo amplifier is designed in compliance with the safety standard EN50178 to implement insulation design of the pattern and components of the printed circuit board by ensuring that the phase voltage of the power supply and the voltage between grounds connected to the neutral point of the star connection are AC 300 Vrms or below.

Accordingly, if the power supply does not satisfy the conditions above, the pattern and components of the printed circuit board are poorly insulated. This can cause very dangerous states including a failure in servo amplifier operation and the occurrence of a high voltage at exposed areas.


## (6) Example of connecting the Power supply of the main circuit

| No. | Power system    | Power specification                                                                                                                                                                                                                                           | Power supply of amplifier                                                                                                                                                                                                                                                                                                                                                                                                         |
|-----|-----------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1   | TN-power system | <ul style="list-style-type: none"> <li>Star connection</li> <li>Neutral grounding on the power supply side</li> <li>PE provided on the power line</li> <li>Power supply voltage specification 400 VAC to 480 VAC (-15%,+10%)</li> </ul>                       | <ul style="list-style-type: none"> <li>Directly connectable to the power supply (No transformer is required.)</li> </ul>                                                                                                                                                                                                                                                                                                          |
| 2   | TN-power system | <ul style="list-style-type: none"> <li>Star connection</li> <li>Neutral grounding on the power supply side</li> <li>PE provided on the power line</li> <li>Power supply voltage specification Not within the range 400 VAC to 480 VAC (-15%, +10%)</li> </ul> | <p>[When the power supply voltage is lower than the specified power supply voltage]<br/>The power supply voltage is increased with an auto-transformer.</p> <p>[When the power supply voltage is higher than the specified power supply voltage]<br/>The power supply voltage is decreased with an auto-transformer.</p> <p>Before starting to use the power supply, check that it conforms to the relevant safety standards.</p> |
| 3   | TN-power system | <ul style="list-style-type: none"> <li>Delta connection</li> <li>Single-phase grounding on the power supply side</li> <li>PE provided on the power line</li> </ul>                                                                                            | <ul style="list-style-type: none"> <li>An isolating-transformer is used.</li> <li>A star connection is made on the secondary side of an isolating-transformer, and the neutral point is grounded.</li> </ul>                                                                                                                                                                                                                      |
| 4   | TT-power system | <ul style="list-style-type: none"> <li>Star connection</li> <li>Neutral grounding on the power supply side</li> <li>No PE provided on the power line</li> </ul>                                                                                               |                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| 5   | TT-power system | <ul style="list-style-type: none"> <li>Delta connection</li> <li>Single-phase grounding on the power supply side</li> <li>No PE provided on the power line</li> </ul>                                                                                         |                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| 6   | IT-power system | <ul style="list-style-type: none"> <li>Star connection</li> <li>No direct ground connection made on the power supply side</li> <li>No PE provided on the power line</li> </ul>                                                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| 7   | IT-power system | <ul style="list-style-type: none"> <li>Delta connection</li> <li>No direct ground connection made on the power supply side</li> <li>No PE provided on the power line</li> </ul>                                                                               |                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|     |                 |                                                                                                                                                                                                                                                               | <ul style="list-style-type: none"> <li>An isolating-transformer is used.</li> <li>A star connection is made on the secondary side of an isolating-transformer, and the neutral point is grounded.</li> </ul>                                                                                                                                                                                                                      |

\* The TN-power system, TT-power system, and IT-power system are based on the DC power distribution system standard IEC60364.


(a) TN-power system

| No. | Power system    | Power specification                                                                                                                                                                                                                     | Power supply of amplifier                                                                                                |
|-----|-----------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------|
| 1   | TN-power system | <ul style="list-style-type: none"> <li>Star connection</li> <li>Neutral grounding on the power supply side</li> <li>PE provided on the power line</li> <li>Power supply voltage specification 400 VAC to 480 VAC (-15%,+10%)</li> </ul> | <ul style="list-style-type: none"> <li>Directly connectable to the power supply (No transformer is required.)</li> </ul> |

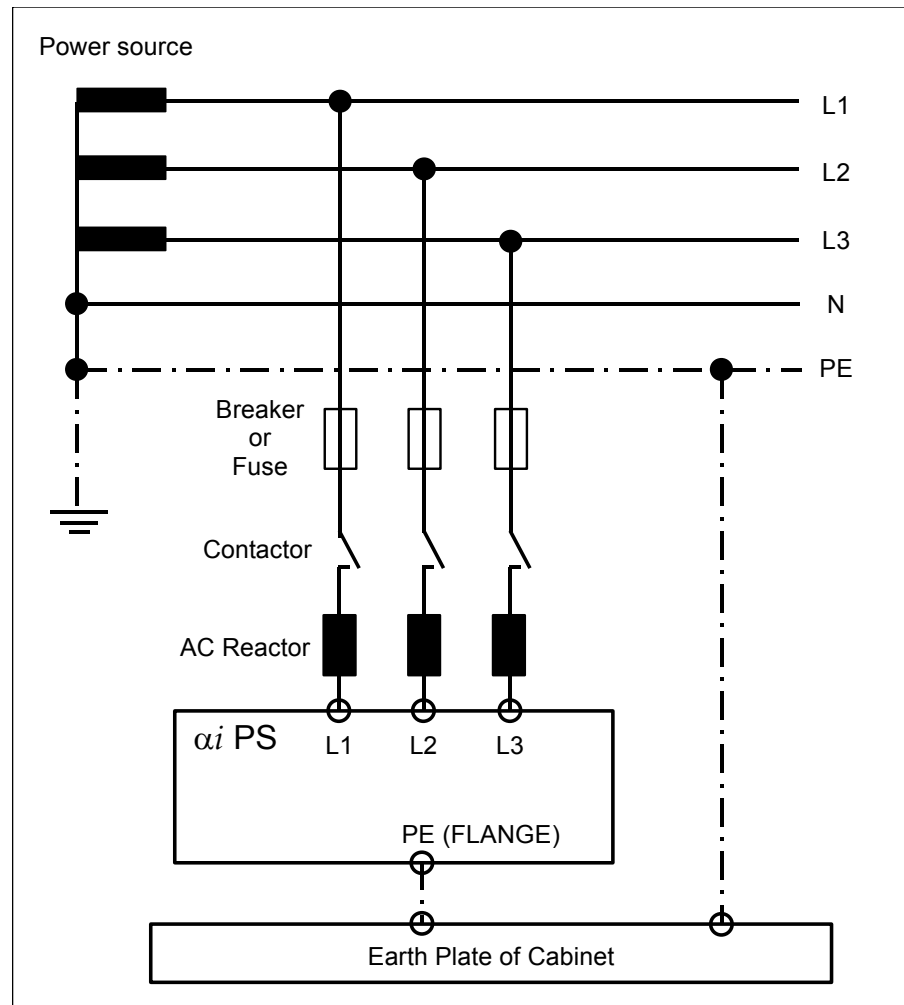


## (b) TN-power system

| No. | Power system    | Power specification                                                                                                                                                                                                                                               | Power supply of amplifier                                                                                                                                                                                                                                                                                                                                                                                                         |
|-----|-----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 2   | TN-power system | <ul style="list-style-type: none"> <li>Star connection</li> <li>Neutral grounding on the power supply side</li> <li>PE provided on the power line</li> <li>Power supply voltage specification<br/>Not within the range 400 VAC to 480 VAC (-15%, +10%)</li> </ul> | <p>[When the power supply voltage is lower than the specified power supply voltage]<br/>The power supply voltage is increased with an auto-transformer.</p> <p>[When the power supply voltage is higher than the specified power supply voltage]<br/>The power supply voltage is decreased with an auto-transformer.</p> <p>Before starting to use the power supply, check that it conforms to the relevant safety standards.</p> |

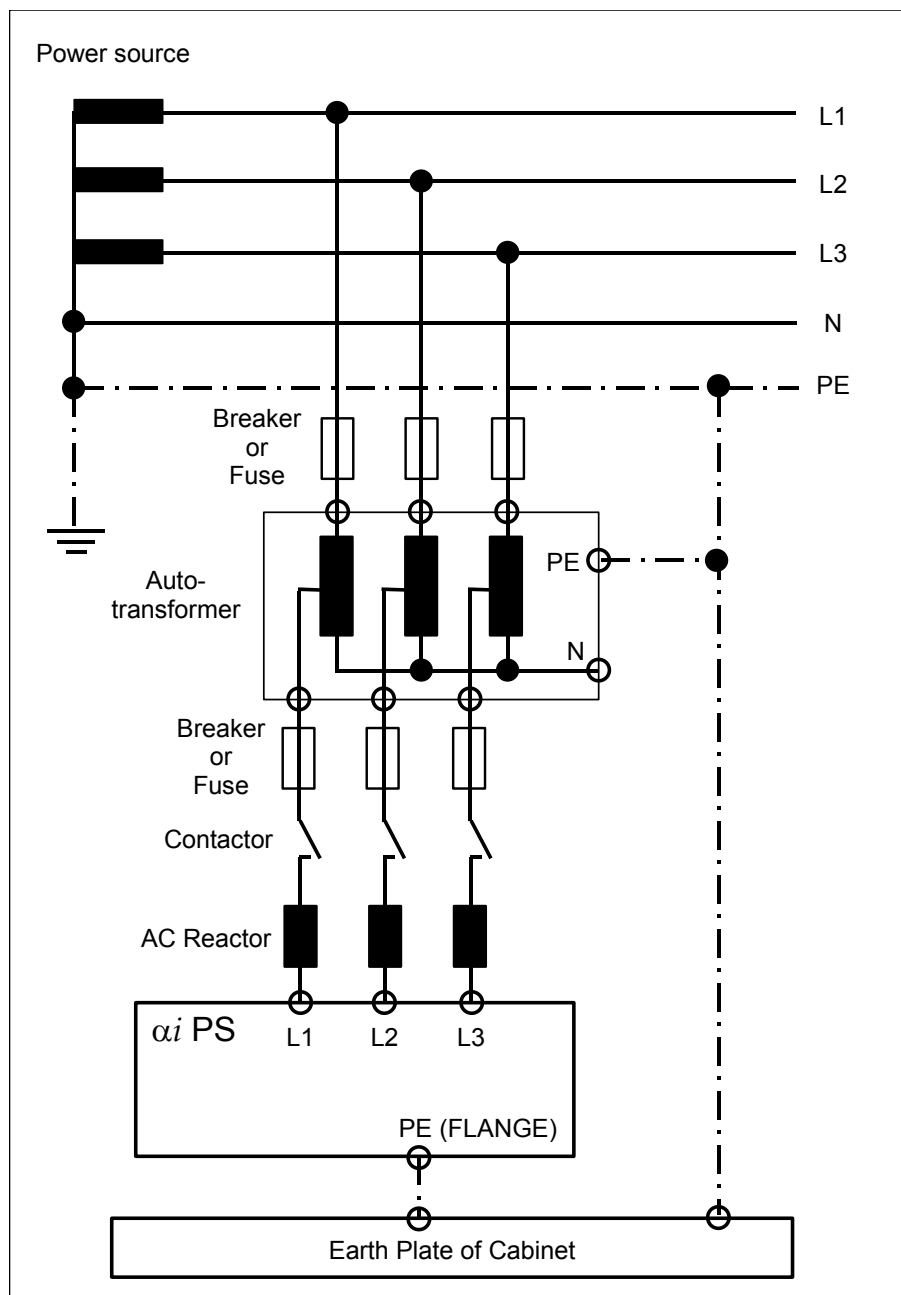


## (c) TN-power system

| No. | Power system    | Power specification                                                                                                                                                | Power supply of amplifier                                                                                                                                                                                    |
|-----|-----------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 3   | TN-power system | <ul style="list-style-type: none"> <li>Delta connection</li> <li>Single-phase grounding on the Power supply side</li> <li>PE provided on the power line</li> </ul> | <ul style="list-style-type: none"> <li>An isolating-transformer is used.</li> <li>A star connection is made on the secondary side of an isolating-transformer, and the neutral point is grounded.</li> </ul> |

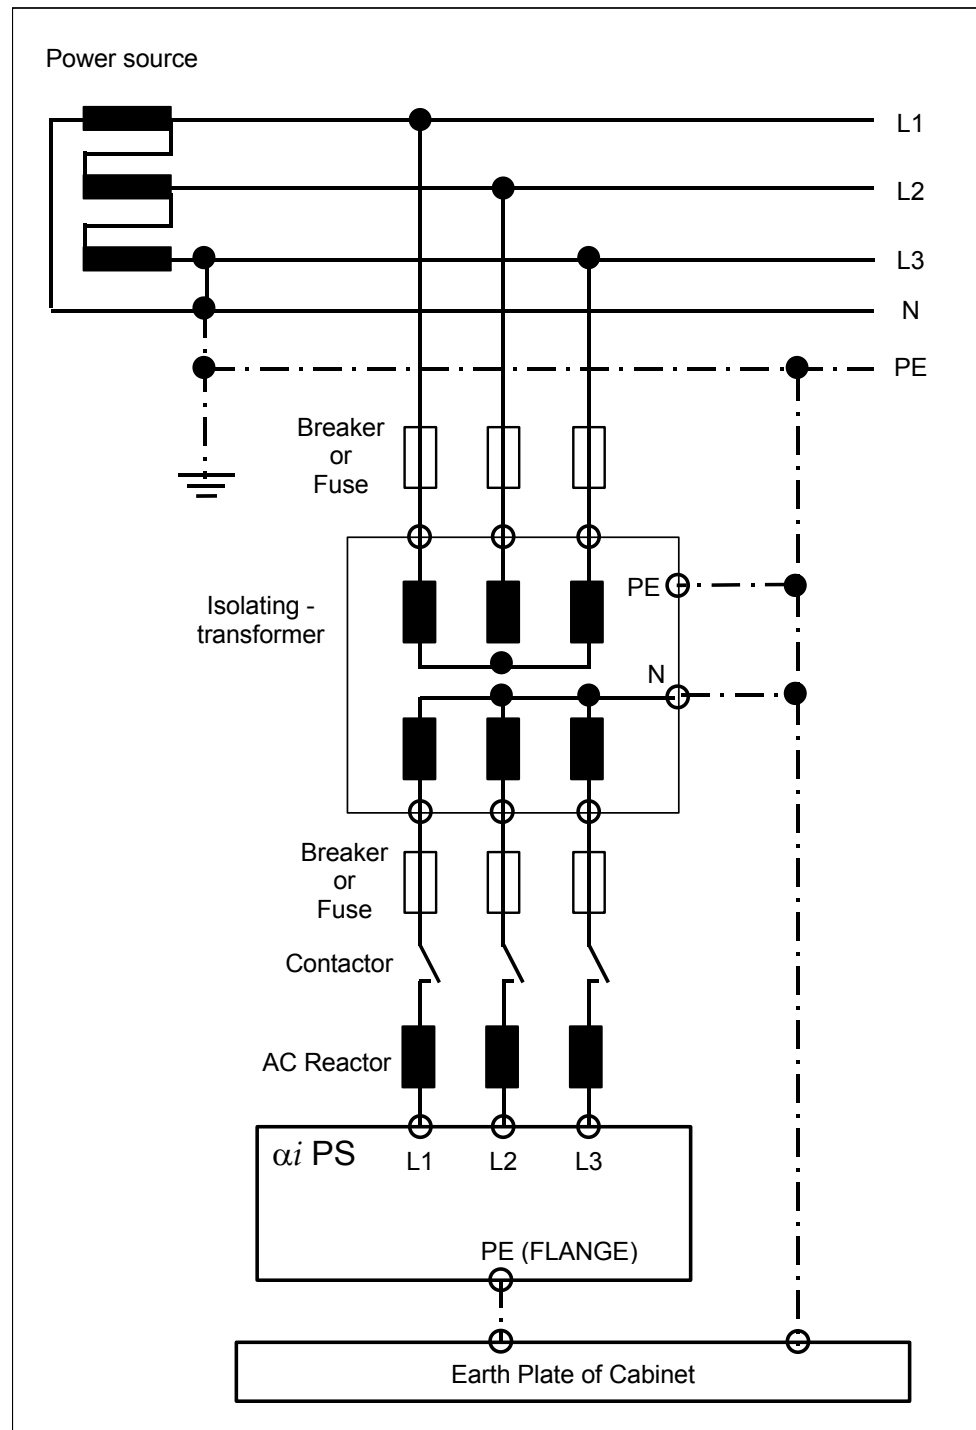

## (d) TT-power system


| No. | Power system    | Power specification                                                                                                                                             | Power supply of amplifier                                                                                                                                                                                    |
|-----|-----------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 4   | TT-power system | <ul style="list-style-type: none"> <li>Star connection</li> <li>Neutral grounding on the power supply side</li> <li>No PE provided on the power line</li> </ul> | <ul style="list-style-type: none"> <li>An isolating-transformer is used.</li> <li>A star connection is made on the secondary side of an isolating-transformer, and the neutral point is grounded.</li> </ul> |

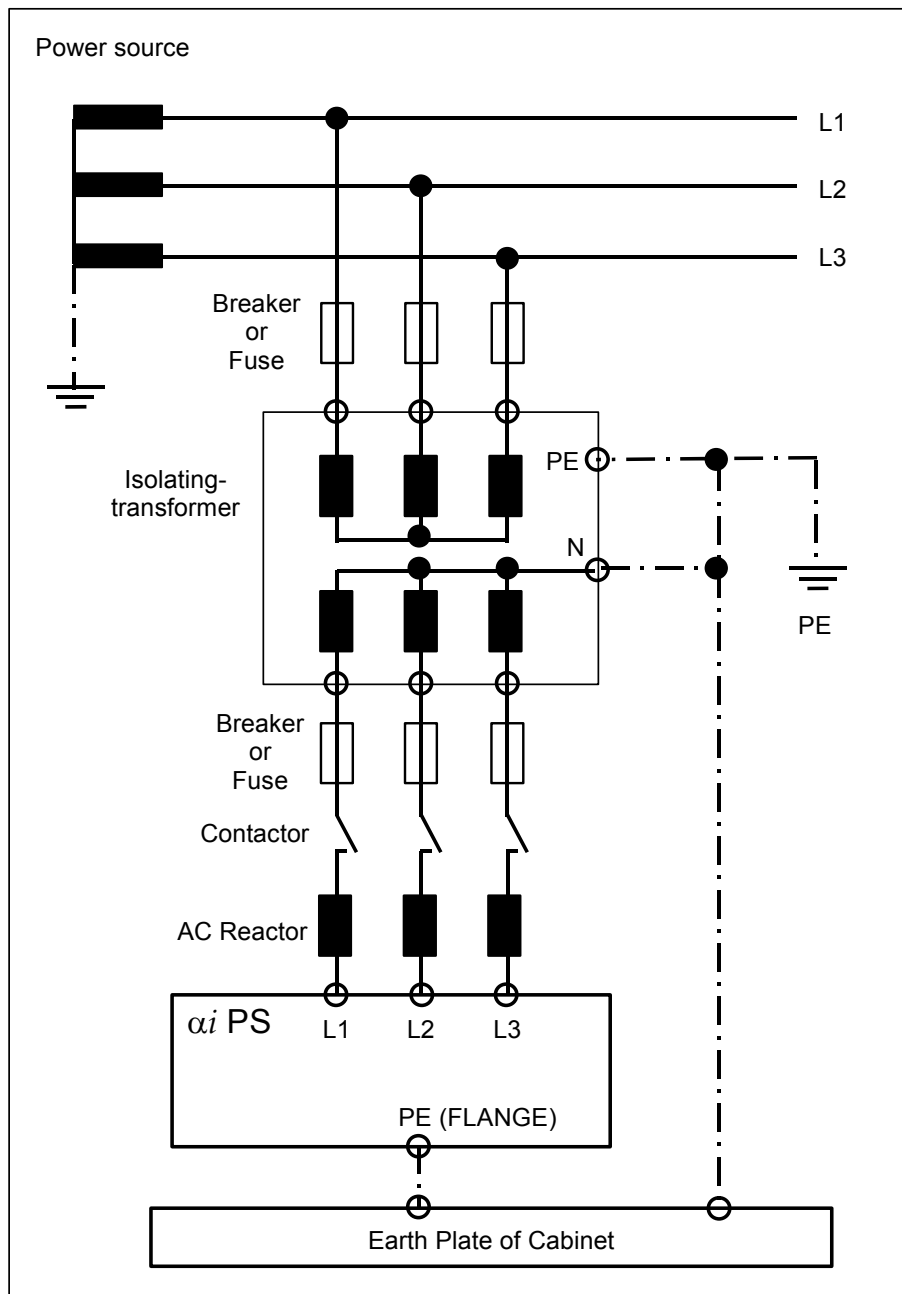




## (e) TT-power system

| No. | Power system    | Power specification                                                                                                                                                   | Power supply of amplifier                                                                                                                                                                                    |
|-----|-----------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 5   | TT-power system | <ul style="list-style-type: none"> <li>Delta connection</li> <li>Single-phase grounding on the power supply side</li> <li>No PE provided on the power line</li> </ul> | <ul style="list-style-type: none"> <li>An isolating-transformer is used.</li> <li>A star connection is made on the secondary side of an isolating-transformer, and the neutral point is grounded.</li> </ul> |

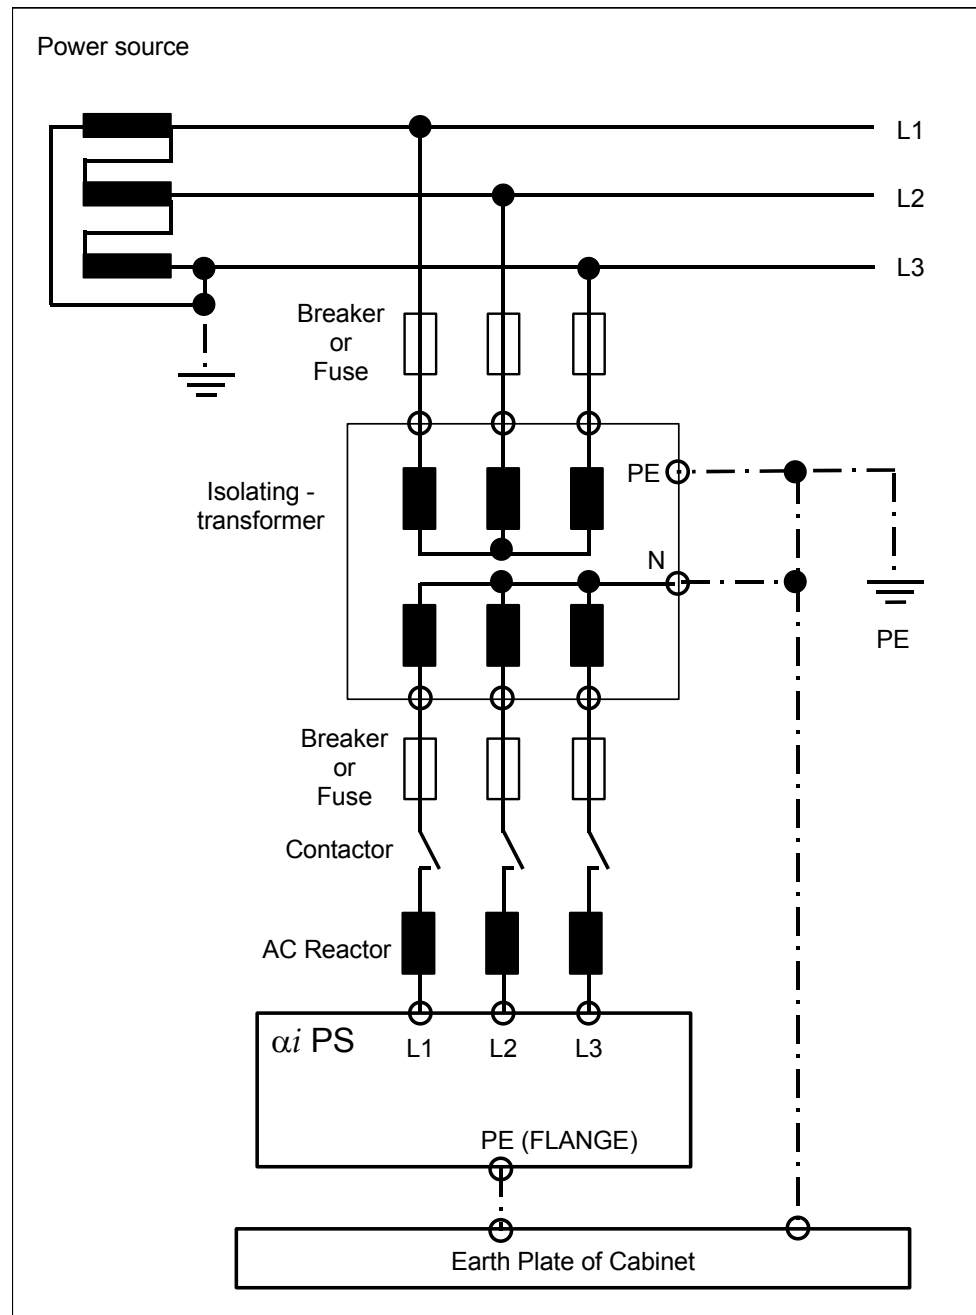


## (f) IT-power system

| No. | Power system    | Power specification                                                                                                                                                            | Power supply of amplifier                                                                                                                                                                                    |
|-----|-----------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 6   | IT-power system | <ul style="list-style-type: none"> <li>Star connection</li> <li>No direct ground connection made on the power supply side</li> <li>No PE provided on the power line</li> </ul> | <ul style="list-style-type: none"> <li>An isolating-transformer is used.</li> <li>A star connection is made on the secondary side of an isolating-transformer, and the neutral point is grounded.</li> </ul> |

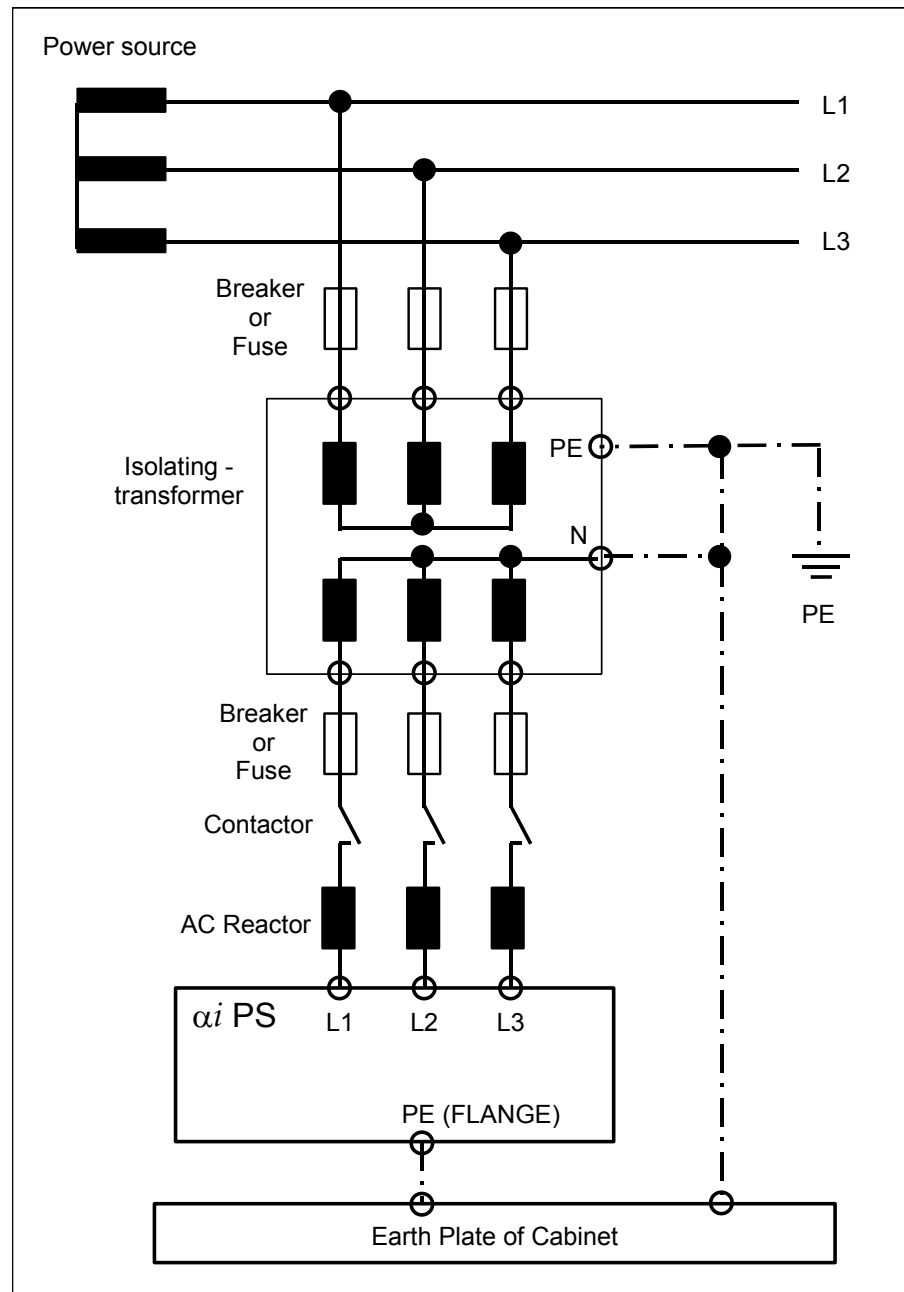

## (g) IT-power system

| No. | Power system    | Power specification                                                                                                                                                             | Power supply of amplifier                                                                                                                                                                                    |
|-----|-----------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7   | IT-power system | <ul style="list-style-type: none"> <li>Delta connection</li> <li>No direct ground connection made on the power supply side</li> <li>No PE provided on the power line</li> </ul> | <ul style="list-style-type: none"> <li>An isolating-transformer is used.</li> <li>A star connection is made on the secondary side of an isolating-transformer, and the neutral point is grounded.</li> </ul> |

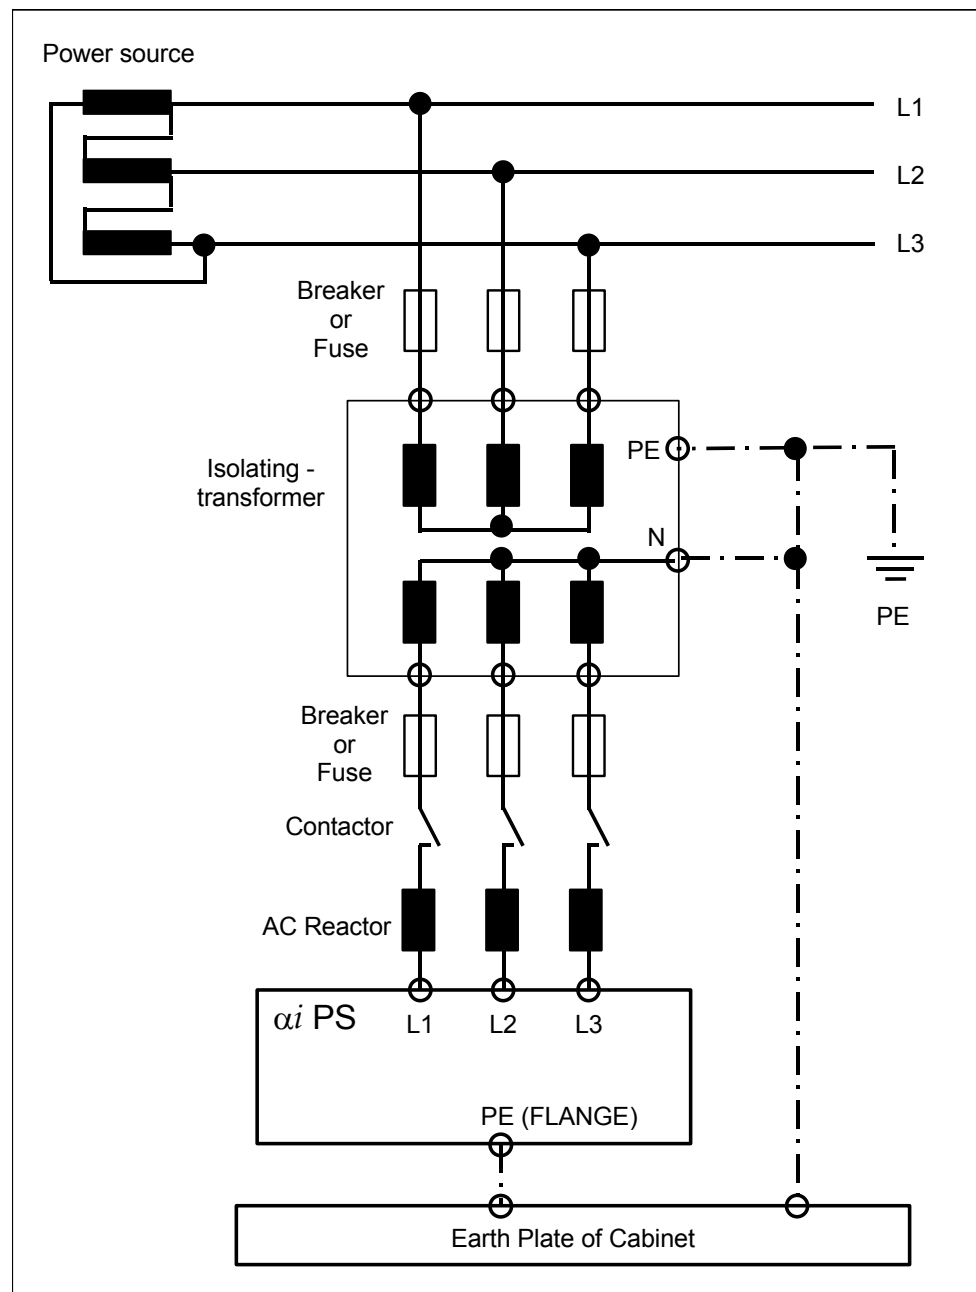


## (7) Control power supply connection

- Specification of the control power supply voltage for the 400V input series of the  $\alpha i$  series servo amplifier  
Single-phase 200 VAC to 240 VAC (-15%, +10%)
- When the power supply has a neutral point, power can be supplied from the neutral point and phase voltage to the control power supply.

When an isolating-transformer is used, connect one phase of the control power supply to the neutral point on the secondary side of the isolating-transformer.

- (a) Example of connection when the three-phase power supply voltage of the main circuit is 400 VAC to 415 VAC (-15%, +10%)


With the following connection, the control power supply voltage can be converted to single-phase 200 VAC to 240 VAC (-15%, +10%):

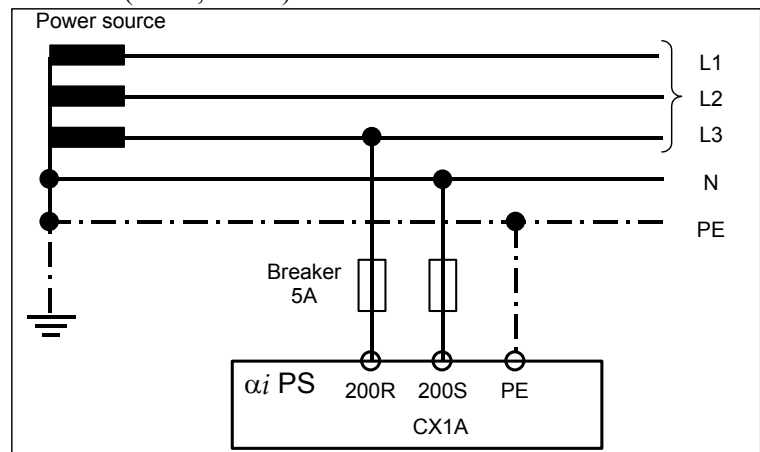

- (b) Example of connection when the three-phase power supply voltage of the main circuit is 460 VAC or more

By using an auto-transformer, ensure that the single-phase power supply voltage for the control power supply is 200 VAC to 240 VAC (-15%, +10%).

(NOTE) Before starting to use the auto-transformer, check that it conforms to the relevant safety standards.

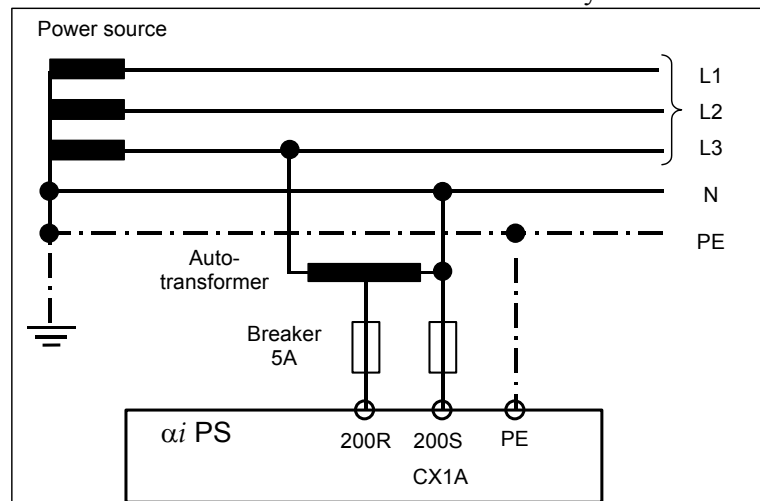

## 2.2 ENVIRONMENTAL CONDITIONS

The servo amplifier  $\alpha i$  series must be installed in a sealed type cabinet to satisfy the following environmental requirements. For how to design such a cabinet, see Appendix G, "EXAMPLES OF RECOMMENDED POWER MAGNETICS CABINETS FOR SERVO AMPLIFIER INSTALLATION".

- (1) Ambient Temperature  
Ambient temperature of the unit :  
0 to 55°C (at operation)  
-20 to 60°C (at keeping and transportation)
- (2) Humidity  
Normally 90% RH or below, and condensation-free
- (3) Vibration  
In operation : Below 0.5G
- (4) Atmosphere  
Prevent conductive, flammable, or corrosive foreign matters, mists, or water droplets from entering the unit



### WARNING

If conductive or flammable foreign matters enter the unit, explosion or corruption may be caused.  
If corrosive or conductive mists or water droplets are attached to an electronic circuit, unexpected operation may be caused in the circuit.  
The electronic circuit portion must be installed in an environment of pollution level 2 specified by IEC60664-1. To achieve pollution level 2 in a severe machine tool environment, it is generally necessary to install the portion in a cabinet that satisfies IP54.

- (5) Notes on Installation  
The  $\alpha i$  series servo amplifier is designed to be installed in the power magnetism cabinet, with its heat sink projecting through the back of the cabinet. This carries away the heat generated by the semiconductors, thus preventing heat from building up in the cabinet as much as possible. Therefore, note the following when installing the amplifier.
  - (a) Take appropriate measures to prevent coolant, oil mist, or chips from being adhered to the radiator and fan motors. A deposit of coolant, oil mist, or chips on the radiator or fan motors can lower the cooling efficiency. In some cases, the amplifier characteristics cannot sometimes be satisfied. The deposit may also reduce the service life of the fan motors or semiconductors.

When outside air is drawn in to the radiator, mount an air filter on the air inlet. In addition, ensure to seal doors and parts where cables are drawn in and out.

- (b) No dust or cutting fluid must be able to enter through the exhaust port. The flow of cooling air must not be obstructed.
- (c) The amplifier must be installed where it can be easily inspected, removed, and remounted for maintenance.
- (d) Current lines and signal lines must be separated and noise must be suppressed. See the section 5.3 and the connection manual for each CNC for details.
- (e) Each amplifier must be installed vertically.
- (f) Servo amplifiers are to be arranged horizontally. When arranging servo amplifiers vertically from necessity, note the following:
  - 1) Ensure that cooling air from a lower amplifier does not blow directly against the upper amplifier. Otherwise, radiation performance can degrade and the rated output may not be satisfied.
  - 2) Ensure that the flow of cooling air of a lower amplifier is not impeded.
- (g) Maintenance areas must be reserved for each servo amplifier.


## (6) Derating

Consider derating as shown below, according to ambient temperatures.


(a)  $\alpha i$  SV series

The solid line indicates derating when HRV2 is applied, the dotted line indicates derating when HRV3 is applied, and the dot-dash line indicates derating when HRV4 is applied.

$\alpha i$  SV 40 to 160

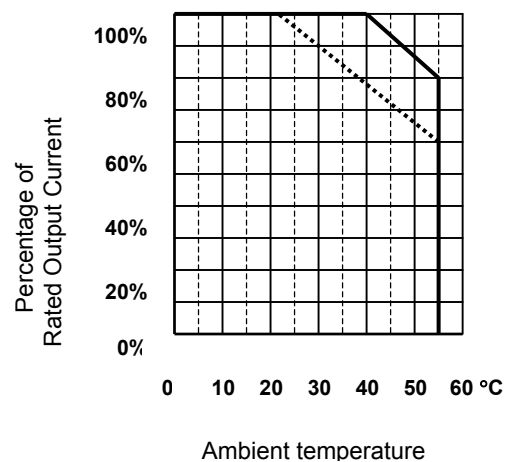


$\alpha i$  SV 20/40 to 160/160

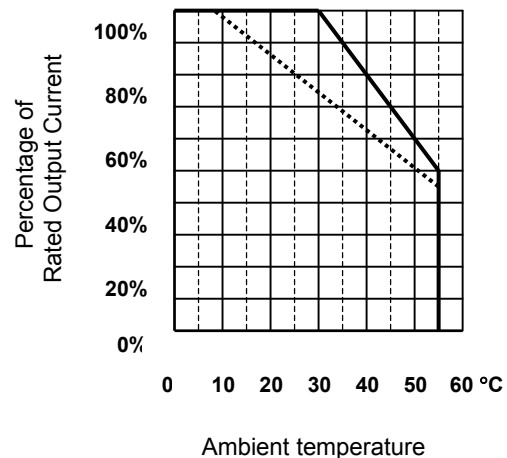
**CAUTION**

HRV4 cannot be applied to A06B-6114-Hxxx and -6124-Hxxx.


$\alpha i$  SV 4 to 20  
 $\alpha i$  SV 4/4 to  $\alpha i$  SVM20/20  
 $\alpha i$  SV 4/4/4 to  $\alpha i$  SV 20/20/40

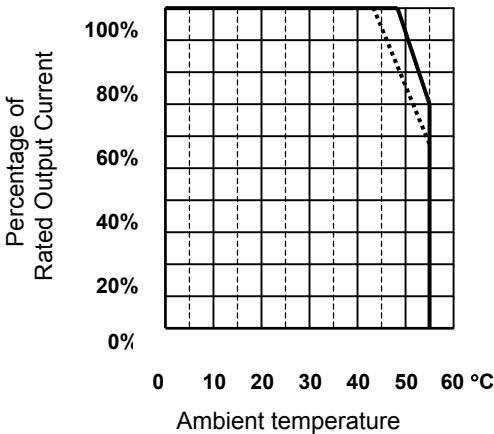

$\alpha i$  SV 360

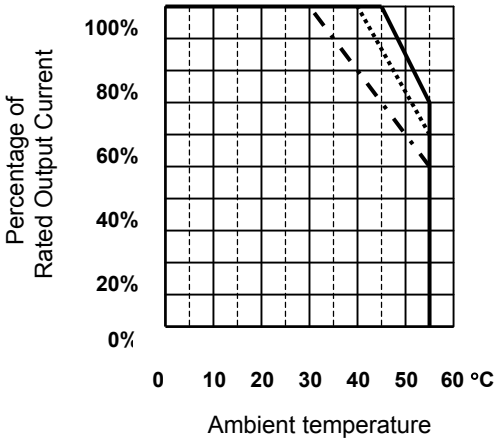

$\alpha i$  SV 20L to 160L (When HRV4 is applied)

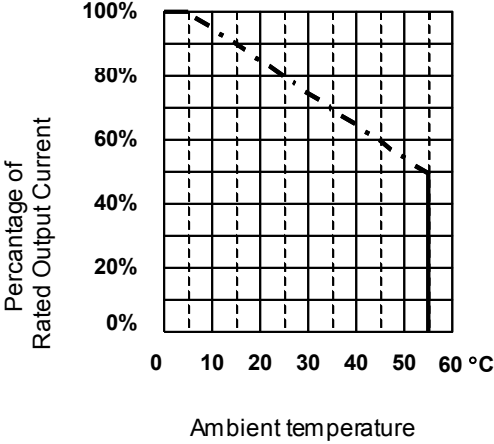


**CAUTION**


HRV4 cannot be applied to A06B-6114-Hxxx and -6124-Hxxx.




$\alpha i$  SV 20/20L to 80/80L (When HRV4 is applied)

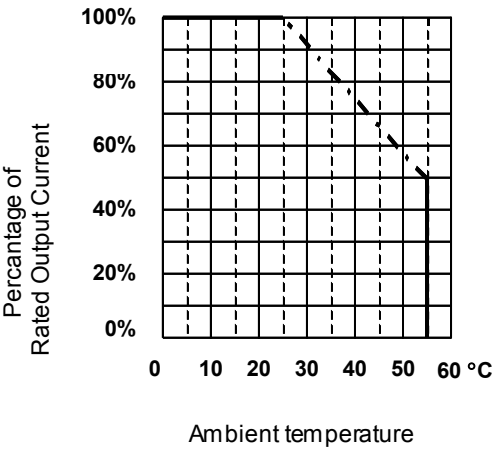

$\alpha i$  SV 10HV to 80HV

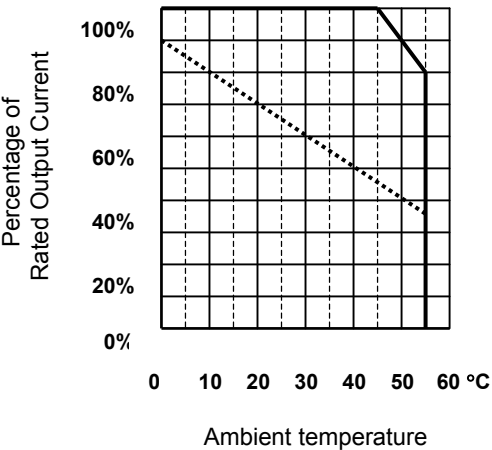


$\alpha i$  SV 180HV

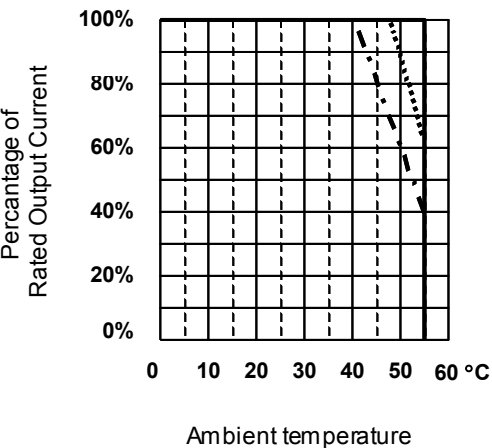


**CAUTION**

HRV4 cannot be applied to A06B-6114-Hxxx and -6124-Hxxx.


$\alpha i$  SV 360HV

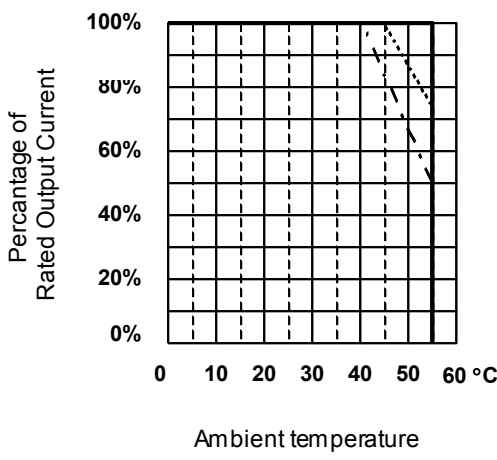


$\alpha i$  SV 10/10HV to 20/20HV

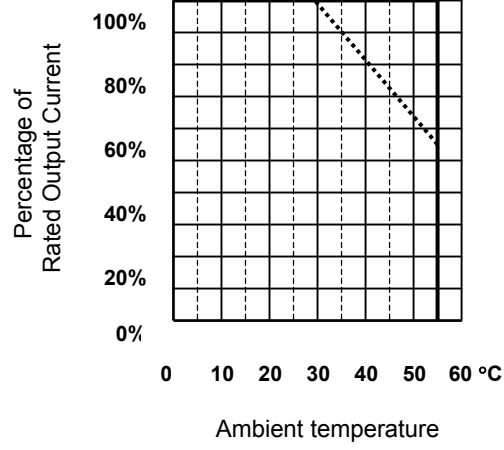


$\alpha i$  SV 20/40HV to 80/80HV

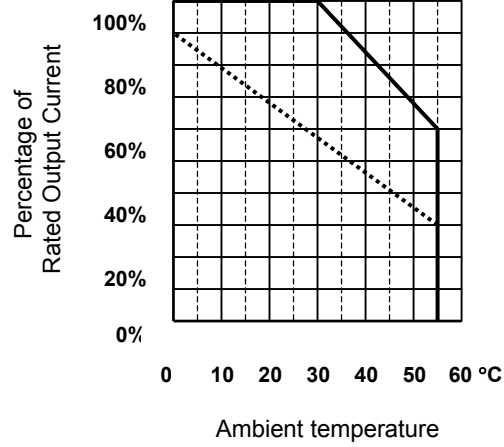

$\alpha i$  SV 10HVL to 80HVL (When HRV4 is applied)

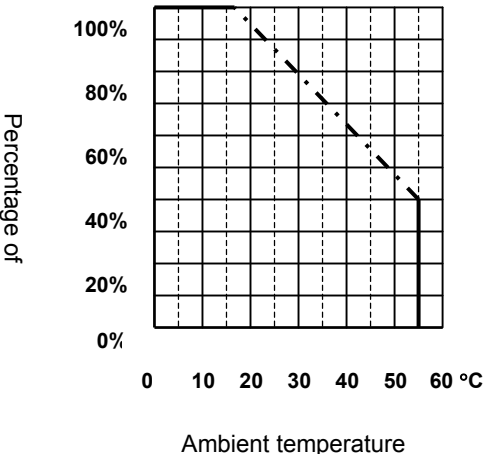


$\alpha i$  SV 10/10HVL to 40/40HVL (When HRV4 is applied)

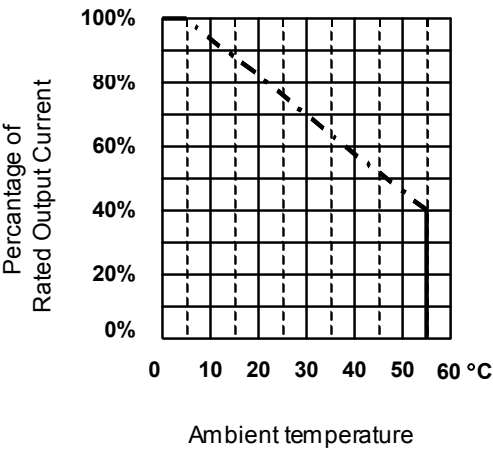

**CAUTION**

HRV4 cannot be applied to A06B-6114-Hxxx and -6124-Hxxx.

- (b)  $\alpha i$  SP series  
 $\alpha i$  SP 2.2 to 55  
 $\alpha i$  SP 5.5HV to 100HV

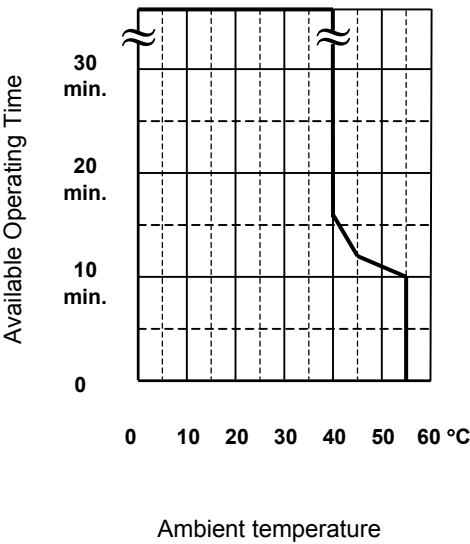

## 2.3 SPECIFICATIONS OF THE MODULES

### 2.3.1 $\alpha i$ PS series

#### 200-V input series - power source regeneration type

| Model                          |               | $\alpha i$ PS 5.5                                   | $\alpha i$ PS 11 | $\alpha i$ PS 15 | $\alpha i$ PS 26 | $\alpha i$ PS 30 | $\alpha i$ PS 37 | $\alpha i$ PS 55 |
|--------------------------------|---------------|-----------------------------------------------------|------------------|------------------|------------------|------------------|------------------|------------------|
| Power supply (Note 1)          | Main circuit  | 200 to 240VAC +10%,-15%,3 $\phi$ 50/60Hz, $\pm$ 1Hz |                  |                  |                  |                  |                  |                  |
|                                | Control power | 200 to 240VAC +10%,-15%,1 $\phi$ 50/60Hz, $\pm$ 1Hz |                  |                  |                  |                  |                  |                  |
| Power equipment capacity       | Main circuit  | 9kVA                                                | 17kVA            | 22kVA            | 37kVA            | 44kVA            | 53kVA            | 79kVA            |
|                                | Control power | 0.7kVA                                              |                  |                  |                  |                  |                  |                  |
| Rated output capacity (Note 2) |               | 6.8kW                                               | 13.2kW           | 17.5kW           | 29.8kW           | 35kW             | 43kW             | 65kW             |
| Control method                 |               | Regenerative control (power source generation)      |                  |                  |                  |                  |                  |                  |

Output capacities for motor selection

| Model                          |  | $\alpha i$ PS 5.5 | $\alpha i$ PS 11 | $\alpha i$ PS 15 | $\alpha i$ PS 26 | $\alpha i$ PS 30 | $\alpha i$ PS 37 | $\alpha i$ PS 55 |
|--------------------------------|--|-------------------|------------------|------------------|------------------|------------------|------------------|------------------|
| Rated output capacity          |  | 5.5kW             | 11kW             | 15kW             | 26kW             | 30kW             | 37kW             | 55kW             |
| Maximum output capacity        |  | 13kW              | 24kW             | 34kW             | 48kW             | 64kW             | 84kW             | 125kW            |
| Peak maximum output capability |  | 22kW              | 38kW             | 51kW             | 73kW             | 85kW             | 106kW            | 192kW            |

#### NOTE

- 1 A power transformer is necessary for voltages other than those listed in above table.
- 2 When selecting an  $\alpha i$  PS unit, use "Output capacities for motor selection".
- 3 The values in the above table are applied when A06B-6140-Hxxxx is used. When A06B-6110-Hxxxx is used, the values of the maximum output capacity and peak maximum output capacity differ as shown in the table below.

Output capacities for motor selection (when A06B-6110-Hxxxx is used)

| Model                          |  | $\alpha i$ PS 5.5 | $\alpha i$ PS 11 | $\alpha i$ PS 15 | $\alpha i$ PS 26 | $\alpha i$ PS 30 | $\alpha i$ PS 37 | $\alpha i$ PS 55 |
|--------------------------------|--|-------------------|------------------|------------------|------------------|------------------|------------------|------------------|
| Maximum output capacity        |  | 11kW              | 20kW             | 28kW             | 40kW             | 53kW             | 70kW             | 104kW            |
| Peak maximum output capability |  | 20kW              | 34kW             | 46kW             | 66kW             | 77kW             | 96kW             | 174kW            |

**200-V input series - resister discharge type ( $\alpha i$  PS<sub>R</sub>)**

| Model                          |               | $\alpha i$ PS <sub>R</sub> 3              | $\alpha i$ PS <sub>R</sub> 5.5 |
|--------------------------------|---------------|-------------------------------------------|--------------------------------|
| Power supply (Note 1)          | Main circuit  | 200 to 240VAC +10%,-15%,3 $\phi$          | 50/60Hz, $\pm$ 1Hz             |
|                                | Control power | 200 to 240VAC +10%,-15%,1 $\phi$          | 50/60Hz, $\pm$ 1Hz             |
| Power equipment capacity       | Main circuit  | 5kVA                                      | 12kVA                          |
|                                | Control power | 0.5kVA                                    |                                |
| Rated output capacity (Note 2) |               | 3.8kW                                     | 9.4kW                          |
| Control method                 |               | Regenerative control (resister discharge) |                                |

Output capacities for motor selection

| Model                   |  | $\alpha i$ PS <sub>R</sub> 3 | $\alpha i$ PS <sub>R</sub> 5.5 |
|-------------------------|--|------------------------------|--------------------------------|
| Rated output capacity   |  | 3kW                          | 7.5kW                          |
| Maximum output capacity |  | 12kW                         | 20kW                           |

**NOTE**

- 1 A power transformer is necessary for voltages other than those listed in above table.
- 2 When selecting an  $\alpha i$  PS<sub>R</sub> unit, use "Output capacities for motor selection".
- 3 The  $\alpha i$  PS<sub>R</sub> 3 and  $\alpha i$  PS<sub>R</sub> 5.5 require regenerative discharge unit.

### 400-V input series - power source regeneration type

| Model                          |               | $\alpha i$ PS<br>11HV                               | $\alpha i$ PS<br>18HV | $\alpha i$ PS<br>30HV | $\alpha i$ PS<br>45HV | $\alpha i$ PS<br>75HV | $\alpha i$ PS<br>100HV |
|--------------------------------|---------------|-----------------------------------------------------|-----------------------|-----------------------|-----------------------|-----------------------|------------------------|
| Power supply (Note 1)          | Main circuit  | 400 to 480VAC +10%,-15%,3 $\phi$ 50/60Hz, $\pm$ 1Hz |                       |                       |                       |                       |                        |
|                                | Control power | 200 to 240VAC +10%,-15%,1 $\phi$ 50/60Hz, $\pm$ 1Hz |                       |                       |                       |                       |                        |
| Power equipment<br>capacity    | Main circuit  | 17kVA                                               | 26kVA                 | 44kVA                 | 64kVA                 | 107kVA                | 143kVA                 |
|                                | Control power | 0.7kVA                                              |                       |                       |                       |                       |                        |
| Rated output capacity (Note 2) |               | 13kW                                                | 21kW                  | 35kW                  | 50kW                  | 82kW                  | 110kW                  |
| Control method                 |               | Regenerative control (power source regeneration)    |                       |                       |                       |                       |                        |

#### Output capacities for motor selection

| Model                          |  | $\alpha i$ PS<br>11HV | $\alpha i$ PS<br>18HV | $\alpha i$ PS<br>30HV | $\alpha i$ PS<br>45HV | $\alpha i$ PS<br>75HV | $\alpha i$ PS<br>100HV |
|--------------------------------|--|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|------------------------|
| Rated output capacity          |  | 11kW                  | 18kW                  | 30kW                  | 45kW                  | 75kW                  | 100kW                  |
| Maximum output capacity        |  | 24kW                  | 42kW                  | 72kW                  | 102kW                 | 144kW                 | 180kW                  |
| Peak maximum output capability |  | 38kW                  | 64kW                  | 96kW                  | 137kW                 | 193kW                 | 220kW                  |

#### NOTE

- 1 A power transformer is necessary for voltages other than those listed in above table.
- 2 When selecting an  $\alpha i$  PS unit, use "Output capacities for motor selection".
- 3 The values in the above table are applied when A06B-6150-Hxxxx is used. When A06B-6120-Hxxxx is used, the values of the maximum output capacity and peak maximum output capacity differ as shown in the table below.

Output capacities for motor selection (when A06B-6120-Hxxx is used)

| Model                          |  | $\alpha i$ PS<br>11HV | $\alpha i$ PS<br>18HV | $\alpha i$ PS<br>30HV | $\alpha i$ PS<br>45HV | $\alpha i$ PS<br>75HV | $\alpha i$ PS<br>100HV |
|--------------------------------|--|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|------------------------|
| Maximum output capacity        |  | 20kW                  | 35kW                  | 60kW                  | 85kW                  | 120kW                 | 150kW                  |
| Peak maximum output capability |  | 34kW                  | 58kW                  | 87kW                  | 124kW                 | 175kW                 | 200kW                  |

### How to calculate the power equipment capacity

Calculate the power equipment capacity using the formula below.

$$\text{Power supply capacity (kVA)} = \frac{\text{Rated capacity calculated in Section 4.3 (kW)}}{\text{Rated capacity of power supply module (kW)}} \times \text{Power supply capacity of power supply module having rated output (kVA)}$$

#### NOTE

Select a Power supply for which, when the motor is accelerated, the input voltage variation does not exceed 7%.

### How to calculate the input current of the $\alpha i$ PS

Calculate the input current of the  $\alpha i$  PS by using the formula below. Refer to the result when selecting the MCC, power cable, and circuit breaker 1, to be connected to the  $\alpha i$  PS input section.  
(Margin for selection: 1 to 1.5 times)

$$\text{PS input current (Arms)} = \frac{\text{Power equipment capacity (kVA)}}{\sqrt{3} \times \text{Nominal supply voltage (Vrms)}} \times 1.2 \text{ (margin)}$$

#### NOTE

Under normal conditions, assume that the nominal supply voltage (Vrms) is 200 Vrms for the 200-V input series or 400 Vrms for the 400-V input series.



## 2.3.2 $\alpha i$ SV series

### Specifications (common)

| Item                        | Specifications                                      |
|-----------------------------|-----------------------------------------------------|
| Main circuit control method | Sine-wave PWM control with transistor (IGBT) bridge |
| Applicable CNC              | 16i-B, 18i-B, 21i-B, 0i-B/C/D, and 30i/31i/32i      |



#### CAUTION

HRV4 cannot be applied to A06B-6114-Hxxx and -6124-Hxxx.

### 200-V input series - 1-axis amplifier

| Name               | Axis | Rated output current<br>[Arms] | Nominal current limit<br>[Apeak] |
|--------------------|------|--------------------------------|----------------------------------|
| $\alpha i$ SV 4    | -    | 1.5                            | 4                                |
| $\alpha i$ SV 20   | -    | 6.5                            | 20                               |
| $\alpha i$ SV 20L  | -    | 6.5                            | 20                               |
| $\alpha i$ SV 40   | -    | 13                             | 40                               |
| $\alpha i$ SV 40L  | -    | 13                             | 40                               |
| $\alpha i$ SV 80   | -    | 19                             | 80                               |
| $\alpha i$ SV 80L  | -    | 19                             | 80                               |
| $\alpha i$ SV 160  | -    | 45                             | 160                              |
| $\alpha i$ SV 160L | -    | 45                             | 160                              |
| $\alpha i$ SV 360  | -    | 115                            | 360                              |

### 200-V input series - 2-axis amplifier

| Name                  | Axis | Rated output current<br>[Arms] | Nominal current limit<br>[Apeak] |
|-----------------------|------|--------------------------------|----------------------------------|
| $\alpha i$ SV 4/4     | L    | 1.5                            | 4                                |
|                       | M    | 1.5                            | 4                                |
| $\alpha i$ SV 4/20    | L    | 1.5                            | 4                                |
|                       | M    | 6.5                            | 20                               |
| $\alpha i$ SV 20/20   | L    | 6.5                            | 20                               |
|                       | M    | 6.5                            | 20                               |
| $\alpha i$ SV 20/40   | L    | 6.5                            | 20                               |
|                       | M    | 13                             | 40                               |
| $\alpha i$ SV 40/40   | L    | 13                             | 40                               |
|                       | M    | 13                             | 40                               |
| $\alpha i$ SV 40/80   | L    | 13                             | 40                               |
|                       | M    | 19                             | 80                               |
| $\alpha i$ SV 80/80   | L    | 19                             | 80                               |
|                       | M    | 19                             | 80                               |
| $\alpha i$ SV 80/160  | L    | 19                             | 80                               |
|                       | M    | 39                             | 160                              |
| $\alpha i$ SV 160/160 | L    | 39                             | 160                              |
|                       | M    | 39                             | 160                              |
| $\alpha i$ SV 20/20L  | L    | 6.5                            | 20                               |
|                       | M    | 6.5                            | 20                               |

| Name                  | Axis | Rated output current<br>[Arms] | Nominal current limit<br>[Apeak] |
|-----------------------|------|--------------------------------|----------------------------------|
| $\alpha i$ SV 20/40L  | L    | 6.5                            | 20                               |
|                       | M    | 13                             | 40                               |
| $\alpha i$ SV 40/40L  | L    | 13                             | 40                               |
|                       | M    | 13                             | 40                               |
| $\alpha i$ SV 40/80L  | L    | 13                             | 40                               |
|                       | M    | 19                             | 80                               |
| $\alpha i$ SV 80/80L  | L    | 19                             | 80                               |
|                       | M    | 19                             | 80                               |
| $\alpha i$ SV 80/160L | L    | 19                             | 80                               |
|                       | M    | 39                             | 160                              |

**NOTE**

The current limit (peak value) is a standard value. It varies by about  $\pm 10\%$ , depending on the circuit constants.

**200-V input series - 3-axis amplifier**

| Name                   | Axis | Rated output current<br>[Arms] | Nominal current limit<br>[Apeak] |
|------------------------|------|--------------------------------|----------------------------------|
| $\alpha i$ SV 4/4/4    | L    | 1.5                            | 4                                |
|                        | M    | 1.5                            | 4                                |
|                        | N    | 1.5                            | 4                                |
| $\alpha i$ SV 20/20/20 | L    | 6.5                            | 20                               |
|                        | M    | 6.5                            | 20                               |
|                        | N    | 6.5                            | 20                               |
| $\alpha i$ SV 20/20/40 | L    | 6.5                            | 20                               |
|                        | M    | 6.5                            | 20                               |
|                        | N    | 13                             | 40                               |

**400-V input series - 1-axis amplifier**

| Name                | Axis | Rated output current<br>[Arms] | Nominal current limit<br>[Apeak] |
|---------------------|------|--------------------------------|----------------------------------|
| $\alpha i$ SV 10HV  | -    | 3.1                            | 10                               |
| $\alpha i$ SV 20HV  | -    | 5.6                            | 20                               |
| $\alpha i$ SV 40HV  | -    | 9.1                            | 40                               |
| $\alpha i$ SV 80HV  | -    | 18.2                           | 80                               |
| $\alpha i$ SV 180HV | -    | 58                             | 180                              |
| $\alpha i$ SV 360HV | -    | 115                            | 360                              |
| $\alpha i$ SV 10HVL | -    | 3.1                            | 10                               |
| $\alpha i$ SV 20HVL | -    | 5.6                            | 20                               |
| $\alpha i$ SV 40HVL | -    | 9.1                            | 40                               |
| $\alpha i$ SV 80HVL | -    | 18.2                           | 80                               |

**400-V input series - 2-axis amplifier**

| Name                   | Axis | Rated output current<br>[Arms] | Nominal current limit<br>[Apeak] |
|------------------------|------|--------------------------------|----------------------------------|
| $\alpha i$ SV 10/10HV  | L    | 3.1                            | 10                               |
|                        | M    | 3.1                            | 10                               |
| $\alpha i$ SV 20/20HV  | L    | 5.6                            | 20                               |
|                        | M    | 5.6                            | 20                               |
| $\alpha i$ SV 20/40HV  | L    | 5.6                            | 20                               |
|                        | M    | 9.1                            | 40                               |
| $\alpha i$ SV 40/40HV  | L    | 9.1                            | 40                               |
|                        | M    | 9.1                            | 40                               |
| $\alpha i$ SV 40/80HV  | L    | 9.1                            | 40                               |
|                        | M    | 18.2                           | 80                               |
| $\alpha i$ SV 80/80HV  | L    | 18.2                           | 80                               |
|                        | M    | 18.2                           | 80                               |
| $\alpha i$ SV 10/10HVL | L    | 3.1                            | 10                               |
|                        | M    | 3.1                            | 10                               |
| $\alpha i$ SV 20/20HVL | L    | 5.6                            | 20                               |
|                        | M    | 5.6                            | 20                               |
| $\alpha i$ SV 20/40HVL | L    | 5.6                            | 20                               |
|                        | M    | 9.1                            | 40                               |
| $\alpha i$ SV 40/40HVL | L    | 9.1                            | 40                               |
|                        | M    | 9.1                            | 40                               |

**NOTE**

The current limit (peak value) is a standard value. It varies by about  $\pm 10\%$ , depending on the circuit constants.

## 2.3.3 $\alpha i$ SP series

### 200-V input series

| <div>Model</div> <div>Item</div>                 | <i>αi</i> SP<br>2.2                                         | <i>αi</i> SP<br>5.5                               | <i>αi</i> SP<br>11                                            | <i>αi</i> SP<br>15                                                           | <i>αi</i> SP<br>22                                                                             | <i>αi</i> SP<br>26                                                           | <i>αi</i> SP<br>30          | <i>αi</i> SP<br>37 | <i>αi</i> SP<br>45               | <i>αi</i> SP<br>55 |
|--------------------------------------------------|-------------------------------------------------------------|---------------------------------------------------|---------------------------------------------------------------|------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------|-----------------------------|--------------------|----------------------------------|--------------------|
| Rated output<br>(HRV type)                       | 13A                                                         | 27A                                               | 48A                                                           | 63A                                                                          | 95A                                                                                            | 111A                                                                         | 133A                        | 165A               | 198A                             | 250A               |
|                                                  | Spindle HRV2                                                |                                                   |                                                               |                                                                              |                                                                                                | Spindle HRV1 (Note 3)                                                        |                             |                    |                                  |                    |
| Main circuit control method                      | Sine-wave PWM control with transistor (IGBT) bridge         |                                                   |                                                               |                                                                              |                                                                                                |                                                                              |                             |                    |                                  |                    |
| Speed control range                              | Speed ratio 1:100                                           |                                                   |                                                               |                                                                              |                                                                                                |                                                                              |                             |                    |                                  |                    |
| Speed variation rate                             | 0.1% or less of maximum speed (load variation: 10% to 100%) |                                                   |                                                               |                                                                              |                                                                                                |                                                                              |                             |                    |                                  |                    |
| Applicable CNC                                   | 16i-B, 18i-B, 21i-B, 0i-B/C/D, and 30i/31i/32i              |                                                   |                                                               |                                                                              |                                                                                                |                                                                              |                             |                    |                                  |                    |
| Applicable motors (Note 1)<br>(typical examples) | <i>αi</i> I 0.5<br><i>αi</i> I 1                            | <i>αi</i> I 1.5<br><i>αi</i> I 2<br><i>αi</i> I 3 | <i>αi</i> I 6<br><i>αi</i> I 8<br><i>αi</i> I <sub>P</sub> 12 | <i>αi</i> I 12<br><i>αi</i> I <sub>P</sub> 15<br><i>αi</i> I <sub>P</sub> 18 | <i>αi</i> I 15<br><i>αi</i> I 18<br><i>αi</i> I <sub>P</sub> 22<br><i>αi</i> I <sub>P</sub> 30 | <i>αi</i> I 22<br><i>αi</i> I <sub>P</sub> 40<br><i>αi</i> I <sub>P</sub> 50 | <i>αi</i> I <sub>P</sub> 60 | (Note 2)           | <i>αi</i> I 30<br><i>αi</i> I 40 | <i>αi</i> I 50     |

### 400-V input series

| <div>Model</div> <div>Item</div>                            | <i>αi</i> SP<br>5.5HV                                                      | <i>αi</i> SP<br>11HV               | <i>αi</i> SP<br>15HV          | <i>αi</i> SP<br>30HV                                                                                   | <i>αi</i> SP<br>45HV                                                  | <i>αi</i> SP<br>75HV | <i>αi</i> SP<br>100HV |
|-------------------------------------------------------------|----------------------------------------------------------------------------|------------------------------------|-------------------------------|--------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------|----------------------|-----------------------|
| Rated output<br>(HRV type)                                  | 14A                                                                        | 23A                                | 32A                           | 70A                                                                                                    | 107A                                                                  | 170A                 | 200A                  |
|                                                             | HRV2                                                                       |                                    | HRV1 注 3                      |                                                                                                        |                                                                       |                      |                       |
| Main circuit control method                                 | Sine-wave PWM control with transistor (IGBT) bridge                        |                                    |                               |                                                                                                        |                                                                       |                      |                       |
| Speed control range                                         | Speed ratio 1:100                                                          |                                    |                               |                                                                                                        |                                                                       |                      |                       |
| Speed variation rate                                        | 0.1% or less of maximum speed (load variation: 10% to 100%)                |                                    |                               |                                                                                                        |                                                                       |                      |                       |
| Applicable CNC                                              | 16i-B, 18i-B, 21i-B, 0i-B/C/D, and 30i/31i/32i                             |                                    |                               |                                                                                                        |                                                                       |                      |                       |
| Applicable motors <sup>(Note 1)</sup><br>(typical examples) | <i>αi</i> I 0.5HV<br><i>αi</i> I 1HV<br><i>αi</i> I 2HV<br><i>αi</i> I 3HV | <i>αi</i> I 6HV<br><i>αi</i> I 8HV | <i>αi</i> I <sub>P</sub> 15HV | <i>αi</i> I 15HV<br><i>αi</i> I 22HV<br><i>αi</i> I <sub>P</sub> 40HV<br><i>αi</i> I <sub>P</sub> 50HV | <i>αi</i> I 30HV<br><i>αi</i> I 40HV<br><i>αi</i> I <sub>P</sub> 60HV | <i>αi</i> I 60HV     | <i>αi</i> I 100HV     |

#### NOTE

- 1 For combinations of motor models and amplifier models, refer to "Applicable spindle amplifier" in the specification list in the descriptions manual of the spindle motor.
- 2 Built-in spindle motors are applied.
- 3 For spindle HRV2, the rated current is derated as follows:  
 $\alpha i$  SP37 85%,  $\alpha i$  SP45 79%,  $\alpha i$  SP55 80%  
 $\alpha i$  SP15HV 94%,  $\alpha i$  SP30HV 83%,  $\alpha i$  SP45HV 72%  
 $\alpha i$  SP75HV 83%,  $\alpha i$  SP100HV 91%

### Types (A and B) of $\alpha i$ SP models and sensors applicable to each type

Either of two  $\alpha i$  SP models, types A and B, is available for each detector on the spindle to be used. The following lists combinations of an  $\alpha i$  SP type, applicable sensors, and functions.

|                              |                                                 | Configuration                                                | Configuration number |     |   |   |   |     |   |   |   | Remarks        |
|------------------------------|-------------------------------------------------|--------------------------------------------------------------|----------------------|-----|---|---|---|-----|---|---|---|----------------|
|                              |                                                 |                                                              | 1                    | 2   | 3 | 4 | 5 | 6   | 7 | 8 | 9 |                |
| Spindle system configuration | $\alpha i$ SP                                   | TYPE A                                                       | O                    | O   | O | O | O | O   |   | O |   |                |
|                              |                                                 | TYPE B                                                       | O                    | O   | O | O | O | O   | O | O | O |                |
|                              | Sensor on the motor                             | $\alpha i$ M                                                 | O                    |     |   |   | O | O   | O | O | O |                |
|                              |                                                 | $\alpha i$ MZ sensor                                         |                      | O   |   |   |   |     |   |   |   |                |
|                              |                                                 | $\alpha i$ BZ sensor (*8)<br>(when a built-in motor is used) |                      |     | O |   |   |     |   |   |   |                |
|                              |                                                 | $\alpha i$ CZ I sensor<br>(when a built-in motor is used)    |                      |     |   | O |   |     |   |   |   | See next page. |
|                              | Sensor on the spindle                           | $\alpha i$ position coder                                    |                      |     |   |   | O |     |   |   |   | *3             |
|                              |                                                 | External 1-rotation                                          |                      |     |   |   |   | O   |   |   |   | *3             |
|                              |                                                 | $\alpha i$ BZ sensor                                         |                      |     |   |   |   |     | O |   |   | *3             |
|                              |                                                 | $\alpha i$ CZ IS sensor                                      |                      |     |   |   |   |     |   | O |   | See next page. |
|                              |                                                 | $\alpha$ position coder S                                    |                      |     |   |   |   |     |   |   | O | *3             |
| Function                     | Rigid tapping                                   |                                                              | O*1                  | O*2 | O | O | O | O*2 | O | O | O |                |
|                              | Orientation by a position coder                 |                                                              |                      | O*6 | O | O | O |     | O | O | O |                |
|                              | Orientation by the external one-rotation signal |                                                              |                      |     |   |   |   | O*2 |   |   |   | *5             |
|                              | Spindle synchronization                         | Velocity synchronization                                     | O*2                  | O*6 | O | O | O | O*2 | O | O | O | *4             |
|                              |                                                 | Phase synchronization                                        |                      | O*6 | O | O | O | O*7 | O | O | O | *4             |
|                              | Threading                                       |                                                              |                      | O*6 | O | O | O |     | O | O | O |                |
|                              | Cs-axis contour control                         |                                                              |                      | O*6 | O |   |   |     | O | O | O |                |

- \*1 The spindle and motor must be interconnected directly or with a timing belt or gear. No orientation is available to adjust the tapping start position.
- \*2 The spindle and motor must be interconnected with a timing belt or gear.
- \*3 The spindle and detector must be interconnected in one-to-one connection mode.
- \*4 Two motor amplifiers are required.
- \*5 Note that the stop position moves by a backlash between the spindle and motor because of the theory of operation.
- \*6 The spindle and motor must be interconnected directly or with a timing belt or gear in one-to-one connection mode.
- \*7 Before specifying spindle synchronization, perform orientation to detect the one-rotation signal (PC1DT=1).
- \*8 The  $\alpha i$ CZ analog output type is also applicable.

## Other functions

|                                                           | TYPE A | TYPE B | Remarks       |
|-----------------------------------------------------------|--------|--------|---------------|
| Analog output of load meter and speedometer               | O      | O      | Connector JY1 |
| Analog override input                                     | O      | O      | Connector JY1 |
| Excitation off monitor signal output                      | O      | O      | Connector JX4 |
| Position coder signal output                              |        | O *1   | Connector JX4 |
| Spindle EGB function<br>(Inter-SP communication function) |        | O *1   | Connector JX4 |

\*1 The  $\alpha$ iCZ I sensor and  $\alpha$ iCZ IS sensor are excluded.



### CAUTION

The excitation off state signal output is not supported by A06B-6111, -6112, -6121, and -6122.

## Submodule SW

By using  $\alpha$ i SP TYPE A or  $\alpha$ i SP TYPE B with a Submodule SW, the spindle switch function for switching between two motors (main and sub) with one spindle amplifier can be used. (\*2)  
For details of the sub module SW, see Chapter 10.

\*2 The  $\alpha$ iCZ I sensor and  $\alpha$ iCZ IS sensor are excluded.

## Submodule SM

By using  $\alpha$ i SP TYPE B with the Submodule SM, the synchronous built-in spindle motor Bi S series can be used.



### CAUTION

For the latest  $\alpha$ iSP series, use Submodule SM unit version B or later.

## $\alpha$ iCZ sensors (I, IS)

- Applicable spindle amplifiers  
Unit version B or later  
200-V system: A06B-6141-H002, -H006, -H011, -H015, -H030, -H037, -H055#H580  
400-V system: A06B-6151-H006, -H011, -H015, -H045, -H075, -H100#H580  
Unit version C or later  
200-V system: A06B-6141-H022, -H026, -H045#H580  
400-V system: A06B-6151-H030#H580
- The following functions cannot be used:  
Spindle switch control, differential spindle speed control, and position coder signal output
- The following functions are not supported at present:  
Synchronous spindle motor, spindle EGB, simple spindle EGB, torque tandem control, dual check safety (motor sensor side), disconnection detection disable signal

## 2.4 WEIGHT

### $\alpha i$ PS

| Model                                | Weight |
|--------------------------------------|--------|
| $\alpha i$ PS <sub>R</sub> 3         | 2.6kg  |
| $\alpha i$ PS <sub>R</sub> 5.5       | 4.3kg  |
| $\alpha i$ PS 5.5                    | 4.9kg  |
| $\alpha i$ PS 11, 15, 11HV, 18HV     | 6.3kg  |
| $\alpha i$ PS 26, 30, 37, 30HV, 45HV | 10.7kg |
| $\alpha i$ PS 55, 75HV, 100HV        | 22.0kg |

### $\alpha i$ SV

| Model                                                    | Weight |
|----------------------------------------------------------|--------|
| $\alpha i$ SV 4, 20, 10HV                                | 2.2Kg  |
| $\alpha i$ SV 40, 80, 160, 20L, 40L, 80L                 | 3.9Kg  |
| $\alpha i$ SV 20HV, 40HV, 80HV, 10HVL, 20HVL, 40HVL      |        |
| $\alpha i$ SV 4/4, 4/20, 20/20, 10/10HV                  | 2.4Kg  |
| $\alpha i$ SV 20/40, 40/40, 40/80, 80/80, 20/40L, 40/40L | 4.6Kg  |
| $\alpha i$ SV 20/20HV                                    |        |
| $\alpha i$ SV 160L, 80HVL                                | 5.5Kg  |
| $\alpha i$ SV 80/160, 160/160, 40/80L, 80/80L            |        |
| $\alpha i$ SV 20/40HV, 40/40HV, 40/80HV,                 |        |
| $\alpha i$ SV 80/80HV, 20/40HVL, 40/40HVL                |        |
| $\alpha i$ SV 4/4/4, $\alpha i$ SV 20/20/20              |        |
| $\alpha i$ SV 20/20/40                                   | 3.8Kg  |
| $\alpha i$ SV 360, 180HV                                 | 10.7Kg |
| $\alpha i$ SV 360HV                                      | 22.0Kg |
| DBM(A06B-6079-H401)                                      | 5.4Kg  |
| DBM(A06B-6069-H300)                                      | 10.0Kg |

### $\alpha i$ SP

| Model                                    | Weight |
|------------------------------------------|--------|
| $\alpha i$ SP 2.2                        | 4.9Kg  |
| $\alpha i$ SP 5.5, 5.5HV                 | 6.1Kg  |
| $\alpha i$ SP 11, 15, 11HV, 15HV         | 6.3Kg  |
| $\alpha i$ SP 22, 26, 30, 37, 30HV, 45HV | 10.7Kg |
| $\alpha i$ SP 45, 55, 75HV, 100HV        | 22.0Kg |

### AC reactor

| Model             | Weight |
|-------------------|--------|
| A81L-0001-0083#3C | 1.1kg  |
| A81L-0001-0171    | 1.1kg  |
| A81L-0001-0101#C  | 3.0kg  |
| A81L-0001-0155    | 4.5kg  |
| A81L-0001-0156    | 6.5kg  |
| A81L-0001-0157    | 9.5kg  |
| A81L-0001-0158    | 9.2kg  |
| A81L-0001-0159    | 16.5kg |

| Model          | Weight |
|----------------|--------|
| A81L-0001-0160 | 20.0kg |
| A81L-0001-0163 | 8.0kg  |
| A81L-0001-0164 | 14.0kg |
| A81L-0001-0165 | 26.0kg |
| A81L-0001-0167 | 8.2kg  |
| A81L-0001-0170 | 4.2kg  |

## Regenerative discharge unit

| Model          | Weight |
|----------------|--------|
| A06B-6089-H510 | 0.8kg  |
| A06B-6089-H500 | 2kg    |
| A06B-6089-H711 | 5kg    |
| A06B-6089-H712 | 6kg    |
| A06B-6089-H713 | 5kg    |

## Transformer

| Model          | Weight |
|----------------|--------|
| A80L-0024-0006 | 27kg   |
| A80L-0024-0003 | 36kg   |
| A06B-6052-J001 | 61kg   |
| A06B-6044-J006 | 115kg  |
| A06B-6044-J007 | 165kg  |
| A06B-6044-J010 | 260kg  |
| A06B-6044-J015 | 375kg  |

## Noise filter

| Model          |                     | Weight |
|----------------|---------------------|--------|
| A06B-6077-K155 | 3SUP-HL30-ER-6 : *1 | 5.2kg  |
| A06B-6077-K156 | 3SUP-HL75-ER-6 : *1 | 12.0kg |
| A06B-6077-K157 | 3SUP-HL150-ER-6: *1 | 23.5kg |
| A06B-6077-K158 | 3SUP-HL200-ER-6: *1 | 24.5kg |
| A06B-6110-K160 | NF3050C-VQ : *2     | 2.9kg  |
| A06B-6110-K161 | NF3080C-VQ : *2     | 3.6kg  |
| A06B-6110-K162 | NF3150C-VQ : *2     | 9.0kg  |
| A06B-6110-K163 | NF3200C-VQ : *2     | 16kg   |
| A06B-6110-K164 | NF3250C-VQ : *2     | 16kg   |

\*1 manufacturer Okaya electric Inc.

\*2 manufacturer Sosin electric Inc.



# 3

## ORDERING INFORMATION

Chapter 3, "ORDERING INFORMATION", consists of the following sections:

|          |                                             |    |
|----------|---------------------------------------------|----|
| 3.1      | SERVO AMPLIFIER.....                        | 46 |
| 3.1.1    | 200-V Input Series .....                    | 46 |
| 3.1.1.1  | $\alpha i$ PS series.....                   | 46 |
| 3.1.1.2  | $\alpha i$ PS <sub>R</sub> series .....     | 46 |
| 3.1.1.3  | $\alpha i$ SV series .....                  | 47 |
| 3.1.1.4  | $\alpha i$ SP series.....                   | 49 |
| 3.1.2    | 400-V Input Series .....                    | 50 |
| 3.1.2.1  | $\alpha i$ PS series.....                   | 50 |
| 3.1.2.2  | $\alpha i$ SV series .....                  | 51 |
| 3.1.2.3  | $\alpha i$ SP series .....                  | 53 |
| 3.1.3    | Others .....                                | 54 |
| 3.1.3.1  | AC reactor .....                            | 54 |
| 3.1.3.2  | AC line filter.....                         | 56 |
| 3.1.3.3  | Sub module SW.....                          | 57 |
| 3.1.3.4  | Sub module SM.....                          | 57 |
| 3.1.3.5  | Connectors.....                             | 58 |
| 3.1.3.6  | Fuses.....                                  | 64 |
| 3.1.3.7  | Power transformer .....                     | 65 |
| 3.1.3.8  | Regenerative discharge unit .....           | 69 |
| 3.1.3.9  | Cables .....                                | 70 |
| 3.1.3.10 | Circuit breaker and magnetic contactor..... | 71 |
| 3.1.3.11 | Lightning surge protector .....             | 74 |
| 3.1.3.12 | Noise filter.....                           | 75 |
| 3.1.3.13 | Sensors for servo .....                     | 75 |
| 3.1.3.14 | Sensors for spindle .....                   | 76 |
| 3.1.3.15 | Power line switch unit .....                | 77 |
| 3.1.3.16 | Battery for absolute Pulsecoder.....        | 78 |

## 3.1 SERVO AMPLIFIER

### 3.1.1 200-V Input Series

#### 3.1.1.1 $\alpha i$ PS series

| Category | Ordering number | Name              | Remarks |
|----------|-----------------|-------------------|---------|
| Standard | A06B-6140-H006  | $\alpha i$ PS 5.5 |         |
|          | A06B-6140-H011  | $\alpha i$ PS 11  |         |
|          | A06B-6140-H015  | $\alpha i$ PS 15  |         |
|          | A06B-6140-H026  | $\alpha i$ PS 26  |         |
|          | A06B-6140-H030  | $\alpha i$ PS 30  |         |
|          | A06B-6140-H037  | $\alpha i$ PS 37  |         |
|          | A06B-6140-H055  | $\alpha i$ PS 55  |         |

#### NOTE

See Section 4.3, "HOW TO SELECT THE  $\alpha i$  PS series (POWER SUPPLY)" for details of how to select the  $\alpha i$  PS.

#### 3.1.1.2 $\alpha i$ PS<sub>R</sub> series

| Category | Ordering number | Name                           | Remarks |
|----------|-----------------|--------------------------------|---------|
| Standard | A06B-6115-H003  | $\alpha i$ PS <sub>R</sub> 3   |         |
|          | A06B-6115-H006  | $\alpha i$ PS <sub>R</sub> 5.5 |         |

| Category | Ordering number | Name              | Remarks |
|----------|-----------------|-------------------|---------|
| Standard | A06B-6115-H003  | PSMR-3 <i>i</i>   |         |
|          | A06B-6115-H006  | PSMR-5.5 <i>i</i> |         |

#### NOTE

See Section 4.4, "HOW TO SELECT THE  $\alpha i$  PS<sub>R</sub> series (POWER SUPPLY RESISTOR DISCHARGE TYPE)" for details of how to select the  $\alpha i$  PS<sub>R</sub>.

### 3.1.1.3 $\alpha i$ SV series

#### 1-axis amplifier

| Category | Ordering number | Name               | Remarks                                        |
|----------|-----------------|--------------------|------------------------------------------------|
| Standard | A06B-6117-H101  | $\alpha i$ SV 4    | HRV2 and HRV3 supported                        |
|          | A06B-6117-H103  | $\alpha i$ SV 20   | HRV2 and HRV3 supported                        |
|          | A06B-6117-H104  | $\alpha i$ SV 40   | HRV2 and HRV3 supported                        |
|          | A06B-6117-H105  | $\alpha i$ SV 80   | HRV2 and HRV3 supported                        |
|          | A06B-6117-H106  | $\alpha i$ SV 160  | HRV2 and HRV3 supported                        |
|          | A06B-6117-H109  | $\alpha i$ SV 360  | DBM required<br>HRV2, HRV3, and HRV4 supported |
|          | A06B-6117-H153  | $\alpha i$ SV 20L  | HRV4 supported                                 |
|          | A06B-6117-H154  | $\alpha i$ SV 40L  | HRV4 supported                                 |
|          | A06B-6117-H155  | $\alpha i$ SV 80L  | HRV4 supported                                 |
|          | A06B-6117-H156  | $\alpha i$ SV 160L | HRV4 supported                                 |

#### 2-axis amplifier

| Category | Ordering number | Name                  | Remarks                 |
|----------|-----------------|-----------------------|-------------------------|
| Standard | A06B-6117-H201  | $\alpha i$ SV 4/4     | HRV2 and HRV3 supported |
|          | A06B-6117-H203  | $\alpha i$ SV 4/20    | HRV2 and HRV3 supported |
|          | A06B-6117-H205  | $\alpha i$ SV 20/20   | HRV2 and HRV3 supported |
|          | A06B-6117-H206  | $\alpha i$ SV 20/40   | HRV2 and HRV3 supported |
|          | A06B-6117-H207  | $\alpha i$ SV 40/40   | HRV2 and HRV3 supported |
|          | A06B-6117-H208  | $\alpha i$ SV 40/80   | HRV2 and HRV3 supported |
|          | A06B-6117-H209  | $\alpha i$ SV 80/80   | HRV2 and HRV3 supported |
|          | A06B-6117-H210  | $\alpha i$ SV 80/160  | HRV2 and HRV3 supported |
|          | A06B-6117-H211  | $\alpha i$ SV 160/160 | HRV2 and HRV3 supported |
|          | A06B-6117-H255  | $\alpha i$ SV 20/20L  | HRV4 supported          |
|          | A06B-6117-H256  | $\alpha i$ SV 20/40L  | HRV4 supported          |
|          | A06B-6117-H257  | $\alpha i$ SV 40/40L  | HRV4 supported          |
|          | A06B-6117-H258  | $\alpha i$ SV 40/80L  | HRV4 supported          |
|          | A06B-6117-H259  | $\alpha i$ SV 80/80L  | HRV4 supported          |

#### 3-axis amplifier

| Category | Ordering number | Name                   | Remarks                 |
|----------|-----------------|------------------------|-------------------------|
| Standard | A06B-6117-H301  | $\alpha i$ SV 4/4/4    | HRV2 and HRV3 supported |
|          | A06B-6117-H303  | $\alpha i$ SV 20/20/20 | HRV2 and HRV3 supported |
|          | A06B-6117-H304  | $\alpha i$ SV 20/20/40 | HRV2 and HRV3 supported |

#### Dynamic brake module

| Category | Ordering number | Name | Remarks           |
|----------|-----------------|------|-------------------|
| Standard | A06B-6079-H401  | DBM  | $\alpha i$ SV 360 |

**NOTE**

- 1 See Section 4.1, "HOW TO SELECT THE  $\alpha i$ SV SERIES (SERVOAMPLIFIER)" for details of how to select the  $\alpha i$ SV.
- 2 For the  $\alpha i$  SV 360, a dynamic brake module (DBM) is required.  
The dynamic brake module is used to immediately stop the motor at emergency stop. Other  $\alpha i$  SV models contain a similar function.

### 3.1.1.4 $\alpha i$ SP series

Ordering numbers depend on the detectors being used (function).

#### (1) TYPE A (1 spindle sensor input)

| Category | Ordering number     | Name              | Remarks |
|----------|---------------------|-------------------|---------|
| Standard | A06B-6141-H002#H580 | $\alpha i$ SP 2.2 |         |
|          | A06B-6141-H006#H580 | $\alpha i$ SP 5.5 |         |
|          | A06B-6141-H011#H580 | $\alpha i$ SP 11  |         |
|          | A06B-6141-H015#H580 | $\alpha i$ SP 15  |         |
|          | A06B-6141-H022#H580 | $\alpha i$ SP 22  |         |
|          | A06B-6141-H026#H580 | $\alpha i$ SP 26  |         |
|          | A06B-6141-H030#H580 | $\alpha i$ SP 30  |         |
|          | A06B-6141-H037#H580 | $\alpha i$ SP 37  |         |
|          | A06B-6141-H045#H580 | $\alpha i$ SP 45  |         |
|          | A06B-6141-H055#H580 | $\alpha i$ SP 55  |         |

#### (2) TYPE B (2 spindle sensor inputs)

| Category | Ordering number     | Name              | Remarks |
|----------|---------------------|-------------------|---------|
| Standard | A06B-6142-H002#H580 | $\alpha i$ SP 2.2 |         |
|          | A06B-6142-H006#H580 | $\alpha i$ SP 5.5 |         |
|          | A06B-6142-H011#H580 | $\alpha i$ SP 11  |         |
|          | A06B-6142-H015#H580 | $\alpha i$ SP 15  |         |
|          | A06B-6142-H022#H580 | $\alpha i$ SP 22  |         |
|          | A06B-6142-H026#H580 | $\alpha i$ SP 26  |         |
|          | A06B-6142-H030#H580 | $\alpha i$ SP 30  |         |
|          | A06B-6142-H037#H550 | $\alpha i$ SP 37  |         |
|          | A06B-6142-H045#H580 | $\alpha i$ SP 45  |         |
|          | A06B-6142-H055#H580 | $\alpha i$ SP 55  |         |

#### NOTE

See Section 4.2, "HOW TO SELECT THE  $\alpha i$ SP SERIES (SPINDLE AMPLIFIER)" for details of how to select the  $\alpha i$ SP.

### 3.1.2 400-V Input Series

#### 3.1.2.1 $\alpha i$ PS series

| Category | Ordering number | Name                | Remarks |
|----------|-----------------|---------------------|---------|
| Standard | A06B-6150-H011  | $\alpha i$ PS 11HV  |         |
|          | A06B-6150-H018  | $\alpha i$ PS 18HV  |         |
|          | A06B-6150-H030  | $\alpha i$ PS 30HV  |         |
|          | A06B-6150-H045  | $\alpha i$ PS 45HV  |         |
|          | A06B-6150-H075  | $\alpha i$ PS 75HV  |         |
|          | A06B-6150-H100  | $\alpha i$ PS 100HV |         |

**NOTE**

See Section 4.3, "HOW TO SELECT THE  $\alpha i$  PS series (POWER SUPPLY)" for details of how to select the  $\alpha i$  PS.

### 3.1.2.2 $\alpha i$ SV series

#### 1-axis amplifier

| Category | Ordering number | Name                | Remarks                                        |
|----------|-----------------|---------------------|------------------------------------------------|
| Standard | A06B-6127-H102  | $\alpha i$ SV 10HV  | HRV2 and HRV3 supported                        |
|          | A06B-6127-H103  | $\alpha i$ SV 20HV  | HRV2 and HRV3 supported                        |
|          | A06B-6127-H104  | $\alpha i$ SV 40HV  | HRV2 and HRV3 supported                        |
|          | A06B-6127-H105  | $\alpha i$ SV 80HV  | HRV2 and HRV3 supported                        |
|          | A06B-6127-H106  | $\alpha i$ SV 180HV | DBM required<br>HRV2, HRV3, and HRV4 supported |
|          | A06B-6127-H109  | $\alpha i$ SV 360HV | DBM required<br>HRV2, HRV3, and HRV4 supported |
|          | A06B-6127-H152  | $\alpha i$ SV 10HVL | HRV4 supported                                 |
|          | A06B-6127-H153  | $\alpha i$ SV 20HVL | HRV4 supported                                 |
|          | A06B-6127-H154  | $\alpha i$ SV 40HVL | HRV4 supported                                 |
|          | A06B-6127-H155  | $\alpha i$ SV 80HVL | HRV4 supported                                 |

#### 2-axis amplifier

| Category | Ordering number | Name                   | Remarks                 |
|----------|-----------------|------------------------|-------------------------|
| Standard | A06B-6127-H202  | $\alpha i$ SV 10/10HV  | HRV2 and HRV3 supported |
|          | A06B-6127-H205  | $\alpha i$ SV 20/20HV  | HRV2 and HRV3 supported |
|          | A06B-6127-H206  | $\alpha i$ SV 20/40HV  | HRV2 and HRV3 supported |
|          | A06B-6127-H207  | $\alpha i$ SV 40/40HV  | HRV2 and HRV3 supported |
|          | A06B-6127-H208  | $\alpha i$ SV 40/80HV  | HRV2 and HRV3 supported |
|          | A06B-6127-H209  | $\alpha i$ SV 80/80HV  | HRV2 and HRV3 supported |
|          | A06B-6127-H252  | $\alpha i$ SV 10/10HVL | HRV4 supported          |
|          | A06B-6127-H255  | $\alpha i$ SV 20/20HVL | HRV4 supported          |
|          | A06B-6127-H256  | $\alpha i$ SV 20/40HVL | HRV4 supported          |
|          | A06B-6127-H257  | $\alpha i$ SV 40/40HVL | HRV4 supported          |

#### Dynamic brake module

| Category | Ordering number | Name | Remarks                                  |
|----------|-----------------|------|------------------------------------------|
| Standard | A06B-6079-H401  | DBM  | $\alpha i$ SV 180HV, $\alpha i$ SV 360HV |
|          | A06B-6069-H300  | DBM  | $\alpha i$ SV 360HV (Note 3)             |

**NOTE**

- 1 See Section 4.1, "HOW TO SELECT THE  $\alpha$ iSV SERIES (SERVOAMPLIFIER)" for details of how to select the  $\alpha$ iSV.
- 2 For the  $\alpha$ i SV 180HV and  $\alpha$ i SV 360HV, a dynamic brake module (DBM) is required.  
The dynamic brake module is used to immediately stop the motor at emergency stop. Other  $\alpha$ i SV models contain a similar function.
- 3 A06B-6069-H300 is used when the servo motor is the  $\alpha$ i S1000HV, 2000HV, or 3000HV.



### 3.1.2.3 $\alpha i$ SP series

Ordering numbers depend on the detectors being used (function).

#### (1) TYPE A (1 spindle sensor input)

| Category | Ordering number     | Name                | Remarks |
|----------|---------------------|---------------------|---------|
| Standard | A06B-6151-H006#H580 | $\alpha i$ SP 5.5HV |         |
|          | A06B-6151-H011#H580 | $\alpha i$ SP 11HV  |         |
|          | A06B-6151-H015#H580 | $\alpha i$ SP 15HV  |         |
|          | A06B-6151-H030#H580 | $\alpha i$ SP 30HV  |         |
|          | A06B-6151-H045#H580 | $\alpha i$ SP 45HV  |         |
|          | A06B-6151-H075#H580 | $\alpha i$ SP 75HV  |         |
|          | A06B-6151-H100#H580 | $\alpha i$ SP 100HV |         |

#### (2) TYPE B (2 spindle sensor inputs)

| Category | Ordering number     | Name                | Remarks |
|----------|---------------------|---------------------|---------|
| Standard | A06B-6152-H006#H580 | $\alpha i$ SP 5.5HV |         |
|          | A06B-6152-H011#H580 | $\alpha i$ SP 11HV  |         |
|          | A06B-6152-H015#H580 | $\alpha i$ SP 15HV  |         |
|          | A06B-6152-H030#H580 | $\alpha i$ SP 30HV  |         |
|          | A06B-6152-H045#H580 | $\alpha i$ SP 45HV  |         |
|          | A06B-6152-H075#H580 | $\alpha i$ SP 75HV  |         |
|          | A06B-6152-H100#H580 | $\alpha i$ SP 100HV |         |

#### NOTE

See Section 4.2, "HOW TO SELECT THE  $\alpha i$ SP SERIES (SPINDLE AMPLIFIER)" for details of how to select the  $\alpha i$ SP.

### 3.1.3 Others

#### 3.1.3.1 AC reactor

| Category | Ordering number | Applicable models         | Remarks |
|----------|-----------------|---------------------------|---------|
| Standard | A81L-0001-0155  | $\alpha i$ PS 5.5, 11     | (Note)  |
|          | A81L-0001-0156  | $\alpha i$ PS 15          |         |
|          | A81L-0001-0157  | $\alpha i$ PS 26          |         |
|          | A81L-0001-0158  | $\alpha i$ PS 30          |         |
|          | A81L-0001-0159  | $\alpha i$ PS 37          |         |
|          | A81L-0001-0160  | $\alpha i$ PS 55          |         |
|          | A81L-0001-0163  | $\alpha i$ PS 11HV, 18HV  | (Note)  |
|          | A81L-0001-0164  | $\alpha i$ PS 30HV, 45HV  |         |
|          | A81L-0001-0165  | $\alpha i$ PS 75HV, 100HV |         |
|          | A81L-0001-0167  | $\alpha i$ PS 11HV        | (Note)  |
|          | A81L-0001-0170  | $\alpha i$ PS 5.5         | (Note)  |

For the outside dimensions, see Subsection 8.1.2, "AC Reactor Unit".  
For the tightening torque, see Subsection 9.3.1.1, "Details of cable K1 (Common power supply line)".

#### NOTE

When an  $\alpha i$ SV or  $\alpha i$ SP unit with a small capacity is connected to the  $\alpha i$ PS, the AC reactor unit A81L-0001-0170 (200-V input) or A81L-0001-0167 (400-V input) must be used. For details, see the next page.

## AC reactor used when an $\alpha i$ SV or $\alpha i$ SP with a small capacity is connected to the $\alpha i$ PS

### 200-V input series

When only as many  $\alpha i$  SV or  $\alpha i$  SP units as indicated in the tables below are connected to a power regeneration type  $\alpha i$  PS unit, AC reactor unit A81L-0001-0170 must be used.

#### CAUTION

- 1 When using the normal AC reactor, depending on the power state (when the power impedance is low or the voltage is out of balance), power regeneration is maintained and input current becomes too large, possibly damaging the amplifier.
- 2 This problem does not occur in the resistance regeneration type  $\alpha i$  PS<sub>R</sub>.

#### $\alpha i$ SV

| Name                 | Number of connected units | Ordering number (*1) |
|----------------------|---------------------------|----------------------|
| $\alpha i$ SV 4      | 1                         | A06B-6117-H101       |
| $\alpha i$ SV 4      | 2                         | A06B-6117-H101       |
| $\alpha i$ SV 20     | 1                         | A06B-6117-H103       |
| $\alpha i$ SV 20     | 2                         | A06B-6117-H103       |
| $\alpha i$ SV 20L    | 1                         | A06B-6117-H153       |
| $\alpha i$ SV 20L    | 2                         | A06B-6117-H153       |
| $\alpha i$ SV 4/4    | 1                         | A06B-6117-H201       |
| $\alpha i$ SV 4/20   | 1                         | A06B-6117-H203       |
| $\alpha i$ SV 20/20  | 1                         | A06B-6117-H205       |
| $\alpha i$ SV 20/20L | 1                         | A06B-6117-H255       |

#### $\alpha i$ SP

| Name              | Number of connected units | Ordering number (*2)                       |
|-------------------|---------------------------|--------------------------------------------|
| $\alpha i$ SP 2.2 | 1                         | A06B-6141-H002#H580<br>A06B-6142-H002#H580 |

\*1 The same restriction applies to the old specification A06B-6114-Hxxx.

\*2 The same restriction applies to the old specifications A06B-6111-Hxxx and A06B-6112-Hxxx.

### 400-V input series

When only as many  $\alpha i$  SV or  $\alpha i$  SP units as indicated in the tables below are connected to a power regeneration type  $\alpha i$  PS unit, AC reactor unit A81L-0001-0167 must be used.



#### CAUTION

When using the normal AC reactor, depending on the power state (when the power impedance is low or the voltage is out of balance), power regeneration is maintained and input current becomes too large, possibly damaging the amplifier.

#### $\alpha i$ SV

| Name                   | Number of connected units | Ordering number (*1) |
|------------------------|---------------------------|----------------------|
| $\alpha i$ SV 10HV     | 1                         | A06B-6127-H102       |
| $\alpha i$ SV 20HV     | 1                         | A06B-6127-H103       |
| $\alpha i$ SV 10HVL    | 1                         | A06B-6127-H152       |
| $\alpha i$ SV 20HVL    | 1                         | A06B-6127-H153       |
| $\alpha i$ SV 10/10HV  | 1                         | A06B-6127-H202       |
| $\alpha i$ SV 20/20HV  | 1                         | A06B-6127-H205       |
| $\alpha i$ SV 10/10HVL | 1                         | A06B-6127-H252       |
| $\alpha i$ SV 20/20HVL | 1                         | A06B-6127-H255       |

\*1 The same restriction applies to the old specification A06B-6124-Hxxx.

### 3.1.3.2 AC line filter

| Category | Ordering number   | Applicable models              | Remarks |
|----------|-------------------|--------------------------------|---------|
| Standard | A81L-0001-0083#3C | $\alpha i$ PS <sub>R</sub> 3   |         |
|          | A81L-0001-0101#C  | $\alpha i$ PS <sub>R</sub> 5.5 |         |

For the dimensions of the AC line filters, see Section 8.1.3, "AC Line Filter".

As a compatible product of the A81L-0001-0083#3C, the A81L-0001-0171 can be used.

### 3.1.3.3 Sub module SW

| Category | Ordering number | Applicable models                  | Remarks                                                                                 |
|----------|-----------------|------------------------------------|-----------------------------------------------------------------------------------------|
| Optional | A06B-6111-H401  | $\alpha i$ SP TYPE A,<br>TYPE B    | Main unit<br>60-mm width                                                                |
|          | A06B-6111-K808  | $\alpha i$ SP 90mm,150mm<br>TYPE A | Connection cable<br><br>One cable needs to<br>be prepared for<br>each sub module<br>SW. |
|          | A06B-6111-K809  | $\alpha i$ SP 90mm,150mm<br>TYPE B |                                                                                         |
|          | A06B-6111-K810  | $\alpha i$ SP 60mm, TYPE A         |                                                                                         |
|          | A06B-6111-K811  | $\alpha i$ SP 60mm, TYPE B         |                                                                                         |

A sub module SW can be used with the  $\alpha i$  SP to support the spindle switch function.

- (a) A cable for connecting the sub module SW and the  $\alpha i$  SP needs to be prepared.
- (b) See Section 10.3, and prepare a metal fitting for mounting the sub module SW.

### 3.1.3.4 Sub module SM

| Category | Ordering number | Applicable models                  | Remarks |
|----------|-----------------|------------------------------------|---------|
| Optional | A06B-6111-H403  | $\alpha i$ SP 5.5HV~45HV<br>TYPE B |         |
|          | A06B-6111-H404  | $\alpha i$ SP 75HV~100HV<br>TYPE B |         |

A sub module SM is used with the  $\alpha i$  SP TYPE B to drive a synchronous spindle motor.

### 3.1.3.5 Connectors

The ordering drawing number of the connectors required for connection of input/output signals of each amplifier, and the configuration of each connector, are shown below.

The "Use" column of the table indicates connection symbol K\*, which is described in Section 9.3, "CABLE CONNECTION DETAILS."

For the connector dimensions, see Appendix C.

(1) Usable with each amplifier:

Connectors for the  $\alpha$ i PS interface (between CXA2A and CXA2B)

| Category | Ordering number | Quantity                           | Use             | Connection tool                             |
|----------|-----------------|------------------------------------|-----------------|---------------------------------------------|
| Standard | A06B-6110-K210  | Housing: 1 pcs.<br>Contact: 8 pcs. | K69<br>(Note 1) | Contact crimping tool<br>A06B-6110-K220#D2M |
|          | A06B-6110-K211  | Housing: 1 pcs.<br>Contact: 2 pcs. | (Note 2)        | Contact crimping tool<br>A06B-6110-K220#D2M |

#### NOTE

- 1 See Subsection 9.3.1.4 as for the detailed connection of K69.
- 2 See Subsection 9.3.2.10 as for the connection of battery.

(2) Usable with each amplifier:

Power line connectors for motors and power supplies

| Category | Ordering number         | Quantity                                              | Use          | Connection tool                              |
|----------|-------------------------|-------------------------------------------------------|--------------|----------------------------------------------|
| Standard | A06B-6110-K200<br>#XXSS | Housing: 1 pcs. (XX key)<br>Contact: 4 pcs. (SS size) | K1, K10, K21 | Contact crimping tool<br>A06B-6110-K220#D5SS |
|          | A06B-6110-K200<br>#XXS  | Housing: 1 pcs. (XX key)<br>Contact: 4 pcs. (S size)  | K1, K10, K21 | Contact crimping tool<br>A06B-6110-K220#D5S  |
|          | A06B-6110-K200<br>#XXM  | Housing: 1 pcs. (XX key)<br>Contact: 4 pcs. (M size)  | K1, K10, K21 | Contact crimping tool<br>A06B-6110-K220#D5M  |
|          | A06B-6110-K200<br>#XXL  | Housing: 1 pcs. (XX key)<br>Contact: 4 pcs. (L size)  | K1, K10, K21 | Contact crimping tool<br>A06B-6110-K220#D5L  |
|          | A06B-6110-K201<br>#XYSS | Housing: 1 pcs. (XY key)<br>Contact: 4 pcs. (SS size) | K1, K10, K21 | Contact crimping tool<br>A06B-6110-K220#D5SS |
|          | A06B-6110-K201<br>#XYS  | Housing: 1 pcs. (XY key)<br>Contact: 4 pcs. (S size)  | K1, K10, K21 | Contact crimping tool<br>A06B-6110-K220#D5S  |
|          | A06B-6110-K201<br>#XYM  | Housing: 1 pcs. (XY key)<br>Contact: 4 pcs. (M size)  | K1, K10, K21 | Contact crimping tool<br>A06B-6110-K220#D5M  |
|          | A06B-6110-K201<br>#XYL  | Housing: 1 pcs. (XY key)<br>Contact: 4 pcs. (L size)  | K1, K10, K21 | Contact crimping tool<br>A06B-6110-K220#D5L  |
|          | A06B-6110-K202<br>#YYSS | Housing: 1 pcs. (YY key)<br>Contact: 4 pcs. (SS size) | K1, K10, K21 | Contact crimping tool<br>A06B-6110-K220#D5SS |
|          | A06B-6110-K202<br>#YYS  | Housing: 1 pcs. (YY key)<br>Contact: 4 pcs. (S size)  | K1, K10, K21 | Contact crimping tool<br>A06B-6110-K220#D5S  |
|          | A06B-6110-K202<br>#YYM  | Housing: 1 pcs. (YY key)<br>Contact: 4 pcs. (M size)  | K1, K10, K21 | Contact crimping tool<br>A06B-6110-K220#D5M  |
|          | A06B-6110-K202<br>#YYL  | Housing: 1 pcs. (YY key)<br>Contact: 4 pcs. (L size)  | K1, K10, K21 | Contact crimping tool<br>A06B-6110-K220#D5L  |

(3) For  $\alpha i$  PS

| Category | Ordering number | Quantity                                  | Use        | Connection tool                             |
|----------|-----------------|-------------------------------------------|------------|---------------------------------------------|
| Standard | A06B-6071-K203  | Housing: 1 pcs./module<br>Contact: 7 pcs. | K3, K6, K7 | Contact crimping tool<br>A06B-6110-K220#D3L |
| Standard | A06B-6130-K201  | Housing: 1 pcs.<br>Contact: 6 pcs.        | K100       | Contact crimping tool<br>A06B-6110-K220#D2M |

(4) For  $\alpha i$  SV

| Category | Ordering number | Quantity                                         | Use     | Connection tool                             |
|----------|-----------------|--------------------------------------------------|---------|---------------------------------------------|
| Standard | A06B-6078-K225  | Case: 1 pcs.<br>Connector: 1 pcs.<br>Solder type | K22     |                                             |
|          | A06B-6073-K216  | Case: 2 pcs.<br>Connector: 4 pcs.                | K24,K25 | Contact crimping tool<br>A06B-6110-K220#D3L |

(5) For  $\alpha i$  SP

| Category | Ordering number | Quantity                                         | Use           | Use                                                           |
|----------|-----------------|--------------------------------------------------|---------------|---------------------------------------------------------------|
| Standard | A06B-6078-K222  | Case: 1 pcs.<br>Connector: 1 pcs.<br>Solder type | K14, K17, K71 |                                                               |
|          | A06B-6078-K223  | Case: 1 pcs.<br>Connector: 1 pcs.<br>Crimp type  | K12           | Purchase a connector for<br>F130-20S from Hirose<br>Electric. |
|          | A06B-6078-K224  | Case: 1 pcs.<br>Connector: 1 pcs.<br>Solder type | K33           |                                                               |
|          | A06B-6078-K225  | Case: 1 pcs.<br>Connector: 1 pcs.<br>Crimp type  | K16           |                                                               |

**NOTE**

- 1 Some connectors are attached to a cable by crimping or soldering. Be careful when placing an order.
- 2 When attaching a connector of crimp type, use a dedicated tool prepared by each manufacturer. For the specifications of the tools, see the description of "Connection tools" below.

## Connection tools

Connector connection tools are indicated below with their ordering numbers for purchase from FANUC. The connection tools can also be directly purchased from each manufacturer.

- (a) Connectors manufactured by Tyco Electronics AMP  
D-2100 series (for  $\alpha i$  PS interface)

| Category | Ordering number    | Manufacturer part number | Use                             |
|----------|--------------------|--------------------------|---------------------------------|
| Optional | A06B-6110-K220#D2M | 91595-1                  | M size<br>Contact crimping tool |
| Optional | A06B-6110-K220#D2R | 1276716-1                | Contact extractor               |

- D-3000 series (for  $\alpha i$  PS)

| Category | Ordering number    | Manufacturer part number | Use                             |
|----------|--------------------|--------------------------|---------------------------------|
| Optional | A06B-6110-K220#D3L | 91558-1                  | L size<br>Contact crimping tool |
| Optional | A06B-6110-K220#D3R | 234168-1                 | Contact extractor               |

- D-5000 series (for power line)

| Category | Ordering number     | Manufacturer part number | Use                              |
|----------|---------------------|--------------------------|----------------------------------|
| Optional | A06B-6110-K220#D5SS | 91596-1                  | SS size<br>Contact crimping tool |
| Optional | A06B-6110-K220#D5S  | 234170-1                 | S size<br>Contact crimping tool  |
| Optional | A06B-6110-K220#D5M  | 234171-1                 | M size<br>Contact crimping tool  |
| Optional | A06B-6110-K220#D5L  | 1366044-1                | L size<br>Contact crimping tool  |
| Optional | A06B-6110-K220#D5R  | 409158-1                 | Contact extractor                |

- (b) Half-pitch 20-pin press-mount connector of Hirose Electric (FI30-20S)

| Name                   | Manufacturer part number |
|------------------------|--------------------------|
| Jig for neat cabling   | FI30-20CAT1              |
| Jig for press-mounting | HHP-502, FI30-20GP       |

- (c) Half-pitch 20-pin press-mount connector of Honda Tsushin Kogyo (PCR-E20FA)

| Name                   | Manufacturer part number  |
|------------------------|---------------------------|
| Jig for neat cabling   | JGPS-015-1/1-20, JGPS-014 |
| Jig for press-mounting | MFC-K1, PCS-K1            |



**Connector configuration****- Configuration of A06B-6110-K210**

| Connector name | Manufacturer    | Part number           | Quantity | Use               | Dimensions |
|----------------|-----------------|-----------------------|----------|-------------------|------------|
| CXA2A          | AMP Japan, Ltd. | 1-1318119-4 (housing) | 1        | For $\alpha i$ PS | C(d)       |
| CXA2B          |                 | 131807-1 (contact)    | 8        |                   | -          |

**- Configuration of A06B-6110-K211**

| Connector name | Manufacturer    | Part number           | Quantity | Use                                | Dimensions |
|----------------|-----------------|-----------------------|----------|------------------------------------|------------|
| CXA2A          | AMP Japan, Ltd. | 1-1318119-4 (housing) | 1        | For connection to separate battery | C(d)       |
| CXA2B          |                 | 131807-1 (contact)    | 2        |                                    | -          |

**- Configuration of A06B-6093-K303 (Connector with lock mechanism)**

| Connector name | Manufacturer                              | Part number      | Quantity | Use                                | Dimensions |
|----------------|-------------------------------------------|------------------|----------|------------------------------------|------------|
| CX5X           | Japan Aviation Electronics Industry, Ltd. | IL-L2S—S3L-B (N) | 1        | For connection to separate battery | C(d)       |
|                |                                           | IL-C2-1-00001    | 2        |                                    | -          |

**- Configuration of A06B-6110-K200#XXSS**

| Connector name | Manufacturer    | Part number          | Quantity | Use                                      | Dimensions |
|----------------|-----------------|----------------------|----------|------------------------------------------|------------|
| CZ2            | AMP Japan, Ltd. | 1-917807-2 (housing) | 1        | For L-axis motor power                   | -          |
| CZ2L           |                 | 1318986-6 (contact)  | 4        | Wire diameter: 0.75 mm <sup>2</sup> max. | -          |

**- Configuration of A06B-6110-K200#XXS**

| Connector name | Manufacturer    | Part number          | Quantity | Use                                   | Dimensions |
|----------------|-----------------|----------------------|----------|---------------------------------------|------------|
| CZ2            | AMP Japan, Ltd. | 1-917807-2 (housing) | 1        | For L-axis motor power                | -          |
| CZ2L           |                 | 316040-6 (contact)   | 4        | Wire diameter: 2.0mm <sup>2</sup> max | -          |

**- Configuration of A06B-6110-K200#XXM**

| Connector name | Manufacturer    | Part number          | Quantity | Use                                           | Dimensions                            |
|----------------|-----------------|----------------------|----------|-----------------------------------------------|---------------------------------------|
| CZ1, CZ2       | AMP Japan, Ltd. | 1-917807-2 (housing) | 1        | For input power supply and L-axis motor power | -                                     |
| CZ2L           |                 | 316041-6 (contact)   | 4        |                                               | Wire diameter: 5.5mm <sup>2</sup> max |

**- Configuration of A06B-6110-K200#XXL**

| Connector name | Manufacturer    | Part number          | Quantity | Use                                   | Dimensions |
|----------------|-----------------|----------------------|----------|---------------------------------------|------------|
| CZ2            | AMP Japan, Ltd. | 1-917807-2 (housing) | 1        | For L-axis motor power                | -          |
| CZ2L           |                 | 1318697-6 (contact)  | 4        | Wire diameter: 8.0mm <sup>2</sup> max | -          |

**- Configuration of A06B-6110-K201#XYSS**

| Connector name | Manufacturer    | Part number          | Quantity | Use                                                               | Dimensions |
|----------------|-----------------|----------------------|----------|-------------------------------------------------------------------|------------|
| CZ2M           | AMP Japan, Ltd. | 3-917807-2 (housing) | 1        | For M-axis motor power<br>Wire diameter: 0.75 mm <sup>2</sup> max | -          |
|                |                 | 1318986-6 (contact)  | 4        |                                                                   | -          |

**- Configuration of A06B-6110-K201#XYS**

| Connector name | Manufacturer    | Part number          | Quantity | Use                                   | Dimensions |
|----------------|-----------------|----------------------|----------|---------------------------------------|------------|
| CZ2M           | AMP Japan, Ltd. | 3-917807-2 (housing) | 1        | For M-axis motor power                | -          |
|                |                 | 316040-6 (contact)   | 4        | Wire diameter: 2.0mm <sup>2</sup> max | -          |

**- Configuration of A06B-6110-K201#XYM**

| Connector name | Manufacturer    | Part number          | Quantity | Use                                   | Dimensions |
|----------------|-----------------|----------------------|----------|---------------------------------------|------------|
| CZ2M           | AMP Japan, Ltd. | 3-917807-2 (housing) | 1        | For M-axis motor power                | -          |
|                |                 | 316041-6 (contact)   | 4        | Wire diameter: 5.5mm <sup>2</sup> max | -          |

**- Configuration of A06B-6110-K201#XYL**

| Connector name | Manufacturer    | Part number          | Quantity | Use                                   | Dimensions |
|----------------|-----------------|----------------------|----------|---------------------------------------|------------|
| CZ2M           | AMP Japan, Ltd. | 3-917807-2 (housing) | 1        | For M-axis motor power                | -          |
|                |                 | 1318697-6 (contact)  | 4        | Wire diameter: 8.0mm <sup>2</sup> max | -          |

**- Configuration of A06B-6110-K202#YYSS**

| Connector name | Manufacturer    | Part number          | Quantity | Use                                     | Dimensions |
|----------------|-----------------|----------------------|----------|-----------------------------------------|------------|
| CZ2N           | AMP Japan, Ltd. | 2-917807-2 (housing) | 1        | For N-axis motor power                  | -          |
|                |                 | 1318986-6 (contact)  | 4        | Wire diameter: 0.75 mm <sup>2</sup> max | -          |

**- Configuration of A06B-6110-K202#YYSS**

| Connector name | Manufacturer    | Part number          | Quantity | Use                                                                | Dimensions |
|----------------|-----------------|----------------------|----------|--------------------------------------------------------------------|------------|
| CZ2N<br>CZ3    | AMP Japan, Ltd. | 2-917807-2 (housing) | 1        | For N-axis motor power                                             | -          |
|                |                 | 316040-6 (contact)   | 4        | PSR regenerative resistor<br>Wire diameter: 2.0mm <sup>2</sup> max | -          |

**- Configuration of A06B-6110-K202#YYM**

| Connector name | Manufacturer    | Part number          | Quantity | Use                                   | Dimensions |
|----------------|-----------------|----------------------|----------|---------------------------------------|------------|
| CZ2N           | AMP Japan, Ltd. | 2-917807-2 (housing) | 1        | For N-axis motor power                | -          |
|                |                 | 316041-6 (contact)   | 4        | Wire diameter: 5.5mm <sup>2</sup> max | -          |

**- Configuration of A06B-6110-K202#YYL**

| Connector name | Manufacturer    | Part number          | Quantity | Use                                   | Dimensions |
|----------------|-----------------|----------------------|----------|---------------------------------------|------------|
| CZ2N           | AMP Japan, Ltd. | 2-917807-2 (housing) | 1        | For N-axis motor power                | -          |
|                |                 | 1318697-6 (contact)  | 4        | Wire diameter: 8.0mm <sup>2</sup> max | -          |

**- Configuration of A06B-6071-K203**

| Connector name | Manufacturer    | Part number          | Quantity | Use                                       | Dimensions |
|----------------|-----------------|----------------------|----------|-------------------------------------------|------------|
| CX1A           | AMP Japan, Ltd. | 1-178128-3 (housing) | 1        | For control, single-phase<br>200VAC input | C(a)       |
|                |                 | 1-175218-2 (contact) | 3        |                                           | C(c)       |
| CX4            | AMP Japan, Ltd. | 1-178128-3 (housing) | 1        | For emergency stop signal                 | C(a)       |
|                |                 | 1-175218-2 (contact) | 2        |                                           | C(c)       |
| CX3            | AMP Japan, Ltd. | 2-178128-3 (housing) | 1        | For ON/OFF control for<br>external MCC    | C(b)       |
|                |                 | 1-175218-2 (contact) | 2        |                                           | C(c)       |

**- Configuration of A06B-6130-K201**

| Connector name | Manufacturer    | Part number           | Quantity | Use                                   | Dimensions |
|----------------|-----------------|-----------------------|----------|---------------------------------------|------------|
| CX37           | AMP Japan, Ltd. | 1-1318119-3 (housing) | 1        | For power failure detection<br>output | -          |
|                |                 | 1318107-1 (contact)   | 6        |                                       | -          |

**- Configuration of A06B-6078-K225 (solder type, side cable type)**

| Connector name | Manufacturer                 | Part number             | Quantity | Use             | Dimensions |
|----------------|------------------------------|-------------------------|----------|-----------------|------------|
| JFx            | Hirose Electric<br>Co., Ltd. | FI40B-2015S (connector) | 1        | For pulse coder | C(g)       |
|                |                              | FI-20-CVS2 (case)       | 1        |                 | C(h)       |

**- Configuration of A06B-6073-K216**

| Connector name | Manufacturer    | Part number          | Quantity | Use                      | Dimensions |
|----------------|-----------------|----------------------|----------|--------------------------|------------|
| CX8            | AMP Japan, Ltd. | 2-178128-3 (housing) | 1        | For DB interlock signals | C(b)       |
|                |                 | 1-175218-2 (contact) | 2        |                          | C(c)       |
| CX9            | AMP Japan, Ltd. | 1-178128-3 (housing) | 1        | For DB driving coil      | C(a)       |
|                |                 | 1-175218-2 (contact) | 2        |                          | C(c)       |

**- Configuration of A06B-6078-K222 (solder type, side cable type)**

| Connector name | Manufacturer              | Part number           | Quantity | Use        | Dimensions |
|----------------|---------------------------|-----------------------|----------|------------|------------|
| JY1            | Hirose Electric Co., Ltd. | FI40B-20S (connector) | 1        | See below. | C(f)       |
| JYA2           |                           |                       |          |            |            |
| JYA3           |                           | FI-20-CVS5 (case)     | 1        |            | C(i)       |
| JYA4           |                           |                       |          |            |            |

Use  $\alpha i$  M sensor,  $\alpha i$  MZ sensor,  $\alpha i$  BZ sensor, external one-rotation signal, speedometer, or analog override

**- Configuration of A06B-6078-K223 (crimp type, side cable type)**

| Connector name | Manufacturer              | Part number          | Quantity | Use        | Dimensions |
|----------------|---------------------------|----------------------|----------|------------|------------|
| JA7A           | Hirose Electric Co., Ltd. | FI30-20S (connector) | 1        | See below. | C(e)       |
| JA7B           |                           | FI-20-CVS2 (case)    | 1        |            | C(h)       |

Use JA7A and JA7B : For communication between CNC and SP or SPC

**- Configuration of A06B-6078-K224 (solder type, side cable type)**

| Connector name | Manufacturer              | Part number           | Quantity | Use        | Dimensions |
|----------------|---------------------------|-----------------------|----------|------------|------------|
| JA7A           | Hirose Electric Co., Ltd. | FI40B-20S (connector) | 1        | See below. | C(f)       |
| JA7B           |                           | FI-20-CVS2 (case)     | 1        |            | C(h)       |

Use JY7B and JY7B : For communication between CNC and SP or SPC

**- Configuration of A06B-6078-K225 (solder type, side cable type)**

| Connector name | Manufacturer              | Part number             | Quantity | Use        | Dimensions |
|----------------|---------------------------|-------------------------|----------|------------|------------|
| JYA3           | Hirose Electric Co., Ltd. | FI40B-2015S (connector) | 1        | See below. | C(g)       |
| JYA4           |                           | FI-2015-CVS (case)      | 1        |            | C(j)       |

Use JYA3: For  $\alpha i$  position coder  
JYA4: For  $\alpha i$  position coder S

### 3.1.3.6 Fuses

The ordering numbers of fuses used with each amplifier ( $\alpha i$  PS,  $\alpha i$  SV,  $\alpha i$  SP) are indicated below.

(1) For control power supply for  $\alpha i$  PS

| Category | Ordering number | Remarks                                                                                                                                                             |
|----------|-----------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Optional | A06B-6077-K250  | Manufacturer: DAITO TSUSHIN KOGYO Ltd.<br>Manufacturer part number : DM20, DM50<br>Specification : 2A/250V, 5A/250V<br>Use : For short-circuit protection of 200VAC |

(2) For control power supply for  $\alpha i$  PS<sub>R</sub>

| Category | Ordering number | Remarks                                                                                                                                              |
|----------|-----------------|------------------------------------------------------------------------------------------------------------------------------------------------------|
| Optional | A06B-6081-K250  | Manufacturer: DAITO TSUSHIN KOGYO Ltd.<br>Manufacturer part number : DM50<br>Specification : 5A/250V<br>Use : For short-circuit protection of 200VAC |

(3) For control power supply for  $\alpha i$  SV and  $\alpha i$  SP

| Category | Ordering number | Remarks                                                                                                                                                                     |
|----------|-----------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Optional | A06B-6073-K250  | Manufacturer: DAITO TSUSHIN KOGYO Ltd.<br>Manufacturer part number : LM32C<br>Specification : 3.2A/48V<br>Use : For short-circuit protection of 24-VDC control power supply |

#### NOTE

- 1 When a fuse blows, the control circuit may often be faulty. In such a case, replacing the fuse does not correct the trouble. Replace the amplifier.
- 2 A fuse is installed on the control board of an amplifier, but is not directly accessible for replacement from the outside. When replacing a fuse, extract the control board.

### 3.1.3.7 Power transformer

When an  $\alpha i$  PS series of the 200V input series is used in an area where the input voltage is not within the range of 200 to 240VAC, a power transformer is required. The ordering drawing numbers and specifications of power transformers manufactured by FANUC are listed below. When other than a FANUC power transformers is to be prepared by the user, it must satisfy the transformer specifications indicated Section 2.1.

#### Ordering drawing numbers of power transformers manufactured by FANUC

| Category | Ordering number | Name                                                                  | Remarks                                          |
|----------|-----------------|-----------------------------------------------------------------------|--------------------------------------------------|
| Optional | A80L-0024-0006  | $\alpha i$ PS <sub>R</sub> 3 (at 2kw output)                          |                                                  |
|          | A80L-0024-0003  | $\alpha i$ PS <sub>R</sub> 3 (at 3kw output)                          |                                                  |
|          | A06B-6052-J001  | $\alpha i$ PS <sub>R</sub> 5.5 (at 5.5kw output)<br>$\alpha i$ PS 5.5 | Primary<br>380/415/460VAC<br>Secondary<br>200VAC |
|          | A06B-6044-J006  | $\alpha i$ PS <sub>R</sub> 5.5 (at 7.5kw output)<br>$\alpha i$ PS 11i |                                                  |
|          | A06B-6044-J007  | $\alpha i$ PS 15                                                      |                                                  |
|          | A06B-6044-J010  | $\alpha i$ PS 26, 30                                                  |                                                  |
|          | A06B-6044-J015  | $\alpha i$ PS 37<br>$\alpha i$ PS 55 (at 45kw output)                 |                                                  |

## Specifications of power transformers manufactured by FANUC

Power transformer for  $\alpha i$  PS

| Model                               | $\alpha i$ PS 5.5                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | $\alpha i$ PS 11 | $\alpha i$ PS 15 | $\alpha i$ PS 26, 30 | $\alpha i$ PS 37<br>$\alpha i$ PS 55<br>(at 45kw output) |
|-------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|------------------|----------------------|----------------------------------------------------------|
| Ordering drawing number             | A06B-6052-J001                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | A06B-6044-J006   | A06B-6044-J007   | A06B-6044-J010       | A06B-6044-J015                                           |
| FANUC drawing number                | A80L-0001-0496                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | A80L-0001-0313   | A80L-0001-0314   | A80L-0001-0352       | A80L-0001-0452                                           |
| Rated capacity                      | 10kVA                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 20kVA            | 30kVA            | 45kVA                | 64kVA                                                    |
| Rated primary voltage               | 380/415/460VAC<br>230VAC (The secondary is used as an autotransformer.)<br>+10% -15%, 50/60 $\pm$ 1Hz, 3 $\phi$                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                  |                  |                      |                                                          |
| Rated primary current               | 15A (at 380V)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 30A (at 380V)    | 46A (at 380V)    | 68A (at 380V)        | 97A (at 380V)                                            |
|                                     | 14A (at 415V)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 28A (at 415V)    | 42A (at 415V)    | 63A (at 415V)        | 89A (at 415V)                                            |
|                                     | 13A (at 460V)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 25A (at 460V)    | 38A (at 460V)    | 56A (at 460V)        | 80A (at 460V)                                            |
| Rated secondary voltage             | 200/220/230VAC                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                  |                  |                      |                                                          |
| Rated primary current               | 29A                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 58A              | 87A              | 130A                 | 185A                                                     |
| Voltage regulation at the secondary | 5%                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                  |                  |                      |                                                          |
| Voltage deviation at the secondary  | $\pm 3\%$                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                  |                  |                      |                                                          |
| Connection                          | Y-Y connection                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                  |                  |                      |                                                          |
| Insulation                          | Class H (maximum allowable temperature : 180°C)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                  |                  |                      |                                                          |
| Ambient temperature                 | 0 to 45°C                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                  |                  |                      |                                                          |
| Allowable temperature rise          | 135deg                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                  |                  |                      |                                                          |
| Relative humidity                   | Max. 95%RH                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                  |                  |                      |                                                          |
| Type                                | Dry type, natural air cooling type                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                  |                  |                      |                                                          |
| Dielectric withstand voltage        | 2000VAC, for 1 minute                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                  |                  |                      |                                                          |
| Weight                              | Max. 61kg                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Max. 115kg       | Max. 165kg       | Max. 260kg           | Max. 375kg                                               |
| Outline drawing                     | Fig.8.1.4(a)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Fig.8.1.4(b)     | Fig.8.1.4(c)     | Fig.8.1.4(d)         | Fig.8.1.4(e)                                             |
| Connection diagram                  | <p>The connection diagram illustrates the internal wiring of the transformer. On the left, the primary winding (PRL.) is connected to terminals R3 (460V), R2 (415V), and R1 (380V). It is also connected to T1, T2, and T3. On the right, the secondary winding (SEC.) is connected to R4 (230V) and provides a 200V output at terminals U, V, and W. A neutral point is indicated between the windings. Terminals S1, S2, and S3 are connected to the primary, while S4, T4, and G are connected to the secondary. A central SHIELD is shown separating the two windings.</p> |                  |                  |                      |                                                          |

Power transformer for  $\alpha i$  PS<sub>R</sub>


| Model<br>Item                       | $\alpha i$ PS <sub>R</sub> 3<br>(at 2kw output)                                                                             | $\alpha i$ PS <sub>R</sub> 3<br>(at 3kw output) | $\alpha i$ PS <sub>R</sub> 5.5<br>(at 5.5kw output)                                                               | $\alpha i$ PS <sub>R</sub> 5.5<br>(at 7.5kw output) |
|-------------------------------------|-----------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------|-------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------|
| Ordering drawing number             | A80L-0024-0006                                                                                                              | A80L-0026-0003                                  | A06B-6052-J001                                                                                                    | A06B-6044-J006                                      |
| FANUC drawing number                | A80L-0024-0006                                                                                                              | A80L-0026-0003                                  | A80L-0001-0496                                                                                                    | A80L-0001-0313                                      |
| Rated capacity                      | 3.5kVA                                                                                                                      | 5kVA                                            | 10kVA                                                                                                             | 20kVA                                               |
| Rated primary voltage               | 200/220/230/240VAC , $\Delta$ connection<br>380/415/460/480/550VAC , Y connection<br>$\pm$ 15%, 50/60Hz $\pm$ 2Hz, 3 $\phi$ |                                                 | 380/415/460VAC<br>230VAC(The secondary is used as an autotransformer.)<br>$+10\%$ -15%, 50/60 $\pm$ 1Hz, 3 $\phi$ |                                                     |
| Rated primary current               |                                                                                                                             |                                                 | 15A (at 380V)                                                                                                     | 30A (at 380V)                                       |
|                                     | 5.3A (at 380V)                                                                                                              | 7.6A (at 380V)                                  | 14A (at 415V)                                                                                                     | 28A (at 415V)                                       |
|                                     |                                                                                                                             |                                                 | 13A (at 460V)                                                                                                     | 25A (at 460V)                                       |
| Rated secondary voltage             | 210VAC                                                                                                                      |                                                 | 200VAC                                                                                                            |                                                     |
| Rated primary current               | 9.6A                                                                                                                        | 13.7A                                           | 29A                                                                                                               | 58A                                                 |
| Voltage regulation at the secondary | 2%                                                                                                                          |                                                 | 5%                                                                                                                |                                                     |
| Voltage deviation at the secondary  | $\pm$ 3%                                                                                                                    |                                                 |                                                                                                                   |                                                     |
| Connection                          | $\Delta$ - $\Delta$ connection or Y- $\Delta$ connection                                                                    |                                                 | Y-Y connection                                                                                                    |                                                     |
| Insulation                          | Class B<br>(maximum allowable temperature: 130°C)                                                                           |                                                 | Class H<br>(maximum allowable temperature: 180°C)                                                                 |                                                     |
| Ambient temperature                 | -20 to 55°C                                                                                                                 |                                                 | 0 to 45°C                                                                                                         |                                                     |
| Allowable temperature rise          | 135deg                                                                                                                      |                                                 |                                                                                                                   |                                                     |
| Thermostat                          | B contact<br>(operating temperature: 135°C)                                                                                 |                                                 | None                                                                                                              |                                                     |
| Relative humidity                   | Max. 95%RH                                                                                                                  |                                                 |                                                                                                                   |                                                     |
| Type                                | Dry type, natural air cooling type                                                                                          |                                                 |                                                                                                                   |                                                     |
| Dielectric withstand voltage        | 2300VAC, for 1 minute                                                                                                       |                                                 | 2000VAC, for 1 minute                                                                                             |                                                     |
| Weight                              | Max. 27kg                                                                                                                   | Max. 36kg                                       | Max. 61kg                                                                                                         | Max. 115kg                                          |
| Outline drawing                     | Fig.8.1.5(e)                                                                                                                | Fig.8.1.5(e)                                    | Fig.8.1.5(a)                                                                                                      | Fig.8.1.5(b)                                        |
| Connection diagram                  |                                                                                                                             |                                                 |                                                                                                                   |                                                     |

## Connecting a power transformer

Power transformers must be set according to the supply voltage used.

- (a) Connection points of power transformers for  $\alpha i$  PS 5.5,  $\alpha i$  PS 11,  $\alpha i$  PS 15,  $\alpha i$  PS 26,  $\alpha i$  PS 30, and  $\alpha i$  PS 37

| Supply voltage | Connection points at the primary   | Remarks |
|----------------|------------------------------------|---------|
| 380 VAC        | R - R1, S - S1, T - T1 (380-V tap) |         |
| 400 VAC        | R - R1, S - S1, T - T1 (380-V tap) |         |
| 415 VAC        | R - R2, S - S2, T - T2 (415-V tap) |         |
| 440 VAC        | R - R2, S - S2, T - T2 (415-V tap) |         |
| 460 VAC        | R - R3, S - S3, T - T3 (460-V tap) |         |
| 480 VAC        | R - R3, S - S3, T - T3 (460-V tap) |         |

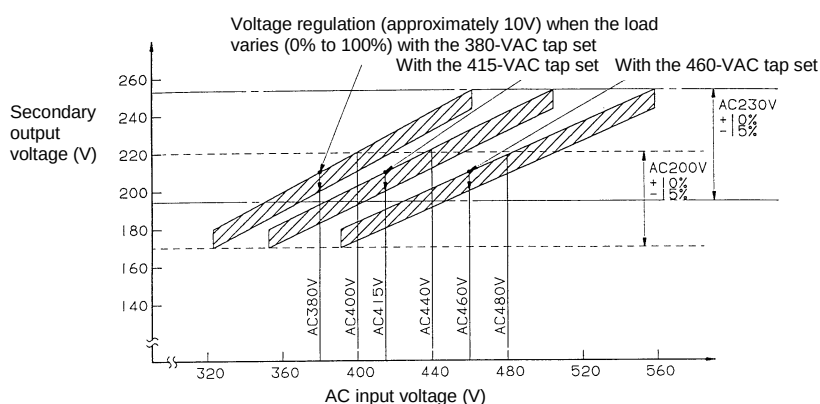

### ⚠ CAUTION

- 1 When installing a transformer in a cabinet, be careful to ensure that the transformer does not thermally affect other equipment. For example, separate the transformer from the other equipment.
- 2 When installing a transformer outside the cabinet, make sure that the transformer is not directly exposed to cutting chips or coolant.
- 3 If there is a possibility of the transformer falling, secure the transformer with bolts or similar.



### 3.1.3.8 Regenerative discharge unit

Whenever a  $\alpha i$  PS<sub>R</sub> (resistance regeneration type Common Power Supply) is used, a regenerative discharge unit must be specified. For how to select the regenerative discharge unit, see Subsection 4.4.4.

| Category | Name                              | Ordering number | Remarks                                                  |
|----------|-----------------------------------|-----------------|----------------------------------------------------------|
| Standard | $\alpha i$ PS <sub>R</sub> 3      | A06B-6089-H510  | 16 $\Omega$ /100W (at natural cooling)                   |
|          | $\alpha i$ PS <sub>R</sub> 3, 5.5 | A06B-6089-H500  | 16 $\Omega$ /200W (at natural cooling)                   |
|          |                                   | A06B-6089-H713  | 16 $\Omega$ /800W (forced cooling fan motor is included) |
|          | $\alpha i$ PS <sub>R</sub> 5.5    | A06B-6089-H711  | 8 $\Omega$ /800W (forced cooling fan motor is included)  |
|          |                                   | A06B-6089-H712  | 8 $\Omega$ /1200W (forced cooling fan motor is included) |

See Subsection 8.1.5, "Selecting a Regenerative Discharge Unit" for details of selection.

### 3.1.3.9 Cables

#### DC link short bar

| Category | Ordering number | Applicable terminal-to-terminal distance |
|----------|-----------------|------------------------------------------|
| Optional | A06B-6078-K801  | 90mm (86mm - 94mm)                       |
|          | A06B-6078-K803  | 64mm (60mm - 68mm)                       |
|          | A06B-6078-K840  | 154mm (150mm - 158mm)                    |
|          | A06B-6078-K841  | 300mm (298mm - 302mm)                    |
|          | A06B-6078-K842  | 150mm (146mm - 154mm)                    |

See 9.3.1.2 for details.

A06B-6078-K842 is used to connect between a 150-mm wide amplifier (left) and a 300-mm wide amplifier (right).

#### Cables for connection of amplifiers

| Category | Ordering number | Cable length | Applicable amplifier width |
|----------|-----------------|--------------|----------------------------|
| Optional | A06B-6110-K801  | 200mm        | 150mm width amplifier      |
|          | A06B-6110-K802  | 150mm        | 90mm width amplifier       |
|          | A06B-6110-K803  | 100mm        | 60mm width amplifier       |
|          | A06B-6110-K804  | 400mm        | 300mm width amplifier      |

#### NOTE

- 1 The above table lists the cable for each interface between amplifiers.  
For connection of CXA2A and CXA2B
- 2 The connection cable for the battery of the absolute pulse coder is not included in the cables shown above. For details, see Subsection 9.3.1.10.

#### Cables for connection of detectors

| Category | Ordering number | Use                                           | Remarks                                          |
|----------|-----------------|-----------------------------------------------|--------------------------------------------------|
| Optional | A06B-6078-K811  | For $\alpha i$ M sensor, $\alpha i$ MZ sensor | Cable length : 7m                                |
|          | A06B-6078-K814  | For $\alpha i$ Positioncoder                  | Cable length : 7m<br>Connector figure : Straight |
|          | A06B-6078-K815  |                                               | Cable length : 7m<br>Connector figure : Elbow    |

#### Cables for FSSB interface

| Category | Ordering number       | Cable length | Applicable amplifier width                  |
|----------|-----------------------|--------------|---------------------------------------------|
| Optional | A66L-6001-0023#L150R0 | 15cm         | For between $\alpha i$ SV and $\alpha i$ SV |
|          | A66L-6001-0023#L300R0 | 30cm         |                                             |

### 3.1.3.10 Circuit breaker and magnetic contactor

The circuit breaker and magnetic contactor capacities are determined by the Common Power Supply specifications. The ordering drawing numbers and specifications of the circuit breakers and magnetic contactors are shown below.

When this equipment is to be prepared by the user, it must satisfy the circuit breaker and magnetic contactor specifications indicated below.

#### Circuit breaker and magnetic contactor specifications

For  $\alpha i$  PS and  $\alpha i$  PS<sub>R</sub>

| PS name                        | Circuit breaker 1 | Circuit breaker 2 | Magnetic contactor | Remarks |
|--------------------------------|-------------------|-------------------|--------------------|---------|
| $\alpha i$ PS <sub>R</sub> 3   | 20A               | 5A                | 20A                |         |
| $\alpha i$ PS <sub>R</sub> 5.5 | 30A               |                   | 30A                | Note 4) |
|                                | 50A               |                   | 50A                | Note 5) |
| $\alpha i$ PS 5.5              | 30A to 50A        |                   | 30A                |         |
| $\alpha i$ PS 11               | 55A to 75A        |                   | 55A                |         |
| $\alpha i$ PS 15               | 70A to 100A       |                   | 70A                |         |
| $\alpha i$ PS 26               | 120A to 150A      |                   | 120A               |         |
| $\alpha i$ PS 30               | 140A to 200A      |                   | 140A               |         |
| $\alpha i$ PS 37               | 175A to 225A      |                   | 175A               |         |
| $\alpha i$ PS 55               | 250A              |                   | 250A               |         |

#### NOTE

- 1 For the installation positions of the circuit breakers and magnetic contactor, see Section 1.2.
- 2 Set the rated voltage of circuit breakers 1 and 2 according to the power supply voltage.
- 3 The current and voltage of the operation coil of the magnetic contactor must be within the rating of the internal contact [CX3 (MCC)] of the  $\alpha i$  PS.  
For details, see Subsection 9.3.1.5.
- 4 When the  $\alpha i$  PS<sub>R</sub> 5.5 is used at a rated output capacity of 5.5 kW
- 5 When the  $\alpha i$  PS<sub>R</sub> 5.5 is used at a rated output capacity of 7.5 kW
- 6 When the circuit breaker trips, the contact of the magnetic contactor may be melted. Therefore, before turning on the circuit breaker again, check to make sure that the contact of the magnetic contactor is not melted.

For 400-V input series of  $\alpha i$  PS

| PS name             | Circuit breaker 1 | Circuit breaker 2 | Circuit breaker 3 | Magnetic contactor | Remarks |
|---------------------|-------------------|-------------------|-------------------|--------------------|---------|
| $\alpha i$ PS 11HV  | 30A               | 3A                | 3A                | 30A                |         |
| $\alpha i$ PS 18HV  | 45A               |                   |                   | 45A                |         |
| $\alpha i$ PS 30HV  | 75A               |                   |                   | 75A                |         |
| $\alpha i$ PS 45HV  | 125A              |                   |                   | 125A               |         |
| $\alpha i$ PS 75HV  | 200A              |                   |                   | 200A               |         |
| $\alpha i$ PS 100HV | 250A              |                   |                   | 250A               |         |

#### NOTE

- 1 For the installation positions of the circuit breakers and magnetic contactor, see Section 1.2.
- 2 Set the rated voltage of circuit breakers 1 and 2 according to the power supply voltage.
- 3 The current and voltage of the operation coil of the magnetic contactor must be within the rating of the internal contact [CX3 (MCC)] of the  $\alpha i$  PS.  
For details, see Subsection 9.3.1.5.
- 4 When the circuit breaker trips, the contact of the magnetic contactor may be melted. Therefore, before turning on the circuit breaker again, check to make sure that the contact of the magnetic contactor is not melted.

### Ordering drawing numbers of circuit breakers

| Category | Model                                                                     | Ordering number | Outline drawing | Circuit breaker specification | Circuit breaker cover specification |
|----------|---------------------------------------------------------------------------|-----------------|-----------------|-------------------------------|-------------------------------------|
| Optional | $\alpha i$ PS <sub>R</sub> 3<br>$\alpha i$ PS 11HV                        | A06B-6077-K101  | 8.1.7(a)        | Fuji Electric EA53C/30        | Fuji Electric BZ6TBH10C3            |
|          | $\alpha i$ PS <sub>R</sub> 5.5<br>$\alpha i$ PS 5.5<br>$\alpha i$ PS 18HV | A06B-6077-K102  | 8.1.7(b)        | Fuji Electric EA103C/50       | Fuji Electric BZ6TBH10C3            |
|          | $\alpha i$ PS 11                                                          | A06B-6077-K103  | 8.1.7(c)        | Fuji Electric EA103C/60       | Fuji Electric BZ6TBH10C3            |
|          | $\alpha i$ PS 15, 30HV                                                    | A06B-6077-K104  | 8.1.7(d)        | Fuji Electric EA103C/75       | Fuji Electric BZ6TBH10C3            |
|          | $\alpha i$ PS 45HV                                                        | A06B-6077-K108  | 8.1.7(e)        | Fuji Electric EA203B/125      | Fuji Electric BZ-TB40B              |
|          | $\alpha i$ PS 26, 30                                                      | A06B-6077-K105  | 8.1.7(f)        | Fuji Electric EA203B/150      | Fuji Electric BZ-TB40B              |
|          | $\alpha i$ PS 37                                                          | A06B-6077-K110  | 8.1.7(g)        | Fuji Electric EA203B/175      | Fuji Electric BZ-TB40B              |
|          | $\alpha i$ PS 75HV                                                        | A06B-6077-K109  | 8.1.7(h)        | Fuji Electric EA203B/200      | Fuji Electric BZ-TB40B              |
|          | $\alpha i$ PS 55, 100HV                                                   | A06B-6077-K111  | 8.1.7(i)        | Fuji Electric EA403B/250      | Fuji Electric BZ-TB60B              |
|          | For control power                                                         | A06B-6077-K106  | 8.1.7(j)        | Fuji Electric EA33AC/5        | Fuji Electric BZ6TBH10C3            |

### Ordering drawing numbers of magnetic contactors

| Category | Model                                                                   | Ordering number | Outline drawing | Magnetic contactor specification | Magnetic contactor cover specification |
|----------|-------------------------------------------------------------------------|-----------------|-----------------|----------------------------------|----------------------------------------|
| Optional | $\alpha i$ PS <sub>R</sub> 3 ,<br>$\alpha i$ PS 11HV                    | A06B-6077-K121  | 8.1.7(a)        | Fuji Electric SC-5-1             | Fuji Electric SZ-JC4                   |
|          | $\alpha i$ PS <sub>R</sub> 5.5, $\alpha i$ PS 5.5<br>$\alpha i$ PS 18HV | A06B-6077-K122  | 8.1.7(b)        | Fuji Electric SC-N1              | Fuji Electric SZ-N1J                   |
|          | $\alpha i$ PS 11                                                        | A06B-6077-K123  | 8.1.7(b)        | Fuji Electric SC-N2              | Fuji Electric SZ-N1J                   |
|          | $\alpha i$ PS 15, 30HV                                                  | A06B-6077-K124  | 8.1.7(c)        | Fuji Electric SC-N2S             | Fuji Electric SZ-N2SJ                  |
|          | $\alpha i$ PS 26, 45HV                                                  | A06B-6077-K125  | 8.1.7(d)        | Fuji Electric SC-N4              | Fuji Electric SZ-N4J                   |
|          | $\alpha i$ PS 30                                                        | A06B-6077-K126  | 8.1.7(e)        | Fuji Electric SC-N5              | Fuji Electric SZ-N4J                   |
|          | $\alpha i$ PS 37, 75HV                                                  | A06B-6077-K128  | 8.1.7(f)        | Fuji Electric SC-N7              | Fuji Electric SZ-N7J                   |
|          | $\alpha i$ PS 55, 100HV                                                 | A06B-6077-K127  | 8.1.7(g)        | Fuji Electric SC-N8              | Fuji Electric SZ-N8J                   |

#### NOTE

The coil voltage specification of the magnetic contactor is 200VAC.

### 3.1.3.11 Lightning surge protector

To protect equipment from surge voltages caused by lightning, install a lightning surge protector between lines and between a line and ground. For how to install protectors, see Appendix A.

#### Lightning surge protector specifications

| Category | Ordering number | Specification                                                                                         | Outline drawing | Remarks                                                                                      |
|----------|-----------------|-------------------------------------------------------------------------------------------------------|-----------------|----------------------------------------------------------------------------------------------|
| Optional | A06B-6077-K142  | For line-to-line installation :<br>RAV-781BYZ-2<br>For line-to-ground installation :<br>RAV-781BXZ-4  | 8.1.9(a)        | Manufactured by Okaya Electric Industries Co., Ltd.<br>For 200VAC line TÜV approved products |
|          | A06B-6077-K143  | For line-to-line installation :<br>RAV-152BYZ-2A<br>For line-to-ground installation :<br>RAV-801BXZ-4 | 8.1.9(b)        | Manufactured by Okaya Electric Industries Co., Ltd.<br>For 400VAC line TÜV approved products |
|          | A06B-6077-K144  | Integration type for line-to-line installation/line-to-ground installation:<br>RCM-601BUZ-4           | 8.1.9(c)        | Manufactured by Okaya Electric Industries Co., Ltd.<br>For 200VAC line TÜV approved products |

\* The line-to-line or line-to-ground installation type (A06B-6077-K144) and the integration type (A06B-6077-K142) are equivalent in performance and specifications.

### 3.1.3.12 Noise filter

A noise filter must be installed in the PS input section to satisfy the requirements of the EMC Directives which are now being enforced in the EU countries.

| Category | Model                                                  | Ordering number | Outline drawing | Rated output | Specification                                        |
|----------|--------------------------------------------------------|-----------------|-----------------|--------------|------------------------------------------------------|
| Optional | $\alpha i$ PS <sub>R</sub> 3<br>PS 5.5i                | A06B-6077-K155  | 8.1.10          | 30A          | 3SUP-HL30-ER-6: Okaya Electric Industries Co., Ltd.  |
|          | $\alpha i$ PS <sub>R</sub> 5.5<br>$\alpha i$ PS 11 ,15 | A06B-6077-K156  |                 | 75A          | 3SUP-HL75-ER-6: Okaya Electric Industries Co., Ltd.  |
|          | $\alpha i$ PS 26, 30                                   | A06B-6077-K157  |                 | 150A         | 3SUP-HL150-ER-6: Okaya Electric Industries Co., Ltd. |
|          | $\alpha i$ PS 37                                       | A06B-6077-K158  |                 | 200A         | 3SUP-HL200-ER-6: Okaya Electric Industries Co., Ltd. |

| Category | Model                                                                              | Ordering number | Outline drawing | Rated output | Specification                         |
|----------|------------------------------------------------------------------------------------|-----------------|-----------------|--------------|---------------------------------------|
| Optional | $\alpha i$ PS <sub>R</sub> 3<br>$\alpha i$ PS 5.5, 11HV                            | A06B-6110-K160  | 8.1.10          | 50A          | NF3050C-VQ: Soshin Electric Co., Ltd. |
|          | $\alpha i$ PS <sub>R</sub> 5.5<br>$\alpha i$ PS 11 ,15<br>$\alpha i$ PS 18HV, 30HV | A06B-6110-K161  |                 | 80A          | NF3080C-VQ: Soshin Electric Co., Ltd. |
|          | $\alpha i$ PS 26, 30<br>$\alpha i$ PS 45HV                                         | A06B-6110-K162  |                 | 150A         | NF3150C-VQ: Soshin Electric Co., Ltd. |
|          | $\alpha i$ PS 37<br>$\alpha i$ PS 75HV                                             | A06B-6110-K163  |                 | 200A         | NF3200C-VQ: Soshin Electric Co., Ltd. |
|          | $\alpha i$ PS 55<br>$\alpha i$ PS 100HV                                            | A06B-6110-K164  |                 | 250A         | NF3250C-VQ: Soshin Electric Co., Ltd. |

#### NOTE

- 1 A06B-6110-K160 to A06B-6110-K164 (manufactured by Soshin Electric Co., Ltd.) are high leakage type filters for neutral grounding. They are not used for purposes other than neutral grounding.
- 2 The above models are listed as guidelines for selection. Load currents of the CNC, amplifier, and other devices flow through the noise filter. Obtain these load currents, and select a noise filter so that the obtained load currents do not exceed the rated current of the noise filter.

### 3.1.3.13 Sensors for servo

$\alpha i$  CZ sensor (separate detector)

| Category | Name                        | Ordering number | Remarks                             |
|----------|-----------------------------|-----------------|-------------------------------------|
| Optional | $\alpha i$ CZ sensor 512AS  | A860-2164-T411  | 512 teeth / 15,000min <sup>-1</sup> |
|          | $\alpha i$ CZ sensor 768AS  | A860-2164-T511  | 768 teeth / 10,000min <sup>-1</sup> |
|          | $\alpha i$ CZ sensor 1024AS | A860-2164-T611  | 1024 teeth / 8,000min <sup>-1</sup> |

### 3.1.3.14 Sensors for spindle

#### $\alpha i$ Positioncoder

| Category | Name                     | Ordering number | Remarks                                              |
|----------|--------------------------|-----------------|------------------------------------------------------|
| Optional | $\alpha i$ Positioncoder | A860-2109-T302  | <input type="checkbox"/> 68, 10,000min <sup>-1</sup> |
|          | Connector kit            | A06B-6088-K211  | Straight type                                        |

#### $\alpha$ Positioncoder S (analog output type)

| Category | Name                     | Ordering number | Remarks                                              |
|----------|--------------------------|-----------------|------------------------------------------------------|
| Optional | $\alpha$ Positioncoder S | A860-0309-T352  | <input type="checkbox"/> 68, 10,000min <sup>-1</sup> |
|          | Connector kit            | A06B-6088-K211  | Straight type                                        |

#### $\alpha i$ BZ sensor (compact type)

| Name                      | Ordering number                    |                                        | Remarks         |                         |                |                |
|---------------------------|------------------------------------|----------------------------------------|-----------------|-------------------------|----------------|----------------|
|                           | Waterproof connector specification | Non-waterproof connector specification | Number of teeth | Maximum speed           | Inner diameter | Outer diameter |
| $\alpha i$ BZ sensor 128  | A860-2150-T201                     | A860-2155-T201                         | 128             | 20,000min <sup>-1</sup> | $\phi 40$      | $\phi 52$      |
| $\alpha i$ BZ sensor 128H | A860-2150-T211                     | A860-2155-T211                         |                 | 70,000min <sup>-1</sup> |                |                |
| $\alpha i$ BZ sensor 192  | A860-2150-T301                     | A860-2155-T301                         | 192             | 20,000min <sup>-1</sup> | $\phi 60$      | $\phi 77.6$    |
| $\alpha i$ BZ sensor 192H | A860-2150-T311                     | A860-2155-T311                         |                 | 40,000min <sup>-1</sup> |                |                |
| $\alpha i$ BZ sensor 256  | A860-2150-T401                     | A860-2155-T401                         | 256             | 15,000min <sup>-1</sup> | $\phi 82$      | $\phi 103.2$   |
| $\alpha i$ BZ sensor 256S | A860-2150-T404                     | A860-2155-T404                         |                 |                         | $\phi 88$      |                |
| $\alpha i$ BZ sensor 256H | A860-2150-T411                     | A860-2155-T411                         |                 | 30,000min <sup>-1</sup> | $\phi 82$      |                |
| $\alpha i$ BZ sensor 384  | A860-2150-T511                     | A860-2155-T511                         | 384             | 15,000min <sup>-1</sup> | $\phi 125$     | $\phi 154.4$   |
| $\alpha i$ BZ sensor 512  | A860-2150-T611                     | A860-2155-T611                         | 512             | 10,000min <sup>-1</sup> | $\phi 160$     | $\phi 205.6$   |

#### $\alpha i$ CZ sensor (for built-in spindle motor \*1)

| Category | Name                        | Ordering number | Remarks                             |
|----------|-----------------------------|-----------------|-------------------------------------|
| Optional | $\alpha i$ CZ sensor 512 I  | A860-2161-T411  | 512 teeth / 15,000min <sup>-1</sup> |
|          | $\alpha i$ CZ sensor 768 I  | A860-2161-T511  | 768 teeth / 10,000min <sup>-1</sup> |
|          | $\alpha i$ CZ sensor 1024 I | A860-2161-T611  | 1024 teeth / 8,000min <sup>-1</sup> |

#### $\alpha i$ CZ sensor (for spindle \*1)

| Category | Name                         | Ordering number | Remarks                             |
|----------|------------------------------|-----------------|-------------------------------------|
| Optional | $\alpha i$ CZ sensor 512 IS  | A860-2163-T411  | 512 teeth / 15,000min <sup>-1</sup> |
|          | $\alpha i$ CZ sensor 768 IS  | A860-2163-T511  | 768 teeth / 10,000min <sup>-1</sup> |
|          | $\alpha i$ CZ sensor 1024 IS | A860-2163-T611  | 1024 teeth / 8,000min <sup>-1</sup> |



**NOTE**

\*1 This  $\alpha i$  CZ sensor is of the serial interface type.

It is supported by the following  $\alpha i$  SP units  
(manufactured in May 2007 and later):

Supported unit version: B and later

200-V input series : A06B-6141-H002, H006, H011,  
H015, H030, H037,  
H055#H580

400-V input series : A06B-6151-H006, H011, H015,  
H045, H075, H100#H580

Supported unit version: C and later

200-V input series : A06B-6141-H022, H026,  
H045#H580

400-V input series : A06B-6151-H030#H580

### 3.1.3.15 Power line switch unit

Spindle switch control (Y/Y switch type)

Output switch control (Y/Y switch type, Y/ $\Delta$  switch type)

| Category | Name                    | Ordering number | Remarks |
|----------|-------------------------|-----------------|---------|
| Optional | Y/Y switch type         | A06B-6078-K034  | (Note)  |
|          | Y/ $\Delta$ switch type | A06B-6078-K035  | (Note)  |
|          | Y/Y switch type         | A06B-6078-K036  | (Note)  |
|          | Y/ $\Delta$ switch type | A06B-6078-K037  | (Note)  |

**NOTE**

Select one type depending on the peak rated  
current of a spindle motor to be applied.  
For details, see Subsection 10.2.3.

### 3.1.3.16 Battery for absolute Pulsecoder

For connection of a battery for an absolute Pulsecoder, two methods are available. For each method, options are available.

#### NOTE

- 1 A battery needs to be maintained periodically. So, [connection type 1] is recommended because this type uses a battery (consisting of four size D alkaline cells) easily obtainable from the market.
- 2 A built-in battery used with [connection type 2] is not available on the market, but needs to be purchased from FANUC. So, it is recommended to purchase spare built-in batteries.

[Connection type 1]

Power is fed from one battery to multiple  $\alpha i$  SV models.

(See Subsection 9.3.1.10.)

| Category | Ordering number | Name                         | Remarks                       |
|----------|-----------------|------------------------------|-------------------------------|
| Optional | A06B-6050-K061  | Battery                      | Four pieces of size D battery |
|          | A06B-6050-K060  | Battery case                 |                               |
|          | A06B-6110-K211  | Battery connection connector |                               |

[Connection type 2]

A battery is built into each  $\alpha i$  SV.

(See Subsection 9.3.2.10.)

| Category | Ordering number | Name             | Remarks                                                                                              |
|----------|-----------------|------------------|------------------------------------------------------------------------------------------------------|
| Optional | A06B-6114-K504  | Built-in battery | Lithium battery                                                                                      |
| Optional | A06B-6114-K505  | Battery case     | For $\alpha i$ SV 60/90 mm wide                                                                      |
| Optional | A06B-6114-K506  | Battery case     | For $\alpha i$ SV 150/300 mm wide<br>$\alpha i$ SV 360<br>$\alpha i$ SV 180HV<br>$\alpha i$ SV 360HV |

# 4

## HOW TO SELECT THE MODULE

---

Chapter 4, "HOW TO SELECT THE MODULE", consists of the following sections:

|     |                                                                                                            |    |
|-----|------------------------------------------------------------------------------------------------------------|----|
| 4.1 | HOW TO SELECT THE $\alpha i$ SV series<br>(SERVO AMPLIFIER).....                                           | 80 |
| 4.2 | HOW TO SELECT THE $\alpha i$ SP series<br>(SPINDLE AMPLIFIER).....                                         | 84 |
| 4.3 | HOW TO SELECT THE $\alpha i$ PS<br>(POWER SUPPLY) .....                                                    | 86 |
| 4.4 | HOW TO SELECT THE $\alpha i$ PS <sub>R</sub> series<br>(POWER SUPPLY, RESISTANCE REGENERATION TYPE).....   | 90 |
| 4.5 | LIST OF MOTOR OUTPUT CAPACITIES FOR $\alpha i$ PS AND<br>$\alpha i$ PS <sub>R</sub> SERIES SELECTION ..... | 96 |

## 4.1 HOW TO SELECT THE $\alpha i$ SV SERIES (SERVO AMPLIFIER)

---

Select an appropriate  $\alpha i$  SV module for the selected servo motor.

**Table 4.1(a) Specification**

| No | Specification  | Number of connected axes | Input voltage | Interface with CNC |
|----|----------------|--------------------------|---------------|--------------------|
| 1  | A06B-6117-H1xx | 1                        | 200V          | FSSB               |
| 2  | A06B-6117-H2xx | 2                        | 200V          | FSSB               |
| 3  | A06B-6117-H3xx | 3                        | 200V          | FSSB               |
| 4  | A06B-6127-H1xx | 1                        | 400V          | FSSB               |
| 5  | A06B-6127-H2xx | 2                        | 400V          | FSSB               |

## 4.1.1 200-V Input Series

| Amplifier model 200V type |                        | Motor model |      |          | Group A | Group B | Group C | Group D | Group E | Group F | Group G | Group H |
|---------------------------|------------------------|-------------|------|----------|---------|---------|---------|---------|---------|---------|---------|---------|
|                           |                        | HRV2/3      | HRV4 | Outline  |         |         |         |         |         |         |         |         |
| 1-axis                    | $\alpha I$ SV 4        | ○           | ○    | TYPE I   | ○       |         |         |         |         |         |         |         |
|                           | $\alpha I$ SV 20       | ○           | -    |          |         | ○       |         |         |         |         |         |         |
|                           | $\alpha I$ SV 20L      | ○           | ○    | TYPE II  |         | ○       |         |         |         |         |         |         |
|                           | $\alpha I$ SV 40       | ○           | -    |          |         |         | ○       |         |         |         |         |         |
|                           | $\alpha I$ SV 40L      | ○           | ○    |          |         |         | ○       |         |         |         |         |         |
|                           | $\alpha I$ SV 80       | ○           | -    |          |         |         |         | ○       |         |         |         |         |
|                           | $\alpha I$ SV 80L      | ○           | ○    |          |         |         |         | ○       |         |         |         |         |
|                           | $\alpha I$ SV 160      | ○           | -    |          |         |         |         |         | ○       | ○       |         |         |
|                           | $\alpha I$ SV 160L     | ○           | ○    |          |         |         |         |         | ○       | ○       |         |         |
|                           | $\alpha I$ SV 360      | ○           | ○    | TYPE IV  |         |         |         |         |         |         | ○       | ○ (*2)  |
| 2-axes                    | $\alpha I$ SV 4/4      | ○           | ○    | TYPE I   | L/M     |         |         |         |         |         |         |         |
|                           | $\alpha I$ SV 4/20     | ○           | -    |          | L       | M       |         |         |         |         |         |         |
|                           | $\alpha I$ SV 20/20    | ○           | -    |          |         | L/M     |         |         |         |         |         |         |
|                           | $\alpha I$ SV 20/20L   | ○           | ○    | TYPE II  |         | L/M     |         |         |         |         |         |         |
|                           | $\alpha I$ SV 20/40    | ○           | -    |          |         | L       | M       |         |         |         |         |         |
|                           | $\alpha I$ SV 20/40L   | ○           | ○    |          |         | L       | M       |         |         |         |         |         |
|                           | $\alpha I$ SV 40/40    | ○           | -    |          |         |         | L/M     |         |         |         |         |         |
|                           | $\alpha I$ SV 40/40L   | ○           | ○    |          |         |         | L/M     |         |         |         |         |         |
|                           | $\alpha I$ SV 40/80    | ○           | -    |          |         |         | L       | M       |         |         |         |         |
|                           | $\alpha I$ SV 40/80L   | ○           | ○    | TYPE III |         |         | L       | M       |         |         |         |         |
|                           | $\alpha I$ SV 80/80    | ○           | -    | TYPE II  |         |         |         | L/M     |         |         |         |         |
|                           | $\alpha I$ SV 80/80L   | ○           | ○    | TYPE III |         |         |         | L/M     |         |         |         |         |
|                           | $\alpha I$ SV 80/160   | ○           | -    |          |         |         |         | L       | M       |         |         |         |
|                           | $\alpha I$ SV 160/160  | ○           | -    |          |         |         |         |         | L/M     |         |         |         |
| 3-axes                    | $\alpha I$ SV 4/4/4    | ○           | -    | TYPE I   | L/M/N   |         |         |         |         |         |         |         |
|                           | $\alpha I$ SV 20/20/20 | ○           | -    |          |         | L/M/N   |         |         |         |         |         |         |
|                           | $\alpha I$ SV 20/20/40 | ○           | -    | TYPE II  |         | L/M     | N       |         |         |         |         |         |

\*1) "SV" of  $\alpha I$  SV means "SerVo".

\*2) Two servo amplifiers are necessary to drive one motor.

group A:  $\beta iS$  0.2/5000,  $\beta iS$  0.3/5000

group B:  $\alpha iS$  2/5000,  $\alpha iS$  2/6000,  $\alpha iS$  4/5000,  $\alpha iF$  1/5000,  $\alpha iF$  2/5000

$\beta iS$  0.4/5000,  $\beta iS$  0.5/6000,  $\beta iS$  1/6000,  $\beta iS$  2/4000,  $\beta iS$  4/4000,  $\beta iS$  8/3000,  $\beta iS$  12/2000

group C:  $\alpha iF$  4/4000,  $\alpha iF$  8/3000,  $\beta iS$  12/3000,  $\beta iS$  22/2000

group D:  $\alpha iS$  8/4000,  $\alpha iS$  8/6000,  $\alpha iS$  12/4000,  $\alpha iF$  12/3000,  $\alpha iF$  22/3000

group E:  $\alpha iS$  22/4000,  $\alpha iS$  30/4000,  $\alpha iS$  40/4000,  $\alpha iF$  30/3000,  $\alpha iF$  40/3000

group F:  $\alpha iS$  22/4000,  $\alpha iS$  30/4000,  $\alpha iS$  40/4000,  $\alpha iF$  30/3000,  $\alpha iF$  40/3000,  $\alpha iF$  40/3000 with fan

group G:  $\alpha iS$  50/3000 with fan,  $\alpha iS$  100/2500,  $\alpha iS$  200/2500

group H:  $\alpha iS$  300/2000,  $\alpha iS$  500/2000

## 4.1.2 400-V Input Series

| Amplifier model 400V type |                        | Motor model |      |          | Group A | Group B | Group C | Group D | Group E | Group F | Group G   |
|---------------------------|------------------------|-------------|------|----------|---------|---------|---------|---------|---------|---------|-----------|
|                           |                        | HRV2/3      | HRV4 | Outline  |         |         |         |         |         |         |           |
| 1-axis                    | $\alpha i$ SV 10HV     | ○           | -    | TYPE I   | ○       |         |         |         |         |         |           |
|                           | $\alpha i$ SV 10HVL    | ○           | ○    | TYPE II  | ○       |         |         |         |         |         |           |
|                           | $\alpha i$ SV 20HV     | ○           | -    |          |         | ○       |         |         |         |         |           |
|                           | $\alpha i$ SV 20HVL    | ○           | ○    |          |         | ○       |         |         |         |         |           |
|                           | $\alpha i$ SV 40HV     | ○           | -    |          |         |         | ○       |         |         |         |           |
|                           | $\alpha i$ SV 40HVL    | ○           | ○    |          |         |         | ○       |         |         |         |           |
|                           | $\alpha i$ SV 80HV     | ○           | -    |          |         |         |         | ○       |         |         |           |
|                           | $\alpha i$ SV 80HVL    | ○           | ○    | TYPE III |         |         |         | ○       |         |         |           |
|                           | $\alpha i$ SV 180HV    | ○           | ○    | TYPE IV  |         |         |         |         | ○       |         |           |
|                           | $\alpha i$ SV 360HV    | ○           | ○    | TYPE V   |         |         |         |         |         | ○       | ○<br>(*2) |
| 2-axes                    | $\alpha i$ SV 10/10HV  | ○           | -    | TYPE I   | L/M     |         |         |         |         |         |           |
|                           | $\alpha i$ SV 10/10HVL | ○           | ○    | TYPE II  | L/M     |         |         |         |         |         |           |
|                           | $\alpha i$ SV 20/20HV  | ○           | -    |          |         | L/M     |         |         |         |         |           |
|                           | $\alpha i$ SV 20/20HVL | ○           | ○    | TYPE III |         | L/M     |         |         |         |         |           |
|                           | $\alpha i$ SV 20/40HV  | ○           | -    |          |         | L       | M       |         |         |         |           |
|                           | $\alpha i$ SV 20/40HVL | ○           | ○    |          |         | L       | M       |         |         |         |           |
|                           | $\alpha i$ SV 40/40HV  | ○           | -    |          |         |         | L/M     |         |         |         |           |
|                           | $\alpha i$ SV 40/40HVL | ○           | ○    |          |         |         | L/M     |         |         |         |           |
|                           | $\alpha i$ SV 40/80HV  | ○           | -    |          |         |         | L       | M       |         |         |           |
|                           | $\alpha i$ SV 80/80HV  | ○           | -    |          |         |         |         | L/M     |         |         |           |

\*1) "SV" of  $\alpha i$  SV means "SerVo".

\*2) Two servo amplifiers are necessary to drive one motor.

group A:  $\alpha i$ S 2/5000HV,  $\alpha i$ S 2/6000HV,  $\alpha i$ S 4/5000HV,  $\beta i$ S 2/4000HV,  $\beta i$ S 4/4000HV,  $\beta i$ S 8/3000HV

group B:  $\alpha i$ F 4/4000HV,  $\alpha i$ F 8/3000HV,  $\beta i$  S 12/3000HV,  $\beta i$ S 22/2000HV

group C:  $\alpha i$ S 8/4000HV,  $\alpha i$ S 8/6000HV,  $\alpha i$ S 12/4000HV,  $\alpha i$ F 12/3000HV,  $\alpha i$ F 22/3000HV

group D:  $\alpha i$ S 22/4000HV,  $\alpha i$ S3 0/4000HV,  $\alpha i$ S 40/4000HV

group E:  $\alpha i$ S 50/3000HV with fan,  $\alpha i$ S 100/2500HV,  $\alpha i$ S 200/2500HV

group F:  $\alpha i$ S 300/2000HV,  $\alpha i$ S 500/2000HV

group G:  $\alpha i$ S 1000/2000HV

### 4.1.3 How to Select the Dynamic Brake Module (DBM)

When the  $\alpha i$  SV 360,  $\alpha i$  SV 180HV, or  $\alpha i$  SV 360HV is used, an external dynamic brake module (DBM) is required. This module stops the motor immediately at, for example, emergency stop time. The other  $\alpha i$  SV models include a feature similar to this module.

Select a dynamic brake module based on the following table:

Dynamic brake module

| Category | Ordering number | Name | Remarks                                                          |
|----------|-----------------|------|------------------------------------------------------------------|
| Standard | A06B-6079-H401  | DBM  | $\alpha i$ SV 360,<br>$\alpha i$ SV 180HV<br>$\alpha i$ SV 360HV |
|          | A06B-6069-H300  | DBM  | $\alpha i$ SV 360HV<br>(*1)                                      |

The dynamic brake module (DBM) is designed based on the energy required to stop the motor rotating at its maximum speed when the load inertia is five times as large as the motor inertia. When this operating condition is exceeded, contact FANUC.

(\*1) When the  $\alpha i$ S 1000HV,  $\alpha i$ S 2000HV, or  $\alpha i$ S S3000HV is driven

## 4.2 HOW TO SELECT THE $\alpha i$ SP series(SPINDLE AMPLIFIER)

Select an appropriate  $\alpha i$  SP series for the selected spindle motor.  
 $\alpha i$  SP series amplifiers and standard motors that can be used together are shown below. When using a built-in motor or a motor with special specifications, refer to relevant specifications, and select an  $\alpha i$  SP series accordingly.

**Table 4.2(a) Specification**

| No | Ordering number     | Input voltage | Remarks |
|----|---------------------|---------------|---------|
| 1  | A06B-6141-Hxxx#H580 | 200V          | TYPE A  |
| 2  | A06B-6142-Hxxx#H580 | 200V          | TYPE B  |
| 3  | A06B-6151-Hxxx#H580 | 400V          | TYPE A  |
| 4  | A06B-6152-Hxxx#H580 | 400V          | TYPE B  |



## 4.2.1 200-V Input Series

| Amplifier model 200V type | Outline  | Motor model                                                                                                                                                                                                                                                                                                                      |
|---------------------------|----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| $\alpha i$ SP 2.2         | TYPE II  | $\alpha i$ I 0.5/10000, $\alpha i$ I 1/10000                                                                                                                                                                                                                                                                                     |
| S $\alpha i$ P 5.5        |          | $\alpha i$ I 1.5/10000, $\alpha i$ I 2/10000, $\alpha i$ I 3/10000, $\alpha i$ I 1/15000                                                                                                                                                                                                                                         |
| $\alpha i$ SP 11          | TYPE III | $\alpha i$ I 6/10000, $\alpha i$ I 8/8000, $\alpha i$ I 3/12000, $\alpha i$ I 6/12000, $\alpha i$ I 8/10000,<br>$\alpha i$ I <sub>P</sub> 12/6000, $\alpha i$ I <sub>P</sub> 12/8000, $\alpha i$ I <sub>T</sub> 3/12000                                                                                                          |
| $\alpha i$ SP 15          |          | $\alpha i$ I 12/7000, $\alpha i$ I 1.5/20000, $\alpha i$ I 12/12000,<br>$\alpha i$ I <sub>P</sub> 15/6000, $\alpha i$ I <sub>P</sub> 15/8000, $\alpha i$ I <sub>P</sub> 18/6000, $\alpha i$ I <sub>P</sub> 18/8000,<br>$\alpha i$ I <sub>T</sub> 1.5/20000, $\alpha i$ I <sub>T</sub> 6/12000, $\alpha i$ I <sub>T</sub> 8/12000 |
| $\alpha i$ SP 22          | TYPE IV  | $\alpha i$ I 15/7000, $\alpha i$ I 18/7000, $\alpha i$ I 2/20000, $\alpha i$ I 15/12000,<br>$\alpha i$ I 18/12000, $\alpha i$ I <sub>P</sub> 22/6000, $\alpha i$ I <sub>P</sub> 22/8000, $\alpha i$ I <sub>P</sub> 30/6000, $\alpha i$ I <sub>T</sub> 2/20000                                                                    |
| $\alpha i$ SP 26          |          | $\alpha i$ I 22/7000, $\alpha i$ I 22/12000, $\alpha i$ I <sub>P</sub> 40/6000, $\alpha i$ I <sub>P</sub> 50/6000, $\alpha i$ I <sub>T</sub> 22/10000                                                                                                                                                                            |
| $\alpha i$ SP 30          |          | $\alpha i$ I <sub>P</sub> 60/4500, $\alpha i$ I <sub>T</sub> 15/15000, $\alpha i$ I <sub>L</sub> 8/20000, $\alpha i$ I <sub>L</sub> 15/15000, $\alpha i$ I <sub>L</sub>                                                                                                                                                          |
| $\alpha i$ SP 37          |          | (*4)                                                                                                                                                                                                                                                                                                                             |
| $\alpha i$ SP 45          | TYPE V   | $\alpha i$ I 30/6000, $\alpha i$ I 40/6000                                                                                                                                                                                                                                                                                       |
| $\alpha i$ SP 55          |          | $\alpha i$ I 50/4500                                                                                                                                                                                                                                                                                                             |

\*3) "SP" of  $\alpha i$  SP means "Spindle".

\*4) These amplifiers drives Built-in Spindle Motor series.

## 4.2.2 400-V Input Series

| Amplifier model 400V type | Outline  | Motor model                                                                                                                                                                                                                                                                                                                                                    |
|---------------------------|----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| $\alpha i$ SP 5.5HV       | TYPE II  | $\alpha i$ I 0.5/10000HV, $\alpha i$ I 1/10000HV, $\alpha i$ I 1.5/10000HV, $\alpha i$ I 2/10000HV,<br>$\alpha i$ I 3/10000HV                                                                                                                                                                                                                                  |
| $\alpha i$ SP 11HV        | TYPE III | $\alpha i$ I 6/10000HV, $\alpha i$ I 8/8000HV                                                                                                                                                                                                                                                                                                                  |
| $\alpha i$ SP 15HV        |          | $\alpha i$ I 12/7000HV, $\alpha i$ I <sub>P</sub> 15/6000HV, $\alpha i$ I <sub>P</sub> 15/8000HV,<br>$\alpha i$ I <sub>T</sub> 1.5/20000HV, $\alpha i$ I <sub>T</sub> 6/12000HV, $\alpha i$ I <sub>T</sub> 8/12000HV                                                                                                                                           |
| $\alpha i$ SP 30HV        | TYPE IV  | $\alpha i$ I 15/7000HV, $\alpha i$ I 22/7000HV, $\alpha i$ I <sub>P</sub> 22/6000HV, $\alpha i$ I <sub>P</sub> 22/8000HV,<br>$\alpha i$ I <sub>P</sub> 40/6000HV, $\alpha i$ I <sub>P</sub> 50/6000HV, $\alpha i$ I <sub>P</sub> 60/4500HV,<br>$\alpha i$ I <sub>T</sub> 2/20000HV, $\alpha i$ I <sub>T</sub> 15/15000HV, $\alpha i$ I <sub>T</sub> 22/10000HV |
| $\alpha i$ SP 45HV        |          | $\alpha i$ I 30/6000HV, $\alpha i$ I 40/6000HV,<br>$\alpha i$ I <sub>L</sub> 8/20000HV, $\alpha i$ I <sub>L</sub> 15/15000HV, $\alpha i$ I <sub>L</sub> 26/15000HV                                                                                                                                                                                             |
| $\alpha i$ SP 75HV        | TYPE V   | $\alpha i$ I 60/4500HV, $\alpha i$ I 100/4000HV                                                                                                                                                                                                                                                                                                                |
| $\alpha i$ SP 100HV       |          | *4                                                                                                                                                                                                                                                                                                                                                             |

\*3) "SP" of  $\alpha i$  SP means "Spindle".

\*4) These amplifiers drives Built-in Spindle Motor series.

## 4.3 HOW TO SELECT THE $\alpha i$ PS series (POWER SUPPLY)

When Power Supply is selected, the conditions described in this section must all be satisfied.

Calculate the required rated output capacity, maximum output capacity, and peak output capacity using the calculation methods in Subsections 4.3.1, 4.3.2, and 4.3.3 and then select an  $\alpha i$  PS model that meets all the conditions.

Table 4.2(a) 200-V input

| Model                     | $\alpha i$ PS<br>5.5 | $\alpha i$ PS<br>11 | $\alpha i$ PS<br>15 | $\alpha i$ PS<br>26 | $\alpha i$ PS<br>30 | $\alpha i$ PS<br>37 | $\alpha i$ PS<br>55 |
|---------------------------|----------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|
| Item                      |                      |                     |                     |                     |                     |                     |                     |
| Rated output capability   | 5.5kW                | 11kW                | 15kW                | 26kW                | 30kW                | 37kW                | 55kW                |
| Maximum output capability | 13kW                 | 24kW                | 34kW                | 48kW                | 64kW                | 84kW                | 125kW               |
| Peak output capability    | 22kW                 | 38kW                | 51kW                | 73kW                | 85kW                | 106kW               | 192kW               |

Table 4.2(b) 400-V input

| Model                     | $\alpha i$ PS<br>11HV | $\alpha i$ PS<br>18HV | $\alpha i$ PS<br>30HV | $\alpha i$ PS<br>45HV | $\alpha i$ PS<br>75HV | $\alpha i$ PS<br>100HV |
|---------------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|------------------------|
| Item                      |                       |                       |                       |                       |                       |                        |
| Rated output capability   | 11kW                  | 18kW                  | 30kW                  | 45kW                  | 75kW                  | 100kW                  |
| Maximum output capability | 24kW                  | 42kW                  | 72kW                  | 102kW                 | 144kW                 | 180kW                  |
| Peak output capability    | 38kW                  | 64kW                  | 96kW                  | 137kW                 | 193kW                 | 220kW                  |

### NOTE

The above tables apply to A06B-6140-Hxxx and A06B-6150-Hxxxx. For A06B-6110-Hxxx and A06B-6120-Hxxxx, the maximum output capability and peak output capability values differ as shown in the tables below.

200-V input (for A06B-6110-Hxxx)

| Model                     | $\alpha i$ PS<br>5.5 | $\alpha i$ PS<br>11 | $\alpha i$ PS<br>15 | $\alpha i$ PS<br>26 | $\alpha i$ PS<br>30 | $\alpha i$ PS<br>37 | $\alpha i$ PS<br>55 |
|---------------------------|----------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|
| Item                      |                      |                     |                     |                     |                     |                     |                     |
| Rated output capability   | 5.5kW                | 11kW                | 15kW                | 26kW                | 30kW                | 37kW                | 55kW                |
| Maximum output capability | 11kW                 | 20kW                | 28kW                | 40kW                | 53kW                | 70kW                | 104kW               |
| Peak output capability    | 20kW                 | 34kW                | 46kW                | 66kW                | 77kW                | 96kW                | 174kW               |

400-V input (for A06B-6120-Hxxx)

| Model                     | $\alpha i$ PS<br>11HV | $\alpha i$ PS<br>18HV | $\alpha i$ PS<br>30HV | $\alpha i$ PS<br>45HV | $\alpha i$ PS<br>75HV | $\alpha i$ PS<br>100HV |
|---------------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|------------------------|
| Item                      |                       |                       |                       |                       |                       |                        |
| Rated output capability   | 11kW                  | 18kW                  | 30kW                  | 45kW                  | 75kW                  | 100kW                  |
| Maximum output capability | 20kW                  | 35kW                  | 60kW                  | 85kW                  | 120kW                 | 150kW                  |
| Peak output capability    | 34kW                  | 58kW                  | 87kW                  | 124kW                 | 175kW                 | 200kW                  |

### 4.3.1 How to Obtain the $\alpha i$ PS series rated output capability

Select an  $\alpha i$  PS with a rated output not less than the sum of the total continuous rated output of the spindle motors times 1.15, plus the total continuous rated output of the servo motors times 0.6.

|                                                                                                                                                                                                          |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>Rated output capacity of <math>\alpha i</math> PS</p> $\geq \Sigma \text{ Continuous rated output of spindle motor} \times 1.15$ $+ \Sigma \text{ Continuous rated output of servo motor} \times 0.6$ |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

When only  $\alpha i$  SP is to be connected to Power Supply module, select the  $\alpha i$  PS so that the 30-minute rated output of the spindle motor does not exceed the rated output capacity of Power Supply module.

|                                                                                                                         |
|-------------------------------------------------------------------------------------------------------------------------|
| <p>Rated output capacity of an <math>\alpha i</math> PS <math>\geq</math> 30-minute rated output of a spindle motor</p> |
|-------------------------------------------------------------------------------------------------------------------------|

Table 4.3 lists the rated output capacities of the  $\alpha i$  PS models. Tables 4.5.1(a) to (d) list the continuous rated outputs of the servo motors. Tables 4.5.2(a) and (b) list the continuous rated outputs or 30-minute rated output of the spindle motors.

### 4.3.2 How to Obtain the $\alpha i$ PS series maximum output capability

Select the  $\alpha i$  PS whose maximum output capability will not be exceeded by the total of the sum of the maximum acceleration spindle motor outputs and the sum of the maximum acceleration outputs of the servo motors that are accelerated simultaneously and whose acceleration time exceeds 0.3 seconds.

|                                                                                                                                                                                                                                                                                                                                                           |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>Maximum output of <math>\alpha i</math> PS</p> $\geq \Sigma \text{ Accelerating maximum output of spindle motor} +$ $\Sigma \text{ Maximum acceleration-time outputs of servo motors whose acceleration time exceeds } \underline{\underline{0.3 \text{ seconds}}}$ <p style="text-align: right;">(on simultaneous acceleration/deceleration axis)</p> |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

Table 4.3 lists the maximum output capacities of the  $\alpha i$  PS models. Tables 4.5.1(a) to (d) list the accelerating maximum outputs of the servo motors. Tables 4.5.2(a) and (b) list the accelerating maximum outputs of the spindle motors.

### 4.3.3 How to Obtain the $\alpha i$ PS series peak maximum output capability

Make selection so that a total of maximum acceleration-time outputs of the spindle motors plus a total of maximum acceleration-time outputs of the servo motors that are accelerated concurrently for 0.3 seconds or less are equal to or less than the peak maximum output capacity of the  $\alpha i$  PS.

Power Supply peak maximum output capability  
 $\geq \Sigma$  spindle motor maximum acceleration outputs  
 $+ \Sigma$  Maximum acceleration-time outputs of servo motors whose acceleration time is **0.3 seconds** or less  
 (on simultaneously accelerated axes)

Table 4.3 lists the peak output capacities of the  $\alpha i$  PS models. Tables 4.5.1(a) to (d) list the continuous rated outputs of the servo motors. Tables 4.5.2(a) and (b) list the according maximum outputs of the spindle motors.



#### CAUTION

When the acceleration-time constant is not identical to the deceleration-time constant and the maximum motor torque is used during deceleration as in pressing machines or injection molding machines, the maximum acceleration-time outputs in Tables 4.5.1 (a) and (c) are multiplied by 1.1.

### 4.3.4 Number of Connected $\alpha i$ SV series and $\alpha i$ SP Series

Multiple  $\alpha i$  SV and  $\alpha i$  SP models can be connected to a single  $\alpha i$  PS, provided the above output capacity conditions are satisfied.

The table below lists the maximum number of modules which can be connected.

Table 4.3.4 Maximum number of modules that can be connected

| $\alpha i$ SP | $\alpha i$ SV                     |                                   |                                   |
|---------------|-----------------------------------|-----------------------------------|-----------------------------------|
|               | $\alpha i$ SV<br>1-axis amplifier | $\alpha i$ SV<br>2-axis amplifier | $\alpha i$ SV<br>3-axis amplifier |
| 2             | 6                                 |                                   |                                   |
|               |                                   | 4                                 |                                   |
|               |                                   |                                   | 3                                 |

#### CAUTION

- When different types of  $\alpha i$  SV models are connected, the following condition must be satisfied:  
Total number of connected amplifiers (6)  $\geq$  number of  $\alpha i$  SV 1-axis amplifiers  $\times$  1 + number of  $\alpha i$  SV 2-axis amplifiers  $\times$  1.5 + number of  $\alpha i$  SV 3-axis amplifiers  $\times$  2  
The maximum number of  $\alpha i$  SV models that can be connected is the same when an  $\alpha i$  SP is not used.
- No  $\alpha i$  SV 3-axis amplifier is available in the 400-V input series.

### 4.3.5 Notes on 400-V Input $\alpha i$ PS series selection

When the 400-V input  $\alpha i$  PS series is used, a restriction is imposed on the combination with an  $\alpha i$  SP.

- For  $\alpha i$  SP 30HV, select PSM-30HVi or a higher model.
- For  $\alpha i$  SP 45HV, select PSM-45HVi or a higher model.
- For  $\alpha i$  PS 75HV and  $\alpha i$  PS 100HV, select  $\alpha i$  PS 75HV or a higher model.

## 4.4 HOW TO SELECT THE $\alpha i$ PS<sub>R</sub> series (POWER SUPPLY, RESISTANCE DISCHARGE TYPE)

When Power Supply is selected, the conditions described in this section must all be satisfied.

Calculate the required rated output capacity and maximum output capacity using the calculation methods in Subsections 4.4.1 and 4.4.2 and then select an  $\alpha i$  PS<sub>R</sub> model that meets all the conditions.

Table 4.4 200-V input

| Item                      | Model | $\alpha i$ PS <sub>R</sub> 3 | $\alpha i$ PS <sub>R</sub> 5.5 |
|---------------------------|-------|------------------------------|--------------------------------|
|                           |       |                              |                                |
| Rated output capability   |       | 3kW                          | 7.5kW                          |
| Maximum output capability |       | 12kW                         | 20kW                           |

### NOTE

No specification is defined for the peak output capability of the  $\alpha i$  PS<sub>R</sub> models.

### 4.4.1 How to Obtain the $\alpha i$ PS<sub>R</sub> series Rated Output Capability

Select an  $\alpha i$  PS<sub>R</sub> with a rated output not less than the sum of the total continuous rated output of the spindle motors times 1.15, plus the total continuous rated output of the servo motors times 0.6.

|                                                                                                                                                                                                                      |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>Rated output capacity of <math>\alpha i</math> PS<sub>R</sub></p> $\geq \Sigma \text{ Continuous rated output of spindle motor} \times 1.15$ $+ \Sigma \text{ Continuous rated output of servo motor} \times 0.6$ |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

When only  $\alpha i$  SP is to be connected to an  $\alpha i$  PS<sub>R</sub>, select Power Supply so that the 30-minute rated output of the spindle motor does not exceed the rated output capacity of the  $\alpha i$  PS<sub>R</sub>.

|                                                                                                                                     |
|-------------------------------------------------------------------------------------------------------------------------------------|
| <p>Rated output capacity of an <math>\alpha i</math> PS<sub>R</sub> <math>\geq</math> 30-minute rated output of a spindle motor</p> |
|-------------------------------------------------------------------------------------------------------------------------------------|

Table 4.3 lists the rated output capacities of the  $\alpha i$  PS<sub>R</sub> models. Tables 4.5.1(a) to (d) list the continuous rated outputs of the servo motors. Tables 4.5.2(a) and (b) list the continuous rated outputs or 30-minute rated output of the spindle motors.

### 4.4.2 How to Obtain the $\alpha i$ PS<sub>R</sub> series Maximum Output Capability

Select an  $\alpha i$  PS<sub>R</sub> so that the sum of the total maximum acceleration-time output of the spindle motors and the total maximum acceleration-time output of the servo motors that are accelerated simultaneously does not exceed the maximum output capability of the  $\alpha i$  PS<sub>R</sub>.

|                                                                                                                                                                                                                                                                                                                                                                                 |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>Maximum output of <math>\alpha i</math> PS<sub>R</sub></p> $\geq \Sigma \text{ Accelerating maximum output of spindle motor} +$ $\Sigma \text{ Maximum acceleration-time outputs of the servo motors whose}$ $\text{acceleration time exceeds } \underline{\mathbf{0.3 \text{ seconds}}}$ <p style="text-align: right;">(on simultaneous acceleration/deceleration axis)</p> |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

Table 4.4 lists the maximum output capacities of the  $\alpha i$  PS<sub>R</sub> models. Tables 4.5.1(a) to (d) list the accelerating maximum outputs of the servo motors. Tables 4.5.2(a) and (b) list the accelerating maximum outputs of the spindle motors.

### 4.4.3 Number of Connected $\alpha i$ SV series and $\alpha i$ SP series

Multiple  $\alpha i$  SV models and  $\alpha i$  SP models can be connected to a single  $\alpha i$  PS<sub>R</sub>, provided the above output capacity conditions are satisfied. The table below lists the maximum number of modules which can be connected.

Table 4.4.3 Maximum number of amplifiers that can be connected

| $\alpha i$ SP | $\alpha i$ SV                     |                                   |                                   |
|---------------|-----------------------------------|-----------------------------------|-----------------------------------|
|               | $\alpha i$ SV<br>1-axis amplifier | $\alpha i$ SV<br>2-axis amplifier | $\alpha i$ SV<br>3-axis amplifier |
| 0             | 4                                 |                                   |                                   |
|               | 1                                 | 2                                 |                                   |
|               | 2                                 | 1                                 |                                   |
|               |                                   | 1                                 | 1                                 |
| 1             | 2                                 |                                   |                                   |
|               | 1                                 | 1                                 |                                   |
|               |                                   |                                   | 1                                 |

#### CAUTION

When  $\alpha i$  SV amplifiers are used together, the total number of the connected amplifiers must not exceed 4.

Total number of connected amplifiers (4)  $\geq$  number of  $\alpha i$  SV 1-axis amplifiers  $\times$  1 + number of  $\alpha i$  SV 2-axis amplifiers  $\times$  1.5 + number of  $\alpha i$  SV 3-axis amplifiers  $\times$  2

Even when no  $\alpha i$  SP unit is used, the number of  $\alpha i$  SV amplifiers that can be connected does not change.



#### 4.4.4 Selecting a Regenerative Discharge Unit

In the  $\alpha i$  PS<sub>R</sub>, the regenerative discharge unit (regenerative resistor) dissipates the energy generated during deceleration of a motor (regeneration).

The amount of heat generated by the regenerative discharge unit varies with the motor type, rotation speed, load inertia, and continuous repetition cycle (duty cycle). Use a regenerative discharge unit of a suitable capacity for the load and operation cycle time.

##### How to Calculate the Required Capacity for the Regenerative Discharge Unit

Obtain the rotation energy of each servo motor and each spindle motor from the formula shown below. Then, see Table 4.4.4, and select a regenerative discharge unit so that the sum of the rotation energy values of the servo motors and spindle motors does not exceed the capacity of the regenerative discharge unit.

|                                                                                |
|--------------------------------------------------------------------------------|
| Capacity of regenerative discharge unit $\geq \Sigma$ Rotation energy of motor |
|--------------------------------------------------------------------------------|

See Table 4.4.4 for details of the capacity of the regenerative discharge unit.

##### (1) Servo motor (for horizontal movement)

Amount of regenerative discharge (power [W]) when rapid traverse acceleration/deceleration is performed once every F sec

##### (a) SI unit system

$$w = \frac{1}{F} \times (5.48 \times 10^{-3} \cdot (Jm + JL) \cdot Vm^2 - 5.23 \times 10^{-2} \cdot ta \cdot Vm \cdot TL) [W]$$

F : Frequency of rapid traverse acceleration/deceleration [sec/number of times]

Unless otherwise specified, rapid traverse acceleration/deceleration is assumed to be performed about once every 5 seconds.

Jm : Rotor inertia of the motor [kg·m<sup>2</sup>]

JL : Motor-shaft-converted inertia of the load [kg·m<sup>2</sup>]

Vm : Motor speed at rapid traverse [min<sup>-1</sup>]

ta : Rapid traverse acceleration/deceleration time [sec]

TL : Machine frictional torque (motor-converted value) [N·m]

##### (b) CGS unit system

$$w = \frac{1}{F} \times (5.37 \times 10^{-4} \cdot (Jm + JL) \cdot Vm^2 - 5.13 \times 10^{-3} \cdot ta \cdot Vm \cdot TL) [W]$$

F : Rapid traverse acceleration/deceleration cycle [s/number of times]

About once every five seconds unless otherwise specified

Jm : Rotor inertia of motor [kg·cm·s<sup>2</sup>]

JL : Load inertia (value for motor shaft) [kg·cm·s<sup>2</sup>]

Vm : Motor rotation speed for rapid traverse [min<sup>-1</sup>]

ta : Rapid traverse acceleration/deceleration time [s]

TL : Friction torque of machine (value for motor) [kg·cm]

## (2) Servo motor (for vertical movement)

The amount of regenerative discharge (power [W]) when the operation duty for downward rapid traverse is D(%)

## (a) SI unit system

$$w = 1.047 \times 10^{-1} \cdot Th \cdot Vm \times \frac{D}{100} [W]$$

Th : Upward torque that the motor applies at the time of downward rapid traverse [N·m]

Vm : Motor speed at rapid traverse [ $\text{min}^{-1}$ ]

D : Operation duty [%] for downward rapid traverse

D is set to 50% maximum. Usually, D is less than 50%.

## (b) CGS unit system

$$w = 1.026 \times 10^{-2} \cdot Th \cdot Vm \times \frac{D}{100} [W]$$

Th : Upward torque of motor during lowering by rapid traverse [kg·cm]

Vm : Motor rotation speed for rapid traverse [ $\text{min}^{-1}$ ]

D : Downward operation duty during lowering by rapid traverse [%]

D is a maximum of 50% and usually less.

## (3) Spindle motor

## (a) SI unit system

$$w = 5.48 \times 10^{-3} \cdot (Jm + JL) \cdot N^2 \times \frac{1}{Dt} [W]$$

Jm : Rotor inertia of the motor [ $\text{kg} \cdot \text{m}^2$ ]

JL : Motor-shaft-converted inertia of the load [ $\text{kg} \cdot \text{m}^2$ ]

N : Motor speed [ $\text{min}^{-1}$ ]

Dt : Duty cycle [sec]

## (b) CGS unit system

$$w = 5.37 \times 10^{-2} \cdot (Jm + JL) \cdot N^2 \times \frac{1}{Dt} [W]$$

Jm : Rotor inertia of motor [ $\text{kg} \cdot \text{cm} \cdot \text{s}^2$ ]

JL : Load inertia (value for motor shaft) [ $\text{kg} \cdot \text{cm} \cdot \text{s}^2$ ]

N : Motor rotation speed [ $\text{min}^{-1}$ ]

Dt : Duty cycle [s]

## Cautions for selecting a regenerative discharge unit

Table.4.4.4 Required capacity for the Regenerative Discharge unit

| Regenerative<br>discharge unit | Capacity   |        |        | Remarks                                                     |
|--------------------------------|------------|--------|--------|-------------------------------------------------------------|
|                                | Wind speed |        |        |                                                             |
|                                | 0m/sec     | 2m/sec | 4m/sec |                                                             |
| A06B-6089-H510                 | 100W       | 250W   | -      | Resistance : 16Ω                                            |
| A06B-6089-H500                 | 200W       | 400W   | 600W   | Resistance : 16Ω                                            |
| A06B-6089-H713                 | -          | -      | 800W   | Forced cooling fan<br>motor is included<br>Resistance : 16Ω |
| A06B-6089-H711                 | -          | -      | 800W   | Forced cooling fan<br>motor is included<br>Resistance : 8Ω  |
| A06B-6089-H712                 | -          | -      | 1200W  | Forced cooling fan<br>motor is included<br>Resistance : 8Ω  |

### NOTE

- 1 The "maximum output at acceleration" value is provided only to aid in the selection of an  $\alpha i$  PS<sub>R</sub>; this is not a guaranteed value.
- 2 When a spindle motor with a maximum output of 5kW or more is used, the resistance of the regenerative discharge unit must be 8Ω. If a regenerative discharge unit with a resistance of 16Ω is used for a spindle motor with a maximum output of 5 kW or more, a regeneration excess alarm (alarm No. 08) may be generated in the  $\alpha i$  PS<sub>R</sub> when the spindle is decelerated.

## 4.5 LIST OF MOTOR OUTPUT CAPACITIES FOR $\alpha i$ PS AND $\alpha i$ PS<sub>R</sub> series SELECTION

### 4.5.1 Servo Motor Continuous Rated Outputs and Maximum Outputs at Acceleration

This section gives the output data for servo motor. These data are used for selecting an  $\alpha i$  PS or  $\alpha i$  PS<sub>R</sub>. See FANUC AC SERVO MOTOR  $\alpha i$ s/ $\alpha i$  series DESCRIPTIONS (B-65262EN) for details.

(1) Servo motor  $\alpha i$ s/ $\alpha i$  series (200-V input series)

**Table 4.5.1(a)**

| Motor model               | Continuous rated output | Maximum output at acceleration |
|---------------------------|-------------------------|--------------------------------|
| $\alpha i$ F 1/5000       | 0.50kW                  | 2.0kW                          |
| $\alpha i$ F 2/5000       | 0.75kW                  | 2.9kW                          |
| $\alpha i$ F 4/4000       | 1.4kW                   | 4.5kW                          |
| $\alpha i$ F 8/3000       | 1.6kW                   | 5.7kW                          |
| $\alpha i$ F 12/3000      | 3.0kW                   | 7.6kW                          |
| $\alpha i$ F 22/3000      | 4.0kW                   | 9.6kW                          |
| $\alpha i$ F 30/3000      | 7.0kW                   | 21kW                           |
| $\alpha i$ F 40/3000      | 6.0kW                   | 18kW                           |
| $\alpha i$ F 40/3000+FAN  | 9.0kW                   | 18kW                           |
| $\alpha i$ S 2/5000       | 0.75kW                  | 2.8kW                          |
| $\alpha i$ S 2/6000       | 1.0kW                   | 2.4kW                          |
| $\alpha i$ S 4/5000       | 1.0kW                   | 3.1kW                          |
| $\alpha i$ S 8/4000       | 2.5kW                   | 8.0kW                          |
| $\alpha i$ S 8/6000       | 2.2kW                   | 11kW                           |
| $\alpha i$ S 12/4000      | 2.7kW                   | 12kW                           |
| $\alpha i$ S 22/4000      | 4.5kW                   | 17kW                           |
| $\alpha i$ S 22/6000      | 4.5kW                   | 21kW                           |
| $\alpha i$ S 30/4000      | 5.5kW                   | 22kW                           |
| $\alpha i$ S 40/4000      | 5.5kW                   | 24kW                           |
| $\alpha i$ S 50/3000      | 5kW                     | 39kW                           |
| $\alpha i$ S 50/3000 +FAN | 14kW                    | 39kW                           |
| $\alpha i$ S 100/2500     | 11kW                    | 38kW                           |
| $\alpha i$ S 100/2500+FAN | 22kW                    | 38kW                           |
| $\alpha i$ S 200/2500     | 16kW                    | 48kW                           |
| $\alpha i$ S 200/2500+FAN | 30kW                    | 48kW                           |
| $\alpha i$ S 300/2000     | 52kW                    | 96kW                           |
| $\alpha i$ S 500/2000     | 60kW                    | 104kW                          |

#### NOTE

There is a possibility to change the data.

(2) Servo motor  $\beta$ iS series (200-V input series)**Table 4.5.1(b)**

| <b>Motor model</b>  | <b>Continuous rated output</b> | <b>Maximum output at acceleration</b> |
|---------------------|--------------------------------|---------------------------------------|
| $\beta$ iS 0.2/5000 | 0.05kW                         | 0.24kW                                |
| $\beta$ iS 0.3/5000 | 0.1kW                          | 0.4kW                                 |
| $\beta$ iS 0.4/5000 | 0.13kW                         | 0.5kW                                 |
| $\beta$ iS 0.5/6000 | 0.35kW                         | 1.3kW                                 |
| $\beta$ iS 1/6000   | 0.5kW                          | 2.3kW                                 |
| $\beta$ iS 2/4000   | 0.5kW                          | 2.3kW                                 |
| $\beta$ iS 4/4000   | 0.75kW                         | 2.5kW                                 |
| $\beta$ iS 8/3000   | 1.2kW                          | 2.8kW                                 |
| $\beta$ iS 12/2000  | 1.4kW                          | 2.8kW                                 |
| $\beta$ iS 12/3000  | 1.8kW                          | 5.4kW                                 |
| $\beta$ iS 22/2000  | 2.5kW                          | 5.2kW                                 |
| $\beta$ iS 22/3000  | 3.0kW                          | 8.8kW                                 |

**NOTE**

There is a possibility to change the data.

(3) Servo motor  $\alpha i$  series (400-V input series)

Table 4.5.1(c)

| Motor model                | Continuous rated output | Maximum output at acceleration |
|----------------------------|-------------------------|--------------------------------|
| $\alpha iF$ 4/4000HV       | 1.4kW                   | 4.5kW                          |
| $\alpha iF$ 8/3000HV       | 1.6kW                   | 5.7kW                          |
| $\alpha iF$ 12/3000HV      | 3.0kW                   | 7.5kW                          |
| $\alpha iF$ 22/3000HV      | 4.0kW                   | 9.6kW                          |
| $\alpha iS$ 2/5000HV       | 0.75kW                  | 2.8kW                          |
| $\alpha iS$ 2/6000HV       | 1.0kW                   | 2.4kW                          |
| $\alpha iS$ 4/5000HV       | 1.0kW                   | 3.1kW                          |
| $\alpha iS$ 8/4000HV       | 2.3kW                   | 8.0kW                          |
| $\alpha iS$ 8/6000HV       | 2.2kW                   | 11kW                           |
| $\alpha iS$ 12/4000HV      | 2.5kW                   | 12kW                           |
| $\alpha iS$ 22/4000HV      | 4.5kW                   | 19kW                           |
| $\alpha iS$ 22/6000HV      | 4.5kW                   | 21kW                           |
| $\alpha iS$ 30/4000HV      | 5.5kW                   | 22kW                           |
| $\alpha iS$ 40/4000HV      | 5.5kW                   | 24kW                           |
| $\alpha iS$ 50/3000HV      | 5kW                     | 39kW                           |
| $\alpha iS$ 50/3000HV +FAN | 14kW                    | 39kW                           |
| $\alpha iS$ 100/2500HV     | 11kW                    | 38kW                           |
| $\alpha iS$ 100/2500HV+FAN | 22kW                    | 38kW                           |
| $\alpha iS$ 200/2500HV     | 16kW                    | 48kW                           |
| $\alpha iS$ 200/2500HV+FAN | 30kW                    | 48kW                           |
| $\alpha iS$ 300/2000HV     | 52kW                    | 96kW                           |
| $\alpha iS$ 500/2000HV     | 60kW                    | 104kW                          |
| $\alpha iS$ 1000/2000HV    | 100kW                   | 189kW                          |
| $\alpha iS$ 1000/2000HV    | 110kW                   | 190kW                          |
| $\alpha iS$ 2000/2000HV    | 200kW                   | 400kW                          |
| $\alpha iS$ 3000/2000HV    | 220kW                   | 690kW                          |

**NOTE**

There is a possibility to change the data.

(4) Servo motor  $\beta$ iS series (400-V input series)**Table 4.5.1(c)**

| <b>Motor model</b>   | <b>Continuous rated output</b> | <b>Maximum output at acceleration</b> |
|----------------------|--------------------------------|---------------------------------------|
| $\beta$ iS 2/4000HV  | 0.5kW                          | 2.3kW                                 |
| $\beta$ iS 4/4000HV  | 0.75kW                         | 2.5kW                                 |
| $\beta$ iS 8/3000HV  | 1.2kW                          | 2.8kW                                 |
| $\beta$ iS 12/3000HV | 1.8kW                          | 5.4kW                                 |
| $\beta$ iS 22/2000HV | 2.5kW                          | 5.2kW                                 |
| $\beta$ iS 22/3000HV | 3.0kW                          | 8.8kW                                 |

**NOTE**

There is a possibility to change the data.

## 4.5.2 Spindle Motor Continuous Rated Outputs and Maximum Outputs at Acceleration

This section gives the output data for spindle motor. These data are used for selecting Power Supply module of the  $\alpha i$  PS and  $\alpha i$  PS<sub>R</sub>. See FANUC AC SPINDLE MOTOR  $\alpha i$  series DESCRIPTIONS (B-65272EN) for details.

(1) Spindle motor  $\alpha i$  series (200-V input series)

Table 4.5.2(a)

| Motor model                                                            | Continuous rated output | 30-minute rated output | Maximum output at acceleration |
|------------------------------------------------------------------------|-------------------------|------------------------|--------------------------------|
| $\alpha i$ I 0.5/10000                                                 | 0.55kW                  | 1.1kW(15-minute rated) | 1.32kW                         |
| $\alpha i$ I 1/10000                                                   | 1.5kW                   | 2.2kW(15-minute rated) | 2.64kW                         |
| $\alpha i$ I 1/15000                                                   | 1.5kW                   | 2.2kW(15-minute rated) | 5.6kW                          |
| $\alpha i$ I 1.5/10000                                                 | 1.1kW                   | 3.7kW(10-minute rated) | 4.44kW                         |
| $\alpha i$ I 1.5/15000                                                 | 1.5kW                   | 2.2kW(15-minute rated) | 13kW                           |
| $\alpha i$ I 2/10000                                                   | 2.2kW                   | 3.7kW(15-minute rated) | 4.44kW                         |
| $\alpha i$ I 2/15000                                                   | 2.2kW                   | 3.7kW(15-minute rated) | 20kW                           |
| $\alpha i$ I 3/10000                                                   | 3.7kW                   | 5.5kW                  | 6.6kW                          |
| $\alpha i$ I 3/12000                                                   | 3.7kW                   | 5.5kW                  | 13kW                           |
| $\alpha i$ I 6/10000<br>$\alpha i$ I 6/12000                           | 5.5kW                   | 7.5kW                  | 9kW                            |
| $\alpha i$ I 8/8000<br>$\alpha i$ I 8/10000                            | 7.5kW                   | 11kW                   | 13.2kW                         |
| $\alpha i$ I 12/7000<br>$\alpha i$ I 12/10000                          | 11kW                    | 15kW                   | 18kW                           |
| $\alpha i$ I 15/7000<br>$\alpha i$ I 15/10000                          | 15kW                    | 18.5kW                 | 22.2kW                         |
| $\alpha i$ I 18/7000<br>$\alpha i$ I 18/10000                          | 18.5kW                  | 22kW                   | 26.4kW                         |
| $\alpha i$ I 22/7000<br>$\alpha i$ I 22/10000                          | 22kW                    | 26kW                   | 31.2kW                         |
| $\alpha i$ I 30/6000                                                   | 30kW                    | 37kW                   | 44.4kW                         |
| $\alpha i$ I 40/6000                                                   | 37kW                    | 45kW                   | 54kW                           |
| $\alpha i$ I 50/6000                                                   | 45kW                    | 55kW                   | 66kW                           |
| $\alpha i$ I <sub>P</sub> 12/6000<br>$\alpha i$ I <sub>P</sub> 12/8000 | 5.5kW                   | 7.5kW                  | 12.3kW                         |
| $\alpha i$ I <sub>P</sub> 15/6000<br>$\alpha i$ I <sub>P</sub> 15/8000 | 7.5kW                   | 9kW                    | 13.5kW                         |
| $\alpha i$ I <sub>P</sub> 18/6000<br>$\alpha i$ I <sub>P</sub> 18/8000 | 9kW                     | 11kW                   | 15.1kW                         |
| $\alpha i$ I <sub>P</sub> 22/6000<br>$\alpha i$ I <sub>P</sub> 22/8000 | 11kW                    | 15kW                   | 20kW                           |
| $\alpha i$ I <sub>P</sub> 30/6000                                      | 15kW                    | 18.5kW                 | 25kW                           |
| $\alpha i$ I <sub>P</sub> 40/6000                                      | 18.5kW                  | 22kW                   | 29kW                           |
| $\alpha i$ I <sub>P</sub> 50/6000                                      | 22kW                    | 30kW                   | 35.4kW                         |
| $\alpha i$ I <sub>P</sub> 60/4500                                      | 22kW                    | 30kW                   | 36kW                           |

### NOTE

There is a possibility to change the data.



(2) Spindle motor  $\alpha i$  series (400-V input series)

Table 4.5.2(b)

| Motor model                         | Continuous rated output | 30-minute rated output | Maximum output at acceleration |
|-------------------------------------|-------------------------|------------------------|--------------------------------|
| $\alpha i$ I 0.5/10000HV            | 0.55kW                  | 1.1kW(15-minute rated) | 1.32kW                         |
| $\alpha i$ I 1/10000HV              | 1.5kW                   | 2.2kW(15-minute rated) | 2.64kW                         |
| $\alpha i$ I 1.5/10000HV            | 1.1kW                   | 3.7kW(10-minute rated) | 4.44kW                         |
| $\alpha i$ I 2/10000HV              | 2.2kW                   | 3.7kW(15-minute rated) | 4.44kW                         |
| $\alpha i$ I 3/10000HV              | 3.7kW                   | 5.5kW                  | 6.6kW                          |
| $\alpha i$ I 6/10000HV              | 5.5kW                   | 7.5kW                  | 9kW                            |
| $\alpha i$ I 8/8000HV               | 7.5kW                   | 11kW                   | 13.2kW                         |
| $\alpha i$ I 12/7000HV              | 11kW                    | 15kW                   | 18kW                           |
| $\alpha i$ I 15/7000HV              | 15kW                    | 18.5kW                 | 22.2kW                         |
| $\alpha i$ I 22/7000HV              | 22kW                    | 26kW                   | 31.2kW                         |
| $\alpha i$ I 30/6000HV              | 30kW                    | 37kW                   | 44.4kW                         |
| $\alpha i$ I 40/6000HV              | 37kW                    | 45kW                   | 54kW                           |
| $\alpha i$ I 60/4500HV              | 60kW                    | 75kW                   | 90kW                           |
| $\alpha i$ I 100/4000HV             | 100kW                   | —                      | 117kW                          |
| $\alpha i$ I <sub>P</sub> 15/6000HV | 7.5kW                   | 9kW                    | 13.5kW                         |
| $\alpha i$ I <sub>P</sub> 22/6000HV | 11kW                    | 15kW                   | 20kW                           |
| $\alpha i$ I <sub>P</sub> 40/6000HV | 18.5kW                  | 22kW                   | 29kW                           |
| $\alpha i$ I <sub>P</sub> 50/6000HV | 22kW                    | 30kW                   | 35.4kW                         |
| $\alpha i$ I <sub>P</sub> 60/4500HV | 22kW                    | 30kW                   | 36kW                           |

**NOTE**

There is a possibility to change the data.

# 5

## INSTALLATION

---

Chapter 5, "INSTALLATION", consists of the following sections:

|     |                                                                   |     |
|-----|-------------------------------------------------------------------|-----|
| 5.1 | LEAKAGE CURRENT .....                                             | 103 |
| 5.2 | GROUND.....                                                       | 104 |
| 5.3 | NOISE PREVENTION .....                                            | 108 |
| 5.4 | AMPLIFIER INSTALLATION.....                                       | 117 |
| 5.5 | AMPLIFIER INSTALLATION NOTES RELATING TO<br>SAFETY STANDARDS..... | 118 |
| 5.6 | NOTES ON COOLANT (REFERENCE).....                                 | 126 |

## 5.1 LEAKAGE CURRENT

The servo amplifier  $\alpha i$  series drives the motor by using the transistor PWM inverter method. This causes a high-frequency leakage current to flow via the ground drift capacitance in the motor winding, power cable, and amplifier. This may cause a device installed on Power supply side, such as a ground fault interrupter or leakage-protection relay, to malfunction.

When a circuit breaker with a ground fault interrupter is used, it must be selected so that the sum of the values calculated according to (a) and (b) described below is not greater than the non-operating current value.

- (a) Selection criterion per amplifier

Model :  $\alpha i$  SV and  $\alpha i$  SP

Criterion for selection : 2 mA per amplifier (Note 1)

- (b) Selection criterion per motor

Criterion for selection : 1 mA per motor (Note 1)

The following example shows how to use selection criteria (a) and (b):  
Example :

When the system consists of  $\alpha i$  SV 1-axis  $\times$  1,  $\alpha i$  SV 3-axis  $\times$  1 (three motors), and  $\alpha i$  SP  $\times$  1

$2 \text{ mA} \times 3 \text{ (for the amplifiers)} + 1 \text{ mA} \times 5 \text{ (for the motors)} = 11 \text{ mA}$

→ Select a circuit breaker (Note 2) with a non-operating current of 11 mA or higher. (A general ground fault interrupter that can be used for the above example is the one with a rated sensitivity current of 30 mA and a non-operating current of 15 mA.)

### NOTE


- 1 These criteria are for selecting a circuit breaker with a ground fault interrupter; they do not indicate accurate leakage currents.
- 2 A circuit breaker may malfunction depending on the frequency characteristic of the ground fault interrupter. Therefore, use a ground fault interrupter supporting the use of inverters.
- 3 The above criteria are values in the commercial frequency band. Some measuring instruments for measuring leakage current may sense a high frequency band, thus showing a larger value.

## 5.2 GROUND

### 5.2.1 Ground Systems

There are three ground systems for CNC system grounding.

- (a) Signal ground system (SG)  
The signal ground (SG) supplies the reference voltage (0V) of the electrical signal system.
- (b) Frame ground system (FG)  
The frame ground system (FG) is used for safety, and suppressing external and internal noises. In the frame ground system, the frames, panels, and shields for the interface cables between the units are connected.
- (c) System ground system (PE)  
In the system ground system (PE), frame ground provided for each device or among units is connected systematically to ground at one place.

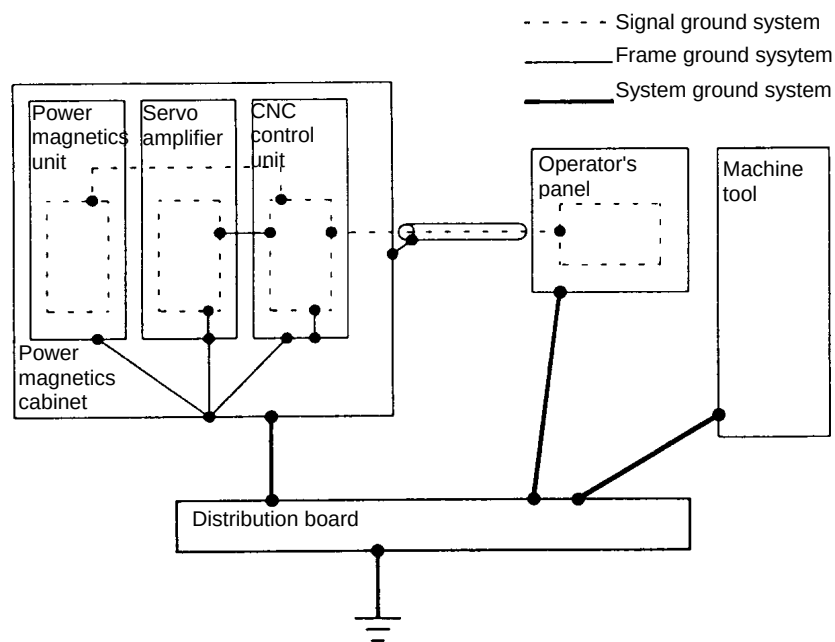

## 5.2.2 Grounding Method

Generally, noise that causes problems is high-frequency noise. Grounding each device with a low impedance(NOTE) is a key to suppression of high-frequency noise. Methods of grounding for this purpose are explained below.

**NOTE**

In addition to a resistance component, which converts current to heat, impedance contains a reactance component, which prevents the flow of AC current at a certain frequency.

(1) Multi-point grounding

If a metal plate of a cabinet is grounded with a sufficiently low impedance, the metal plate is used as a ground plate, and each device is grounded nearby. This method allows grounding to a low-impedance metal plate of the cabinet over a shortest distance, and can therefore effectively suppress high-frequency noise. On the other hand, because a metal plate of a cabinet is used as a ground plate, noise suppression efficiency depends on the structure of the cabinet. For cabinets, see Subsection 1.1.4. Fig. 1 shows a cabling schematic.



When the multi-point grounding method is used, units can be grounded with a low impedance, and the lengths of ground cables can also be reduced, so cabling can be simplified.

**NOTE**

If a metal plate of a cabinet does not show a low impedance, a noise problem may arise between the power ground line and signal ground line.

(2) Single-point grounding

Signal lines and power lines are grounded separately, and grounding is performed at a single point to suppress noise from a power line to signal line. With this method, the length of a cable for grounding a unit tends to be long. So, to suppress high-frequency noise sufficiently, the cable diameter must be increased, or more than one connection cable must be used. Fig. 2 shows a cabling schematic.

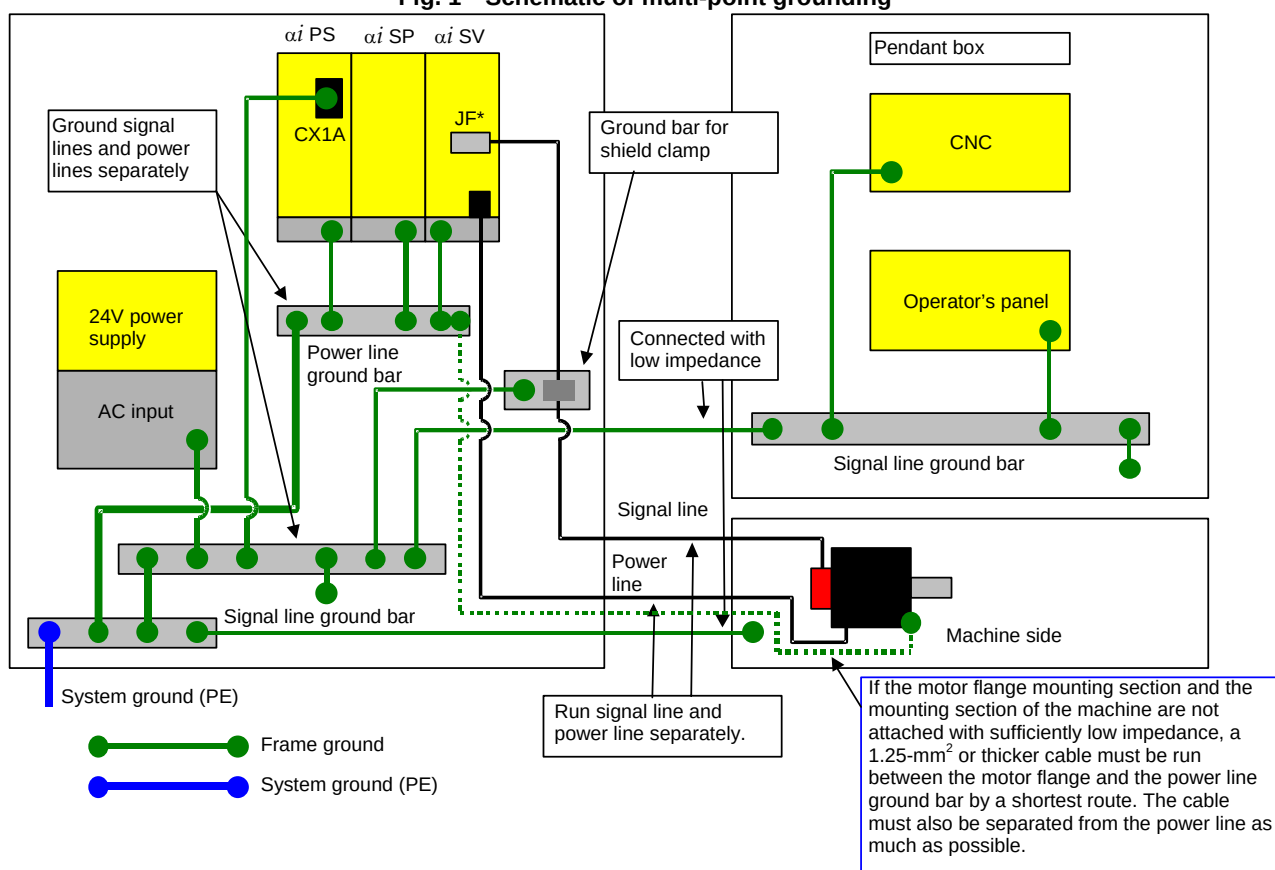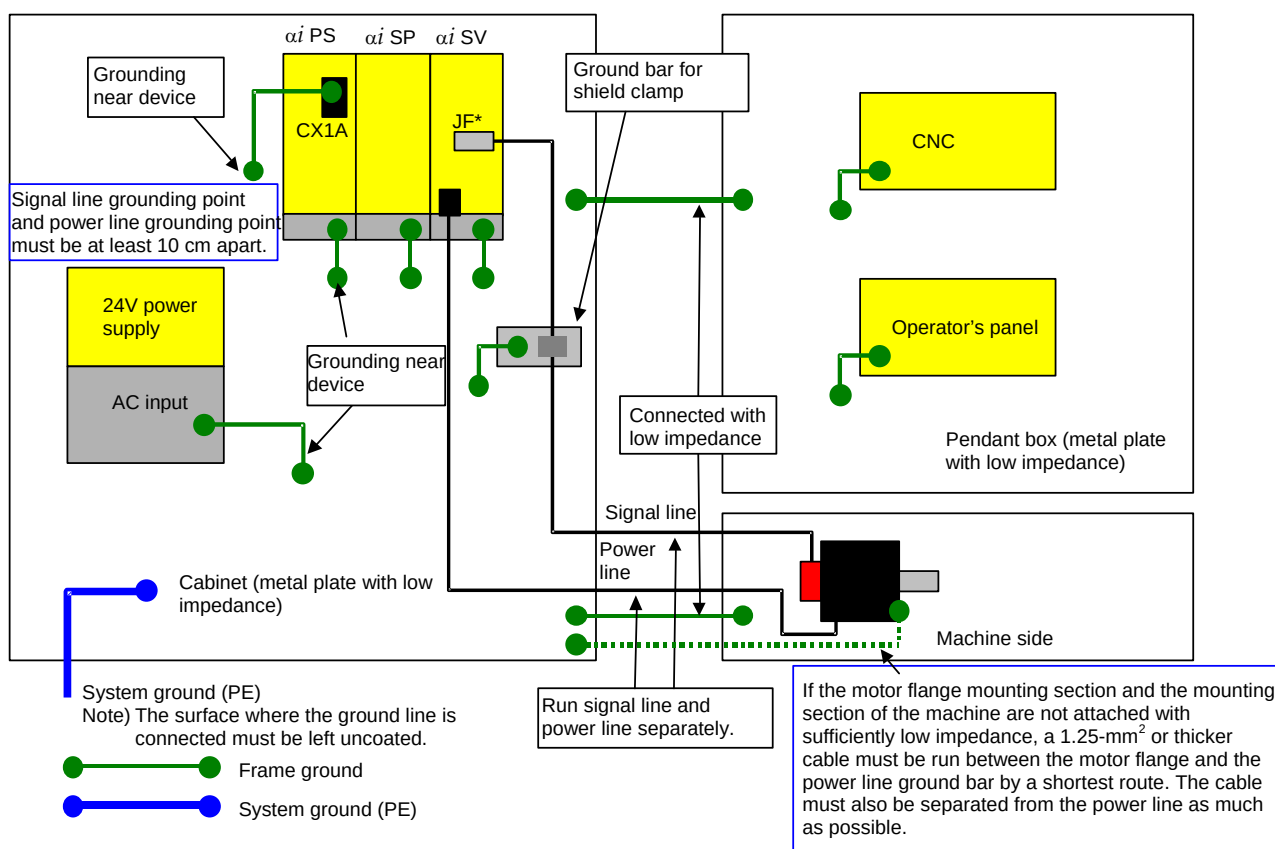

### 5.2.3 Notes on Connecting

---

- Connect the signal ground (0V) with the frame ground (FG) at only one place in the  $\alpha i$  PS.
- The grounding resistance of the system ground shall be 100 ohms or less (class D grounding).
- The system ground cable must have enough cross-sectional area to safely carry the accidental current flow into the system ground when an accident such as a short circuit occurs. (Generally, it must have the cross-sectional area of the AC power cable or more.)
- Use the cable containing the AC power wire and the system ground wire so that power is supplied with the ground wire connected.

**NOTE**

- 1 Securing the ground terminal and a cable together is not permitted.
- 2 The motor flange mounting section may not be able to be connected to the machine mounting section of the power magnetics cabinet via the mechanical unit at sufficiently low impedance in a machine. In this case, a cable of a minimum required length that is at least 1.25 mm<sup>2</sup> thick must be run from the motor flange to the frame ground of the power magnetics cabinet. The cable must also be separated from the motor power line as much as possible.

## 5.3 NOISE PREVENTION

### 5.3.1 Separation of Signal Lines


If a signal cable is near a power cable, noise may be induced. The signal cables must be separated from the power cables when routed. When power and signal cables cannot possibly be separated from each other, the cables must be run in parallel in the minimum distance. When a conduit is used, it is recommended that the signal cables be separated from the power cables in it.

[Types of cables]

| Group | Signal type                                      | Action                                                                                                      |
|-------|--------------------------------------------------|-------------------------------------------------------------------------------------------------------------|
| A     | Amplifier input power line                       | Separate binding (Note 1) or electromagnetic shielding (Note 2) is necessary for group B cables.            |
|       | Motor power line                                 |                                                                                                             |
|       | Magnetic contactor driving coil (Note 3)         |                                                                                                             |
| B     | Cable between CNC and SPM                        | Separate binding or electromagnetic shielding is necessary for group A cables. All cables must be shielded. |
|       | Cable for position feedback or velocity feedback |                                                                                                             |
|       | Cable for Positioncoder                          |                                                                                                             |
|       | Other cable related to sensor                    |                                                                                                             |

#### NOTE

- 1 The groups must be 10 cm or more apart from one another when binding the cables in each group.
- 2 The electromagnetic shield refers to shielding between groups with grounded steel plates.
- 3 Attach a noise suppressor such as a spark killer to the magnetic contactor driving coil.

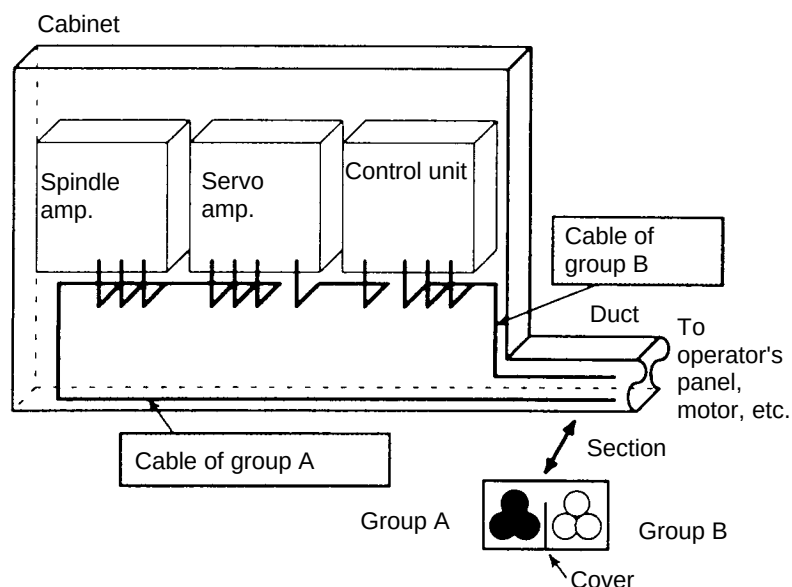



### 5.3.2 Cable Clamp and Shield Processing

---

Basically, signal lines require shield clamping. Correct shield clamping can suppress noise from the outside.

Strip part of the cable jacket to expose the shield sheath, and secure that part of the cable to the ground bar by using a clamp. At this time, the ground bar must be in contact with the surface of the shield so that the contact area becomes wide. (See the figure.)

When using the multi-point grounding method, remove the coating of the part where the shield clamp ground bar is connected to the cabinet, to allow surface contact.

- Terminal processing of the shield sheaths  
Perform terminal processing of the shield sheaths of the signal cables according to the description in Section 9.3.
- Cable clamp  
The cables that run into the amplifier and which require shield processing, with the exception of K14, K15, K17, K18, K19, K31, and K33, must be clamped as indicated in Fig. 5.3.2(a).

Clamping secures a cable and also provides shielding. Clamping must always be performed since it is very important for stable system operation.

Connect the cable clamp of the signal cables of  $\alpha i$  SV connected to common  $\alpha i$  PS to common the ground plate for signals.

- Grounding  
The ground plate must be created and installed by the user as shown in Figs.5.3.2(b) to (e).

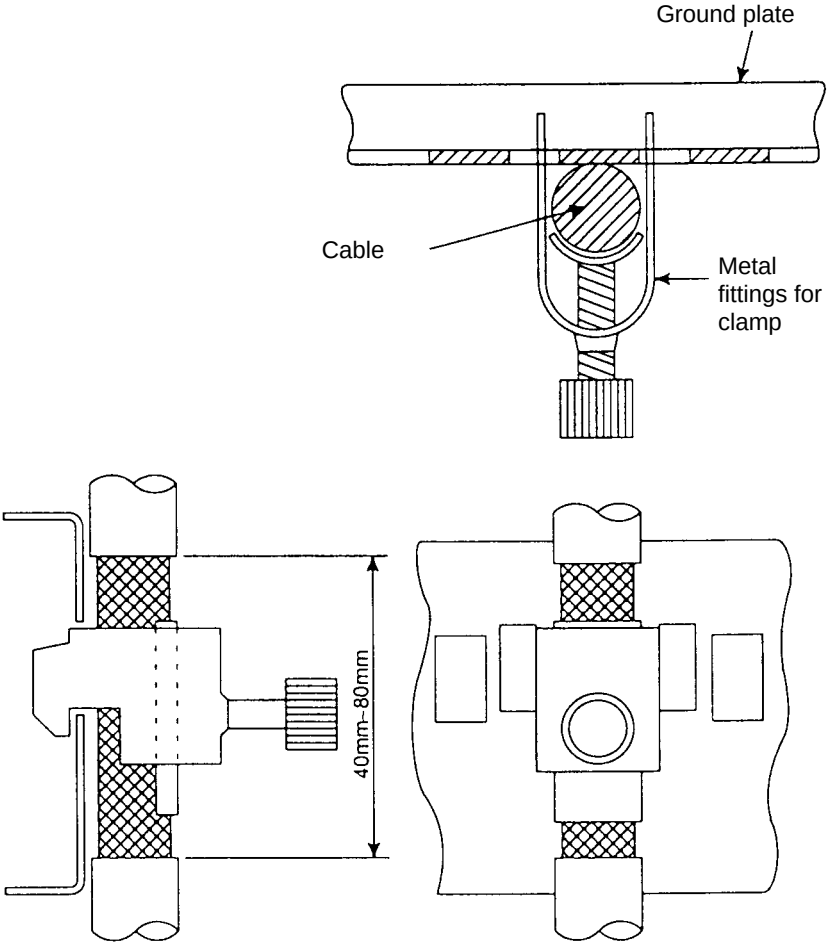


Fig.5.3.2(a) Cable clamp (1)

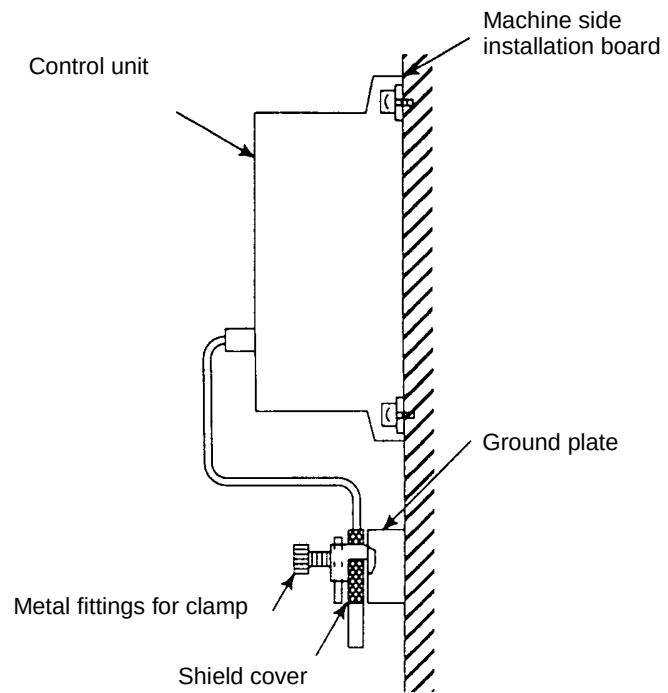


Fig.5.3.2(b) Cable clamp (2)

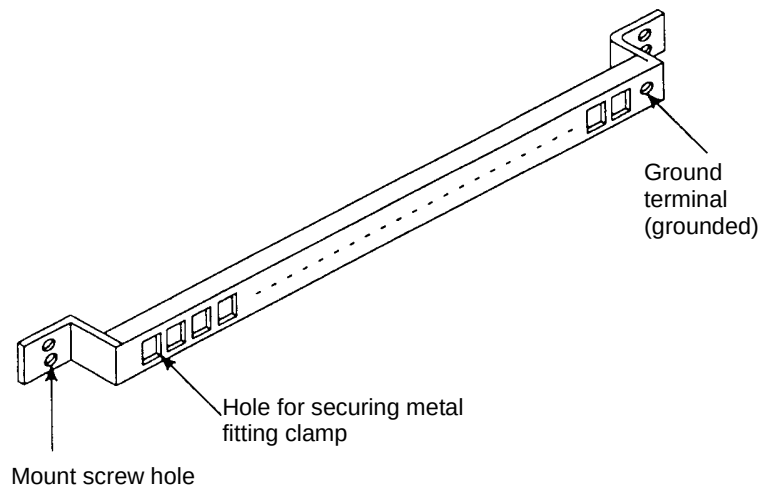


Fig.5.3.2(c) Ground plate

For the ground plate, use a metal plate of 2 mm or thicker, which surface is plated with nickel.

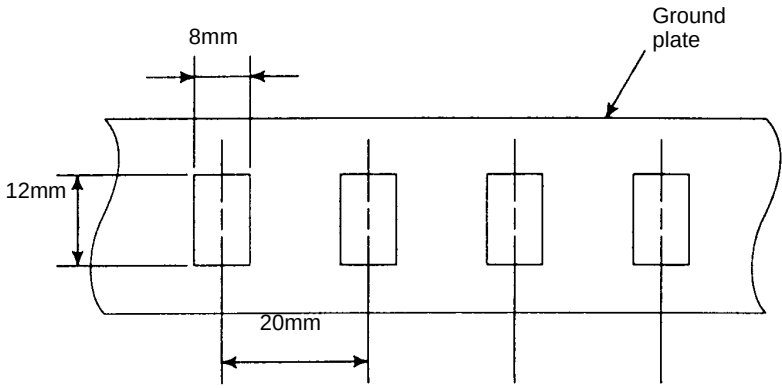


Fig.5.3.2(d) Ground plate holes

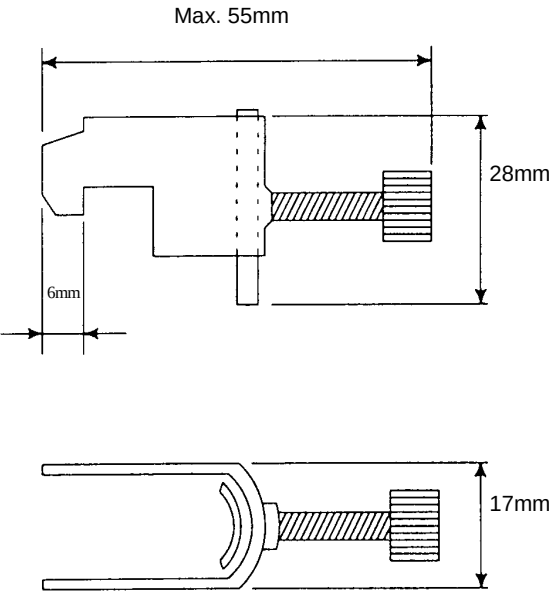


Fig.5.3.2(e) Outer drawings of metal fittings for clamp

### 5.3.3 Cabinet

A cabinet is a key element for improving noise resistance and suppressing radiation noise.

One factor of noise resistance and radiation noise problems is insufficient electrical conductivity between metal plates of a cabinet. Generally, noise that causes problems is high-frequency noise. Therefore, a cabinet needs to be designed considering high-frequency noise.

(1) Basic structure of a cabinet


Basically, cabinets should be made of metal.

To improve noise resistance, the metal plates of the side walls, top plate, and bottom plate of a cabinet must be electrically low-impedance conductive. So, welding is recommended for the cabinet.

Bead (continuous) welding, rather than spot welding, should be applied to the cabinet to enhance low-impedance electrical conductivity among the metal plates.

When the cabinet uses a built-up structure, joint part of each metal plate must be left uncoated, so that the plates come in direct contact with each other to provide electrical conductivity.


When metal plates are connected only via cables because of structural restrictions, it becomes more difficult to achieve low-impedance connection than when the metal plates are welded or are in direct contact. It is necessary to ensure large sectional areas of the cables used, sufficient conductivity of the connection parts, and large contact areas.

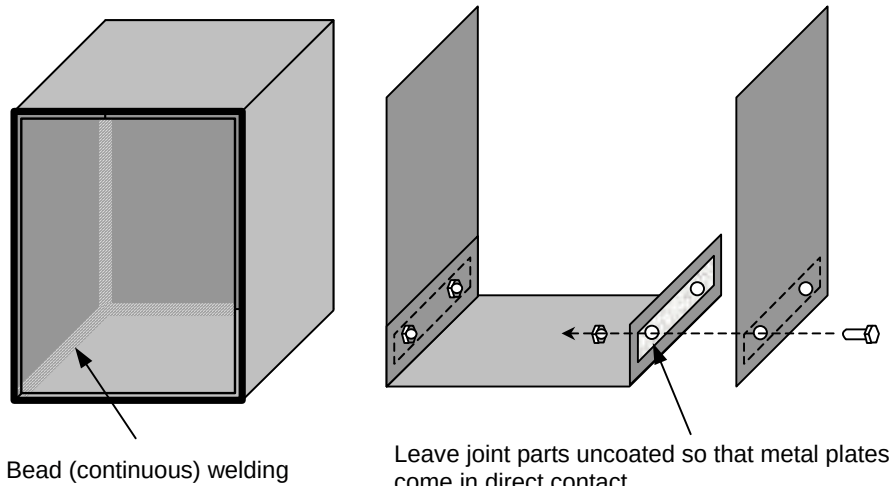

**NOTE**

The purpose of the description in this subsection is to provide a cabinet with low-impedance electric conductivity to improve noise resistance. To implement a protection circuit, a cable having an appropriate sectional area for the AC input power capacity of the unit mounted on each metal plate needs to be used to connect the metal plates to perform protective grounding.

- (2) Installing a unit in a cabinet
- Run the ground cable of the unit by a shortest route. If the conductive wire of the ground cable is thin, impedance to high-frequency noise in particular becomes high, so grounding becomes less effective. For the position of the ground terminal of each unit, see the relevant manual. When a metal plate is installed in the cabinet after a unit is attached to the metal plate, the following method should be used. Attach the metal plate to the cabinet so that their wide areas left uncoated by masking come in contact with each other. The method of using only screws to provide electric conductivity is not recommended because impedance to high frequencies cannot be decreased sufficiently.

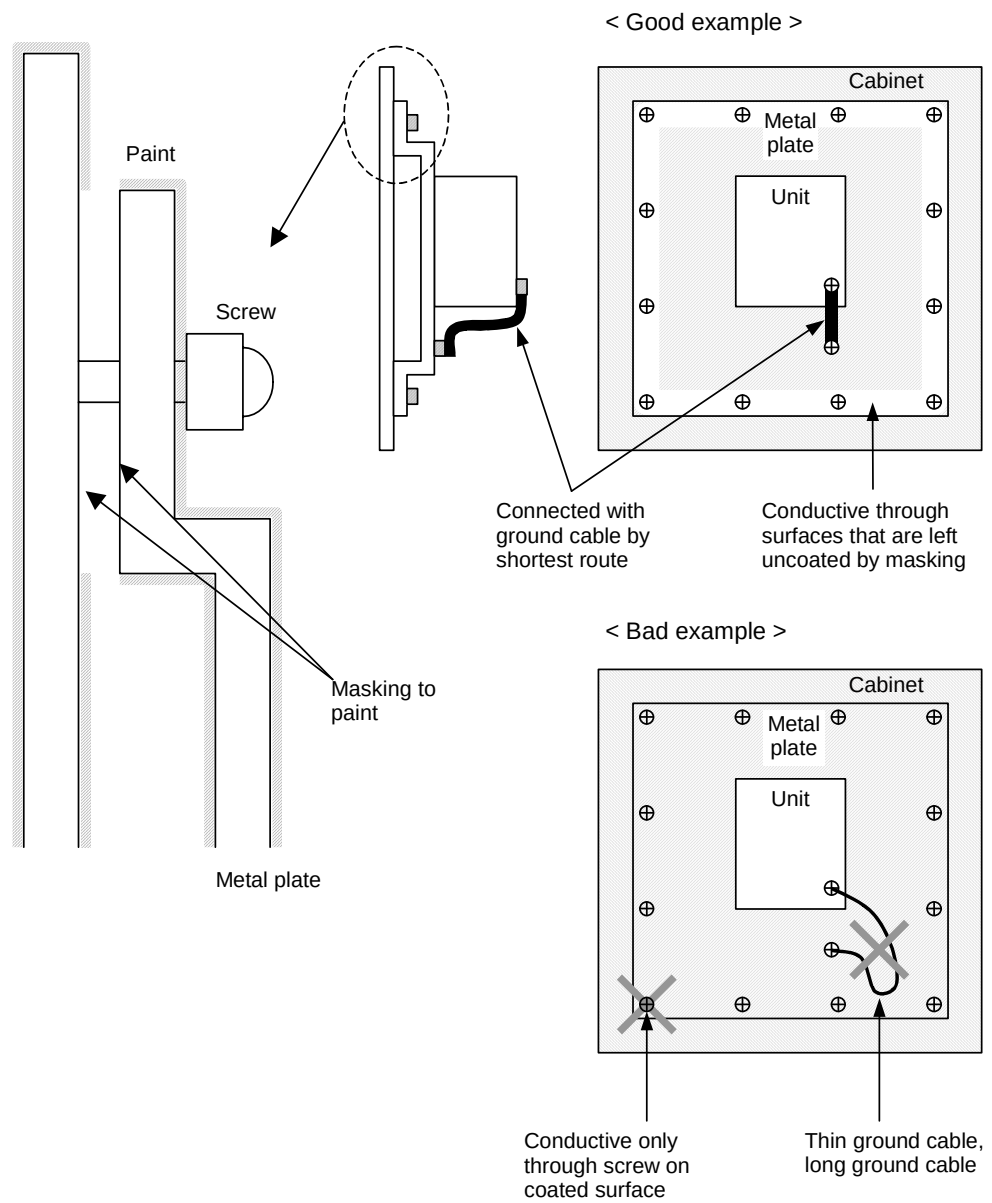

### 5.3.4 Others

---

#### Cable length

If a cable is longer than required, a loss of power increases, and the signal line becomes likelier to be affected by noise. Use each cable of the minimum required length.

#### Use of shield cables

- Satisfying the requirements of the EMC Directives  
For details, refer to "Satisfying the Requirements of the EMC Directive" (A-72937).
- Protection against noise  
Noise generated from the shielded wire of a power shield cable may affect signals via the shielded wire of a signal cable. For this reason, separate the ground of the shielded wire of a power cable from that of the shielded wire of a signal cable. Use different ground clamping plates (ground plates) for power cables and signal cables to improve safety.




## 5.4 AMPLIFIER INSTALLATION

A restriction is imposed on the order of amplifier installation as described below.


- (1) When an  $\alpha i$  SP 45,  $\alpha i$  SP 55,  $\alpha i$  SP 30HV,  $\alpha i$  SP 45HV,  $\alpha i$  SP 75HV, or  $\alpha i$  SP 100HV is used

Install the  $\alpha i$  PS and  $\alpha i$  SP close to each other.

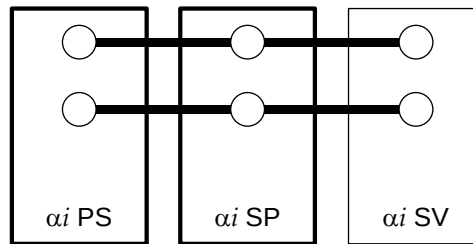

- (2) When an  $\alpha i$  SV 360HV is used

Install the  $\alpha i$  PS and  $\alpha i$  SV 360HV close to each other.

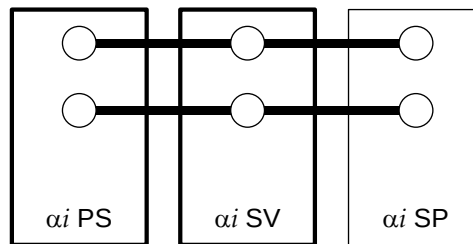

## 5.5 AMPLIFIER INSTALLATION NOTES RELATING TO SAFETY STANDARDS

---

The  $\alpha i$  series servo amplifiers are designed to meet the following safety standards:

EN50178 1997

UL508C Second Edition or Third Edition

To verify the conformity to these standards, the amplifiers are certified by TÜV Rheinland, a third certification organization, and UL.

When performing the CE Marking or UL Marking process, in design of the power magnetics cabinet, pay special attention to the installation conditions described in this section.

### 5.5.1 Requirements of EN and IEC Standards

---

#### 5.5.1.1 Classification in standards on insulation design

---

- (1) Insulation between circuits and between a circuit and protective ground

According to EN50178 5.2, insulation design of the amplifier conforms to the related standards in IEC60664 Part 1.

- The primary (the power supply and main circuit side) and the secondary (control circuit side) are separated by enforced insulation to ensure safety.
- Basic insulation is applied to the protective ground side.

Basic insulation is also applied between the main circuit of the power supply and the aluminum flanges (integrated with the heat sink), so connect a protective ground cable to the ground terminal of the lower aluminum flange.

- (2) Installation category (overvoltage category)

In EN50178 5.2.16.2, power supply facilities are classified according to the impulse voltage to ground, included in the power supply to which the amplifier is connected.

This amplifier is designed to fall into installation category (overvoltage category) II.

Space distance is designed on the assumption that the rated impulse withstanding voltage (impulse voltage to ground) that appears in the power supply to which the amplifier is connected is 2.5 kV or less. If an impulse to ground that is higher than the assumed value appears in the power supply, it needs to be suppressed. In general, this condition is considered to be satisfied if an insulation transformer is used in the power supply input section of the machine. If an insulation transformer is not used, a surge protector (lightning surge absorber) must be inserted before ground to suppress impulse higher than 2.5 kV to ground.

- (3) Pollution degree of the installation environment and protection class of the power magnetics cabinet  
 EN 50178 5.2.15.2 requires that when the machine is installed in the environment of ordinary plants, the class of protection against dust, coolant, chips, and so on be IP54 or higher.  
 If the power magnetics cabinet satisfies this requirement, the degree of pollution inside the power magnetics cabinet is considered to be class 2.

Insulation design of this amplifier assumes that the amplifier is installed in an environment with pollution degree 2.

When the amplifier is used in a general machine installation environment, install the amplifier in a power magnetics cabinet that satisfies protection class IP54 or higher.

The IP level, however, is determined by the environment (atmosphere) in which the machine is installed. So, the protection class of the power magnetics cabinet should be selected according to the environment.

When an external heat sink cooling type amplifier of which heat sink fin protrudes behind the mounting flange is used, the fin section must be in a cooling area (duct) conforming to around IP22 to IP33, and must be protected from being exposed to direct splashes of coolant, chips, and so forth.

### **5.5.1.2 Protection against electric shock**

---

- (1) Protection against direct contact with charged parts (EN50178 7.2.1)

The electric shock protection level of this amplifier after it is installed is equivalent to IP1X (hand protection), which requires protection against unintentional or careless contact.

This amplifier must be installed in a power magnetics cabinet. According to Section 6.2.1, "Electric shock protection by cabinets", in EN 60204-1, the power magnetics cabinet must be equipped with a lock so that when the power to the amplifier is on, the power magnetics cabinet cannot be opened by persons except special maintenance personnel or persons authorized to do maintenance work who have been sufficiently trained in prevention of electric shock.

If the operator of the machine needs to open the power magnetics cabinet for some operations, the operator must be given thorough safety training, or a protection cover must be provided to prevent the operator from touching the amplifier.

- (2) Confirmation of discharge of the electrolytic capacitor (EN50178 7.2.1)

This amplifier includes a large-capacity electrolytic capacitor for the power smoothing circuit. Even after the power supply input circuit is shut off, this capacitor remains charged for a while.

When it becomes necessary to touch the amplifier to do maintenance work or for other purposes, wait until the discharge time indicated on the face plate of the amplifier is passed, or start work after ensuring safety by measuring the residual voltage of the DC link section with a volt-ohm meter and checking that the LED (red) indicating charging is turned off.

- (3) Leakage current to the protective ground cable (EN50178 7.2.11)  
The motor is controlled by changing the average amplitude and frequency of voltage by pulse duration modulation and applying the modulated voltage to the armature. To do this, chopper voltage at a frequency of several kilohertz, which is the carrier frequency for the pulse duration modulation, is applied to the power line of the motor.

Ground stray capacitance mainly between the motor winding and casing and between the power line and protective ground line of the motor power cable causes leakage current to flow through the protective ground line of the motor power cable and machine ground, part of which flows also to the protective ground line of the machine.

The resultant leakage current value is around 1 to 2 mA per motor axis at the commercial power frequency component (50/60Hz). However, with the measurement circuit defined by EN 50178 5.2.11, the sensitivity of high-frequency components cannot be reduced sufficiently, so a value greatly exceeding 3.5 mA is sometimes observed.

If the machine is not grounded, making contact with the machine can result in electric shock. Therefore, provide sufficient protection against electric shock by taking one of the following measures:

- (a) Use a protective ground cable with a copper wire having a sectional area of 10 mm<sup>2</sup> or more.
- (b) Install a ground-fault circuit interrupter to shut off power as soon as a ground fault occurs.
- (c) Add a protective ground terminal to the cabinet to duplicate protective ground cable connection.
- (d) When installing an RCD unit, use RCD type B.

When using a ground-fault circuit interrupter, select an electromagnetic type with low high-frequency component sensitivity or an electronic type supporting inverters to prevent troubles due to high-frequency components. Measure (a) or (d), which can detect leakage current, is recommended.

---

### 5.5.1.3 Protective grounding

---

The amplifier has several protective ground terminals (marked according to 417-IEC-5019). These terminals are used not only for protection against electric shock due to dielectric breakdown but also for functional grounding to prevent noise.

Connect all the protective ground terminals to the protective ground (PE) terminal in the power magnetics cabinet.

For how to connect a protective ground cable and its cable diameter, refer to Section 5.2, "GROUND", and Subsection 9.3.1.7, "Details of cable K70", in B-65282EN/06.

Note that connecting a cable terminal to a protective ground point is not permitted.

---

### 5.5.1.4 EMC

---

For CE Marking, the EMC Directive must be observed. FANUC's products have obtained certificates of conformance to EN61000 6.2:2001 and EN55011:1998+A1+A2 (EMC Directive (EC Directive 89/336/EEC) from a third certification organization.

In addition, EMC of the machine and system units must be evaluated according to the above EU and (or) other requirements.

---

### 5.5.1.5 Notes on the emergency stop circuit configuration

---

The power system in the amplifier is shut off by IGBT (transistor) and not by electro-mechanical means.

When configuring an emergency stop circuit, therefore, be sure to insert a line contactor to the power input line of Power Supply for power feeding to allow electro-mechanical shut-off operation, so that voltage is applied to the control coil of the contactor via the contactor control output of Power Supply.

If the amplifier fails, even when the emergency stop command input (\*ESP) of the amplifier is driven low, the output relay of Power Supply cannot sometimes be turned off, disabling the line contactor from being shut off.

To surely shut off power, besides the shut-off feature of the amplifier, the emergency stop circuit must have a redundant circuit structure that has an independent route for directly shutting off the line contactor when a command is issued from the emergency stop switch.

When a spindle amplifier module is used, if the power line is shut off during spindle rotation, the power regeneration function may not be able to stop the spindle immediately, allowing the spindle to coast for a long time. So, the redundant circuit mentioned above must have a delay feature using an off-delay timer with a normal stop time taken into account.

### 5.5.1.6 Reduction of load ratio to ambient temperature

---

Some servo amplifier models have been approved as products conforming to standards with a load reduction ratio described below set.

If the load ratio is exceeded during use, the permissible temperature range of a part used may be exceeded, which can result in the issuance of an overheat alarm or decrease of the life of the part. So, the amplifier must be used so that the reduction characteristic is not exceeded.

For the load reduction ratio, refer to "(6) Derating" in Section 2.2.

### 5.5.1.7 Overload protection

---

An overload protection feature is provided as follows:

In the  $\alpha i$  SP, the protection feature works when the maximum output continues for 30 s or longer.

In the  $\alpha i$  SV, the protection feature works when the current level becomes 1.3 times as high as the rated current of the motor.

### 5.5.1.8 External overload protection device

---

The servo amplifier is not equipped with a special protection device. To protect conductors, pay attention to the specifications of the power supply unit.

### 5.5.1.9 Over-speed protection

---

The  $\alpha i$  series servo amplifiers are not equipped with an over-speed protection device.

### 5.5.1.10 24-V power supply

---

Normally, the power for controlling the  $\alpha i$  SV and  $\alpha i$  SP is supplied from the  $\alpha i$  PS. When supplying the power from another external power supply, use a class 2 power supply. The class 2 power supply uses a transformer and other parts that are proven safety. For details, contact the power supply manufacturer.

### 5.5.1.11 Screw tightening torque

---

The screws of the servo amplifier are tightened with the following torque:

| Screw size | Tightening torque (Nm) |
|------------|------------------------|
| M4         | 1.1 to 1.5             |
| M5         | 2.0 to 2.5             |
| M6         | 3.5 to 4.5             |
| M10        | 15 to 16               |

## 5.5.2 Requirements of UL Standards

---

### 5.5.2.1 Classification in standards on insulation design

---

- (1) Insulation between circuits and between a circuit and protective ground (UL508C 36)

According to UL508C, insulation design of the amplifier conforms to the requirements of UL840. Connect a protective ground cable to the ground terminal of the lower aluminum flange.

- (2) Installation category (overvoltage category)

According to UL508C 36.9.4.(C), this amplifier is designed to fall into installation category (overvoltage category) III, so a surge absorber must be installed in the power input section of the machine. (UL-compliant product, clamp voltage: 6 kV or lower between phases) For details of the installation of a surge absorber, see Appendix A.

- (3) Pollution degree of the installation environment and protection class of the power magnetism cabinet

UL508C requires that when the machine is installed in the environment of ordinary plants, the power magnetism cabinet in which this amplifier is to be installed meet pollution degree class 2.

The  $\alpha$ i series servo amplifiers are open type devices that are not equipped with a complete enclosure. If the power magnetism cabinet satisfies the above requirement, the degree of pollution inside the cabinet is considered to be class 2.

Insulation design of this amplifier assumes that the amplifier is installed in an environment with pollution degree 2.

When an external heat sink cooling type amplifier of which heat sink fin protrudes behind the mounting flange is used, the fin section must be in a cooling area (duct) conforming to around IP22 to IP33, and must be protected from being exposed to direct splashes of coolant, chips, and so forth.

### 5.5.2.2 Protection against electric shock

---

- (1) Protection against direct contact with charged parts  
This amplifier must be installed in a power magnetics cabinet. The power magnetics cabinet must be equipped with a lock so that when the power to the amplifier is on, the power magnetics cabinet cannot be opened by persons except special maintenance personnel or persons authorized to do maintenance work who have been sufficiently trained in prevention of electric shock.

If the operator of the machine needs to open the power magnetics cabinet for some operations, the operator must be given thorough safety training, or a protection cover must be provided to prevent the operator from touching the amplifier.

- (2) Confirmation of discharge of the electrolytic capacitor (UL508C 21)  
This amplifier includes a large-capacity electrolytic capacitor for the power smoothing circuit. Even after the power supply input circuit is shut off, this capacitor remains charged for a while. When it becomes necessary to touch the amplifier to do maintenance work or for other purposes, wait until the discharge time indicated on the face plate of the amplifier is passed, or start work after ensuring safety by measuring the residual voltage of the DC link section with a volt-ohm meter and checking that the LED (red) indicating charging is turned off.

### 5.5.2.3 Protective grounding

---

Connect all of the protective ground terminals to the protective ground (PE) terminal in the power magnetics cabinet.

For how to connect a protective ground cable and its cable diameter, refer to Section 5.2, "GROUND" and Subsection, "Details of cable K70".

Note that connecting a cable terminal to a protective ground point is not permitted.

### 5.5.2.4 Overload protection

---

The  $\alpha i$  SP and  $\alpha i$  SV are equipped with an overload protection feature.

In the  $\alpha i$  SP, the protection feature works when the maximum output continues for 30 s or longer.

In the  $\alpha i$  SV, the protection feature works when the current level becomes 1.3 times as high as the rated current of the motor.

### 5.5.2.5 External overload protection device

---

The servo amplifier is not equipped with a special protection device. To protect conductors, pay attention to the specifications of the power supply unit.



### 5.5.2.6 Short-circuit protection

---

The 200-V input  $\alpha i$  series servo amplifiers are suitable for use with a power supply facility with 85,000 Arms or less/240 V (max).

The 400-V input  $\alpha i$  series servo amplifiers are suitable for use with a power supply facility with 85,000 Arms or less//480 V (max).

### 5.5.2.7 Over-speed protection

---

The  $\alpha i$  series servo amplifiers are not equipped with an over-speed protection device.

### 5.5.2.8 24-V power supply

---

Normally, the power for controlling the  $\alpha i$  SV and  $\alpha i$  SP is supplied from the  $\alpha i$  PS. When supplying the power from another external power supply, use a class 2 power supply. The class 2 power supply uses a transformer and other parts that are proven safety. For details, contact the power supply manufacturer.

### 5.5.2.9 Screw tightening torque

---

The screws of the servo amplifier are tightened with the following torque:

| Screw size | Tightening torque (Nm) |
|------------|------------------------|
| M4         | 1.1 to 1.5             |
| M5         | 2.0 to 2.5             |
| M6         | 3.5 to 4.5             |
| M10        | 15 to 16               |

## 5.6 NOTES ON COOLANT (REFERENCE)

---

Coolant including highly active sulfur, oil-free coolant called synthetic coolant, and water-soluble strong alkali coolant particularly affect the CNC, motor, and amplifier. Even when they are protected from being exposed to direct splashes of such coolant, problems described below may occur. So, special care should be taken.

- **Coolant including highly active sulfur**  
Some of coolants including sulfur include extremely highly active sulfur. If such a coolant penetrates into the CNC, motor, or amplifier, it can corrode copper, silver and other metallic materials of components, therefore resulting in component failures.
- **Infiltrative synthetic coolant**  
Some of synthetic type coolants using polyalkylene glycol (PAG) as a lubricant component have extremely high infiltration. Such coolants easily penetrate into a motor even if it is well closed. When this kind of coolant penetrates into the CNC, motor, or amplifier, it can lead to insulation degrading and component failures.
- **Water-soluble strong alkali coolant**  
Some of coolants using alkanolamine to increase the pH level are so strongly alkaline that an alkalinity of pH10 or more is measured when diluted by the standard ratio. If such a coolant penetrates into the CNC, motor, or amplifier, it can cause a chemical reaction with plastic or other materials, therefore degrading the materials.

# 6

## HEAT DISSIPATION

---

Chapter 6, "HEAT DISSIPATION", consists of the following sections:

|       |                           |     |
|-------|---------------------------|-----|
| 6.1   | 200-V INPUT SERIES .....  | 128 |
| 6.1.1 | $\alpha i$ PS series..... | 128 |
| 6.1.2 | $\alpha i$ SV series..... | 129 |
| 6.1.3 | $\alpha i$ SP series..... | 133 |
| 6.2   | 400-V INPUT SERIES .....  | 134 |
| 6.2.1 | $\alpha i$ PS series..... | 134 |
| 6.2.2 | $\alpha i$ SV series..... | 135 |
| 6.2.3 | $\alpha i$ SP series..... | 139 |

## 6.1 200-V INPUT SERIES

The amount of heat dissipation by each module of the servo amplifier  $\alpha i$  series is described below.

### 6.1.1 $\alpha i$ PS series

Table 6.1.1(a)  $\alpha i$  PS

| Name              | Rated output | Total amount of heat dissipation | Residual amount of heat in the cabinet |
|-------------------|--------------|----------------------------------|----------------------------------------|
| $\alpha i$ PS 5.5 | 5.5kW        | 100W                             | 53W                                    |
| $\alpha i$ PS 11  | 11kW         | 158W                             | 53W                                    |
| $\alpha i$ PS 15  | 15kW         | 333W                             | 61W                                    |
| $\alpha i$ PS 26  | 26kW         | 597W                             | 75W                                    |
| $\alpha i$ PS 30  | 30kW         | 681W                             | 79W                                    |
| $\alpha i$ PS 37  | 37kW         | 706W                             | 81W                                    |
| $\alpha i$ PS 55  | 45kW         | 921W                             | 91W                                    |
|                   | 55kW         | 1115W                            | 101W                                   |

Table 6.1.1(b) AC reactor for  $\alpha i$  PS

| Name                  | Ordering number | Rated output | Total amount of heat dissipation |
|-----------------------|-----------------|--------------|----------------------------------|
| For $\alpha i$ PS 5.5 | A81L-0001-0155  | 5.5kW        | 16W                              |
| For $\alpha i$ PS 11  |                 | 11kW         | 38W                              |
| For $\alpha i$ PS 15  | A81L-0001-0156  | 15kW         | 50W                              |
| For $\alpha i$ PS 26  | A81L-0001-0157  | 26kW         | 70W                              |
| For $\alpha i$ PS 30  | A81L-0001-0158  | 30kW         | 65W                              |
| For $\alpha i$ PS 37  | A81L-0001-0159  | 37kW         | 55W                              |
| For $\alpha i$ PS 55  | A81L-0001-0160  | 55kW         | 79W                              |
| For $\alpha i$ PS 5.5 | A81L-0001-0170  | 2.2kW        | 35W                              |

Table 6.1.1(c)  $\alpha i$  PS<sub>R</sub>

| Name                           | Ordering number | Rated output | Total amount of heat dissipation | Residual amount of heat in the cabinet |
|--------------------------------|-----------------|--------------|----------------------------------|----------------------------------------|
| $\alpha i$ PS <sub>R</sub> 3   | A06B-6115-H003  | 3kW          | 60W                              | 60W                                    |
| $\alpha i$ PS <sub>R</sub> 5.5 | A06B-6115-H006  | 5.5kW        | 105W                             | 55W                                    |
|                                |                 | 7.5kW        | 130W                             | 60W                                    |

Table 6.1.1(d) AC line filter for  $\alpha i$  PS<sub>R</sub>

| Name                           | Ordering number   | Rated output | Total amount of heat dissipation |
|--------------------------------|-------------------|--------------|----------------------------------|
| $\alpha i$ PS <sub>R</sub> 3   | A81L-0001-0083#3C | 2.0kW        | 10W                              |
|                                | A81L-0001-0171    | 3.0kW        | 15W                              |
| $\alpha i$ PS <sub>R</sub> 5.5 | A81L-0001-0101#C  | 5.5kW        | 40W                              |
|                                |                   | 7.5kW        | 50W                              |

## 6.1.2 $\alpha i$ SV series

The amount of heat dissipation by the  $\alpha i$  SV depends on the  $\alpha i$  SV model and the current that flows through the servo motor. For the current that flows through a servo motor, reference the continuous rated current of each servo motor. (For the continuous rated current of each servo motor, refer to the servo motor descriptions. For servo motors, the continuous rated current is referred to as the stall current.) As the current that flows through a servo motor, the root-mean-square value of the current that flows through an actual servo motor on a machine can be used.

### (1) Total amount of heat dissipation

The total amount of heat dissipation by the  $\alpha i$  SV is calculated according to the following expression:

Total amount of heat dissipation

$$= a + Ka1 \times b1 + Ka2 \times b2 + Ka3 \times b3$$

a : Amount of heat dissipation determined by the  $\alpha i$  SV model [W]

Ka1 : Coefficient determined by the  $\alpha i$  SV [W/Arms]

b1 : Current flowing through the servo motor [Arms]

Ka2 : Coefficient determined by the  $\alpha i$  SV [W/Arms]

b2 : Current flowing through the servo motor [Arms]

Ka3 : Coefficient determined by the  $\alpha i$  SV [W/Arms]

b3 : Current flowing through the servo motor [Arms]

$\alpha i$  SV 1-axis (Total amount of heat dissipation)

| Name               | Specification | a<br>[W] | Axis | K [W/Arms] |      |      |
|--------------------|---------------|----------|------|------------|------|------|
|                    |               |          |      | HRV2       | HRV3 | HRV4 |
| $\alpha i$ SV 4    | H101          | 13       | L    | 5.0        | 6.5  | -    |
| $\alpha i$ SV 20   | H103          | 13       | L    | 5.0        | 6.5  | -    |
| $\alpha i$ SV 40   | H104          | 13       | L    | 4.6        | 5.9  | -    |
| $\alpha i$ SV 80   | H105          | 13       | L    | 4.3        | 5.8  | -    |
| $\alpha i$ SV 160  | H106          | 17       | L    | 4.7        | 6.1  | -    |
| $\alpha i$ SV 360  | H109          | 25       | L    | 4.9        | 5.8  | 7.9  |
| $\alpha i$ SV 20L  | H153          | 14       | L    | 5.0        | 6.5  | 9.4  |
| $\alpha i$ SV 40L  | H154          | 14       | L    | 4.6        | 5.9  | 8.4  |
| $\alpha i$ SV 80L  | H155          | 18       | L    | 4.3        | 5.8  | 8.5  |
| $\alpha i$ SV 160L | H156          | 16       | L    | 4.7        | 6.1  | 8.8  |

**$\alpha i$  SV 2-axis (Total amount of heat dissipation)**

| Name                  | Specification | a<br>[W] | Axis | K [W/Arms] |      |      |
|-----------------------|---------------|----------|------|------------|------|------|
|                       |               |          |      | HRV2       | HRV3 | HRV4 |
| $\alpha i$ SV 4/4     | H201          | 17       | L    | 5.0        | 6.5  | -    |
|                       |               |          | M    | 5.0        | 6.5  | -    |
| $\alpha i$ SV 4/20    | H203          | 17       | L    | 5.0        | 6.5  | -    |
|                       |               |          | M    | 5.0        | 6.5  | -    |
| $\alpha i$ SV 20/20   | H205          | 17       | L    | 5.0        | 6.5  | -    |
|                       |               |          | M    | 5.0        | 6.5  | -    |
| $\alpha i$ SV 20/40   | H206          | 17       | L    | 5.0        | 6.5  | -    |
|                       |               |          | M    | 4.6        | 5.9  | -    |
| $\alpha i$ SV 40/40   | H207          | 19       | L    | 4.6        | 5.9  | -    |
|                       |               |          | M    | 4.6        | 5.9  | -    |
| $\alpha i$ SV 40/80   | H208          | 19       | L    | 4.6        | 5.9  | -    |
|                       |               |          | M    | 4.3        | 5.8  | -    |
| $\alpha i$ SV 80/80   | H209          | 19       | L    | 4.3        | 5.8  | -    |
|                       |               |          | M    | 4.3        | 5.8  | -    |
| $\alpha i$ SV 80/160  | H210          | 19       | L    | 4.3        | 5.8  | -    |
|                       |               |          | M    | 4.7        | 6.1  | -    |
| $\alpha i$ SV 160/160 | H211          | 19       | L    | 4.7        | 6.1  | -    |
|                       |               |          | M    | 4.7        | 6.1  | -    |
| $\alpha i$ SV 20/20L  | H255          | 21       | L    | 5.0        | 6.5  | 9.4  |
|                       |               |          | M    | 5.0        | 6.5  | 9.4  |
| $\alpha i$ SV 20/40L  | H256          | 21       | L    | 5.0        | 6.5  | 9.4  |
|                       |               |          | M    | 4.6        | 5.9  | 8.4  |
| $\alpha i$ SV 40/40L  | H257          | 23       | L    | 4.6        | 5.9  | 8.4  |
|                       |               |          | M    | 4.6        | 5.9  | 8.4  |
| $\alpha i$ SV 40/80L  | H258          | 21       | L    | 4.6        | 5.9  | 8.4  |
|                       |               |          | M    | 4.3        | 5.8  | 8.5  |
| $\alpha i$ SV 80/80L  | H259          | 21       | L    | 4.3        | 5.8  | 8.5  |
|                       |               |          | M    | 4.3        | 5.8  | 8.5  |

 **$\alpha i$  SV 3-axis (Total amount of heat dissipation)**

| Name                   | Specification | a<br>[W] | Axis | K [W/Arms] |      |
|------------------------|---------------|----------|------|------------|------|
|                        |               |          |      | HRV2       | HRV3 |
| $\alpha i$ SV 4/4/4    | H301          | 24       | L    | 5.0        | 6.5  |
|                        |               |          | M    | 5.0        | 6.5  |
|                        |               |          | N    | 5.0        | 6.5  |
| $\alpha i$ SV 20/20/20 | H303          | 24       | L    | 5.0        | 6.5  |
|                        |               |          | M    | 5.0        | 6.5  |
|                        |               |          | N    | 5.0        | 6.5  |
| $\alpha i$ SV 20/20/40 | H304          | 24       | L    | 5.0        | 6.5  |
|                        |               |          | M    | 5.0        | 6.5  |
|                        |               |          | N    | 4.6        | 5.9  |

## (2) Residual amount of heat in the cabinet

By placing the heat sink section of the  $\alpha i$  SV outside the cabinet, the residual amount of heat in the cabinet can be calculated according to the expression below.

Residual amount of heat in the cabinet

$$= a + Kb1 \times b1 + Kb2 \times b2 + Kb3 \times b3$$

a : Amount of heat dissipation determined by the  $\alpha i$  SV model [W]

Kb1 : Coefficient determined by the  $\alpha i$  SV [W/Arms]

b1 : Current flowing through the servo motor [Arms]

Kb2 : Coefficient determined by the  $\alpha i$  SV [W/Arms]

b2 : Current flowing through the servo motor [Arms]

Kb3 : Coefficient determined by the  $\alpha i$  SV [W/Arms]

b3 : Current flowing through the servo motor [Arms]

 $\alpha i$  SV 1-axis

| Name               | Specification | a<br>[W] | Axis | K [W/Arms] |      |      |
|--------------------|---------------|----------|------|------------|------|------|
|                    |               |          |      | HRV2       | HRV3 | HRV4 |
| $\alpha i$ SV 4    | H101          | 13       | L    | 5.0        | 6.5  | -    |
| $\alpha i$ SV 20   | H103          | 13       | L    | 5.0        | 6.5  | -    |
| $\alpha i$ SV 40   | H104          | 13       | L    | 0.92       | 1.18 | -    |
| $\alpha i$ SV 80   | H105          | 13       | L    | 0.86       | 1.16 | -    |
| $\alpha i$ SV 160  | H106          | 17       | L    | 0.47       | 0.61 | -    |
| $\alpha i$ SV 360  | H109          | 25       | L    | 0.25       | 0.33 | 0.4  |
| $\alpha i$ SV 20L  | H153          | 14       | L    | 5.0        | 6.5  | 9.4  |
| $\alpha i$ SV 40L  | H154          | 14       | L    | 0.92       | 1.18 | 1.68 |
| $\alpha i$ SV 80L  | H155          | 18       | L    | 0.43       | 0.58 | 0.85 |
| $\alpha i$ SV 160L | H156          | 16       | L    | 0.47       | 0.61 | 0.88 |

**$\alpha i$  SV 2-axis**

| Name                  | Specification | a<br>[W] | Axis | K [W/Arms] |      |      |
|-----------------------|---------------|----------|------|------------|------|------|
|                       |               |          |      | HRV2       | HRV3 | HRV4 |
| $\alpha i$ SV 4/4     | H201          | 17       | L    | 5.0        | 6.5  | -    |
|                       |               |          | M    | 5.0        | 6.5  | -    |
| $\alpha i$ SV 4/20    | H203          | 17       | L    | 5.0        | 6.5  | -    |
|                       |               |          | M    | 5.0        | 6.5  | -    |
| $\alpha i$ SV 20/20   | H205          | 17       | L    | 5.0        | 6.5  | -    |
|                       |               |          | M    | 5.0        | 6.5  | -    |
| $\alpha i$ SV 20/40   | H206          | 17       | L    | 1.0        | 1.3  | -    |
|                       |               |          | M    | 0.92       | 1.18 | -    |
| $\alpha i$ SV 40/40   | H207          | 19       | L    | 0.46       | 0.59 | -    |
|                       |               |          | M    | 0.46       | 0.59 | -    |
| $\alpha i$ SV 40/80   | H208          | 19       | L    | 0.46       | 0.59 | -    |
|                       |               |          | M    | 0.43       | 0.58 | -    |
| $\alpha i$ SV 80/80   | H209          | 19       | L    | 0.43       | 0.58 | -    |
|                       |               |          | M    | 0.43       | 0.58 | -    |
| $\alpha i$ SV 80/160  | H210          | 19       | L    | 0.43       | 0.58 | -    |
|                       |               |          | M    | 0.47       | 0.61 | -    |
| $\alpha i$ SV 160/160 | H211          | 19       | L    | 0.47       | 0.61 | -    |
|                       |               |          | M    | 0.47       | 0.61 | -    |
| $\alpha i$ SV 20/20L  | H255          | 21       | L    | 1.0        | 1.3  | 1.88 |
|                       |               |          | M    | 1.0        | 1.3  | 1.88 |
| $\alpha i$ SV 20/40L  | H256          | 21       | L    | 0.5        | 0.65 | 0.94 |
|                       |               |          | M    | 0.46       | 0.59 | 0.84 |
| $\alpha i$ SV 40/40L  | H257          | 23       | L    | 0.46       | 0.59 | 0.84 |
|                       |               |          | M    | 0.46       | 0.59 | 0.84 |
| $\alpha i$ SV 40/80L  | H258          | 21       | L    | 0.46       | 0.59 | 0.84 |
|                       |               |          | M    | 0.43       | 0.58 | 0.85 |
| $\alpha i$ SV 80/80L  | H259          | 21       | L    | 0.43       | 0.58 | 0.85 |
|                       |               |          | M    | 0.43       | 0.58 | 0.85 |

 **$\alpha i$  SV 3-axis**

| Name                   | Specification | a<br>[W] | Axis | K [W/Arms] |      |
|------------------------|---------------|----------|------|------------|------|
|                        |               |          |      | HRV2       | HRV3 |
| $\alpha i$ SV 4/4/4    | H301          | 24       | L    | 5.0        | 6.5  |
|                        |               |          | M    | 5.0        | 6.5  |
|                        |               |          | N    | 5.0        | 6.5  |
| $\alpha i$ SV 20/20/20 | H303          | 24       | L    | 5.0        | 6.5  |
|                        |               |          | M    | 5.0        | 6.5  |
|                        |               |          | N    | 5.0        | 6.5  |
| $\alpha i$ SV 20/20/40 | H304          | 24       | L    | 5.0        | 6.5  |
|                        |               |          | M    | 5.0        | 6.5  |
|                        |               |          | N    | 0.92       | 1.18 |



### 6.1.3 $\alpha i$ SP series

Table 6.1.3(a)  $\alpha i$  SP

| Name              | Rated output<br>(Note 1) | Total amount of<br>heat dissipation | Residual amount<br>of heat in the<br>cabinet |
|-------------------|--------------------------|-------------------------------------|----------------------------------------------|
| $\alpha i$ SP2.2  | 1.5kW                    | 75W                                 | 37W                                          |
| $\alpha i$ SP 5.5 | 2.2kW                    | 112W                                | 36W                                          |
|                   | 3.7kW                    | 120W                                | 36W                                          |
| $\alpha i$ SP 11  | 5.5kW                    | 171W                                | 41W                                          |
|                   | 7.5kW                    | 218W                                | 44W                                          |
| $\alpha i$ SP 15  | 11kW                     | 273W                                | 45W                                          |
| $\alpha i$ SP 22  | 15kW                     | 435W                                | 53W                                          |
|                   | 18.5kW                   | 515W                                | 57W                                          |
| $\alpha i$ SP 26  | 22kW                     | 684W                                | 62W                                          |
| $\alpha i$ SP 30  | 26kW                     | 739W                                | 65W                                          |
| $\alpha i$ SP 37  | 26kW                     | 739W                                | 65W                                          |
| $\alpha i$ SP 45  | 30kW                     | 911W                                | 75W                                          |
|                   | 37kW                     | 1123W                               | 85W                                          |
| $\alpha i$ SP 55  | 45kW                     | 1360W                               | 98W                                          |

#### NOTE

- 1 "Rated output" indicates the continuous rated output of the motor.
- 2 The indicated amounts of heat dissipation assume the use of  $\alpha i$  I series spindle motor.

## 6.2 400-V INPUT SERIES

The amount of heat dissipation by each amplifier of the 400-V input  $\alpha i$  series servo amplifier is described below.

### 6.2.1 $\alpha i$ PS series

Table 6.2.1(a)  $\alpha i$  PS

| Name                | Rated output | Total amount of heat dissipation | Residual amount of heat in the cabinet |
|---------------------|--------------|----------------------------------|----------------------------------------|
| $\alpha i$ PS 11HV  | 11kW         | 136W                             | 51W                                    |
| $\alpha i$ PS 18HV  | 18kW         | 274W                             | 57W                                    |
| $\alpha i$ PS 30HV  | 30kW         | 380W                             | 64W                                    |
| $\alpha i$ PS 45HV  | 30kW         | 394W                             | 64W                                    |
|                     | 37kW         | 475W                             | 68W                                    |
|                     | 45kW         | 567W                             | 75W                                    |
| $\alpha i$ PS 75HV  | 60kW         | 600W                             | 75W                                    |
|                     | 75kW         | 738W                             | 82W                                    |
| $\alpha i$ PS 100HV | 100kW        | 1380W                            | 110W                                   |

Table 6.2.1(b) AC reactor for  $\alpha i$  PS

| Name                    | Ordering number | Rated output | Total amount of heat dissipation |
|-------------------------|-----------------|--------------|----------------------------------|
| For $\alpha i$ PS 11HV  | A81L-0001-0163  | 11kW         | 38W                              |
| For $\alpha i$ PS 18HV  |                 | 18kW         | 70W                              |
| For $\alpha i$ PS 30HV  | A81L-0001-0164  | 30kW         | 60W                              |
| For $\alpha i$ PS 45HV  |                 | 45kW         | 100W                             |
| For $\alpha i$ PS 75HV  | A81L-0001-0165  | 75kW         | 120W                             |
| For $\alpha i$ PS 100HV |                 | 100kW        | 180W                             |
| For $\alpha i$ PS 11HV  | A81L-0001-0167  | 11kW         | 55W                              |

## 6.2.2 $\alpha i$ SV series

The amount of heat dissipation by the  $\alpha i$  SV depends on the  $\alpha i$  SV model and the current that flows through the servo motor. For the current that flows through a servo motor, reference the continuous rated current of each servo motor. (For the continuous rated current of each servo motor, refer to the servo motor descriptions.) As the current that flows through a servo motor, the root-mean-square value of the current that flows through an actual servo motor on a machine can be used.

### (1) Total amount of heat dissipation

The total amount of heat dissipation by the  $\alpha i$  SV is calculated according to the following expression:

$$\text{Total amount of heat dissipation} = a + K_{a1} \times b1 + K_{a2} \times b2$$

a : Amount of heat dissipation determined by the  $\alpha i$  SV model [W]

K<sub>a1</sub> : Coefficient determined by the  $\alpha i$  SV [W/Arms]

b1 : Current flowing through the servo motor [Arms]

K<sub>a2</sub> : Coefficient determined by the  $\alpha i$  SV [W/Arms]

b2 : Current flowing through the servo motor [Arms]

**$\alpha i$  SV 1-axis (Total amount of heat dissipation)**

| Name                | Specification | a<br>[W] | Axis | K [W/Arms] |      |      |
|---------------------|---------------|----------|------|------------|------|------|
|                     |               |          |      | HRV2       | HRV3 | HRV4 |
| $\alpha i$ SV 10HV  | H102          | 13       | L    | 8.2        | 14.8 | -    |
| $\alpha i$ SV 20HV  | H103          | 13       | L    | 8.8        | 14.5 | -    |
| $\alpha i$ SV 40HV  | H104          | 13       | L    | 8.8        | 15.3 | -    |
| $\alpha i$ SV 80HV  | H105          | 17       | L    | 9.0        | 12.3 | -    |
| $\alpha i$ SV 180HV | H106          | 25       | L    | 8.8        | 12.3 | 23.4 |
| $\alpha i$ SV 360HV | H109          | 34       | L    | 7.8        | 11.0 | 18.2 |
| $\alpha i$ SV 10HVL | H152          | 14       | L    | 8.2        | 14.8 | 26.4 |
| $\alpha i$ SV 20HVL | H153          | 14       | L    | 8.8        | 14.5 | 25.2 |
| $\alpha i$ SV 40HVL | H154          | 18       | L    | 8.8        | 15.3 | 27.2 |
| $\alpha i$ SV 80HV  | H155          | 16       | L    | 9.0        | 12.3 | 23.7 |

$\alpha i$  SV 2-axis (Total amount of heat dissipation)

| Name                   | Specification | a<br>[W] | Axis | K [W/Arms] |      |      |
|------------------------|---------------|----------|------|------------|------|------|
|                        |               |          |      | HRV2       | HRV3 | HRV4 |
| $\alpha i$ SV 10/10HV  | H202          | 17       | L    | 8.2        | 14.8 | -    |
|                        |               |          | M    | 8.2        | 14.8 | -    |
| $\alpha i$ SV 20/20HV  | H205          | 17       | L    | 8.8        | 14.5 | -    |
|                        |               |          | M    | 8.8        | 14.5 | -    |
| $\alpha i$ SV 20/40HV  | H206          | 19       | L    | 8.8        | 14.5 | -    |
|                        |               |          | M    | 8.8        | 15.3 | -    |
| $\alpha i$ SV 40/40HV  | H207          | 19       | L    | 8.8        | 15.3 | -    |
|                        |               |          | M    | 8.8        | 15.3 | -    |
| $\alpha i$ SV 40/80HV  | H208          | 19       | L    | 8.8        | 15.3 | -    |
|                        |               |          | M    | 9.0        | 12.3 | -    |
| $\alpha i$ SV 80/80HV  | H209          | 19       | L    | 9.0        | 12.3 | -    |
|                        |               |          | M    | 9.0        | 12.3 | -    |
| $\alpha i$ SV 10/10HVL | H252          | 19       | L    | 8.2        | 14.8 | 26.4 |
|                        |               |          | M    | 8.2        | 14.8 | 26.4 |
| $\alpha i$ SV 20/20HVL | H255          | 21       | L    | 8.8        | 14.5 | 25.2 |
|                        |               |          | M    | 8.8        | 14.5 | 25.2 |
| $\alpha i$ SV 20/40HVL | H256          | 21       | L    | 8.8        | 14.5 | 25.2 |
|                        |               |          | M    | 8.8        | 15.3 | 27.2 |
| $\alpha i$ SV 40/40HVL | H257          | 21       | L    | 8.8        | 15.3 | 27.2 |
|                        |               |          | M    | 8.8        | 15.3 | 27.2 |

## (2) Residual amount of heat in the cabinet

By placing the heat sink section of the  $\alpha i$  SV outside the cabinet, the residual amount of heat in the cabinet can be calculated according to the expression below.

Residual amount of heat in the cabinet

$$= a + Kb1 \times b1 + Kb2 \times b2$$

a : Amount of heat dissipation determined by the  $\alpha i$  SV model [W]

Kb1 : Coefficient determined by the  $\alpha i$  SV [W/Arms]

b1 : Current flowing through the servo motor [Arms]

Kb2 : Coefficient determined by the  $\alpha i$  SV [W/Arms]

b2 : Current flowing through the servo motor [Arms]

**$\alpha i$  SV 1-axis (Residual amount of heat in the cabinet)**

| Name                | Specification | a<br>[W] | Axis | K [W/Arms] |      |      |
|---------------------|---------------|----------|------|------------|------|------|
|                     |               |          |      | HRV2       | HRV3 | HRV4 |
| $\alpha i$ SV 10HV  | H102          | 13       | L    | 8.2        | 14.8 | -    |
| $\alpha i$ SV 20HV  | H103          | 13       | L    | 1.76       | 2.9  | -    |
| $\alpha i$ SV 40HV  | H104          | 13       | L    | 1.76       | 2.9  | -    |
| $\alpha i$ SV 80HV  | H105          | 17       | L    | 0.90       | 1.23 | -    |
| $\alpha i$ SV 180HV | H106          | 25       | L    | 0.44       | 0.62 | 1.17 |
| $\alpha i$ SV 360HV | H109          | 34       | L    | 7.8        | 11   | 18.2 |
| $\alpha i$ SV 10HVL | H152          | 14       | L    | 1.64       | 1.53 | 2.64 |
| $\alpha i$ SV 20HVL | H153          | 14       | L    | 0.88       | 1.53 | 2.52 |
| $\alpha i$ SV 40HVL | H154          | 18       | L    | 0.88       | 1.53 | 2.72 |
| $\alpha i$ SV 80HV  | H155          | 16       | L    | 0.90       | 1.23 | 2.37 |

$\alpha i$  SV 2-axis (Residual amount of heat in the cabinet)

| Name                   | Specification | a<br>[W] | Axis | K [W/Arms] |      |      |
|------------------------|---------------|----------|------|------------|------|------|
|                        |               |          |      | HRV2       | HRV3 | HRV4 |
| $\alpha i$ SV 10/10HV  | H202          | 17       | Ka1  | 8.2        | 14.8 | -    |
|                        |               |          | Ka2  | 8.2        | 14.8 | -    |
| $\alpha i$ SV 20/20HV  | H205          | 17       | Ka1  | 1.76       | 2.9  | -    |
|                        |               |          | Ka2  | 1.76       | 2.9  | -    |
| $\alpha i$ SV 20/40HV  | H206          | 19       | Ka1  | 0.88       | 1.45 | -    |
|                        |               |          | Ka2  | 0.88       | 1.53 | -    |
| $\alpha i$ SV 40/40HV  | H207          | 19       | Ka1  | 0.88       | 1.53 | -    |
|                        |               |          | Ka2  | 0.88       | 1.53 | -    |
| $\alpha i$ SV 40/80HV  | H208          | 19       | Ka1  | 0.88       | 1.53 | -    |
|                        |               |          | Ka2  | 0.90       | 1.23 | -    |
| $\alpha i$ SV 80/80HV  | H209          | 19       | Ka1  | 0.90       | 1.23 | -    |
|                        |               |          | Ka2  | 0.90       | 1.23 | -    |
| $\alpha i$ SV 10/10HVL | H252          | 19       | Ka1  | 0.82       | 1.48 | 2.64 |
|                        |               |          | Ka2  | 0.82       | 1.48 | 2.64 |
| $\alpha i$ SV 20/20HVL | H255          | 21       | Ka1  | 0.88       | 1.45 | 2.52 |
|                        |               |          | Ka2  | 0.88       | 1.45 | 2.52 |
| $\alpha i$ SV 20/40HVL | H256          | 21       | Ka1  | 0.88       | 1.45 | 2.52 |
|                        |               |          | Ka2  | 0.88       | 1.53 | 2.37 |
| $\alpha i$ SV 40/40HVL | H257          | 21       | Ka1  | 0.88       | 1.53 | 2.37 |
|                        |               |          | Ka2  | 0.88       | 1.53 | 2.37 |

### 6.2.3 $\alpha i$ SP series

Table 6.2.3  $\alpha i$  SP

| Name                | Rated output<br>(Note 1) | Total amount of<br>heat dissipation | Residual amount<br>of heat in the<br>cabinet |
|---------------------|--------------------------|-------------------------------------|----------------------------------------------|
| $\alpha i$ SP 5.5HV | 0.55kW                   | 26W                                 | 18W                                          |
|                     | 1.5kW                    | 44W                                 | 22W                                          |
|                     | 2.2kW                    | 59W                                 | 24W                                          |
|                     | 3.7kW                    | 87W                                 | 29W                                          |
| $\alpha i$ SP 11HV  | 5.5kW                    | 122W                                | 37W                                          |
|                     | 7.5kW                    | 156W                                | 39W                                          |
| $\alpha i$ SP 15HV  | 11kW                     | 189W                                | 40W                                          |
| $\alpha i$ SP 30HV  | 15kW                     | 247W                                | 41W                                          |
|                     | 22kW                     | 349W                                | 45W                                          |
| $\alpha i$ SP 45HV  | 30kW                     | 482W                                | 52W                                          |
|                     | 37kW                     | 588W                                | 57W                                          |
| $\alpha i$ SP 75HV  | 60kW                     | 1264W                               | 91W                                          |
| $\alpha i$ SP 100HV | 100kW                    | 2100W                               | 150W                                         |

#### NOTE

- 1 "Rated output" indicates the continuous rated output of the motor.
- 2 The indicated amounts of heat dissipation assume the use of  $\alpha i$  I series spindle motor.

# 7

## COOLING

---

The *ai* series has a built-in fan for external fin cooling, so that external forced air cooling is unnecessary.

To maintain cooling efficiency, be sure to provide maintenance areas as described in Section 8.1.



# 8

## EXTERNAL DIMENSIONS AND MAINTENANCE AREA

Chapter 8 "EXTERNAL DIMENSIONS AND MAINTENANCE AREA", consists of the following sections:

- 8.1 OUTLINE DRAWINGS .....142
  - 8.1.1 Outline Drawings of Amplifiers, Panel Cut-out, and Maintenance Area.....142
  - 8.1.2 AC Reactor Unit.....148
  - 8.1.3 AC Line Filter .....158
  - 8.1.4 Power Transformer.....159
  - 8.1.5 Regenerative Discharge Unit.....165
  - 8.1.6 Dynamic Brake Module (DBM).....168
  - 8.1.7 Circuit Breaker .....170
  - 8.1.8 Magnetic Contactors .....172
  - 8.1.9 Lightning Surge Protector .....179
  - 8.1.10 Noise Filter.....182
- 8.2 PANEL CUT-OUT DIAGRAMS .....185

## 8.1 OUTLINE DRAWINGS

### 8.1.1 Outline Drawings of Amplifiers, Panel Cut-out, and Maintenance Area

#### (1) $\alpha i$ PS series

| Model                        |                    |                                | Outline drawing   | Panel cut-out   | Maintenance area   | Internal fan*1 | Internal fan*2 | External fan |
|------------------------------|--------------------|--------------------------------|-------------------|-----------------|--------------------|----------------|----------------|--------------|
| Power regeneration type      | 200-V input series | $\alpha i$ PS 5.5              | Outline drawing 2 | Panel cut-out 2 | Maintenance area 1 | Provided       | -              | -            |
|                              |                    | $\alpha i$ PS 11               | Outline drawing 3 | Panel cut-out 3 | Maintenance area 2 | Provided       | -              | Provided     |
|                              |                    | $\alpha i$ PS 15               | Outline drawing 3 | Panel cut-out 3 | Maintenance area 2 | Provided       | -              | Provided     |
|                              |                    | $\alpha i$ PS 26               | Outline drawing 4 | Panel cut-out 4 | Maintenance area 3 | Provided       | -              | Provided     |
|                              |                    | $\alpha i$ PS 30               | Outline drawing 4 | Panel cut-out 4 | Maintenance area 3 | Provided       | -              | Provided     |
|                              |                    | $\alpha i$ PS 37               | Outline drawing 4 | Panel cut-out 4 | Maintenance area 3 | Provided       | -              | Provided     |
|                              |                    | $\alpha i$ PS 55               | Outline drawing 5 | Panel cut-out 5 | Maintenance area 4 | Provided       | Provided       | Provided     |
|                              | 400-V input series | $\alpha i$ PS 11HV             | Outline drawing 3 | Panel cut-out 3 | Maintenance area 2 | Provided       | -              | Provided     |
|                              |                    | $\alpha i$ PS 18HV             | Outline drawing 3 | Panel cut-out 3 | Maintenance area 2 | Provided       | -              | Provided     |
|                              |                    | $\alpha i$ PS 30HV             | Outline drawing 4 | Panel cut-out 4 | Maintenance area 3 | Provided       | Provided       | Provided     |
|                              |                    | $\alpha i$ PS 45HV             | Outline drawing 4 | Panel cut-out 4 | Maintenance area 3 | Provided       | Provided       | Provided     |
|                              |                    | $\alpha i$ PS 75HV             | Outline drawing 5 | Panel cut-out 5 | Maintenance area 4 | Provided       | Provided       | Provided     |
|                              |                    | $\alpha i$ PS 100HV            | Outline drawing 5 | Panel cut-out 5 | Maintenance area 4 | Provided       | Provided       | Provided     |
| Resistance regeneration type | 200-V input series | $\alpha i$ PS <sub>R</sub> 3   | Outline drawing 1 | Panel cut-out 1 | Maintenance area 1 | -              | Provided       | -            |
|                              |                    | $\alpha i$ PS <sub>R</sub> 5.5 | Outline drawing 2 | Panel cut-out 2 | Maintenance area 1 | -              | Provided       | -            |

\*1 Internal cooling fan

\*2 Radiator cooling fan


**(2)  $\alpha i$  SV series**

| Model              |        |                        | Outline drawing   | Panel cut-out   | Maintenance area   | Internal fan | External fan |
|--------------------|--------|------------------------|-------------------|-----------------|--------------------|--------------|--------------|
| 200-V input series | 1-axis | $\alpha i$ SV 4        | Outline drawing 1 | Panel cut-out 1 | Maintenance area 1 | Provided     | -            |
|                    |        | $\alpha i$ SV 20       | Outline drawing 1 | Panel cut-out 1 | Maintenance area 1 | Provided     | -            |
|                    |        | $\alpha i$ SV 80       | Outline drawing 2 | Panel cut-out 2 | Maintenance area 1 | Provided     | -            |
|                    |        | $\alpha i$ SV 160      | Outline drawing 2 | Panel cut-out 2 | Maintenance area 1 | Provided     | Provided     |
|                    |        | $\alpha i$ SV 360      | Outline drawing 4 | Panel cut-out 4 | Maintenance area 3 | Provided     | Provided     |
|                    |        | $\alpha i$ SV 20L      | Outline drawing 2 | Panel cut-out 2 | Maintenance area 1 | Provided     | -            |
|                    |        | $\alpha i$ SV 40L      | Outline drawing 2 | Panel cut-out 2 | Maintenance area 1 | Provided     | -            |
|                    |        | $\alpha i$ SV 80L      | Outline drawing 2 | Panel cut-out 2 | Maintenance area 1 | Provided     | Provided     |
|                    |        | $\alpha i$ SV 160L     | Outline drawing 3 | Panel cut-out 3 | Maintenance area 2 | Provided     | Provided     |
|                    | 2-axis | $\alpha i$ SV 4/4      | Outline drawing 1 | Panel cut-out 1 | Maintenance area 1 | Provided     | -            |
|                    |        | $\alpha i$ SV 4/20     | Outline drawing 1 | Panel cut-out 1 | Maintenance area 1 | Provided     | -            |
|                    |        | $\alpha i$ SV 20/20    | Outline drawing 1 | Panel cut-out 1 | Maintenance area 1 | Provided     | -            |
|                    |        | $\alpha i$ SV 20/40    | Outline drawing 2 | Panel cut-out 2 | Maintenance area 1 | Provided     | -            |
|                    |        | $\alpha i$ SV 40/40    | Outline drawing 2 | Panel cut-out 2 | Maintenance area 1 | Provided     | Provided     |
|                    |        | $\alpha i$ SV 40/80    | Outline drawing 2 | Panel cut-out 2 | Maintenance area 1 | Provided     | Provided     |
|                    |        | $\alpha i$ SV 80/80    | Outline drawing 2 | Panel cut-out 2 | Maintenance area 1 | Provided     | Provided     |
|                    |        | $\alpha i$ SV 80/160   | Outline drawing 3 | Panel cut-out 3 | Maintenance area 2 | Provided     | Provided     |
|                    |        | $\alpha i$ SV 160/160  | Outline drawing 3 | Panel cut-out 3 | Maintenance area 2 | Provided     | Provided     |
|                    |        | $\alpha i$ SV 20/20L   | Outline drawing 2 | Panel cut-out 2 | Maintenance area 1 | Provided     | -            |
|                    |        | $\alpha i$ SV 20/40L   | Outline drawing 2 | Panel cut-out 2 | Maintenance area 1 | Provided     | Provided     |
|                    |        | $\alpha i$ SV 40/40L   | Outline drawing 2 | Panel cut-out 2 | Maintenance area 1 | Provided     | Provided     |
|                    |        | $\alpha i$ SV 40/80L   | Outline drawing 3 | Panel cut-out 3 | Maintenance area 2 | Provided     | Provided     |
|                    |        | $\alpha i$ SV 80/80L   | Outline drawing 3 | Panel cut-out 3 | Maintenance area 2 | Provided     | Provided     |
|                    | 3-axis | $\alpha i$ SV 4/4/4    | Outline drawing 1 | Panel cut-out 1 | Maintenance area 1 | Provided     | -            |
|                    |        | $\alpha i$ SV 20/20/20 | Outline drawing 1 | Panel cut-out 1 | Maintenance area 1 | Provided     | -            |
|                    |        | $\alpha i$ SV 20/20/40 | Outline drawing 2 | Panel cut-out 2 | Maintenance area 1 | Provided     | -            |
| 400-V input series | 1-axis | $\alpha i$ SV 10HV     | Outline drawing 1 | Panel cut-out 1 | Maintenance area 1 | Provided     | -            |
|                    |        | $\alpha i$ SV 20HV     | Outline drawing 2 | Panel cut-out 2 | Maintenance area 1 | Provided     | -            |
|                    |        | $\alpha i$ SV 40HV     | Outline drawing 2 | Panel cut-out 2 | Maintenance area 1 | Provided     | -            |
|                    |        | $\alpha i$ SV 80HV     | Outline drawing 2 | Panel cut-out 2 | Maintenance area 1 | Provided     | Provided     |
|                    |        | $\alpha i$ SV 180HV    | Outline drawing 4 | Panel cut-out 4 | Maintenance area 3 | Provided     | Provided     |
|                    |        | $\alpha i$ SV 360HV    | Outline drawing 5 | Panel cut-out 5 | Maintenance area 4 | Provided     | Provided     |
|                    |        | $\alpha i$ SV 10HVL    | Outline drawing 2 | Panel cut-out 2 | Maintenance area 1 | Provided     | -            |
|                    |        | $\alpha i$ SV 20HVL    | Outline drawing 2 | Panel cut-out 2 | Maintenance area 1 | Provided     | Provided     |
|                    |        | $\alpha i$ SV 40HVL    | Outline drawing 2 | Panel cut-out 2 | Maintenance area 1 | Provided     | Provided     |
|                    |        | $\alpha i$ SV 80HVL    | Outline drawing 3 | Panel cut-out 3 | Maintenance area 2 | Provided     | Provided     |
|                    | 2-axis | $\alpha i$ SV 10/10HV  | Outline drawing 1 | Panel cut-out 1 | Maintenance area 1 | Provided     | -            |
|                    |        | $\alpha i$ SV 20/20HV  | Outline drawing 2 | Panel cut-out 2 | Maintenance area 1 | Provided     | -            |
|                    |        | $\alpha i$ SV 20/40HV  | Outline drawing 3 | Panel cut-out 3 | Maintenance area 2 | Provided     | Provided     |
|                    |        | $\alpha i$ SV 40/40HV  | Outline drawing 3 | Panel cut-out 3 | Maintenance area 2 | Provided     | Provided     |
|                    |        | $\alpha i$ SV 40/80HV  | Outline drawing 3 | Panel cut-out 3 | Maintenance area 2 | Provided     | Provided     |
|                    |        | $\alpha i$ SV 80/80HV  | Outline drawing 3 | Panel cut-out 3 | Maintenance area 2 | Provided     | Provided     |
|                    |        | $\alpha i$ SV 10/10HVL | Outline drawing 2 | Panel cut-out 2 | Maintenance area 1 | Provided     | -            |
|                    |        | $\alpha i$ SV 20/20HVL | Outline drawing 3 | Panel cut-out 3 | Maintenance area 2 | Provided     | Provided     |
|                    |        | $\alpha i$ SV 20/40HVL | Outline drawing 3 | Panel cut-out 3 | Maintenance area 2 | Provided     | Provided     |
|                    |        | $\alpha i$ SV 40/40HVL | Outline drawing 3 | Panel cut-out 3 | Maintenance area 2 | Provided     | Provided     |


**(3)  $\alpha i$  SP series**

| Model             |                    |                     | Outline drawing   | Panel cut-out   | Maintenance area   | Internal fan | External fan |
|-------------------|--------------------|---------------------|-------------------|-----------------|--------------------|--------------|--------------|
| $\alpha i$ series | 200-V input series | $\alpha i$ SP 2.2   | Outline drawing 2 | Panel cut-out 2 | Maintenance area 1 | Provided     | -            |
|                   |                    | $\alpha i$ SP 5.5   | Outline drawing 2 | Panel cut-out 2 | Maintenance area 1 | Provided     | Provided     |
|                   |                    | $\alpha i$ SP 11    | Outline drawing 3 | Panel cut-out 3 | Maintenance area 2 | Provided     | Provided     |
|                   |                    | $\alpha i$ SP 15    | Outline drawing 3 | Panel cut-out 3 | Maintenance area 2 | Provided     | Provided     |
|                   |                    | $\alpha i$ SP 22    | Outline drawing 4 | Panel cut-out 4 | Maintenance area 3 | Provided     | Provided     |
|                   |                    | $\alpha i$ SP 26    | Outline drawing 4 | Panel cut-out 4 | Maintenance area 3 | Provided     | Provided     |
|                   |                    | $\alpha i$ SP 30    | Outline drawing 4 | Panel cut-out 4 | Maintenance area 3 | Provided     | Provided     |
|                   |                    | $\alpha i$ SP 37    | Outline drawing 4 | Panel cut-out 4 | Maintenance area 3 | Provided     | Provided     |
|                   |                    | $\alpha i$ SP 45    | Outline drawing 5 | Panel cut-out 5 | Maintenance area 4 | Provided     | Provided     |
|                   |                    | $\alpha i$ SP 55    | Outline drawing 5 | Panel cut-out 5 | Maintenance area 4 | Provided     | Provided     |
|                   | 400-V input series | $\alpha i$ SP 5.5HV | Outline drawing 2 | Panel cut-out 2 | Maintenance area 1 | Provided     | Provided     |
|                   |                    | $\alpha i$ SP 11HV  | Outline drawing 3 | Panel cut-out 3 | Maintenance area 2 | Provided     | Provided     |
|                   |                    | $\alpha i$ SP 15HV  | Outline drawing 3 | Panel cut-out 3 | Maintenance area 2 | Provided     | Provided     |
|                   |                    | $\alpha i$ SP 30HV  | Outline drawing 4 | Panel cut-out 4 | Maintenance area 3 | Provided     | Provided     |
|                   |                    | $\alpha i$ SP 45HV  | Outline drawing 4 | Panel cut-out 4 | Maintenance area 3 | Provided     | Provided     |
|                   |                    | $\alpha i$ SP 75HV  | Outline drawing 5 | Panel cut-out 5 | Maintenance area 4 | Provided     | Provided     |
|                   |                    | $\alpha i$ SP 100HV | Outline drawing 5 | Panel cut-out 5 | Maintenance area 4 | Provided     | Provided     |

(4) Amplifier outline drawings

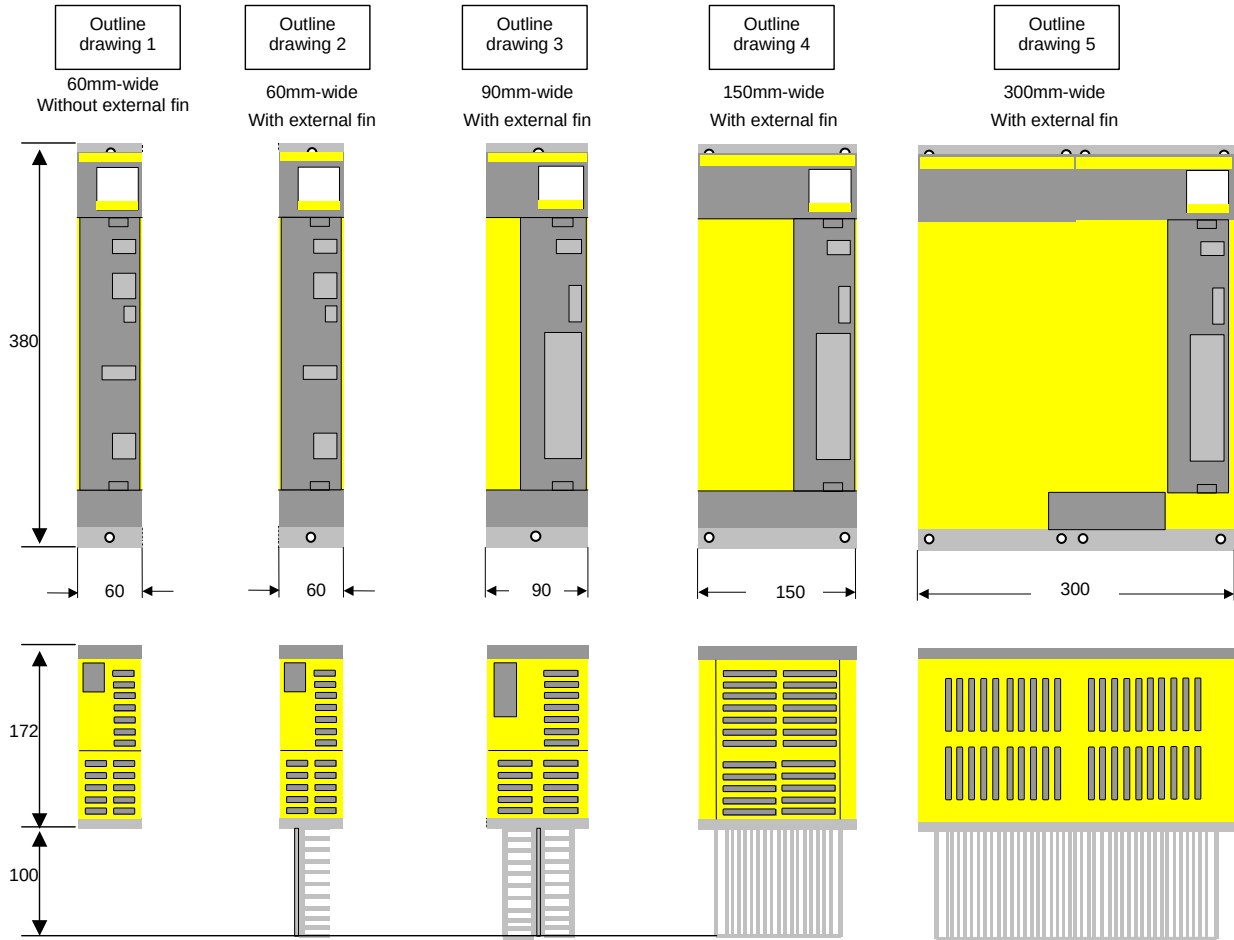


(5) Panel cut-out drawings

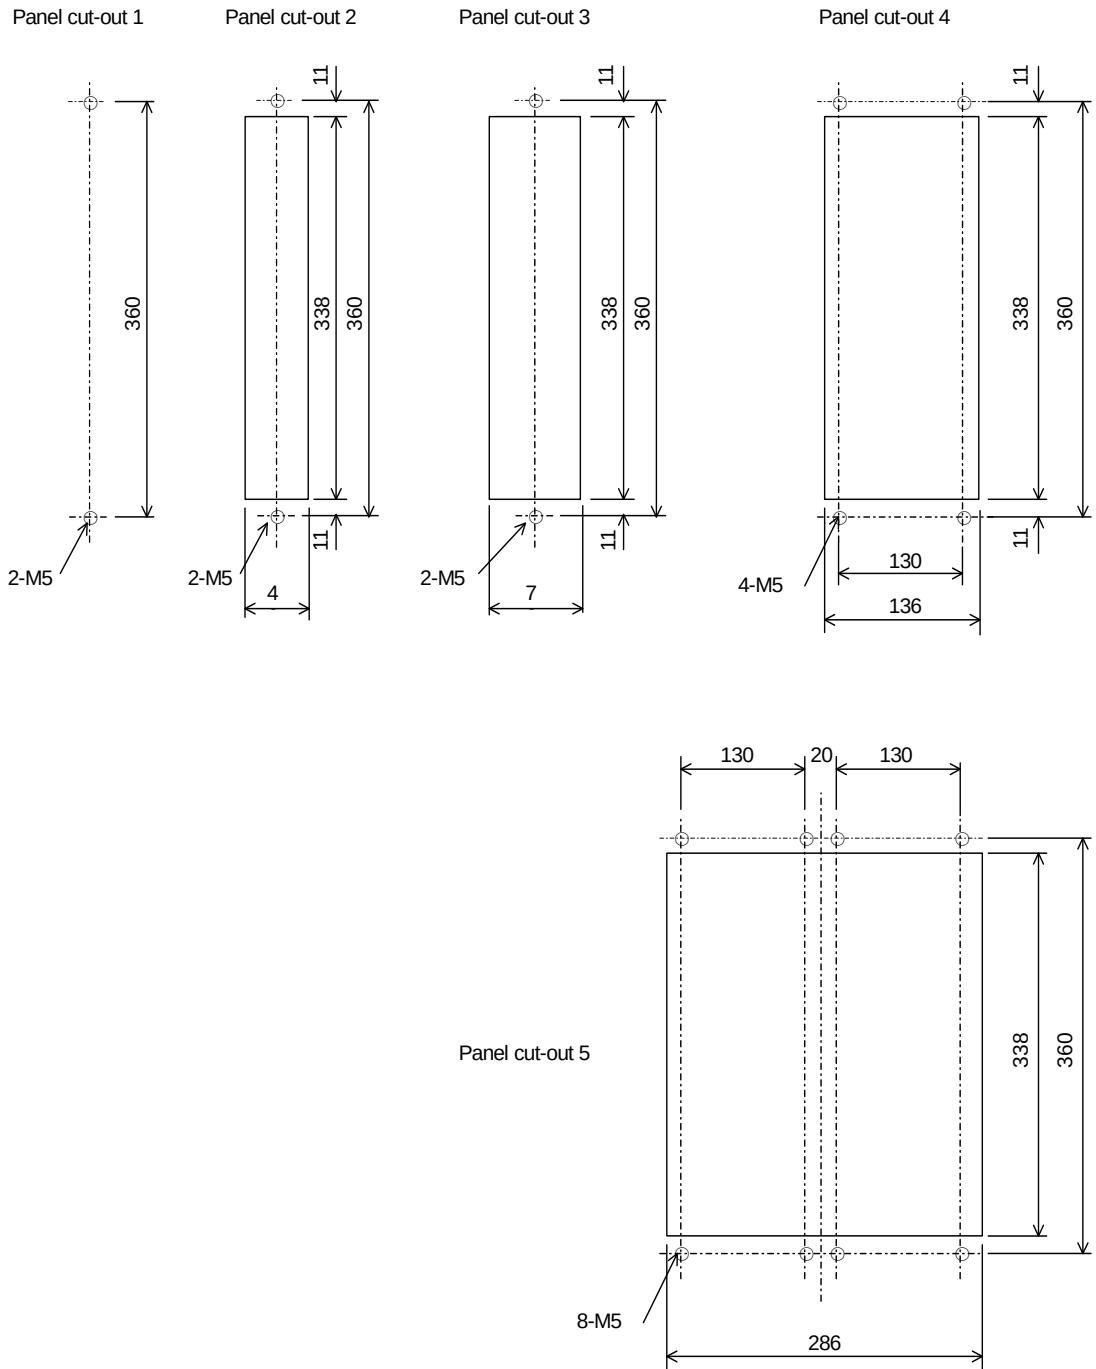

See Section 8.2 for details.

**(6) Maintenance area drawings**

An amplifier contains a fan motor for internal stirring. To allow air to flow and make replacement of a fan unit easy, be sure to reserve the shaded areas shown in the figure below.

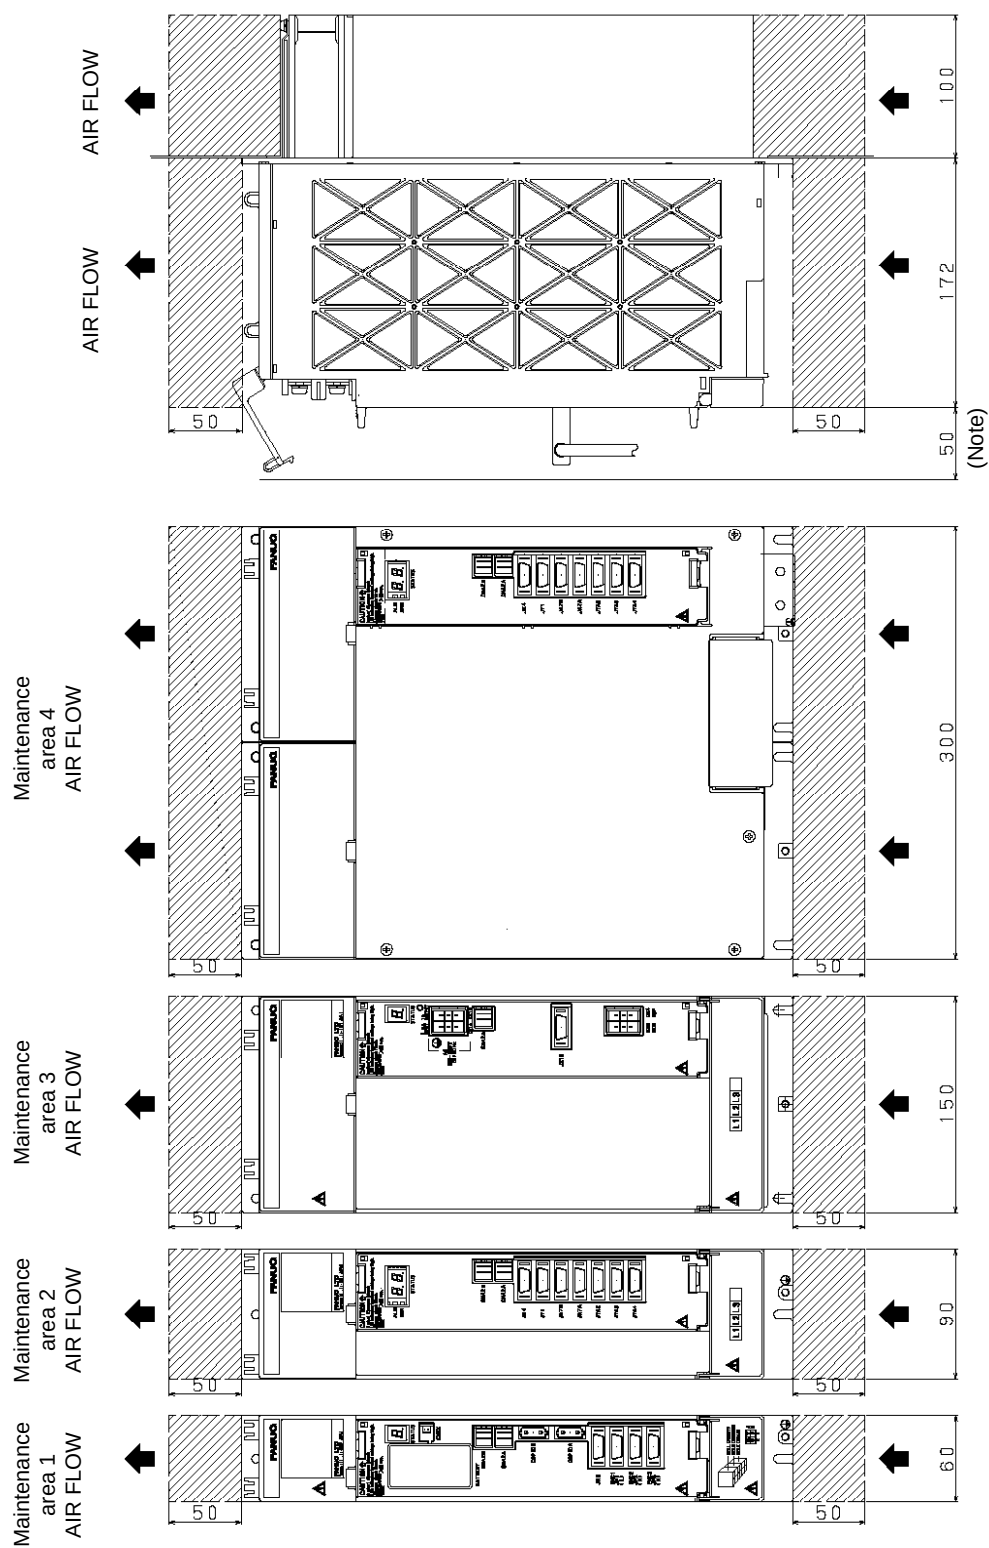

For the  $\omega$  series, the internal stirring fan can be pulled out from the top of the amplifier.

(Note)

(Note) Add 30 mm when using the conventional connector instead of side cable type connector.


## 8.1.2 AC Reactor Unit

### (a) A81L-0001-0155


There are two types of shapes under the same specification drawing number. Both types use the same mounting pitches and other dimensions for mounting.

Specifying shape (1) or (2) is not possible.

Shape (1)

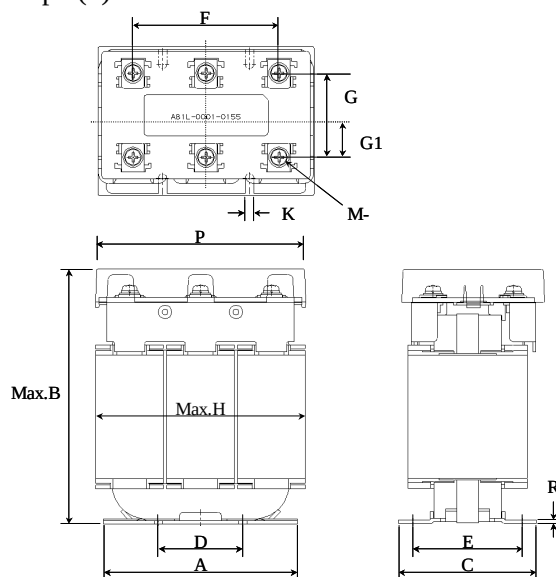

Shape (2)

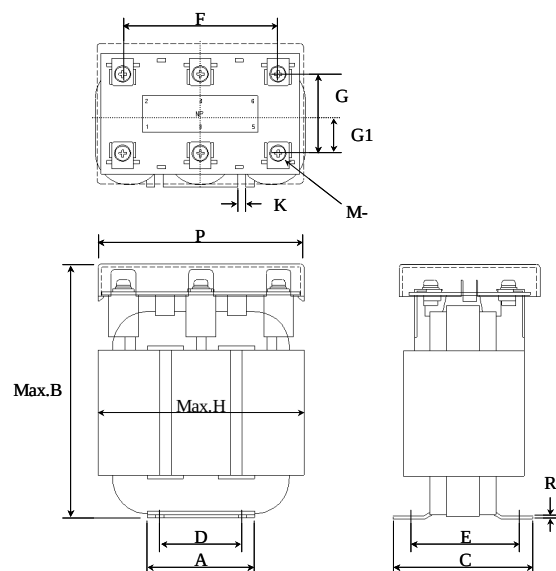


|           | A   | B   | C  | D  | E  | F  | G  | G1   | H   | K | P   | R | M  |
|-----------|-----|-----|----|----|----|----|----|------|-----|---|-----|---|----|
| Shape (1) | 115 | 155 | 82 | 50 | 65 | 84 | 48 | 20.5 | 135 | 5 | 135 | 2 | M5 |
| Shape (2) | 65  | 155 | 85 | 50 | 65 | 94 | 48 | 20.5 | 127 | 5 | 125 | 2 | M5 |




**(b) A81L-0001-0156**

There are two types of shapes under the same specification drawing number. Both types use the same mounting pitches and other dimensions for mounting.  
Specifying shape (1) or (2) is not possible.

Shape (1)

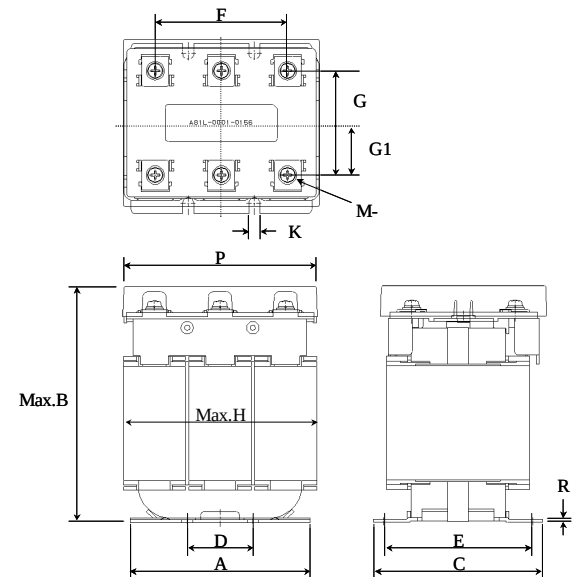

Shape (2)

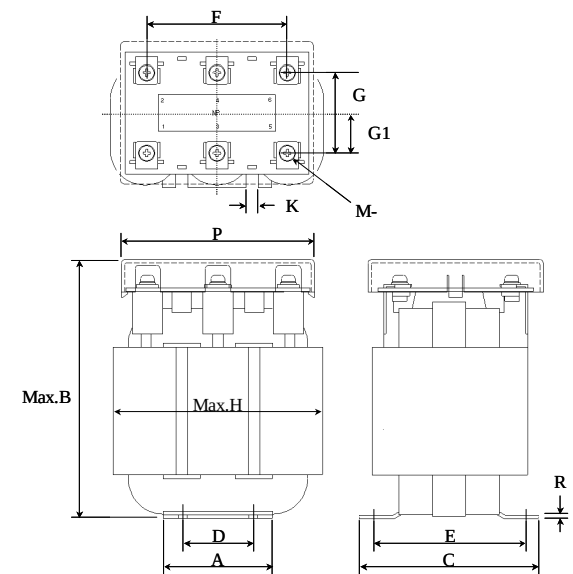


|        | A   | B   | C   | D  | E  | F  | G  | G1   | H   | K   | P   | R | M  |
|--------|-----|-----|-----|----|----|----|----|------|-----|-----|-----|---|----|
| 外形 (1) | 115 | 155 | 108 | 42 | 95 | 84 | 66 | 29.5 | 135 | 7.2 | 135 | 2 | M5 |
| 外形 (2) | 65  | 155 | 107 | 42 | 95 | 84 | 66 | 29   | 131 | 7.2 | 115 | 2 | M5 |


(c) A81L-0001-0157

There are two types of shapes under the same specification drawing number. Both types use the same mounting pitches and other dimensions for mounting.  
Specifying shape (1) or (2) is not possible.

Shape (1)

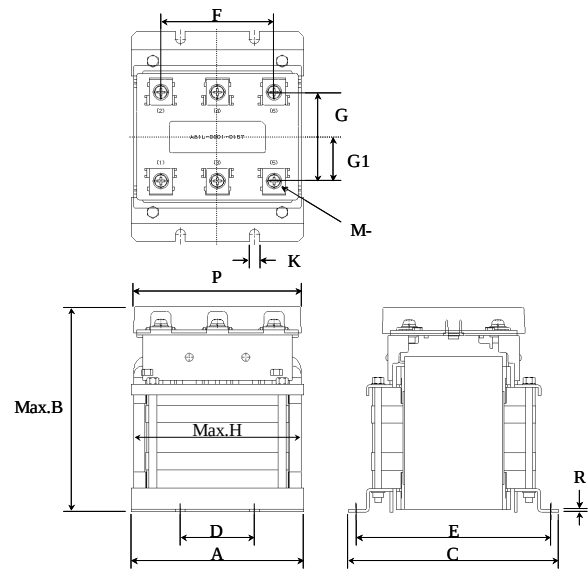

Shape (2)

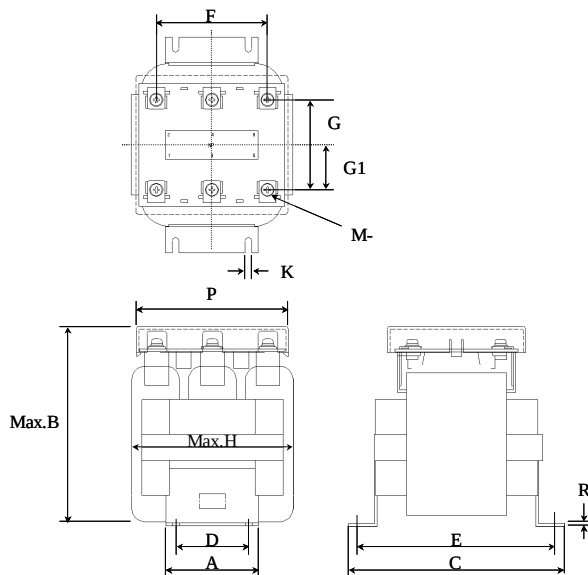


|           | A   | B   | C   | D  | E   | F  | G  | G1 | H   | K   | P   | R | M  |
|-----------|-----|-----|-----|----|-----|----|----|----|-----|-----|-----|---|----|
| Shape (1) | 128 | 155 | 165 | 55 | 145 | 84 | 66 | 33 | 135 | 7.2 | 135 | 2 | M5 |
| Shape (2) | 70  | 155 | 165 | 55 | 145 | 84 | 66 | 33 | 135 | 7.2 | 115 | 2 | M5 |


**(d) A81L-0001-0158**

There are two types of shapes under the same specification drawing number. Both types use the same mounting pitches and other dimensions for mounting.  
Specifying shape (1) or (2) is not possible.

Shape (1)

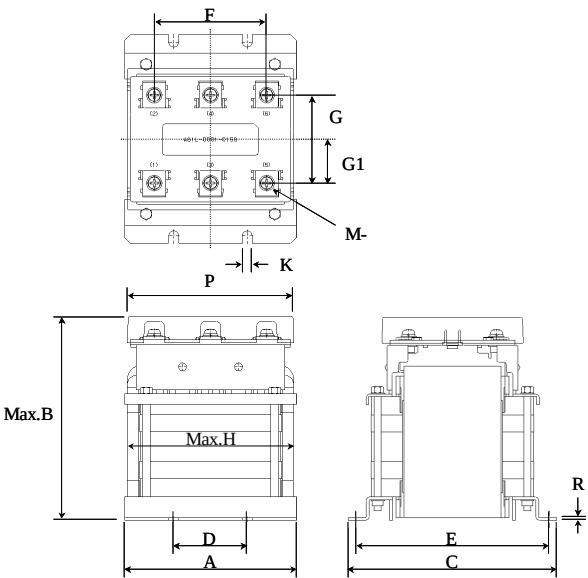

Shape (2)

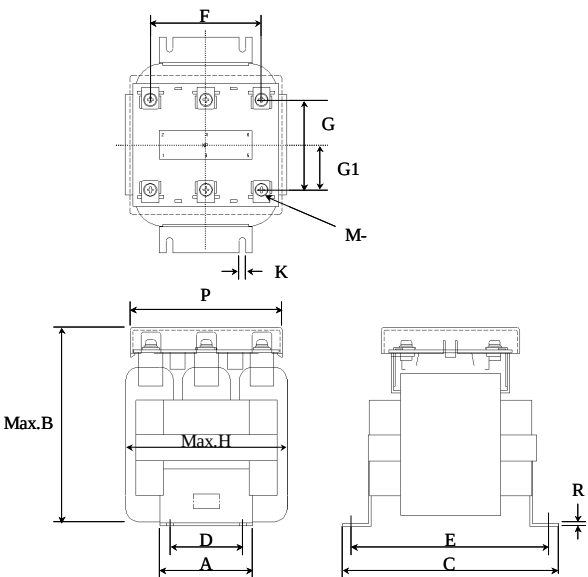


|           | A   | B   | C   | D  | E   | F  | G  | G1 | H   | K   | P   | R | M  |
|-----------|-----|-----|-----|----|-----|----|----|----|-----|-----|-----|---|----|
| Shape (1) | 128 | 155 | 165 | 55 | 145 | 84 | 66 | 33 | 135 | 7.2 | 135 | 2 | M5 |
| Shape (2) | 70  | 155 | 165 | 55 | 145 | 84 | 66 | 33 | 135 | 7.2 | 115 | 2 | M5 |


(e) A81L-0001-0159

There are two types of shapes under the same specification drawing number. Both types use the same mounting pitches and other dimensions for mounting.  
Specifying shape (1) or (2) is not possible.

Shape (1)

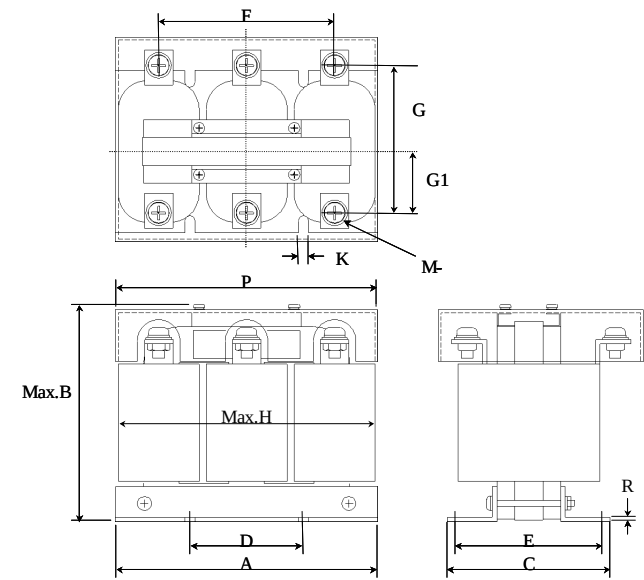

Shape (2)

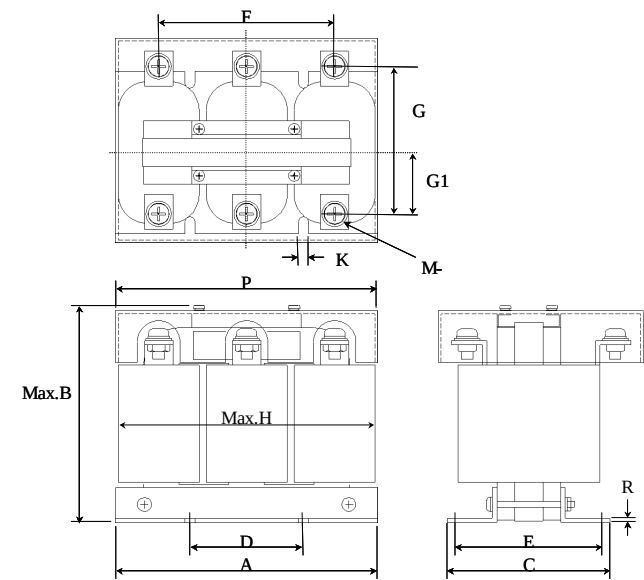


|           | A   | B   | C   | D  | E   | F   | G   | G1   | H   | K   | P   | R   | M  |
|-----------|-----|-----|-----|----|-----|-----|-----|------|-----|-----|-----|-----|----|
| Shape (1) | 185 | 160 | 115 | 80 | 100 | 124 | 105 | 44   | 185 | 7.2 | 185 | 2.6 | M8 |
| Shape (2) | 184 | 160 | 115 | 80 | 100 | 124 | 95  | 38.5 | 185 | 7.2 | 185 | 2.6 | M8 |


**(f) A81L-0001-0160**

There are two types of shapes under the same specification drawing number. Both types use the same mounting pitches and other dimensions for mounting.  
Specifying shape (1) or (2) is not possible.

Shape (1)

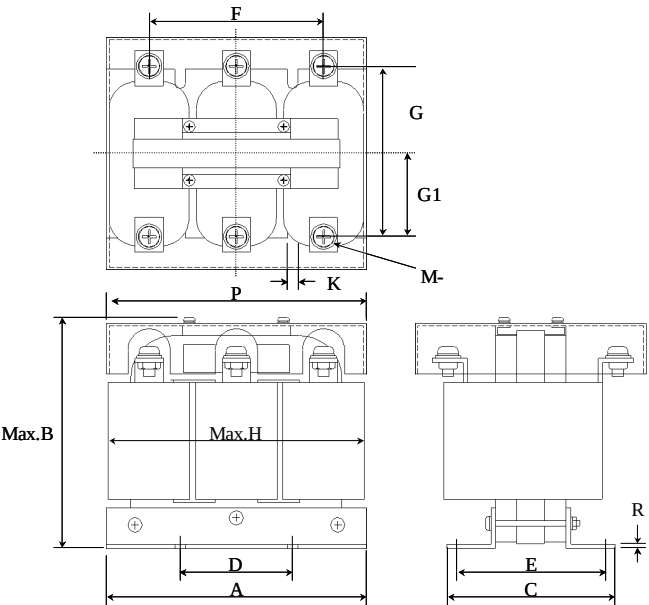


Shape (2)

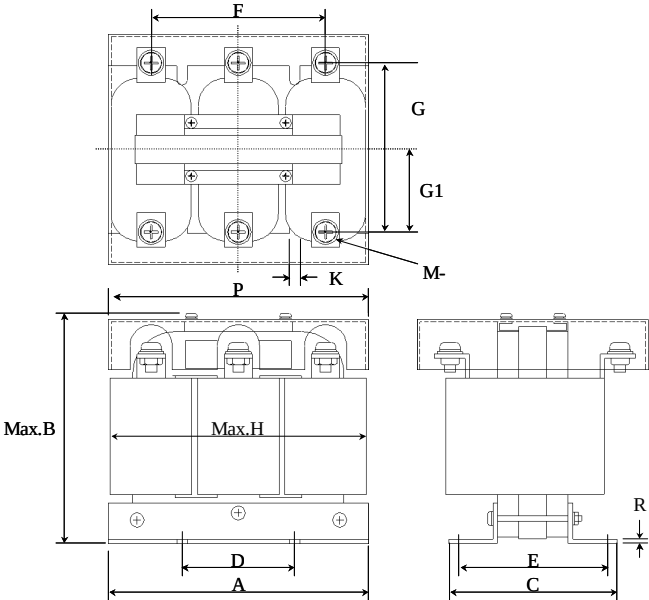


|           | A   | B   | C   | D  | E   | F   | G   | G1   | H   | K   | P   | R   | M  |
|-----------|-----|-----|-----|----|-----|-----|-----|------|-----|-----|-----|-----|----|
| Shape (1) | 185 | 170 | 120 | 80 | 100 | 124 | 125 | 58   | 190 | 7.2 | 185 | 2.6 | M8 |
| Shape (2) | 184 | 170 | 120 | 80 | 100 | 124 | 115 | 57.5 | 185 | 7.2 | 185 | 2.6 | M8 |

(g) A81L-0001-0163

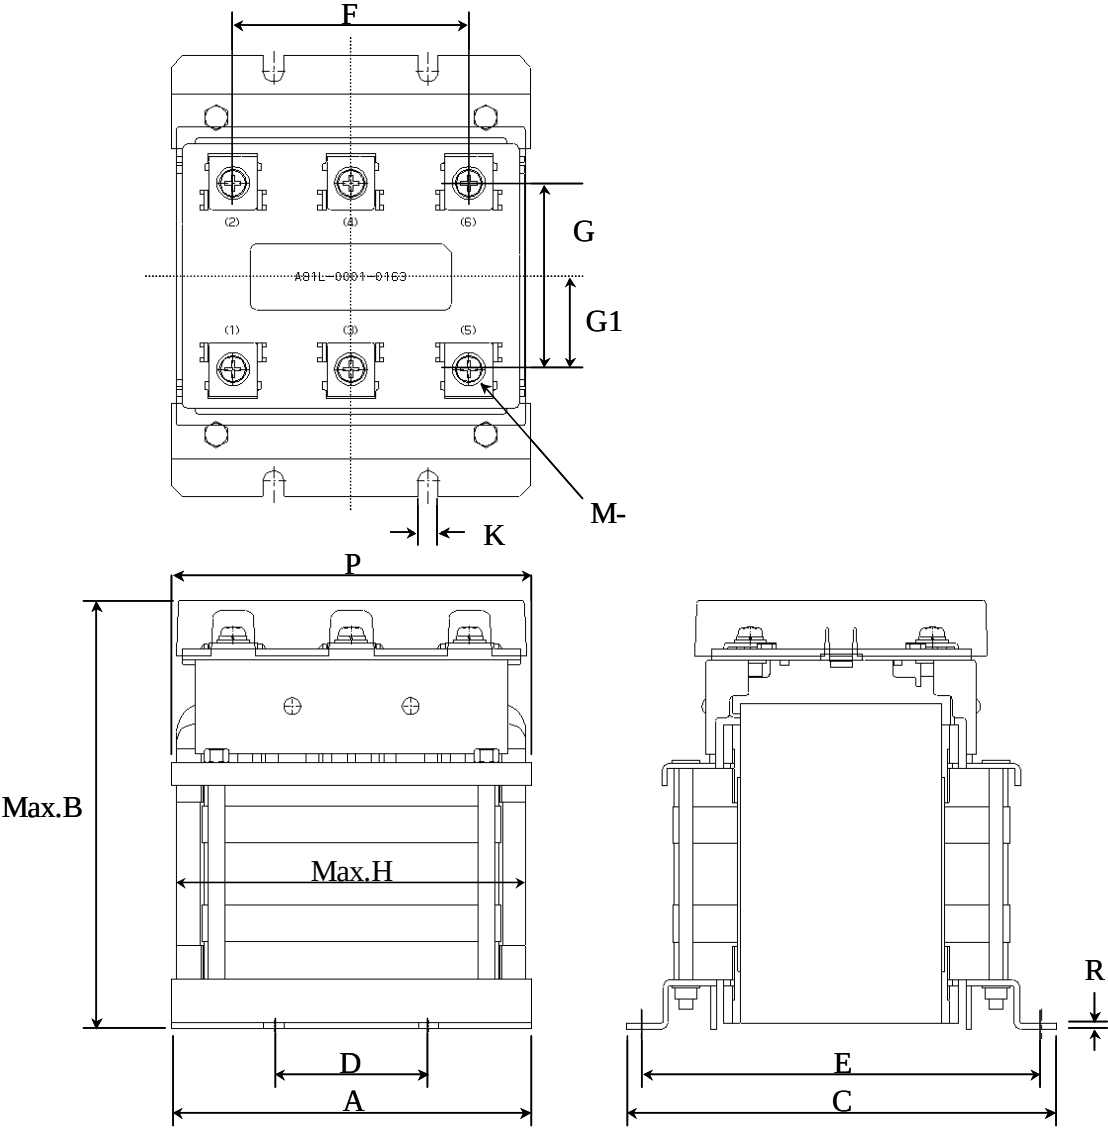


|                | A   | B   | C   | D  | E   | F  | G  | G1 | H   | K   | P   | R | M  |
|----------------|-----|-----|-----|----|-----|----|----|----|-----|-----|-----|---|----|
| A81L-0001-0163 | 135 | 155 | 165 | 55 | 145 | 84 | 66 | 33 | 135 | 7.2 | 135 | 2 | M5 |

(h) A81L-0001-0164

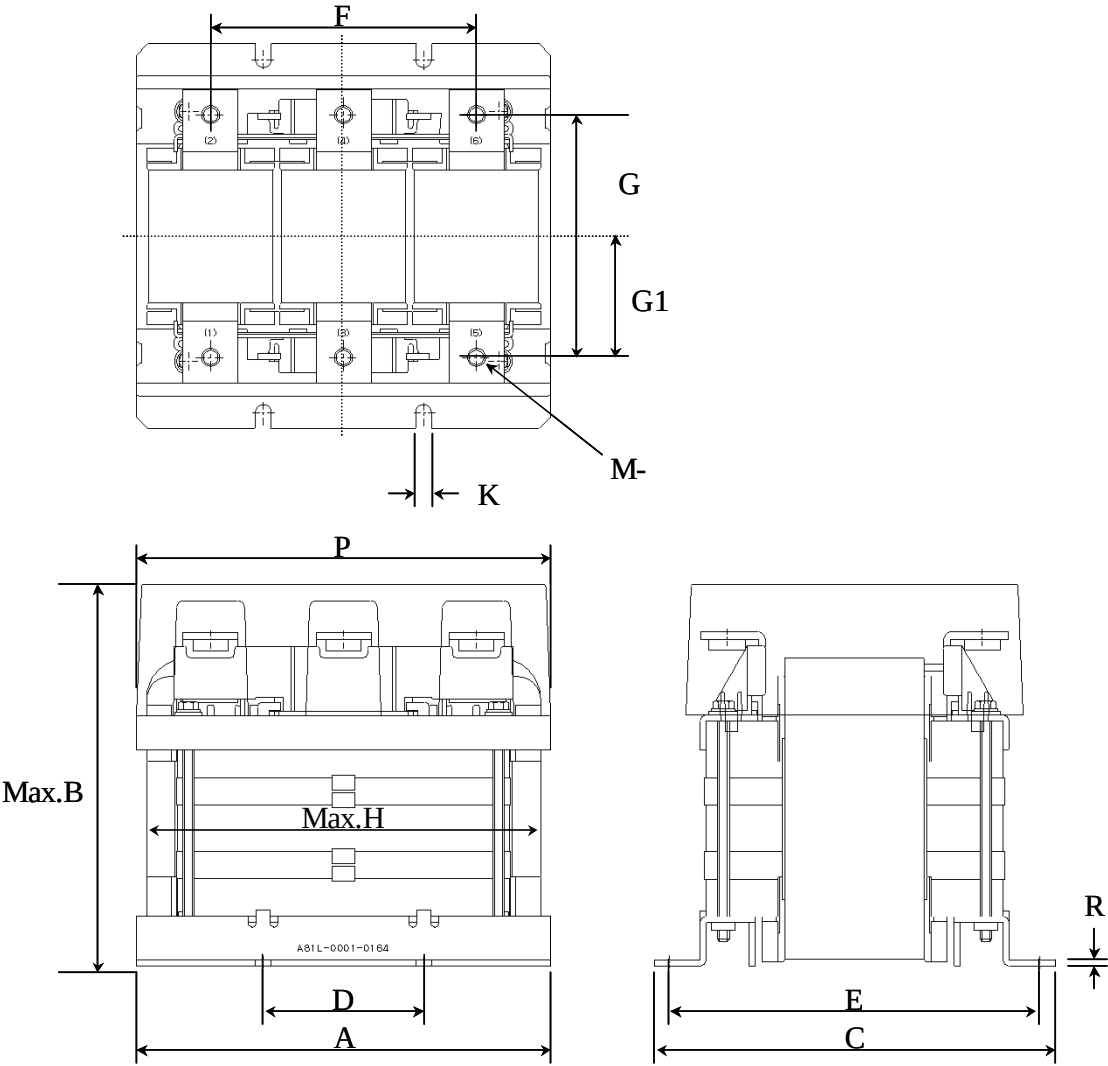

|                | A   | B   | C   | D  | E   | F   | G   | G1 | H   | K | P   | R   | M  |
|----------------|-----|-----|-----|----|-----|-----|-----|----|-----|---|-----|-----|----|
| A81L-0001-0164 | 185 | 172 | 175 | 70 | 154 | 116 | 106 | 53 | 185 | 7 | 185 | 2.6 | M8 |

(i) A81L-0001-0165

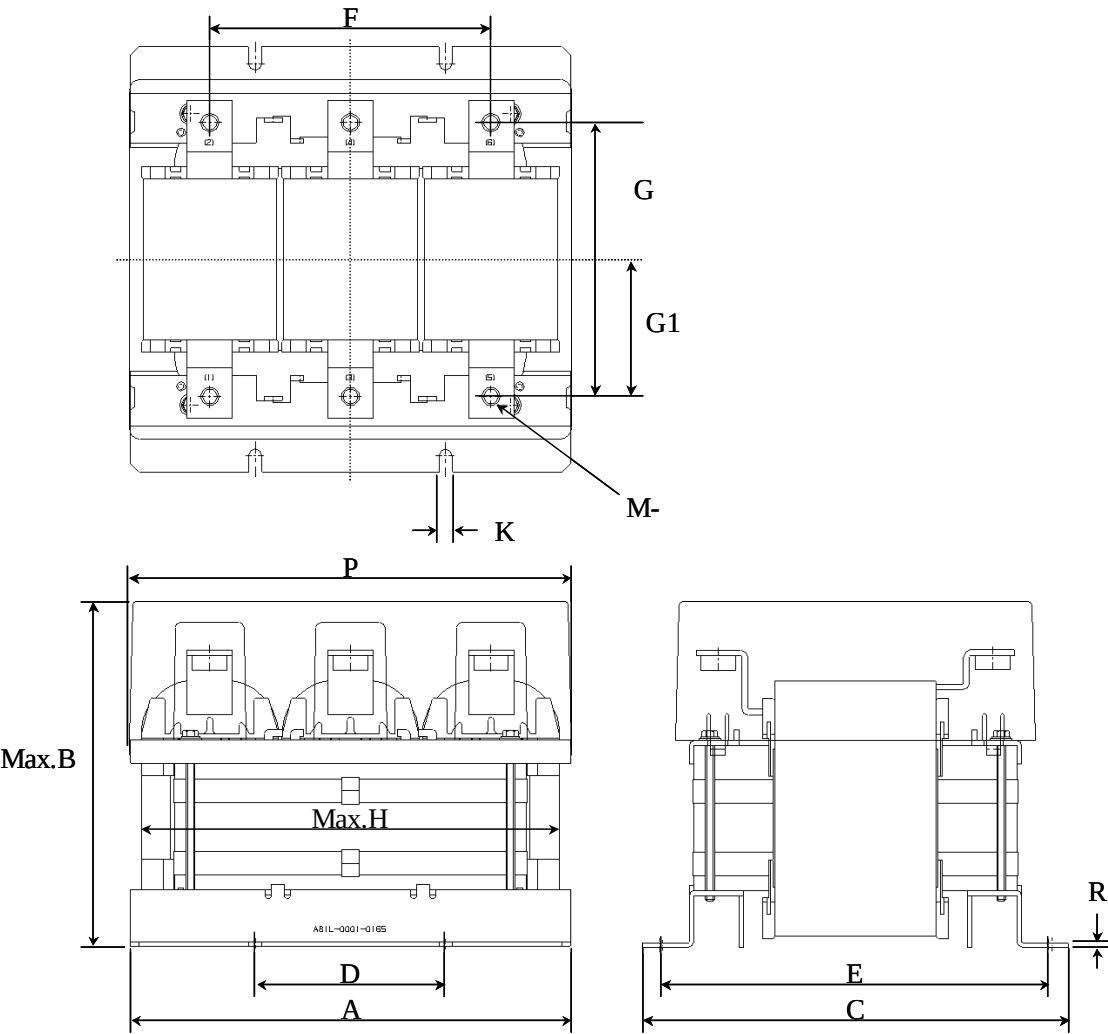


|                | A   | B   | C   | D   | E   | F   | G   | G1   | H   | K | P   | R   | M   |
|----------------|-----|-----|-----|-----|-----|-----|-----|------|-----|---|-----|-----|-----|
| A81L-0001-0165 | 248 | 200 | 238 | 105 | 216 | 155 | 151 | 75.5 | 248 | 7 | 248 | 2.6 | M10 |



(j) A81L-0001-0167


(j) A81L-0001-0170

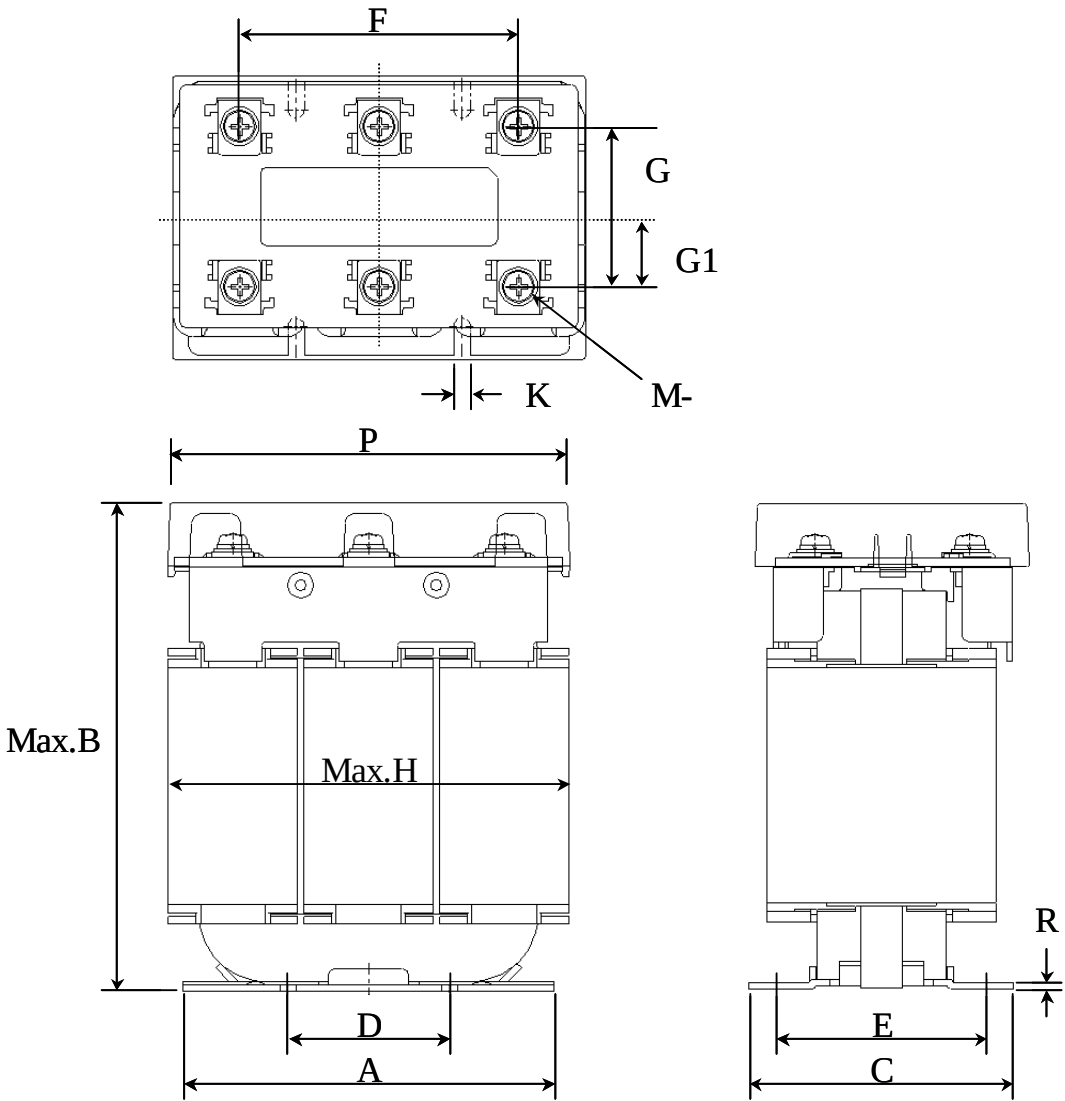


|           | A   | B   | C  | D  | E  | F  | G  | G1   | H   | K | P   | R | M  |
|-----------|-----|-----|----|----|----|----|----|------|-----|---|-----|---|----|
| Shape (1) | 115 | 155 | 82 | 50 | 65 | 84 | 48 | 20.5 | 135 | 5 | 135 | 2 | M5 |

### 8.1.3 AC Line Filter

#### (a) A81L-0001-0083#3C, A81L-0001-0171

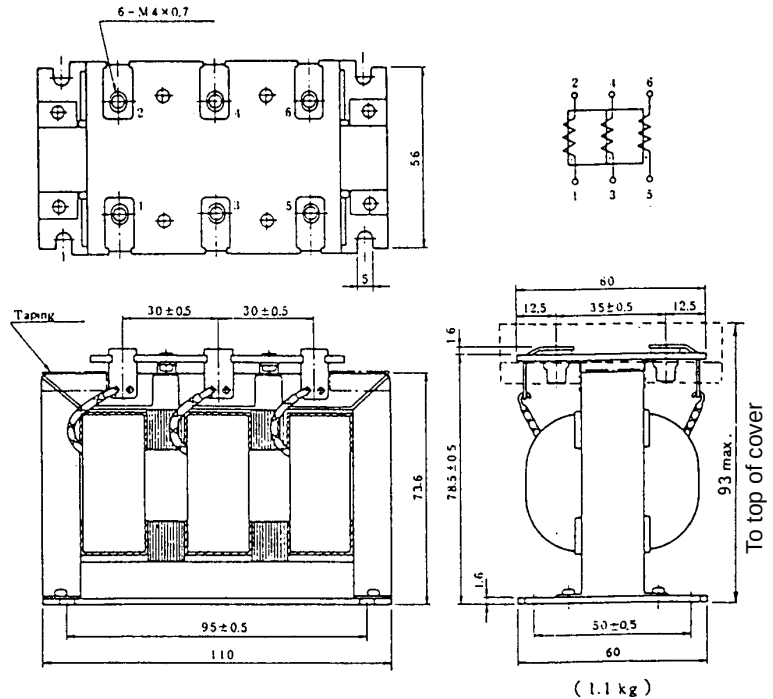


#### (b) A81L-0001-0101#C

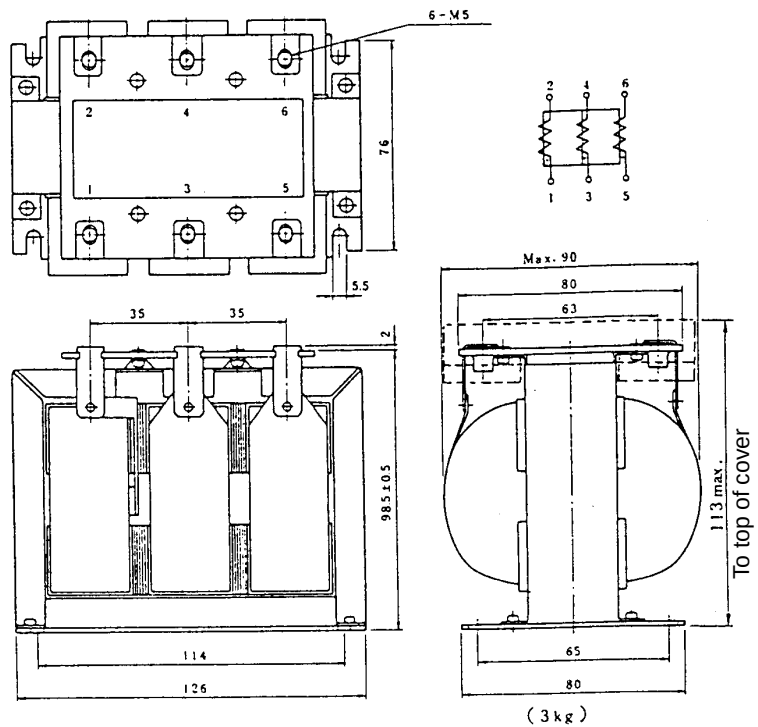


### 8.1.4 Power Transformer

(a) For  $\alpha i$  PS 5.5,  $\alpha i$  PS<sub>R</sub> 5.5 (at 5.5 kW output) (A06B-6052-J001)

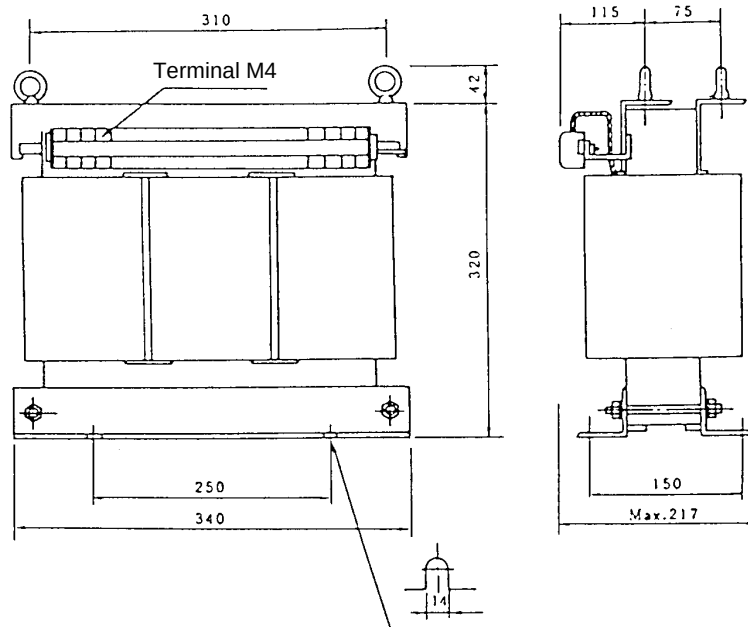


Outline Drawing of Power Transformer with no Cover

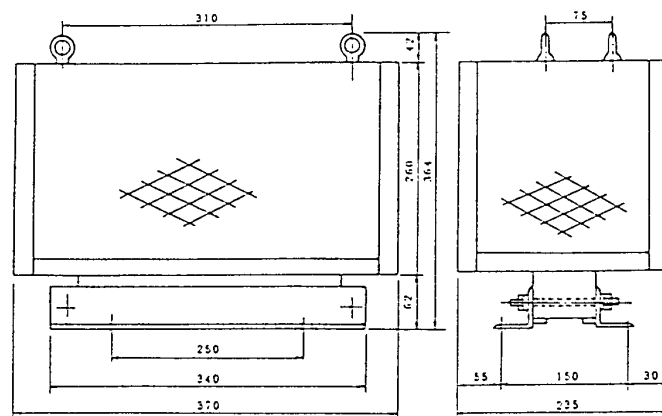


Outline Drawing of Power Transformer with Cover

#### NOTE

The four side panels are all meshed, while the top is a solid plate.

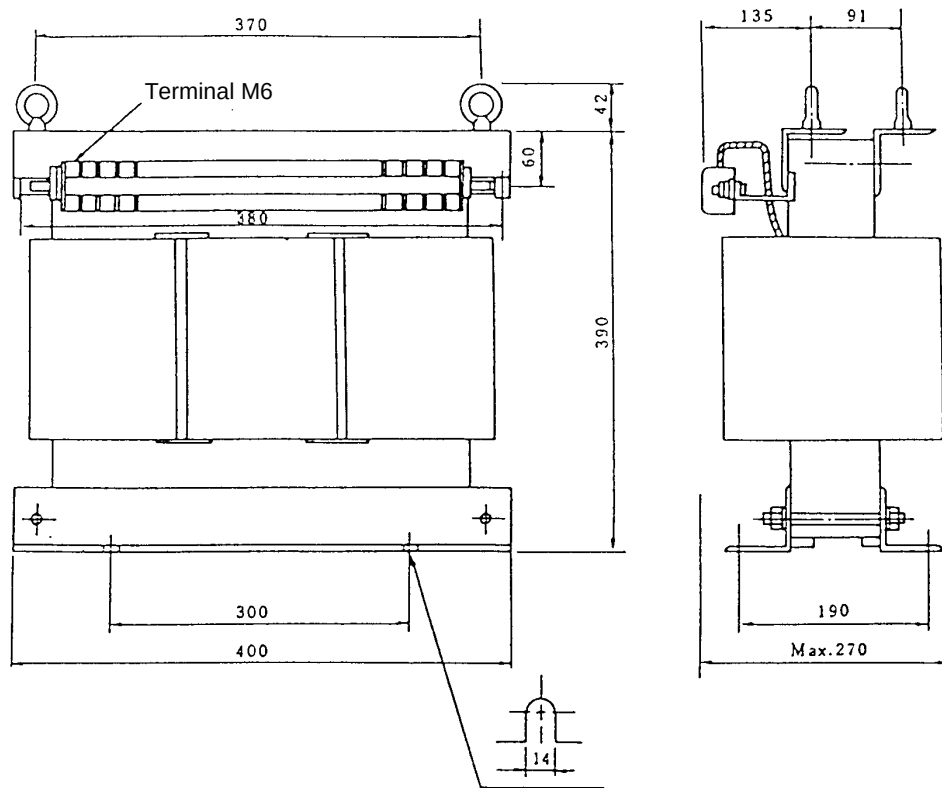**(b) For  $\alpha i$  PS 11 ,  $\alpha i$  PS<sub>R</sub> 5.5 (at 7.5KW output) (A06B-6044-J006)**


Outline Drawing of Power Transformer with no Cover

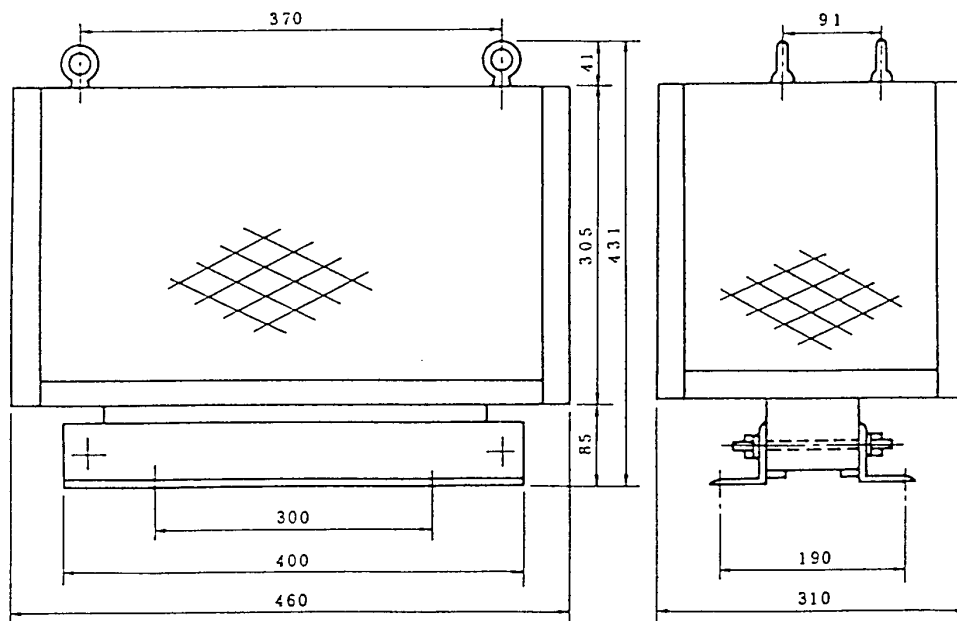


Outline Drawing of Power Transformer with Cover

**NOTE**

The four side panels are all meshed, while the top is a solid plate.

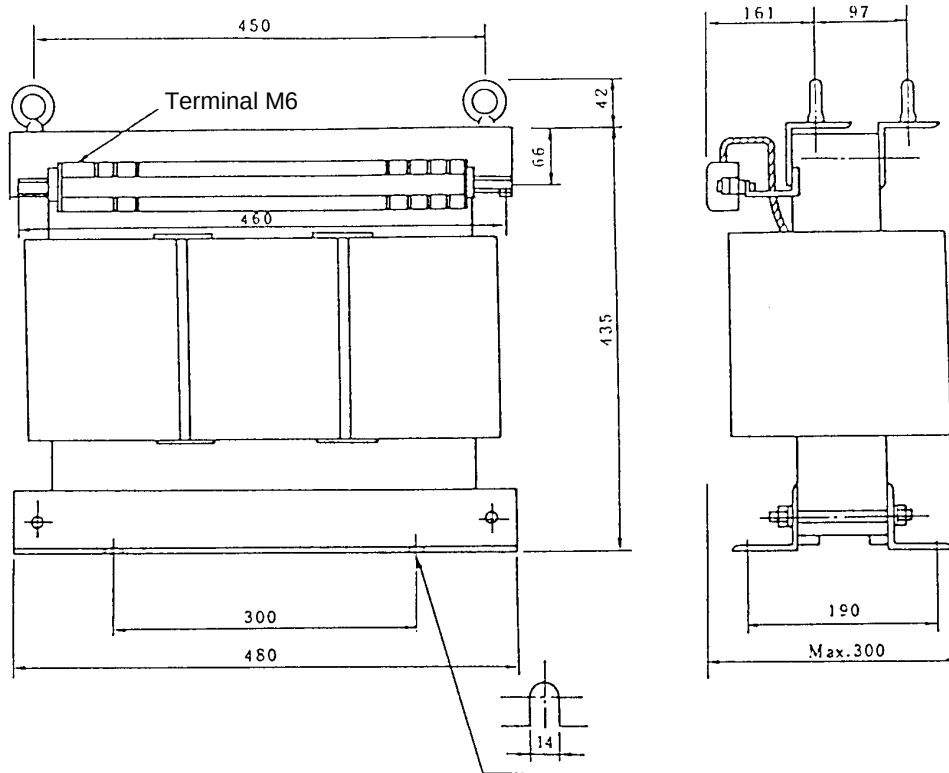**(c) For  $\alpha i$  PS 15 (A06B-6044-J007)**


Outline Drawing of Power Transformer with no Cover

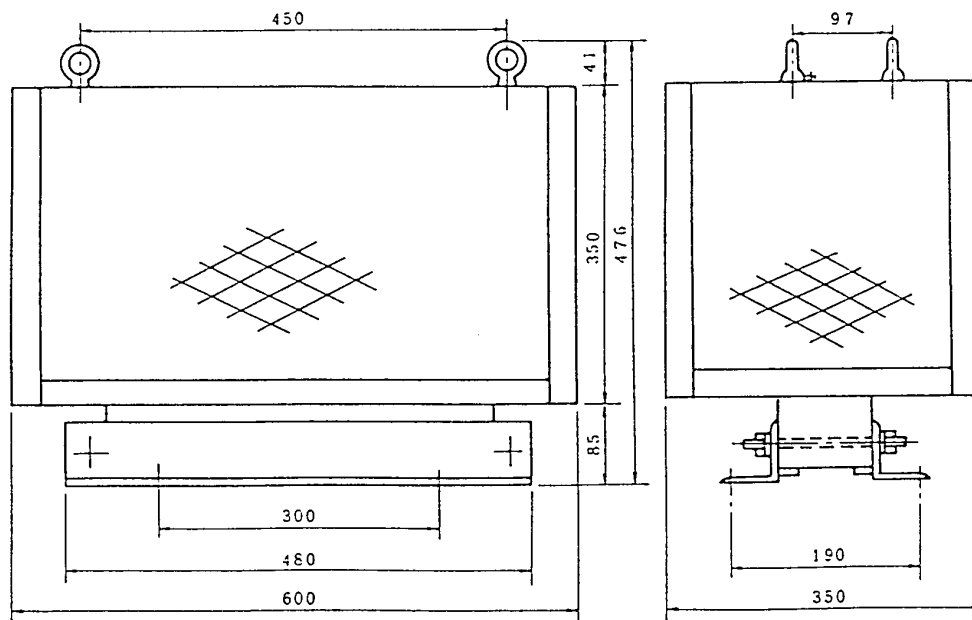


Outline Drawing of Power Transformer with Cover

**NOTE**

The four side panels are all meshed, while the top is a solid plate.

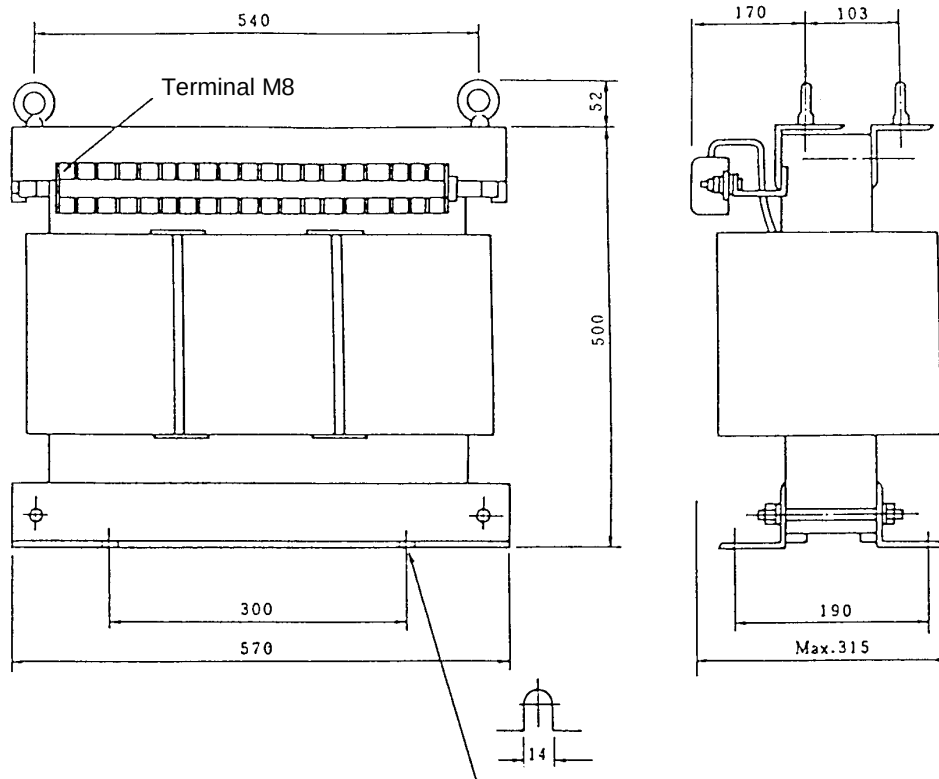**(d) For  $\alpha i$  PS 26, 30(A06B-6044-J010)**

Outline Drawing of Power Transformer with no Cover

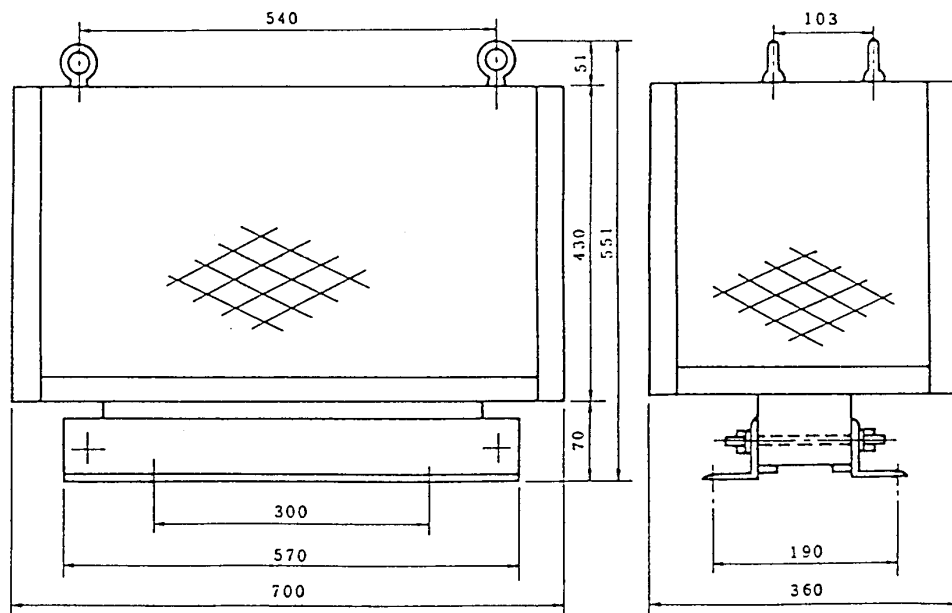


Outline Drawing of Power Transformer with Cover


**NOTE**

The four side panels are all meshed, while the top is a solid plate.

(e) For  $\alpha i$  PS 37,  $\alpha i$  PS 55 (at 45kW output) (A06B-6044-J015)

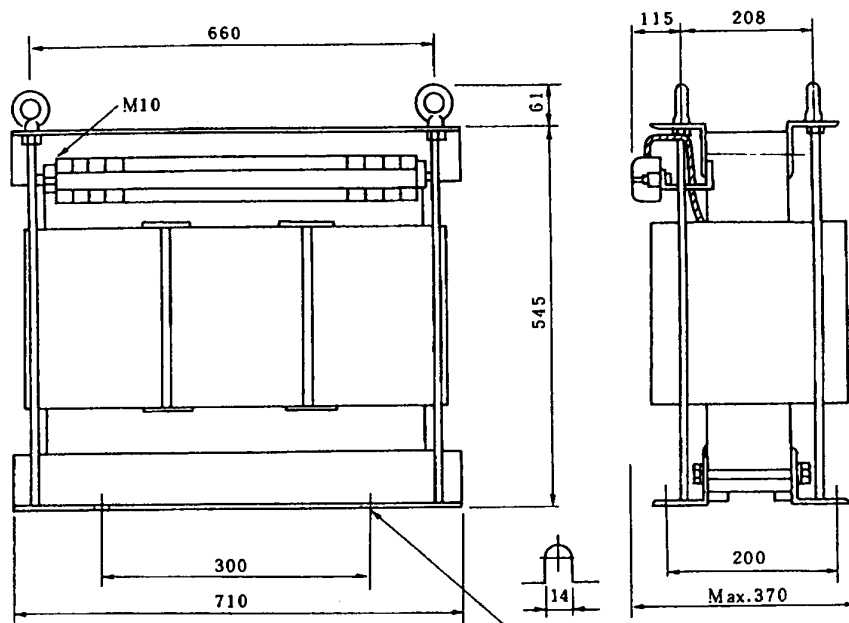

Outline Drawing of Power Transformer with no Cover

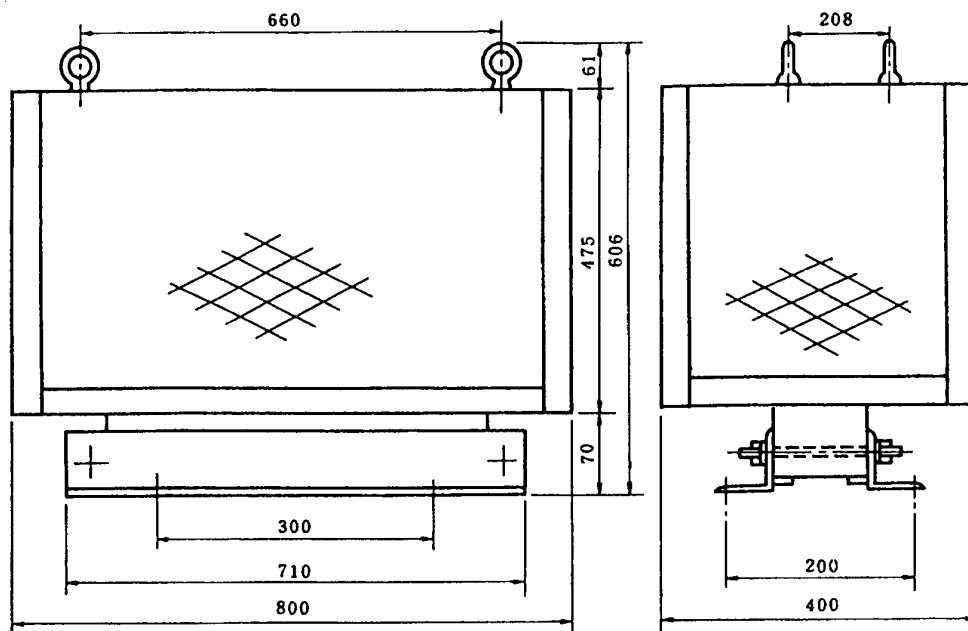


Outline Drawing of Power Transformer with Cover

**NOTE**

The four side panels are all meshed, while the top is a solid plate.

(f) For  $\alpha i$  PS<sub>R</sub> 3 (2KW output) (A80L-0024-0006),  $\alpha i$  PS<sub>R</sub> 3 (3KW output) (A80L-0026-0003)

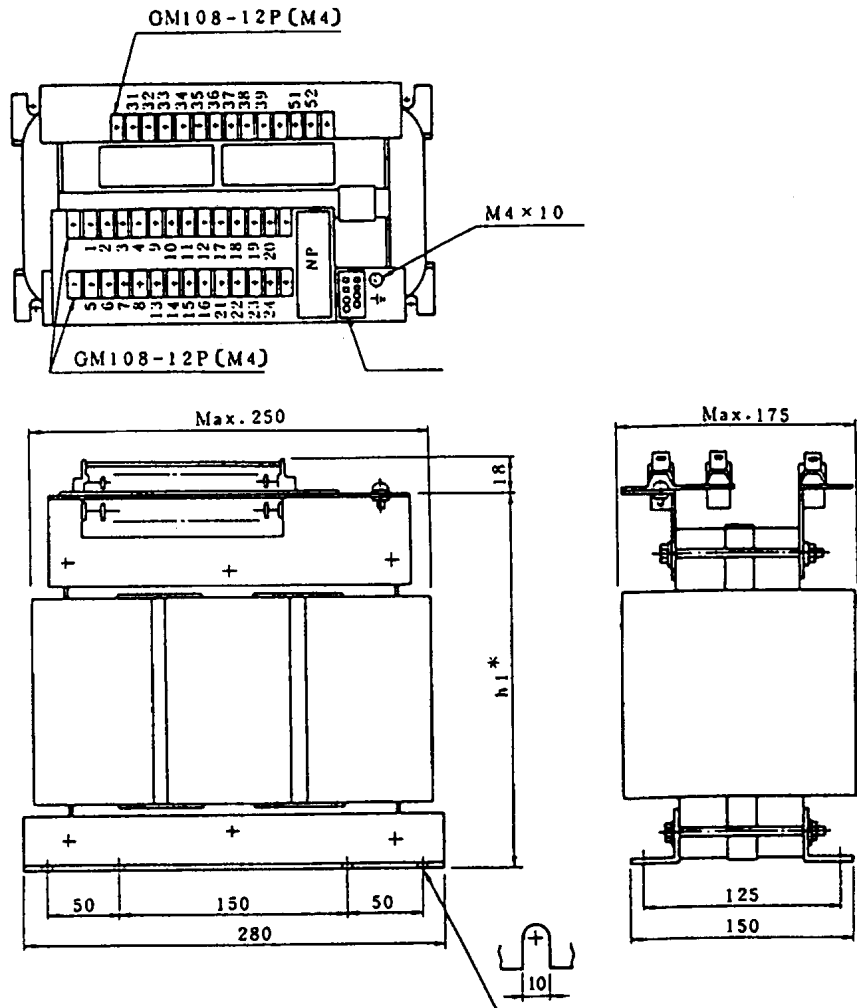


| Drawing number              | A80L-0024-0006 | A80L-0026-0003 |
|-----------------------------|----------------|----------------|
| Type (name)                 | SBE            | SCE            |
| Weight                      | 27 kg          | 36 kg          |
| h1* (height of transformer) | 217mm max      | 247mm max      |



### 8.1.5 Regenerative Discharge Unit

#### (a) A06B-6089-H510


For the panel cut-out drawing, see Section 8.2 (e).

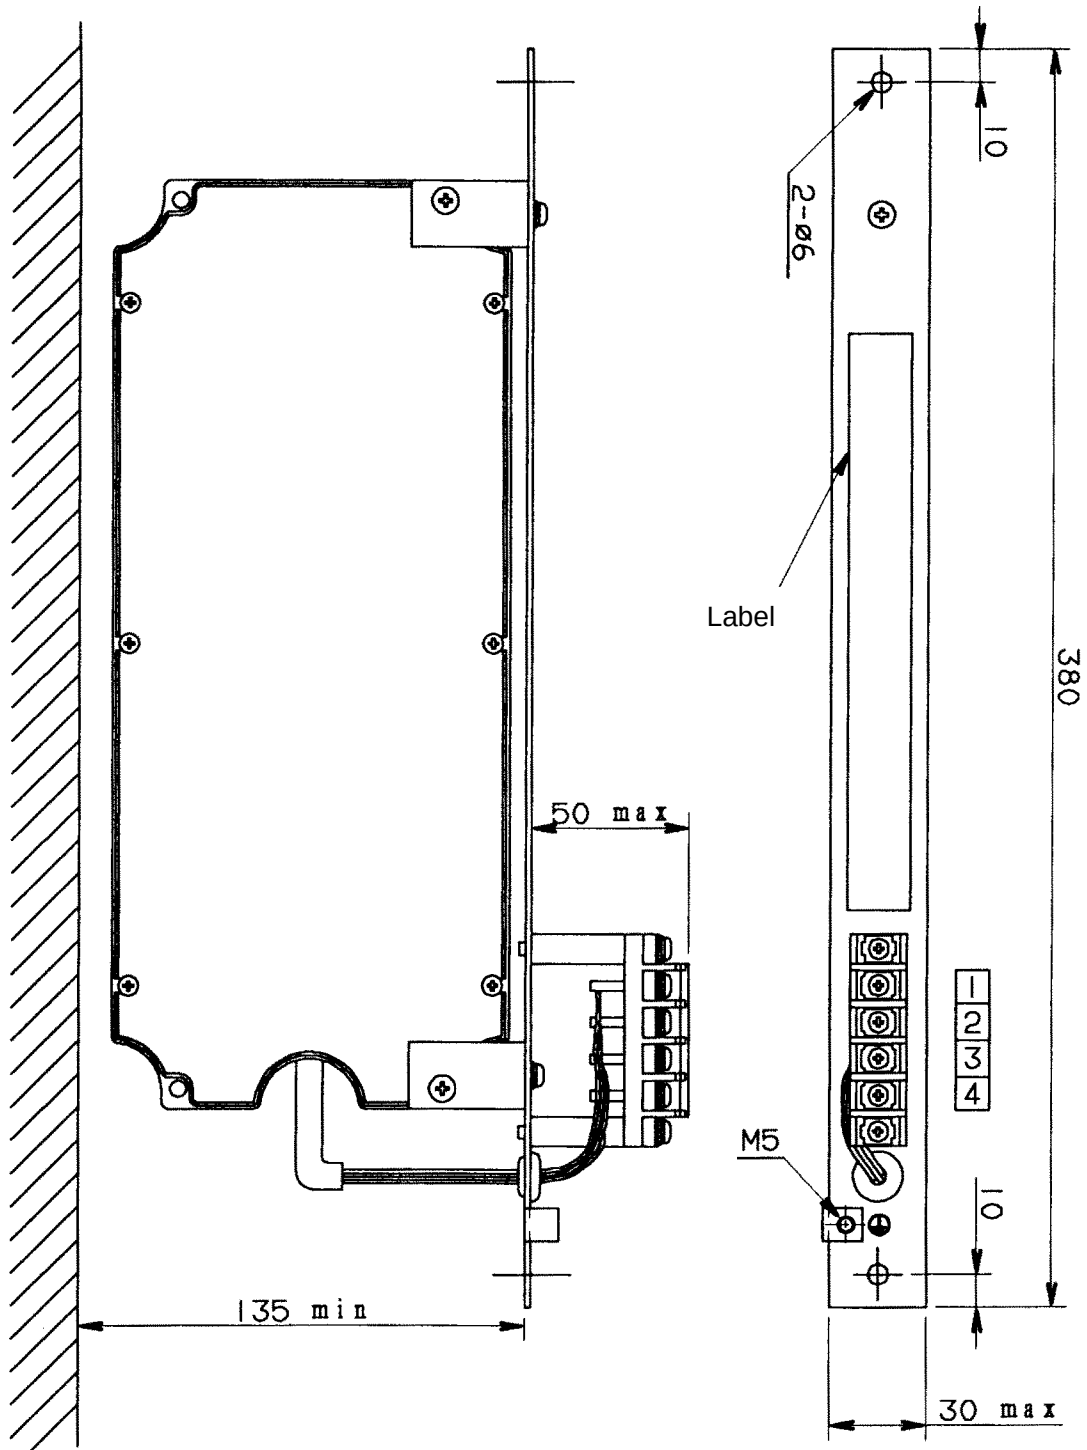

Terminal block: M4  $\times$  4

**(b) A06B-6089-H500**


For the panel cut-out drawing, see Section 8.2 (f).

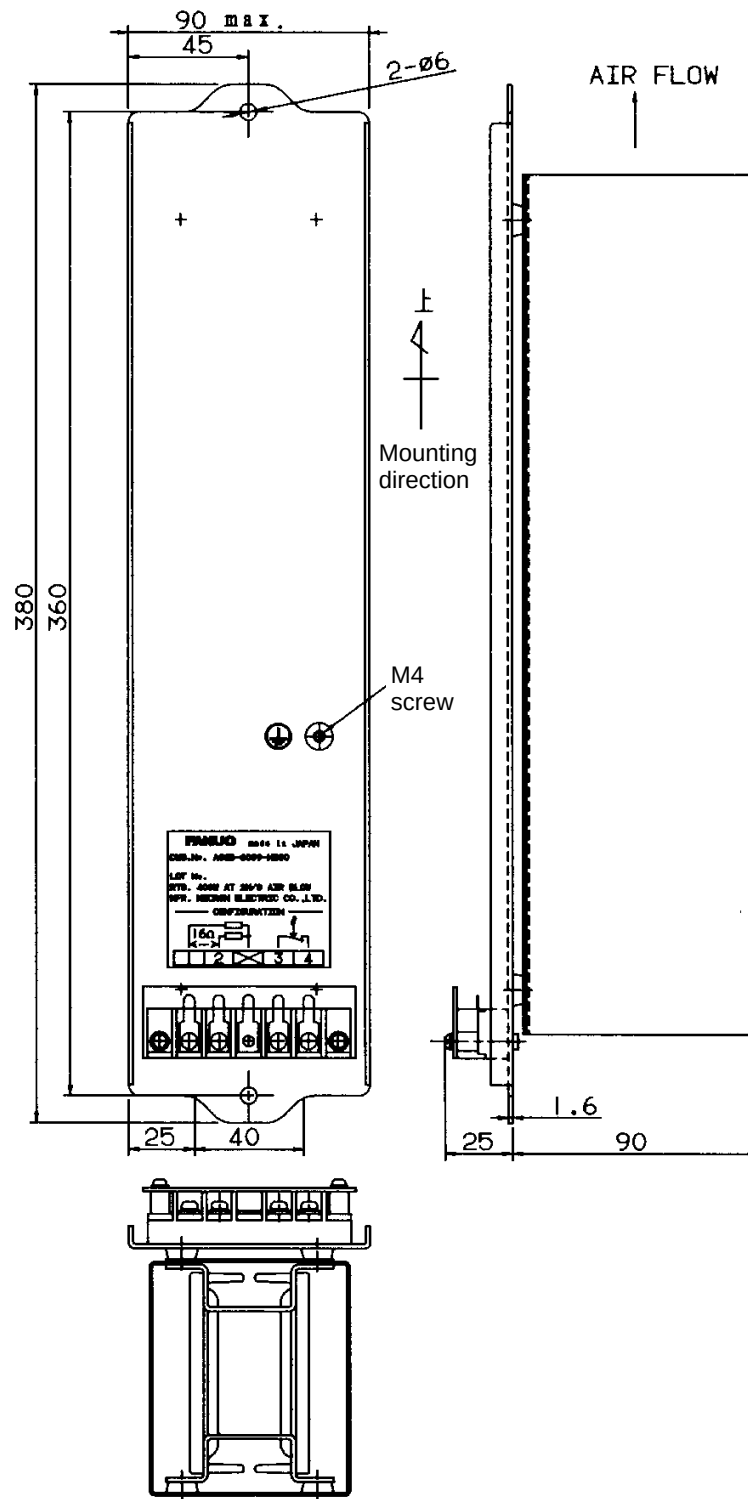

Terminal block: M4  $\times$  4

**(c) A06B-6089-H711 to H713**


For the panel cut-out drawing, see Section 8.2 (g).

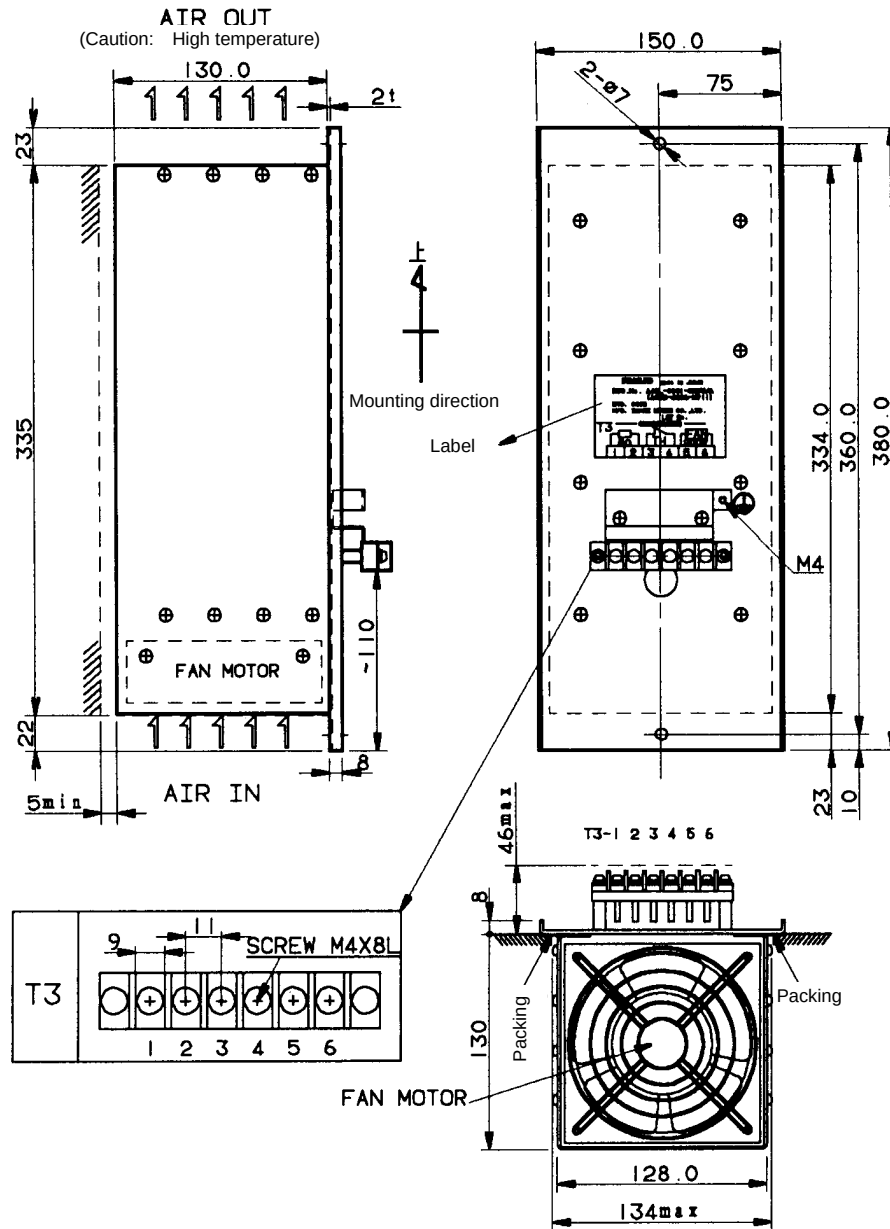


## 8.1.6 Dynamic Brake Module (DBM)

For the panel cut-out drawing, see Section 8.2 (j).

### (a) A06B-6079-H401

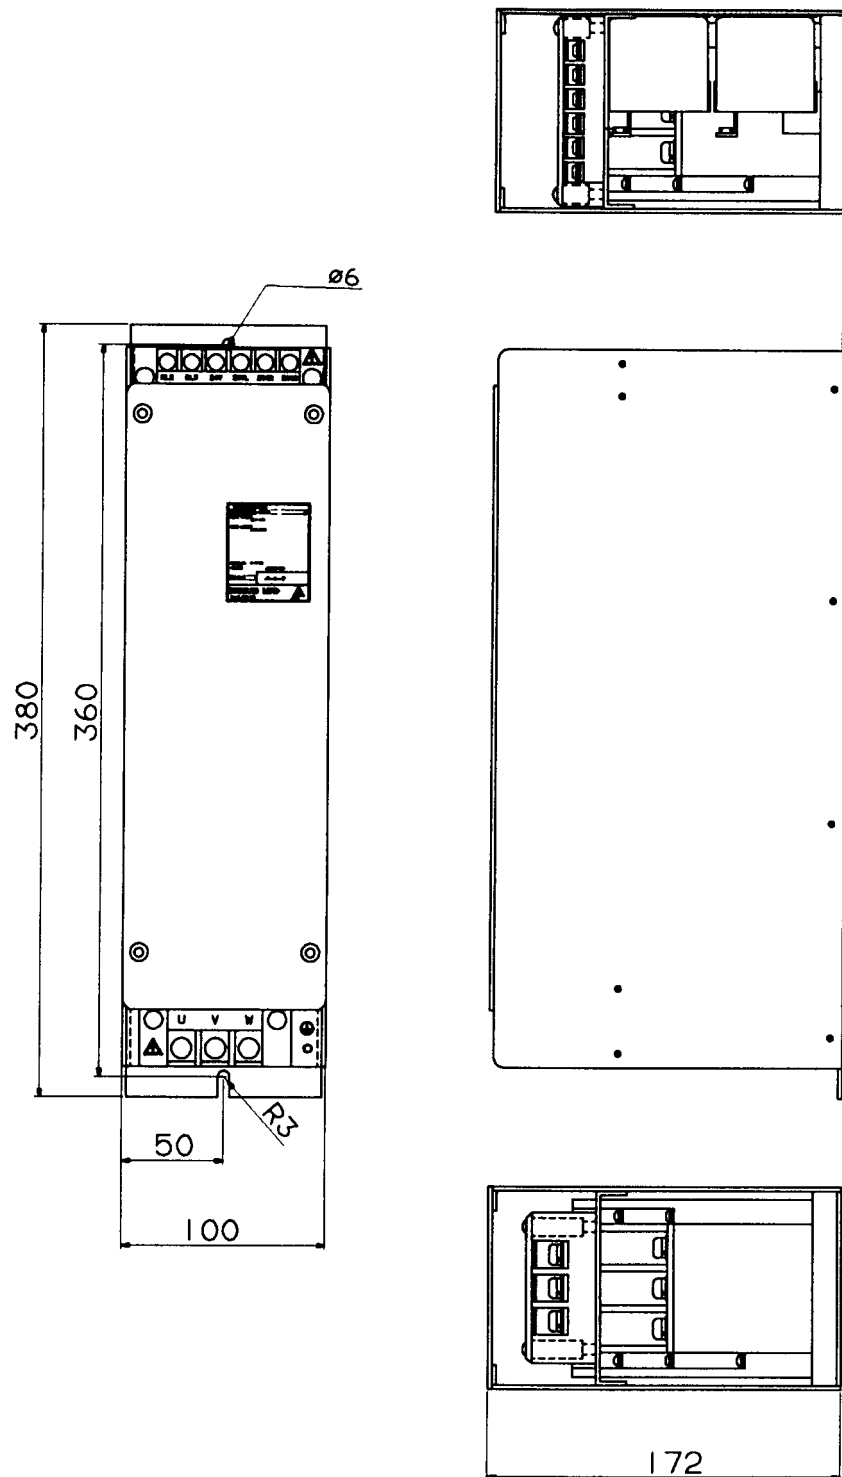


**(b) A06B-6069-H300**

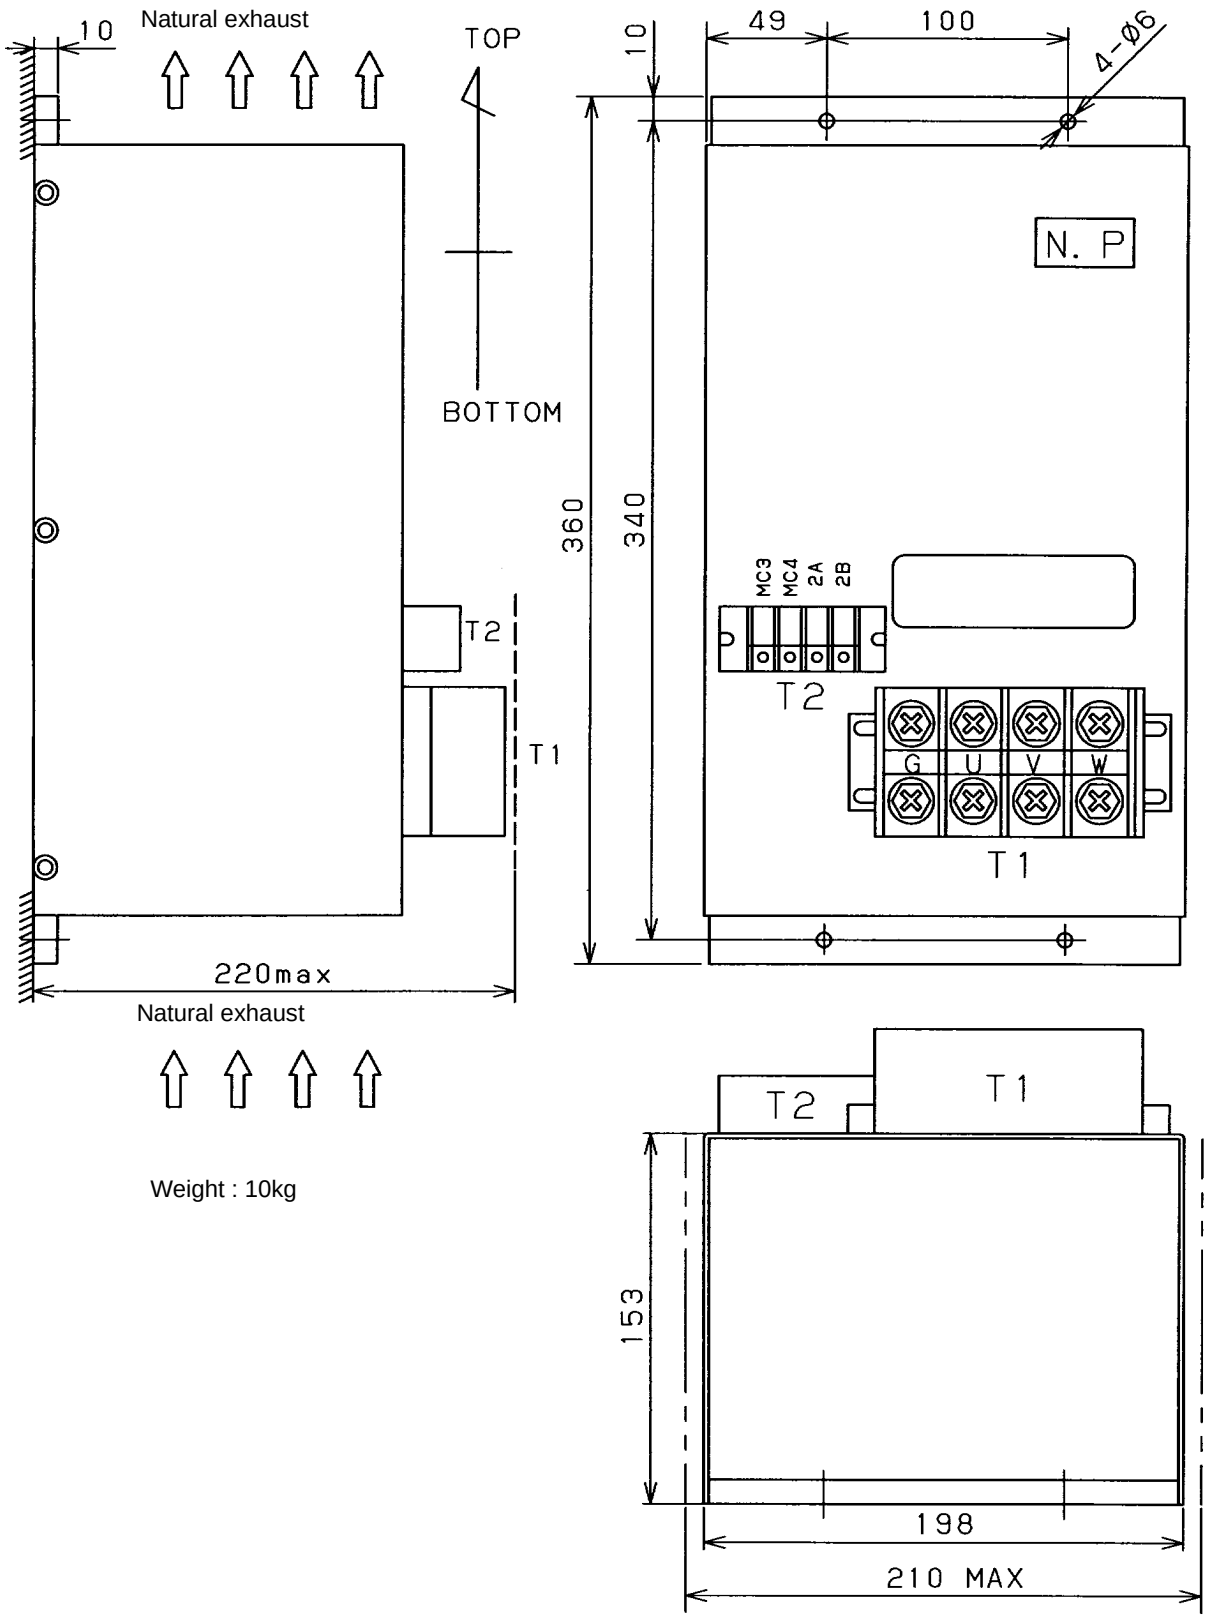


### 8.1.7 Circuit Breaker

|     | Ordering drawing number | A   | B  | C   | D   | E   | M <sub>1</sub> - | F    | G  | H  | I  | J    | K    | L   | M <sub>2</sub> - | N  | Mounting    |
|-----|-------------------------|-----|----|-----|-----|-----|------------------|------|----|----|----|------|------|-----|------------------|----|-------------|
| (a) | A06B-6077-K101          | 75  | 50 | 180 | 84  | 100 | M5               | 17   | 84 | 60 | 43 | φ7.8 | φ4.9 | 84  | M4               | 25 | 2 positions |
| (b) | A06B-6077-K102          | 75  | 50 | 180 | 84  | 100 | M8               | 17   | 84 | 60 | 43 | φ7.8 | φ4.9 | 84  | M4               | 25 | 2 positions |
| (c) | A06B-6077-K103          |     |    |     |     |     |                  |      |    |    |    |      |      |     |                  |    |             |
| (d) | A06B-6077-K104          |     |    |     |     |     |                  |      |    |    |    |      |      |     |                  |    |             |
| (e) | A06B-6077-K108          | 105 | 70 | 265 | 144 | 165 | M8               | 25.5 | 84 | 56 | 47 | φ8.5 | φ4.5 | 126 | M4               | 35 | 4 positions |
| (f) | A06B-6077-K105          |     |    |     |     |     |                  |      |    |    |    |      |      |     |                  |    |             |
| (g) | A06B-6077-K110          |     |    |     |     |     |                  |      |    |    |    |      |      |     |                  |    |             |
| (h) | A06B-6077-K109          |     |    |     |     |     |                  |      |    |    |    |      |      |     |                  |    |             |
| (i) | A06B-6077-K107          | 75  | 50 | 180 | 84  | 100 | M5               | 17   | 84 | 60 | 43 | φ7.8 | φ4.9 | 84  | M4               | 25 | 2 positions |
| (j) | A06B-6077-K106          |     |    |     |     |     |                  |      |    |    |    |      |      |     |                  |    |             |

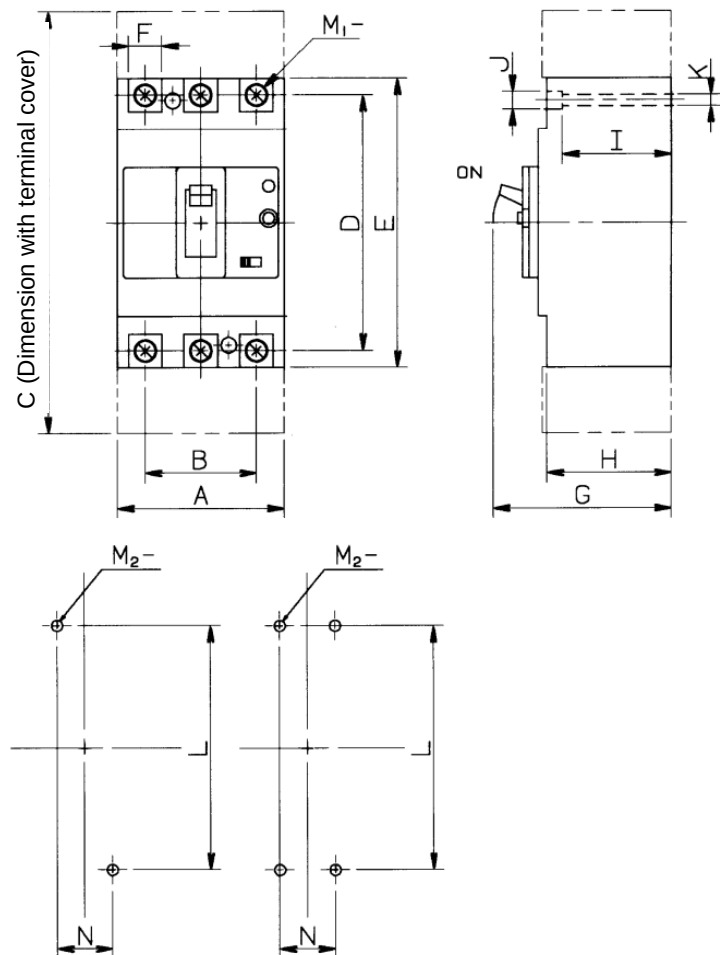


Two mounting holes(1)    Two mounting holes(2)    Four mounting holes

The circuit breakers have two or four mounting holes.

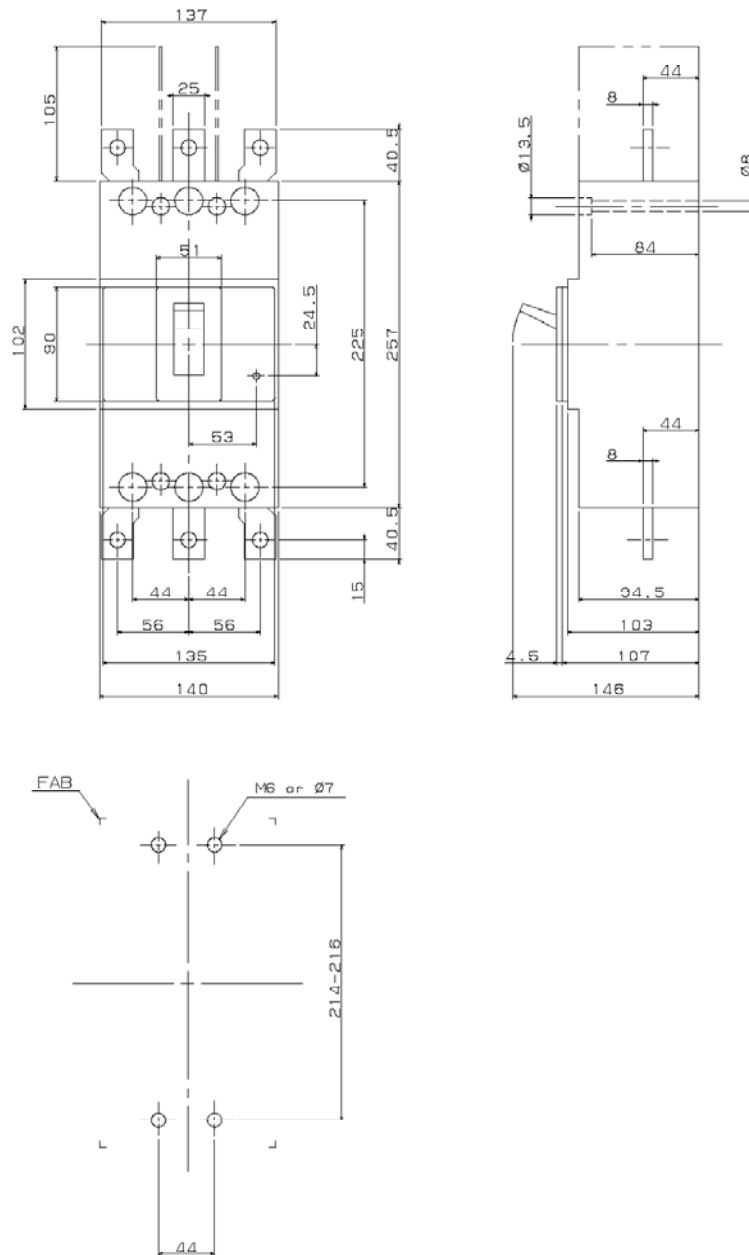**(k) A06B-6077-K111**


## 8.1.8 Magnetic Contactors

### (a) A06B-6077-K121

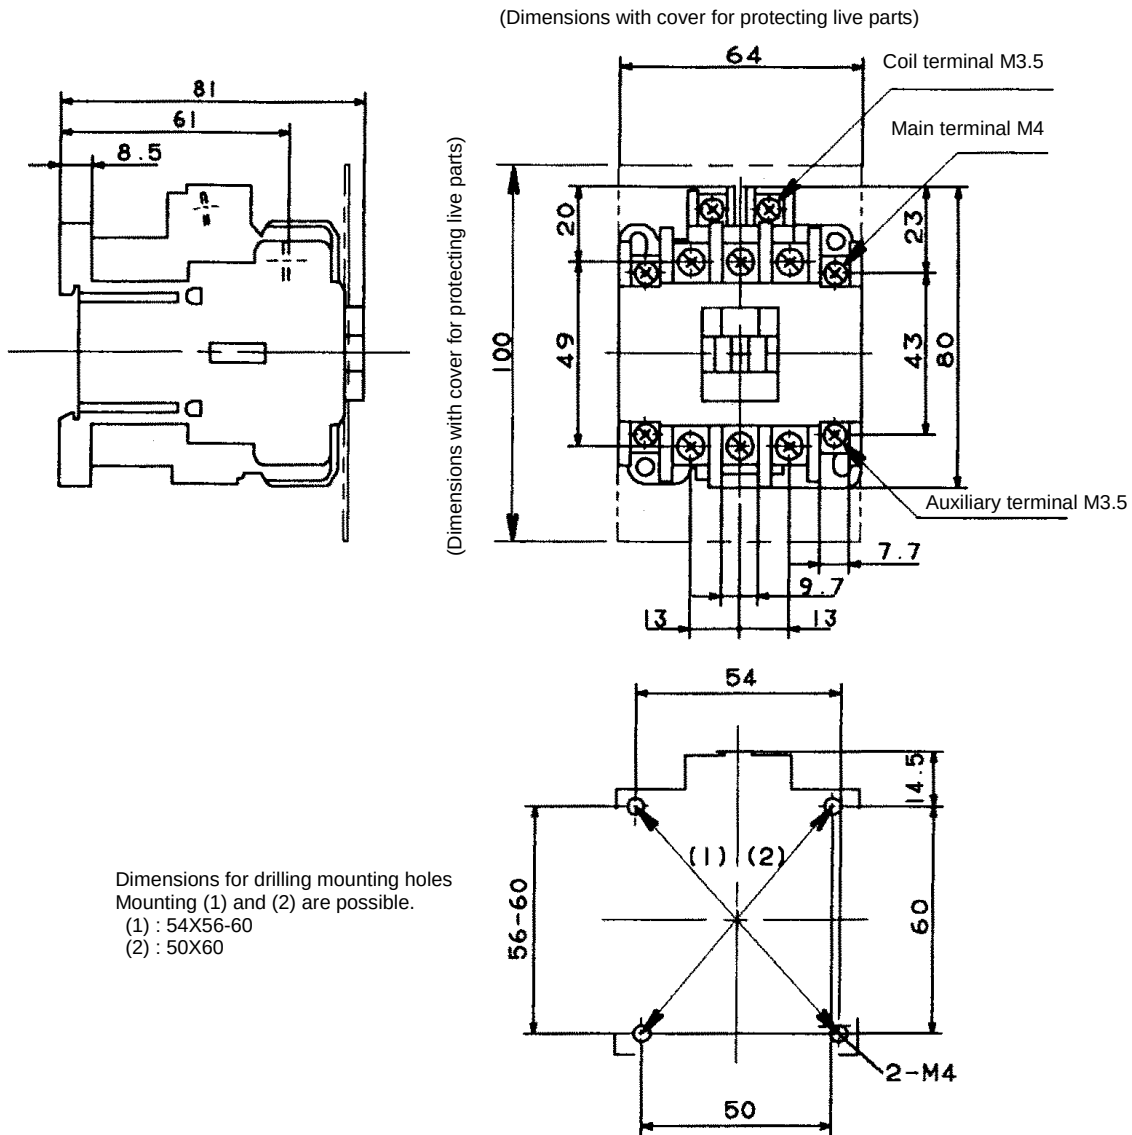


| Ordering drawing number | Fuji Electric part number |        | Operation coil voltage     | Auxiliary contact structure | Weight |
|-------------------------|---------------------------|--------|----------------------------|-----------------------------|--------|
|                         | Body                      | Cover  |                            |                             |        |
| A06B-6077-K121          | SC-5-1                    | SZ-JC4 | 200V/50Hz<br>200-220V/60Hz | 1a1b                        | 0.38Kg |

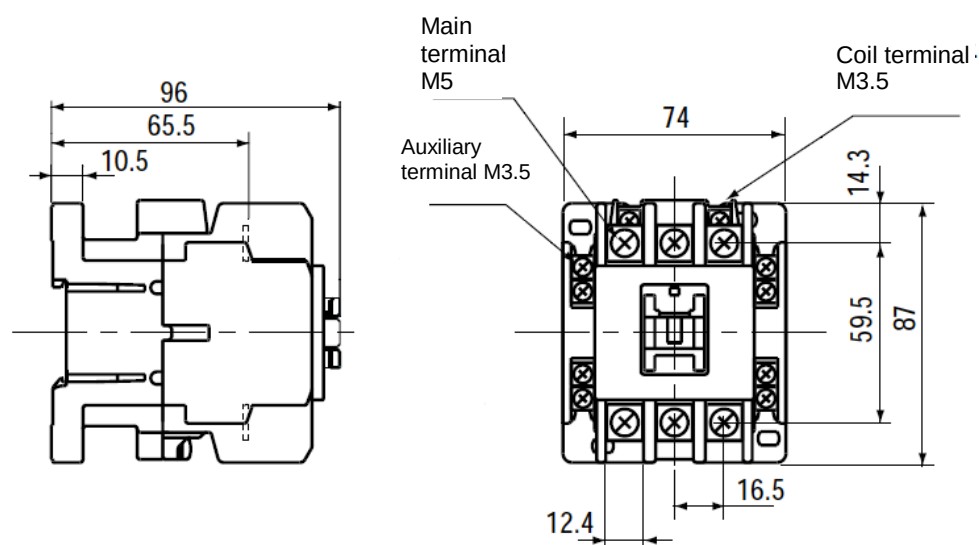

**(b) A06B-6077-K122, A06B-6077-K123**


Dimensions for drilling mounting holes

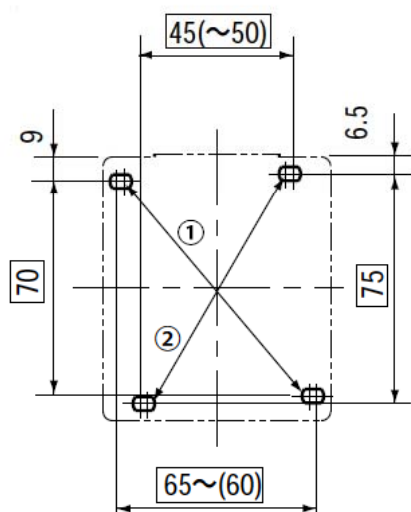


- Mounting dimensions: Holes <1> or <2> can be used for mounting.  
 <1>: (60 to) 65 × 70 (compatible with SC-1N and SC-2N)  
 <2>: 45 (to 50) × 75
- Mounting screw: 2-M4  
 Install a screw at two mounting holes located diagonally.

| Ordering drawing number | Fuji Electric part number |        | Operation coil voltage | Auxiliary contact structure | Weight |
|-------------------------|---------------------------|--------|------------------------|-----------------------------|--------|
|                         | Body                      | Body   |                        |                             |        |
| A06B-6077-K122          | SC-N1                     | SZ-N1J | 200V/50Hz              | 2a2b                        | 0.59Kg |
| A06B-6077-K123          | SC-N2                     | SZ-N1J | 200-220V/60Hz          |                             | 0.59Kg |

## (c) A06B-6077-K124

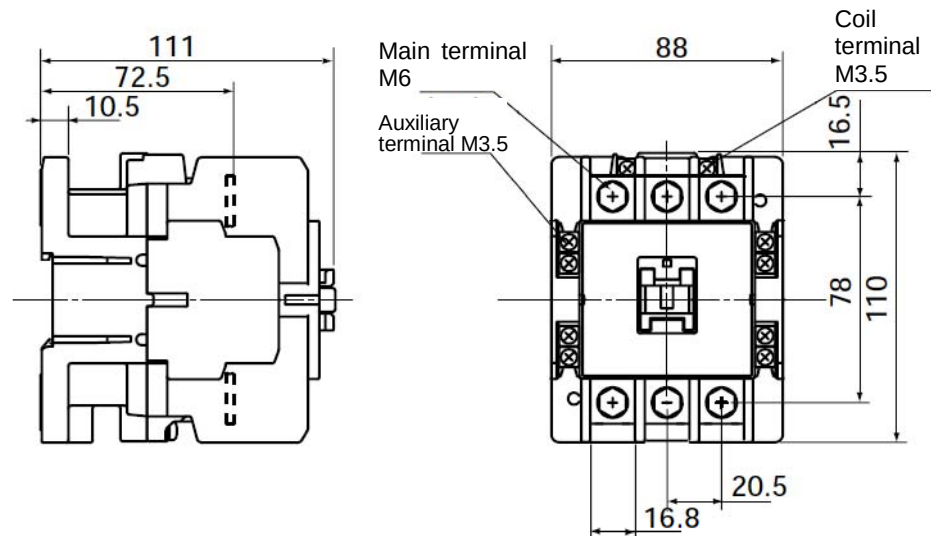


Dimensions for drilling mounting holes

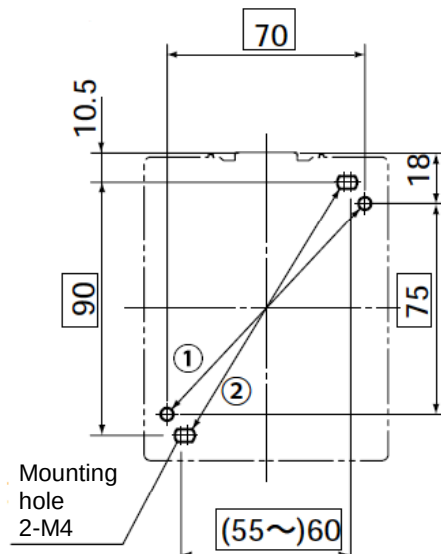


- Mounting dimensions: Holes <1> or <2> can be used for mounting.  
 <1>: 70 × 75 (compatible with SC-1N and SC-2N)  
 <2>: (55 to) 60 × 90
- Mounting screw: 2-M4  
 Install a screw at two mounting holes located diagonally.

| Ordering drawing number | Fuji Electric part number |         | Operation coil voltage     | Auxiliary contact structure | Weight |
|-------------------------|---------------------------|---------|----------------------------|-----------------------------|--------|
|                         | Body                      | Body    |                            |                             |        |
| A06B-6077-K124          | SC-N2S                    | SZ-N2SJ | 200V/50Hz<br>200-220V/60Hz | 2a2b                        | 1.1Kg  |

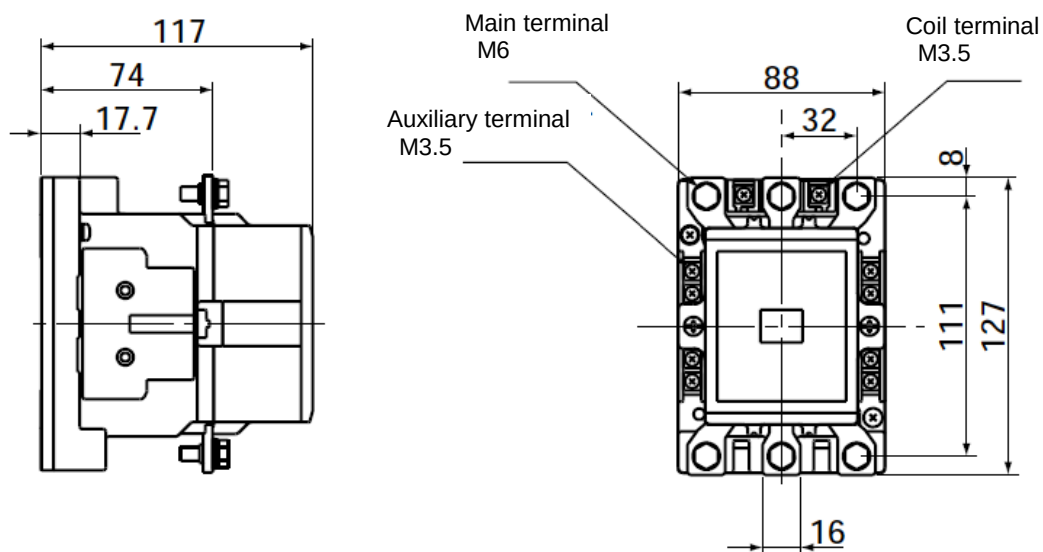
**(d) A06B-6077-K125**

Dimensions for drilling mounting holes

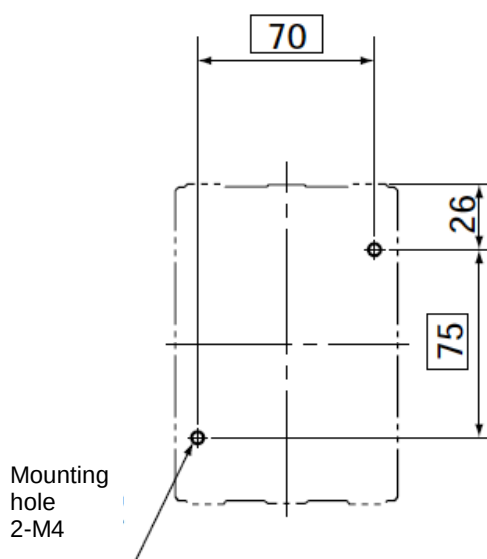


| Ordering drawing number | Fuji Electric part number |        | Operation coil voltage     | Auxiliary contact structure | Weight |
|-------------------------|---------------------------|--------|----------------------------|-----------------------------|--------|
|                         | Body                      | Cover  |                            |                             |        |
| A06B-6077-K125          | SC-N4                     | SZ-N4J | 200V/50Hz<br>200-220V/60Hz | 2a2b                        | 1.5Kg  |


(e) A06B-6077-K126

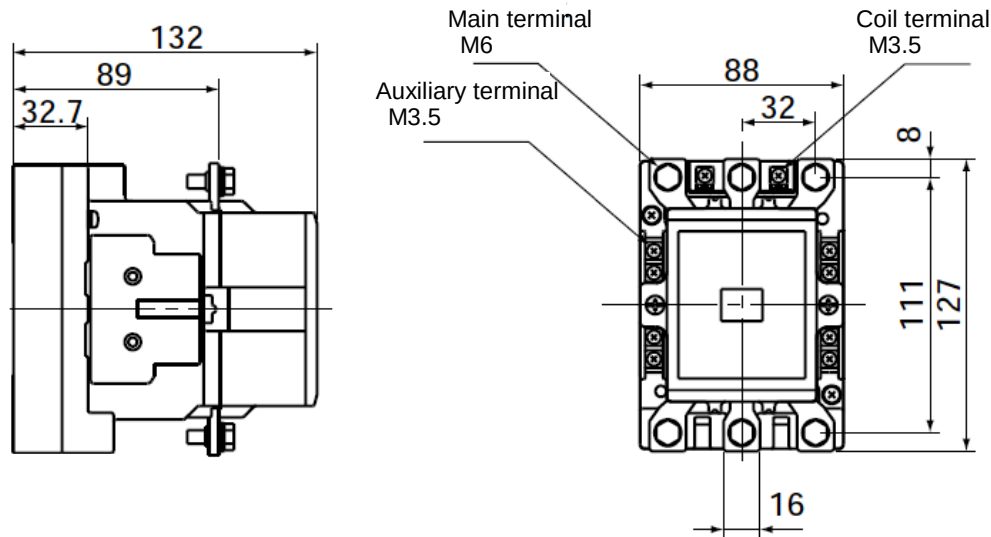

Dimensions for drilling mounting holes

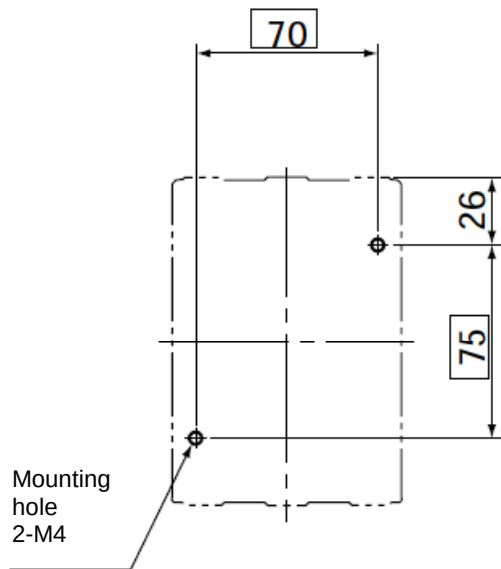


| Ordering drawing number | Fuji Electric part number |        | Operation coil voltage     | Auxiliary contact structure | Weight |
|-------------------------|---------------------------|--------|----------------------------|-----------------------------|--------|
|                         | Body                      | Body   |                            |                             |        |
| A06B-6077-K126          | SC-N5                     | SZ-N4J | 200V/50Hz<br>200-220V/60Hz | 2a2b                        | 1.8Kg  |

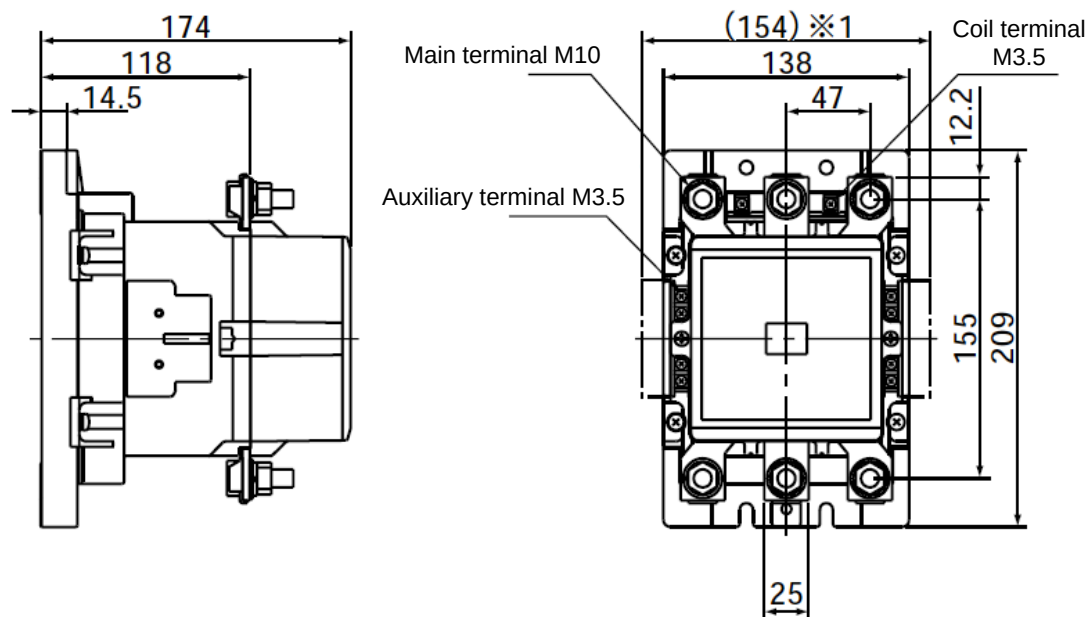**(f) A06B-6077-K127**


\*1 When two side-on auxiliary contact units are installed

Mounting hole 2-M6 Dimensions for drilling mounting holes

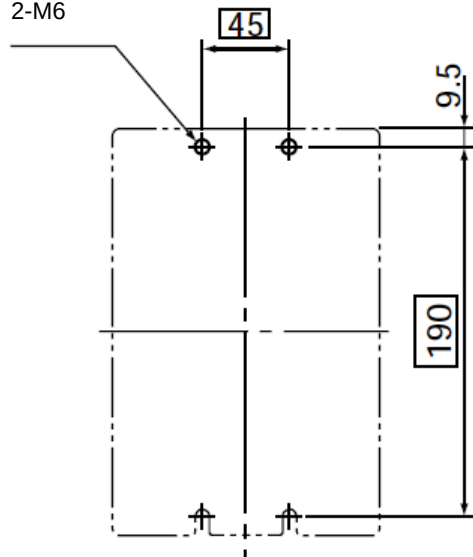


| Ordering drawing number | Fuji Electric part number |        | Operation coil voltage     | Auxiliary contact structure | Weight |
|-------------------------|---------------------------|--------|----------------------------|-----------------------------|--------|
|                         | Body                      | Body   |                            |                             |        |
| A06B-6077-K127          | SC-N8                     | SZ-N8J | 200V/50Hz<br>200-220V/60Hz | 2a2b                        | 4.9Kg  |

(g) A06B-6077-K128

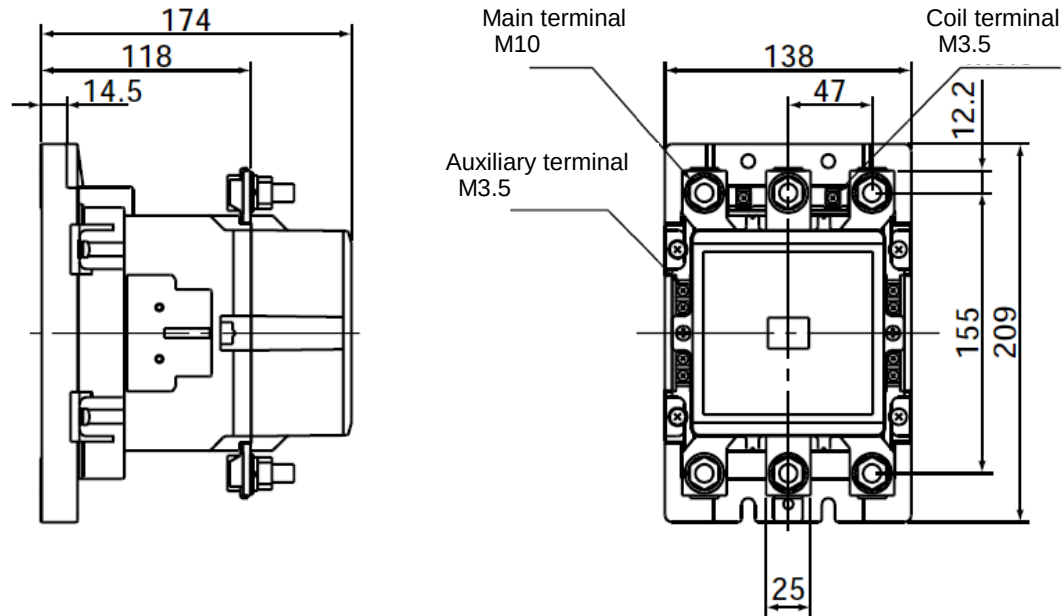


Dimensions for drilling mounting holes

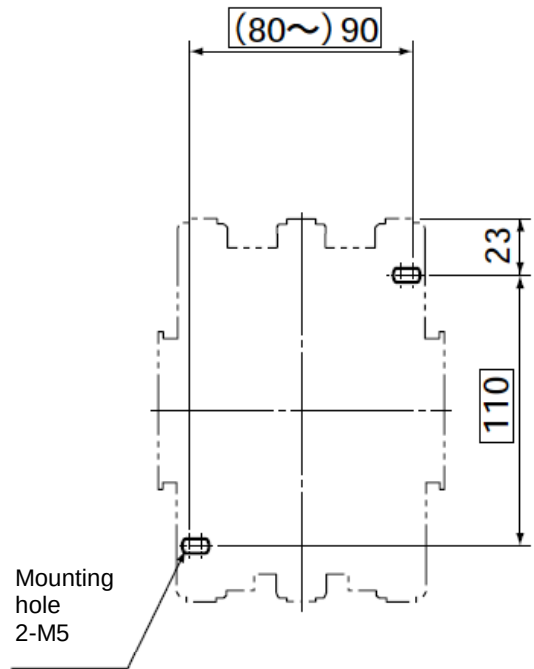

| Ordering drawing number | Fuji Electric part number |        | Operation coil voltage     | Auxiliary contact structure | Weight |
|-------------------------|---------------------------|--------|----------------------------|-----------------------------|--------|
|                         | Body                      | Body   |                            |                             |        |
| A06B-6077-K128          | SC-N7                     | SZ-N7J | 200V/50Hz<br>200-220V/60Hz | 2a2b                        | 2.7Kg  |

## 8.1.9 Lightning Surge Protector

### (a) A06B-6077-K142

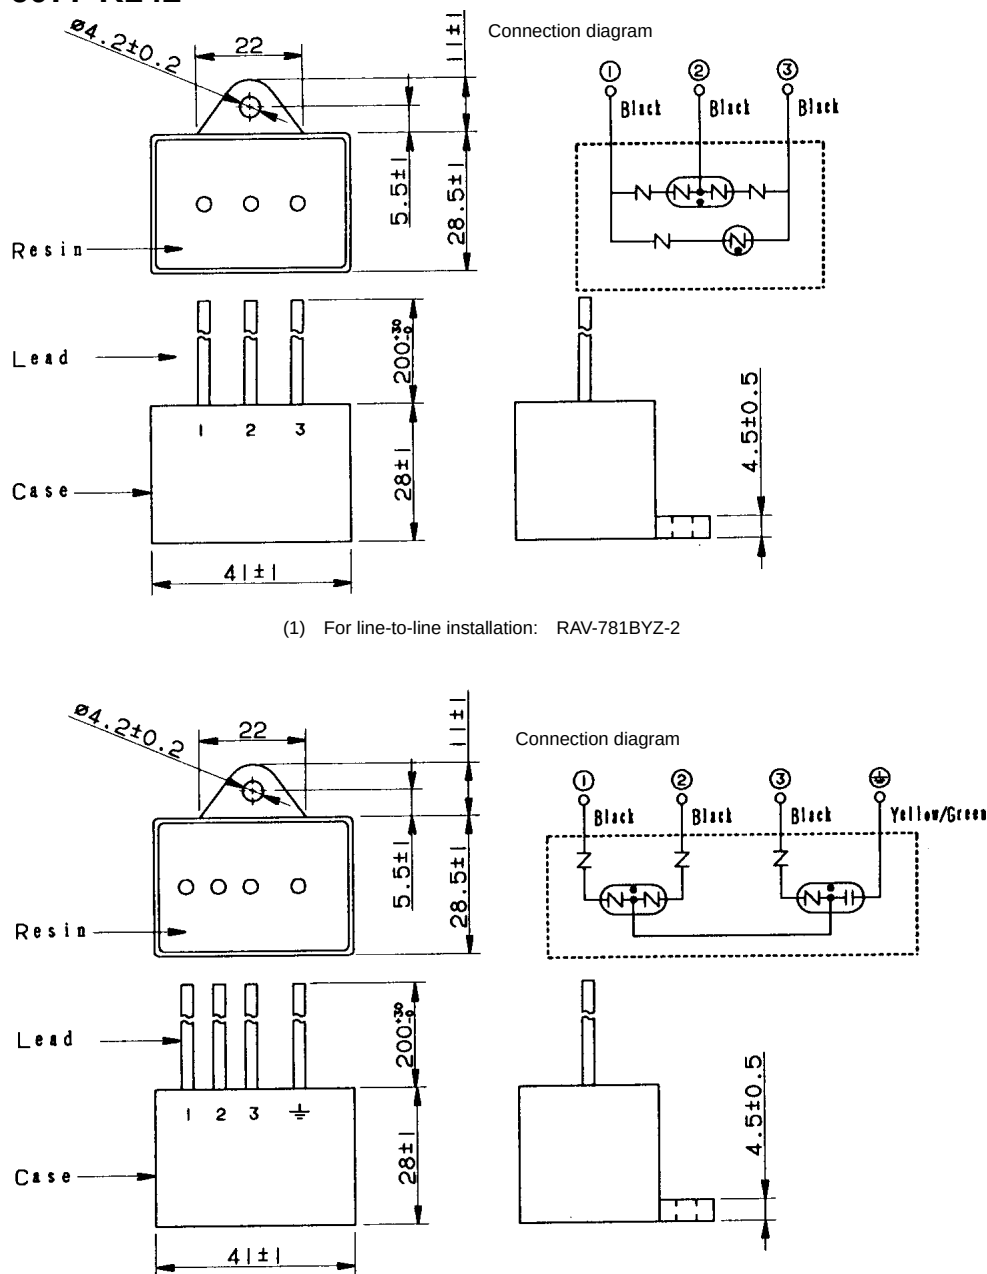


(1) For line-to-line installation: RAV-781BYZ-2

(2) For line-to-ground installation: RAV-781BXZ-4

| Specification  | Rated voltage | Clamp voltage            | Surge withstand current | Surge withstand voltage |
|----------------|---------------|--------------------------|-------------------------|-------------------------|
| R-A-V-781BYZ-2 | 250VAC        | 783VDC $\pm 10\%$ (V1.0) | 2500A(8/20 $\mu$ S)     | 20kV(1.2/50 $\mu$ S)    |

| Specification  | Rated voltage                                   | AC discharge start voltage | Surge withstand current | Maximum surge discharge start voltage |
|----------------|-------------------------------------------------|----------------------------|-------------------------|---------------------------------------|
| R-A-V-781BXZ-4 | line-to-line: 430VAC,<br>line-to-ground: 250VAC | 700VAC $\pm 20\%$ (Ua)     | 2500A(8/20 $\mu$ S)     | 2.0kV(1.2/50 $\mu$ S)                 |

(b) A06B-6077-K143

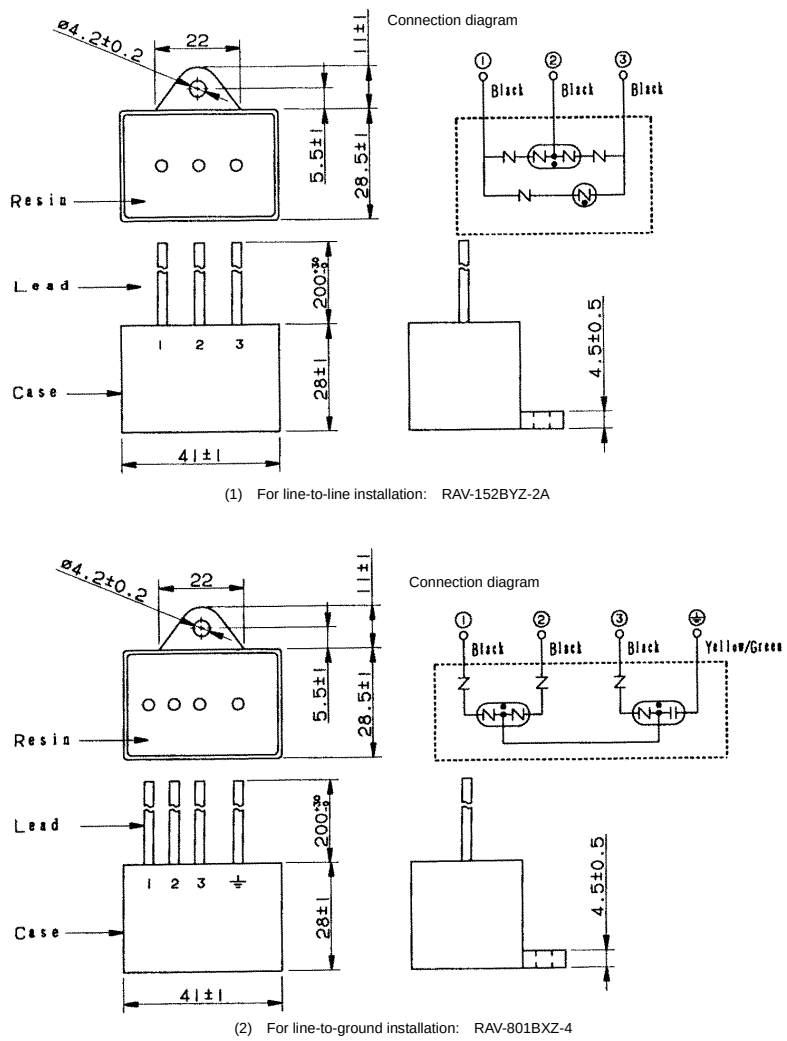


| Specification   | Rated voltage | Clamp voltage   | Surge withstand current | Surge withstand voltage |
|-----------------|---------------|-----------------|-------------------------|-------------------------|
| R·A·V-152BYZ-2A | 460VAC+15%    | 1470V±10%(V1.0) | 2500A(8/20μS)           | 20kV(1.2/50μS)          |

| Specification  | Rated voltage                                   | AC discharge start voltage | Surge withstand current | Maximum surge discharge start voltage |
|----------------|-------------------------------------------------|----------------------------|-------------------------|---------------------------------------|
| R·A·V-801BXZ-4 | line-to-line: 500VAC,<br>line-to-ground: 290VAC | AC800V±20%(Ua)             | 2500A(8/20μS)           | 2.32kV(1.2/50μS)                      |




(c) A06B-6077-K144

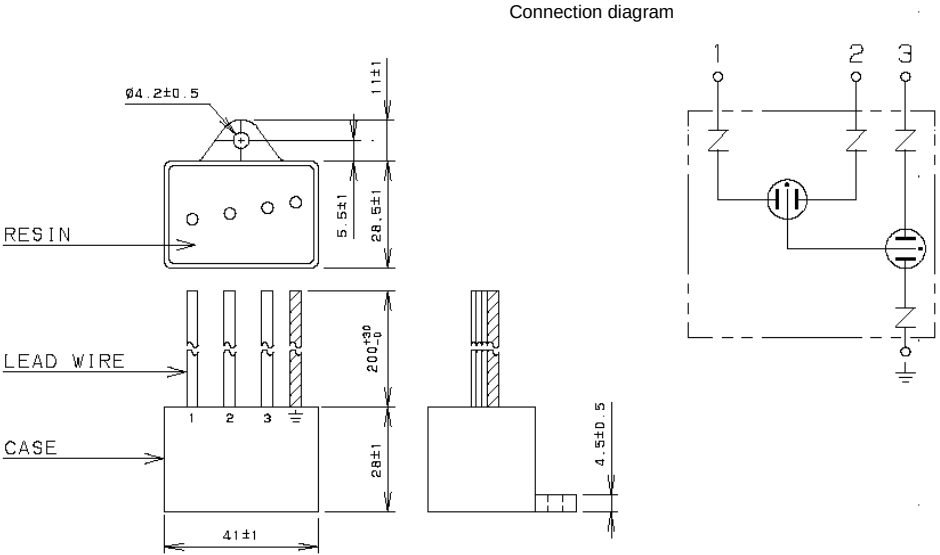

| Specification  | Rated voltage | AC discharge start voltage | Clamp voltage                | Surge withstand current | Surge withstand voltage  | Maximum surge discharge start voltage |
|----------------|---------------|----------------------------|------------------------------|-------------------------|--------------------------|---------------------------------------|
| R-C-M-601BUZ-4 | 250VAC        | 560VAC<br>$\pm 20\%(U_a)$  | 2000V<br>$\pm 10\%(V_{1.0})$ | 2500A<br>(8/20 $\mu$ S) | 20kV<br>(1.2/50 $\mu$ S) | 2kV<br>(1.2/50 $\mu$ S)               |

### 8.1.10 Noise Filter

#### (a) A06B-6077-K155 to -K158

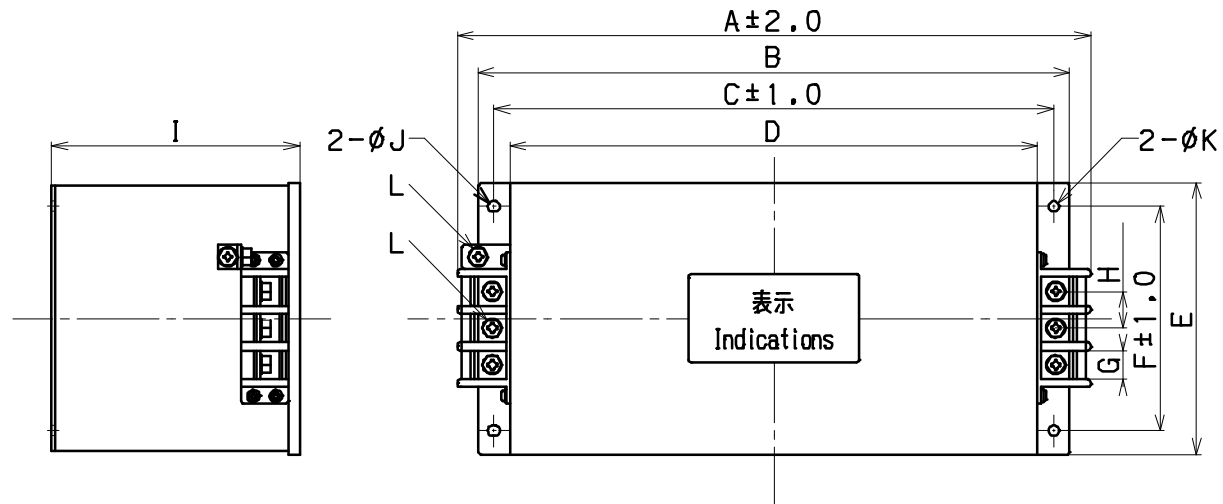


Unit : mm

General tolerance :  $\pm 1.5\text{mm}$

| Type                                | Dimensions (mm) |     |     |     |     |     |    |    |     |       |     |    |
|-------------------------------------|-----------------|-----|-----|-----|-----|-----|----|----|-----|-------|-----|----|
|                                     | A               | B   | C   | D   | E   | F   | G  | H  | I   | J     | K   | L  |
| A06B-6077-K155<br>(3SUP-HL30-ER-6)  | 246             | 230 | 215 | 200 | 100 | 85  | 13 | 18 | 140 | 4.5×7 | 4.5 | M4 |
| A06B-6077-K156<br>(3SUP-HL75-ER-6)  | 396             | 370 | 350 | 330 | 170 | 140 | 18 | 23 | 155 | 6.5×8 | 6.5 | M6 |
| A06B-6077-K157<br>(3SUP-HL150-ER-6) | 484             | 440 | 420 | 400 | 200 | 170 | 30 | 25 | 200 | 6.5×8 | 6.5 | M8 |
| A06B-6077-K158<br>(3SUP-HL200-ER-6) | 484             | 440 | 420 | 400 | 200 | 170 | 30 | 25 | 200 | 6.5×8 | 6.5 | M8 |


3SUP-HLx-ER-6: External dimensions of noise filter

## (b) A06B-6110-K160 to -K162

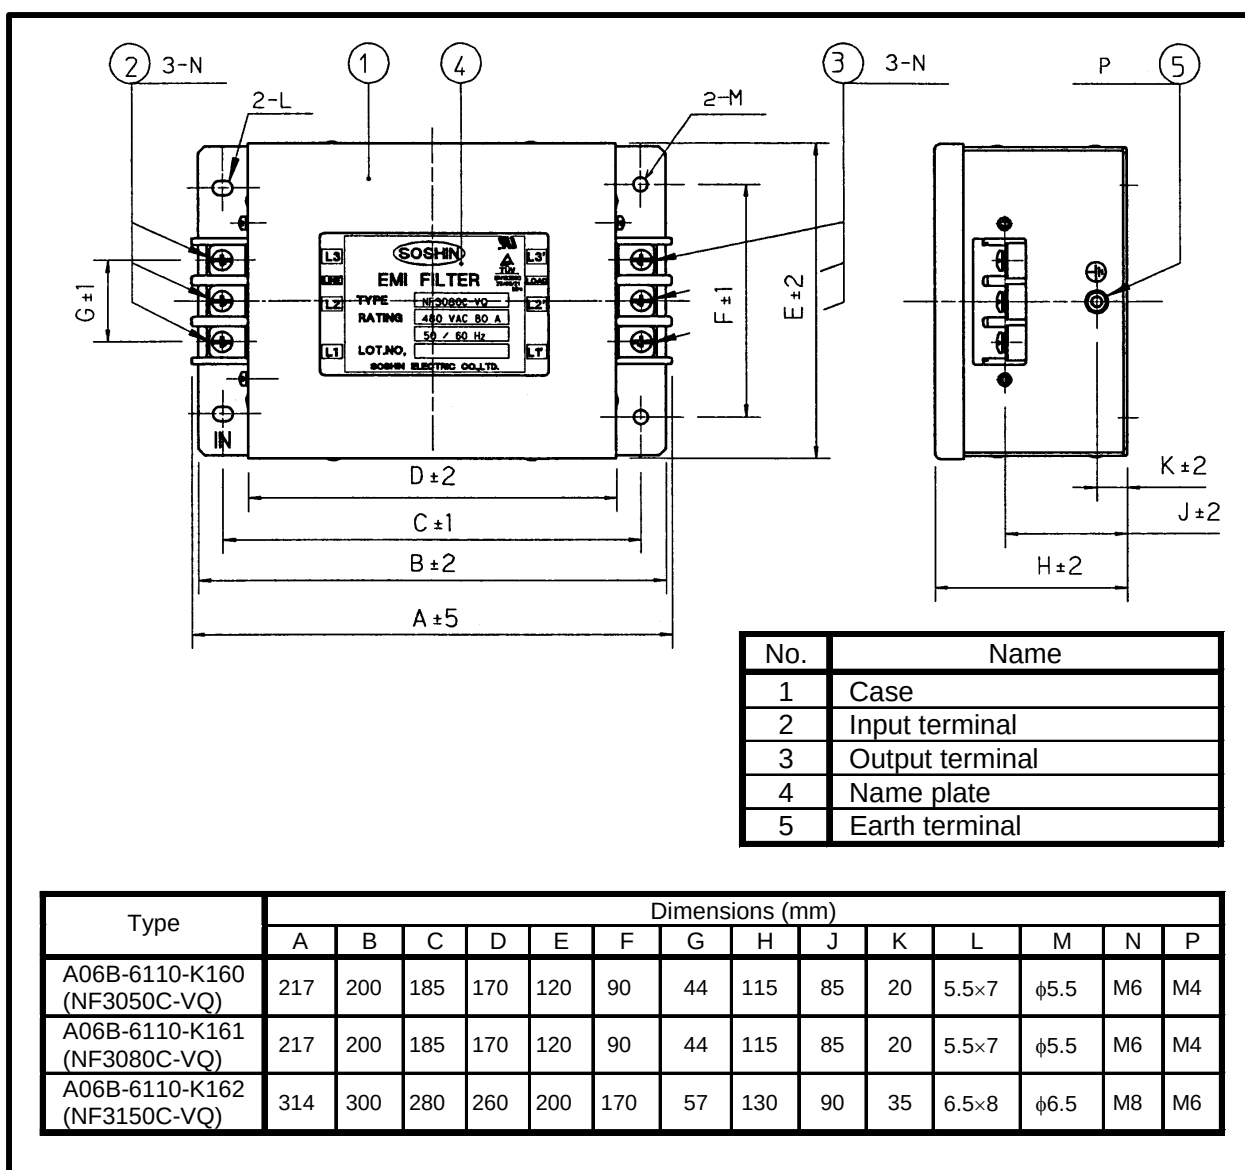

NF3050C/3080C/3150C-VQ: External dimensions of noise filter

(c) A06B-6110-K163,K164

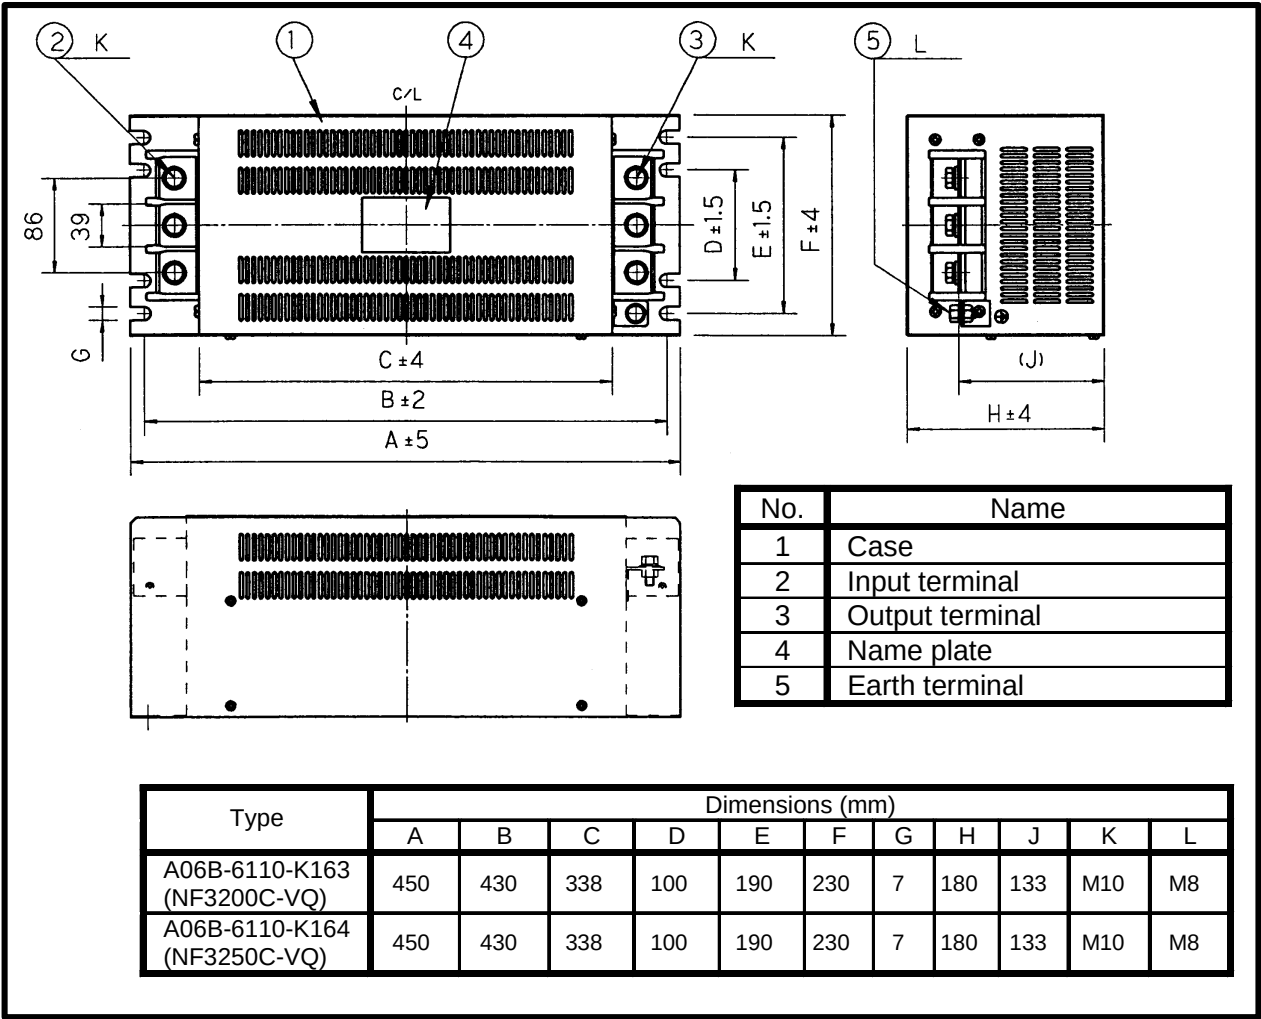


NF3200C/3250C-VQ: External dimensions of noise filter


## 8.2 PANEL CUT-OUT DIAGRAMS

### (a) 60-mm-wide amplifier

With no external fin

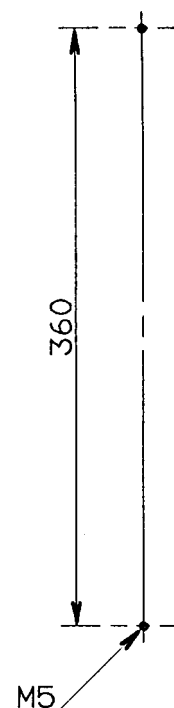

With external fin (when two units are installed side by side)

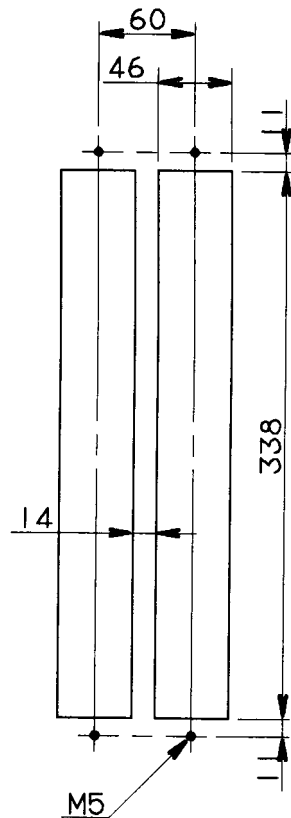


#### NOTE


- 1 When an external fin is provided, attach a packing (acrylonitrile-butadiene rubber, NBR [soft type]) to the fin to protect it against oil and dust.
- 2 Reinforce the right and left sides of the panel cut-out in the power magnetics cabinet by using fittings such as angles to maintain satisfactory contact between the sheet metal of the power magnetics cabinet and the flange of the amplifier.

**(b) 90-mm-wide amplifier**


With no external fin

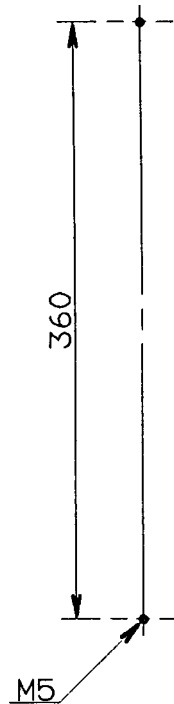


With external fin (when two units are installed side by side)

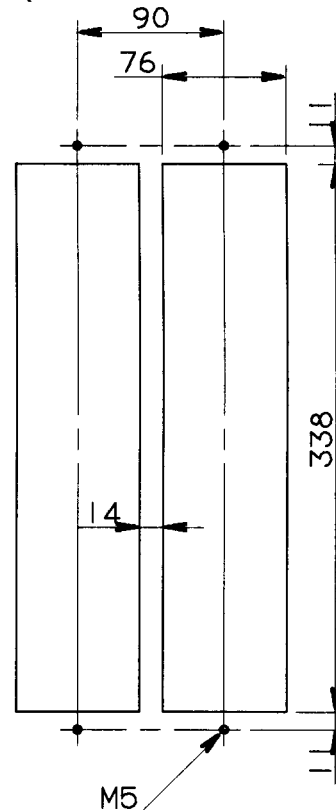**NOTE**

- 1 When an external fin is provided, attach a packing (acrylonitrile-butadiene rubber, NBR [soft type]) to the fin to protect it against oil and dust.
- 2 Reinforce the right and left sides of the panel cut-out in the power magnetics cabinet by using fittings such as angles to maintain satisfactory contact between the sheet metal of the power magnetics cabinet and the flange of the amplifier.


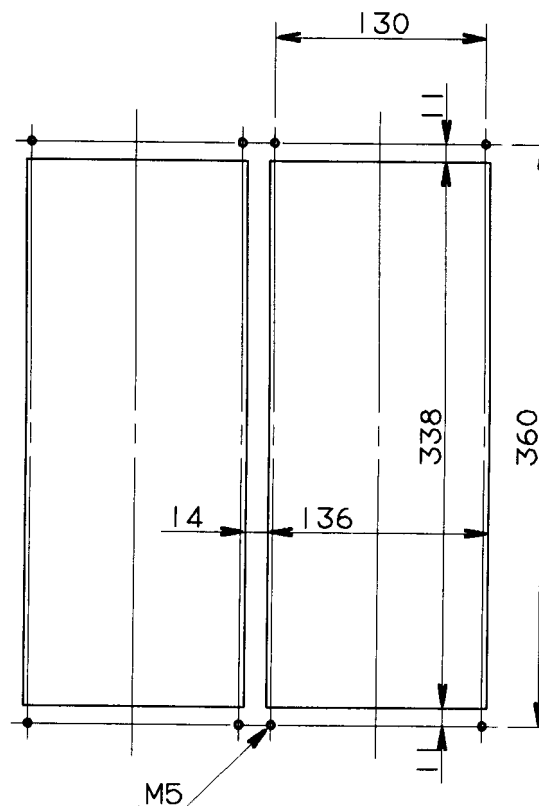
**(c) 150-mm-wide amplifier (when two units are installed side-by-side)****NOTE**

- 1 Attach a packing (acrylonitrile-butadiene rubber, NBR [soft type]) for protection against oil and dust.
- 2 Reinforce the right and left sides of the panel cut-out in the power magnetics cabinet by using fittings such as angles to maintain satisfactory contact between the sheet metal of the power magnetics cabinet and the flange of the amplifier.

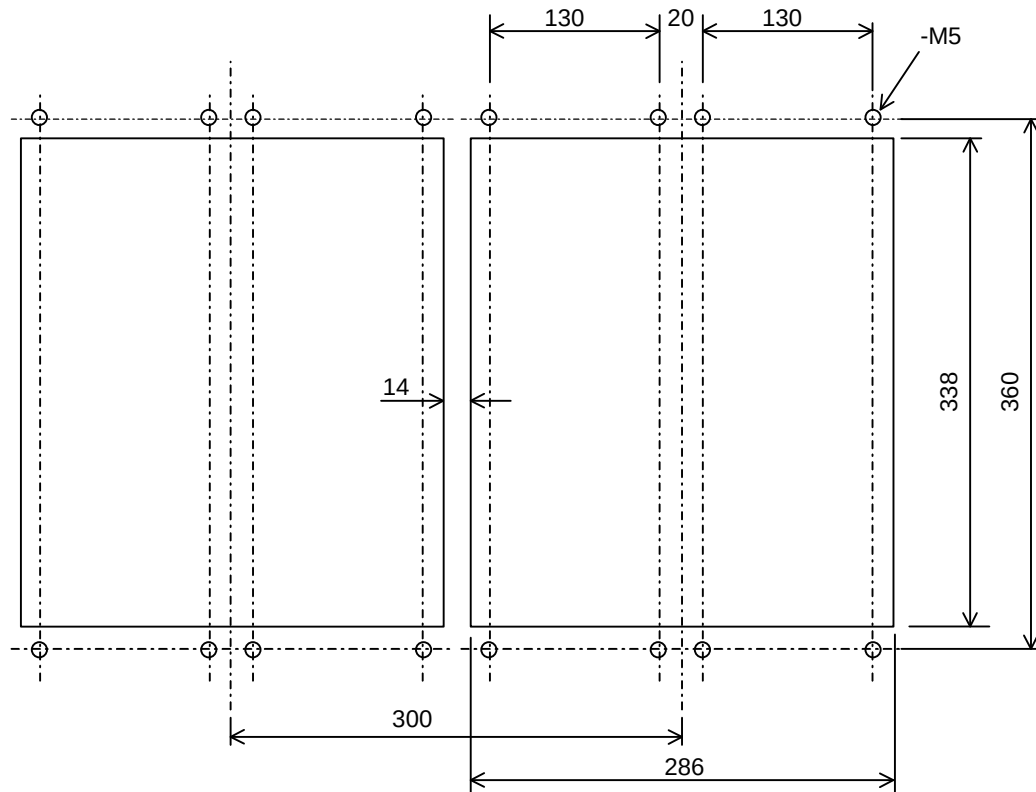
**(d) 300-mm-wide amplifier (when two units are installed side-by-side)****NOTE**

- 1 Attach a packing (acrylonitrile-butadiene rubber, NBR [soft type]) for protection against oil and dust.
- 2 Reinforce the right and left sides of the panel cut-out in the power magnetics cabinet by using fittings such as angles to maintain satisfactory contact between the sheet metal of the power magnetics cabinet and the flange of the amplifier.

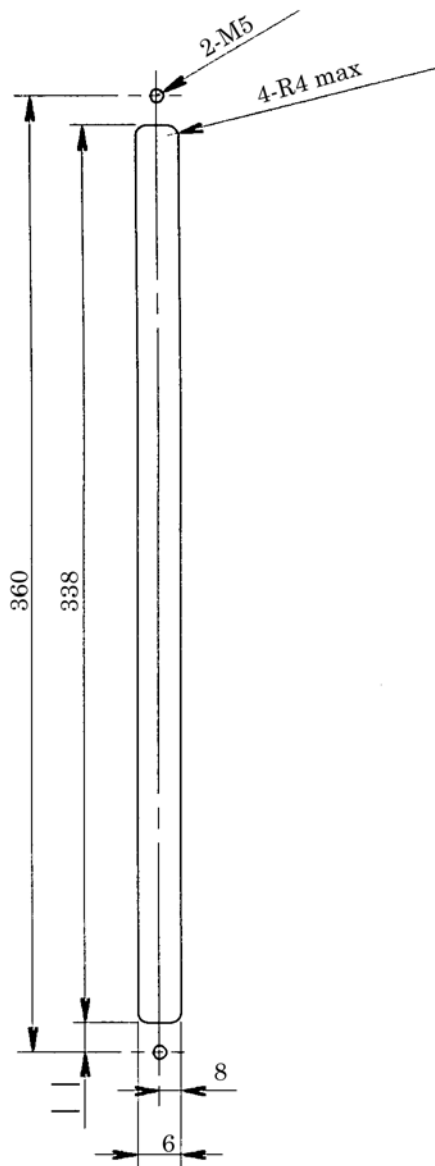
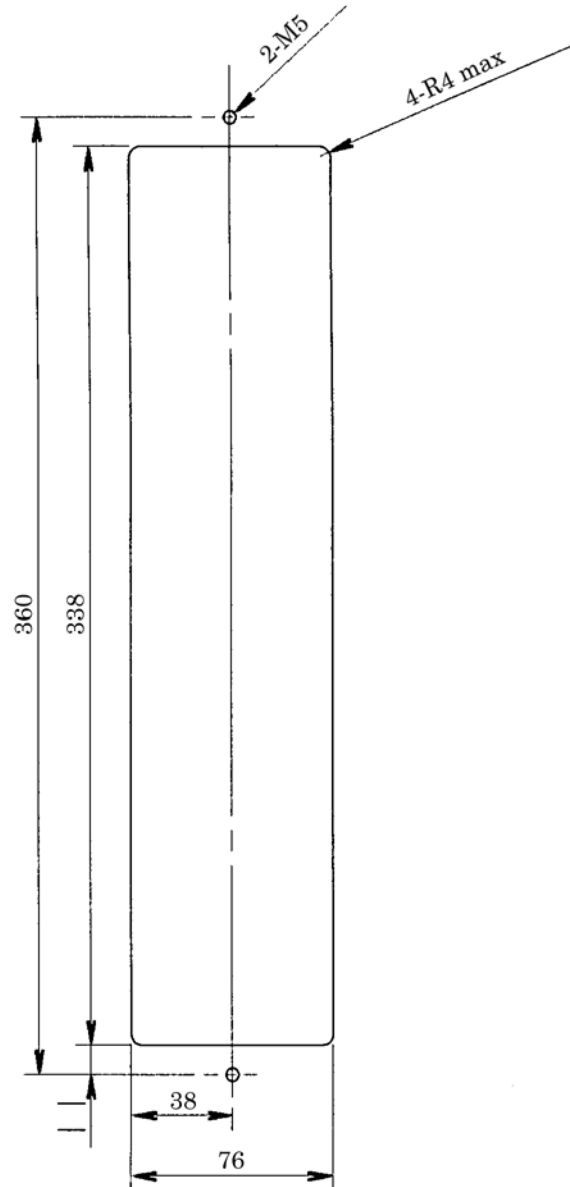


**(e) Regenerative discharge unit  
(A06B-6089-H510)****(f) Regenerative discharge unit  
(A06B-6089-H500)****NOTE**

Attach a packing (acrylonitrile-butadiene rubber, NBR [soft type]) for protection against oil and dust.

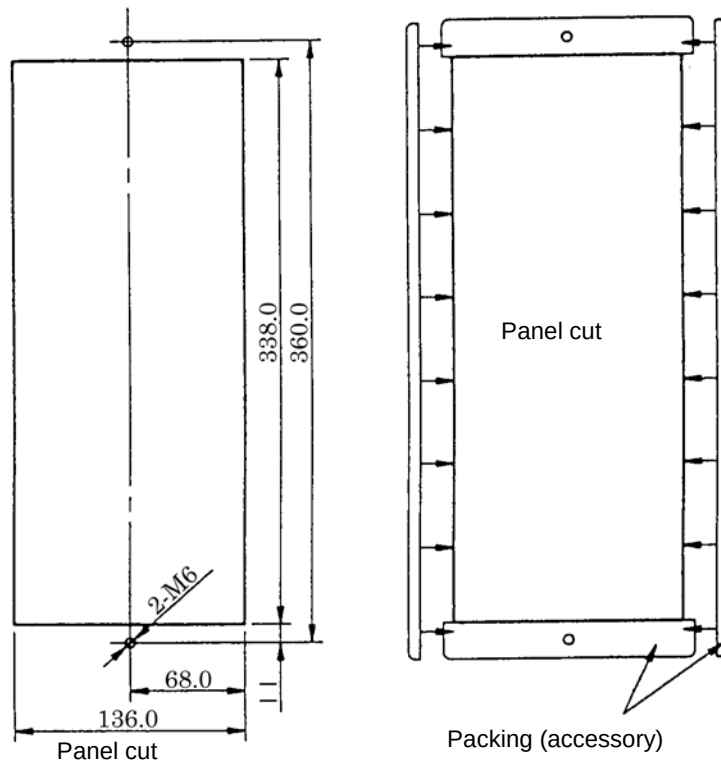**(g) Regenerative discharge unit (A06B-6089-H711 to -H713)****NOTE**

Attach a packing (acrylonitrile-butadiene rubber, NBR [soft type]) for protection against oil and dust.

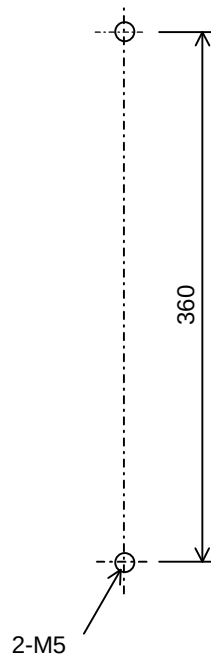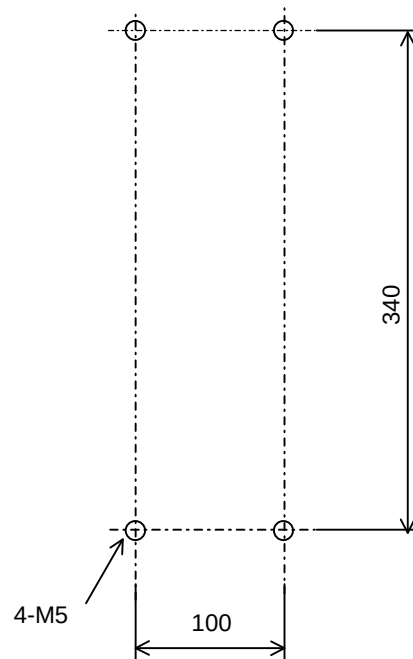**(h) Dynamic brake module****A06B-6079-H401****A06B-6069-H300**

# 9

## CONNECTION

---


Chapter 9, "CONNECTION", consists of the following sections:

|     |                                |     |
|-----|--------------------------------|-----|
| 9.1 | TOTAL CONNECTION DIAGRAM.....  | 193 |
| 9.2 | CONNECTOR LOCATION .....       | 195 |
| 9.3 | CABLE CONNECTION DETAILS ..... | 207 |
| 9.4 | DETAILS OF CONNECTORS .....    | 301 |

## 9.1 TOTAL CONNECTION DIAGRAM

The following connection diagram is an example of combining a  $\alpha i$  PS + a  $\alpha i$  SP + a 2-axis  $\alpha i$  SV. For detailed descriptions about how to connect these amplifiers, see their respective connection diagrams.


### 200-V input series

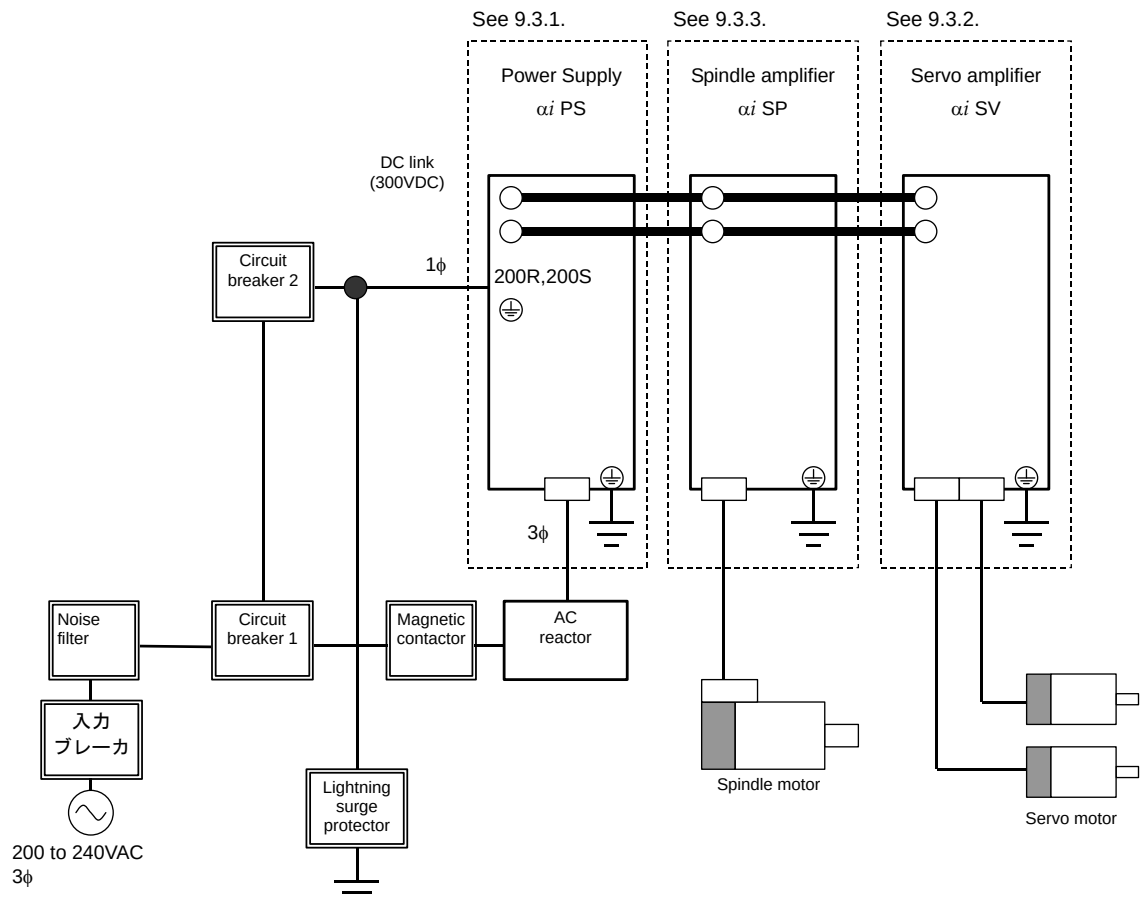

#### ⚠ CAUTION

- 1 To meet the EMC Directive operating in EU countries, a noise filter must be installed.
- 2 Install the noise filter more nearer to the power supply than the magnetic contactor.
- 3 When the circuit breaker trips, the contact of the magnetic contactor may be melted. Before turning on the circuit breaker, make sure that the contact is not melted.

## 400-V input series

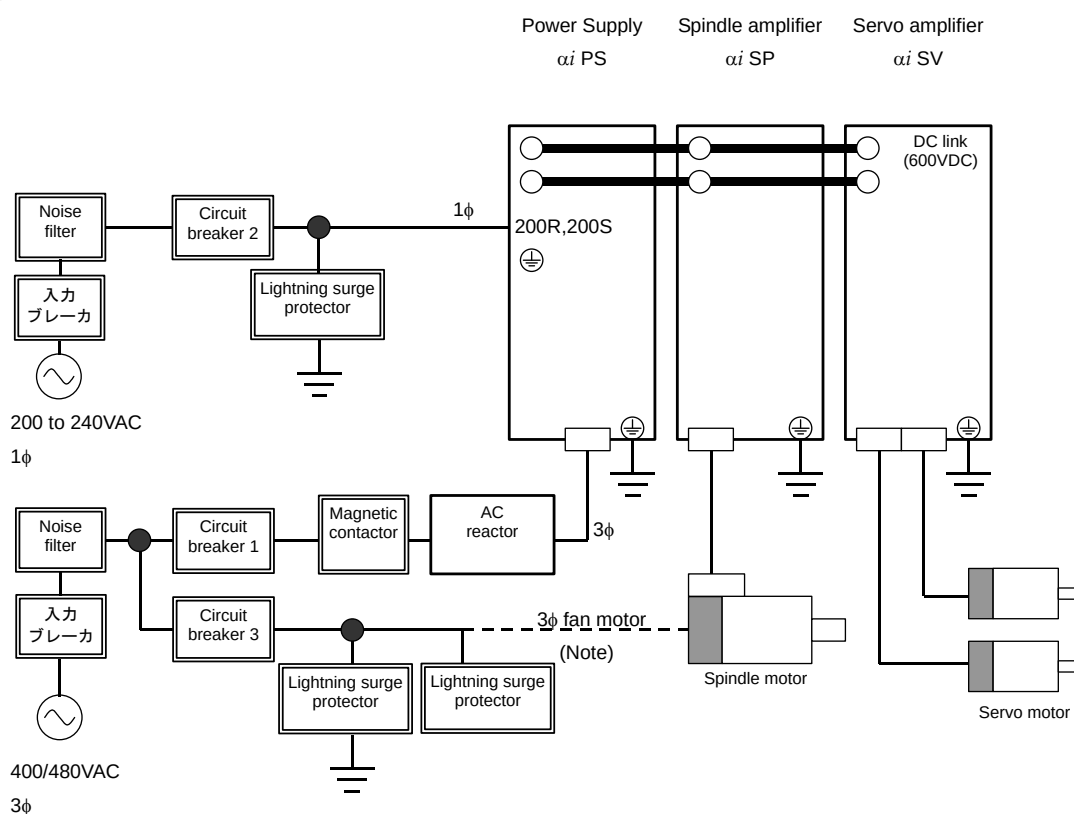**CAUTION**

- 1 When the spindle motor model  $\alpha i$  I 1HV,  $\alpha i$  I 1.5HV,  $\alpha i$  I 2HVi,  $\alpha i$  I 3HV,  $\alpha i$  I<sub>T</sub> 1HV,  $\alpha i$  I<sub>T</sub> 2HV, and  $\alpha i$  I<sub>T</sub> 3HV is used, the specification of the fan motor is below: Single phase, 200/230 VAC
- 2 To meet the EMC Directive operating in EU countries, a noise filter must be installed.
- 3 Install the noise filter more nearer to the power supply than the magnetic contactor.
- 4 When the circuit breaker trips, the contact of the magnetic contactor may be melted. Before turning on the circuit breaker, make sure that the contact is not melted.
- 5 Breaker 3 is used to interrupt the lightning surge protector. Since the lightning surge protector is disabled if breaker 3 trips, it is necessary to issue a warning during the trip.

**NOTE**

When the power specification of the fan motor of the spindle motor is 400 V, breaker 3 can also be used for the fan motor.

## 9.2 CONNECTOR LOCATION

### 9.2.1 $\alpha i$ PS series

#### (a) $\alpha i$ PS 5.5

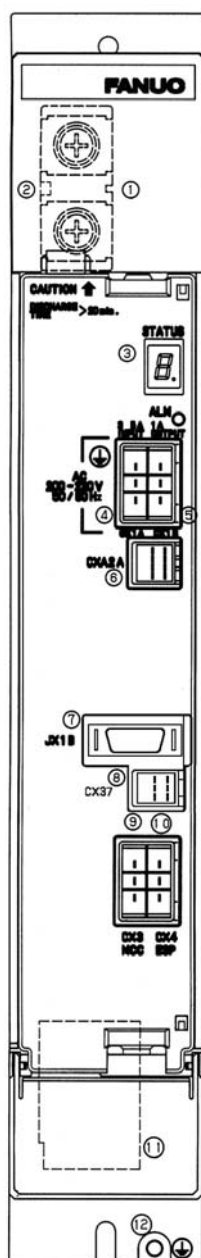


Table.9.2.1(a) Names of connectors and terminal blocks

|    | Names                                                                        | Display                                                                               | Remarks                        |
|----|------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|--------------------------------|
| 1  | DC link terminal block                                                       |                                                                                       | Display the terminal block TB1 |
| 2  | DC link charge LED                                                           |                                                                                       | (Warning)                      |
| 3  | Status LED                                                                   | STATUS                                                                                |                                |
| 4  | 200VAC input connector                                                       | CX1A                                                                                  |                                |
| 5  | 200VAC output connector                                                      | CX1B                                                                                  |                                |
| 6  | Output connector for $\alpha i$ PS interface                                 | CXA2A                                                                                 | 24VDC power supply             |
| 7  | Connector for connecting power failure backup module                         | JX1B                                                                                  |                                |
| 8  | Connector for power failure detection output                                 | CX37                                                                                  |                                |
| 9  | Connector for connecting main power supply magnetic contactor control signal | CX3                                                                                   |                                |
| 10 | Connector for ESP signal                                                     | CX4                                                                                   |                                |
| 11 | Connector for motor power line                                               | CZ1                                                                                   |                                |
| 12 | Tapped hole for grounding the flange                                         |  |                                |

#### WARNING

When the DC link charge LED is lit, touching parts in the amplifier or cables connected is hazardous; never touch them.

#### CAUTION

A06B-6110-H\*\*\*\* and A06B-6120-H\*\*\*\* do not have CX37.

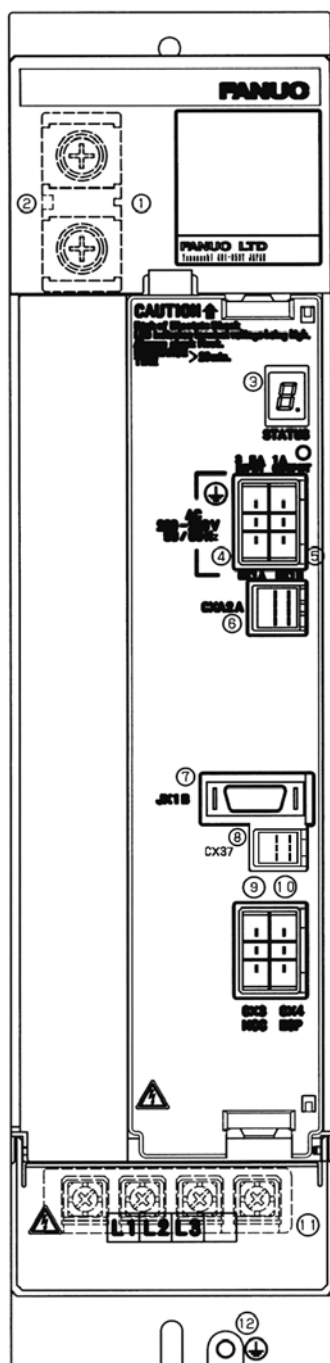
(b)  $\alpha i$  PS 11,  $\alpha i$  PS 15 ,  $\alpha i$  PS 11HV,  $\alpha i$  PS 18HV

Table.9.2.1(b) Names of connectors and terminal blocks

|    | Names                                                                        | Display | Remarks                        |
|----|------------------------------------------------------------------------------|---------|--------------------------------|
| 1  | DC link terminal block                                                       |         | Display the terminal block TB1 |
| 2  | DC link charge LED                                                           |         | (Warning)                      |
| 3  | Status LED                                                                   | STATUS  |                                |
| 4  | 200VAC input connector                                                       | CX1A    |                                |
| 5  | 200VAC output connector                                                      | CX1B    |                                |
| 6  | Output connector for $\alpha i$ PS interface                                 | CXA2A   | 24VDC power supply             |
| 7  | Connector for connecting power failure backup module                         | JX1B    |                                |
| 8  | Connector for power failure detection output                                 | CX37    |                                |
| 9  | Connector for connecting main power supply magnetic contactor control signal | CX3     |                                |
| 10 | Connector for ESP signal                                                     | CX4     |                                |
| 11 | Terminal block for motor power line                                          | TB2     |                                |
| 12 | Tapped hole for grounding the flange                                         |         |                                |

**⚠ WARNING**

When the DC link charge LED is lit, touching parts in the amplifier or cables connected is hazardous; never touch them.

**⚠ CAUTION**

A06B-6110-H\*\*\*\* and A06B-6120-H\*\*\*\* do not have CX37.



(c)  $\alpha i$  PS 26,  $\alpha i$  PS 30,  $\alpha i$  PS 37,  $\alpha i$  PS 30HV,  $\alpha i$  PS 45HV

Table.9.2.1(c) Names of connectors and terminal blocks


|    | Names                                                | Display                                                                              | Remarks                        |
|----|------------------------------------------------------|--------------------------------------------------------------------------------------|--------------------------------|
| 1  | DC link terminal block                               |                                                                                      | Display the terminal block TB1 |
| 2  | DC link charge LED                                   |                                                                                      | (Warning)                      |
| 3  | Status LED                                           | STATUS                                                                               |                                |
| 4  | 200VAC input connector                               | CX1A                                                                                 |                                |
| 5  | 200VAC output connector                              | CX1B                                                                                 |                                |
| 6  | Output connector for $\alpha i$ PS interface         | CXA2A                                                                                | 24VDC power supply             |
| 7  | Connector for connecting power failure backup module | JX1B                                                                                 |                                |
| 8  | Connector for power failure detection output         | CX37                                                                                 |                                |
| 9  | Connector for main power MCC control signal          | CX3                                                                                  |                                |
| 10 | Connector for ESP signal                             | CX4                                                                                  |                                |
| 11 | Terminal block for motor power line                  | TB2                                                                                  |                                |
| 12 | Tapped hole for grounding the flange                 |  |                                |

**WARNING**

When the DC link charge LED is lit, touching parts in the amplifier or cables connected is hazardous; never touch them.

**CAUTION**

A06B-6110-H\*\*\*\* and A06B-6120-H\*\*\*\* do not have CX37.

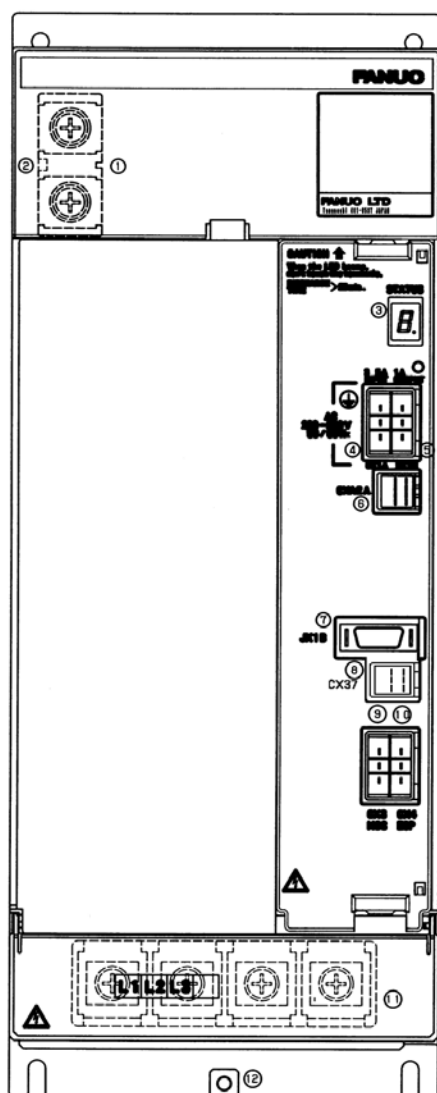

**(d)  $\alpha i$  PS 55,  $\alpha i$  PS 75HV,  $\alpha i$  PS 100HV****Table.9.2.1(d) Names of connectors and terminal blocks**


|    | Names                                                | Display                                                                             | Remarks                        |
|----|------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------|
| 1  | DC link terminal block                               |                                                                                     | Display the terminal block TB1 |
| 2  | DC link charge LED                                   |                                                                                     | (Warning)                      |
| 3  | Status LED                                           | STATUS                                                                              |                                |
| 4  | 200VAC input connector                               | CX1A                                                                                |                                |
| 5  | 200VAC output connector                              | CX1B                                                                                |                                |
| 6  | Output connector for $\alpha i$ PS interface         | CXA2A                                                                               | 24VDC power supply             |
| 7  | Connector for connecting power failure backup module | JX1B                                                                                |                                |
| 8  | Connector for power failure detection output         | CX37                                                                                |                                |
| 9  | Connector for main power MCC control signal          | CX3                                                                                 |                                |
| 10 | Connector for ESP signal                             | CX4                                                                                 |                                |
| 11 | Terminal block for motor power line                  | TB2                                                                                 |                                |
| 12 | Tapped hole for grounding the flange                 |  |                                |

**WARNING**

When the DC link charge LED is lit, touching parts in the amplifier or cables connected is hazardous; never touch them.

**CAUTION**

A06B-6110-H\*\*\*\* and A06B-6120-H\*\*\*\* do not have CX37.

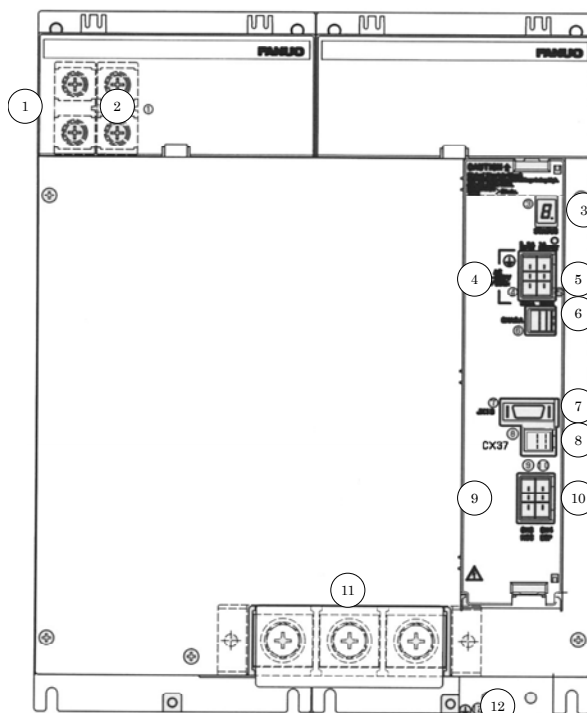

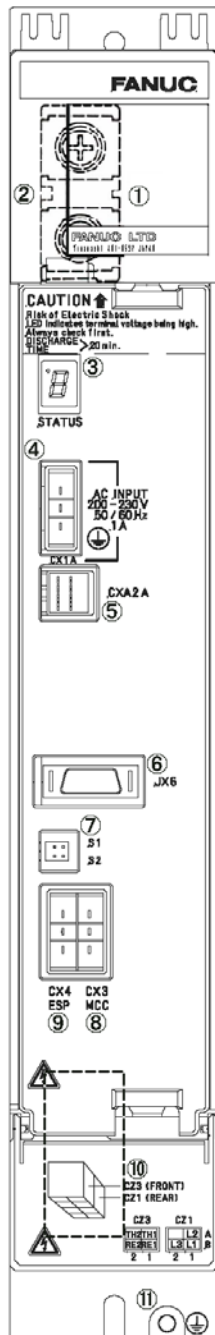
(e)  $\alpha i$  PS<sub>R</sub> 3 ,  $\alpha i$  PS<sub>R</sub> 5.5

Table.9.2.1(e) Names of connectors and terminal blocks

|      | Names                                              | Display  | Remarks                        |
|------|----------------------------------------------------|----------|--------------------------------|
| 1    | DC link terminal block                             |          | Display the terminal block TB1 |
| 2    | DC link charge LED                                 |          | (Warning)                      |
| 3    | Status LED                                         | STATUS   |                                |
| 4    | 200VAC input connector                             | CX1A     |                                |
| 5    | Output connector for $\alpha i$ PS interface       | CXA2A    | 24VDC power supply             |
| 6    | Not used                                           | JX6      |                                |
| 7    | Not used                                           | S1<br>S2 | S1 : Connected<br>S2 : Open    |
| 8    | Connector for main power MCC control signal        | CX3      |                                |
| 9    | Connector for ESP signal                           | CX4      |                                |
| 10-1 | Terminal block for motor power line                | CZ1      | XX key                         |
| 10-2 | Terminal block for regenerative discharge resistor | CZ3      | YY key                         |
| 11   | Tapped hole for grounding the flange               |          |                                |

**⚠ WARNING**

When the DC link charge LED is lit, touching parts in the amplifier or cables connected is hazardous; never touch them.

## 9.2.2 $\alpha i$ SV series

### (a) 60/90mm-wide $\alpha i$ SV series

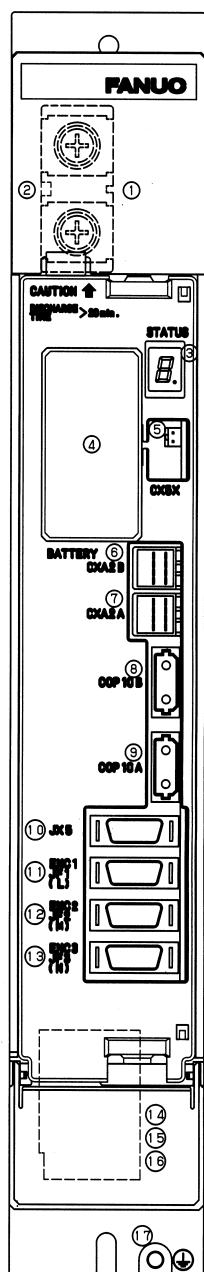


Table.9.2.2(a) Names of connectors and terminal blocks

| No. | Names                                                                             | Display                                                                               | Remarks                                                                                |
|-----|-----------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------|
| 1   | DC link terminal block                                                            |                                                                                       | Display the terminal block TB1                                                         |
| 2   | DC link charge LED                                                                |                                                                                       | (Warning)                                                                              |
| 3   | Status LED                                                                        | STATUS                                                                                |                                                                                        |
| 4   | Location of the batteries for the $\alpha i$ SV built-in-type absolute Pulsecoder | BATTERY                                                                               |                                                                                        |
| 5   | Battery connector for the $\alpha i$ SV built-in-type absolute Pulsecoder         | CX5X                                                                                  |                                                                                        |
| 6   | Input connector for $\alpha i$ PS interface                                       | CXA2B                                                                                 | 24VDC power supply<br>The interface for the absolute Pulsecoder batteries is included. |
| 7   | Output connector for $\alpha i$ PS interface                                      | CXA2A                                                                                 |                                                                                        |
| 8   | FSSB optical input connector                                                      | COP10B                                                                                |                                                                                        |
| 9   | FSSB optical output connector                                                     | COP10A                                                                                |                                                                                        |
| 10  | Signal check connector                                                            | JX5                                                                                   | Unused                                                                                 |
| 11  | Pulsecoder connector : L axis                                                     | ENC1/JF1                                                                              |                                                                                        |
| 12  | Pulsecoder connector : M axis                                                     | ENC2/JF2                                                                              |                                                                                        |
| 13  | Pulsecoder connector : N axis                                                     | ENC3/JF3                                                                              |                                                                                        |
| 14  | Connector for motor power line: L axis                                            | CZ2L                                                                                  | For $\alpha i$ SV 1-axis, CZ2                                                          |
| 15  | Connector for motor power line: M axis                                            | CZ2M                                                                                  |                                                                                        |
| 16  | Connector for motor power line: N axis                                            | CZ2N                                                                                  |                                                                                        |
| 17  | Tapped hole for grounding the flange                                              |  |                                                                                        |

#### WARNING

When the DC link charge LED is lit, touching parts in the amplifier or cables connected is hazardous; never touch them.

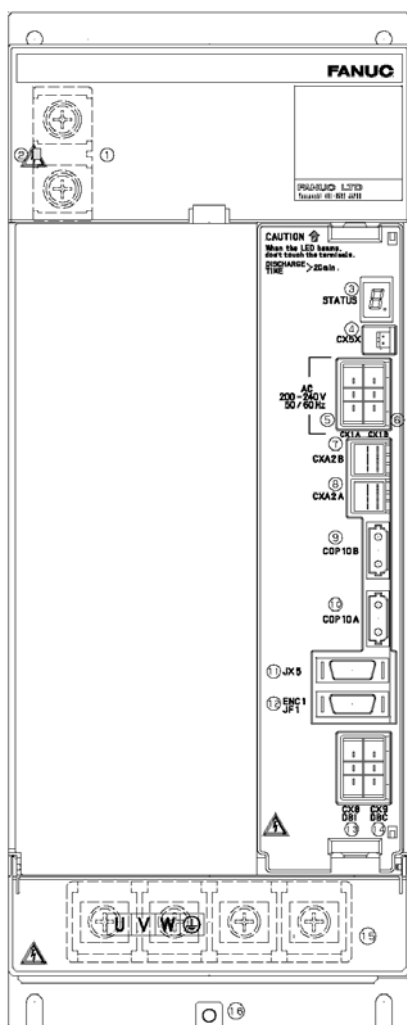
(b)  $\alpha i$  SV 360,  $\alpha i$  SV 180HV

Table.9.2.2(b) Names of connectors and terminal blocks

| No. | Names                                                                       | Display  | Remarks                                                                                |
|-----|-----------------------------------------------------------------------------|----------|----------------------------------------------------------------------------------------|
| 1   | DC link terminal block                                                      |          | Display the terminal block TB1                                                         |
| 2   | DC link charge LED                                                          |          | (Warning)                                                                              |
| 3   | Status LED                                                                  | STATUS   |                                                                                        |
| 4   | Battery connector for the $\alpha i$ SV built-in-type absolute Pulsecoder   | CX5X     |                                                                                        |
| 5   | 200VAC power supply input connector                                         | CX1A     | Power supply for DB                                                                    |
| 6   | 200VAC power supply input connector                                         | CX1B     |                                                                                        |
| 7   | Input connector for $\alpha i$ PS interface                                 | CXA2B    | 24VDC power supply<br>The interface for the absolute Pulsecoder batteries is included. |
| 8   | Output connector for $\alpha i$ PS interface                                | CXA2A    |                                                                                        |
| 9   | FSSB optical input connector                                                | COP10B   |                                                                                        |
| 10  | FSSB optical output connector                                               | COP10A   |                                                                                        |
| 11  | Signal check connector                                                      | JX5      | Unused                                                                                 |
| 12  | Pulsecoder connector                                                        | ENC1/JF1 |                                                                                        |
| 13  | Dynamic module interface for connector                                      | CX8      |                                                                                        |
| 14  | Connector for the magnetic contactor drive coil of the dynamic brake module | CX9      |                                                                                        |
| 15  | Terminal block for connection to motor power line                           |          | Display the terminal block TB2                                                         |
| 16  | Tapped hole for grounding the flange                                        |          |                                                                                        |

**⚠ WARNING**

When the DC link charge LED is lit, touching parts in the amplifier or cables connected is hazardous; never touch them.


(c)  $\alpha i$  SV 360HV

Table.9.2.2(c) Names of connectors and terminal blocks

| No. | Names                                                                       | Display                                                                               | Remarks                                                                                |
|-----|-----------------------------------------------------------------------------|---------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------|
| 1   | DC link terminal block                                                      |                                                                                       | Display the terminal block TB1                                                         |
| 2   | DC link charge LED                                                          |                                                                                       | (Warning)                                                                              |
| 3   | Status LED                                                                  | STATUS                                                                                |                                                                                        |
| 4   | Battery connector for the $\alpha i$ SV built-in-type absolute Pulsecoder   | CX5X                                                                                  |                                                                                        |
| 5   | 200VAC power supply input connector                                         | CX1A                                                                                  | power supply for DB                                                                    |
| 6   | 200VAC power supply input connector                                         | CX1B                                                                                  |                                                                                        |
| 7   | Input connector for $\alpha i$ PS interface                                 | CXA2B                                                                                 | 24VDC power supply<br>The interface for the absolute Pulsecoder batteries is included. |
| 8   | Output connector for $\alpha i$ PS interface                                | CXA2A                                                                                 |                                                                                        |
| 9   | FSSB optical input connector                                                | COP10B                                                                                |                                                                                        |
| 10  | FSSB optical output connector                                               | COP10A                                                                                |                                                                                        |
| 11  | Signal check connector                                                      | JX5                                                                                   | Unused                                                                                 |
| 12  | Pulsecoder connector                                                        | ENC1/JF1                                                                              |                                                                                        |
| 13  | Dynamic module interface for connector                                      | CX8                                                                                   |                                                                                        |
| 14  | Connector for the magnetic contactor drive coil of the dynamic brake module | CX9                                                                                   |                                                                                        |
| 15  | Terminal block for connection to motor power line                           |                                                                                       | Display the terminal block TB2                                                         |
| 16  | Tapped hole for grounding the flange                                        |  |                                                                                        |

**WARNING**

When the DC link charge LED is lit, touching parts in the amplifier or cables connected is hazardous; never touch them.

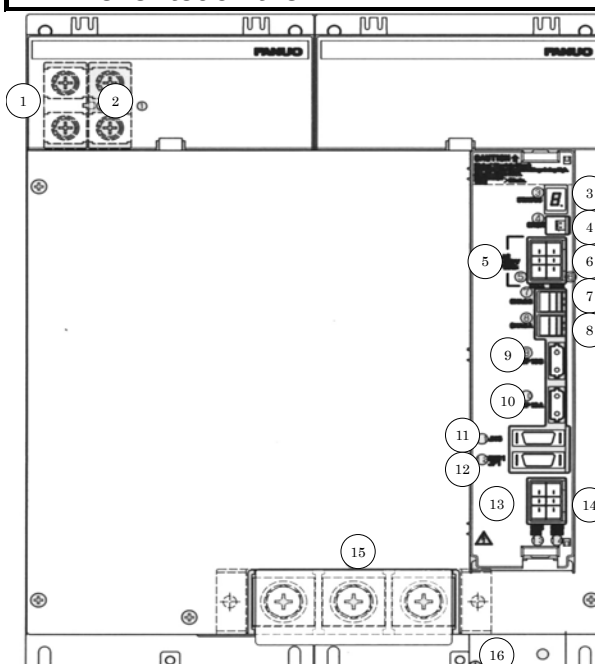

## 9.2.3 $\alpha i$ SP Series

### (a) $\alpha i$ SP 2.2 , $\alpha i$ SP 5.5 , $\alpha i$ SP 5.5HV (TYPE A, B)

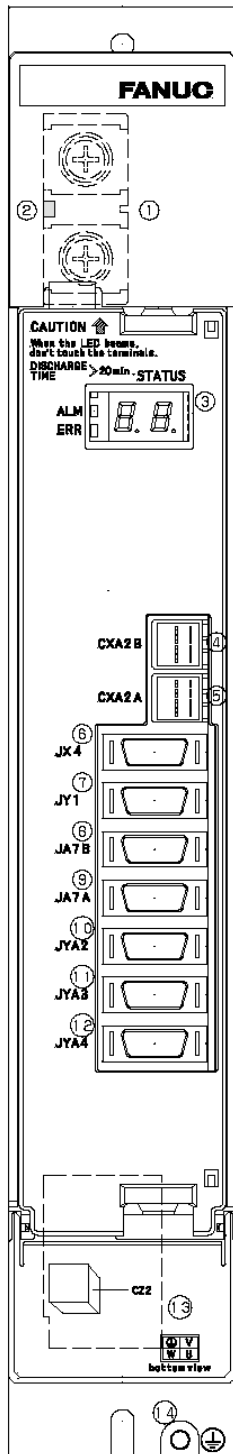


Table.9.2.3(a) Names of connectors and terminal blocks

|    | Names                                                                                                              | Display | Remarks                                                               |
|----|--------------------------------------------------------------------------------------------------------------------|---------|-----------------------------------------------------------------------|
| 1  | DC link terminal block                                                                                             |         | Display the terminal block TB1                                        |
| 2  | DC link charge LED                                                                                                 |         | (Warning)                                                             |
| 3  | Status LED                                                                                                         | STATUS  |                                                                       |
| 4  | Input connector for $\alpha i$ PS interface                                                                        | CXA2B   | 24VDC power supply                                                    |
| 5  | Output connector for $\alpha i$ PS interface                                                                       | CXA2A   |                                                                       |
| 6  | Position coder signal *1<br>Signal for communication between $\alpha i$<br>SP units *1<br>Excitation off signal *2 | JX4     | *1 TYPE B only                                                        |
| 7  | Connector for load meter and speedometer                                                                           | JY1     | The signal for the check board is also output.                        |
| 8  | Input connector for electric serial interface                                                                      | JA7B    |                                                                       |
| 9  | Output connector for electric serial interface                                                                     | JA7A    |                                                                       |
| 10 | Connector for spindle sensor for motor                                                                             | JYA2    | $\alpha i$ M, $\alpha i$ MZ, $\alpha i$ BZ, and $\alpha i$ CZ sensors |
| 11 | Connector for Positioncoder and external single rotation signal                                                    | JYA3    |                                                                       |
| 12 | Connector for separate spindle sensor                                                                              | JYA4    | TYPE B only                                                           |
| 13 | Connector for motor power line                                                                                     |         | Display the CZ2                                                       |
| 14 | Tapped hole for grounding the flange                                                                               |         |                                                                       |

\*2 Not supported by the A06B-6111, -6112, -6121, and -6122.



#### WARNING

When the DC link charge LED is lit, touching parts in the amplifier or cables connected is hazardous; never touch them.

|    | Names                                                                                                           | Display                                                                               | Remarks                                                               |
|----|-----------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|-----------------------------------------------------------------------|
| 1  | DC link terminal block                                                                                          |                                                                                       | Display the terminal block TB1                                        |
| 2  | DC link charge LED                                                                                              |                                                                                       | (Warning)                                                             |
| 3  | Status LED                                                                                                      | STATUS                                                                                |                                                                       |
| 4  | Input connector for $\alpha i$ PS interface                                                                     | CXA2B                                                                                 | 24VDC power supply                                                    |
| 5  | Output connector for $\alpha i$ PS interface                                                                    | CXA2A                                                                                 |                                                                       |
| 6  | Position coder signal *1<br>Signal for communication between $\alpha i$ SP units *1<br>Excitation off signal *2 | JX4                                                                                   | *1 TYPE B only                                                        |
| 7  | Connector for load meter and speedometer                                                                        | JY1                                                                                   | The signal for the check board is also output.                        |
| 8  | Input connector for electric serial interface                                                                   | JA7B                                                                                  |                                                                       |
| 9  | Output connector for electric serial interface                                                                  | JA7A                                                                                  |                                                                       |
| 10 | Connector for spindle sensor for motor                                                                          | JYA2                                                                                  | $\alpha i$ M, $\alpha i$ MZ, $\alpha i$ BZ, and $\alpha i$ CZ sensors |
| 11 | Connector for Positioncoder and external single rotation signal                                                 | JYA3                                                                                  |                                                                       |
| 12 | Connector for separate spindle sensor                                                                           | JYA4                                                                                  | TYPE B only                                                           |
| 13 | Connector for motor power line                                                                                  |                                                                                       | Display the TB2                                                       |
| 14 | Tapped hole for grounding the flange                                                                            |  |                                                                       |



When the DC link charge LED is lit, touching parts in the amplifier or cables connected is hazardous; never touch them.



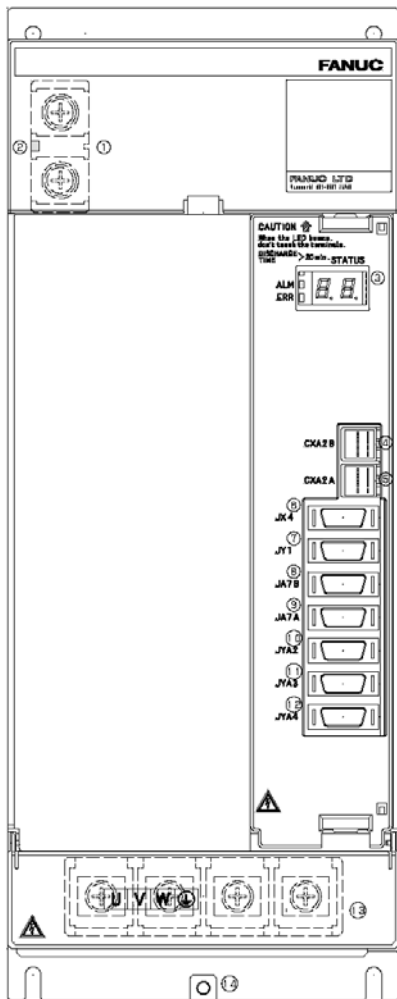
(c)  $\alpha i$  SP 22,  $\alpha i$  SP 26,  $\alpha i$  SP 30,  $\alpha i$  SP 30HV,  $\alpha i$  SP 45HV (TYPE A, B)

Table.9.2.3 (c) Names of connectors and terminal blocks

|    | Names                                                                                                           | Display | Remarks                                                               |
|----|-----------------------------------------------------------------------------------------------------------------|---------|-----------------------------------------------------------------------|
| 1  | DC link terminal block                                                                                          |         | Display the terminal block TB1                                        |
| 2  | DC link charge LED                                                                                              |         | (Warning)                                                             |
| 3  | Status LED                                                                                                      | STATUS  |                                                                       |
| 4  | Input connector for PSM interface                                                                               | CXA2B   | 24VDC power supply                                                    |
| 5  | Output connector for PSM interface                                                                              | CXA2A   |                                                                       |
| 6  | Position coder signal *1<br>Signal for communication between $\alpha i$ SP units *1<br>Excitation off signal *2 | JX4     | *1 TYPE B only                                                        |
| 7  | Connector for load meter and speedometer                                                                        | JY1     | The signal for the check board is also output.                        |
| 8  | Input connector for electric serial interface                                                                   | JA7B    |                                                                       |
| 9  | Output connector for electric serial interface                                                                  | JA7A    |                                                                       |
| 10 | Connector for spindle sensor for motor                                                                          | JYA2    | $\alpha i$ M, $\alpha i$ MZ, $\alpha i$ BZ, and $\alpha i$ CZ sensors |
| 11 | Connector for Positioncoder and external single rotation signal                                                 | JYA3    |                                                                       |
| 12 | Connector for separate spindle sensor                                                                           | JYA4    | TYPE B only                                                           |
| 13 | Connector for motor power line                                                                                  |         | Display the TB2                                                       |
| 14 | Tapped hole for grounding the flange                                                                            |         |                                                                       |

\*2 Not supported by the A06B-6111, -6112, -6121, and -6122.

**WARNING**

When the DC link charge LED is lit, touching parts in the amplifier or cables connected is hazardous; never touch them.


**SPM-45i, SPM-55i, SPM-75HVi, SPM-100HVi (TYPE A, B)****Table.9.2.3 (d) Names of connectors and terminal blocks**

|    | Names                                                                                                           | Display                                                                              | Remarks                                                                  |
|----|-----------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|--------------------------------------------------------------------------|
| 1  | DC link terminal block                                                                                          |                                                                                      | Display the terminal block TB1                                           |
| 2  | DC link charge LED                                                                                              |                                                                                      | (Warning)                                                                |
| 3  | Status LED                                                                                                      | STATUS                                                                               |                                                                          |
| 4  | Input connector for PSM interface                                                                               | CXA2B                                                                                | 24VDC power supply                                                       |
| 5  | Output connector for PSM interface                                                                              | CXA2A                                                                                |                                                                          |
| 6  | Position coder signal *1<br>Signal for communication between $\alpha i$ SP units *1<br>Excitation off signal *2 | JX4                                                                                  | *1 TYPE B only                                                           |
| 7  | Connector for load meter and speedometer                                                                        | JY1                                                                                  | The signal for the check board is also output.                           |
| 8  | Input connector for electric serial interface                                                                   | JA7B                                                                                 |                                                                          |
| 9  | Output connector for electric serial interface                                                                  | JA7A                                                                                 |                                                                          |
| 10 | Connector for spindle sensor for motor                                                                          | JYA2                                                                                 | $\alpha i$ M, $\alpha i$ MZ,<br>$\alpha i$ BZ, and $\alpha i$ CZ sensors |
| 11 | Connector for Positioncoder and external single rotation signal                                                 | JYA3                                                                                 |                                                                          |
| 12 | Connector for separate spindle sensor                                                                           | JYA4                                                                                 | TYPE B only                                                              |
| 13 | Connector for motor power line                                                                                  |                                                                                      | Display the TB2                                                          |
| 14 | Tapped hole for grounding the flange                                                                            |  |                                                                          |

\*2 Not supported by the A06B-6111, -6112, -6121, and -6122.

**WARNING**


When the DC link charge LED is lit, touching parts in the amplifier or cables connected is hazardous; never touch them.

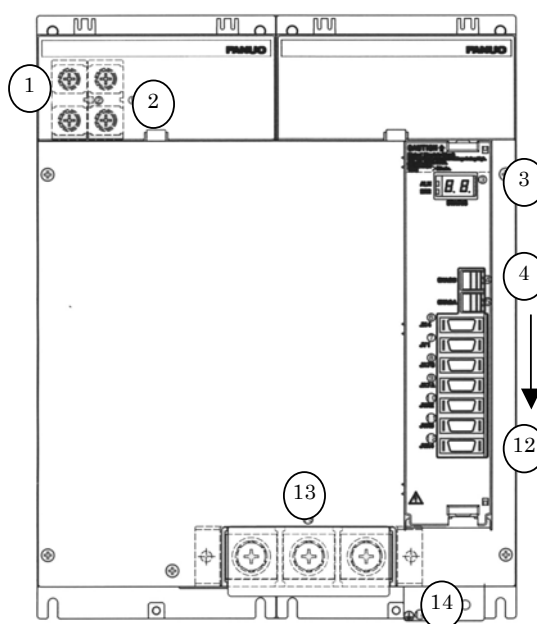

## 9.3 CABLE CONNECTION DETAILS

### 9.3.1 $\alpha i$ PS Series Connection Diagram


#### (a) $\alpha i$ PS (200-V input series)

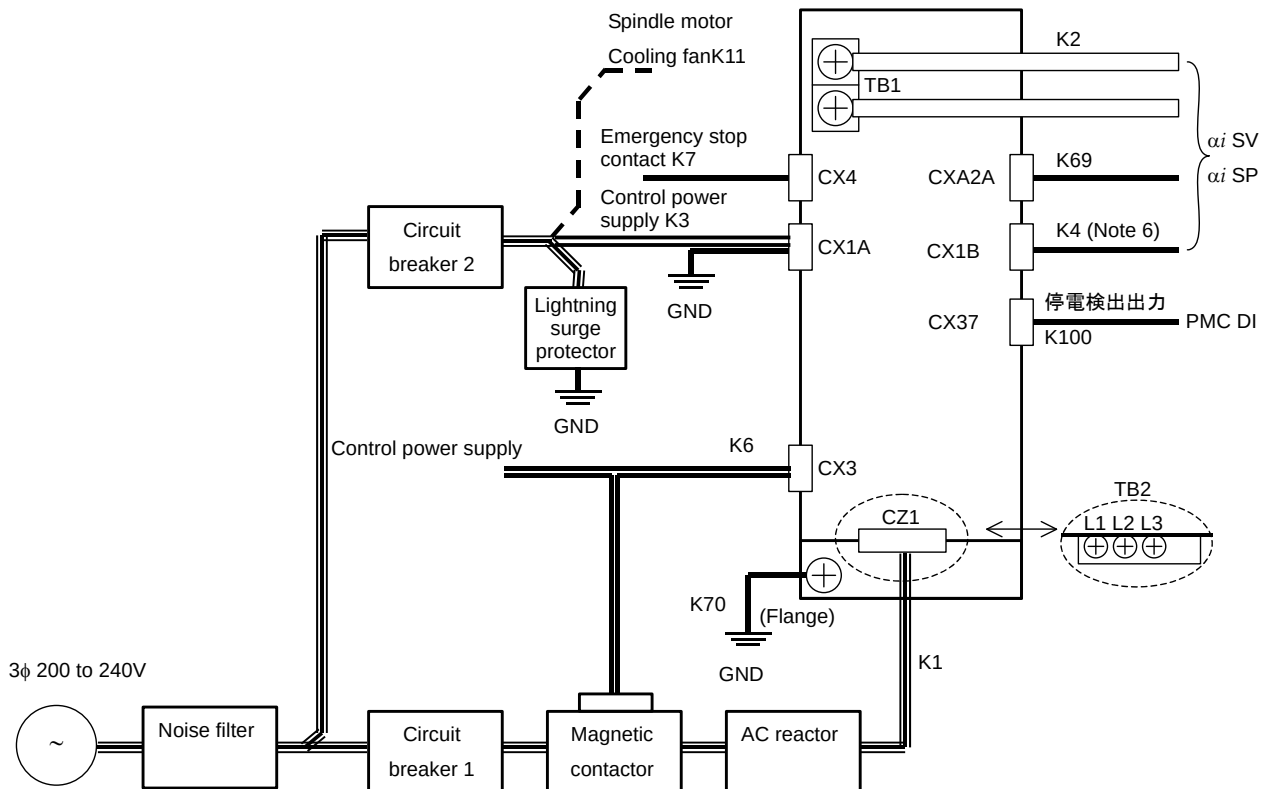

#### NOTE


- 1 Always install the circuit breakers, magnetic contactor, and AC reactor.
- 2 To protect the equipment from lightning surge voltages, install a lightning surge protector across each pair of power lines and across each power line and the grounding line at the power inlet of the power magnetics cabinet. See Appendix A, "FITTING A LIGHTNING SURGE PROTECTION DEVICE" for details.
- 3 Always connect the control power supply cable to the CX1A. If it is connected to the CX1B, fuses inside the unit may blow.
- 4 See Section 5.2 for the type of the cable to be used for making a connection to a frame ground.
- 5 Install a noise filter more nearer to the power supply than the magnetic contactor for the  $\alpha i$  PS.
- 6 Power supply for a dynamic brake module (DBM). When a DBM is not used, this power supply is unnecessary.
- 7 A06B-6110 and A06B-6120 do not have CX37.

**(b)  $\alpha_i$  PS<sub>R</sub> (200-V input series)**

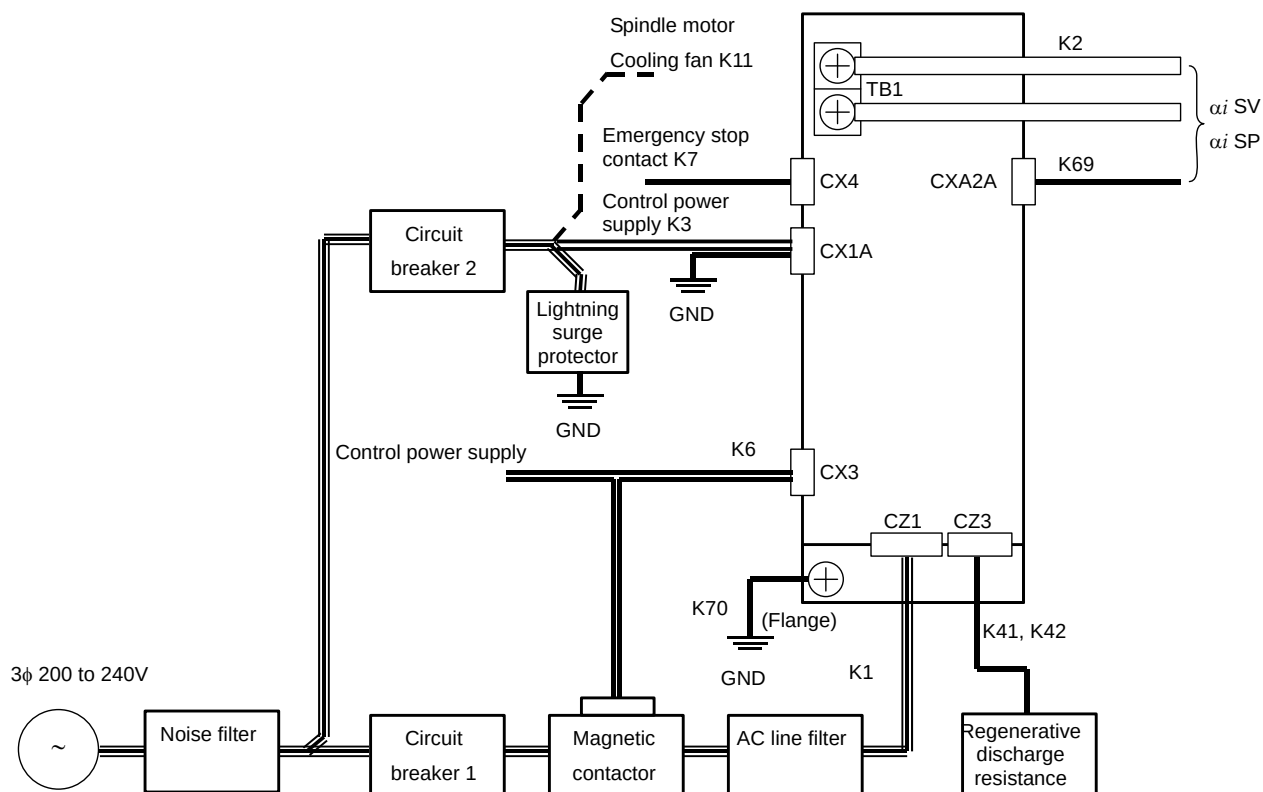


## NOTE

- 1 Always install the circuit breakers, magnetic contactor, and AC reactor.
- 2 To protect the equipment from lightning surge voltages, install a lightning surge protector across each pair of power lines and across each power line and the grounding line at the power inlet of the power magnetics cabinet. See Appendix A, “FITTING A LIGHTNING SURGE PROTECTION DEVICE” for details.
- 3 Always connect the control power supply cable to the CX1A. If it is connected to the CX1B, fuses inside the unit may blow.
- 4 See Section 5.2 for the type of the cable to be used for making a connection to a frame ground.
- 5 Install a noise filter more nearer to the power supply than the magnetic contactor for the  $\alpha$ i PS.

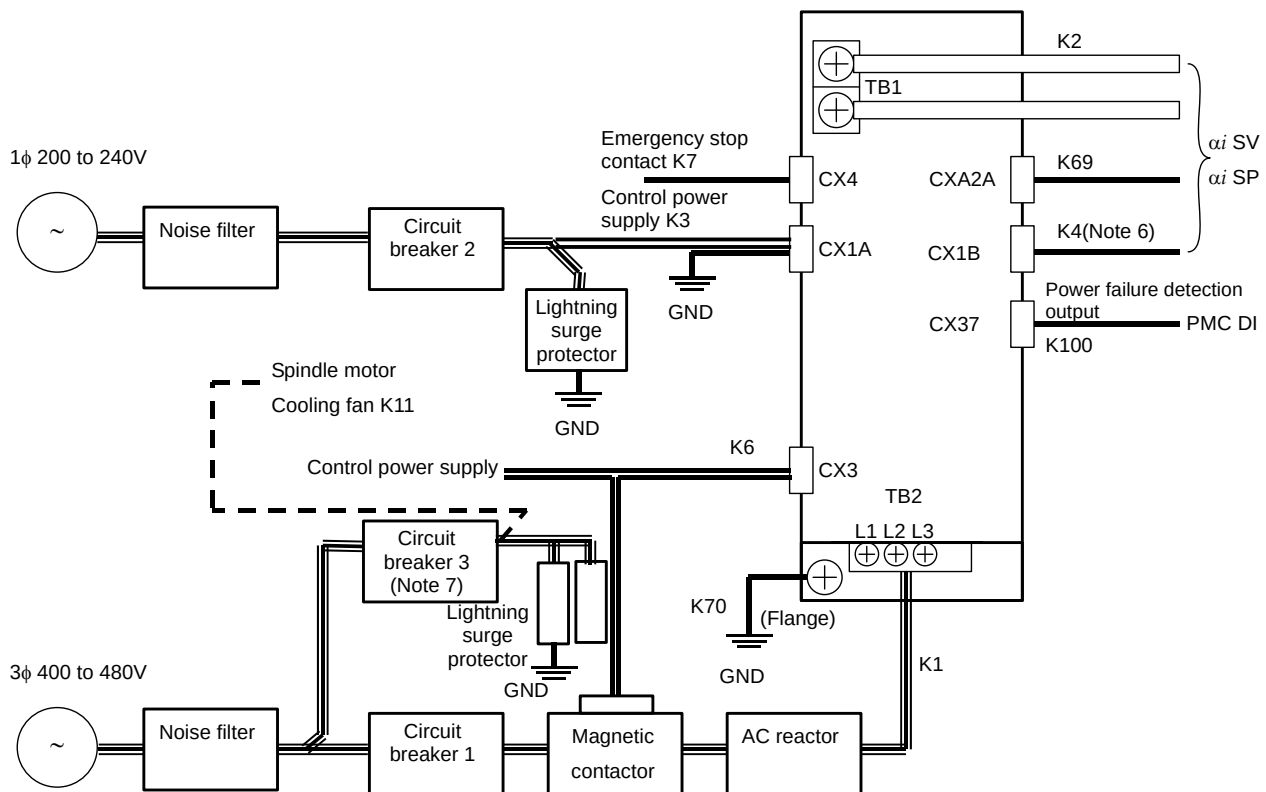**(c)  $\alpha i$  PS (400-V input series)****NOTE**

- 1 Always install the circuit breakers, magnetic contactor, and AC reactor.
- 2 To protect the equipment from lightning surge voltages, install a lightning surge protector across each pair of power lines and across each power line and the grounding line at the power inlet of the power magnetics cabinet. See Appendix A, "FITTING A LIGHTNING SURGE PROTECTION DEVICE" for details.
- 3 Always connect the control power supply cable to the CX1A. If it is connected to the CX1B, fuses inside the unit may blow.
- 4 See Section 5.2 for the type of the cable to be used for making a connection to a frame ground.
- 5 Install a noise filter more nearer to Power Supply than the magnetic contactor for the  $\alpha i$  PS.
- 6 Power supply for a dynamic brake module (DBM). When a DBM is not used, this power supply is unnecessary.
- 7 Circuit breaker 3 is used to shut off the lightning surge protector. When circuit breaker 3 trips, the lightning surge protector does not function. So, the tripping state needs to be detected, and when it is detected, a warning needs to be issued.
- 8 A06B-6110 and A06B-6120 do not have CX37.

### Connection on using two $\alpha i$ PS series amplifiers (200-V input)

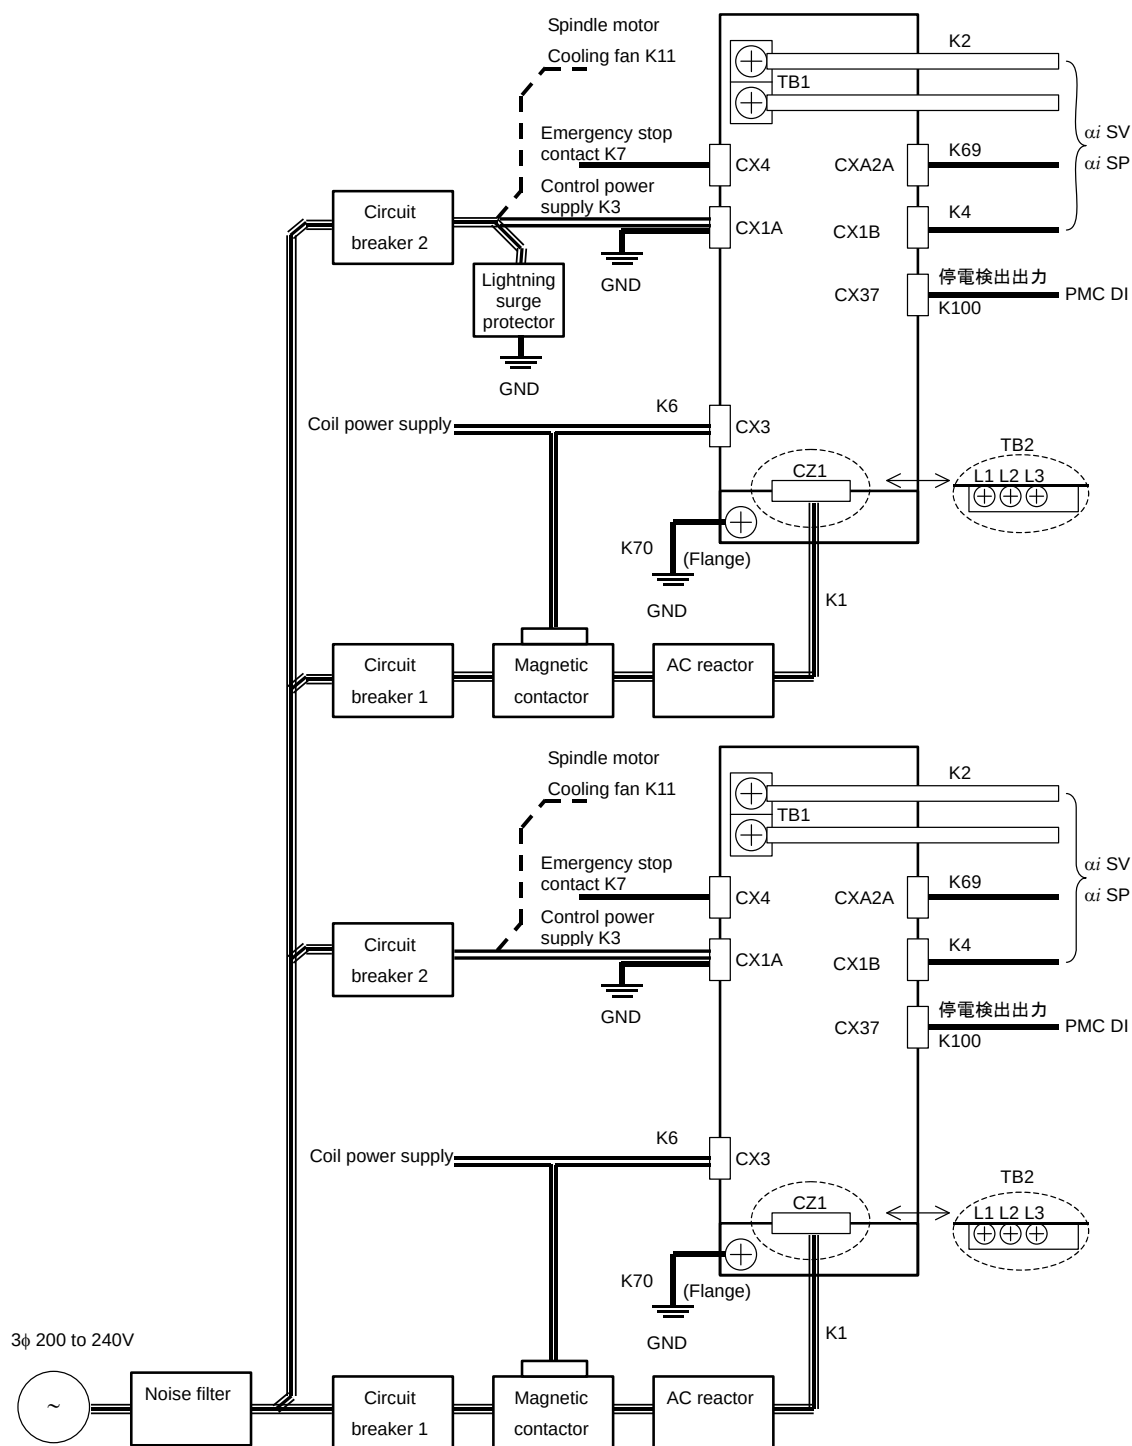


## NOTE


- 1 Circuit breaker 1, circuit breaker 2, the magnetic contactor, and the AC reactor cannot be shared among  $\alpha_i$  PS units.  
For each  $\alpha_i$  PS, select and use these devices having appropriate capacitance specifications.
- 2 The lightning surge protection device can be shared. For details, see Appendix A, "FITTING A LIGHTNING SURGE PROTECTION DEVICE".

## Notes on using multiple $\alpha i$ PS series and $\beta i$ series amplifiers

- (a) An AC reactor for the  $\alpha i$  PS cannot be used as an AC line filter of the  $\beta i$  series amplifier. Connect devices as follows:

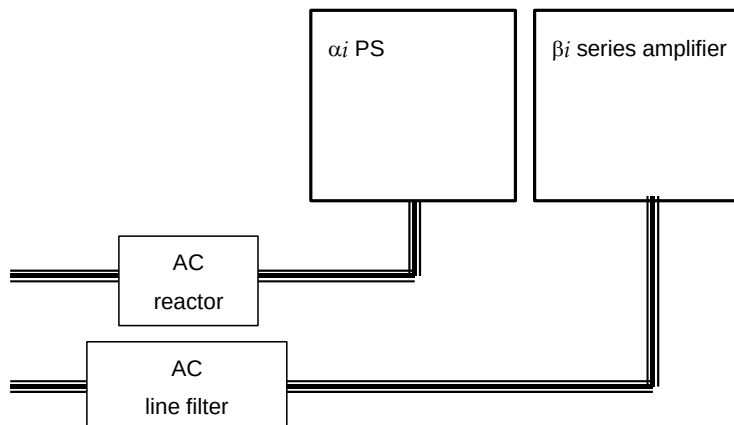

- (b) An AC line filter for the  $\alpha i$  PS<sub>R</sub> cannot be shared with the  $\beta i$  series amplifier. Connect devices as follows:

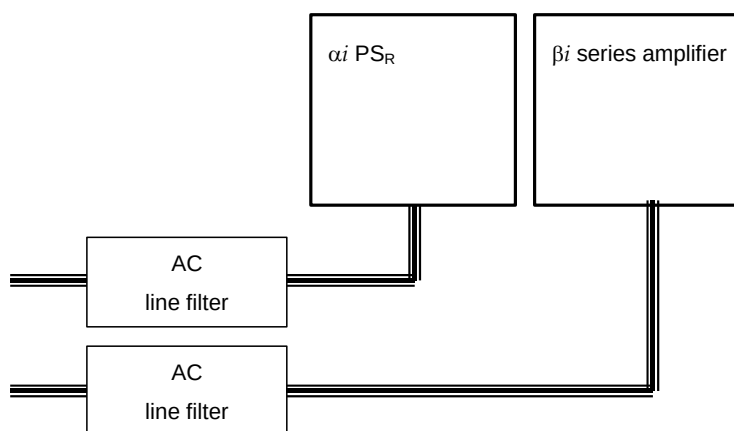


### CAUTION

When multiple  $\alpha i$  PS series and  $\beta i$  series amplifiers are used, sharing an AC reactor or AC line filter among these amplifiers can result in an alarm or can damage these amplifiers.

**Note on using multiple  $\alpha i$  PS series and  $\beta i$  series amplifiers 2**

- (a) Be careful not to connect DC links of multiple PS amplifiers incorrectly.

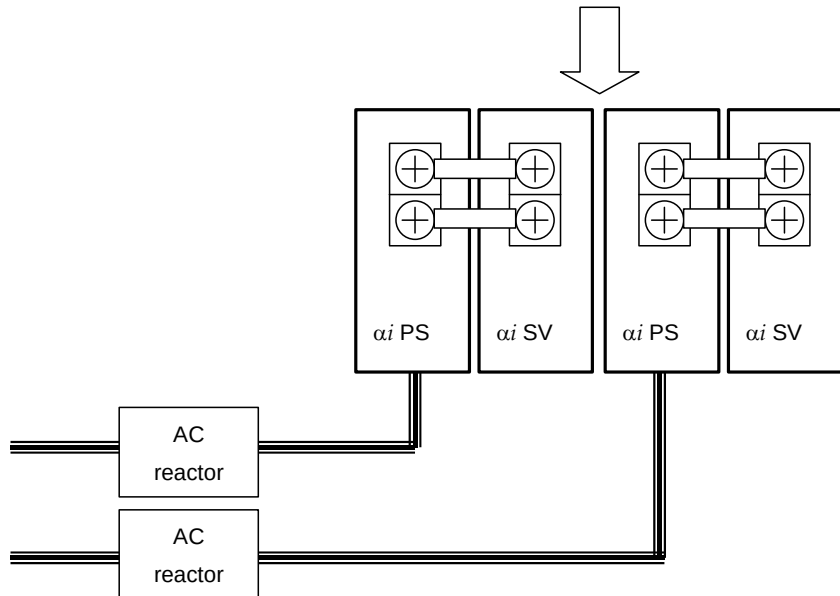**CAUTION**

When multiple  $\alpha i$  PS series amplifiers are used, connecting their DC links can result in an alarm or can damage these amplifiers.




### 9.3.1.1 Details of cable K1 (power supply line)


Cable K1 is used to supply main power to the  $\alpha i$  PS. Make sure that the cable used between the power supply and  $\alpha i$  PS satisfies the requirements listed in Table 9.3.1.1.

#### (1) For $\alpha i$ PS - $\alpha i$ PS 5.5

(a) For a power supply voltage of 200 to 240 VAC

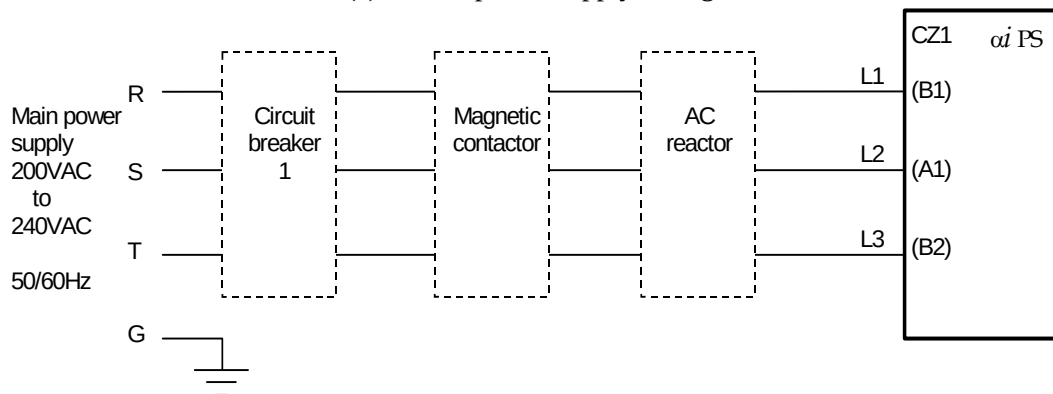

(b) For a power supply voltage of 400 to 480 VAC

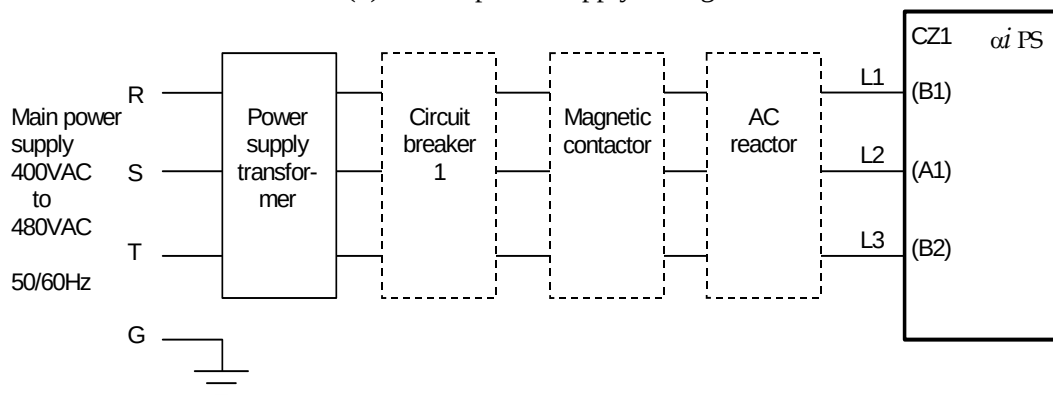

#### Pin location of CZ1

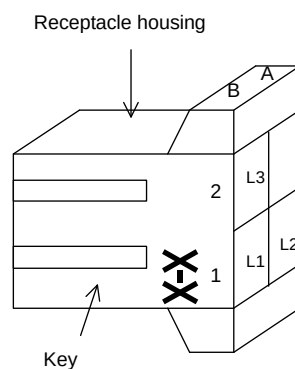


Table 9.3.1.1(a) Cable K1 Specifications ( $\alpha i$  PS5.5)

| Model             | Applicable cable                |                               |             |
|-------------------|---------------------------------|-------------------------------|-------------|
|                   | Heavy-duty power cable (Note 1) | Heat-resistant cable (Note 2) | UL 規格対応ケーブル |
| $\alpha i$ PS 5.5 | 5.5mm <sup>2</sup>              | 5.5mm <sup>2</sup>            | AWG8 以上     |

**NOTE**

- 1 Four-conductor polyvinyl heavy-duty power cable (JIS C3312) (VCT : heat-resistant 60°C)
- 2 Fire-retardant polyflex wire (heat-resistant 105°C) or equivalent to LMFC manufactured by The Furukawa Electric Co., Ltd.
- 3 The cross-section area of each cable is determined under the following conditions:
  - (1) At  $\alpha i$  PS rated output
  - (2) Environment temperature of cable : 30°C
  - (3) Number of harnesses
    - 3 (No current flows through the ground wire during normal operation.)
 Select a required cable cross-section area according to the user environment and conditions.

## Connector Specifications

| モデル               | Connector key (Note 1) | Applicable contact (Note 1) |
|-------------------|------------------------|-----------------------------|
| $\alpha i$ PS 5.5 | XX<br>1-917807-2       | M size<br>316041-6          |


See Subsection 9.4 for detailed explanations about the specification of the D-5000.

**NOTE**


Tyco Electronics AMP D-5000 series  
Select a contact size according to the cross-section area of the cable.

-  $\alpha i$  PS 11 ~  $\alpha i$  PS 55

(a) For a power supply voltage of 200 to 240 VAC

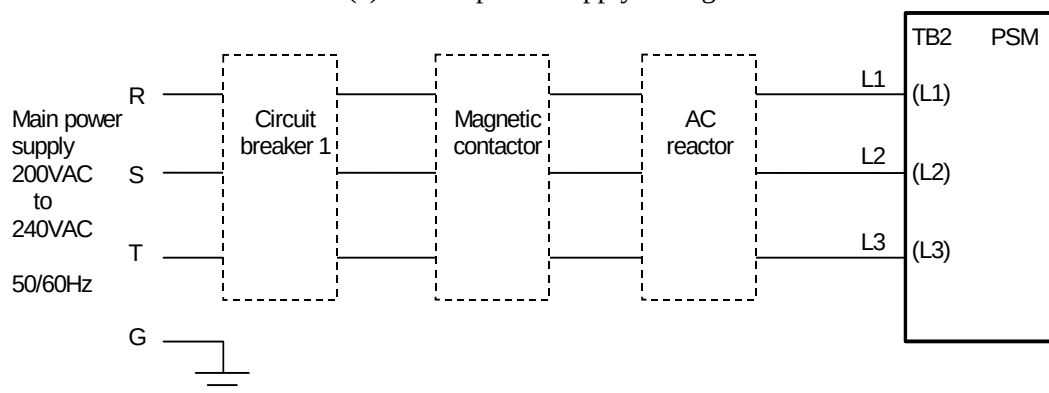

(b) For a power supply voltage of 400 to 480 VAC

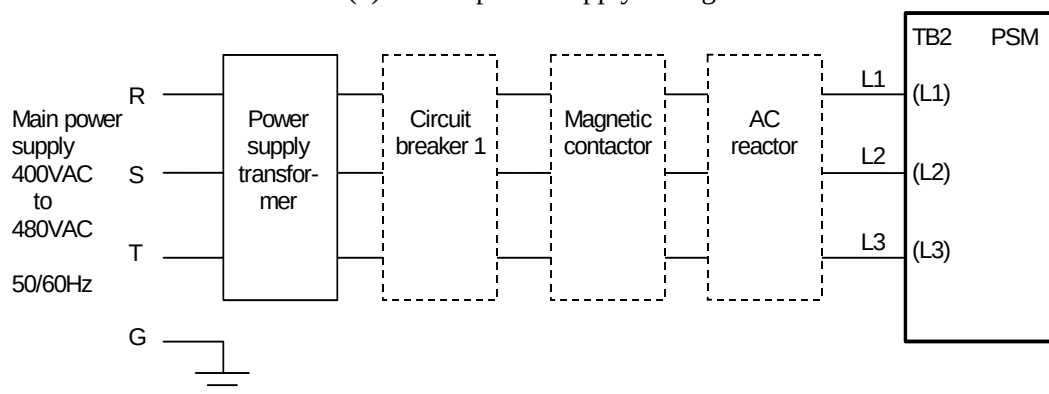Table.9.3.1.1(b) Cable K1 Specifications, screw tightening torque ( $\alpha i$  PS11 to  $\alpha i$  PS55)

| Model            | Applicable cable                |                                  |                                 | $\alpha i$ PS side |                   | Reactor side   |                   |
|------------------|---------------------------------|----------------------------------|---------------------------------|--------------------|-------------------|----------------|-------------------|
|                  | Heavy-duty power cable (Note 1) | Heat-resistant cable (Note 2)    | Cable conforming to UL standard | Terminal screw     | Tightening torque | Terminal screw | Tightening torque |
| $\alpha i$ PS 11 | -                               | 8mm <sup>2</sup> or more         | AWG8 or lhigher                 | M4                 | 1.1 to 1.5Nm      | M5             | 2.0 to 2.5Nm      |
| $\alpha i$ PS 15 | 14 mm <sup>2</sup> or more      | 14mm <sup>2</sup> or more        | AWG4 or lhigher                 |                    | 3.5 to 4.5Nm      |                |                   |
| $\alpha i$ PS 26 | -                               | 22mm <sup>2</sup> or more        | AWG2 or lhigher                 | M6 (Note 3)        | 3.5 to 4.5Nm      |                |                   |
| $\alpha i$ PS 30 | -                               | 22mm <sup>2</sup> or more        | AWG2 or lhigher                 |                    |                   |                |                   |
| $\alpha i$ PS 37 | -                               | 38mm <sup>2</sup> or more        | AWG1 or lhigher                 | M6                 | 3.5 to 4.5Nm      |                |                   |
| $\alpha i$ PS 55 | -                               | G: 40mm <sup>2</sup> or more     | AWG1 or lhigher                 | M6                 | 3.5 to 4.5Nm      |                |                   |
|                  |                                 | R,S,T: 80mm <sup>2</sup> or more | AWG3/0 or lhigher               | M10                | 1 to 16Nm         |                |                   |


\* The AC reactor does not have polarity, so input and output may be connected to either side of the reactor.

**NOTE**

- 1 Four-conductor polyvinyl heavy-duty power cable (JIS C3312) (VCT : heat-resistant 60°C)
- 2 Fire-retardant polyflex wire (heat-resistant 105°C) or equivalent to LMFC manufactured by The Furukawa Electric Co., Ltd.
- 3 Applicable crimp terminal for  $\alpha i$  PS : 38-6S
- 4 The cross-section area of each cable is determined under the following conditions:
  - (1) At  $\alpha i$  PS rated output
  - (2) Environment temperature of cable : 30°C
  - (3) Number of harnesses  
3 (No current flows through the ground wire during normal operation.)Select a required cable cross-section area according to the user environment and conditions.

**(2) For  $\alpha i$  PS<sub>R</sub>**

(a) For a power supply voltage of 200 to 240 VAC

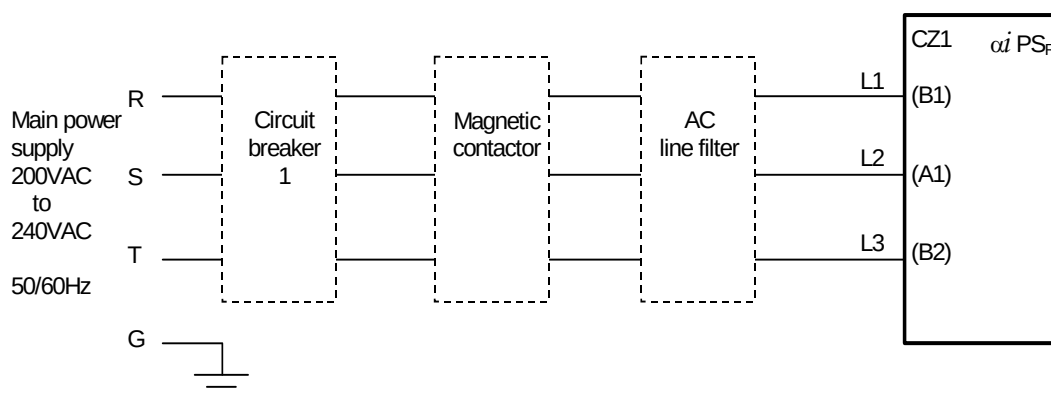

(b) For a power supply voltage other than 200 to 240 VAC

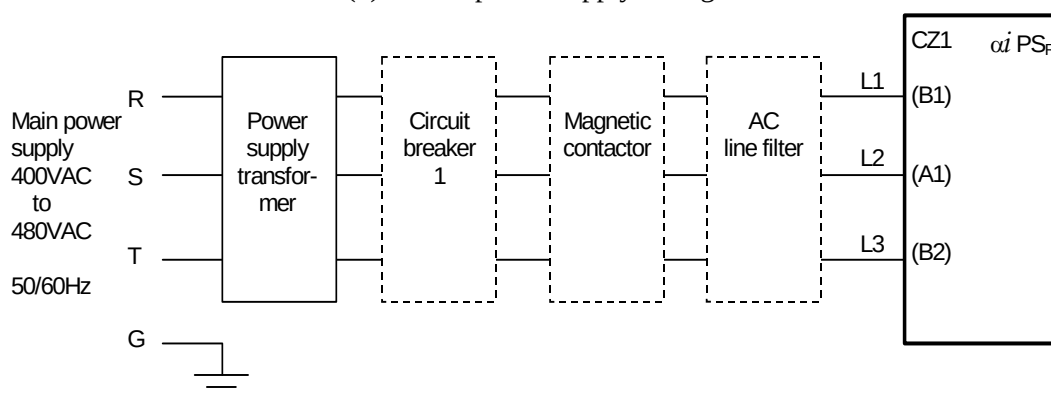


Table 9.3.1.1(c) Cable K1 Specifications, screw tightening torque

| Mode                           | Applicable cable                |                               |                                 |
|--------------------------------|---------------------------------|-------------------------------|---------------------------------|
|                                | Heavy-duty power cable (Note 1) | Heat-resistant cable (Note 2) | Cable conforming to UL standard |
| $\alpha i$ PS <sub>R</sub> 3   | 3.5mm <sup>2</sup>              | 3.5mm <sup>2</sup>            | AWG10                           |
| $\alpha i$ PS <sub>R</sub> 5.5 | 5.5mm <sup>2</sup>              | 5.5mm <sup>2</sup>            | AWG8                            |

**NOTE**

- 1 Four-conductor polyvinyl heavy-duty power cable (JIS C3312) (VCT : heat-resistant 60°C)
- 2 Fire-retardant polyflex wire (heat-resistant 105°C) or equivalent to LMFC manufactured by The Furukawa Electric Co., Ltd.

## Connector Specifications

| Model                             | Connector key (Note 1) | Applicable contact (Note 1) |
|-----------------------------------|------------------------|-----------------------------|
| $\alpha i$ PS <sub>R</sub> 3, 5.5 | XX<br>1-917807-2       | M size<br>316041-6          |

See Subsection 9.4 for detailed explanations about the specification of the D-5000.

**NOTE**

Tyco Electronics AMP D-5000 series  
Select a contact size according to the cross-section area of the cable.

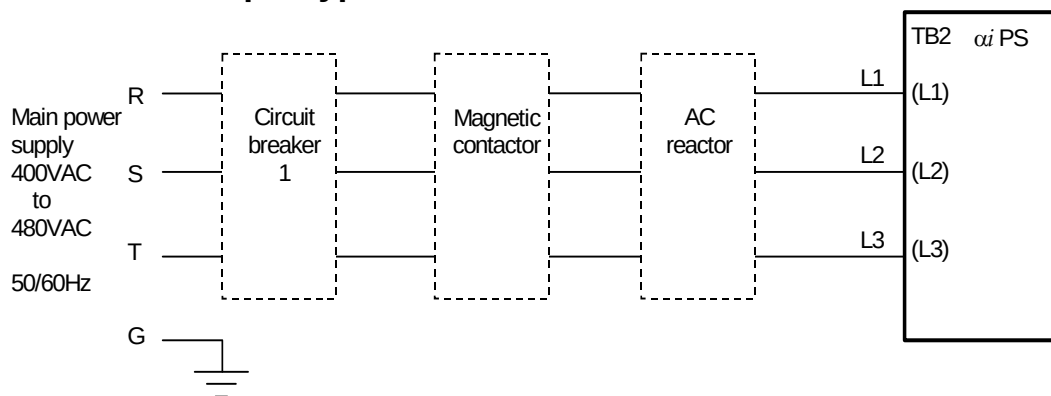
**(3) For  $\alpha i$  PS 400-V input type**

Table.9.3.1.1(d) Cable K1 Specifications

| Model               | Applicable cable                |                                    |                                 | $\alpha i$ PS side |                   | Reactor side   |                   |
|---------------------|---------------------------------|------------------------------------|---------------------------------|--------------------|-------------------|----------------|-------------------|
|                     | Heavy-duty power cable (Note 1) | Heat-resistant cable (Note 2)      | Cable conforming to UL standard | Terminal screw     | Tightening torque | Terminal screw | Tightening torque |
| $\alpha i$ PS 11HV  | 5.5mm <sup>2</sup> or more      | 5.5mm <sup>2</sup> or more         | AWG8 or higher                  | M4                 | 1.1 to 1.5Nm      | M5             | 2.0 to 2.5Nm      |
| $\alpha i$ PS 18HV  | -                               | 8mm <sup>2</sup> or more           | AWG8 or higher                  |                    |                   |                |                   |
| $\alpha i$ PS 30HV  | -                               | 14mm <sup>2</sup> or more          | AWG4 or higher                  |                    |                   |                |                   |
| $\alpha i$ PS 45HV  | -                               | 22mm <sup>2</sup> or more          | AWG2 or higher                  | M6                 | 3.5 to 4.5Nm      | M8             | 8.5 to 9.5Nm      |
| $\alpha i$ PS 75HV  | -                               | G: 22mm <sup>2</sup> or more       | AWG2 or higher                  | M6                 | 3.5 to 4.5Nm      | M10            | 15 to 16Nm        |
|                     |                                 | R, S, T: 38mm <sup>2</sup> or more | AWG1 or higher                  | M10                | 15 to 16Nm        |                |                   |
| $\alpha i$ PS 100HV |                                 | G: 40mm <sup>2</sup> or more       | AWG1 or higher                  | M6                 | 3.5 to 4.5Nm      |                |                   |
|                     |                                 | R, S, T: 80mm <sup>2</sup> or more | AWG3/0 or higher                | M10                | 15 to 16Nm        |                |                   |

**NOTE**


- 1 Four-conductor polyvinyl heavy-duty power cable (JIS C3312) (VCT : heat-resistant 60°C)
- 2 Fire-retardant polyflex wire (heat-resistant 105°C) or equivalent to LMFC manufactured by The Furukawa Electric Co., Ltd.
- 3 The cross-section area of each cable is determined under the following conditions:
  - (1) At  $\alpha i$  PS rated output
  - (2) Environment temperature of cable : 30°C
  - (3) Number of harnesses  
3 (No current flows through the ground wire during normal operation.)Select a required cable cross-section area according to the user environment and conditions.

### 9.3.1.2 Details of short bar K2

Short bar K2 supplies DC link voltage generated by the  $\alpha i$  PS to individual modules.


When designing a short bar for connecting modules placed close to each other, refer to the "Specifications of short bars for connecting modules placed close to each other."

To determine the length of a short bar to be used for connecting modules placed separately, refer to "Location of terminal board TB1." Optional short bars are available from FANUC. Refer to the "DC Link Short Bar Specifications."

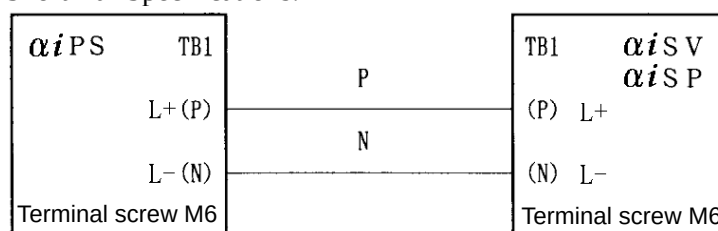


#### Specifications of short bars for connecting modules placed close to each other

- (1) Specifications of short bars for connecting the modules

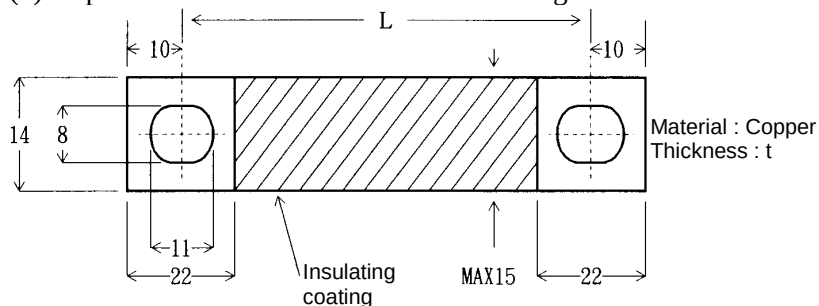

- (2) Specifications of short bars for connecting the modules  
(Figure example of short bars for connecting 300-mm-wide modules)

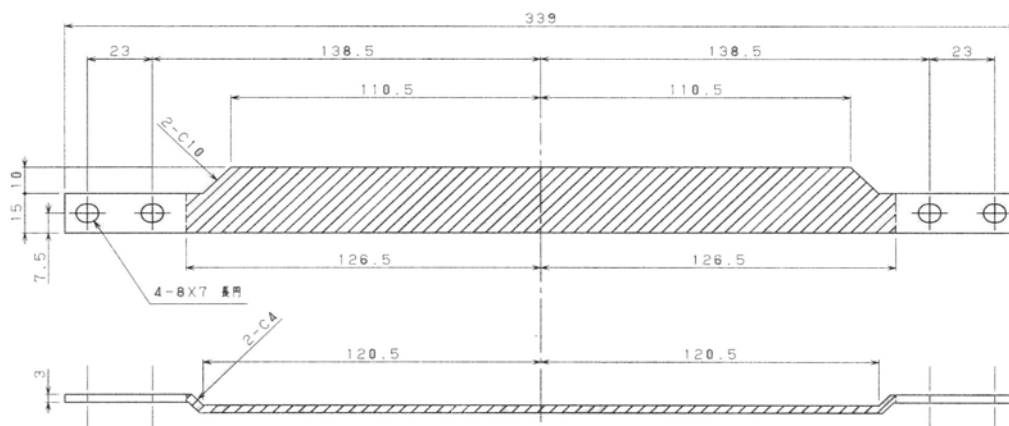

Hatched area: Apply PVC coating.  
Thickness : 1t or more



Table.9.3.1.2 Short Bar K2 Specifications

| Module location    | Short bar length L | Short bar thickness t | Cross-section area (Note) |
|--------------------|--------------------|-----------------------|---------------------------|
| Unit of 300mm-wide | 300mm              | 3.0mm                 | 50mm <sup>2</sup>         |
| Unit of 150mm-wide | 150mm              | 1.5mm                 | 21mm <sup>2</sup>         |
| Unit of 90mm-wide  | 90mm               | 1.5mm                 | 21 mm <sup>2</sup>        |
| Unit of 60mm-wide  | 60mm               | 1.5mm                 | 21 mm <sup>2</sup>        |

**NOTE**

- 1 Modules need not necessarily be connected with a short bar (copper plate).  
If the modules cannot be placed close to each other, however, they cannot help being separated from each other.  
If you connect them with a power cable, however, the cable may not be thinner than indicated below and must be insulated with heat-resistant polyvinyl.
- 2 When the width is 300 mm ((*ai* SP 45, *ai* SP 55, *ai* PS 55, *ai* SP 75HV, *ai* SP 100HV, *ai* PS 75HV, *ai* PS 100HV, *ai* SV 360HV), cabling needs to be performed using the two screws at P and N. So, use a dedicated short bar (A06B-6078-K841, two each per set).

### Location of terminal block TB1 on each module

Fig.9.3.1.2(a) and Fig.9.3.1.2(b) show the location of terminal board TB1 on each module.

If you want to install modules at distances not specified herein, design short bars by referring to the dimensions shown below.

When designing a short bar for connecting 300-mm-wide modules in particular, conform to the above figure specifications and apply the above coating.

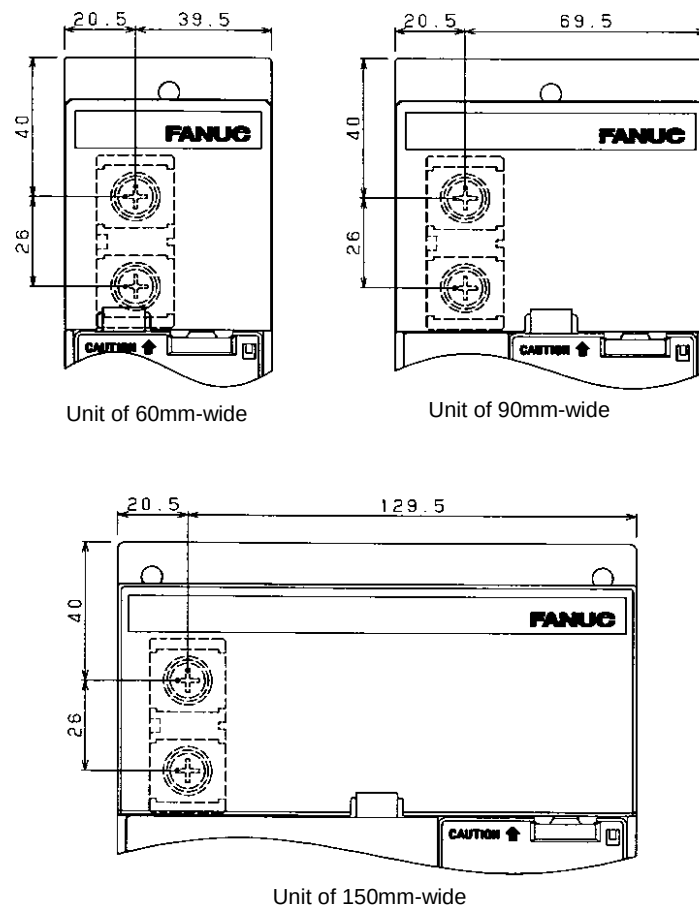


Fig.9.3.1.2(a) Location of Terminal Block TB1 on the units of 60-, 90-, and 150-mm-Wide amplifiers


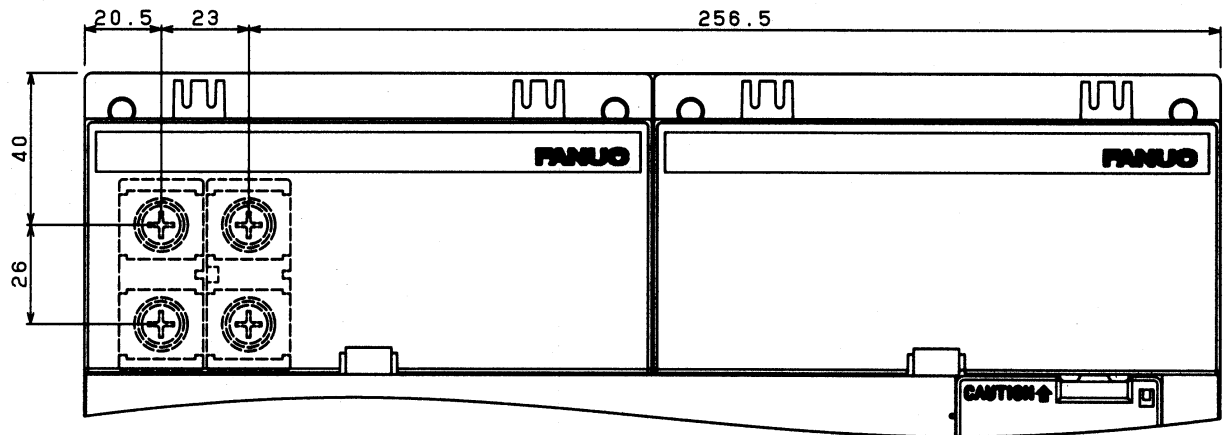


Fig.9.3.1.2(b) Location of Terminal Block TB1 on the units of  
300-mm-Wide amplifiers


**About the length of the DC link cable**

Suppress the length of the DC link cable to within 1.5 m. (See the following diagram.)

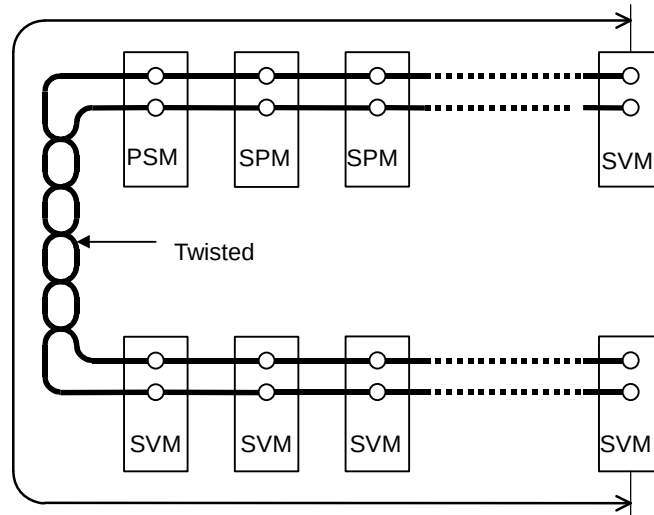

### 9.3.1.3 Details of cable K3

Cable K3 is used to supply control power to the  $\alpha i$  PS.

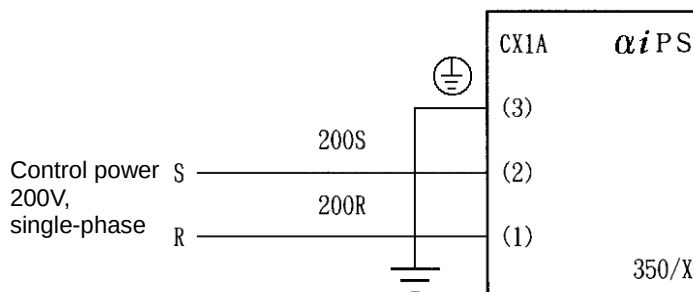

Cable specification:

Two-conductor polyvinyl heavy-duty power cable (JIS C3312),  
 conductor size of  $1.25 \text{ mm}^2$  (50/0.18),  
 PVC sheath 9.6 mm in diameter

Connector specification:


Tyco Electronics AMP connector with receptacle housing  
 1-178128-3 and receptacle contact 1-175218-2

#### NOTE

Always connect cable K3 to the CX1A. If it is connected to the CX1B, fuses inside the unit may blow.

### 9.3.1.4 Details of cable K69

The cable K69 is used between the *i* PS,  $\alpha i$  SP, and  $\alpha i$  SV.

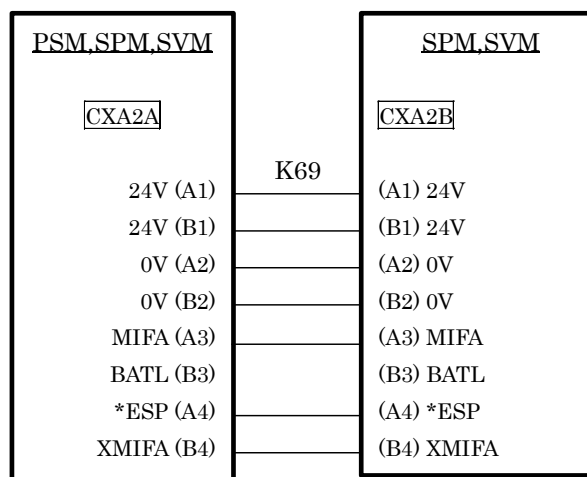

Connector specification

| Manufacturer               | Tyco Electronics AMP                                                                                                                      |
|----------------------------|-------------------------------------------------------------------------------------------------------------------------------------------|
| Connector specification    | D-2100 series<br>Housing 1-1318119-4 (1 pieces)<br>Contact 1318107-1 (8 pieces)<br>[Ordering information : A06B-6110-K210 connector only] |
| Conductor size             | 0.5mm <sup>2</sup> , AWG20                                                                                                                |
| Instruction outer diameter | 1.08-2.83 mm                                                                                                                              |

#### NOTE


The (B3)BATL is the interface used to connect the batteries for the absolute Pulsecoder. For details, see the description of battery connection in Subsection 9.3.2.10.

#### WARNING

- 1 When using the built-in battery (A06B-6114-K504), never connect the BATL(B3) of the connector CXA2A/CXA2B.  
Otherwise, a short-circuit will occur between the battery output voltages for different  $\alpha i$  SVs, possibly resulting in the batteries becoming very hot, which is dangerous.
- 2 Do not connect more than one battery to the same BATL(B3) line. Otherwise, a short-circuit will occur between the output voltages of different batteries, possibly resulting in the batteries becoming very hot, which is dangerous.

### 9.3.1.5 Details of cable K6

Cable K6 is used to control the magnetic contactor if it is installed outside the unit.

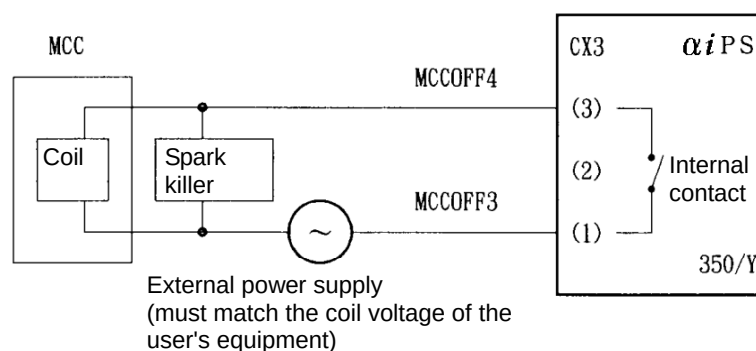

Cable specification:

Two-conductor polyvinyl heavy-duty power cable (JIS C3312), conductor size of 1.25 mm<sup>2</sup> (50/0.18), PVC sheath 9.6 mm in diameter

Connector specification:

Tyco Electronics AMP connector with receptacle housing 2-178128-3 and receptacle contact 1-175218-2

Internal-contact specification:

|                        | Resistive load<br>( $\cos\phi=1$ ) | Inductive load<br>( $\cos\phi=0.4$ , $L/R=7\text{msec}$ ) |
|------------------------|------------------------------------|-----------------------------------------------------------|
| Rated load             | 250VAC, 5A / 30VDC, 5A             | 250VAC, 2A / 30VDC, 2A                                    |
| Maximum contact rating | 5A                                 | 5A                                                        |


#### NOTE

Always install a spark killer (CR) that matches the magnetic contactor to protect the internal contacts. The following table lists the recommended capacitances and resistances.

| Coil voltage  | C      | R    |
|---------------|--------|------|
| 24VDC         | 0.22μF | 22Ω  |
| 100 to 230VAC | 0.1μF  | 220Ω |

### 9.3.1.6 Details of cable K7

Cable K7 is used to supply an emergency stop signal to the  $\alpha i$  PS.

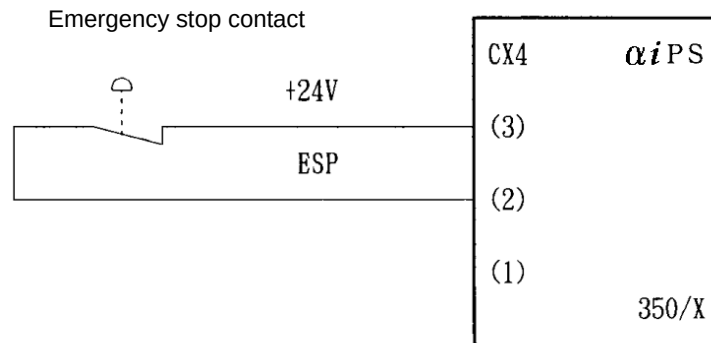

Cable specification:

Two-conductor polyvinyl heavy-duty power cable (JIS C3312), conductor size of 1.25 mm<sup>2</sup> (50/0.18), PVC sheath 9.6 mm in diameter

Connector specification:

Tyco Electronics AMP connector with receptacle housing 1-178128-3 and receptacle contact 1-175218-2

- (1) When the contact is ON (closed), the spindle motor and servo motor are enabled.  
When the contact is OFF (open), the external magnetic contactor (MCC) is in the off state, and the spindle motor and servo motor do not operate.
- (2) When the contact is set to OFF (open) during motor rotation, the spindle motor decelerates, then stops, and the servo motor is stopped by the dynamic brake.
- (3) The contact input signal is specified as follows:
  - <1> As the external contact capacity, a voltage of at least 30 VDC and a current of at least 100 mA are required.
  - <2> Significant levels (with the voltage between input pins) when the contactless signal input mode is used:
    - Low level "logic 0": Up to 2 V
    - High level "logic 1": At least 20 V
- (4) When the  $\alpha i$  PS main power is turned off for safety in such a case that the machine protection door is open, the contact of the ESP signal (CX4), which is input to the  $\alpha i$  PS, must be set to OFF (open) within 200 ms after turn-off of the  $\alpha i$  PS main power.  
When the contact of the ESP signal (CX4) remains ON (closed) after the  $\alpha i$  PS main power is turned off, a DC link low-voltage alarm (alarm No. 4) occurs in the PSM.



 **WARNING**

- 1 The spindle free-runs as a result of a power failure, an alarm, or a command from the ladder (MPOFA signal). During free running, the spindle does not stop even when an emergency stop is applied.
- 2 Note that even when the power is off, the spindle might be free-running.
- 3 When an amplifier requires an external dynamic brake module, but no dynamic brake module is connected to the amplifier, applying an emergency stop causes the servo axis to coast.
- 4 The ESP signal receive circuit of the amplifier is implemented by an electronic circuit. This means that input of the ESP signal to the amplifier due to an electronic circuit failure may not stop the motor.

### 9.3.1.7 Details of cable K70

- (a) The cable K70 is used to connect the connector CX1A on the  $\alpha i$  PS to the frame ground of the cabinet.  
Conductor size : 1.25 mm<sup>2</sup>
- (b) See Table 4.3.1.7, and determine the cable to be used for connecting the metal frames of the  $\alpha i$  PS,  $\alpha i$  SP,  $\alpha i$  SV, and dynamic brake module (DBM) to the frame ground of the cabinet.

**Table 4.3.1.7 Grounding cable conductor diameter**

| Motor power cable cross-section S<br>(mm <sup>2</sup> ) | Grounding cable cross-section<br>(mm <sup>2</sup> ) |
|---------------------------------------------------------|-----------------------------------------------------|
| $S \leq 5.5$                                            | 5.5 or greater                                      |
| $5.5 < S \leq 16$                                       | S or greater                                        |
| $16 < S \leq 35$                                        | 16 or greater                                       |
| $35 < S$                                                | S/2 or greater                                      |

#### NOTE

The following M5 crimp terminal can be used with a cable having a large conductor diameter.  
Nichifu Co., Ltd. CB22-5S  
Overall conductor size range : 16.78 to 22.66 mm<sup>2</sup>

Based on the tables below, select a crimp terminal used for connection to the  $\alpha i$  PS.

#### 200-V system


| Amplifier model                                                                                                | Terminal screw | Tightening torque |
|----------------------------------------------------------------------------------------------------------------|----------------|-------------------|
| $\alpha i$ PS 5.5, $\alpha i$ PS 11, $\alpha i$ PS 15,<br>$\alpha i$ PS 26, $\alpha i$ PS 30, $\alpha i$ PS 37 | M5             | 2 to 2.5Nm        |
| $\alpha i$ PS 55                                                                                               | M6             | 3.5 to 4.5Nm      |

#### 400-V system

| Amplifier model                                                                   | Terminal screw | Tightening torque |
|-----------------------------------------------------------------------------------|----------------|-------------------|
| $\alpha i$ PS 11HV, $\alpha i$ PS 18HV,<br>$\alpha i$ PS 30HV, $\alpha i$ PS 45HV | M5             | 2 to 2.5Nm        |
| $\alpha i$ PS 75HV, $\alpha i$ PS 100HV                                           | M6             | 3.5 to 4.5Nm      |


### 9.3.1.8 Detailed description of the connection of cables K41 (for regenerative discharge resistance), K42 (for thermostat), and K43 (for fan motor)

#### Connection for A06B-6089-H510 and A06B-6089-H500

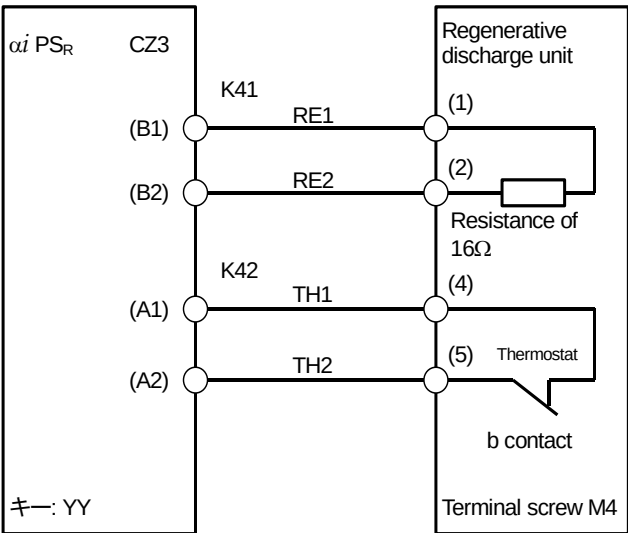

#### Tyco Electronics AMP D-5000

Receptacle housing




| Cable number | Applicable cable                                                                     | Connector key<br>(Note 2) | Applicable contact<br>(Note 2) |
|--------------|--------------------------------------------------------------------------------------|---------------------------|--------------------------------|
|              | VCT(heat resistant 60°C (Note 1))                                                    |                           |                                |
| K41          | 2mm <sup>2</sup><br>Two-conductor polyvinyl heavy-duty power cable<br>(JIS C3312)    | YY<br>2-917807-2          | S size<br>316040-6             |
| K42          | 1.25mm <sup>2</sup><br>Two-conductor polyvinyl heavy-duty power cable<br>(JIS C3312) |                           | S size<br>316040-6             |

#### NOTE

- Run cables K41 and K42 without tying them in a bundle.
- CZ1 near them is for the power supply. Be careful of the connector key.

### Connection for A06B-6089-H711 to -H713

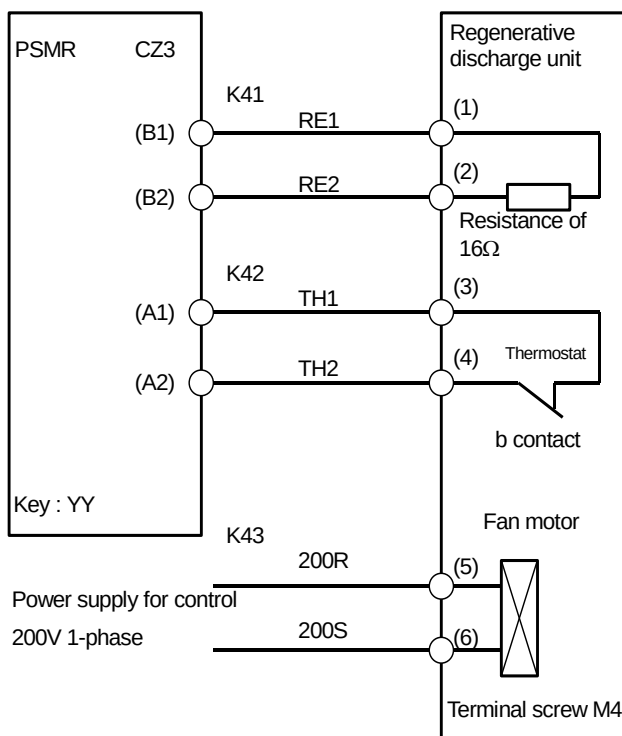

| Cable number | Applicable cable                                                                     | Connector key<br>(Note 2) | Applicable contact (Note 2) |
|--------------|--------------------------------------------------------------------------------------|---------------------------|-----------------------------|
|              | VCT(heat resistant 60°C (Note 1))                                                    |                           |                             |
| K41          | 2mm <sup>2</sup><br>Two-conductor polyvinyl heavy-duty power cable<br>(JIS C3312)    | YY<br>2-917807-2          | S size<br>316040-6          |
| K42          | 1.25mm <sup>2</sup><br>Two-conductor polyvinyl heavy-duty power cable<br>(JIS C3312) |                           | S size<br>316040-6          |
| K43          | 2mm <sup>2</sup><br>Two-conductor polyvinyl heavy-duty power cable<br>(JIS C3312)    |                           |                             |

#### NOTE

- 1 Run cables K41, K42, and K43 without tying them in a bundle.
- 2 CZ1 near them is for the power supply. Be careful of the connector key.

### **9.3.1.9 Details of cable K100 (for power failure detection output)**

---

Cable K100 is used for the function for preventing the vertical axis from falling at the time of power failure. For details, see Appendix I, "POWER FAILURE DETECTION FUNCTION".


**NOTE**

A06B-6110-Hxxx and A06B-6120-Hxxx do not have an output for the K100.

### 9.3.2 $\alpha i$ SV series Connection Diagram


60mm- or 90mm-wide  $\alpha i$  SV (example :  $\alpha i$  SV 2-axis)

Without connection to dynamic brake module

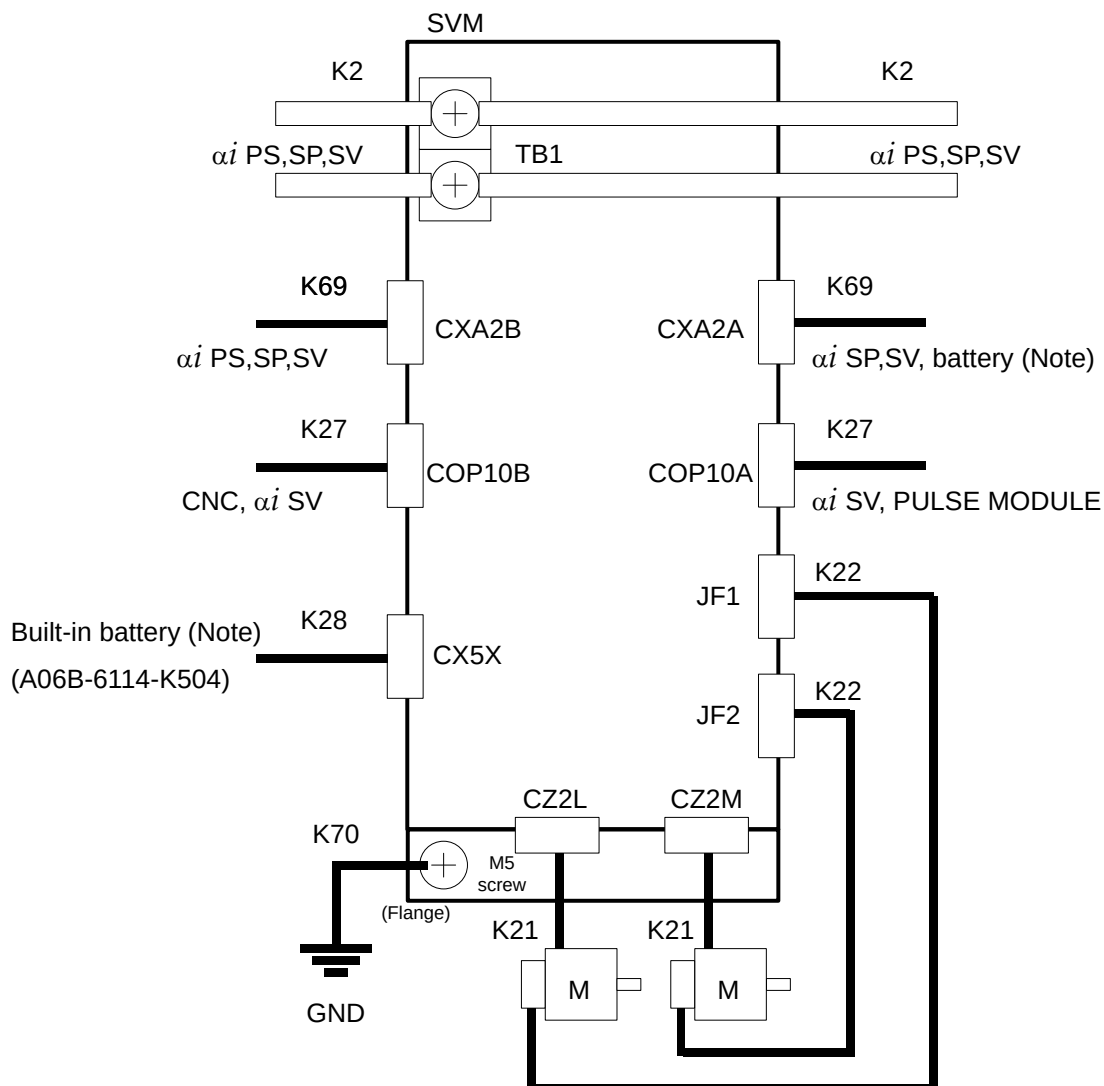


#### NOTE

See Subsection 9.3.2.10 for connection to the battery or built-in battery.

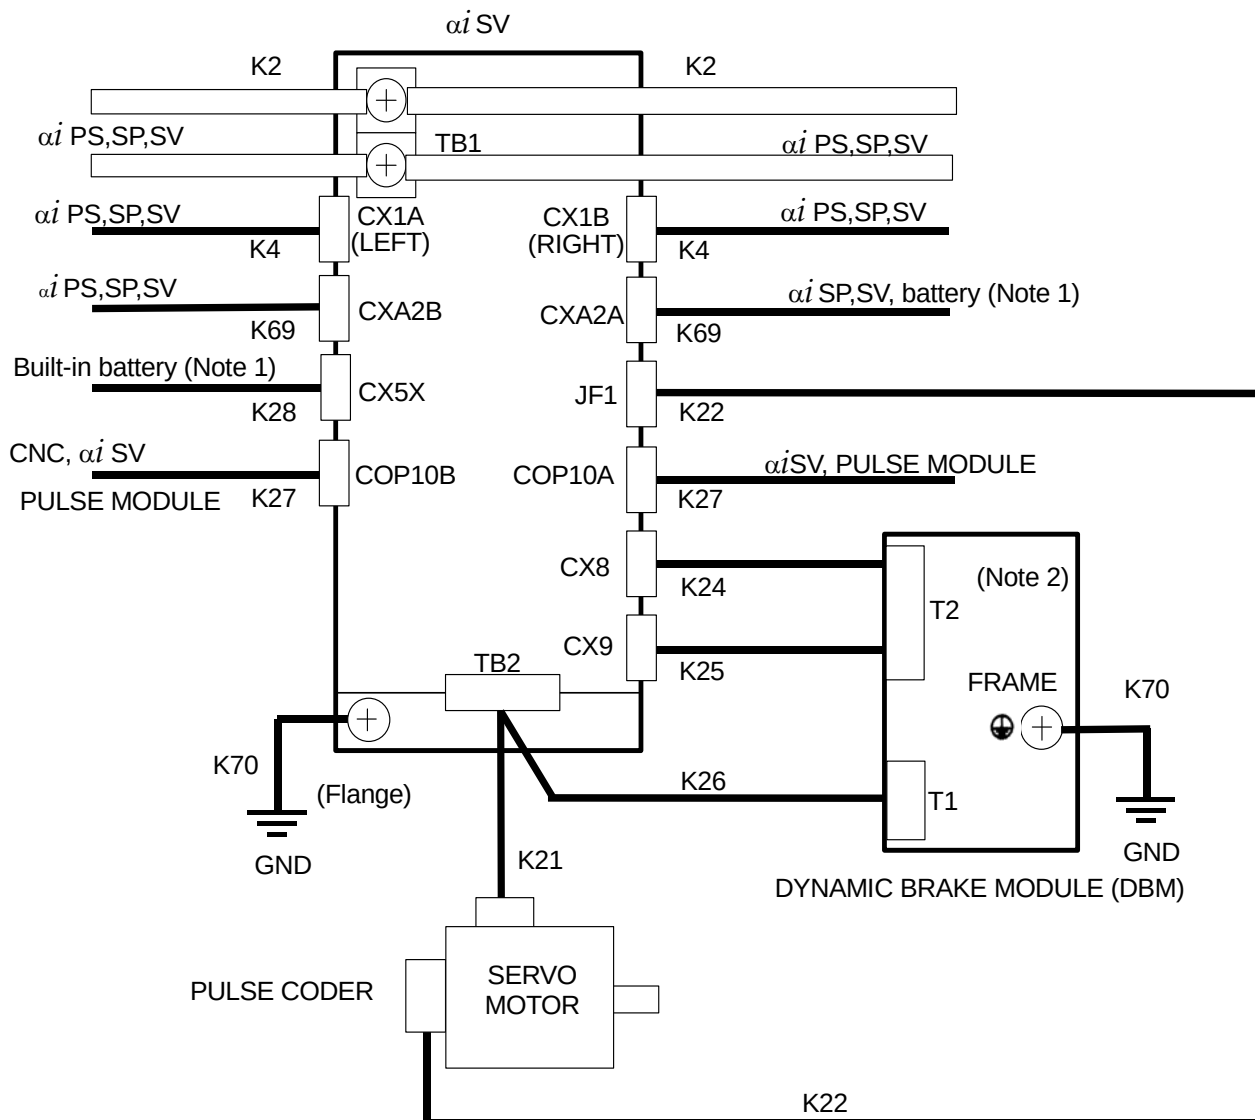**$\alpha i$  SV 360,  $\alpha i$  SV 180HV,  $\alpha i$  SV 360HV****NOTE**

- 1 See Subsection 9.3.2.10 for connection to the battery or built-in battery.
- 2 Connect one dynamic brake module for each servo amplifier.

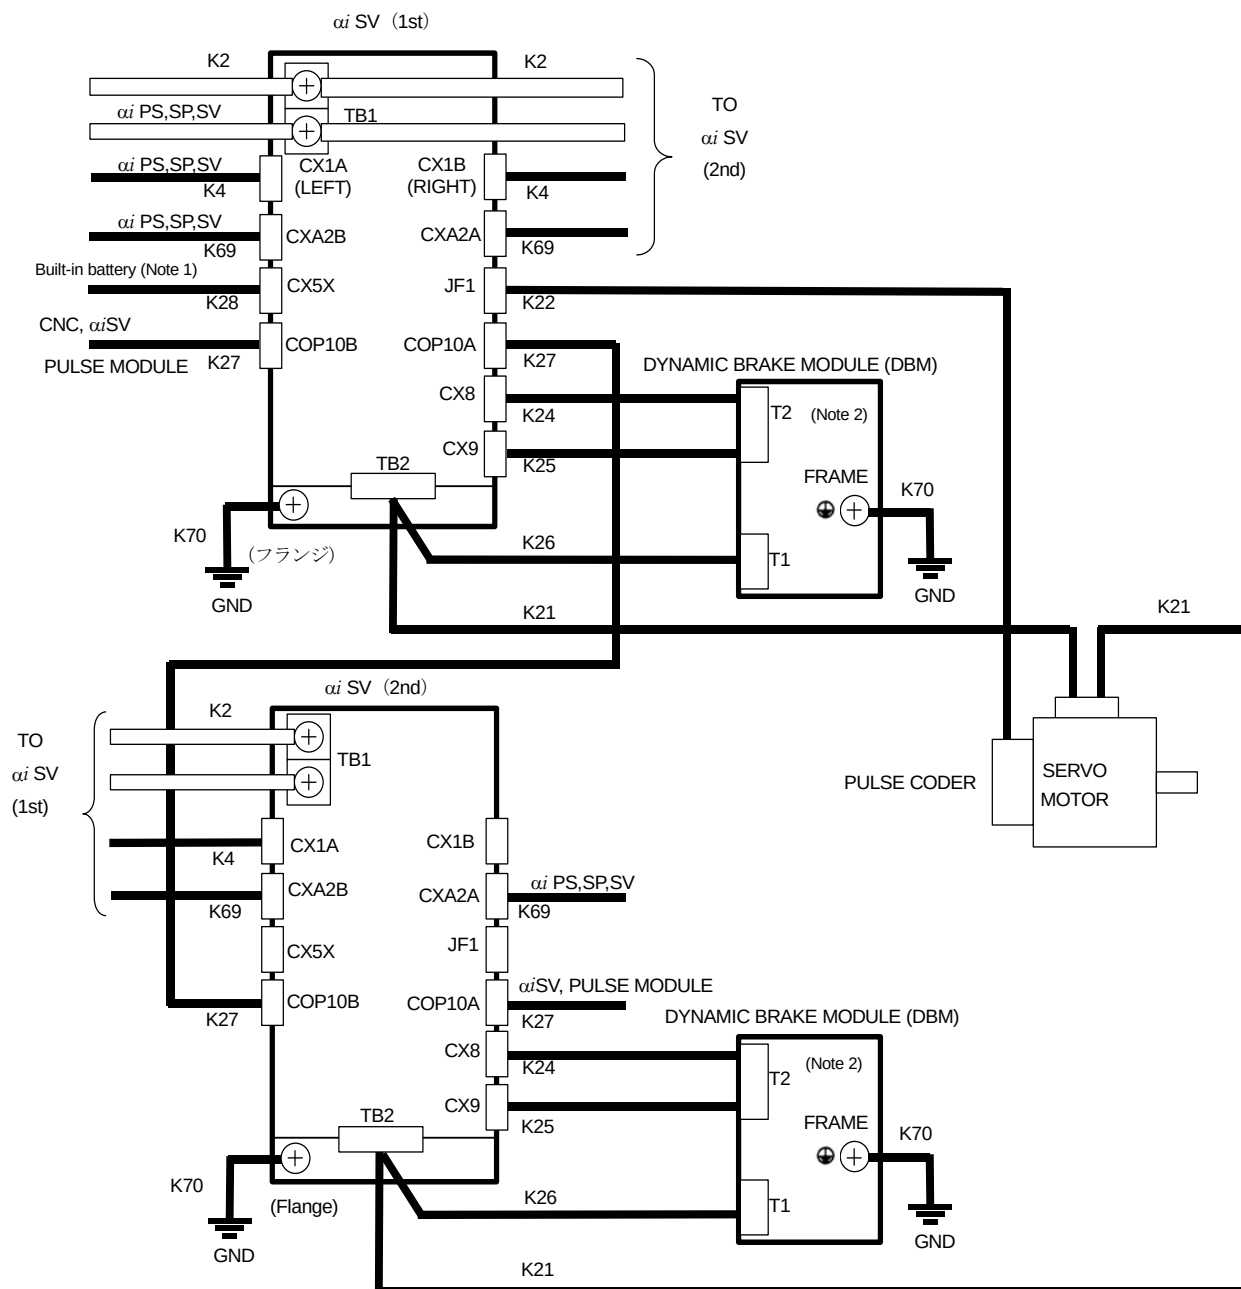**$\alpha$ i SV 360,  $\alpha$ i SV 180HV,  $\alpha$ i SV 360HV****When a servo motor with two windings is driven by two amplifiers****NOTE**

- 1 See Subsection 9.3.2.10 for connection to the battery or built-in battery.
- 2 Connect one dynamic brake module for each servo amplifier.



9.3.2.1 Details of cable K2


---

The cable K2 is used to connect the DC link.  
See Item 9.3.1.2.

9.3.2.2 Details of cable K4

---

Cable K4 is a connection cable used to supply power (single phase, 200 VAC) for driving the dynamic brake unit to the  $\alpha$ i SV.

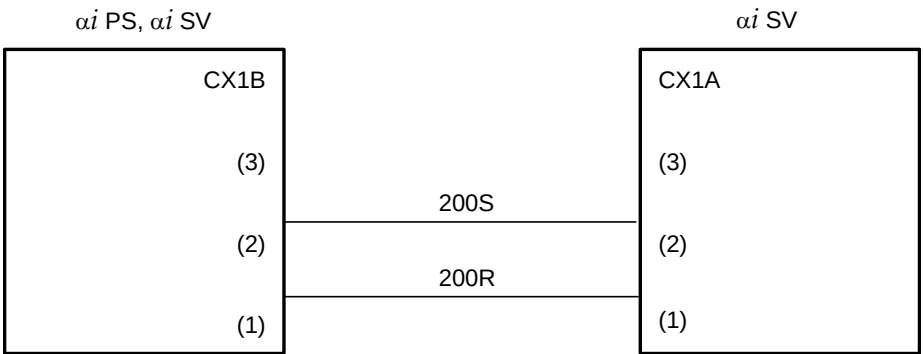

Example cable :  
Two-conductor polyvinyl heavy-duty power cable (JIS C3312)  
Conductor size of : 1.25mm<sup>2</sup> (50/0.18)  
PVC sheath 9.6 mm in diameter  
Connector specification:  
Tyco Electronics AMP connector with receptacle housing  
1-178128-3 and receptacle contact 1-175218-2

9.3.2.3 Details of cable K69


---

The cable K69 is a communication cable used between modules.  
See Item 9.3.1.4.

### 9.3.2.4 Details of cable K21

The cable K21 is a power cable used between the  $\alpha i$  SV and motor. The cable is attached to the  $\alpha i$  SV through the connector D-5000 excluding  $\alpha i$  SV 160L,  $\alpha i$  SV 360,  $\alpha i$  SV 180HVL,  $\alpha i$  SV 180HV and  $\alpha i$  SV 360HV

#### Connection by connector

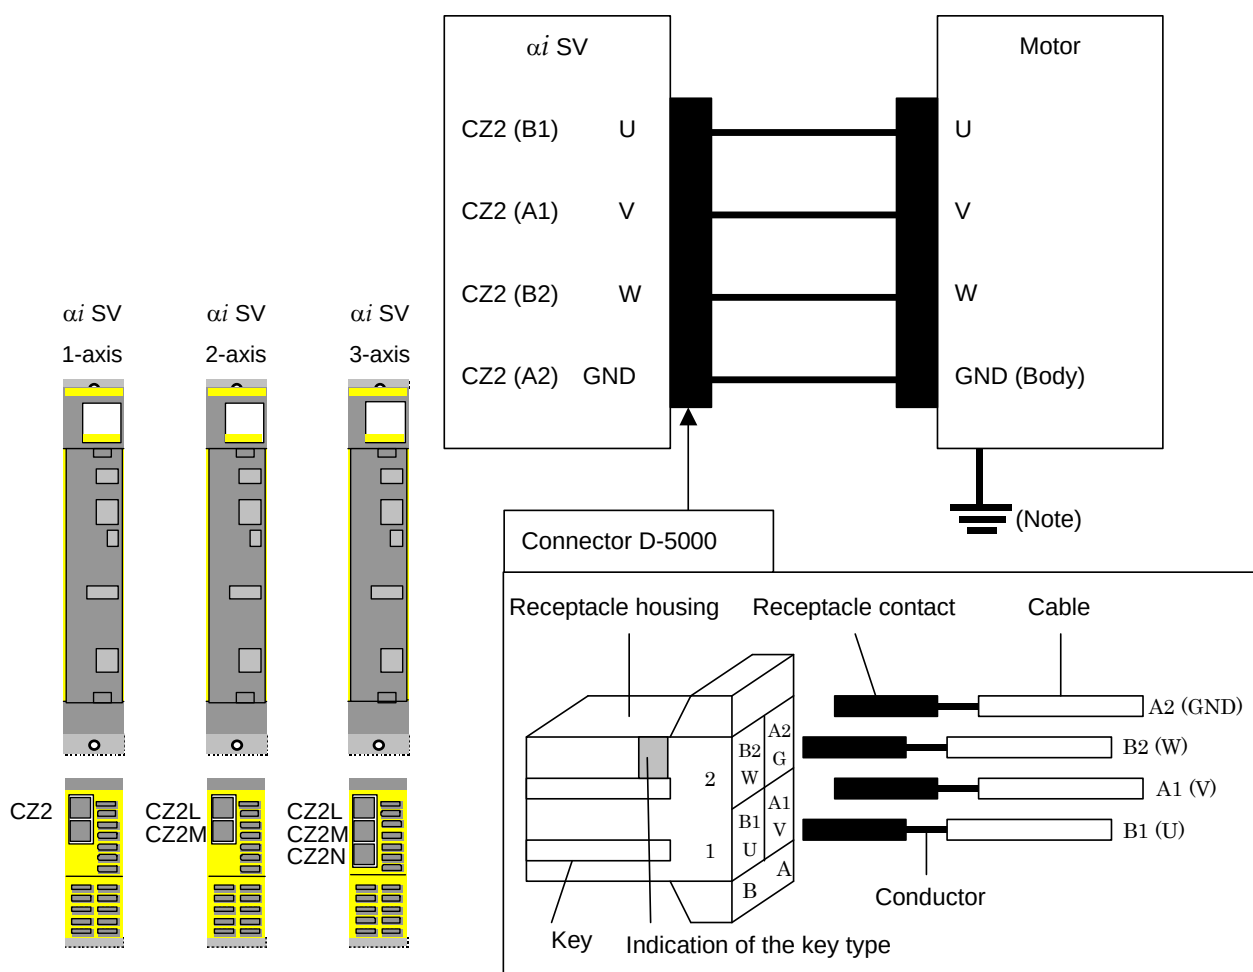

#### NOTE

When the  $\alpha i$  SV 400-V input series is used, always mount the motor flange on a cabinet (machine) connected to the system ground. It may be difficult to connect the motor flange to a cabinet (machine) connected to the system ground. In this case, connect the motor flange and frame ground (ground plate of the cabinet) using a cable at least 1.25 mm<sup>2</sup> thick. The cable must be separated from the power lines as much as possible.

 **WARNING**

- 1 If the phase order of the power lines is incorrect, an unpredictable motor operation may occur.
- 2 If the power lines are connected to wrong axes (L/M/N), an unpredictable motor operation may occur.

### About the receptacle housing of the $\alpha i$ SV-side connector

The  $\alpha i$  SV-side connector is a key type. The key is intended to prevent incorrect connection between the axes of multi-axis amplifiers ( $\alpha i$  SV2,  $\alpha i$  SV3). Select the receptacle housing that matches the  $\alpha i$  SV and its axis that are to be used.

See Subsection 9.4.2 for detailed explanations about the specification of the D-5000.

| Specification of the key | Applicable SVM                                       |
|--------------------------|------------------------------------------------------|
| XX                       | $\alpha i$ SV1, $\alpha i$ SV2(L), $\alpha i$ SV3(L) |
| XY                       | $\alpha i$ SV2(M), $\alpha i$ SV3(M)                 |
| YY                       | $\alpha i$ SV3(N)                                    |


### About the receptacle contact of the $\alpha i$ SV-side connector

Four types receptacle contacts are prepared for the different line diameter of the cable. Please use the receptacle contact which suits the line diameter of the cable.

See Subsection 9.4.2 for detailed explanations about the specification of the D-5000.

Connection by terminal block

*αi* SV 160L, *αi* SV 180HVL

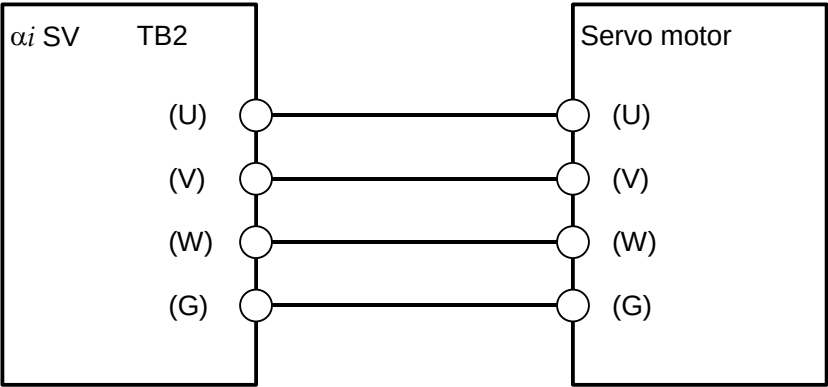

- 200-V input series

Cables should be connected to the *αi* SV using crimp terminals as listed in the following table.

| Amplifier models  | Terminal screw | Rigid torque |
|-------------------|----------------|--------------|
| <i>αi</i> SV 160L | M4             | 1.1 to 1.5Nm |

- 400-V input series

Cables should be connected to the *αi* SV using crimp terminals as listed in the following table.

| Amplifier models    | Terminal screw | Rigid torque |
|---------------------|----------------|--------------|
| <i>αi</i> SV 180HVL | M4             | 1.1 to 1.5Nm |

### About the cable specification


Select the cable specification by considering the following conditions for use.

- <1> Motor current rating or current needed in use on a real machine
- <2> Cable type (heat resistance temperature, etc.)
- <3> Environment in which the cable is installed (operating ambient temperature, etc.)
- <4> Need of water proofing (pay attention to the diameter of the applicable cable clamp)
- <5> Certification for CE marking (compliance with various safety standards and EMC standard)
- <6> Securing insulation space among the cable pins at the time of cabling

### About the motor-side connector

The specification of the motor-side connector varies from one motor model to another.

Refer to "FANUC AC SERVO MOTOR  $\alpha$ i series Descriptions (B-65262EN)" for explanations about the specification of the motor-side connector.

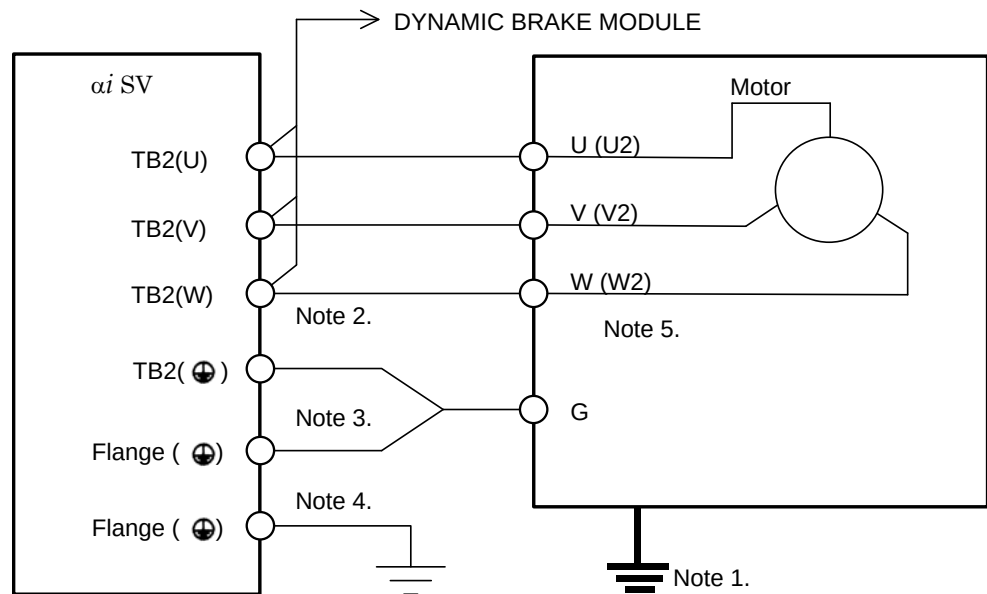**$\alpha i$  SV 360,  $\alpha i$  SV 180HV,  $\alpha i$  SV 360HV****NOTE**

- 1 When the  $\alpha i$  SV 400-V input series is used, always mount the motor flange on a cabinet (machine) connected to the system ground. It may be difficult to connect the motor flange to a cabinet (machine) connected to the system ground. In this case, connect the motor flange and frame ground (ground plate of the cabinet) using a cable at least 1.25 mm<sup>2</sup> thick. The cable must be separated from the power lines as much as possible.
- 2 Size of screw for motor power line TB2(U), TB2(V), and TB2(W)
  - For  $\alpha i$  SV 360,  $\alpha i$  SV 180HV : M6
  - For  $\alpha i$  SV 360HV : M10
- 3 Connection for motor ground lead
  - For  $\alpha i$  SV 360,  $\alpha i$  SV 180HV:  
Connection to TB2(G) (M6)
  - For  $\alpha i$  SV 360HV : Connection to flange (M6)
- 4 Size of screws for connection between flange and ground
  - For  $\alpha i$  SV 360,  $\alpha i$  SV 180HV : M5
  - For  $\alpha i$  SV 360HV : M6
- 5 To drive a motor with multiple windings by using two  $\alpha i$  SV amplifiers, connect motor power lines (U, V, W, and G) to the first  $\alpha i$  SV amplifier, and connect motor power lines (U2, V2, W2, and G) to the second  $\alpha i$  SV amplifier.

### 9.3.2.5 Details of cable K22


The cable K22 is used to connect the  $\alpha i$  SV and Pulsecoder.



#### WARNING

If the connector (JF1, 2, or 3) of the pulsecoder is connected incorrectly, an unpredictable motor operation may occur.

For servo motor  $\alpha iF$ ,  $\alpha iS$  series  
and Servo motor  $\beta iS$  series ( $\beta iS$  0.4/5000 to  $\beta iS$  22/2000)

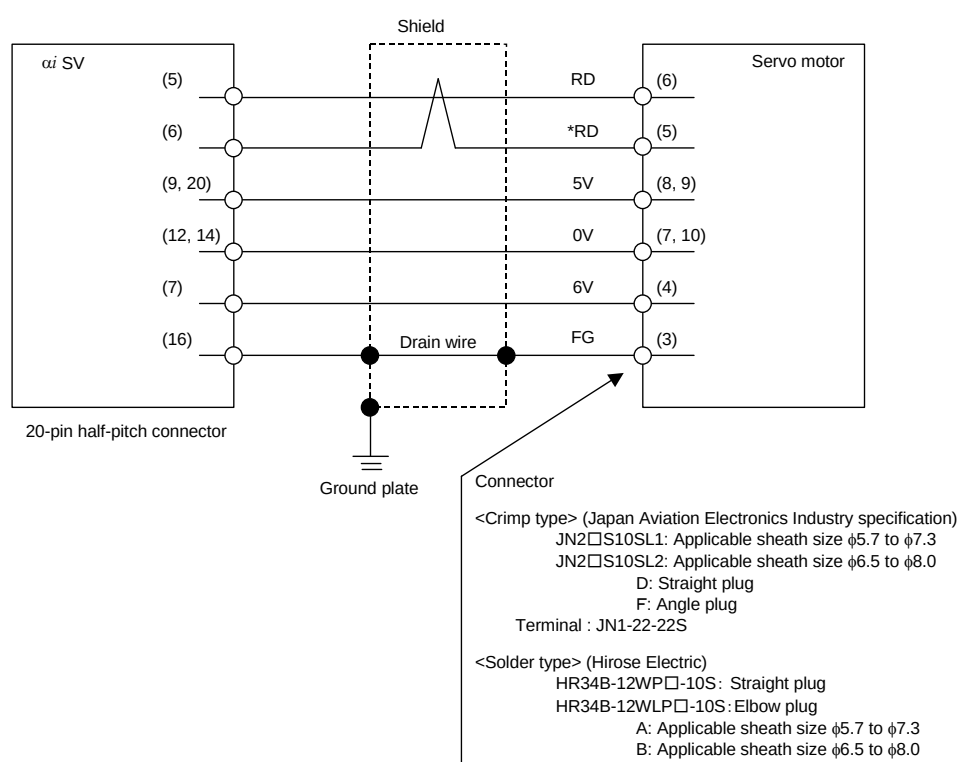

#### Using cable conductor



| Signal name | Cable length : 28m or less                                                                                                       | Cable length : 50m or less                                                                                                        |
|-------------|----------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|
| 5V, 0V, 6V  | 0.3mm <sup>2</sup> × 5 (Note 4)<br>Strand configuration 12/0.18 or 60/0.08<br>Insulation outer diameter $\phi 0.8$ to $\phi 1.5$ | 0.5mm <sup>2</sup> × 5 (Note 4)<br>Strand configuration 20/0.18 or 104/0.08<br>Insulation outer diameter $\phi 0.8$ to $\phi 1.5$ |
| RD, *RD     | 0.18mm <sup>2</sup> or more<br>Twisted-pair wire<br>Insulation outer diameter $\phi 0.8$ to $\phi 1.5$                           | 0.18mm <sup>2</sup> or more<br>Twisted-pair wire<br>Insulation outer diameter $\phi 0.8$ to $\phi 1.5$                            |
| Drain wire  | 0.15mm <sup>2</sup> or more                                                                                                      | 0.15mm <sup>2</sup> or more                                                                                                       |

See Subsection 9.4.1 for explanations for  $\alpha i$  SV connector that matches the recommended cable.

See Appendix B, "About Cable Conductors," for detailed explanations about the cable.

**NOTE**

- 1 The ground plate to which the shield is connected must be placed as close as possible to the servo amplifier so that distance between the ground plate and the servo amplifier becomes shortest.
- 2 In case that the cable is prepared by MTB, total resistance of 5V and 0V must be less than  $2\Omega$ .
- 3 Pulsecoder side connector can accept maximum  $0.5\text{mm}^2$  (wire construction 20/0.18 or 104/0.08, diameter  $\phi 1.5$  or less) wire and sheath diameter is  $\phi 5.7$  to  $\phi 8.0$ . In case of using thicker wire or cable, take measures described below.

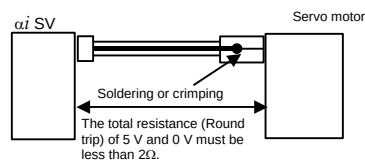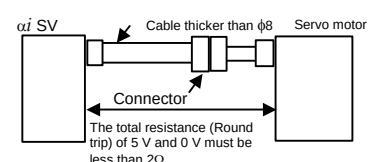[Case 1] Cable conductor exceeds  $0.5\text{mm}^2$ .[Case 2] Sheath diameter of exceeds  $\phi 8$ .

- 4 In case of incremental Pulsecoder, 6V is not necessary to be connected.

- Crimp tool specification

| FANUC specification | Japan Aviation Electronics Industry specification | Applicable cable thickness                                                                            |
|---------------------|---------------------------------------------------|-------------------------------------------------------------------------------------------------------|
| A06B-6114-K201/JN1E | CT150-2-JN1-E                                     | 21AWG( $0.5\text{mm}^2$ :20/0.18)<br>23AWG( $0.3\text{mm}^2$ )<br>25AWG( $0.18\text{mm}^2$ )          |
| A06B-6114-K201/JN1D | CT150-2-JN1-D                                     | 20AWG( $0.5\text{mm}^2$ :104/0.08)<br>21AWG( $0.5\text{mm}^2$ :20/0.18)<br>25AWG( $0.18\text{mm}^2$ ) |

- Recommended cable

| Recommended cable specification | Description                 | Crimp tool specification                                                                                             |
|---------------------------------|-----------------------------|----------------------------------------------------------------------------------------------------------------------|
| A66L-0001-0460                  | Flexible cable 28 m or less | A06B-6114-K201/JN1E<br>(FANUC specification)<br>CT150-2-JN1-E<br>(Japan Aviation Electronics Industry specification) |
| A66L-0001-0481                  | Fixed cable 28 m or less    |                                                                                                                      |
| A66L-0001-0462                  | Flexible cable 50 m or less | A06B-6114-K201/JN1D<br>(FANUC specification)<br>CT150-2-JN1-D<br>(Japan Aviation Electronics Industry specification) |
| A66L-0001-0491                  | Fixed cable 50 m or less    |                                                                                                                      |

- Connector kit specification

## &lt;Crimp type&gt;

A06B-6114-K204/S : Straight plug (including a contact)

A06B-6114-K204/E : Elbow plug (including a contact)


## &lt;Solder type&gt;

A06B-6114-K205/S : Straight plug

A06B-6114-K205/E : Elbow plug



### For servo motor $\beta iS$ series ( $\beta 0.2/5000iS$ , $\beta 0.3/5000iS$ )

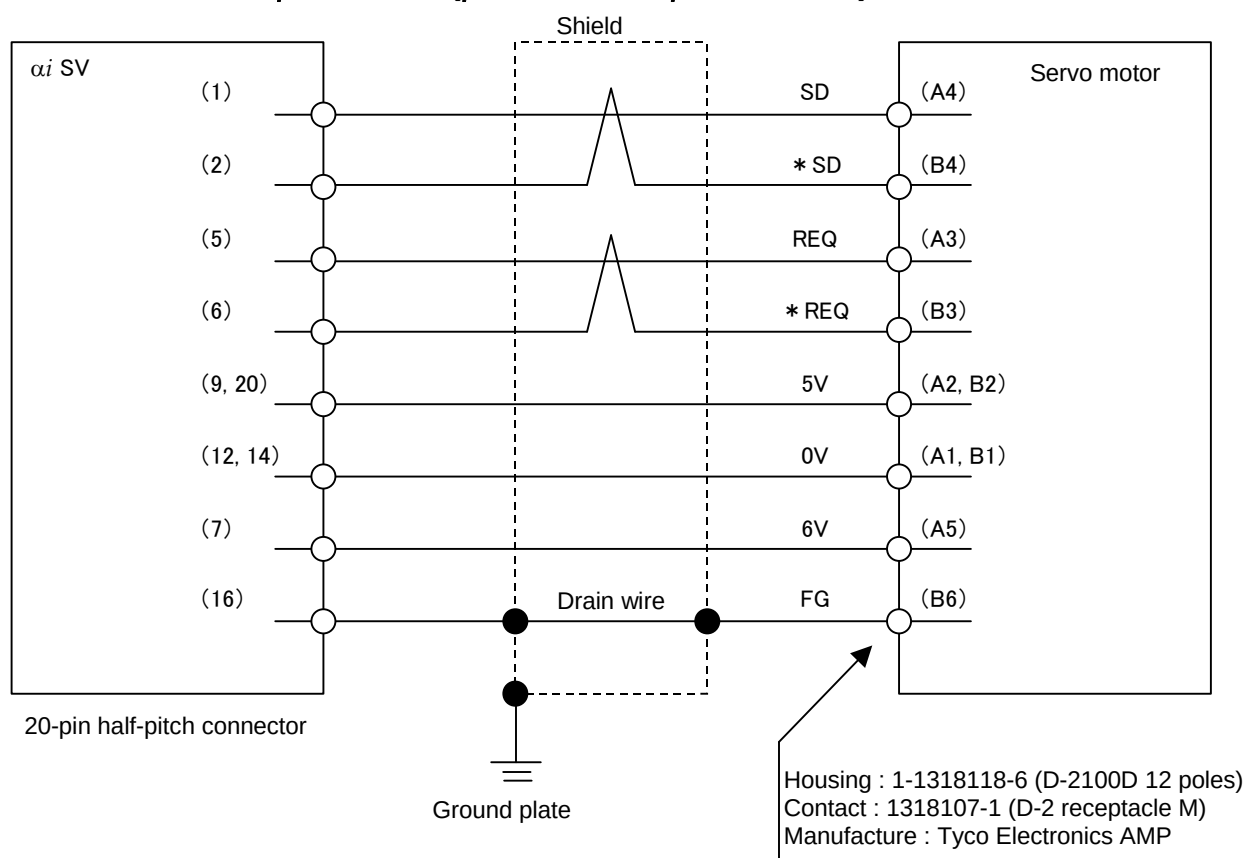


#### Using cable conductor

| Signal name        | Cable length : 20m or less                                                                                                                                                                                                     |
|--------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 5V, 0V, 6V         | 0.5mm <sup>2</sup> (AWG21) × 5 (Note 4)<br>Strand configuration: 20/0.18<br>Insulation outer diameter: φ0.88 to φ1.5                                                                                                           |
| SD, *SD, REQ, *REQ | 0.18mm <sup>2</sup> (AWG25) or more<br>Twisted-pair wire<br>Strand configuration: 7/0.18<br>Insulation outer diameter: φ0.88 to φ1.5                                                                                           |
| Drain wire         | 0.15mm <sup>2</sup> or more                                                                                                                                                                                                    |
| Recommended wire   | 0.5mm <sup>2</sup> × 5 + 0.18mm <sup>2</sup> × two-pair<br>(For a fixed cable)<br>Hitachi Cable, Ltd. : UL20276-SB(0)5 × 21AWG+2P×25AWG<br>(For a movable cable)<br>Hitachi Cable, Ltd. : UL20276-SB(FLEX)5 × 20AWG+2P × 25AWG |

See Subsection 9.4.1 for explanations about the  $\alpha i$  SV-side connector that matches the recommended cable.


**NOTE**

- 1 The ground plate to which the shield is connected must be placed as close as possible to the servo amplifier so that distance between the ground plate and the servo amplifier becomes shortest.
- 2 In case that the cable is prepared by the user, the total resistance (round trip) of 5 V and 0 V must be less than  $0.8\Omega$ .
- 3 The maximum applicable wire diameter of the cable connector on the motor side is  $0.5\text{ mm}^2$  (when crimping tool 1463475-1 is used) or  $0.85\text{ mm}^2$  (when crimping tool 1276654-1 is used). In case of using thicker wire or cable, take measures described below.



- 4 In case of incremental Pulsecoder, 6V is not necessary to be connected.

## Absolute $\alpha i$ CZ sensor

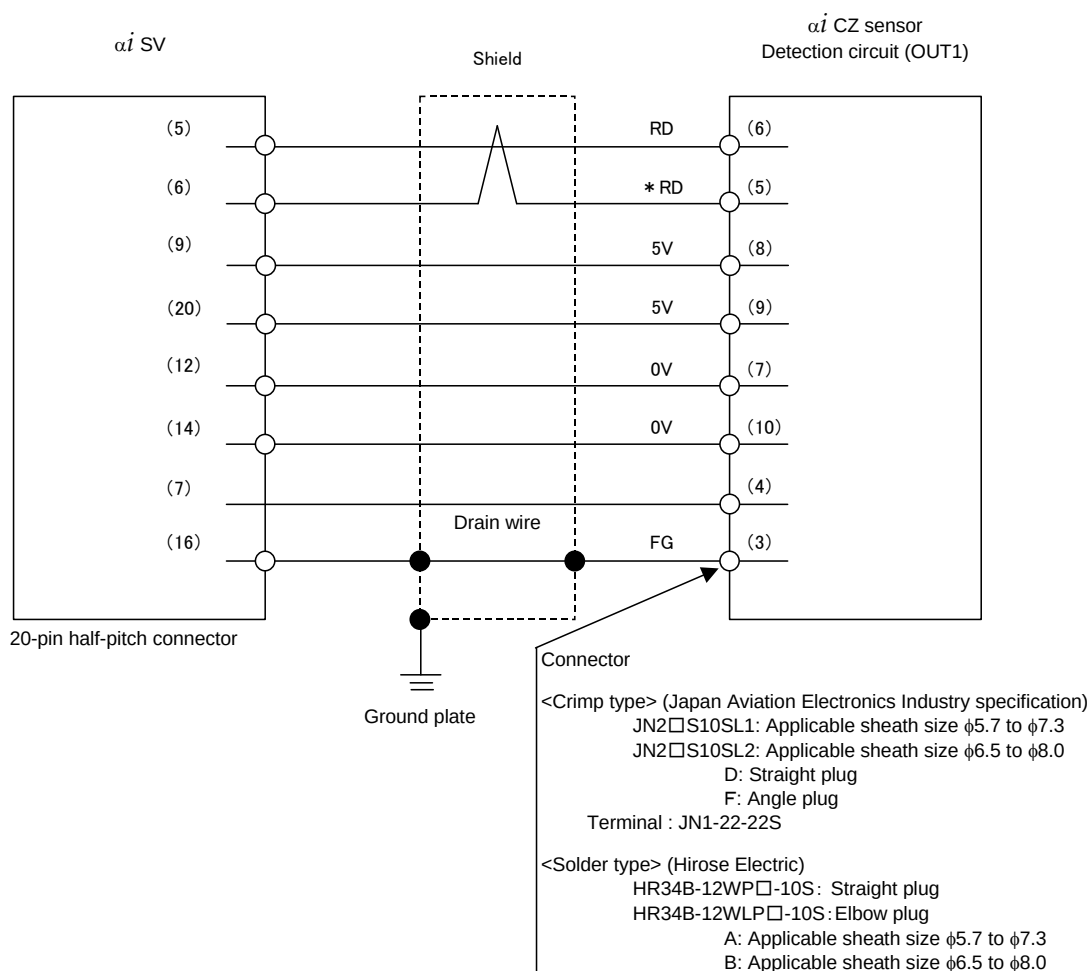

### Using cable conductor


| Signal name | Cable length : 28m or less                                                                                          | Cable length : 50m or less                                                                                           |
|-------------|---------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------|
| 5V, 0V, 6V  | 0.3mm <sup>2</sup> × 5<br>Strand configuration: 12/0.18 or 60/0.08<br>Insulation outer diameter: $\phi 1.5$ or less | 0.5mm <sup>2</sup> × 5<br>Strand configuration: 20/0.18 or 104/0.08<br>Insulation outer diameter: $\phi 1.5$ or less |
| RD, *RD     | 0.18mm <sup>2</sup> or more<br>Twisted-pair wire<br>Insulation outer diameter: $\phi 1.5$ or less                   | 0.18mm <sup>2</sup> or more<br>Twisted-pair wire<br>Insulation outer diameter: $\phi 1.5$ or less                    |
| Drain wire  | 0.15mm <sup>2</sup> or more                                                                                         | 0.15mm <sup>2</sup> or more                                                                                          |

### NOTE


The ground plate to which the shield is connected should be placed near the servo amplifier to minimize the distance between the servo amplifier and ground plate.

### 9.3.2.6 Details of cable K24

(1) For A06B-6079-H401

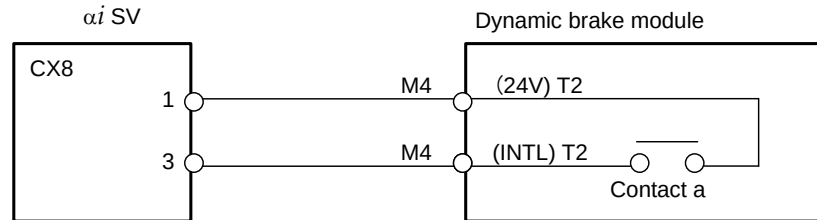

(2) For A06B-6069-H300

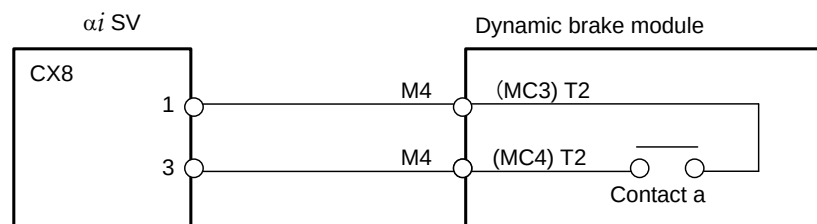

Example cable :

Two-conductor polyvinyl heavy-duty power cable (JIS C3312)

Conductor size of : 1.25mm<sup>2</sup> (50/0.18)

PVC sheath 9.6 mm in diameter

Connector specification:

Tyco Electronics AMP connector with receptacle housing


2-178128-3 and receptacle contact 1-175218-2

Crimping terminal :


2-4

### 9.3.2.7 Details of cable K25

(1) For A06B-6079-H401

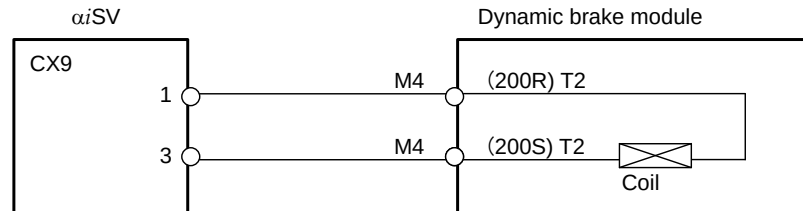

(2) For A06B-6069-H300

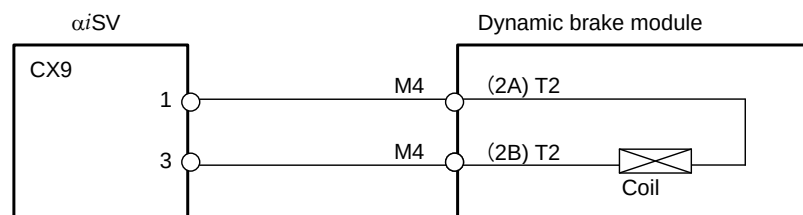

Example cable :

Two-conductor polyvinyl heavy-duty power cable (JIS C3312)

Conductor size of : 1.25mm<sup>2</sup> (50/0.18)

PVC sheath 9.6 mm in diameter

Connector specification:


Tyco Electronics AMP connector with receptacle housing

1-178128-3 and receptacle contact 1-175218-2

Crimping terminal :

2-4

### 9.3.2.8 Details of cable K26

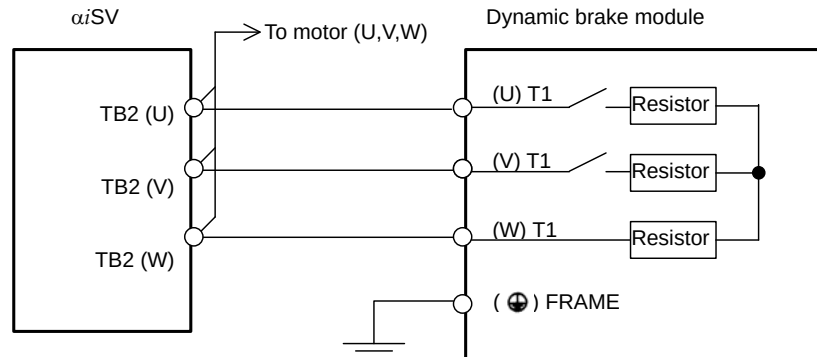

Example cable :

Fire-retardant polyflex wire (maximum conductor temperature 105°C) or equivalent to LMFC manufactured by The Furukawa Electric Co., Ltd., 5.5 mm<sup>2</sup> or larger

Connector specification:

Tyco Electronics AMP connector with receptacle housing 1-178128-3 and receptacle contact 1-175218-2

Crimping terminal :

DBM side 5.5-5 (A06B-6079-H401)


5.5-8 (A06B-6069-H300)

$\alpha iSV$  side 5.5-6 ( $\alpha iSV$  360,  $\alpha iSV$  180HV)

5.5-10 ( $\alpha iSV$  360HV)

### 9.3.2.9 Details of cable K27

Cable K27 is an optical fiber cable used in the FSSB interface.

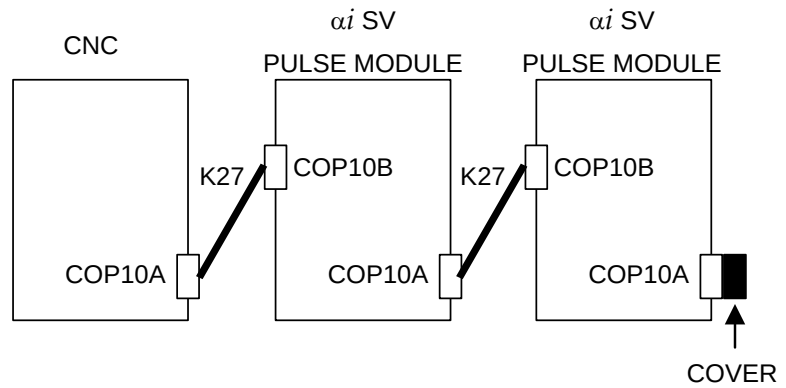

- The cable is run from connector COP10A in the CNC,  $\alpha i$  SV, or pulse module to connector COP10B in the  $\alpha i$  SV or pulse module.
- Connector COP10A of a module at the end of the cable chain must be covered with the cap supplied with the module.
- Refer to the applicable CNC connection manual for detailed specifications of the optical fiber cable.

### 9.3.2.10 Connecting the battery (for the absolute Pulsecoder)


The following two methods can be used to connect the batteries for the absolute Pulsecoder: [connection method 1] and [connection method 2]

#### NOTE

- 1 Since the battery is a part that is in need of periodic maintenance by nature, it is recommended to use [connection method 1]. In this case, commercial batteries (four R20 alkaline batteries), which are easy to purchase, can be used.
- 2 The built-in batteries used in [connection method 2] must be purchased directly from FANUC. It is recommended that spare built-in batteries is purchased.
- 3 Do not use both [connection method 1] and [connection method 2] at the same time. Otherwise, multiple batteries are connected to the same BATL(B3) line, and a short-circuit will occur between the output voltages of different batteries, possibly resulting in the batteries becoming very hot, which is dangerous.

#### [Connection method 1]


- (1) Supplying power from one battery unit to more than one  $\alpha$ iSV  
(1)

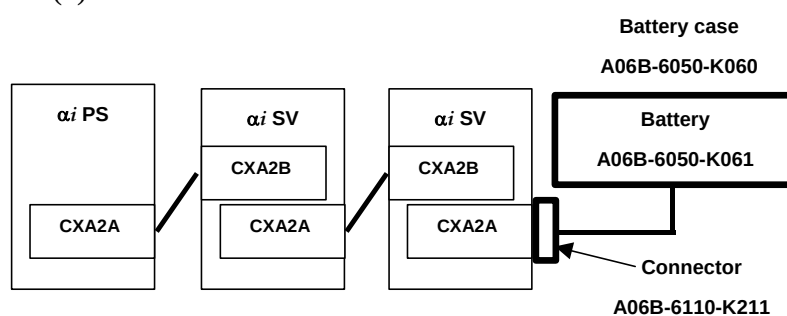

- A battery case (A06B-6050-K060) and four R20 alkaline batteries (A06B-6050-K061) are available as options. Commercial R20 alkaline batteries can also be used.




[Connection between the battery case and amplifier]

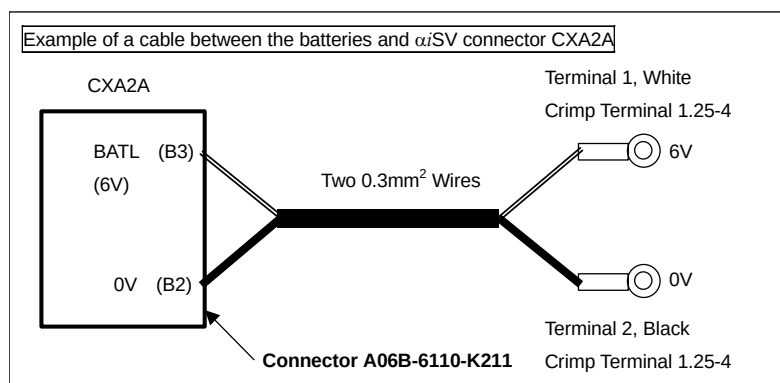

- A connector (A06B-6110-K211) for connecting batteries is available as an option.

[Connection between amplifiers]

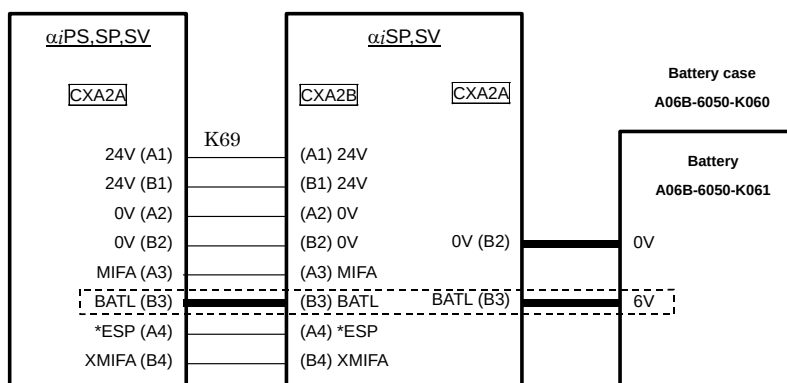

- The BATL(B3) is an interface for supplying power from one absolute Pulsecoder battery unit to more than one  $\alpha i$  SV.
- Specification of the connector

|                                   |                                                                                                                                           |
|-----------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Manufacturer</b>               | Tyco Electronics AMP                                                                                                                      |
| <b>Connector specification</b>    | D-2100 series<br>Housing 1-1318119-4 (2 pieces)<br>Contact 1318107-1 (8 pieces)<br>[Ordering information : A06B-6110-K210 connector only] |
| <b>Conductor size</b>             | 0.5mm <sup>2</sup> , AWG20                                                                                                                |
| <b>Instruction outer diameter</b> | 1.08-2.83 mm                                                                                                                              |

#### NOTE


- 1 Up to six servo motors can be connected to one battery.
- 2 The life of the batteries are about two years if they are used for six  $\alpha i$  series servo motors and one year if they are used for six  $\alpha$  series servo motors.



**WARNING**


Do not connect more than one battery to the same BATL(B3) line.  
Otherwise, a short-circuit will occur between the output voltages of different batteries, possibly resulting in the batteries becoming very hot, which is dangerous.

- (2) Supplying power from one battery unit to more than one  $\alpha$ iSV  
(2)

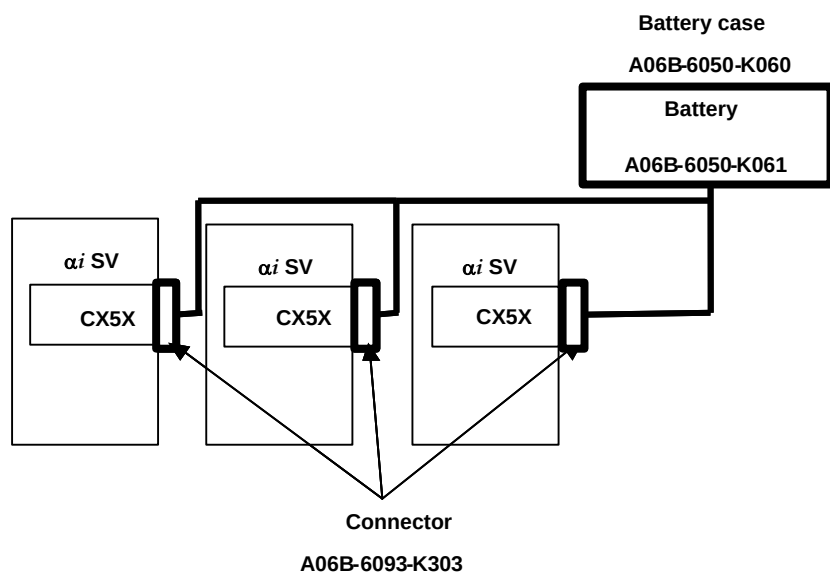

[Connection between the battery case and amplifier]

Example of a cable between the batteries and  $\alpha$ iSV connector CX5X

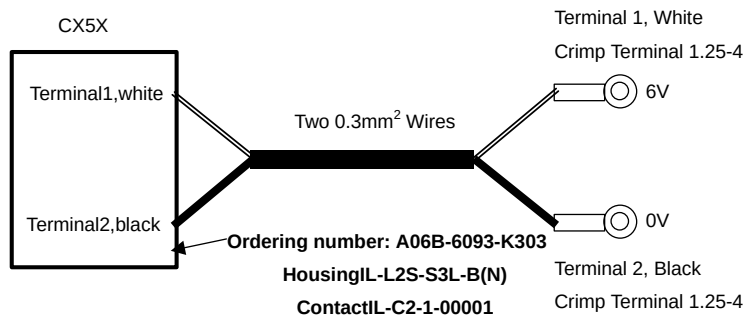


- Specification of the connector

|                          |                                                                              |
|--------------------------|------------------------------------------------------------------------------|
| Drawing No.              | A06B-6093-K303                                                               |
| Manufacturer             | Japan Aviation Electronics Industry                                          |
| Manufacturer part number | Housing: IL-L2S-S3L-B(N), Quantity: 1<br>Contact: IL-C2-1-00001, Quantity: 2 |

To connect the contacts to the cable, a special crimping tool is required. Contact the manufacturer (Japan Aviation Electronics Industry Ltd.).

- A battery case (A06B-6050-K060) and four size-D alkaline dry cells (A06B-6050-K061) are available as options. Size-D alkaline dry cells are commercially available.

[Connection between amplifiers]

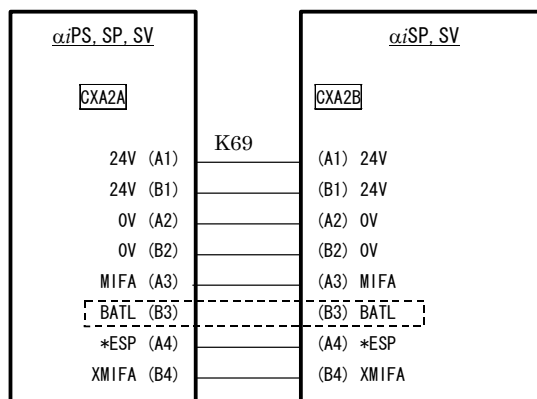

Leave BATL(B3) open.

#### NOTE

- 1 Up to six servo motors can be connected to one battery.
- 2 The battery service life is about two years for the  $\alpha i$  series servo motor or about one year for the  $\alpha$  series servo motor.




#### WARNING

Do not connect multiple batteries to the same BATL(B3) line. Otherwise, a short-circuit will occur between the output voltages of different batteries, possibly resulting in the batteries becoming very hot, which is dangerous.

**[Connection method 2]**

- (1) Incorporating built-in batteries in each  $\alpha i$  SV  
 (Models other than  $\alpha i$  SV 360,  $\alpha i$  SV 180HV, and  $\alpha i$  SV 360HV)

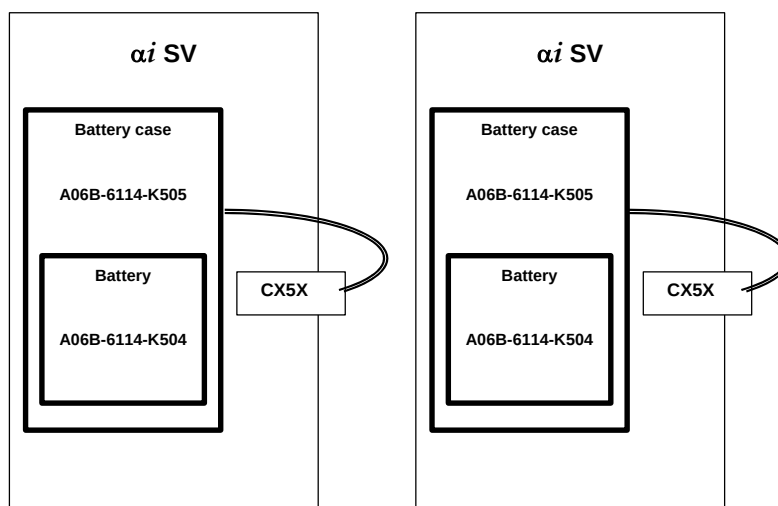


- Using the built-in battery (A06B-6114-K504) requires the battery case (A06B-6114-K505).  
 A cover originally mounted at the  $\alpha i$  SV battery location cannot be used with the battery.

**⚠ WARNING**

- 1 When using the built-in battery, never connect the BATL(B3) of the connector CXA2A/CXA2B. Otherwise, a short-circuit will occur between the output voltages of different  $\alpha i$  SV batteries, possibly resulting in the batteries becoming very hot, which is dangerous.
- 2 Do not connect more than one battery to the same BATL(B3) line. Otherwise, a short-circuit will occur between the output voltages of different batteries, possibly resulting in the batteries becoming very hot, which is dangerous.

- Incorporating built-in batteries in each  $\alpha i$  SV  
For the  $\alpha i$  SV 360,  $\alpha i$  SV 180HV, and  $\alpha i$  SV 360HV

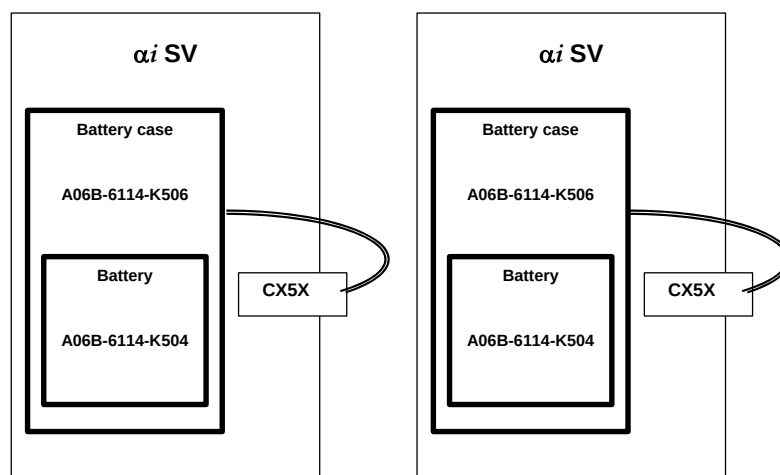

- Using the built-in battery (A06B-6114-K504) requires the battery case (A06B-6114-K505).

#### **WARNING**

- 1 When using the built-in battery, never connect the BATL(B3) of the connector CXA2A/CXA2B. Otherwise, a short-circuit will occur between the output voltages of different  $\alpha i$  SV batteries, possibly resulting in the batteries becoming very hot, which is dangerous.
- 2 Do not connect more than one battery to the same BATL(B3) line. Otherwise, a short-circuit will occur between the output voltages of different batteries, possibly resulting in the batteries becoming very hot, which is dangerous.

## Battery life

When the  $\alpha i$  series servo motor is used, the batteries need to be replaced periodically as follows:

| Battery ordering specification | Standard backup life | Remark                       |
|--------------------------------|----------------------|------------------------------|
| A06B-6050-K061                 | 2 years/6 axes       | Size D alkaline dry cell × 4 |
| A06B-6114-K504                 | 1 year/3 axes        | Lithium battery              |

---


### **9.3.2.11 Details of cable K70**

---

Connect the  $\alpha i$  SV flange to the grounding plate through a grounding cable. (Protective ground connection)  
See Subsection 9.3.1.7 for detailed descriptions about the K70.

### 9.3.3 $\alpha i$ SP Series Connection Diagram

#### Spindle amplifier module ( $\alpha i$ SP series)

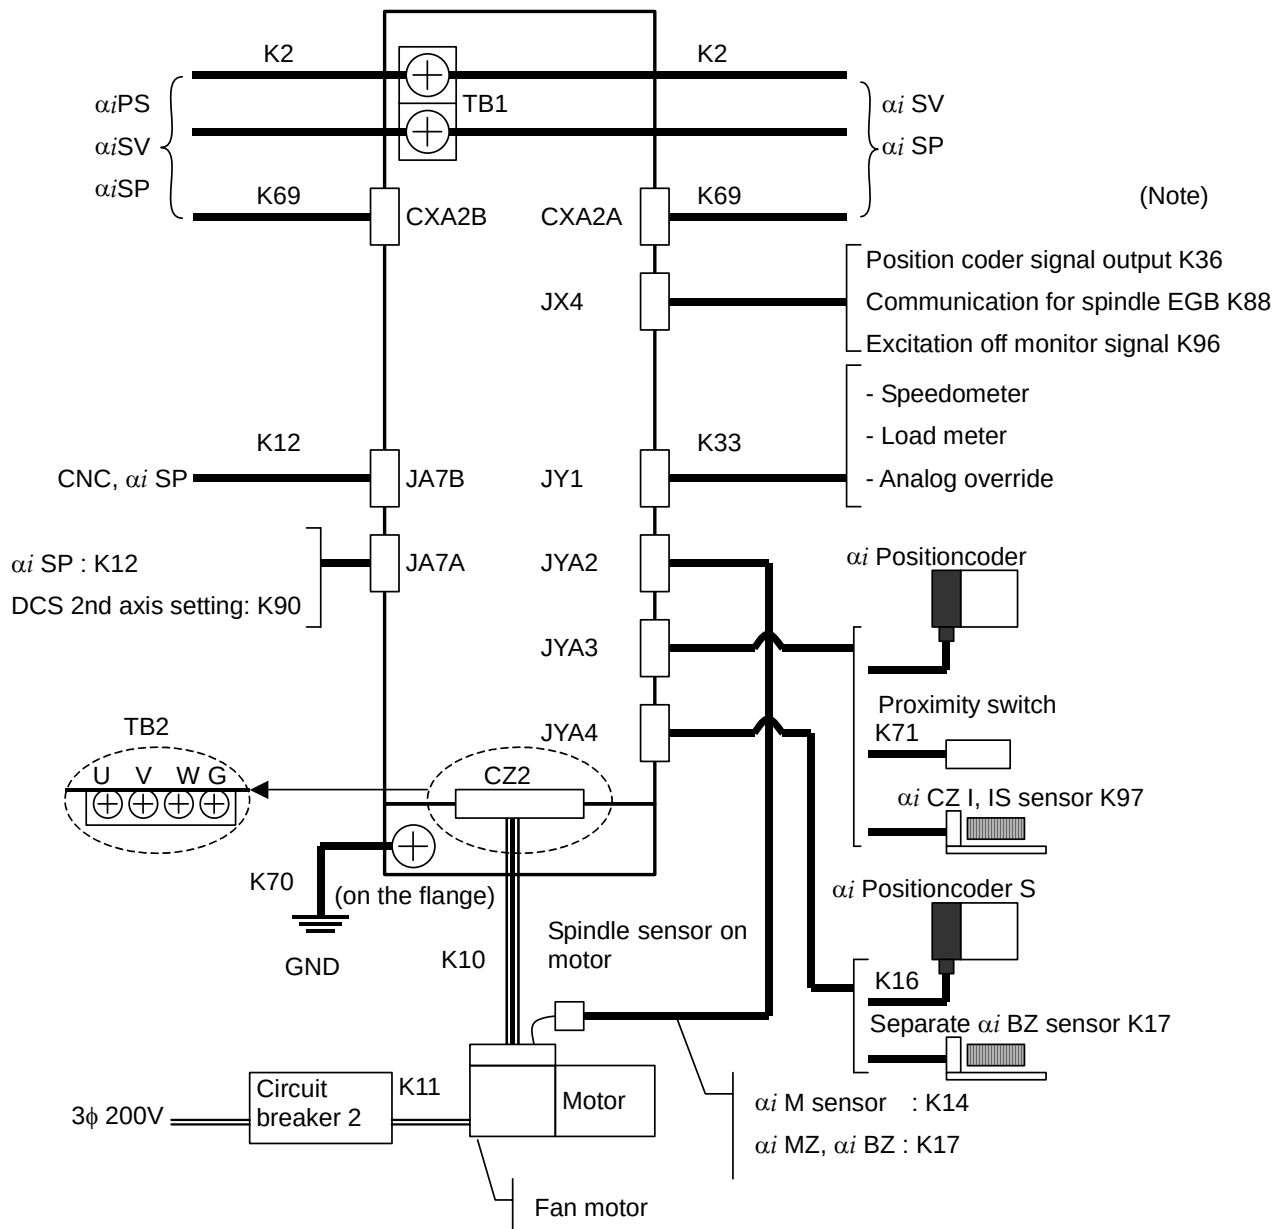

---

### 9.3.3.1 Details of cable K2

---

See Item 9.3.1.2.

---

### 9.3.3.2 Details of cable K69

---

See Item 9.3.1.4.

---

### 9.3.3.3 Details of cable K10 (power cable)

---

For the *ai* SP 2.2 and *ai* SP 5.5, a connector (D-5000) is used to attach the SPM motor power cable. For other models, a terminal block is used for connection.

This subsection does not include the dimensions of the crimp terminal or the shape of the motor-side connector.

Refer to "AC SPINDLE MOTOR *ai* series Descriptions (B-65272EN)" for these items.

#### About the cable specification

Select the cable specification by considering the following conditions for use.

- <1> Motor current rating or current needed in use on a real machine
- <2> Cable type (heat resistance temperature, etc.)
- <3> Environment in which the cable is installed (operating ambient temperature, etc.)
- <4> Need of water proofing (pay attention to the diameter of the applicable cable clamp)
- <5> Certification for CE marking (compliance with various safety standards and EMC standard)
- <6> Securing insulation space among the cable pins at the time of cabling




#### CAUTION


If the phase order of the power lines is incorrect, an unpredictable motor operation may occur.



Connection through a connector

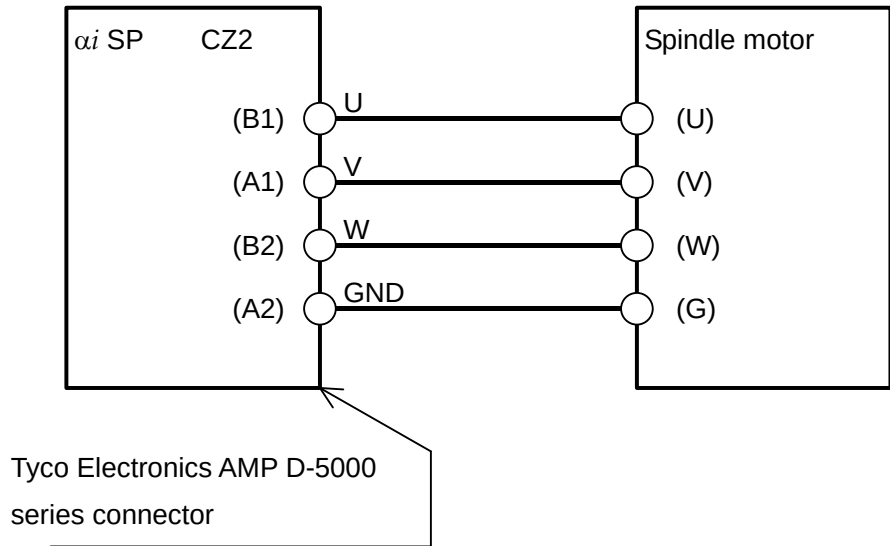

Location of connector pins

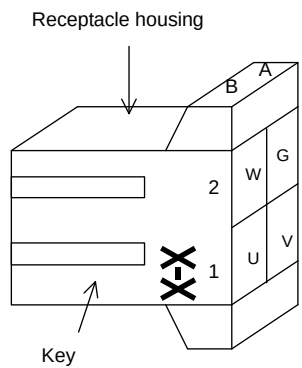


- 200-V input series

| Key specification | Applicable models                                        |
|-------------------|----------------------------------------------------------|
| XX                | <i>αi</i> SP 2.2, <i>αi</i> SP 5.5<br><i>αi</i> SP 5.5HV |

See Subsection 9.4.2 for details.

## Connection through a terminal block

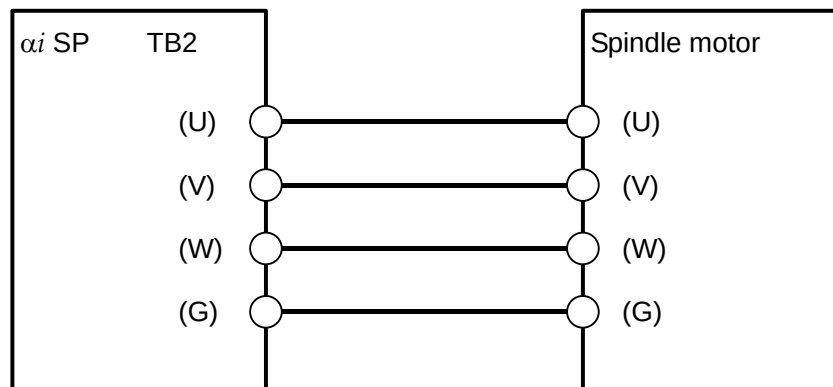

### - 200-V input series

Cables should be connected to the  $\alpha i$  SP using crimp terminals as listed in the following table.

| Amplifier models                                                         | Terminal screw | Rigid torque |
|--------------------------------------------------------------------------|----------------|--------------|
| $\alpha i$ SP 11, $\alpha i$ SP 15                                       | M4             | 1.1 to 1.5Nm |
| $\alpha i$ SP 22, $\alpha i$ SP 26<br>$\alpha i$ SP 30, $\alpha i$ SP 37 | M6             | 3.5 to 4.5Nm |
| $\alpha i$ SP 45, $\alpha i$ SP 55                                       | U V W : M10    | 15 to 16Nm   |
|                                                                          | G : M6         | 3.5 to 4.5Nm |

### - 400-V input series

Cables should be connected to the  $\alpha i$  SP using crimp terminals as listed in the following table.

| Amplifier models                         | Terminal screw | Rigid torque |
|------------------------------------------|----------------|--------------|
| $\alpha i$ SP 11HV, $\alpha i$ SP15HV    | M4             | 1.1 to 1.5Nm |
| $\alpha i$ SP 30HV, $\alpha i$ SP 45HV   | M6             | 3.5 to 4.5Nm |
| $\alpha i$ SP 75HV , $\alpha i$ SP 100HV | U,V,W : M10    | 15 to 16Nm   |
|                                          | G : M6         | 3.5 to 4.5Nm |

### 9.3.3.4 Details of cable K70

Connect the  $\alpha i$  SP flange to the grounding plate through a grounding cable. (Protective ground connection)

For connection with the  $\alpha i$  SP, use the crimp terminal selected according to the following table.

#### 200-V input series

| Amplifier model                                                                                                                                      | Terminal screw | Rigid torque |
|------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|--------------|
| $\alpha i$ SP 2.2, $\alpha i$ SP 5.5, $\alpha i$ SP 11<br>$\alpha i$ SP 15, $\alpha i$ SP 22, $\alpha i$ SP 26<br>$\alpha i$ SP 30, $\alpha i$ SP 37 | M5             | 2 to 2.5Nm   |
| $\alpha i$ SP 45, $\alpha i$ SP 55                                                                                                                   | M6             | 3.5 to 4.5Nm |

See Subsection 9.3.1.7 for details of the cable K70.

#### 400-V input series


| Amplifier model                                                                                       | Terminal screw | Rigid torque |
|-------------------------------------------------------------------------------------------------------|----------------|--------------|
| $\alpha i$ SP 5.5HV, $\alpha i$ SP 11HV<br>$\alpha i$ SP 15HV, $\alpha i$ SP 30HV, $\alpha i$ SP 45HV | M5             | 2 to 2.5Nm   |
| $\alpha i$ SP 75HV, $\alpha i$ SP 100HV                                                               | M6             | 3.5 to 4.5Nm |

See Subsection 9.3.1.7 for details of the cable K70.

### 9.3.3.5 Details of cable K11

See FANUC AC SPINDLE MOTOR  $\alpha i$  series DESCRIPTIONS (B-65272EN) for details of this Subsection.

### 9.3.3.6 Details of cable K12

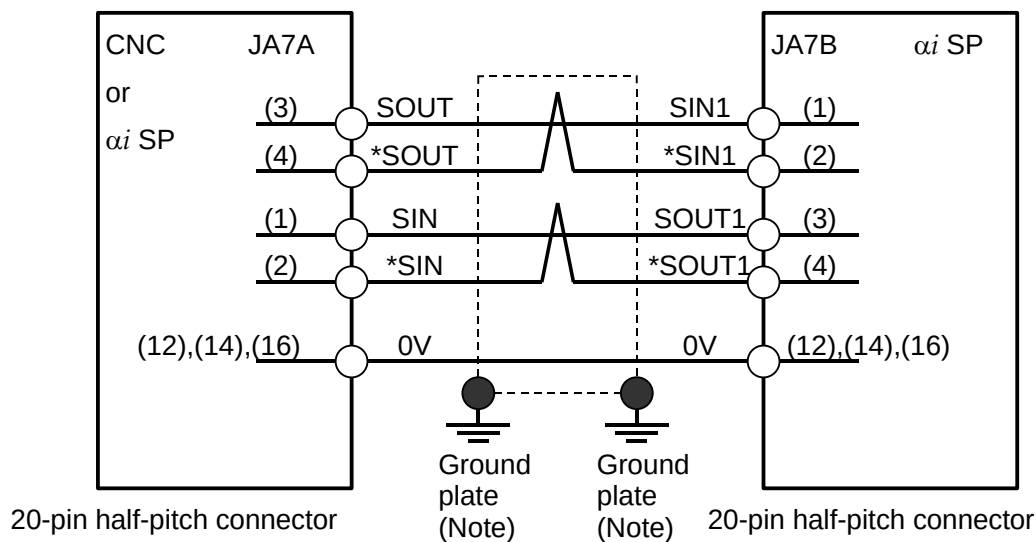

Cable specification: 0.09 mm<sup>2</sup> twisted pair with common shielded

Recommended cable (wire only): A66L-0001-0284#10P

See Section 9.4.1 for details of connectors applied to recommended cable.

See Appendix B for details of cables.

#### NOTE

If cable K12 is installed near the likes of a power cable, its shielding wire must be connected to a grounding plate. If an  $\alpha i$  SP is installed near the CNC or another  $\alpha i$  SP, however, it is not necessary to connect the shielding wire to a grounding plate.

## Connector pin assignment


JA7A and JA7B

|   |             |    |       |    |  |    |             |
|---|-------------|----|-------|----|--|----|-------------|
| 9 | 5V (Note 1) | 10 |       | 19 |  | 20 | 5V (Note 1) |
| 7 |             | 8  |       | 17 |  | 18 | 5V (Note 1) |
| 5 |             | 6  |       | 15 |  | 16 | 0V          |
| 3 | SOUT        | 4  | *SOUT | 13 |  | 14 | 0V          |
| 1 | SIN         | 2  | *SIN  | 11 |  | 12 | 0V          |

### NOTE


- 1 The +5V pin is intended for optical link transmission based on the optical I/O link adapter. Do not use it when a metal cable is being used; otherwise, the +5 V line of the CNC will be short-circuited with that of the  $\alpha i$  SP.
- 2  $\alpha i$  SP serial interface connection using an optical fiber cable  
The use of an optical I/O link adapter with the  $\alpha i$  SP serial interface extends the maximum allowable length of the optical fiber cable to up to 200 m.  
Use optical fiber cables in the following cases:
  - When the required cable length is 20 m or longer.
  - When the cable must be extended across multiple cabinets, and the cabinets cannot be connected with a grounding wire 5.5 mm<sup>2</sup> or larger.
  - The cable may be affected by noise, for example, if the cable is laid near a strong magnetic noise source like a welding machine or in parallel with a power line over a long distance.

### - Electrical interface connection between two $\alpha i$ SP units

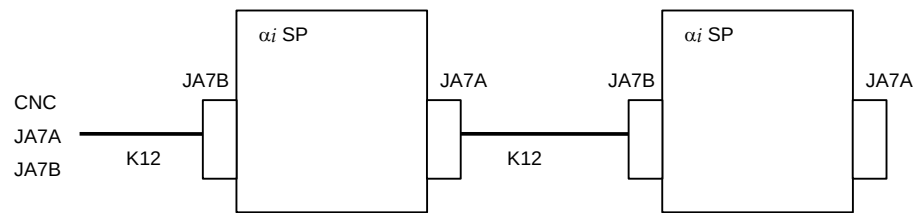


### - Electrical interface connection between four $\alpha i$ SP units in $i$ series

Refer to the applicable CNC Connection Manual (Hardware) for a detailed description of the serial spindle connector panel.

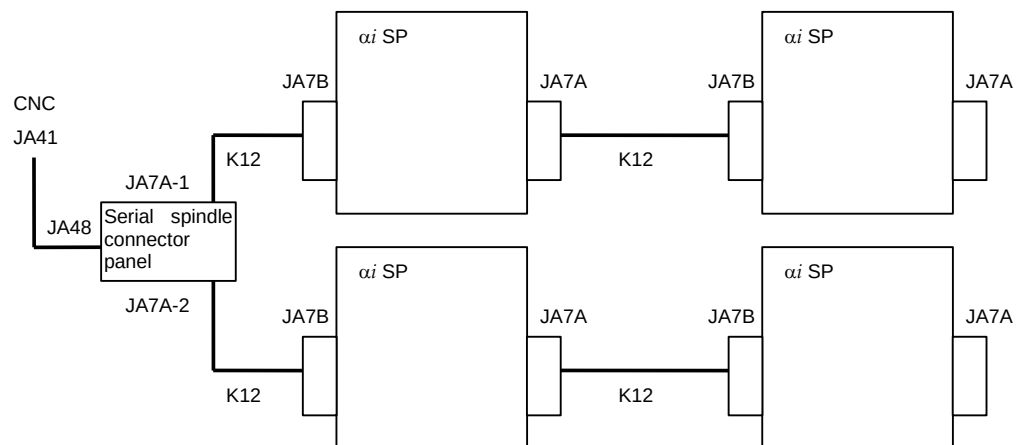

### 9.3.3.7 Details of cable K14

For the motor with  $\alpha iM$  sensor

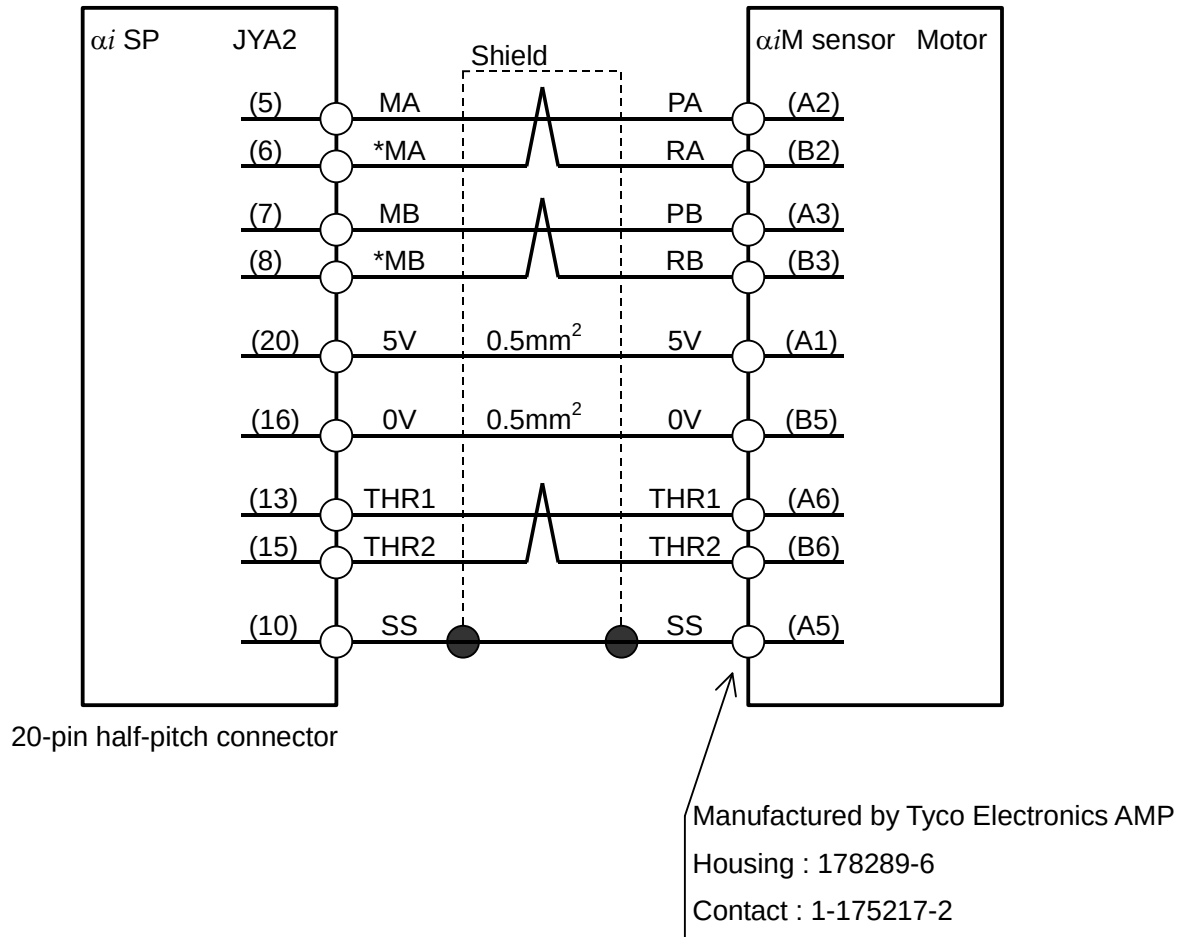

Cable specification :

6 common shielded cable

(Three  $0.18\text{mm}^2$  twisted pairs +  $0.5\text{mm}^2$  wires)

Recommended cable conductor : A66L-0001-0368

See Section 9.4.1 for explanations about the JYA2-side connector that matches the recommended cable. See Appendix B, "About Cable Conductors," for detailed explanations about the cable.

#### NOTE

If only one 5 V line and only one 0 V line are used, use pins 20 and 16 for them, so that, if the connector is attached the wrong way, the sensor can be prevented from being damaged.



#### WARNING

If the feedback signal is connected incorrectly, an unpredictable motor operation may occur.

**- Connector pin assignment**

JYA2

|   |    |    |     |    |      |    |    |
|---|----|----|-----|----|------|----|----|
| 9 | 5V | 10 | SS  | 19 | #    | 20 | 5V |
| 7 | MB | 8  | *MB | 17 | #    | 18 | 5V |
| 5 | MA | 6  | *MA | 15 | THR2 | 16 | 0V |
| 3 | #  | 4  | #   | 13 | THR1 | 14 | 0V |
| 1 | MZ | 2  | *MZ | 11 | #    | 12 | 0V |

**NOTE**


Do not use any pin that is marked #, because they may already be in use for input/output signals for an optional PCB.

Pin arrangement of the connector (manufactured by Tyco Electronics AMP) on the motor side

|    |      |    |      |
|----|------|----|------|
| A1 | +5V  | B1 |      |
| A2 | PA   | B2 | RA   |
| A3 | PB   | B3 | RB   |
| A4 |      | B4 |      |
| A5 | SS   | B5 | 0V   |
| A6 | THR1 | B6 | THR2 |



### For the $\alpha$ iI 0.5 spindle motor with $\alpha$ i M sensor

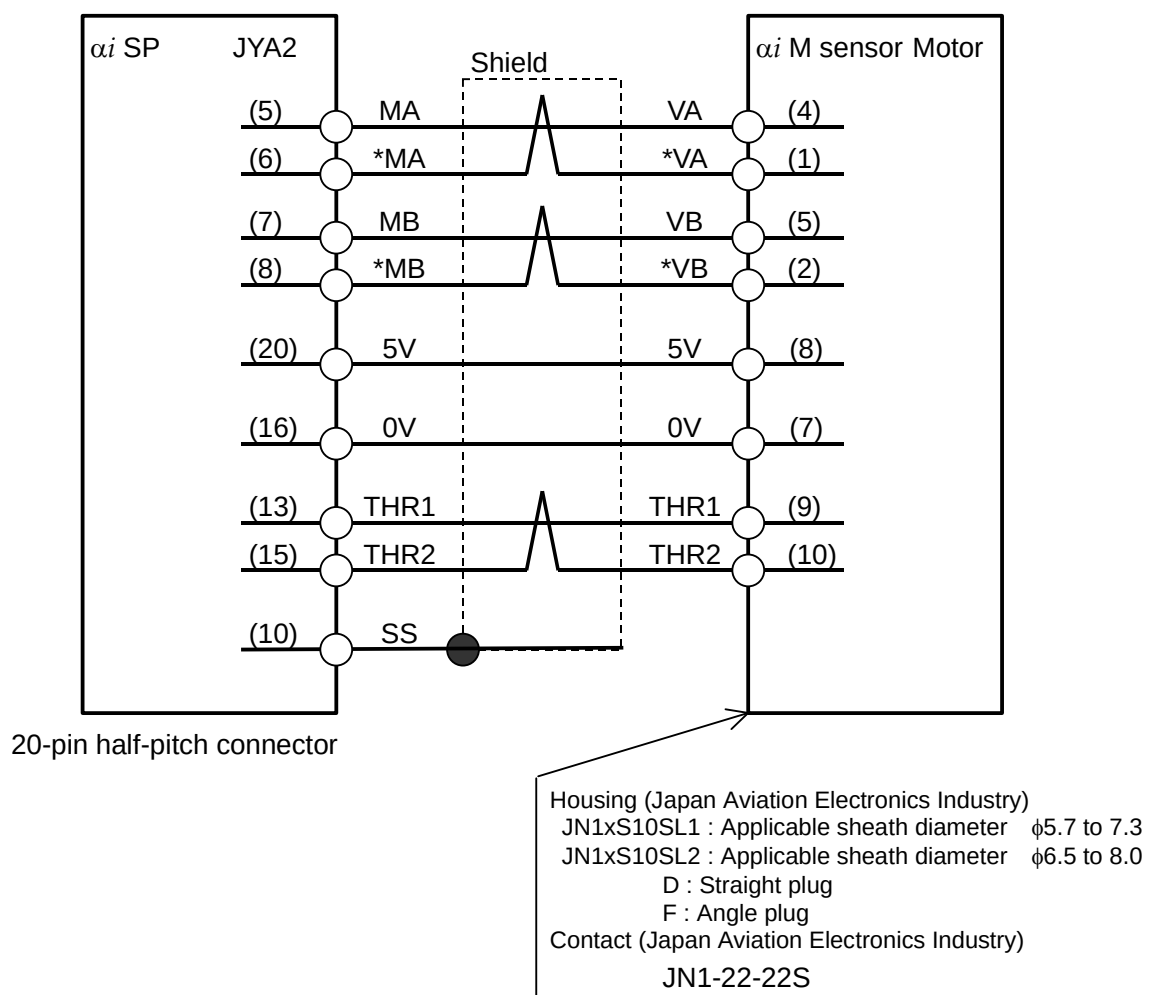

Cable specification :

2 common shielded cable

(Three  $0.2\text{mm}^2$  twisted pairs +  $0.3\text{mm}^2$  wires)

Recommended cable conductor : A66L-0001-0482

See Section 9.4.1 for explanations about the JYA2-side connector that matches the recommended cable. See Appendix B, "About Cable Conductors," for detailed explanations about the cable.

#### NOTE

Keep the electrical resistance across each of the 5V and 0V lines to within  $5.7\Omega$ .

Recommended cable : Up to 41m


## Connector pin assignment

Pin arrangement of the connector (manufactured by Japan Aviation Electronics Industry) on the motor side

|    |      |
|----|------|
| 1  | *VA  |
| 2  | *VB  |
| 3  |      |
| 4  | VA   |
| 5  | VB   |
| 6  |      |
| 7  | 0V   |
| 8  | 5V   |
| 9  | THR1 |
| 10 | THR2 |

- Crimp tool specification  
A06B-6114-K201/JN1S  
(Applicable wire diameter : AWG#22 to #24, AWG#26 to #28)
- Connector kit specification  
A06B-6114-K200/S : Straight plug (including a contact)  
A06B-6114-K200/E : Elbow plug (including a contact)

### 9.3.3.8 Details of cable K16

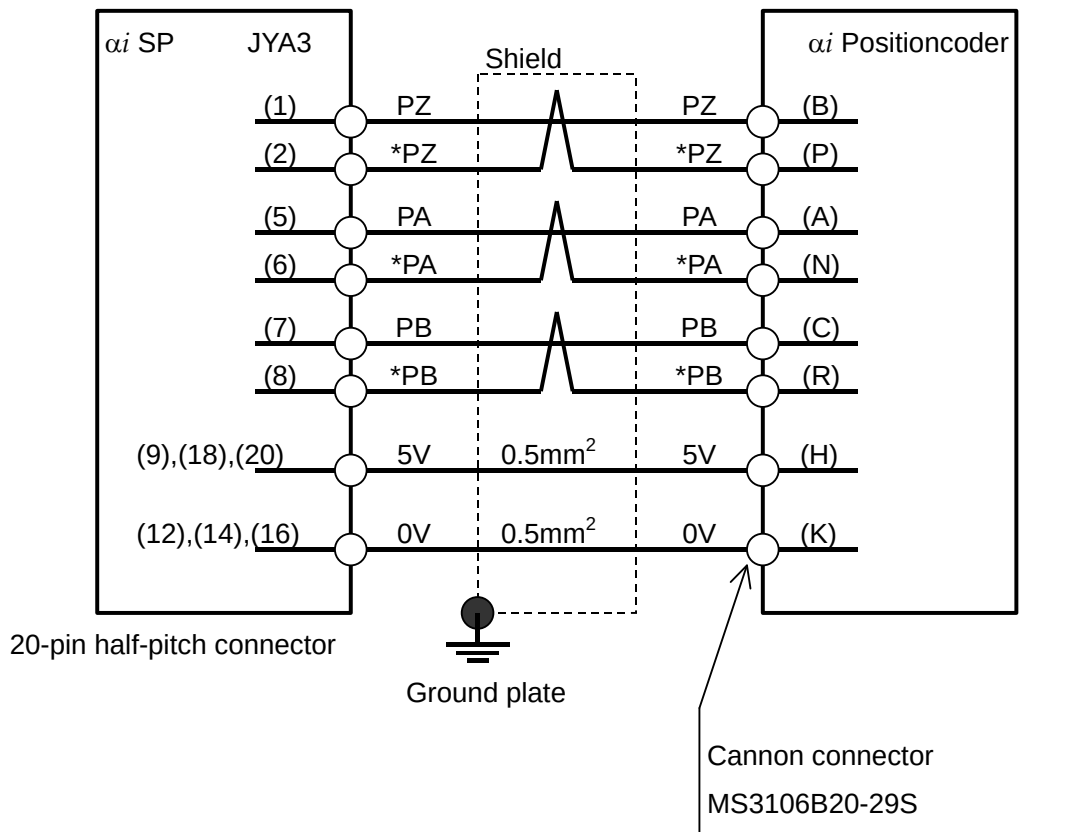

Cable specification :

6 common shielded cable

(Three 0.18mm<sup>2</sup> twisted pairs + 0.5mm<sup>2</sup> wires)

Recommended cable conductor : A66L-0001-0286

See Section 9.4.1 for explanations about the JYA3-side connector that matches the recommended cable. See Appendix B, "About Cable Conductors," for detailed explanations about the cable.

#### NOTE

If only one 5 V line and only one 0 V line are used, use pins 20 and 16 for them, so that, if the connector is attached the wrong way, the sensor can be prevented from being damaged.

**Connector pin assignment**

JYA3

|   |    |    |     |    |       |    |    |
|---|----|----|-----|----|-------|----|----|
| 9 | 5V | 10 | #   | 19 | #     | 20 | 5V |
| 7 | PB | 8  | *PB | 17 | #     | 18 | 5V |
| 5 | PA | 6  | *PA | 15 | EXTSC | 16 | 0V |
| 3 | #  | 4  | #   | 13 | SCCOM | 14 | 0V |
| 1 | PZ | 2  | *PZ | 11 | 24V   | 12 | 0V |

**NOTE**

Do not use any pin that is marked #, because they may already be in use for input/output signals for an optional PCB.


Pin arrangement of the cannon connector on the Positioncoder side

|   |     |   |     |   |     |
|---|-----|---|-----|---|-----|
| A | PA  | B | PZ  | C | PB  |
| D |     | E |     | F |     |
| G |     | H | +5V | J |     |
| K | 0V  | L |     | M |     |
| N | *PA | P | *PZ | R | *PB |
| S |     | T |     |   |     |

### 9.3.3.9 Details of cable K17

It is unnecessary to wire THR1 and THR2 if the  $\alpha i$  BZ sensor is used as a separate detector (connected to the connector JYA4).

#### For the motor with $\alpha i$ MZ sensor

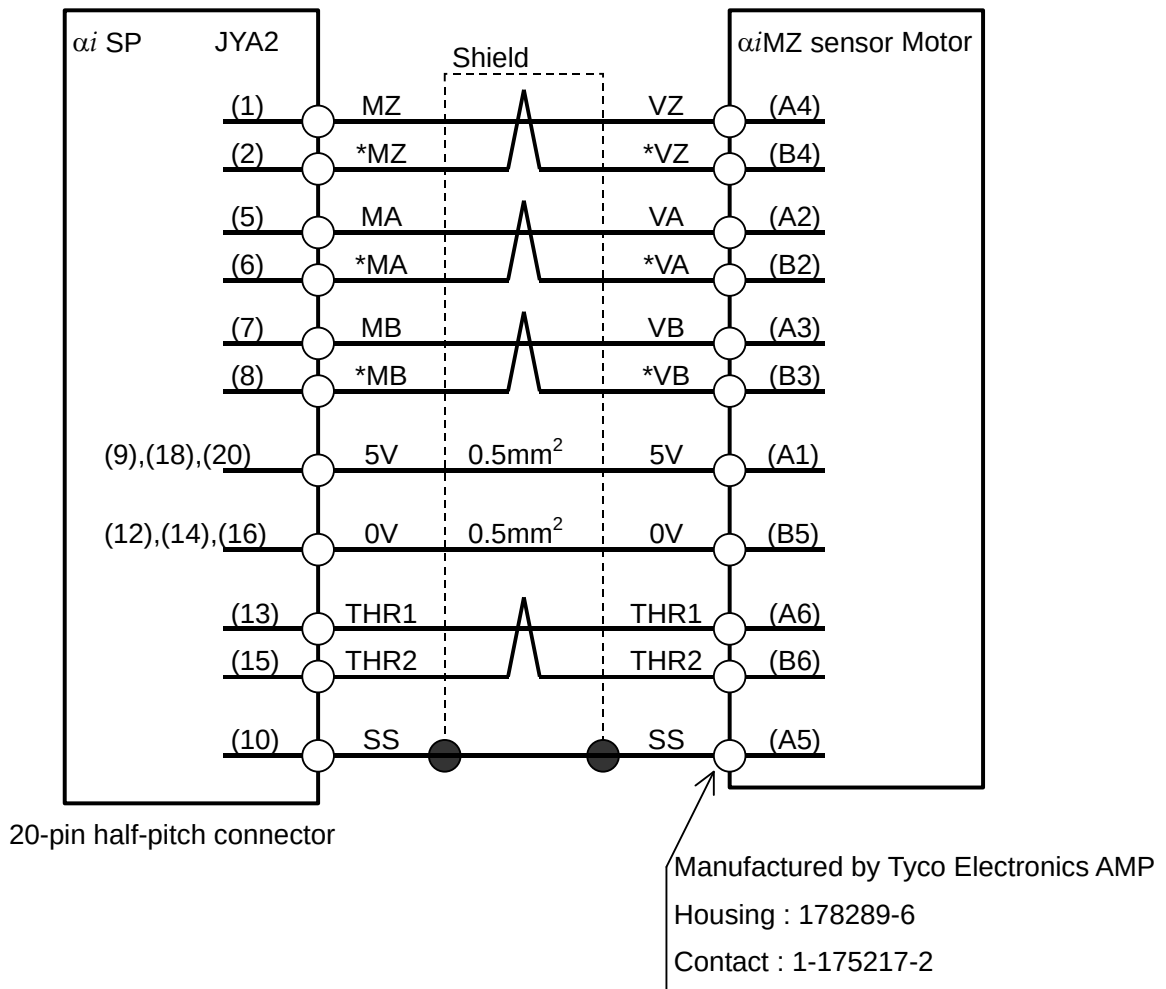

Cable specification :

6 common shielded cable

(Four 0.18mm<sup>2</sup> twisted pairs + 0.5mm<sup>2</sup> wires)

Recommended cable conductor : A66L-0001-0368

See Section 9.4.1 for explanations about the JYA2-side connector that matches the recommended cable. See Appendix B, "About Cable Conductors," for detailed explanations about the cable.

#### NOTE

If only one 5 V line and only one 0 V line are used, use pins 20 and 16 for them, so that, if the connector is attached the wrong way, the sensor can be prevented from being damaged.

**WARNING**

If the feedback signal is connected incorrectly, an unpredictable motor operation may occur.

**- Connector pin assignment**

JYA2

See Subsection for cable K14.

JYA4

|   |    |    |     |    |   |    |    |
|---|----|----|-----|----|---|----|----|
| 9 | 5V | 10 | SS  | 19 | # | 20 | 5V |
| 7 | MB | 8  | *MB | 17 | # | 18 | 5V |
| 5 | MA | 6  | *MA | 15 |   | 16 | 0V |
| 3 | #  | 4  | #   | 13 |   | 14 | 0V |
| 1 | MZ | 2  | *MZ | 11 | # | 12 | 0V |


**NOTE**

Do not use any pin that is marked #, because they may already be in use for input/output signals for an optional PCB.

Pin arrangement of the connector (manufactured by Tyco Electronics AMP) on the motor side

|    |      |    |      |
|----|------|----|------|
| A1 | +5V  | B1 |      |
| A2 | VA   | B2 | *VA  |
| A3 | VB   | B3 | *VB  |
| A4 | VZ   | B4 | *VZ  |
| A5 | SS   | B5 | 0V   |
| A6 | THR1 | B6 | THR2 |

### For the $\alpha$ iI 0.5 spindle motor with $\alpha$ i MZ sensor

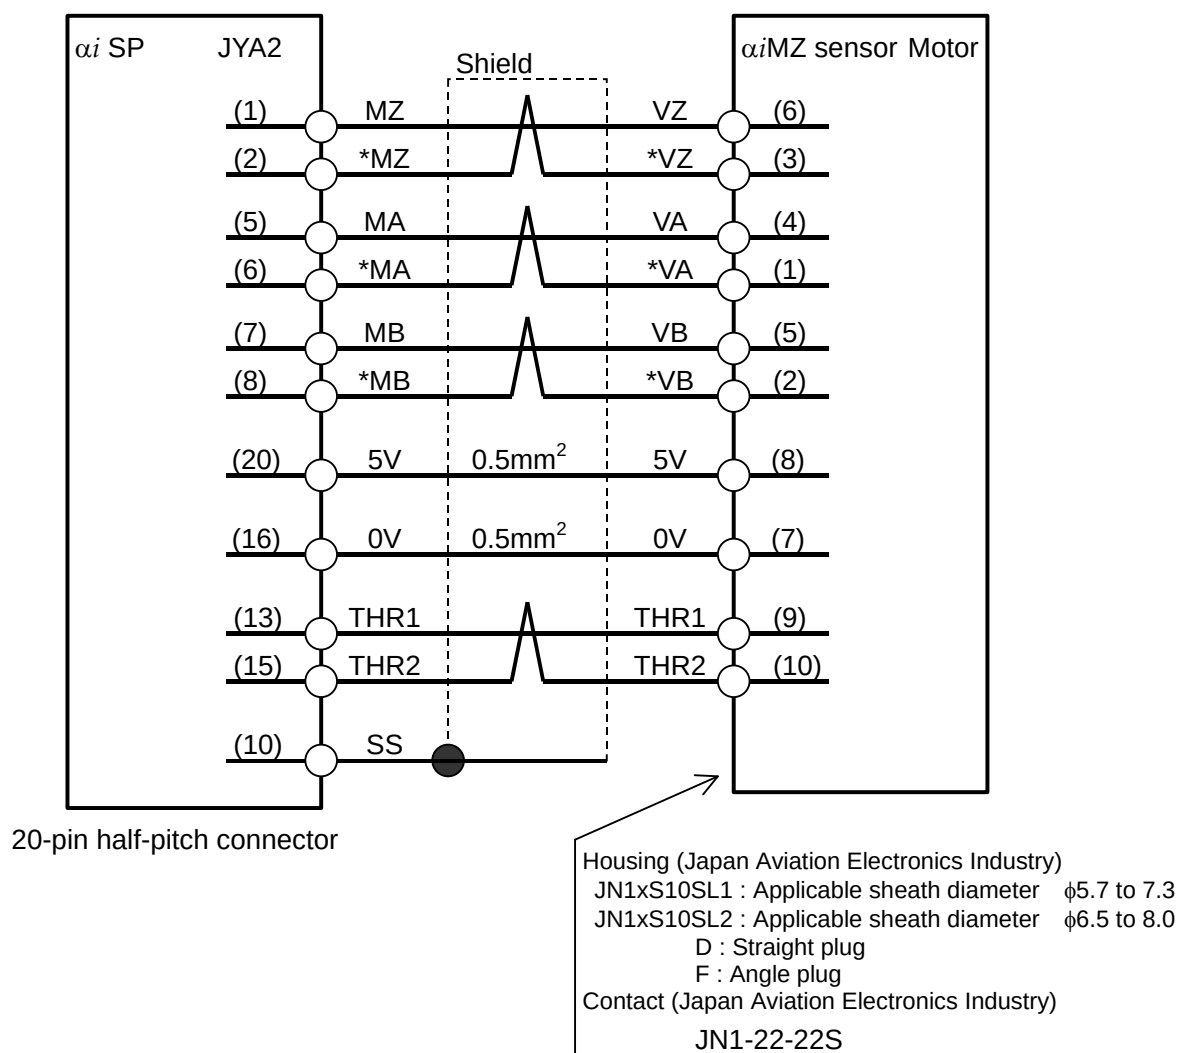

Cable specification :

2 common shielded cable

(Four  $0.2\text{mm}^2$  twisted pairs +  $0.3\text{mm}^2$  wires)

Recommended cable conductor : A66L-0001-0482

See Section 9.4.1 for explanations about the JYA2-side connector that matches the recommended cable. See Appendix B, "About Cable Conductors," for detailed explanations about the cable.

#### NOTE

Keep the electrical resistance across each of the 5V and 0V lines to within  $4\Omega$ .  
 Recommended cable : Up to 28m

**- Connector pin assignment**


Pin arrangement of the connector (manufactured by Japan Aviation Electronics Industry) on the motor side

|    |      |
|----|------|
| 1  | *VA  |
| 2  | *VB  |
| 3  | *VZ  |
| 4  | VA   |
| 5  | VB   |
| 6  | VZ   |
| 7  | 0V   |
| 8  | 5V   |
| 9  | THR1 |
| 10 | THR2 |

- Crimp tool specification  
A06B-6114-K201/JN1S  
(Applicable wire diameter : AWG#22 to #24, AWG#26 to #28)
- Connector kit specification  
A06B-6114-K200/S : Straight plug (including a contact)  
A06B-6114-K200/E : Elbow plug (including a contact)



## $\alpha$ iBZ Sensor (conventional shape, A860-2120-T\*\*\*) and $\alpha$ iBZ sensor (compact type, A860-2155-T\*\*\*)

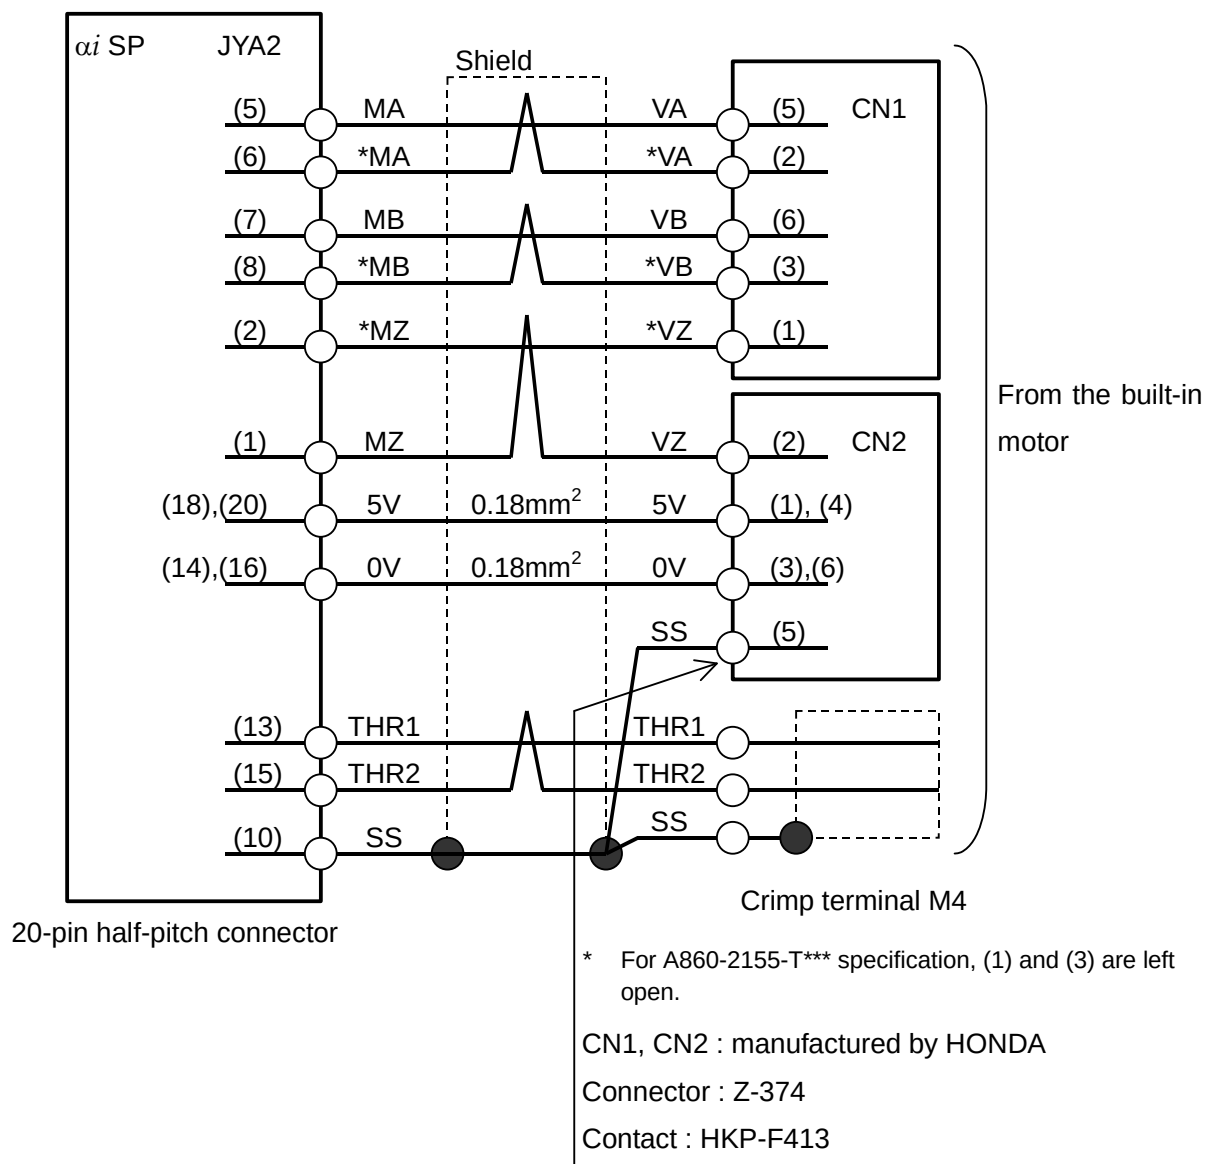

### Cable specification :

4 common shielded cable

(Four 0.18mm<sup>2</sup> twisted pairs + 0.18mm<sup>2</sup> wires)

Recommended cable conductor : A66L-0001-0367

See Section 9.4.1 for explanations about the JYA2-side connector that matches the recommended cable. See Appendix B, "About Cable Conductors," for detailed explanations about the cable.

### NOTE

If only one 5 V line and only one 0 V line are used, use pins 20 and 16 for them, so that, if the connector is attached the wrong way, the sensor can be prevented from being damaged.

**- Connector pin assignment**


Pin arrangement of the connector CN1 (manufactured by Honda Tsushin Kogyo Co., Ltd.) on the motor side

|   |     |   |    |
|---|-----|---|----|
| 1 | *VZ | 4 |    |
| 2 | *VA | 5 | VA |
| 3 | *VB | 6 | VB |

Pin arrangement of the connector CN2 (manufactured by Honda Tsushin Kogyo Co., Ltd.) on the motor side

|   |    |   |    |
|---|----|---|----|
| 1 | 5V | 4 | 5V |
| 2 | VZ | 5 | SS |
| 3 | 0V | 6 | 0V |

For A860-2155-T\*\*\* specification, pins 1 and 3 of CN2 are left open.

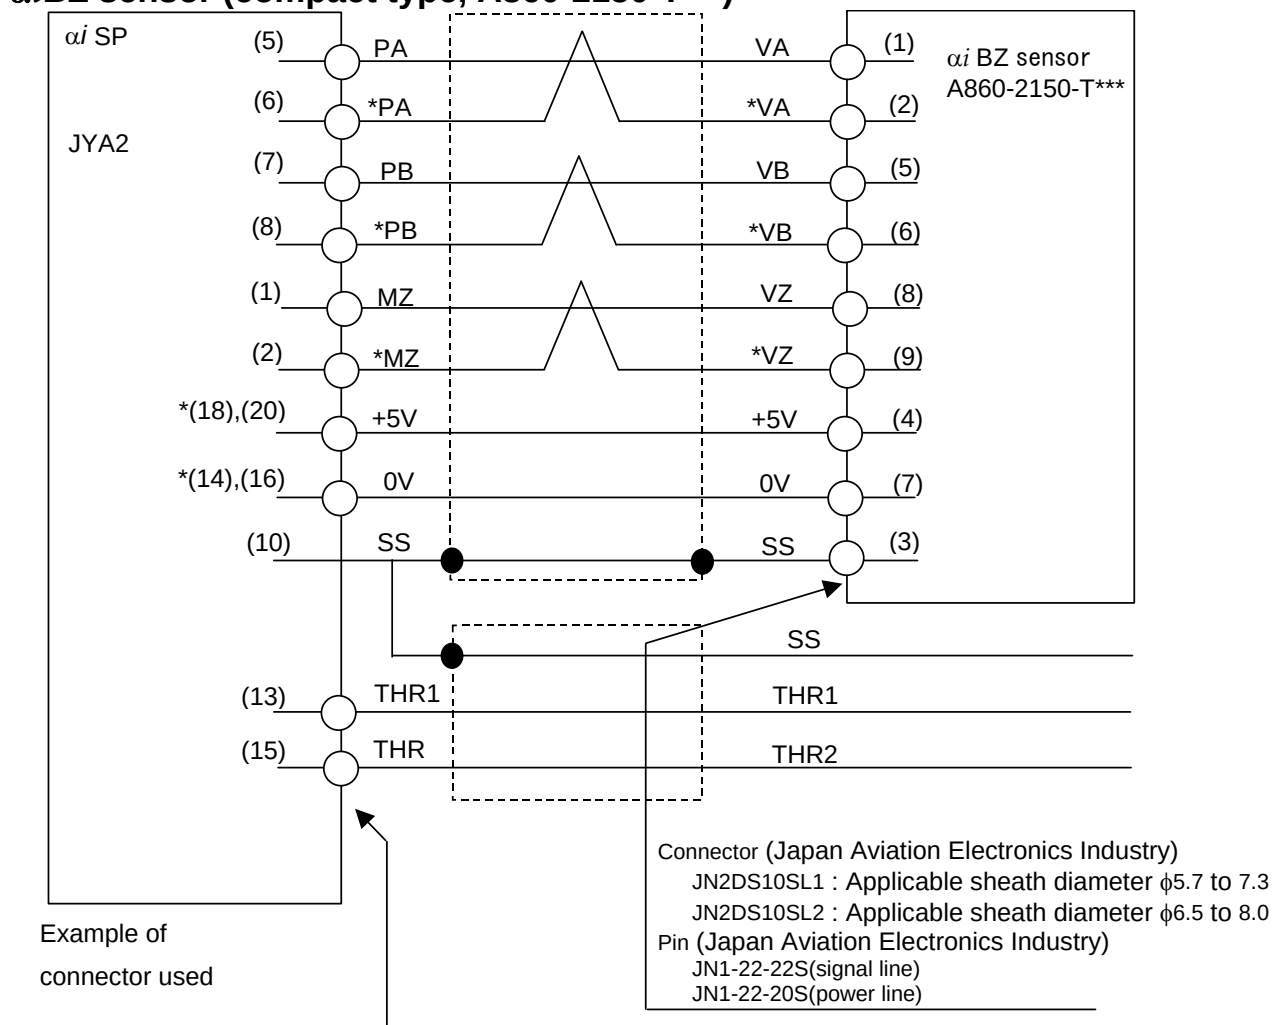**$\alpha$ iBZ sensor (compact type, A860-2150-T\*\*\*)**

Recommended cable conductor : A 66 L -0001-0482

|                             |                                                               |
|-----------------------------|---------------------------------------------------------------|
| <b>Cable length</b>         | 28 m max                                                      |
| <b>5V, 0V</b>               | 0.3mm <sup>2</sup><br>(Connected to one of the pins marked *) |
| <b>VA,*VA,VB,*VB,VZ,*VZ</b> | 0.2mm <sup>2</sup> twisted pair × 3                           |

Crimp tool specification

A06B-6114-K201/JN1S : For 0.3 mm<sup>2</sup>A06B-6114-K201/JN1L : For 0.18 mm<sup>2</sup> and 0.5 mm<sup>2</sup>

Connector kit specification


A06B-6114-K204/S : Straight plug (including a contact)

**- Connector pin assignment**

$\alpha$ iBZ sensor head side: Connector manufactured by Japan Aviation Electronics Industry

|    |     |
|----|-----|
| 1  | VA  |
| 2  | *VA |
| 3  | SS  |
| 4  | 5V  |
| 5  | VB  |
| 6  | *VB |
| 7  | 0V  |
| 8  | VZ  |
| 9  | *VZ |
| 10 |     |

### 9.3.3.10 Details of cable K33

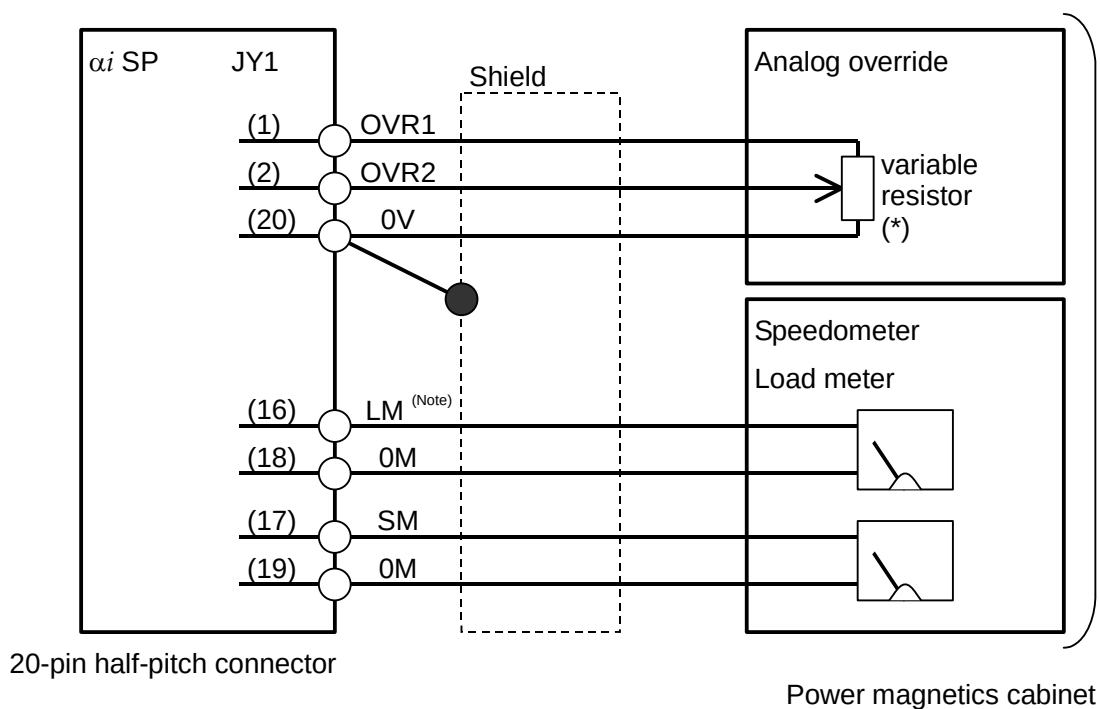

Cable specification :

0.09mm<sup>2</sup> common shielded cable

Recommended cable conductor : A66L-0001-0284#10P

See Section 9.4.1 for explanations about the JYA1-side connector that matches the recommended cable. See Appendix B, "About Cable Conductors," for detailed explanations about the cable.

#### NOTE

Select such an external resistance such that  $VR+R1$  falls within the range between 2 k $\Omega$  and 10 k $\Omega$  .

## Connector pin assignment

JY1

|   |      |    |      |    |    |    |    |
|---|------|----|------|----|----|----|----|
| 9 | #    | 10 | #    | 19 | 0M | 20 | 0V |
| 7 | #    | 8  | #    | 17 | SM | 18 | 0M |
| 5 | #    | 6  | #    | 15 | #  | 16 | LM |
| 3 | #    | 4  | #    | 13 | #  | 14 | #  |
| 1 | OVR1 | 2  | OVR2 | 11 | #  | 12 | #  |


### NOTE

Pins indicated # are intended to input or output signals used on a spindle check board. Do not connect any other signal line to them.

## Voltage signal for the speedometer (SM)


By externally connecting a tachometer, the speed of the spindle motor can be indicated. The voltage (DC) proportional to the speed is output, regardless of the rotation direction of the motor. At the maximum motor speed, +10 V is output.

The output voltage of the speedometer in the forward direction and reverse direction is calibrated using a parameter. The precision is  $\pm 3\%$  Max.

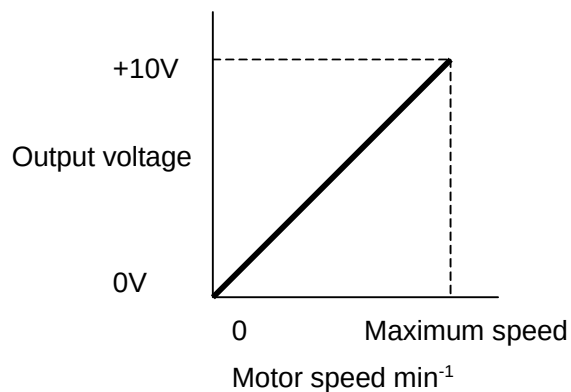

## Voltage signal for the load meter (LM)

The load meter indicates a load ratio, that is, the ratio of load at the time of non-load rotation of the machine tool spindle or at the time of cutting to the maximum output of the spindle motor. At the rated input voltage, the relationships of spindle motor output, spindle motor torque, and voltage for the load meter with speed are as described below.

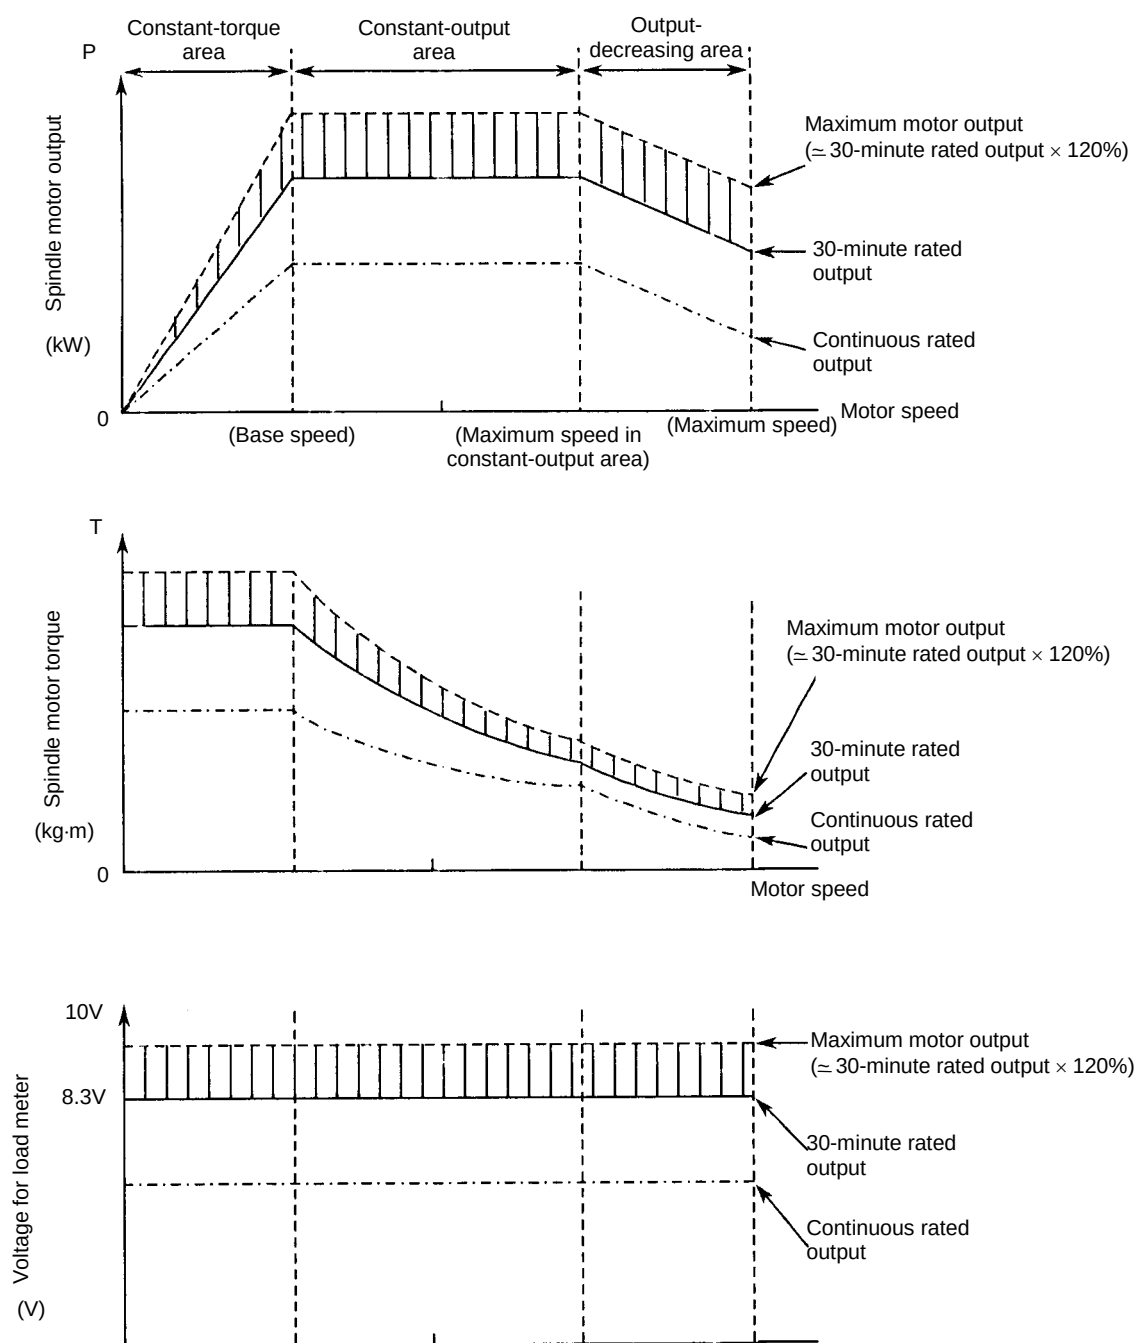

A load meter indication of 100% is provided for the continuous rating of the spindle motor. The table below indicates the relationships between typical spindle motor output values and load meter voltages. From the table below, it is considered that approximately five load meter indications are provided.

| Motor model           | Output (kW) | Voltage for load meter (V) <sup>(NOTE)</sup> | Ratio (%) with 100% indicated for continuous rating | Example of load meter   |                         |
|-----------------------|-------------|----------------------------------------------|-----------------------------------------------------|-------------------------|-------------------------|
|                       |             |                                              |                                                     | Type of load meter used | Ratio to full scale (%) |
| $\alpha$ iI 0.5/10000 | 0.55        | 4.2                                          | 100                                                 | E                       | 100                     |
|                       | 1.1         | 8.3                                          | 200                                                 |                         | 200                     |
|                       | 1.32        | 10.0                                         | 240                                                 |                         | 240                     |
| $\alpha$ iI 1/10000   | 1.5         | 5.7                                          | 100                                                 | A                       | 102.2                   |
|                       | 2.2         | 8.3                                          | 147                                                 |                         | 150                     |
|                       | 2.64        | 10.0                                         | 176                                                 |                         | 180                     |
| $\alpha$ iI 1.5/10000 | 1.1         | 2.5                                          | 100                                                 | D                       | 100                     |
|                       | 3.7         | 8.4                                          | 338                                                 |                         | 338                     |
|                       | 4.4         | 10.0                                         | 400                                                 |                         | 400                     |
| $\alpha$ iI 2/10000   | 2.2         | 5.0                                          | 100                                                 | C                       | 101                     |
|                       | 3.7         | 8.3                                          | 166                                                 |                         | 166                     |
|                       | 4.4         | 10.0                                         | 200                                                 |                         | 200                     |
| $\alpha$ iI 3/10000   | 3.7         | 5.6                                          | 100                                                 | A                       | 100.8                   |
|                       | 5.5         | 8.3                                          | 148                                                 |                         | 150                     |
|                       | 6.6         | 10.0                                         | 178                                                 |                         | 180                     |
| $\alpha$ iI 6/10000   | 5.5         | 6.1                                          | 100                                                 | A                       | 109.8                   |
|                       | 7.5         | 8.3                                          | 136                                                 |                         | 150                     |
|                       | 9.0         | 10.0                                         | 164                                                 |                         | 180                     |
| $\alpha$ iI 8/8000    | 7.5         | 5.7                                          | 100                                                 | A                       | 102.6                   |
|                       | 11.0        | 8.3                                          | 146                                                 |                         | 150                     |
|                       | 13.2        | 10.0                                         | 175                                                 |                         | 180                     |
| $\alpha$ iI 12/7000   | 11          | 6.1                                          | 100                                                 | A                       | 109.8                   |
|                       | 15          | 8.3                                          | 136                                                 |                         | 150                     |
|                       | 18          | 10.0                                         | 164                                                 |                         | 180                     |
| $\alpha$ iI 15/7000   | 15          | 6.7                                          | 100                                                 | B                       | 100.5                   |
|                       | 18.5        | 8.3                                          | 124                                                 |                         | 125                     |
|                       | 22.2        | 10.0                                         | 149                                                 |                         | 150                     |
| $\alpha$ iI 18/7000   | 18.5        | 7.0                                          | 100                                                 | B                       | 105                     |
|                       | 22.0        | 8.3                                          | 118                                                 |                         | 125                     |
|                       | 26.4        | 10.0                                         | 142                                                 |                         | 150                     |
| $\alpha$ iI 22/7000   | 22.0        | 7.0                                          | 100                                                 | B                       | 105                     |
|                       | 26.0        | 8.3                                          | 118                                                 |                         | 125                     |
|                       | 31.2        | 10.0                                         | 142                                                 |                         | 150                     |
| $\alpha$ iI 30/5000   | 30.0        | 6.7                                          | 100                                                 | B                       | 105.5                   |
|                       | 37.0        | 8.3                                          | 124                                                 |                         | 125                     |
|                       | 44.4        | 10.0                                         | 149                                                 |                         | 150                     |
| $\alpha$ iI 40/6000   | 37.0        | 6.8                                          | 100                                                 | B                       | 103                     |
|                       | 45.0        | 8.3                                          | 122                                                 |                         | 125                     |
|                       | 54.0        | 10.0                                         | 146                                                 |                         | 150                     |
| $\alpha$ iI 50/4500   | 45.0        | 6.8                                          | 100                                                 | B                       | 103                     |
|                       | 55.0        | 8.3                                          | 122                                                 |                         | 125                     |
|                       | 66.0        | 10.0                                         | 146                                                 |                         | 150                     |

**NOTE**


The precision of load meter voltage depends on the used speed and input voltage. The maximum error is about  $\pm 15\%$ .




| Type | Type                      | Scale                                  |  |
|------|---------------------------|----------------------------------------|--|
| A    | Color classification      | <p>White band Yellow band Red band</p> |  |
|      | Indication                | <p>0 50 100 150 180</p>                |  |
|      | Correspondence to voltage | <p>0V 5.55V 8.3V 10.0V</p>             |  |
| B    | Color classification      | <p>White band Yellow band Red band</p> |  |
|      | Indication                | <p>0 50 100 125 150</p>                |  |
|      | Correspondence to voltage | <p>0V 6.66V 8.3V 10.0V</p>             |  |
| C    | Color classification      | <p>White band Yellow band Red band</p> |  |
|      | Indication                | <p>0 50 100 150 166 200</p>            |  |
|      | Correspondence to voltage | <p>0V 5.0V 8.3V 10.0V</p>              |  |
| D    | Color classification      | <p>White band Yellow band Red band</p> |  |
|      | Indication                | <p>0 100 200 300 338 400</p>           |  |
|      | Correspondence to voltage | <p>0V 5.0V 8.3V 10.0V</p>              |  |
| E    | Color classification      | <p>White band Yellow band Red band</p> |  |
|      | Indication                | <p>0 50 100 150 200 240</p>            |  |
|      | Correspondence to voltage | <p>0V 4.2V 8.3V 10.0V</p>              |  |

**Indication for spindle switching and output switching**

The speed indication voltage and dynamometer indication voltage may vary between the main spindle and sub-spindle in spindle switching and between the high winding and low winding in output switching. In such a case, switch the tachometer and dynamometer as shown below.

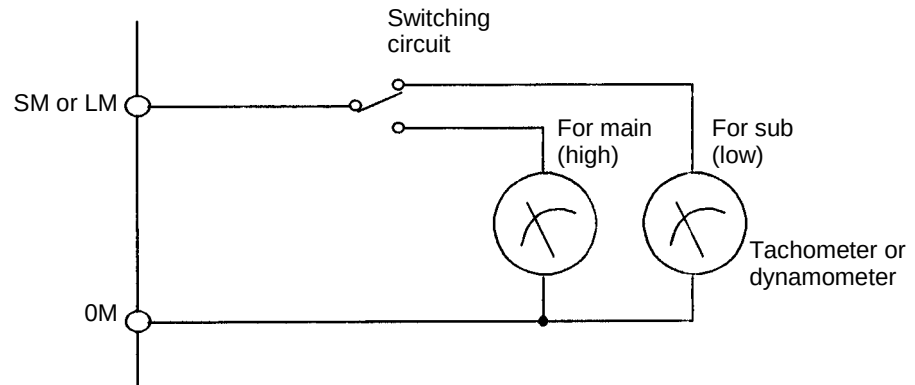

### 9.3.3.11 Details of cable K36

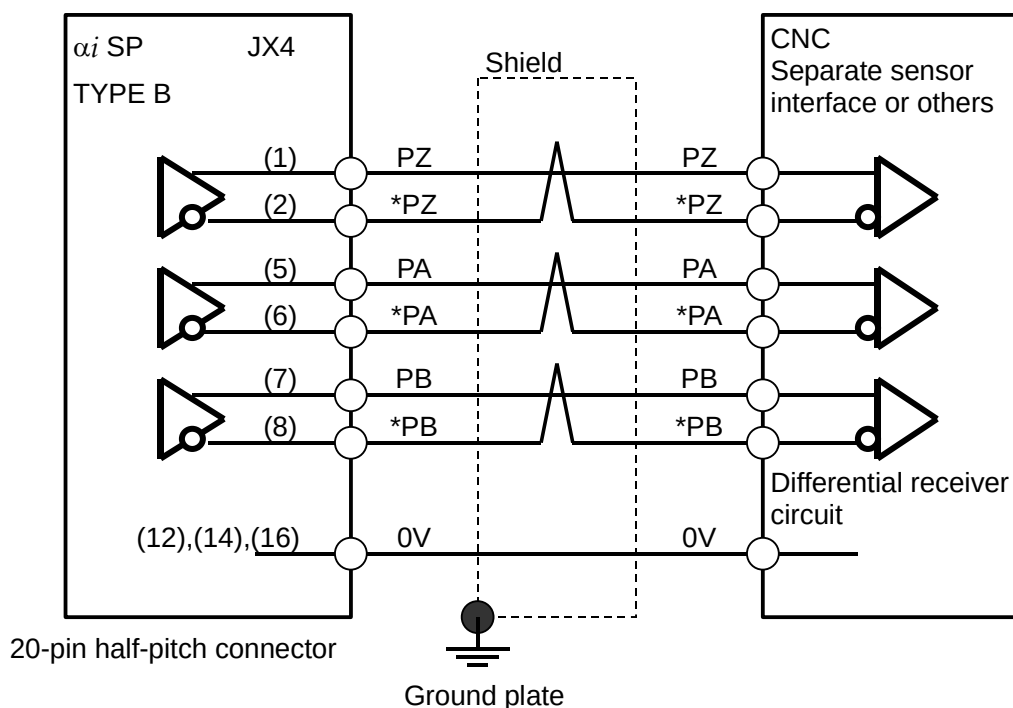

Cable specification: 0.09 mm<sup>2</sup> twisted pair with common shielded

Recommended cable (wire only): A66L-0001-0284#10P

See Section 9.4.1 for details of connectors applied to recommended cable.

See Appendix B for details of cables.


Specification of position coder signal output

| Item                            | Specification                                                                                            |
|---------------------------------|----------------------------------------------------------------------------------------------------------|
| SPM input sensor                | $\alpha i$ position coder<br>$\alpha i$ position coder S<br>$\alpha i$ MZ sensor<br>$\alpha i$ BZ sensor |
| Output signals PA, *PA, PB, *PB | 1024 pulses/rotation <sup>(*)</sup>                                                                      |
| Output signals PZ, *PZ          | 1 pulse/rotation                                                                                         |
| Output signal level             | Differential driver signal<br>(RS422 compatible)                                                         |


\*1 A resolution of 4096 pulses/rotation can be obtained by counting the edges of phases A and B ( $\times 4$  circuit).

# Phase A/B signal

Width of phase A/B signal

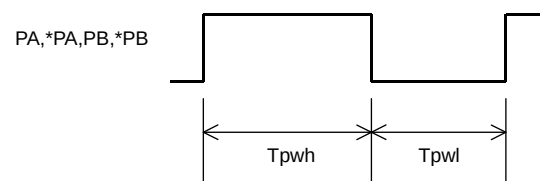

Phase difference between phase A and phase B

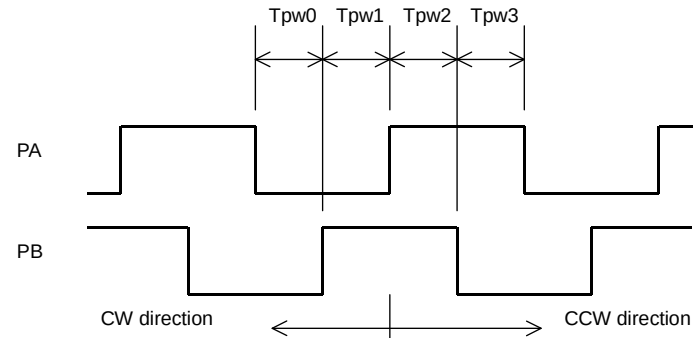

\*PA and \*PB represent the negative logic signals of PA and PB, respectively.

| Symbol      | Specification | Remark                                                               |
|-------------|---------------|----------------------------------------------------------------------|
| Tpwh, Tpw1  | Min 636ns     | Including a maximum of driver rising/falling delay time skew (30 ns) |
| Tpwh0,1,2,3 | Min 636ns     |                                                                      |

This specification does not include the effect of the cable capacity and the skew due to delay on the receiver side.


**CAUTION**

As shown in state A below, a waveform may be distorted at the edge of phase A or B. In addition, the edge may be encountered too late or too early as shown in state B or C. Even in these states, the minimum time is defined according to the specifications described on the previous page, such as the pulse width and the difference between phase A and phase B.

Diagram showing three states (A, B, C) of phase A and phase B signals. State A shows a distorted edge, State B shows a late edge, and State C shows an early edge.


Phase Z signal

Width of phase Z signal


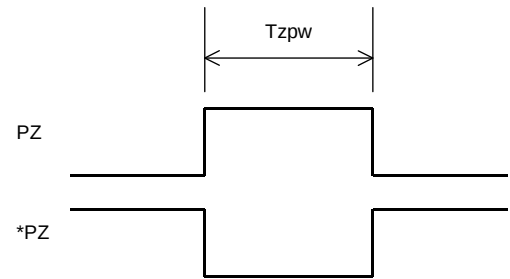



| Symbol | Specification                                |
|--------|----------------------------------------------|
| Tzpw   | The minimum width is 1/4096 of one rotation. |

- \* Edge distortion of signal Z  
Note that the edge of signal Z may be distorted.
- \* Phase relationship between the phase Z signal and the phase A/B signal
  - The phase relationship between the phase Z signal and the phase A/B signal varies with the sensor.
  - When the speed changes, the phase relationship between the phase Z signal and the phase A/B signal may vary. The range of variation is approximately (1 p/5000 min-1).

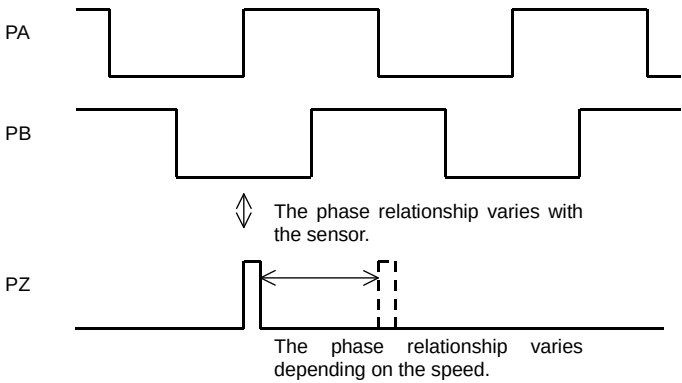

### 9.3.3.12 Details of cable K71

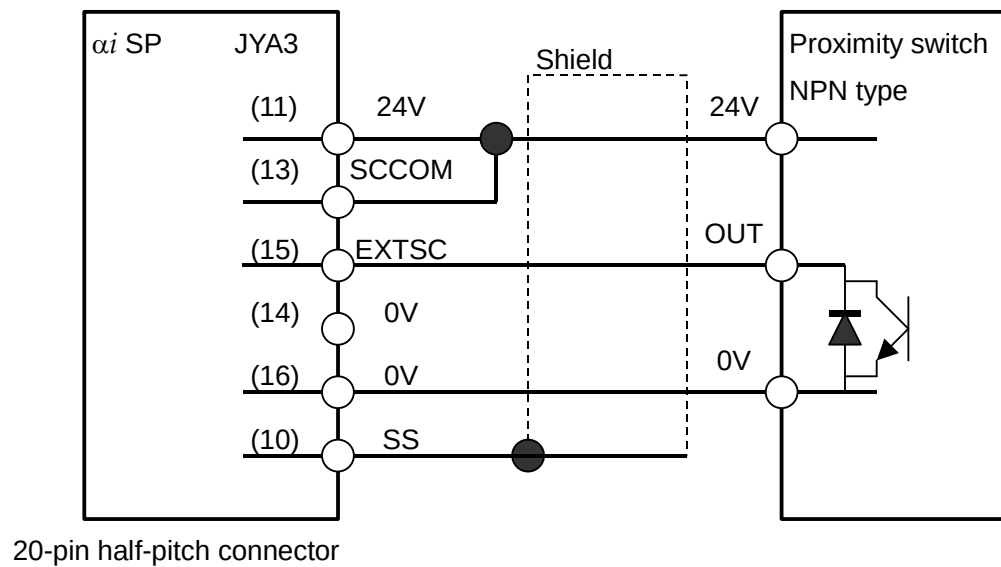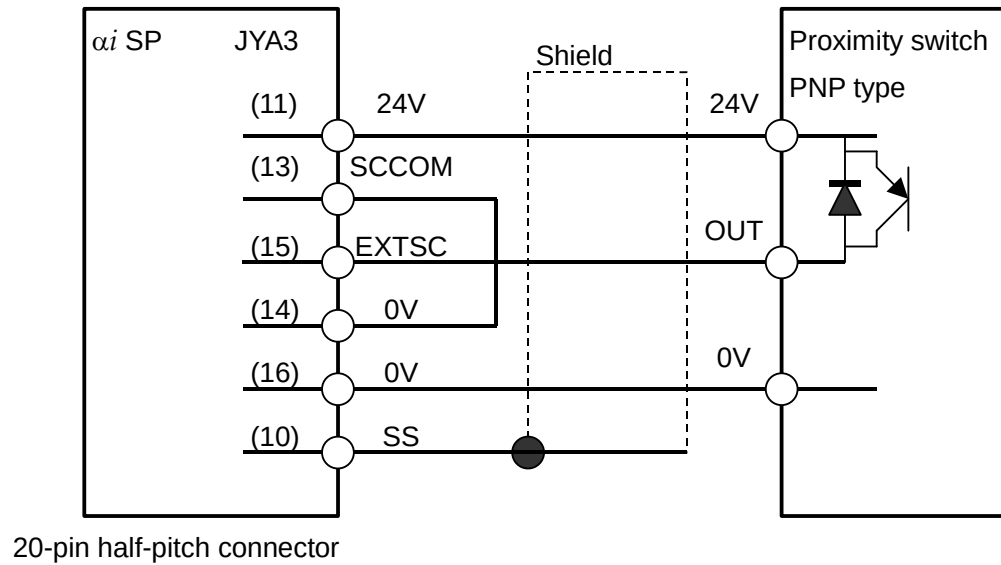

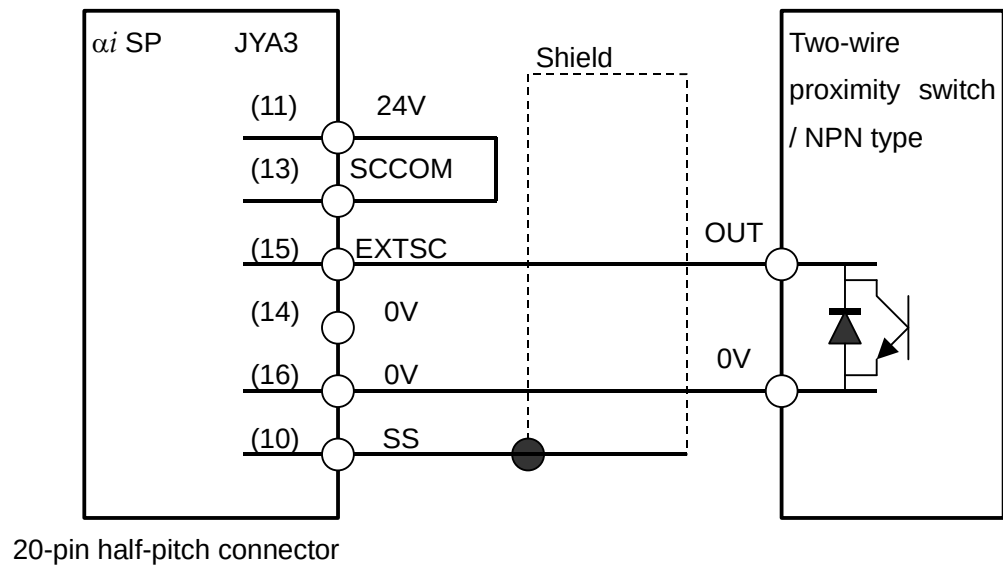

Cable specification :

0.09mm<sup>2</sup> common shielded cable

Recommended cable conductor : A66L-0001-0284#10P

See Section 9.4.1 for explanations about the JYA3-side connector that matches the recommended cable. See Appendix B, "About Cable Conductors," for detailed explanations about the cable.

## Connector pin assignment

See Subsection “- Connector pin assignment” for the K16.

**External one-rotation signal switch (proximity switch)**

Use an external one-rotation signal switch (proximity switch) that satisfies the specifications indicated below.

**(a) DC two-wire proximity switch**

| Item                     | Specification                                                            |
|--------------------------|--------------------------------------------------------------------------|
| Supply voltage           | 24 VDC $\pm$ 1.5 V<br>(24 VDC is fed from the spindle amplifier module.) |
| Response frequency       | 400 Hz or higher                                                         |
| Load current             | 16 mA or higher                                                          |
| Residual voltage         | 4 V or higher                                                            |
| Supply (leakage) current | 1.5 mA or lower                                                          |

**(b) DC three-wire proximity switch**

| Item               | Specification                                                            |
|--------------------|--------------------------------------------------------------------------|
| Supply voltage     | 24 VDC $\pm$ 1.5 V<br>(24 VDC is fed from the spindle amplifier module.) |
| Response frequency | 400 Hz or higher                                                         |
| Load current       | 16 mA or higher                                                          |
| Residual voltage   | 4 V or higher                                                            |
| Supply current     | 50mA or lower                                                            |

**NOTE**

The location where a proximity switch signal occurs depends on the temperature. So, consider the ambient temperature when selecting a proximity switch.

**Input signal specification (EXTSC input section)**

| Item                 | Specification |
|----------------------|---------------|
| High level           | 20V or higher |
| Low level            | 4V or lower   |
| Minimum signal width | 100 $\mu$ s   |

**NOTE**

In design, the width of the signal to be detected should have a sufficient margin by considering variations in proximity switch on/off time.



### 9.3.3.13 Details of cable K86

Cable K86 must be up to 3 m long. To ensure noise resistance, install the  $\alpha i$  SP and submodule SM on the same control board.

| $\alpha i$ SP<br>TYPE B<br>JYA4 |      | Shield |      | Submodule<br>SM<br>CX31 |
|---------------------------------|------|--------|------|-------------------------|
| (11)                            | 24V  |        | 24V  | (A1)                    |
| (13)                            | XALM |        | XALM | (A4)                    |
| (15)                            | RDY  |        | RDY  | (A3)                    |
| (16)                            | 0V   |        | 0V   | (A2)                    |
| (10)                            | SS   |        |      |                         |

Applicable connector:


JYA4 : Solder type connector: FI40B20S,  
Housing: FI-20-CVS5 manufactured by Hirose Electric Co.,  
Ltd.

CX31 : Tyco Electronics AMP D2100 series 8 pins  
Housing: 1-1318119-4, contact: 1318107-1 (4 contacts  
required)

Cable specification :  
0V, 24V, XALM, RDY: 0.5mmSQ(AWG20 or smaller),  
Common shield cable

### 9.3.3.14 Details of cable K88

This cable is required when using the spindle EGB function.

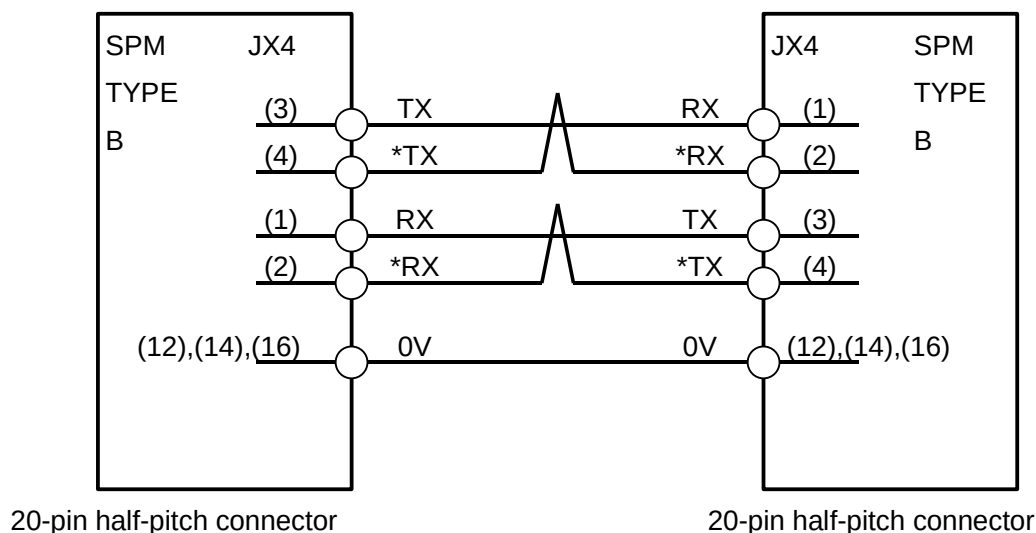

Cable specification: 0.09 mm<sup>2</sup> twisted pair with common shielded


Recommended cable (wire only): A66L-0001-0284#10P

See Section 9.4.1 for details of connectors applied to recommended cable.

See Appendix B for details of cables.


#### NOTE

- 1 The length of cable K88 must be 3 m or shorter and run within the same cabinet.
- 2 The  $\alpha i$  SPs that use this connection must be connected to the same CNC as shown below.

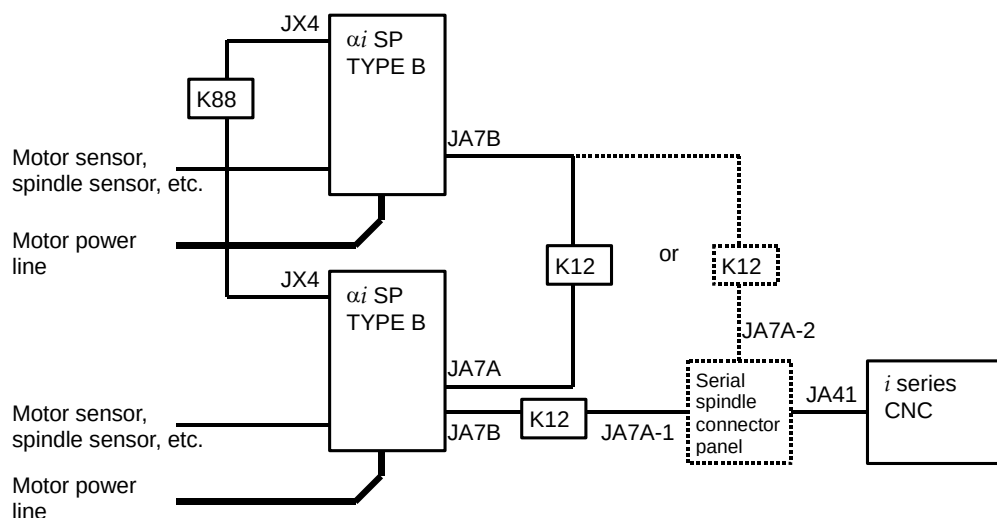


### 9.3.3.15 Details of cable K90

Only when the dual check safety function is used, this connection is required for the second spindle.

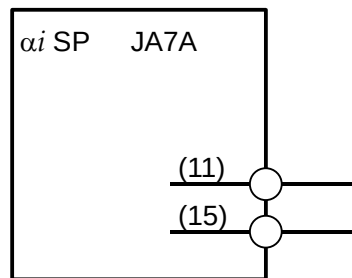

20-pin half-pitch connector

When the dual check safety function is used, connector K90 must be connected to JA7A of the second spindle.

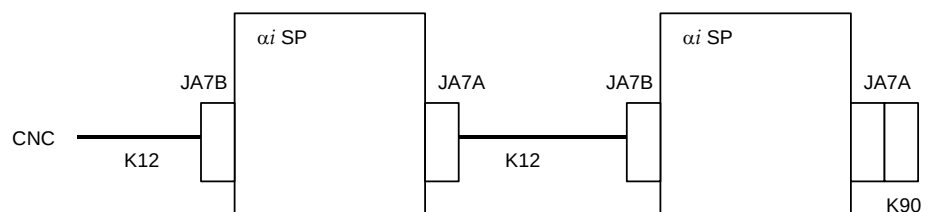

This signal is used to externally monitor the excitation status of the spindle amplifier to implement a safety circuit.

### 9.3.3.16 Details of cable K96


This signal is used to externally monitor the excitation status of the spindle amplifier and implement a safety circuit for the safety spindle stop function of dual check safety.

For how to configure a safety circuit with this signal, refer to the following documents coming with the "Dual Check Safety Operator's Manual" of your CNC.

"SAFE SPINDLE STOP FUNCTION with protection door open"

For the Series 30i/31i/32i, B-64004EN/03-01

For the Series 16i/18i/21i, B-63494EN/02-01

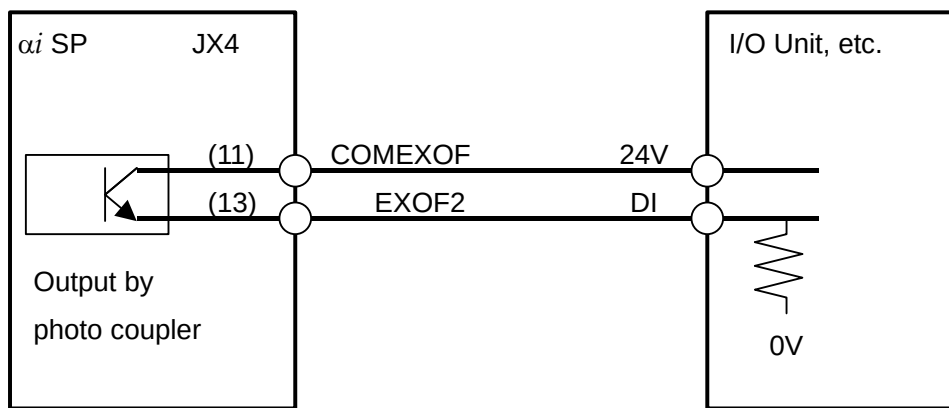

20-pin half-pitch connector

SP contact output specifications

Circuit type: Polar photo coupler

Rated voltage: 30 VDC or less

Output current: DC 40 mA or less

Saturation voltage: 1.5 V or less (at output current of 40 mA)

Open contact: Excitation on

Closed contact: Excitation off




#### CAUTION

If the connector is connected incorrectly, externally supplied 24 V can damage the internal circuit of the  $\alpha$ i SP.

This function is not provided in A06B-6111, -6112, -6121, and -6122.

### 9.3.3.17 Details of cable K97

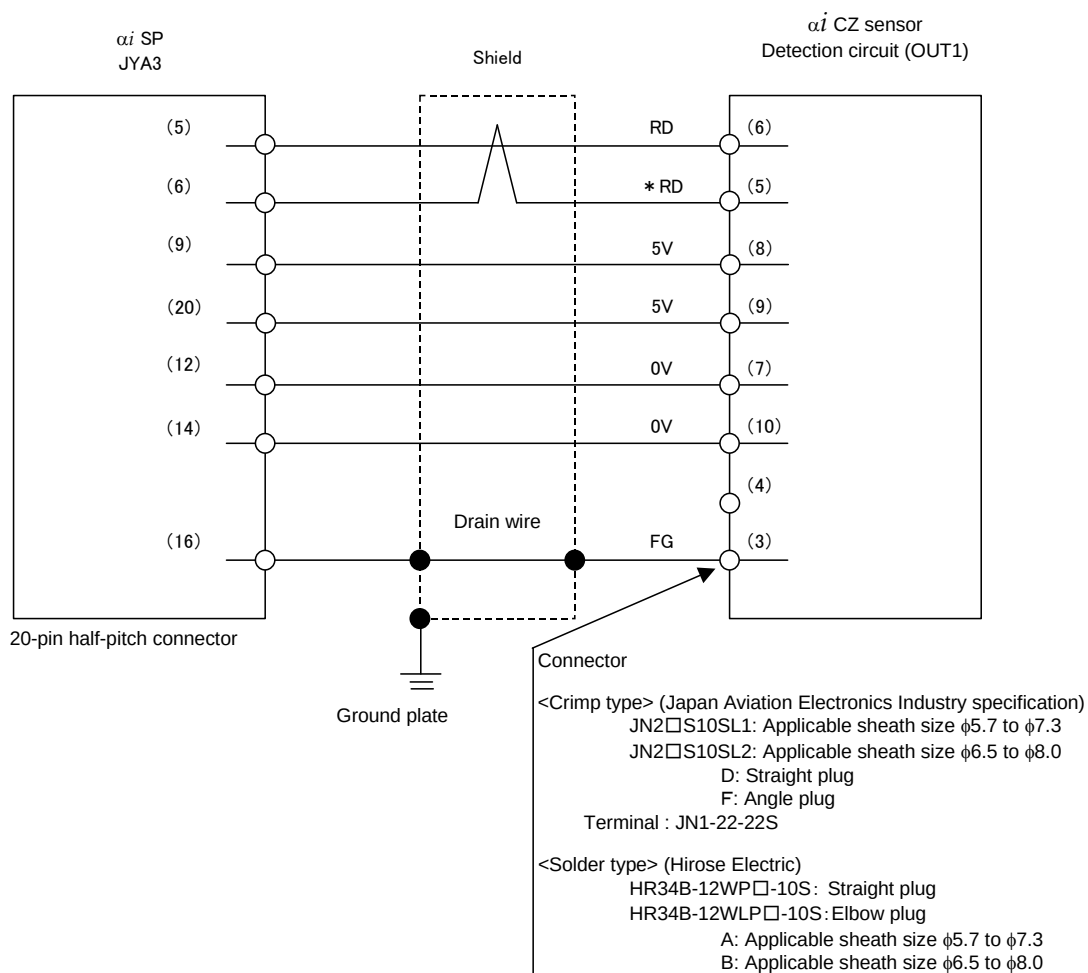

Wires used



| Signal name | 28 m or less                                                                                               | 50 m or less                                                                                                |
|-------------|------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------|
| 5V, 0V, 6V  | 0.3mm <sup>2</sup> × 5<br>Strand configuration 12/0.18 or 60/0.08<br>Insulation outer diameter 1.5 or less | 0.5mm <sup>2</sup> × 5<br>Strand configuration 20/0.18 or 104/0.08<br>Insulation outer diameter 1.5 or less |
| RD, *RD     | 0.18 mm <sup>2</sup> or more<br>Twisted-pair wire<br>Insulation outer diameter 1.5 or less                 | 0.18mm <sup>2</sup> or larger<br>Twisted-pair wire<br>Insulation outer diameter 1.5 or less                 |
| Drain wire  | 0.15mm <sup>2</sup> or larger                                                                              | 0.15mm <sup>2</sup> or larger                                                                               |

#### NOTE

- 1 The ground plate to which the shield is connected must be placed near the  $\alpha i$ SP to minimize the distance between the  $\alpha i$ SP and the ground plate.
- 2 Run the power line and signal line so that they are not in parallel.

**NOTE**

- 3 When the customer prepares the cable, the total wire resistance of 5 V and 0 V must be  $2\ \Omega$  or less.
- 4 The maximum wire thickness applicable to the connector on the detection circuit side is  $0.5\ \text{mm}^2$  (strand configuration: 20/0.18 or 104/0.08, insulation outer diameter: 15 or less), and the sheath is 5.7 to 8.0 in diameter. When using a wire or cable thicker than the above size is used, take measures as shown below.

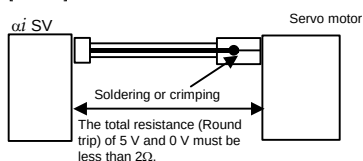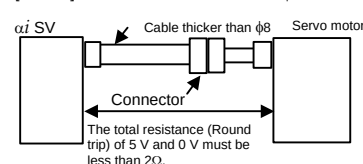[Case 1] Cable conductor exceeds  $0.5\text{mm}^2$ .[Case 2] Sheath diameter of exceeds  $\phi 8$ .

- Crimp tool specification

| FANUC specification | Japan Aviation Electronics Industry specification | Applicable cable thickness                                                                            |
|---------------------|---------------------------------------------------|-------------------------------------------------------------------------------------------------------|
| A06B-6114-K201#JN1E | CT150-2-JN1-E                                     | 21AWG( $0.5\text{mm}^2$ :20/0.18)<br>23AWG( $0.3\text{mm}^2$ )<br>25AWG( $0.18\text{mm}^2$ )          |
| A06B-6114-K201#JN1D | CT150-2-JN1-D                                     | 20AWG( $0.5\text{mm}^2$ :104/0.08)<br>21AWG( $0.5\text{mm}^2$ :20/0.18)<br>25AWG( $0.18\text{mm}^2$ ) |

- Extractor specification  
A06B-6114-K201/JN1R
- Recommended cable

| Recommended cable specification | Description                 | Crimp tool specification                                                                                             |
|---------------------------------|-----------------------------|----------------------------------------------------------------------------------------------------------------------|
| A66L-0001-0460                  | Flexible cable 28 m or less | A06B-6114-K201#JN1E<br>(FANUC specification)<br>CT150-2-JN1-E<br>(Japan Aviation Electronics Industry specification) |
| A66L-0001-0481                  | Fixed cable 28 m or less    |                                                                                                                      |
| A66L-0001-0462                  | Flexible cable 50 m or less | A06B-6114-K201#JN1D<br>(FANUC specification)<br>CT150-2-JN1-D<br>(Japan Aviation Electronics Industry specification) |
| A66L-0001-0491                  | Fixed cable 50 m or less    |                                                                                                                      |

- Connector kit specification
  - <Crimp type>
    - A06B-6114-K204#S : Straight plug (including a contact)
    - A06B-6114-K204#E : Elbow plug (including a contact)
  - <Solder type>
    - A06B-6114-K205#S : Straight plug
    - A06B-6114-K205#E : Elbow plug

### **9.3.3.18 Spindle Motor Feedback Cable Connection**


---

The connector of the feedback cable connected to the spindle motor may have the following problems, depending on the wiring in the motor terminal box (transit box for the built-in motor):


- Variations in low speed become large.
- Sensor signal disconnection alarm (alarm 9073) detected incorrectly
- Sensor signal abnormality alarm (alarm 9083) detected incorrectly

Give consideration to wiring so that minimum lengths of non-shielded portions are provided for the connector connecting the cable for  $\alpha i$  SP and signals output from the spindle motor. (See the examples below.)

## (1) Sample wiring in the motor terminal box

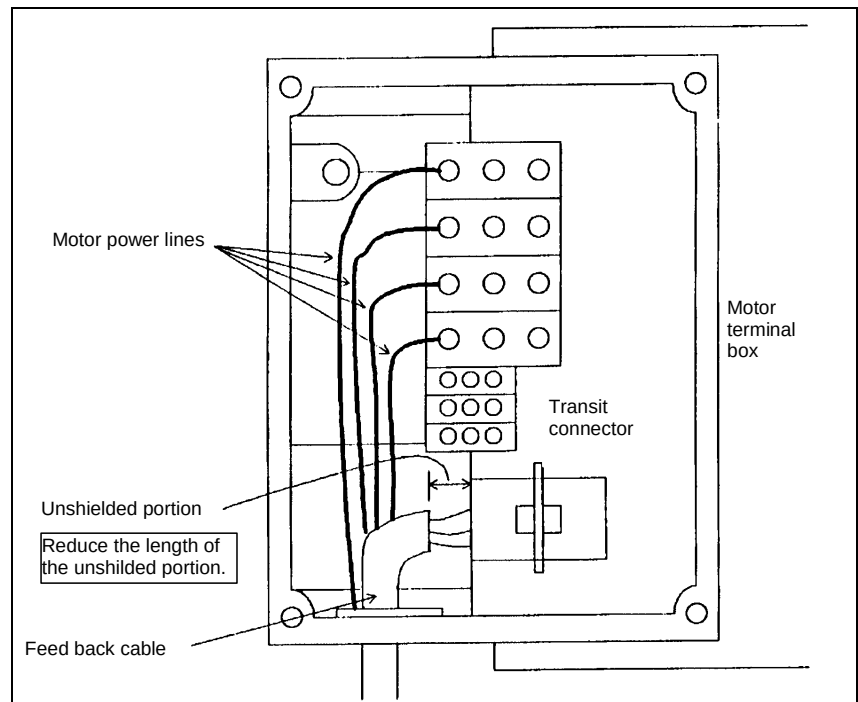

## (2) Sample wiring in the relay box for the built-in motor

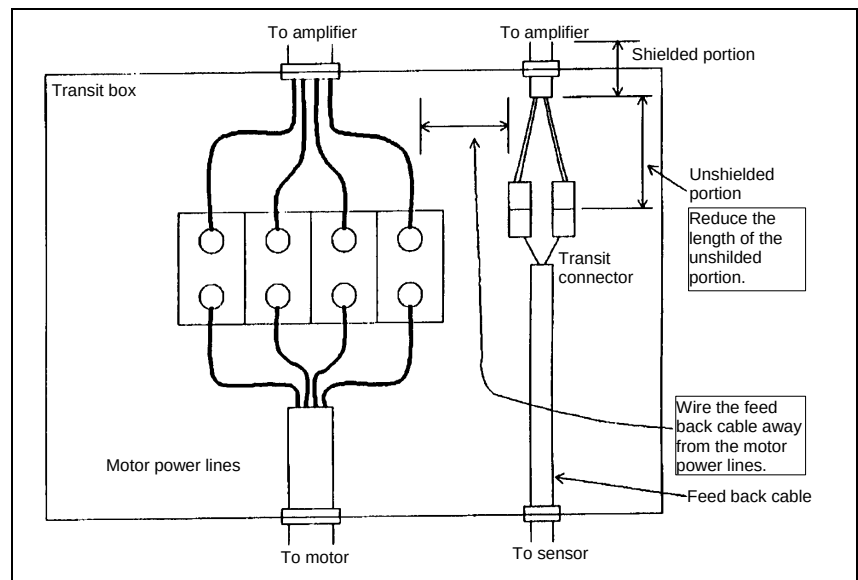



## 9.4 DETAILS OF CONNECTORS

### 9.4.1 20-Pin Half-Pitch Connectors


The following table lists the 20-pin half-pitch connectors used for the  $\alpha i$  series servo amplifier and the recommended cables for these connectors.

Use connectors that match the recommended cables specified on the applicable connection diagram in detail.

| Recommended-cable specification                                                        | Applicable connector                                                                    | Connector model number                     | Housing model number                    | Connector + housing                         |
|----------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------|--------------------------------------------|-----------------------------------------|---------------------------------------------|
| A66L-0001-0284#10P                                                                     | Crimp type                                                                              | Hirose Electric Co., Ltd.<br>FI30-20S      | Sideways cable slot type<br>FI-20-CVS2  | Sideways cable slot type<br>FI30-20S-CVS2   |
|                                                                                        |                                                                                         | Honda Tsushin Kogyo Co., Ltd.<br>PCR-E20FA | PCR-V20LA                               |                                             |
|                                                                                        | Soldering type                                                                          | Hirose Electric Co., Ltd.<br>FI40B-20S     | Sideways cable slot type<br>FI-20-CVS2  | Sideways cable slot type<br>FI40B-20S-CVS2  |
|                                                                                        |                                                                                         | Honda Tsushin Kogyo Co., Ltd.<br>PCR-E20FS | PCR-V20LA                               |                                             |
| A66L-0001-0286<br>A66L-0001-0460<br>A66L-0001-0462<br>A66L-0001-0481<br>A66L-0001-0491 | Soldering type<br>Note that this connector does not have pin No. 11, 13, 15, 17, or 19. | Hirose Electric Co., Ltd.<br>FI40B-2015S   | Sideways cable slot type<br>FI-2015-CVS | Sideways cable slot type<br>FI40B-2015S-CVS |
| A66L-0001-0368                                                                         | Soldering type                                                                          | Hirose Electric Co., Ltd.<br>FI40B-20S     | Sideways cable slot type<br>FI-20-CVS5  | Sideways cable slot type<br>FI40B-20S-CVS5  |

# 9.4.2 Tyco Electronics AMP D-5000 Series Connector

The  $\alpha i$  series uses the D-5000 series connector (manufactured by Tyco Electronics AMP) for the motor power cable. The connector is provided with three keys that assure it is inserted in the correct direction. In addition, four types of receptacle contacts are available, from which the user can select the suitable one depending on the amount of current to use (size of the conductor). Connectors and tools can be ordered directly from Tyco Electronics AMP. FANUC also furnishes options. For details, see Subsection 3.1.3.5, "Connectors."

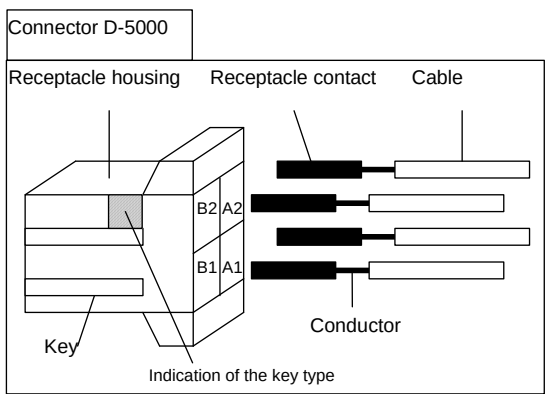

## Receptacle housing

There are three different key types for the receptacle housing. Be sure to select the receptacle housing of the key type that matches the servo axis you use.

| Receptacle housing model number | Specification of the key | Applicable servo amplifier                                                                                                      |
|---------------------------------|--------------------------|---------------------------------------------------------------------------------------------------------------------------------|
| 1-917807-2                      | XX                       | $\alpha i$ PS 5.5, $\alpha i$ SP2.2, $\alpha i$ SP 5.5, $\alpha i$ SV 1-axis, $\alpha i$ SV 2-axis (L), $\alpha i$ SV 3-axis(L) |
| 3-917807-2                      | XY                       | $\alpha i$ SV 2-axis (M), $\alpha i$ SV 3-axis (M)                                                                              |
| 2-917807-2                      | YY                       | $\alpha i$ SV 3-axis (N)                                                                                                        |


(Reference)

There is a cable-end connectors which are inserted no matter what key is used. Contact the connector manufacturer (Tyco Electronics AMP) for details.

## Receptacle contact

Four receptacle contact types are available, so as to support different conductor diameters. Be sure to select the receptacle contact (silver plating) that matches the servo axis you use.

| Rectangle contact model number |           | Conductor size (mm <sup>2</sup> ) | Conductor size AWG | Insulation outer diameter (mm) | Manual tool model number |
|--------------------------------|-----------|-----------------------------------|--------------------|--------------------------------|--------------------------|
| SS size                        | 1318986-6 | 0.50 – 1.42                       | 20/18              | 1.08-3.23                      | 1366656-1                |
| S size                         | 316040-6  | 1.23 – 2.27                       | 16/14              | 3.0-3.8                        | 234170-1                 |
| M size                         | 316041-6  | 3.08 – 5.50                       | 12/10              | 4.0-5.2                        | 234171-1                 |
| L size                         | 1318697-6 | 7.27 – 8.92                       | 8                  | 4.9-7.8                        | 1366044-1                |

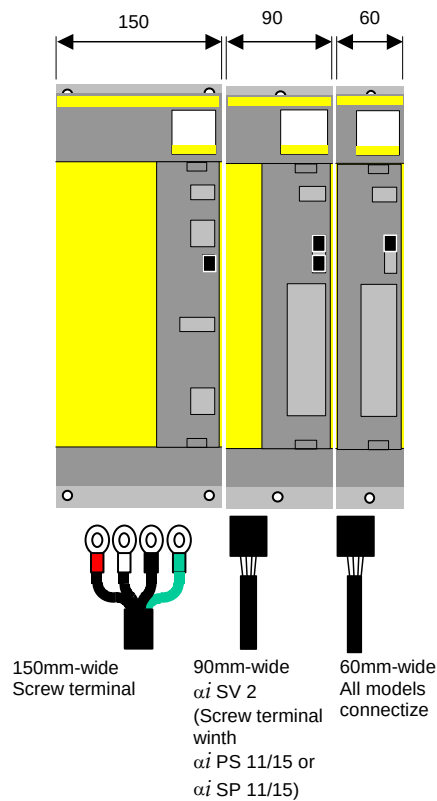

| Applied                                                                           | Connector key        |
|-----------------------------------------------------------------------------------|----------------------|
| αi PS 5.5<br>αi SP 2.2<br>αi SP 5.5<br>αi SV1<br>αi SV2(L-axis)<br>αi SV3(L-axis) | XX<br><br>1-917807-2 |
| αi SV 2 (M-axis)<br>αi SV 3 (M-axis)                                              | XY<br><br>3-917807-2 |
| αi SV 3 (N-axis)                                                                  | YY<br><br>2-917807-2 |

| Contact             |
|---------------------|
| SS<br><br>1318986-6 |
| S<br><br>316040-6   |
| M<br><br>316041-6   |
| L<br><br>1318697-6  |

# 10

## SPINDLE-RELATED OPTIONS

---

Chapter 10, "SPINDLE-RELATED OPTIONS", consists of the following sections:

|      |                                |     |
|------|--------------------------------|-----|
| 10.1 | SPINDLE ORIENTATION.....       | 305 |
| 10.2 | POWER LINE SWITCH CIRCUIT..... | 306 |
| 10.3 | SUB MODULE SW .....            | 316 |
| 10.4 | SUB MODULE SM.....             | 323 |

## 10.1 SPINDLE ORIENTATION

### Sensor

| Sensor                                                               | Description                                                                                 |
|----------------------------------------------------------------------|---------------------------------------------------------------------------------------------|
| $\alpha i$ position coder                                            | Connected to the spindle on a 1:1 basis (directly connected by using a gear or timing belt) |
| $\alpha i$ position coder S                                          | Connected to the spindle on a 1:1 basis (directly connected by using a gear or timing belt) |
| $\alpha i$ MZ sensor<br>$\alpha i$ BZ sensor<br>$\alpha i$ CZ sensor | Directly connected to the spindle on a 1:1 basis                                            |
| $\alpha i$ M sensor +<br>Proximity switch                            | Installed on the spindle. The motor is connected with the spindle by using a gear.          |

### Detection unit and repetitive positioning precision

| Sensor                                     | Number of feedback signals | Detection unit | Repetitive positioning precision <sup>(NOTE)</sup>                              |
|--------------------------------------------|----------------------------|----------------|---------------------------------------------------------------------------------|
| $\alpha i$ position coder                  | 1024p/rev                  | 0.088°         | ±0.2°                                                                           |
| $\alpha i$ position coder S                | 1024λ/rev                  | 0.088°         | ±0.2°                                                                           |
| $\alpha i$ MZ sensor, $\alpha i$ BZ sensor | 128λ/rev<br>to<br>512λ/rev | 0.088°         | ±0.2°                                                                           |
| $\alpha i$ CZ sensor                       |                            | 0.088°         | ±0.2°                                                                           |
| $\alpha i$ M sensor + proximity switch     | 128λ/rev<br>to<br>512λ/rev | 0.088°         | ±0.2°<br>When the gear ratio is 1:1. An error due to gear backlash is excluded. |

#### NOTE

- 1 The error factors on the machine side are excluded.
- 2 With the  $\alpha i$  M sensor plus proximity switch method, stop position control is exercised using the  $\alpha i$  M sensor built into the motor, with the proximity switch installed on the spindle used as the reference. So, pay attention to the following mechanical error factors:
  - When the gear ratio is higher than 1:1 (on the spindle acceleration side), repetitive positioning precision decreases.
  - The stop position can move by a gear backlash.

## **10.2 POWER LINE SWITCH CIRCUIT**

---

### **10.2.1 Overview**

---

The power line switch circuit is installed between an  $\alpha i$  SP and spindle motor to exercise spindle switch control and output switch control.

- (1) Power switching from one motor to another (spindle switch control)
- (2) Power line switching between the two different windings of a motor (output switch control)

A power line switch unit for performing power line switching is available.


A switch circuit can also be configured by using magnetic contactors and a relay.

### **10.2.2 Switch Circuit Configuration**

---

The switch circuit is configured as follows:

- The diagram given below shows connections of the coils of magnetic contactors.
- For the PMC sequence, refer to Section 5.1, "Output Switch Control", or Section 5.2, "Spindle Switch Control", in Chapter 5, "Function Description", in "FANUC AC SPINDLE MOTOR  $\alpha i$  Series Parameter Manual" (B-65280EN).
- For the connection of the main contacts in output switch control, refer to the relevant spindle motor descriptions.
- Select magnetic contactors so that the rated contact current of the main contacts is at least the short-time rated current of the spindle motor.

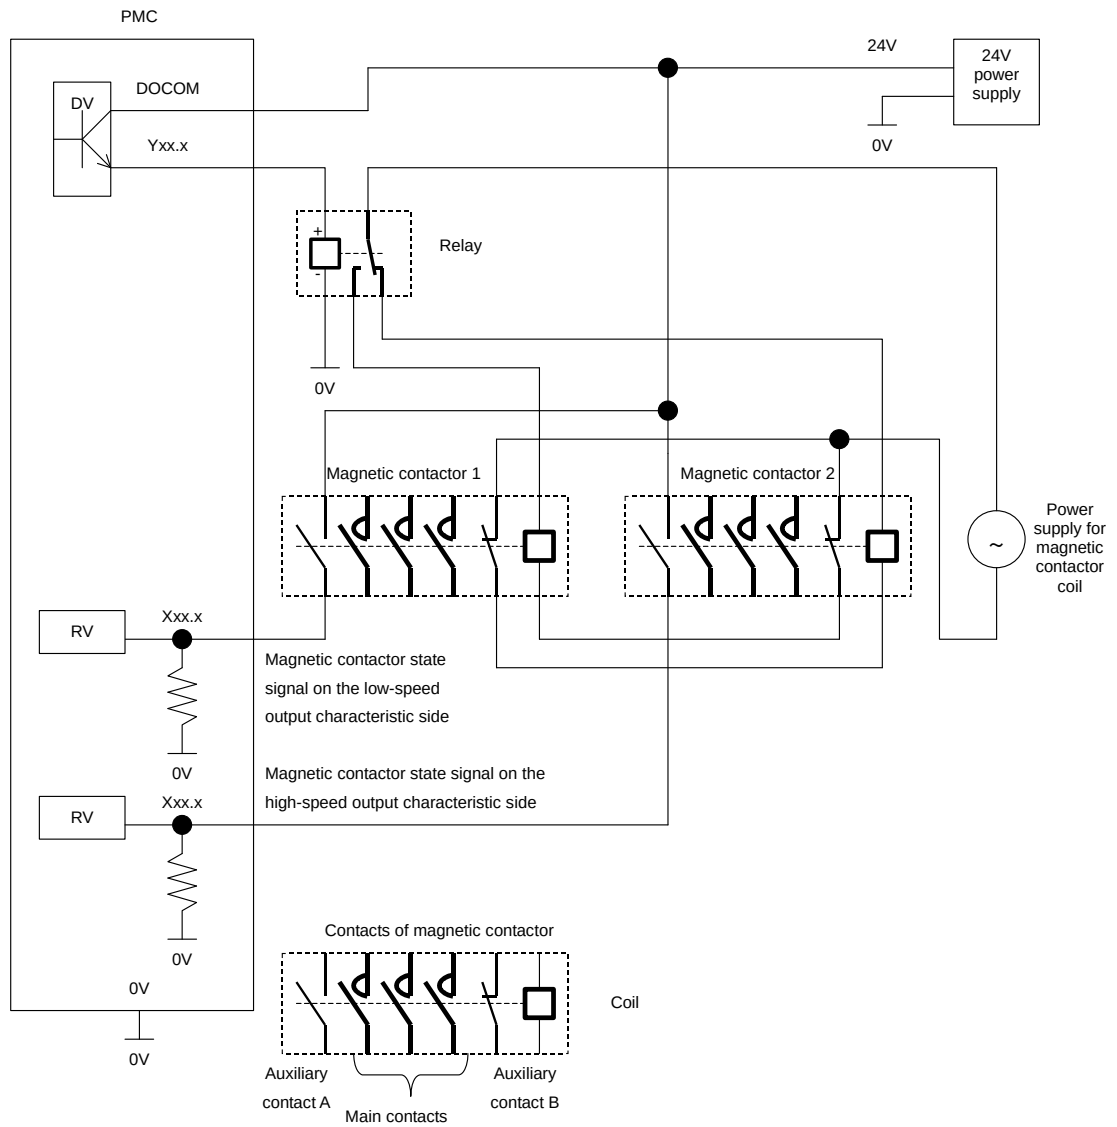

## 10.2.3 Power Line Switch Unit

### 10.2.3.1 Specification

| Ordering specification drawing number    | A06B-6078-K034 (Y/Y connection)<br>A06B-6078-K035 (Y/Δ connection) | A06B-6078-K036 (Y/Y connection)<br>A06B-6078-K037 (Y/Δ connection) |
|------------------------------------------|--------------------------------------------------------------------|--------------------------------------------------------------------|
| Magnetic contactor specification         | A58L-0001-0306<br>Fuji Electric (SC-3N)                            | A58L-0001-0312<br>Fuji Electric (SC-6N)                            |
| Rated operating current *1               | 200-240V: 65A<br>400-440V: 65A<br>440-480V: 60A                    | 200-240V: 125A<br>400-440V: 110A<br>440-480V: 90A                  |
| Rating of operating electromagnetic coil | 200V/220V 15% to +10%<br>50/60Hz ±1Hz                              |                                                                    |
| Relay specification                      | A58L-0001-0307 OMRON (type LY2-D)                                  |                                                                    |
| Rated voltage                            | 24V ±10%                                                           |                                                                    |
| Rated current                            | 36.9mA                                                             |                                                                    |

\*1 Select a power line switch unit so that the peak rated current of the spindle motor used is equal to or less than this value.



10.2.4 Outside and Mounting Dimension Diagrams

Outside and mounting dimension diagrams of the switch unit for spindle switch control and output switch control (Y/Y connection)



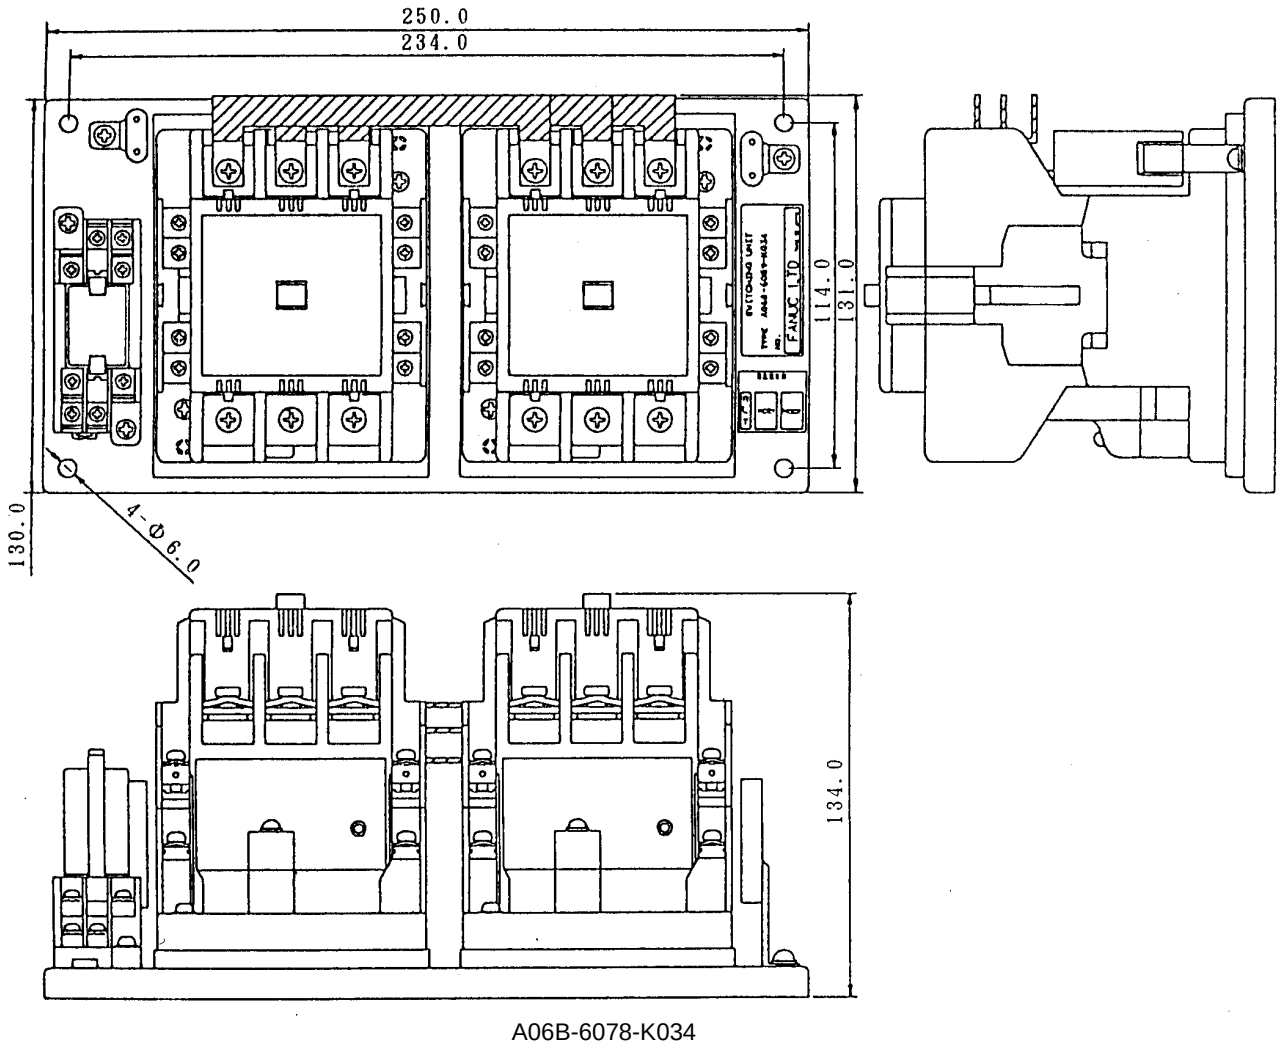



Fig. A

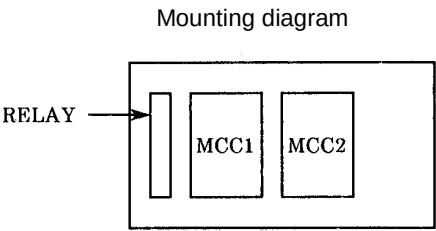

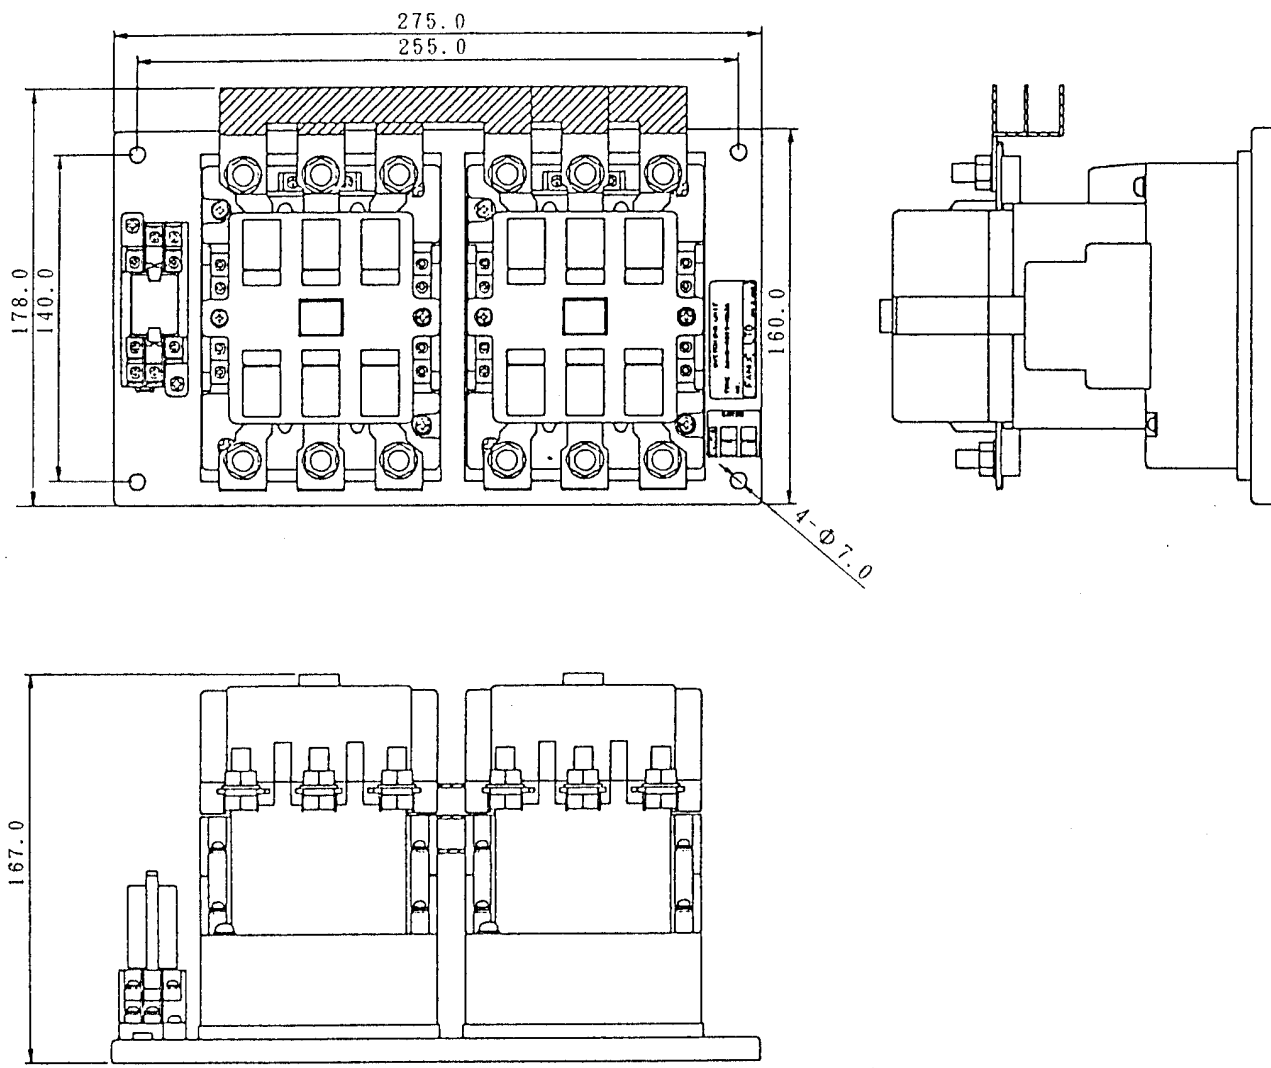


A06B-6078-K036

Fig. B

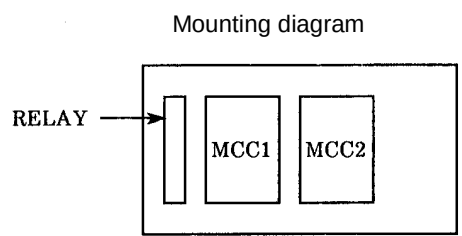



**Outside and mounting dimension diagrams of the switch unit for output switch control (Y/Δ connection)**

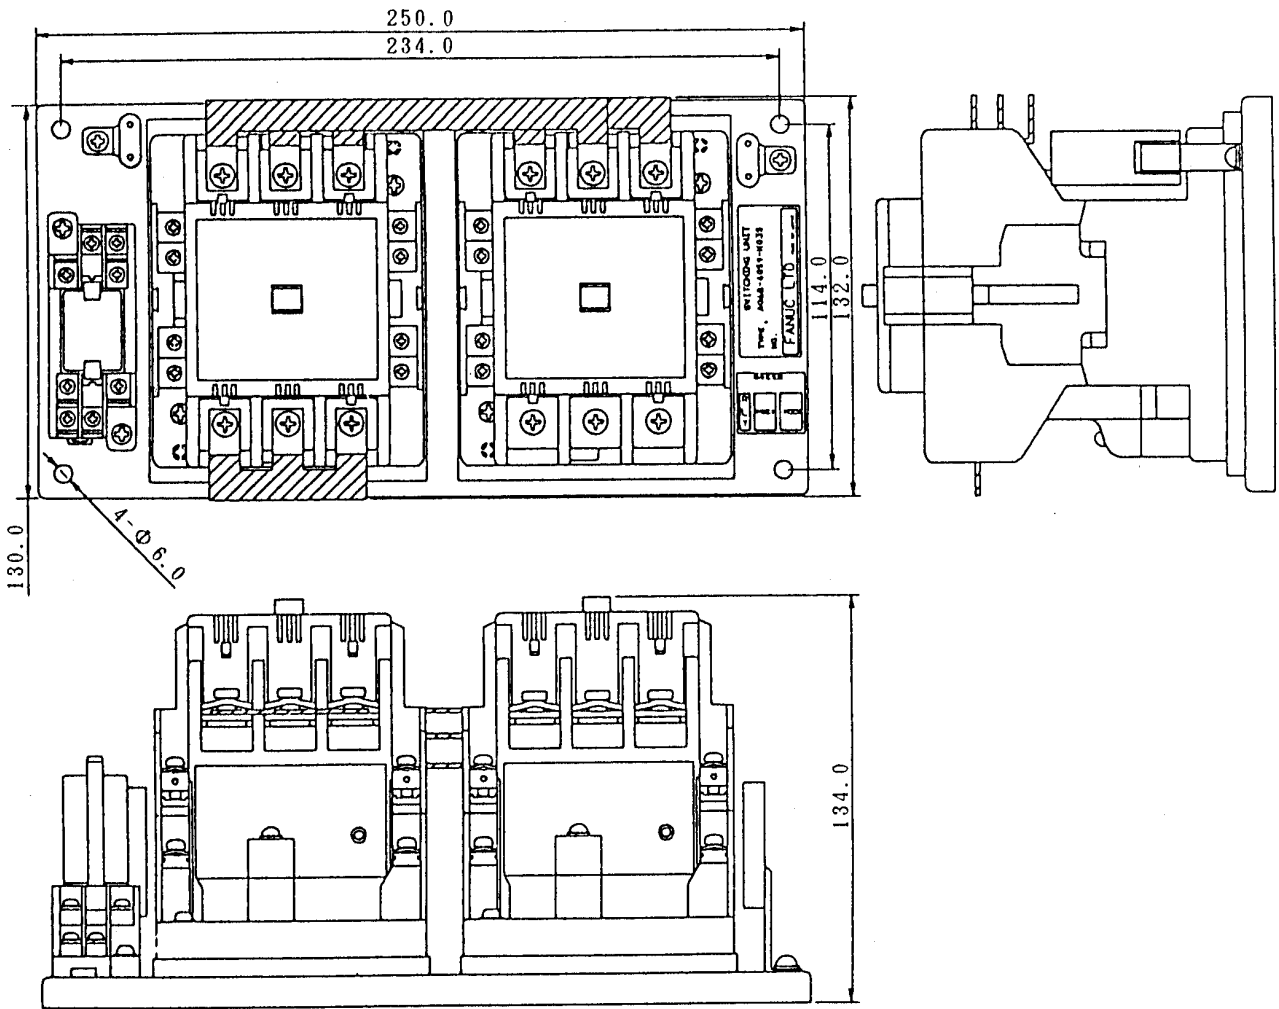

A06B-6078-K035


Fig. A

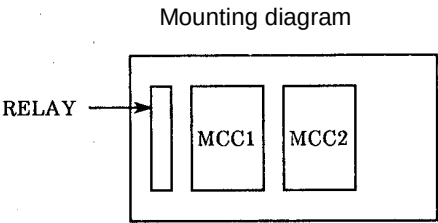

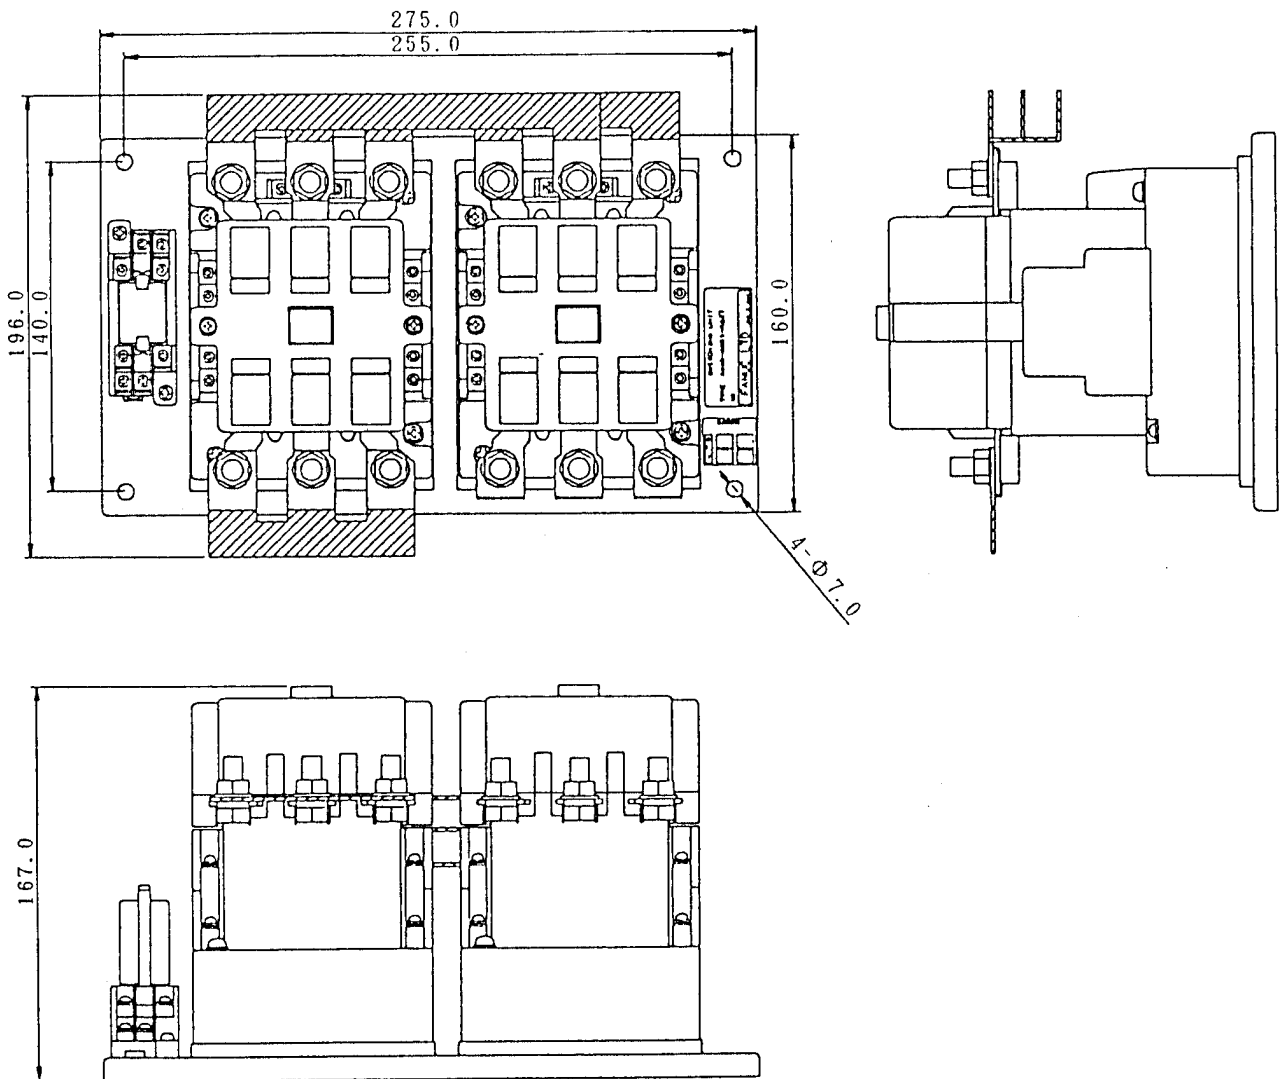


A06B-6078-K037

Fig. B

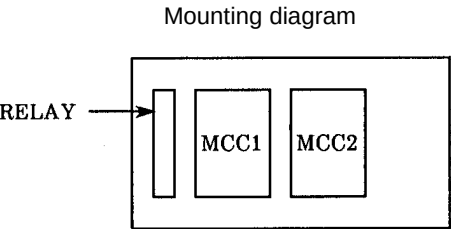

## 10.2.5 Connection

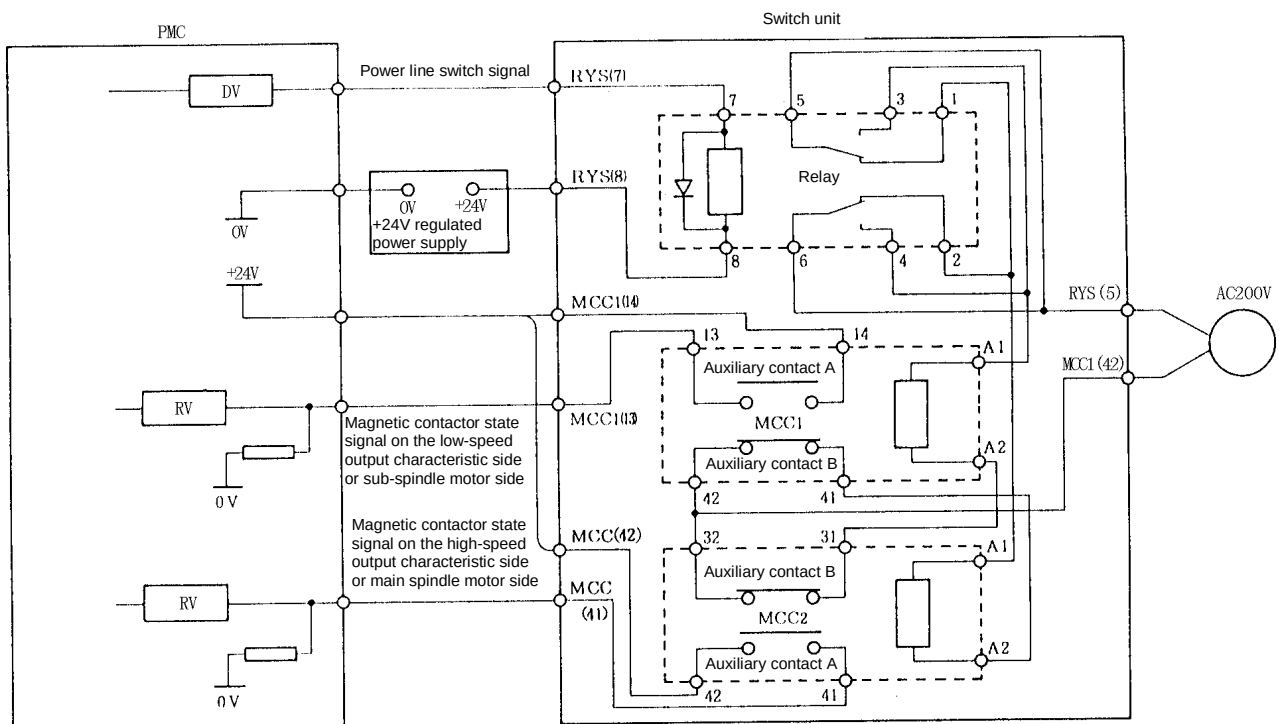

### NOTE

Make a connection to the switch unit by direct screwing on the screw terminal of the magnetic contactor and relay socket.


## 10.2.6 Notes

- (1) Install the switch unit under the same conditions as for the  $\alpha i$  SP.


### Installation conditions

- Ambient temperature  
Ambient temperature of the unit :  
0 to 55°C (at operation)  
0 to 45°C (at keeping and transportation)
- Humidity  
Normally 90% RH or below, and condensation-free
- Vibration  
In operation : Below 0.5G
- Atmosphere  
No corrosive or conductive mists or drops should deposit directly on the electronic circuits.


- (2) The figure below shows the standard method of installation. However, the switch unit may be tilted up to 15 degrees toward the right or left.

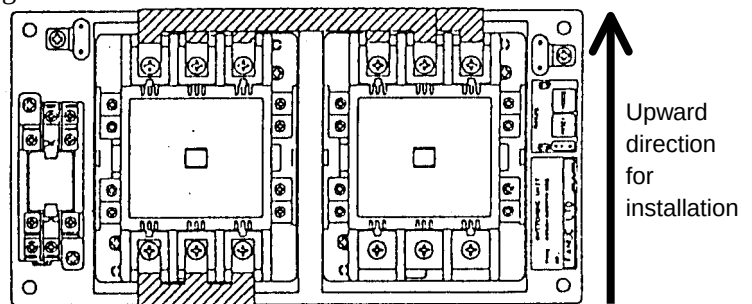

- (3) The switch unit may need to be installed horizontally from a viewpoint of cabling or installation (Fig. 11.7.6(b)). In this case, however, the characteristics of the magnetic contactor remain almost the same, but the mechanical life and open/close frequency decrease.

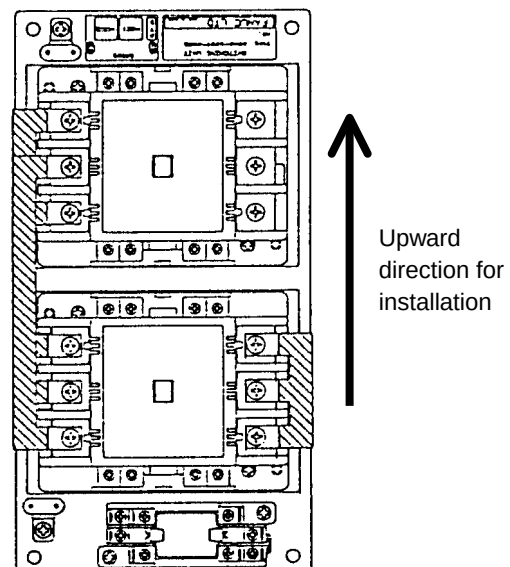

- (4) Provide an arc space as shown below.

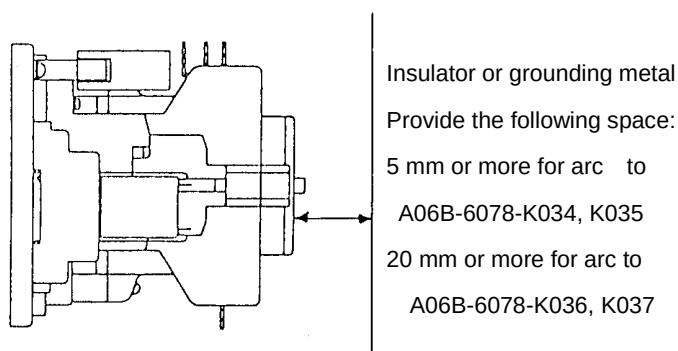

- (5) If the main magnetic contactor unit is installed incorrectly or incompletely, the contact can make an abrupt movement due to a shock upon power-up, or its life can be adversely affected. Moreover, if the electric cable to be connected is not tightened sufficiently, an overheat can occur or the electric cable can come off, resulting in a major accident.

- (a) Tightening torque

- (i) Magnetic contactor

| Location               | Tightening torque [kg·cm]        |                                  |
|------------------------|----------------------------------|----------------------------------|
|                        | A06B-6078-K034<br>A06B-6078-K035 | A06B-6078-K036<br>A06B-6078-K037 |
| MCC main terminal      | 62.0 (M6.0)                      | 84.0 (M8.0)                      |
| MCC auxiliary terminal | 14.0 (M3.5)                      | 14.0 (M3.5)                      |

- (ii) Relay socket

| Location     | Tightening torque [kg·cm] |
|--------------|---------------------------|
| Relay socket | 14.0 (M3.5)               |


## 10.3 SUB MODULE SW

The sub module SW is 60 mm wide. By being combined with  $\alpha i$  SP TYPE A or  $\alpha i$  SP TYPE B according to a required function, the sub module SW is used for the spindle switch function to switch between two motors (main and sub) with one spindle amplifier module.

- A cable for connecting the SW module with the  $\alpha i$  SP needs to be prepared.
- A metal plate for mounting needs to be prepared.

For the drawing numbers of the sub module SW and connection cable kit, see Chapter 3.

### 10.3.1 Configuration

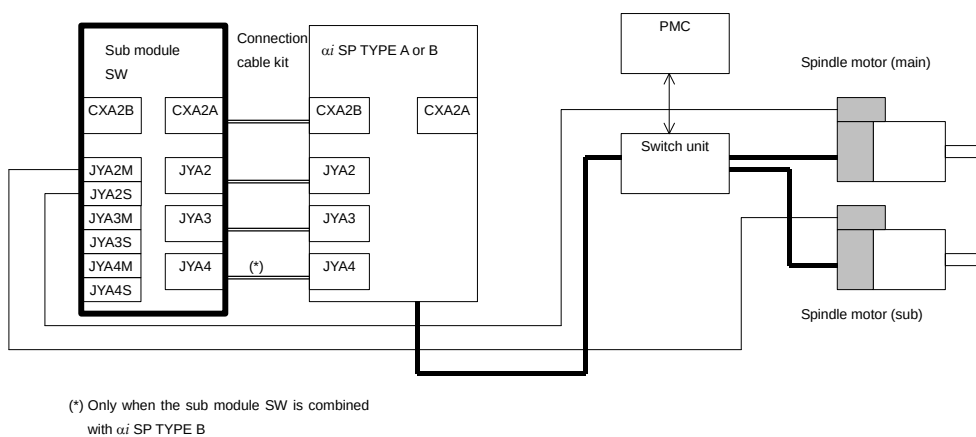



## 10.3.2 Specification

By combining the sub module SW with  $\alpha i$  SP TYPE A or  $\alpha i$  SP TYPE B, the spindle switch function for switching between two motors (main and sub) with one spindle amplifier module can be used. The table below indicates allowable combinations of detectors and functions on the main and sub sides of spindle switch control. If the main or sub side of spindle switch control includes a function that requires  $\alpha i$  SP TYPE B (organization number 6 or 7 indicated below), select TYPE B as an  $\alpha i$  SP to be combined with the sub module SW.

|                                                 |                                                 |                                                            | Organization on main or sub side |                 |   |   |                 |   |   | Remarks |
|-------------------------------------------------|-------------------------------------------------|------------------------------------------------------------|----------------------------------|-----------------|---|---|-----------------|---|---|---------|
|                                                 |                                                 |                                                            | 1                                | 2               | 3 | 4 | 5               | 6 | 7 |         |
| $\alpha i$ SP to be combined with sub module SW |                                                 | $\alpha i$ SP TYPE A                                       | ○                                | ○               | ○ | ○ | ○               |   |   |         |
|                                                 |                                                 | $\alpha i$ SP TYPE B                                       | ○                                | ○               | ○ | ○ | ○               | ○ | ○ |         |
| Spindle system configuration                    | Sensor on the motor                             | $\alpha i$ M sensor                                        | ○                                |                 |   | ○ | ○               | ○ | ○ |         |
|                                                 |                                                 | $\alpha i$ MZ sensor                                       |                                  | ○               |   |   |                 |   |   |         |
|                                                 |                                                 | $\alpha i$ BZ sensor (when a built-in motor is used) (*10) |                                  |                 | ○ |   |                 |   |   |         |
|                                                 | Sensor on the spindle                           | $\alpha i$ position coder                                  |                                  |                 |   | ○ |                 |   |   | *3      |
|                                                 |                                                 | External 1-rotation                                        |                                  |                 |   |   | ○               |   |   | *3      |
|                                                 |                                                 | $\alpha i$ BZ sensor                                       |                                  |                 |   |   |                 | ○ |   | *3      |
|                                                 |                                                 | $\alpha i$ position coder S                                |                                  |                 |   |   |                 |   | ○ | *3      |
|                                                 |                                                 |                                                            |                                  |                 |   |   |                 |   |   |         |
| Function                                        | Rigid tapping                                   |                                                            | ○ <sup>*1</sup>                  | ○ <sup>*2</sup> | ○ | ○ | ○ <sup>*2</sup> | ○ | ○ |         |
|                                                 | Orientation by a position coder                 |                                                            |                                  | ○ <sup>*6</sup> | ○ | ○ |                 | ○ | ○ | *4      |
|                                                 | Orientation by the external one-rotation signal |                                                            |                                  |                 |   |   | ○ <sup>*2</sup> |   |   | *7      |
|                                                 | Spindle synchronization                         | Velocity synchronization                                   | ○ <sup>*2</sup>                  | ○ <sup>*6</sup> | ○ | ○ | ○ <sup>*2</sup> | ○ | ○ | *5      |
|                                                 |                                                 | Phase synchronization                                      |                                  | ○ <sup>*6</sup> | ○ | ○ | ○ <sup>*9</sup> | ○ | ○ | *5      |
|                                                 | Threading                                       |                                                            |                                  | ○ <sup>*6</sup> | ○ | ○ |                 | ○ | ○ |         |
|                                                 | Cs-axis contour control                         |                                                            |                                  | ○ <sup>*6</sup> | ○ |   |                 | ○ | ○ | *5      |

- \*1 The spindle and motor must be interconnected with a timing belt or gear. No orientation is available to adjust the tapping start position.
- \*2 The spindle and motor must be interconnected with a timing belt or gear.
- \*3 The spindle and detector must be interconnected in one-to-one connection mode.
- \*4 Orientation of external stop position setting type can be used on the main side only.
- \*5 Two motor amplifiers are required.
- \*6 Cs contour control can be used on the main side only.
- \*7 Note that the stop position moves by a backlash between the spindle and motor because of the theory of operation.
- \*8 The spindle and motor must be interconnected directly or with a timing belt or gear in one-to-one connection mode.
- \*9 Before specifying spindle synchronization, perform orientation to detect the one-rotation signal (PC1DT=1).
- \*10 The  $\alpha i$ CZ analog output type is also applicable.


### Other notes

Up to two stages of parameter gear switching can be set on the sub side.

With the Power Mate, only Model D and F can use spindle switch control.

### 10.3.3 External Dimensions

#### Sub module SW

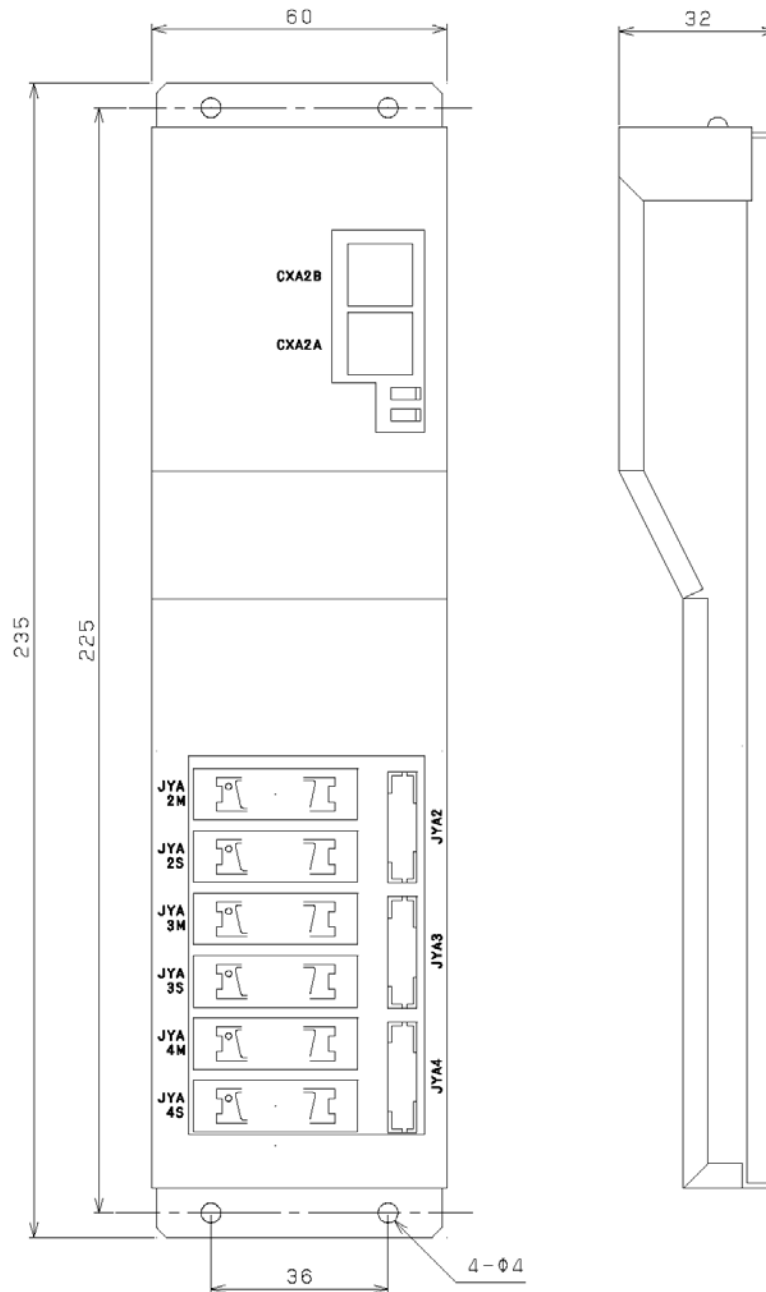


#### NOTE

A metal plate for mounting the sub module SW needs to be separately prepared.

Prepare a metal plate for mounting the sub module SW. The dimensions of a metal plate for mounting the sub module SW are specified to avoid interference with the short bar of the DC link section.



### 10.3.4 Connector Installation Diagram (for Combination with $\alpha i$ SP 15)

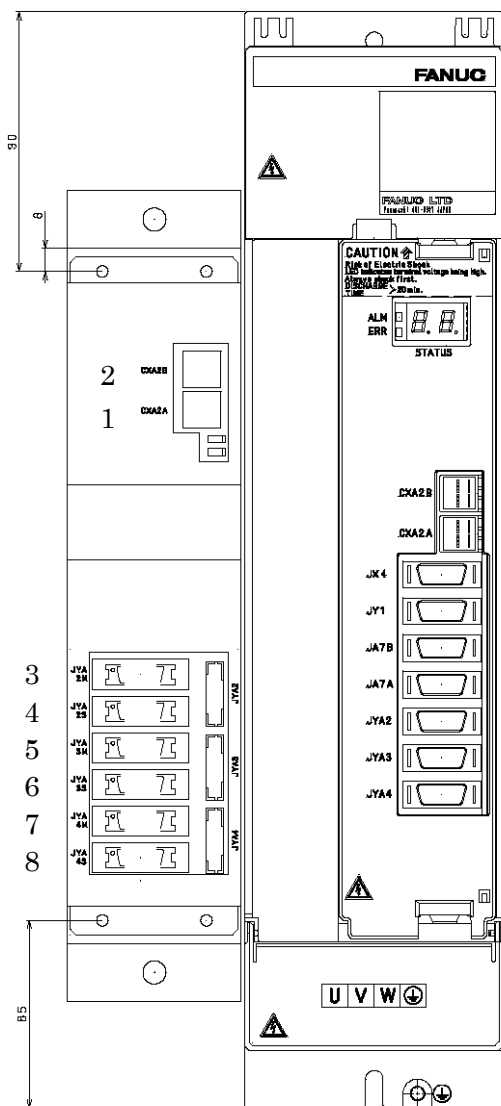


|   | Name                                                                                            | Indication |
|---|-------------------------------------------------------------------------------------------------|------------|
| 1 | Connector for $\alpha i$ PS interface output                                                    | CXA2A      |
| 2 | Connector for $\alpha i$ PS interface input                                                     | CXA2B      |
| 3 | Connector (main side) for spindle sensor connection on motor side                               | JYA2M      |
| 4 | Connector (sub side) for spindle sensor connection on motor side                                | JYA2S      |
| 5 | Connector for position coder connection and external one-rotation signal connection (main side) | JYA3M      |
| 6 | Connector for position coder connection and external one-rotation signal connection (sub side)  | JYA3S      |
| 7 | Connector for separate spindle sensor connection (main side)                                    | JYA4M      |
| 8 | Connector for separate spindle sensor connection                                                | JYA4S      |

#### NOTE

Install Submodule SW on the right side of the  $\alpha i$  SP when width of  $\alpha i$  SP is 150mm or 300mm width.

## 10.3.5 Connection

### Total connection diagram

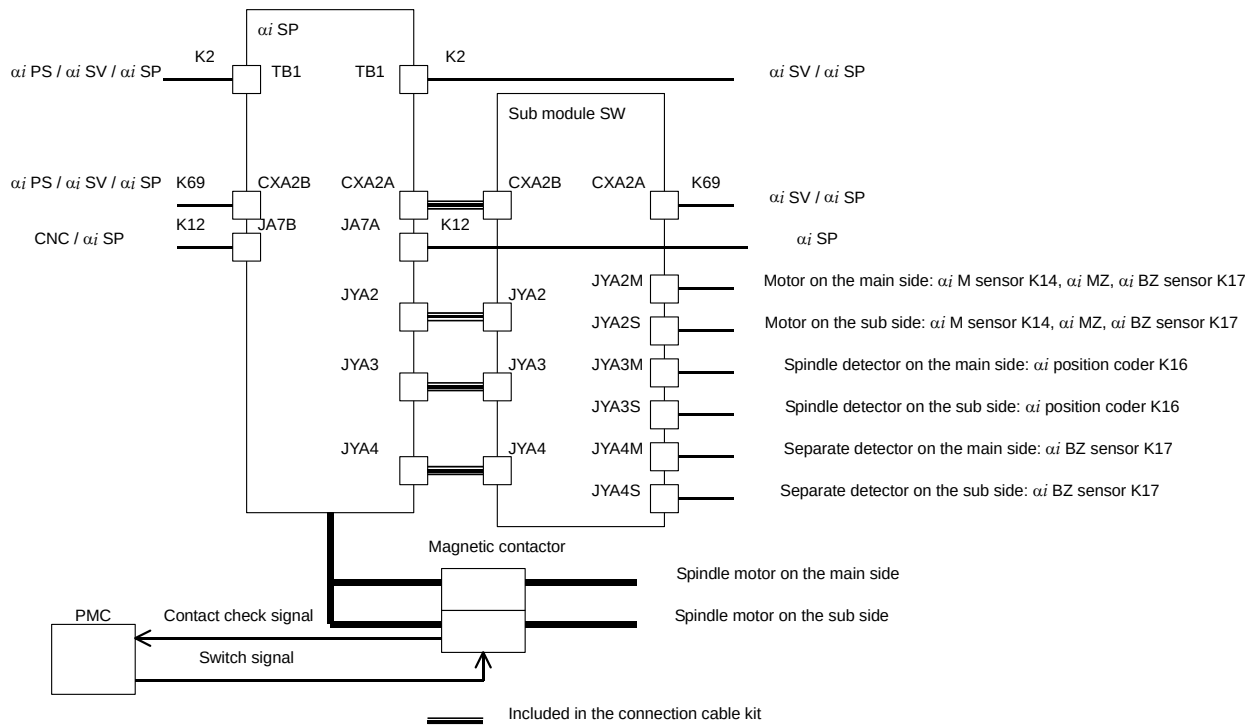

The  $\alpha i$ CZ analog output type can be used in the same way as the  $\alpha i$ BZ sensor.


For details of the connection cables other than the connection cable kit, see the items of relevant K numbers in Chapter 9.

For the drawing number of the connection cable kit, see Chapter 3.

## 10.4 SUB MODULE SM

When used with the  $\alpha i$  SP TYPE B, the sub module SM is used to drive the synchronous built-in spindle motor Bi S series.

Overall connection

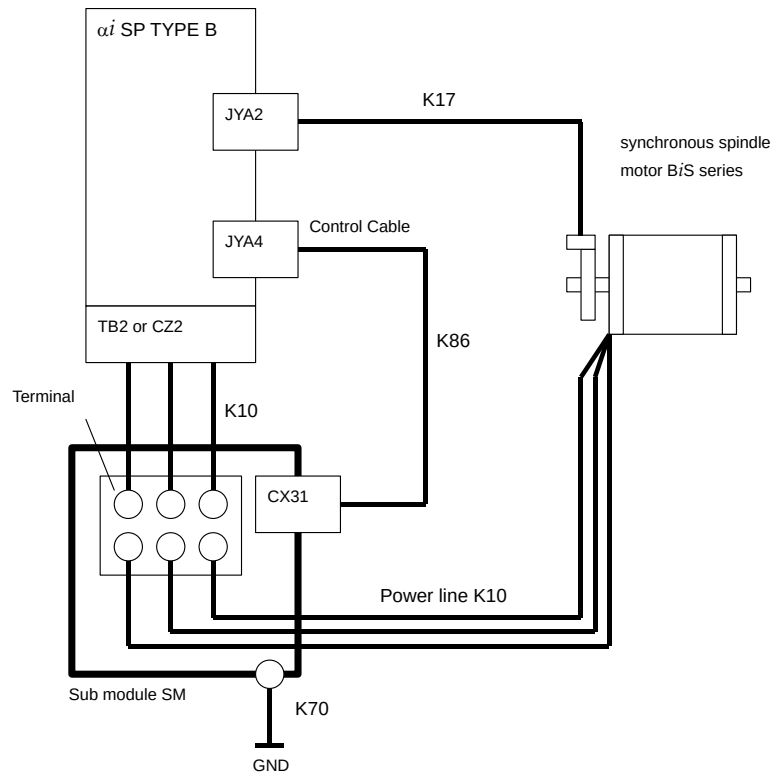

### WARNING

To ensure safety, avoid inserting switches to the power lines connected to the  $\alpha i$ SP, sub module SM, and motor. If a switch connected to such a power line is turned off during motor rotation, overvoltage generated from the motor cannot be blocked, possibly damaging the motor and sub module SM.

### 10.4.1 Specifications

| Model name                                               | SSM-100                                                                                                                                        | SSM-200                     |
|----------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------|
| Short-circuit current                                    | 100Arms<br>(within 120 sec)                                                                                                                    | 200Arms<br>(within 120 sec) |
| Rated input voltage                                      | 200 to 480VAC                                                                                                                                  |                             |
| Applicable SPM                                           | $\alpha i$ SP TYPE B<br>Software series: 9D53 (#H553) edition B or later<br>9D70 (#H570) edition A or later<br>9D80 (#H580) edition A or later |                             |
| Weight                                                   | 6kg                                                                                                                                            | 6.5kg                       |
| Power consumption<br>(normal operation<br>without alarm) | 3W                                                                                                                                             | 6W                          |




#### CAUTION

To latest  $\alpha i$ SP series (A06B-6142-Hxxx#H580 and A06B-6152-Hxxx#H580), apply sub module SM unit edition B or later.




## 10.4.2 Outline Drawing


With the protective cover  
Installed with two M4 screws

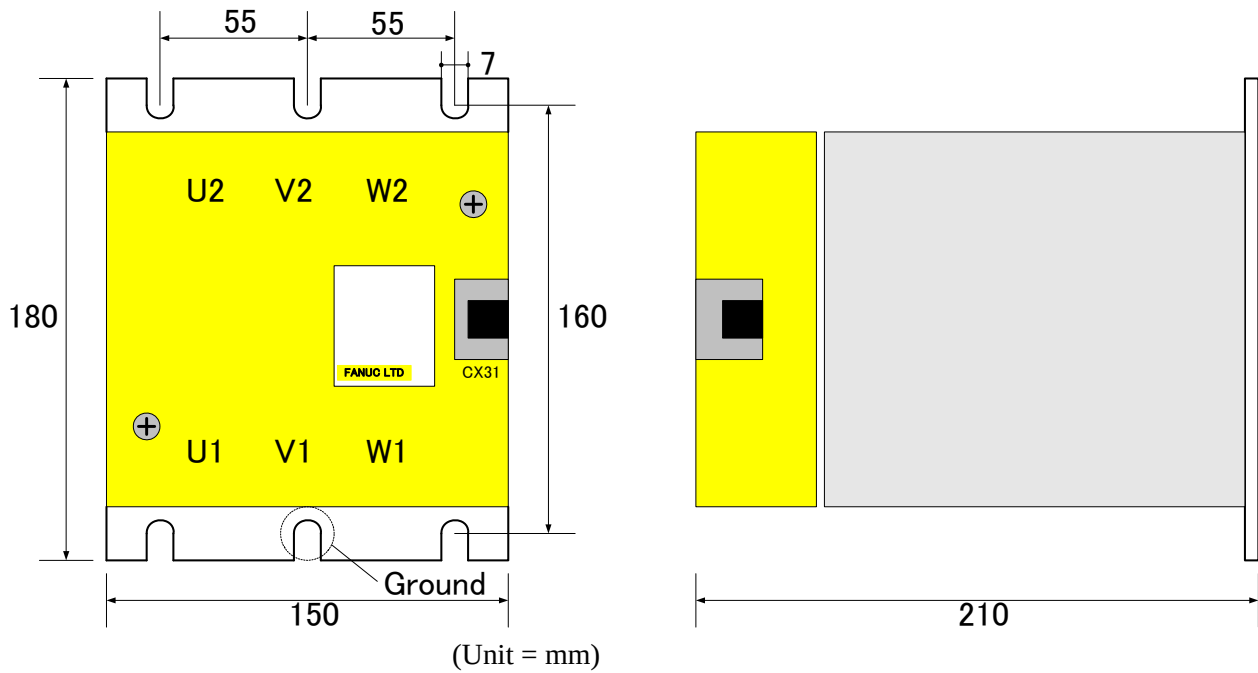

Without the protective cover

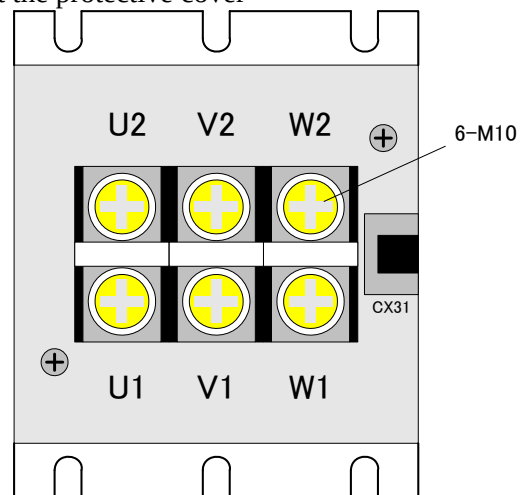

### 10.4.3 Panel Cut-out

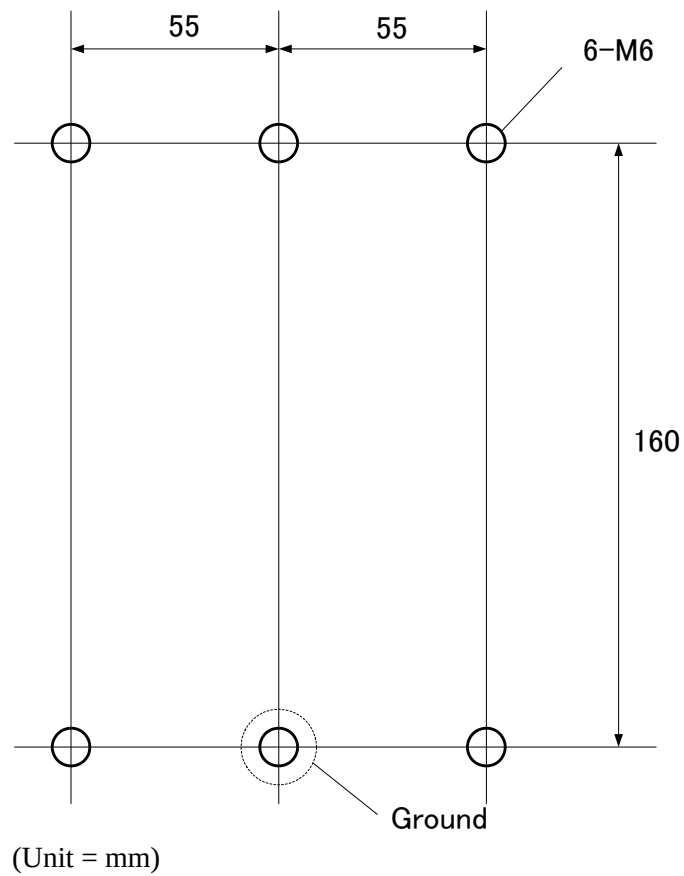

### 10.4.4 Connection

#### Details of cables K10, K17, K70, and K86

For details of cables K10, K17, K70, and K86, see Subsection 9.2.3 and Appendix E in this manual.

# 11

## SENSOR

---

Chapter 11, "SENSOR," consists of the following sections:

|      |                                  |     |
|------|----------------------------------|-----|
| 11.1 | SENSOR FOR THE SERVO SYSTEM..... | 328 |
| 11.2 | SENSOR FOR THE SPINDLE .....     | 350 |

## 11.1 SENSOR FOR THE SERVO SYSTEM

### 11.1.1 Absolute $\alpha i$ CZ Sensor (Separate Sensor)

This manual describes the specifications and handling of the absolute  $\alpha i$ CZ sensor for angular displacement detection.

This sensor can be used as a separate sensor when high-precision angular displacement detection is required as in the case of a round table configured as a full-closed system using a servo motor and worm gear. This sensor differs from the similar sensor models, namely,  $\alpha i$ CZ sensors 512A, 768A, and 1024A (used with the DiS serial synchronous built-in servo motor) in that this sensor does not have circuitry for processing temperature information and an overheat alarm and therefore requires no thermistor or thermostat connection.

For this sensor, the FANUC serial interface is used. This sensor can be directly connected to the separate sensor interface unit.

#### Names and specification numbers

Names and specification numbers

| Name                        | Specification number | Remarks         |                       |
|-----------------------------|----------------------|-----------------|-----------------------|
|                             |                      | Number of teeth | Maximum speed         |
| $\alpha i$ CZ sensor 512AS  | A860-2164-T411       | 512             | 1200min <sup>-1</sup> |
| $\alpha i$ CZ sensor 768AS  | A860-2164-T511       | 768             | 800min <sup>-1</sup>  |
| $\alpha i$ CZ sensor 1024AS | A860-2164-T611       | 1024            | 600min <sup>-1</sup>  |

#### Absolute maximum ratings

Absolute maximum ratings (applicable to all specifications)

| Item                        | Specification    |
|-----------------------------|------------------|
| Power supply voltage        | -0.5 V to +6.0 V |
| Operating temperature range | 0°C to +70°C     |
| Humidity                    | 95%RH or less    |

### 11.1.1.1 Specifications

#### $\alpha i$ CZ sensor 512AS

#### Mechanical and electrical specifications

| Item                                              | Min. | Typ.        | Max. | Unit              |
|---------------------------------------------------|------|-------------|------|-------------------|
| Speed                                             |      |             | 1200 | min <sup>-1</sup> |
| Resolution                                        |      | 1/3,600,000 |      | Revolution        |
| Precision                                         |      | ±4          |      | Second            |
| Repetition precision                              |      | ±1          |      | Second            |
| Power supply voltage                              | 4.5  | 5           | 5.25 | V                 |
| Current consumption                               |      | 150         |      | mA                |
| Current consumption at battery backup time (NOTE) |      | 300         |      | μA                |
| Water and dust proof class                        | IP67 |             |      |                   |

#### NOTE


- 1 The current consumption at battery backup time is about three times larger than that of the  $\alpha i$  pulse coder. So, it is recommended to use four alkaline cells (size D).
- 2 Use a battery case (A06B-6050-K060) and four alkaline cells (A06B-6050-K061). Commercially available size D alkaline cells may be used.

## Dimensions

 $\alpha$ iCZ sensor 512AS

A860-2164-T411

- The sensor is a precision part. Use special care in handling. Particularly, do not apply external force to the sensor heads.
- Take dust protection measures to prevent foreign matter such as chips from being attached to the sensor.
- The waterproof class of the  $\alpha$ iCZ sensor is equivalent to IP67. However, if the sensor is continuously exposed to coolant, for example, the sensor can fail. Provide highest-level water protection to prevent the sensor from being exposed to coolant or the like.
- For easy maintenance, mount the sensor at a position where it can be replaced easily.
- Ensure that no vibration greater than 1 G is applied to the sensor circuit.
- Ground the sensor circuit. The bottom of the sensor circuit is not painted. So, the circuit can be grounded only by screwing.
- Fasten the cables to the machine near the sensor heads so that no load is applied directly to the sensor heads.
- All  $\alpha$ iCZ sensor cables are of movable type.

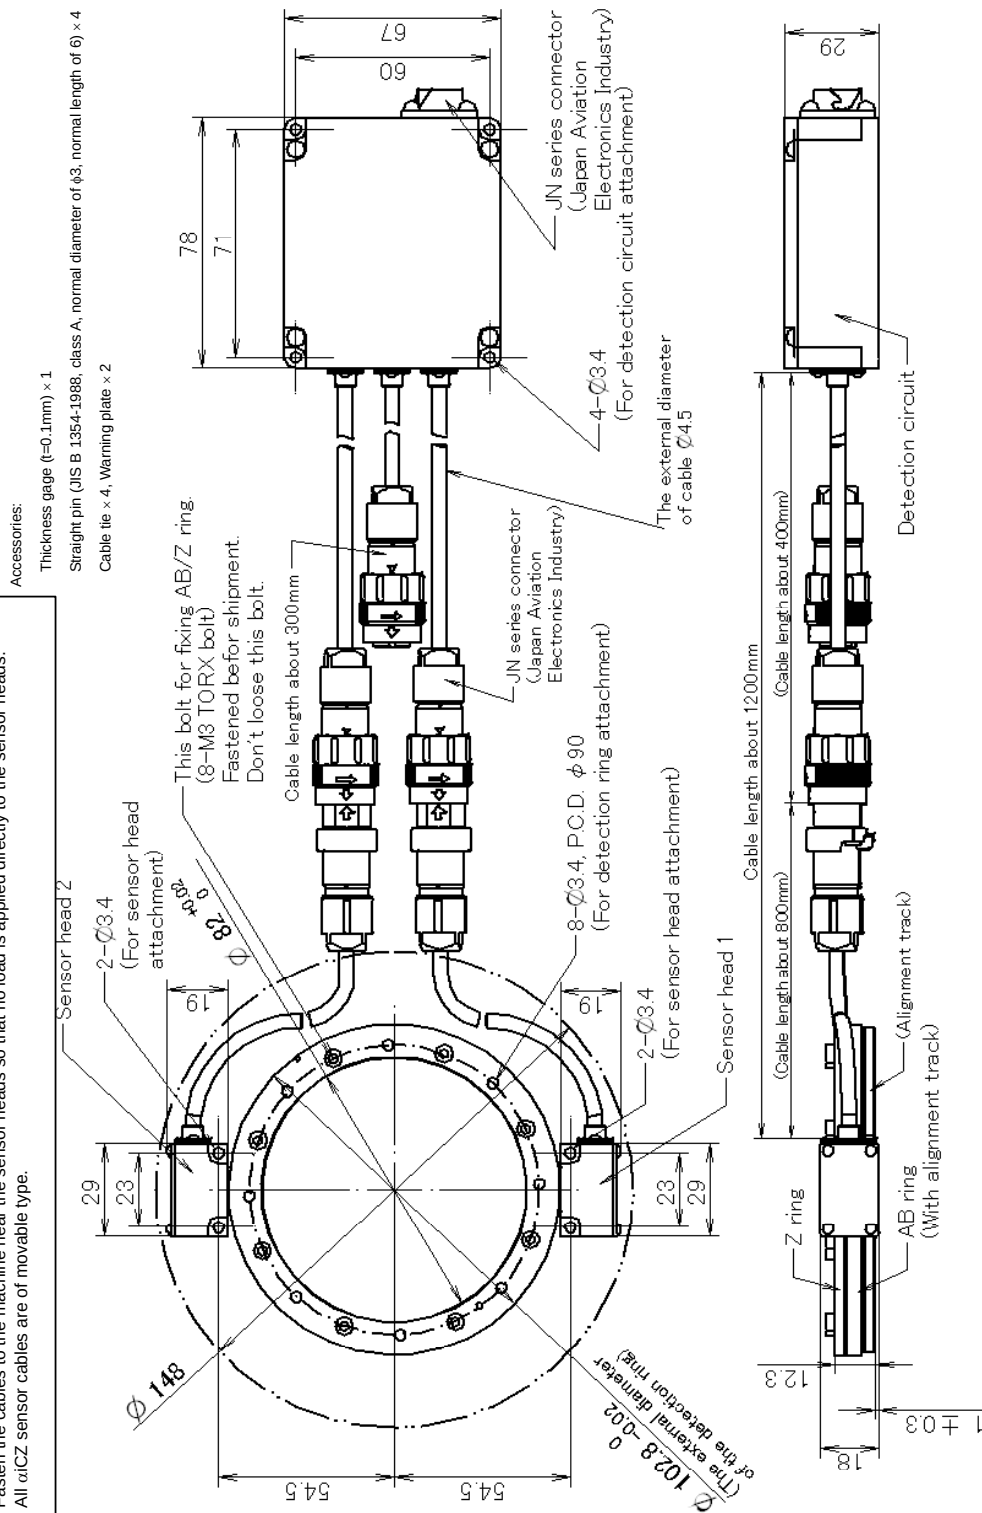

**$\alpha$ iCZ sensor 768AS****Speed, resolution, precision, and electrical specifications**

| Item                                              | Min. | Typ.        | Max. | Unit              |
|---------------------------------------------------|------|-------------|------|-------------------|
| Speed                                             |      |             | 800  | min <sup>-1</sup> |
| Resolution                                        |      | 1/3,600,000 |      | Revolution        |
| Precision                                         |      | ±3          |      | Second            |
| Repetition precision                              |      | ±1          |      | Second            |
| Power supply voltage                              | 4.5  | 5           | 5.25 | V                 |
| Current consumption                               |      | 150         |      | mA                |
| Current consumption at battery backup time (NOTE) |      | 300         |      | μA                |
| Water and dust proof class                        | IP67 |             |      |                   |

**NOTE**


- 1 The current consumption at battery backup time is about three times larger than that of the  $\alpha$ i pulse coder. So, it is recommended to use four alkaline cells (size D).
- 2 Use a battery case (A06B-6050-K060) and four alkaline cells (A06B-6050-K061). Commercially available size D alkaline cells may be used.

## Dimensions

# $\alpha$ iCZ sensor 768AS

**A860-2164-T511**

- The sensor is a precision part. Use special care in handling. Particularly, do not apply external force to the sensor heads.
- Take dust protection measures to prevent foreign matter such as chips from being attached to the sensor.
- The waterproof class of the  $\alpha$ ICZ sensor is equivalent to IP67. However, if the sensor is continuously exposed to coolant, for example, the sensor can fail. Provide highest-level water protection to prevent the sensor from being exposed to coolant or the like.
- For easy maintenance, mount the sensor at a position where it can be replaced easily.
- Ensure that no vibration greater than 1 G is applied to the sensor circuit.
- Ground the sensor circuit. The bottom of the sensor circuit is not painted. So, the circuit can be grounded only by screwing.
- Fasten the cables to the machine near the sensor heads so that no load is applied directly to the sensor heads.
- All  $\alpha$ ICZ sensor cables are of movable type.

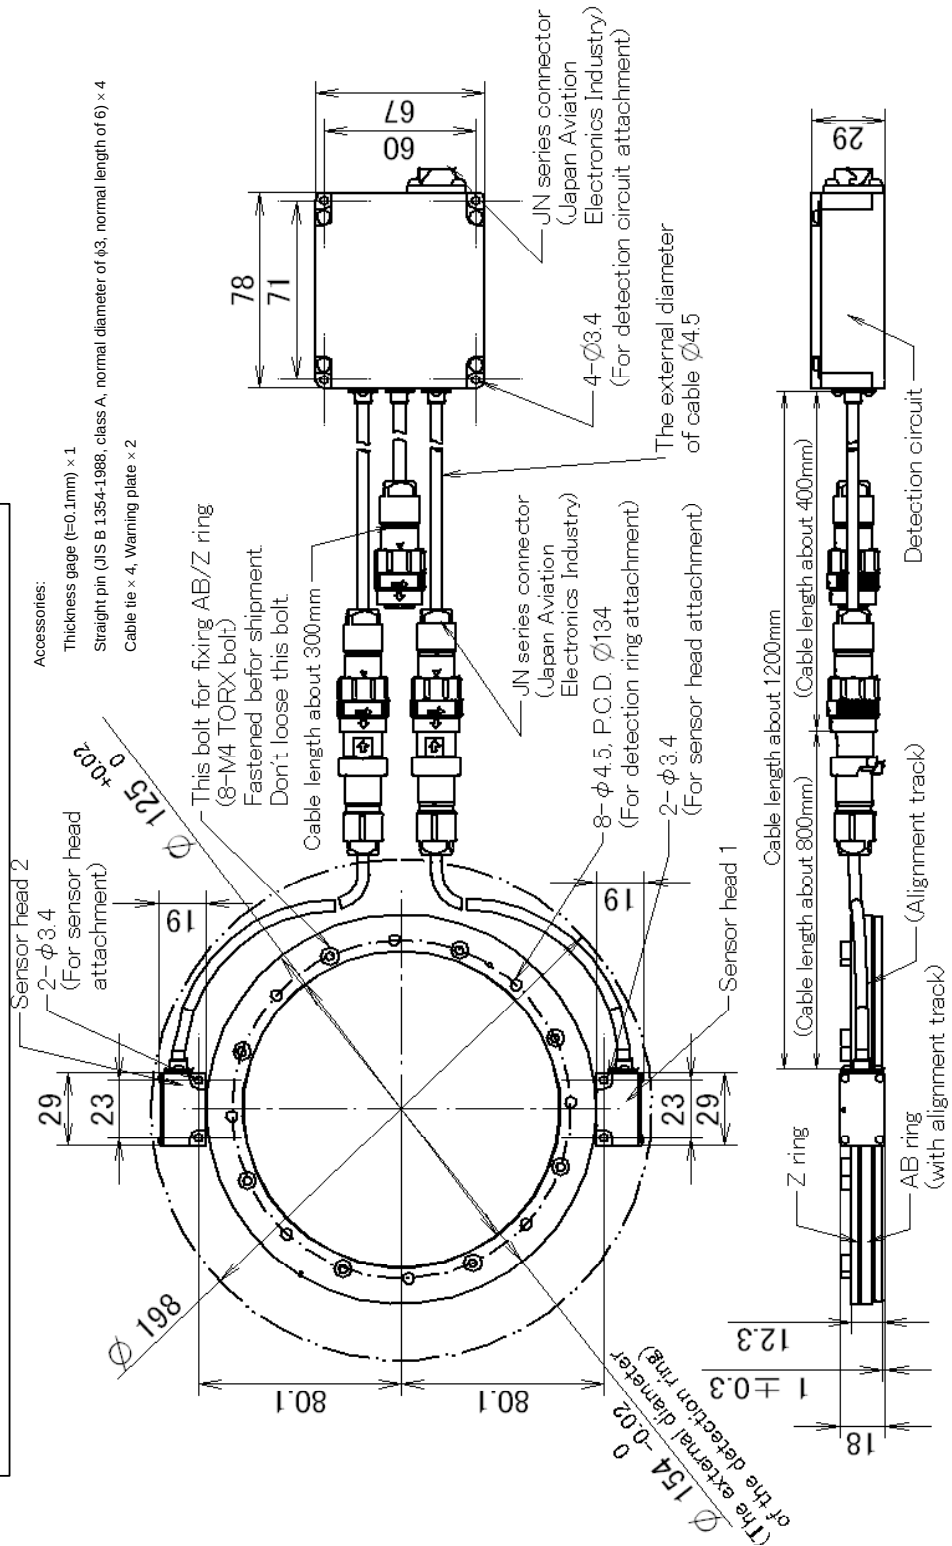



**$\alpha$ iCZ sensor 1024AS****Speed, resolution, precision, and electrical specifications**

| Item                                              | Min. | Typ.        | Max. | Unit              |
|---------------------------------------------------|------|-------------|------|-------------------|
| Speed                                             |      |             | 600  | min <sup>-1</sup> |
| Resolution                                        |      | 1/3,600,000 |      | Revolution        |
| Precision                                         |      | ±2          |      | Second            |
| Repetition precision                              |      | ±1          |      | Second            |
| Power supply voltage                              | 4.5  | 5           | 5.25 | V                 |
| Current consumption                               |      | 150         |      | mA                |
| Current consumption at battery backup time (NOTE) |      | 300         |      | μA                |
| Water and dust proof class                        |      |             |      |                   |

**NOTE**


- 1 The current consumption at battery backup time is about three times larger than that of the  $\alpha$ i pulse coder. So, it is recommended to use four alkaline cells (size D).
- 2 Use a battery case (A06B-6050-K060) and four alkaline cells (A06B-6050-K061). Commercially available size D alkaline cells may be used.

## Dimensions


### $\alpha$ iCZ sensor 1024AS

A860-2164-T611

- The sensor is a precision part. Use special care in handling. Particularly, do not apply external force to the sensor heads.
- Take dust protection measures to prevent foreign matter such as chips from being attached to the sensor.
- The waterproof class of the  $\alpha$ iCZ sensor is equivalent to IP67. However, if the sensor is continuously exposed to coolant, for example, the sensor can fail. Provide highest-level water protection to prevent the sensor from being exposed to coolant or the like.
- For easy maintenance, mount the sensor at a position where it can be replaced easily.
- Ensure that no vibration greater than 1 G is applied to the sensor circuit.
- Ground the sensor circuit. The bottom of the sensor circuit is not painted. So, the circuit can be grounded only by screwing.
- Fasten the cables to the machine near the sensor heads so that no load is applied directly to the sensor heads.
- All  $\alpha$ iCZ sensor cables are of movable type.

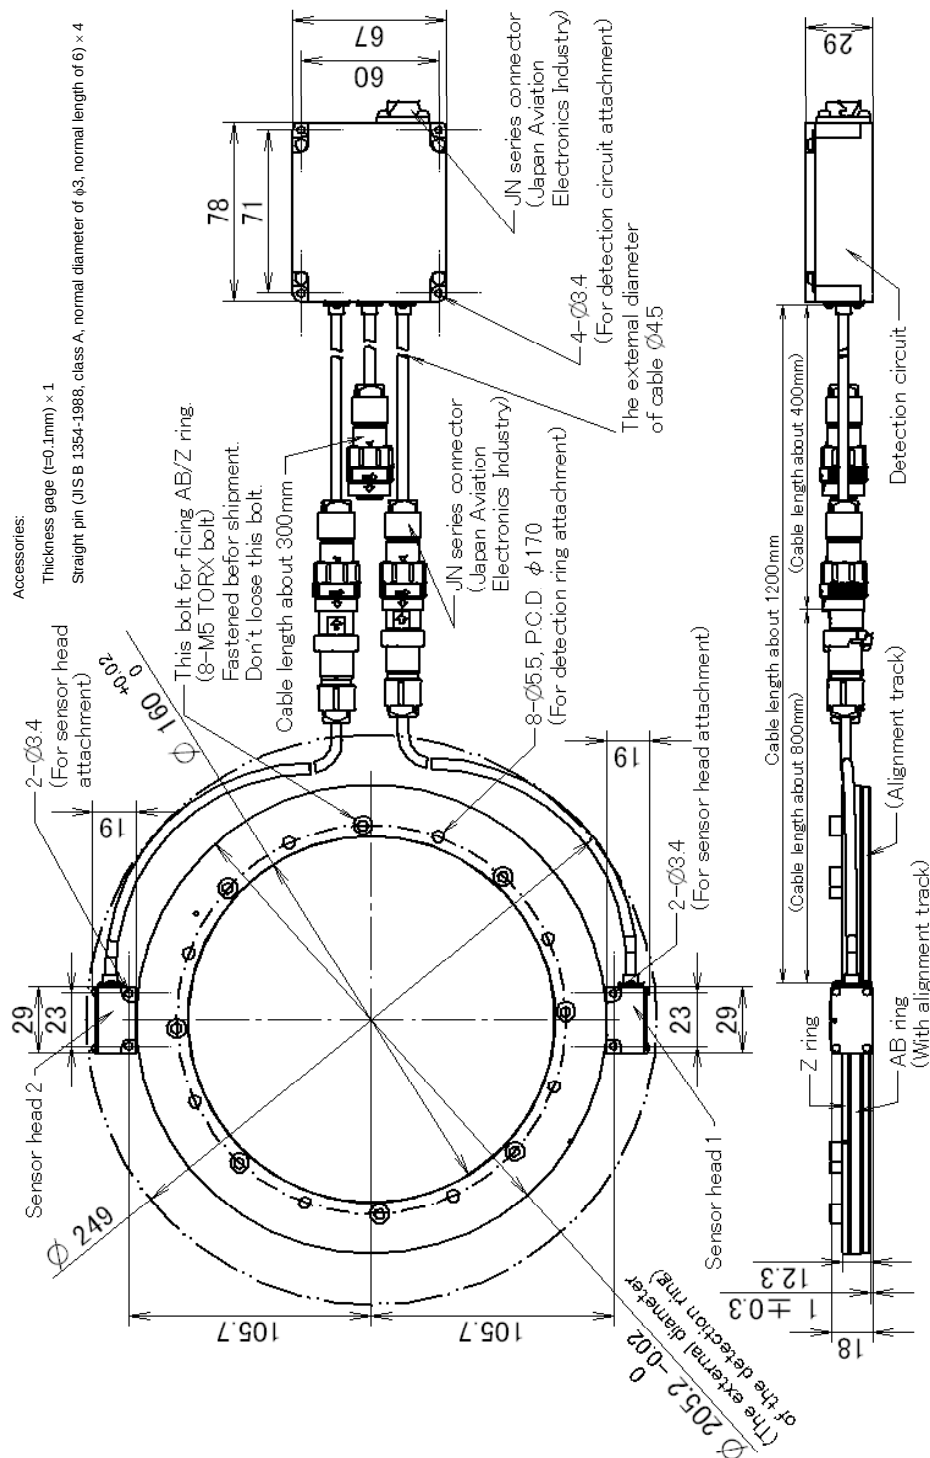

### 11.1.1.2 Connection block diagram (common to three models)

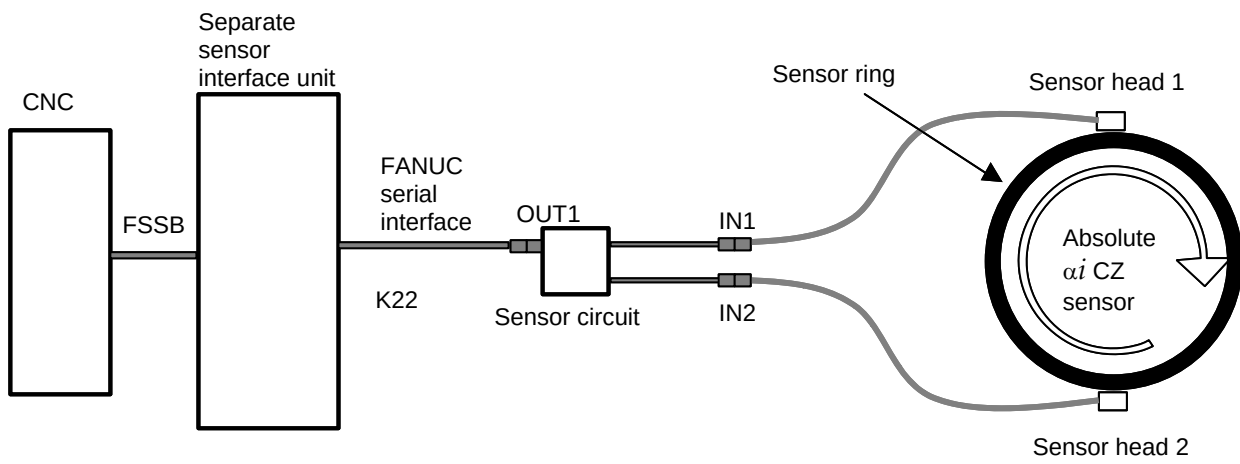

### 11.1.1.3 Connection specifications

#### Cable K22

See Subsection 9.3.2.

#### Method of extending the sensor cables

The sensor cables from the sensor heads to the sensor circuit can be extended up to 4 m as shown in Fig. 11.1.1.3.

The method of extending the sensor cables is described below.

#### Connection block diagram


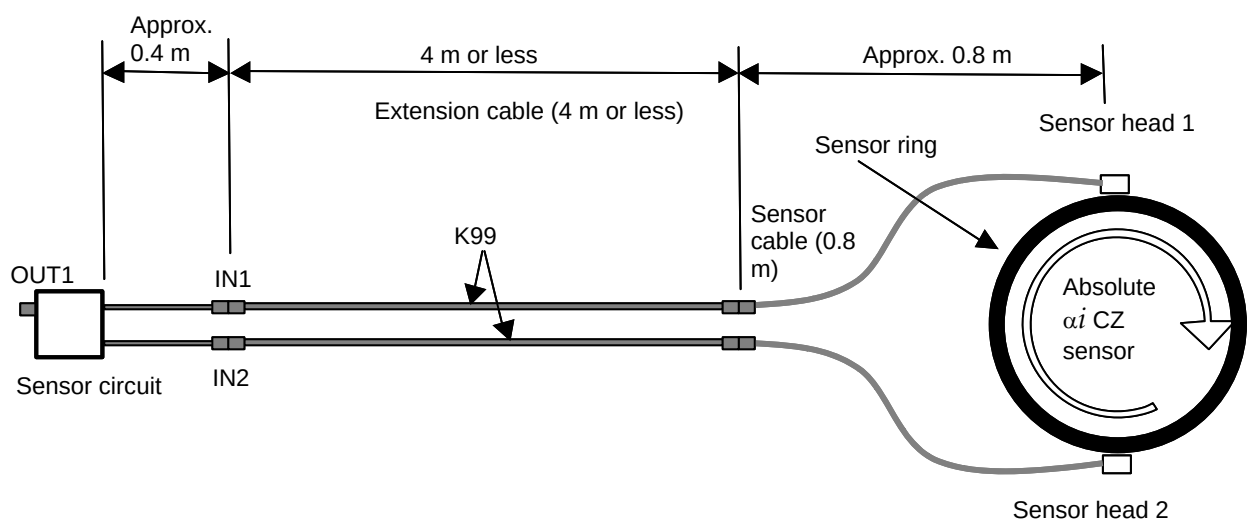


Fig. 11.1.1.3.

## Cable K99

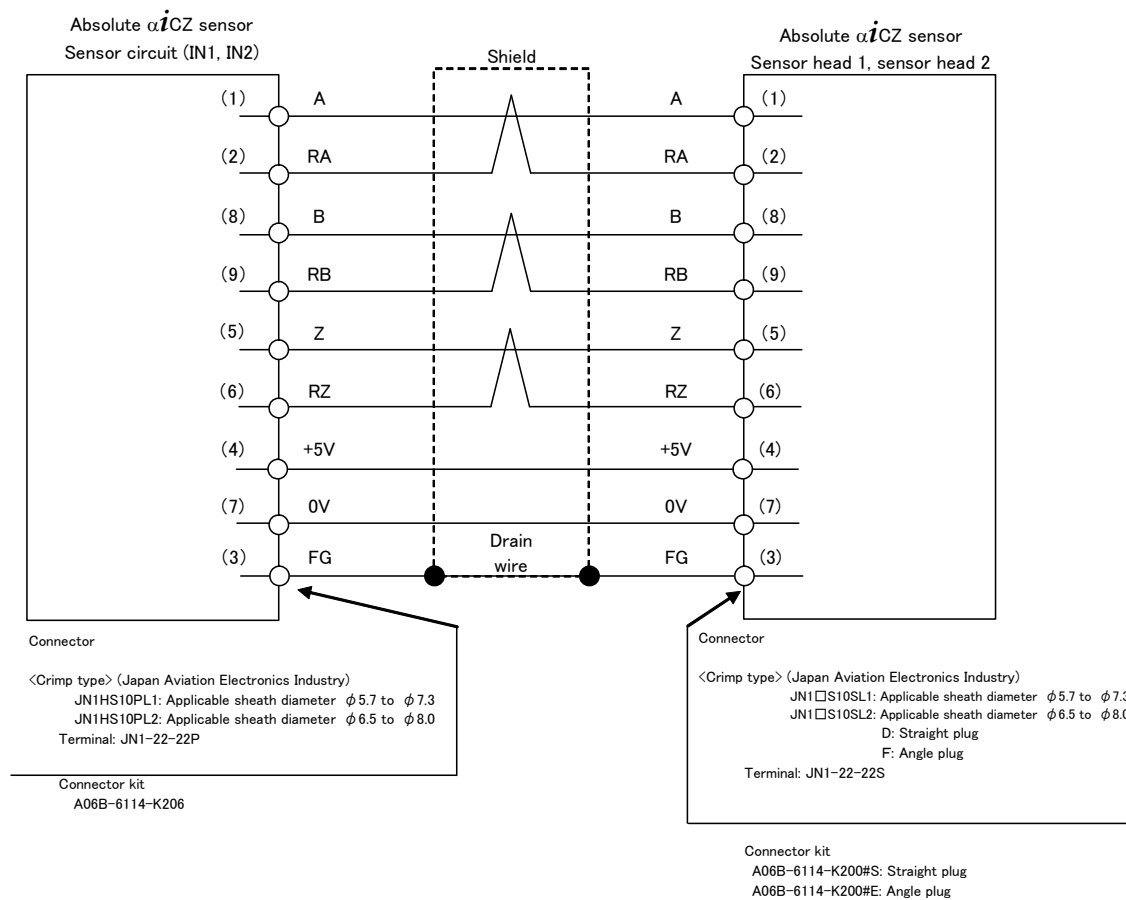

\* Z and RZ are not output from sensor head 2 but may be connected.


|                   |                     |                     |
|-------------------|---------------------|---------------------|
| Recommended wire  | 5V, 0V              | 0.5 mm <sup>2</sup> |
|                   | A, RA, B, RB, Z, RZ | 0.2 mm <sup>2</sup> |
| Recommended cable | A66L-0001-0482      |                     |

## NOTE

When using a cable not recommended, ensure that the sum of the resistance values of 0 V and 5 V does not exceed 2  $\Omega$ .


#### 11.1.1.4 Rotation direction of the absolute $\alpha iCZ$ sensor

When the sensor is viewed from the top as shown in the following figure, clockwise rotation of the sensor ring is referred to as forward rotation:

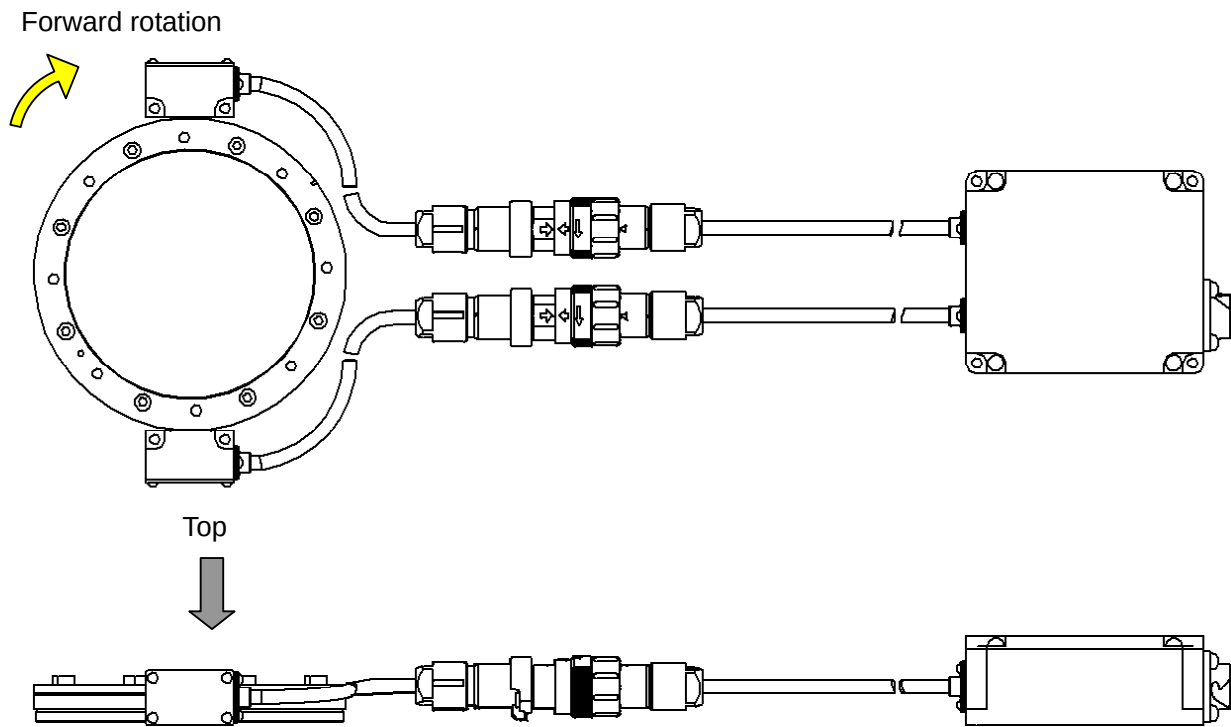

## Start-up procedure (outline)

The start-up procedure is shown below.

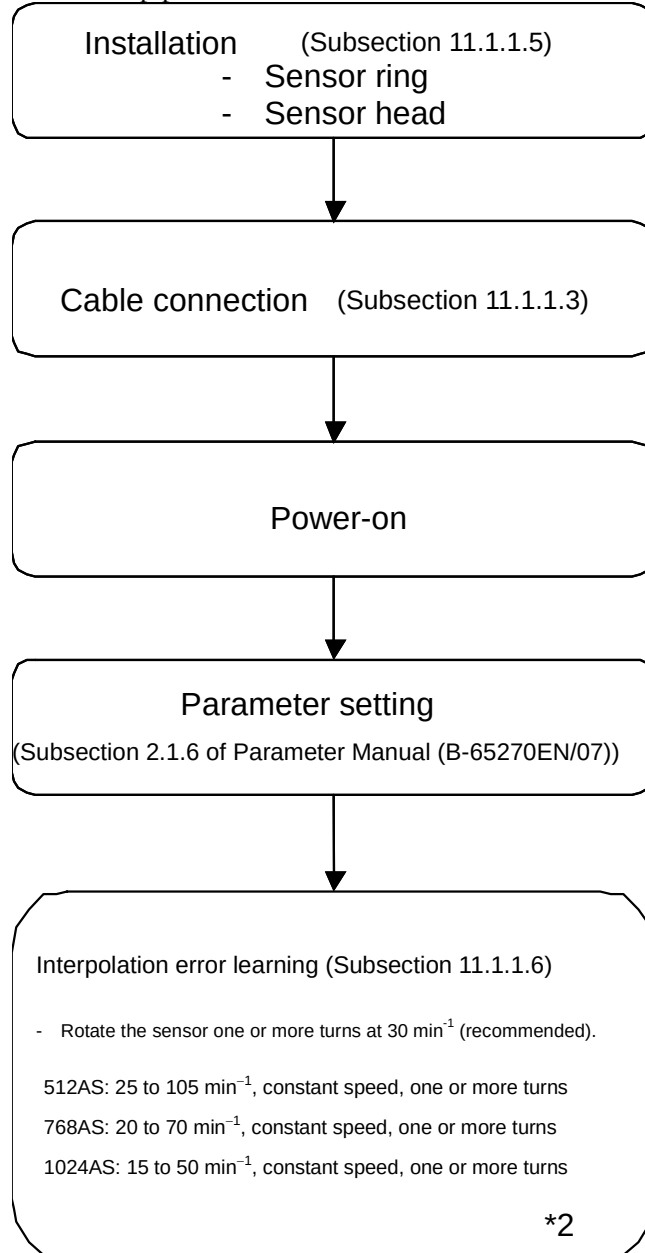

\*1 The method of checking output signals is described in Subsection 11.1.1.7.

\*1 If the fixed position of the sensor heads is changed after power-on, perform the operation described in Subsection 11.1.1.6.


\*2 If it is difficult to rotate the sensor at least one turn for interpolation error learning, repeat forward and reverse rotations under the above rotation conditions until the sum of angular displacements in one direction becomes one turn or more, according to Subsection 11.1.1.6.

### 11.1.1.5 Installation

#### Overview

Install the sensor according to the procedure below.

1. Machine the sensor mounting surface as necessary then insert the straight pins.
2. Mount the sensor ring onto the shaft (or sleeve) of the machine, center the sensor ring, then fasten the ring with screws.
3. Adjust the gap between the sensor heads and sensor ring then mount the sensor heads onto the machine.

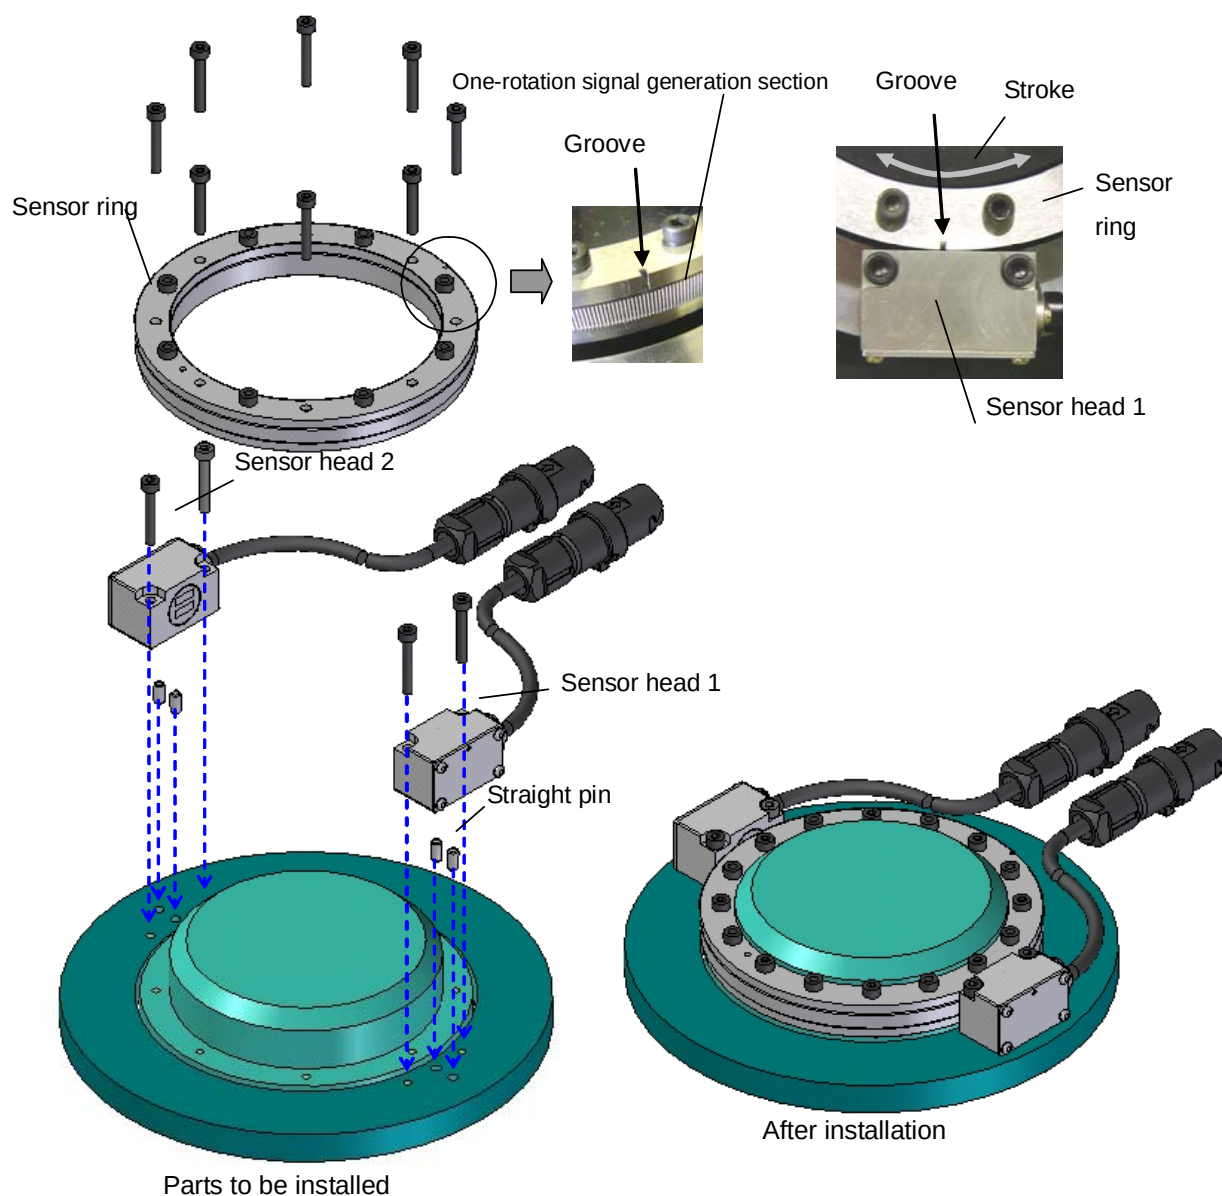


- \* Ensure that the groove of the one-rotation signal generation section of the sensor ring passes sensor head 1 within the stroke.



## Dimensions of the sensor head mounting plane

The dimensions of the sensor head mounting plane are indicated below. Insert straight pins (supplied as accessories) into the 2- $\phi 3H6$  holes. The straight pins are used as the guide for gap adjustment described later.

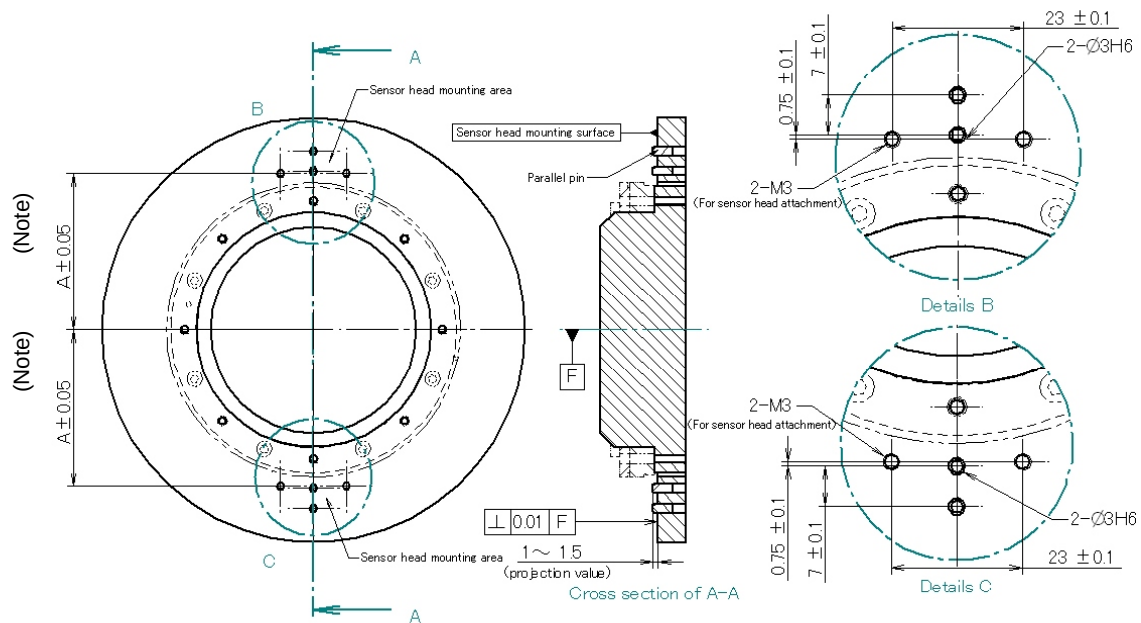


Dimension A

$$= (\text{Sensor ring outer diameter})/2 + 3.1$$

(NOTE) In designing, make sure that the positions of the taps for fastening the sensor heads after machine assembly, in stead of the part having the sensor head mounting plane, satisfy these dimensions.

## Installing the sensor ring

Center the sensor ring by using the centering track so that the runout to the rotation center is 0.01 mm or less. Moreover, in designing, ensure that in the direction along the shaft, the sensor ring mounting plane is  $1 \pm 0.3$  mm off the sensor head mounting plane. Ensure also that the perpendicularity of the sensor ring mounting plane is within 0.01 mm from the rotation center. Apply a thread locker or the like to the screws to prevent the screws from becoming loose.

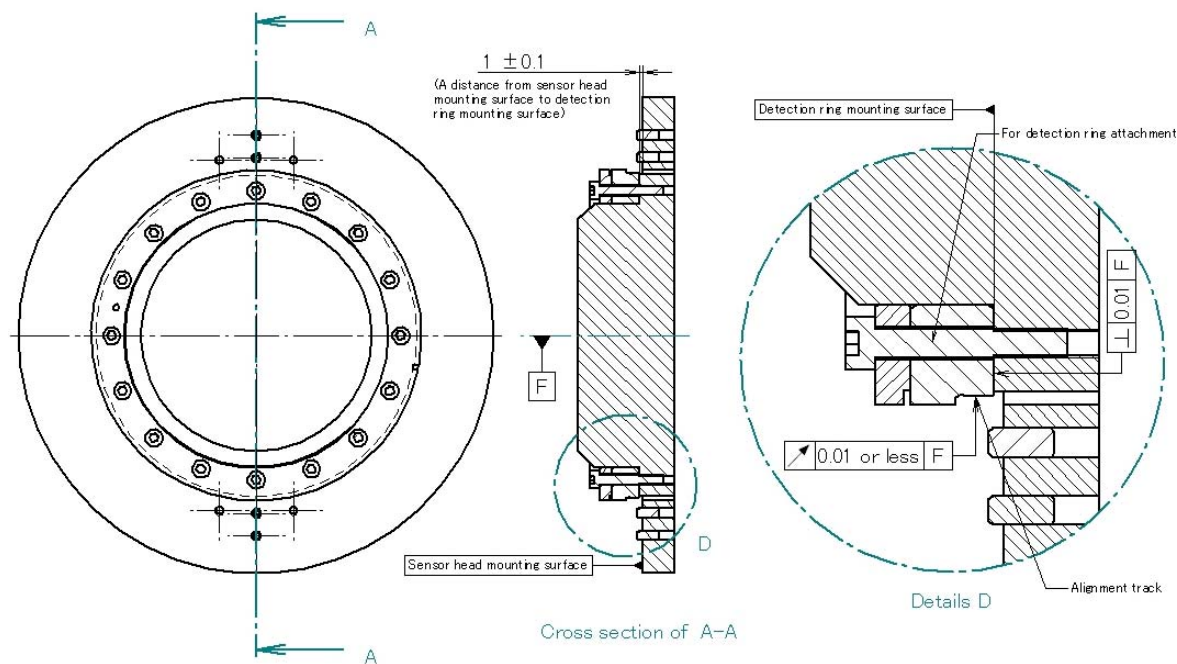

| Specification  | Outer diameter of centering track | Positions of sensor ring mounting holes                           | Mounting screw | Recommended tightening torque (Nm) |
|----------------|-----------------------------------|-------------------------------------------------------------------|----------------|------------------------------------|
| A860-2164-T411 | $\phi 101$                        | 8- $\phi 3.4$ through, equally spaced on $\phi 90$ circumference  | M3             | $1.5 \pm 5\%$                      |
| A860-2164-T511 | $\phi 152.2$                      | 8- $\phi 4.5$ through, equally spaced on $\phi 134$ circumference | M4             | $3.0 \pm 5\%$                      |
| A860-2164-T611 | $\phi 203.4$                      | 8- $\phi 5.5$ through, equally spaced on $\phi 170$ circumference | M5             | $6.0 \pm 5\%$                      |


**NOTE**

- 1 For centering, the outer diameter of the shaft (or sleeve) must be designed so that there is a gap of about 0.1 mm on one side between the outer surface of the shaft (or sleeve) and the inner surface of the sensor ring.
- 2 Secure the sensor ring on an end face with screws (avoid shrink fitting to mount the sensor ring).
- 3 The sensor ring consists of a phase Z ring and phase A/B ring, which are fastened together by using screws in advance. Never detach these screws. Spot facing is not provided. So, at the time of machine design, be careful not to cause interference with the screw heads.
- 4 Centering must be performed with the centering track (the outer surface of the phase Z ring and the teeth pitch circle are not coaxial). When performing centering, use a tool such as a plastic hammer not to damage the gear teeth.
- 5 Magnetic matter attached to gear teeth can lead to a detection error. After centering is completed, remove such foreign matter by air blowing.
- 6 If the sensor ring is tightened with excessive torque, deformation can occur in the sensor ring, resulting in deterioration in detection precision. Use the recommended tightening torque when mounting the sensor ring.


## Installing the sensor heads

Install the sensor heads according to the procedure below. (The same procedure is applicable to sensor head 1 and sensor head 2.)

1. Place the sensor head on the sensor mounting surface so that the straight pins are positioned in the slot of the sensor head, and fasten the sensor head temporarily. The magnet in the sensor head and the sensor ring attract each other. When mounting the sensor head, be careful not to hit the sensor head against the sensor ring.

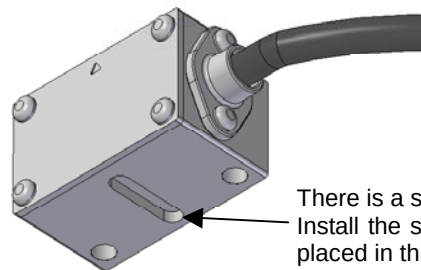

2. Insert the thickness gage (supplied as an accessory,  $t = 0.1 \text{ mm}$ ) between the sensor ring and the sensor head, and while lightly pressing the sensor head against the thickness gage, tighten the screws (recommended tightening torque:  $1.3 \text{ Nm} \pm 10\%$ ). Apply a thread locker or the like to the screws to prevent them from becoming loose.

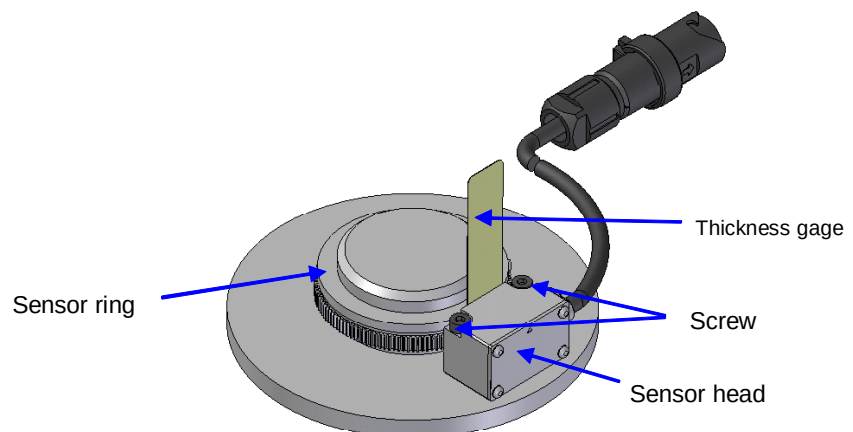

3. Pull out the thickness gage, and slowly turn the sensor ring to ensure that the sensor ring and the sensor head do not touch each other.

### 11.1.1.6 Notes on use

---

#### Interpolation error learning

- The absolute  $\alpha iCZ$  sensor includes an automatic interpolation correction circuit that automatically learns interpolation errors and corrects them. When learning conditions are satisfied, learning is performed automatically. When the sensor rotates one or more turns, learning is completed. The learning conditions vary depending on the model. For any model, however, learning at  $30 \text{ min}^{-1}$  is recommended.

##### Learning conditions

- $\alpha iCZ$  sensor 512AS : 25 to  $105 \text{ min}^{-1}$ , constant speed, one or more turns
- $\alpha iCZ$  sensor 768AS : 20 to  $70 \text{ min}^{-1}$ , constant speed, one or more turns
- $\alpha iCZ$  sensor 1024AS : 15 to  $50 \text{ min}^{-1}$ , constant speed, one or more turns

##### Recommended learning conditions

Common to three models:  $30 \text{ min}^{-1}$ , constant speed, one or more turns

- If the absolute  $\alpha iCZ$  sensor is operated for the first time after being mounted or the procedure applicable when the sensor head is moved after conduction is performed, interpolation error learning is performed. So, rotate the sensor under the conditions above.
- Learned data is backed up by the battery.
- If it is difficult to rotate the sensor at least one turn, repeat forward and reverse rotations under the above rotation conditions to achieve at least one turn in total.
- Learning is performed when the learning conditions are satisfied.


#### Sensor head

- The sensor circuit memorizes the initial conduction state. So, do not move the sensor head afterward.
- If the sensor head is moved after the initial conduction state, the reference position may be displaced. Moreover, a pulse error alarm may be issued. Issue the battery zero alarm and perform reference position return operation according to "Procedure applicable when the sensor head is moved after conduction" below.


## Procedure applicable when the sensor head is moved after conduction

Each of the sensor heads, sensor ring, and sensor circuit can be replaced individually. After replacement, issue the battery zero alarm according to the procedure below. Then, perform reference position return operation.


1. Detach cable K1 from connector OUT1.

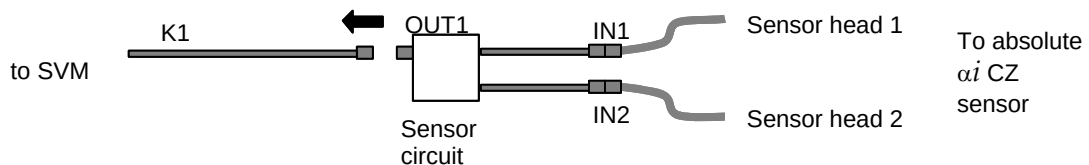


2. Connect connector IN2 to connector OUT1.  
(Connector IN1 and connector IN3 may remain connected.)

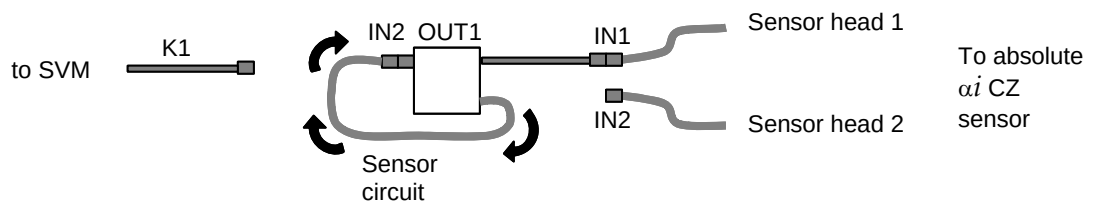


3. Leave the connection for 10 seconds.

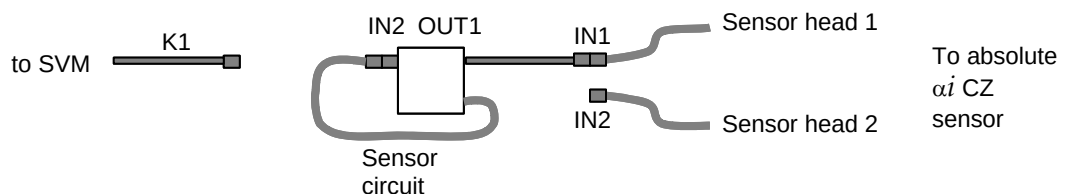

4. Connect the cables other than cable K1 correctly.

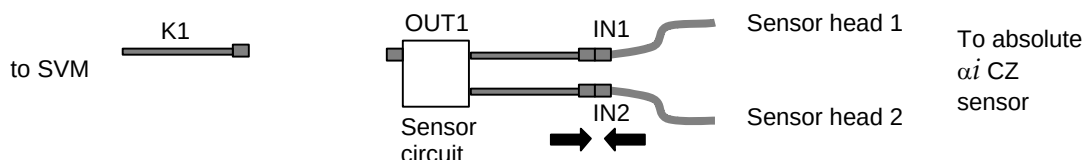


5. Connect cable K1.

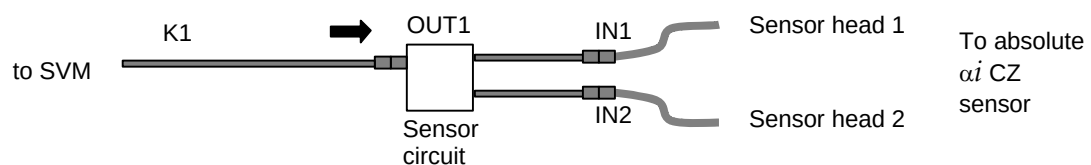

6. Check that the battery zero alarm is issued. If the battery zero alarm is not issued, return to step 1.
7. Perform reference position return operation.

Maintenance target parts

As shown below, the absolute  $\alpha iCZ$  sensor consists of four parts: sensor ring (phase A/B ring and phase Z ring coupled by screws), sensor head 1, sensor head 2, and sensor circuit. Each single part can be maintained separately. So, place an order on each part as needed according to the specification numbers indicated below.

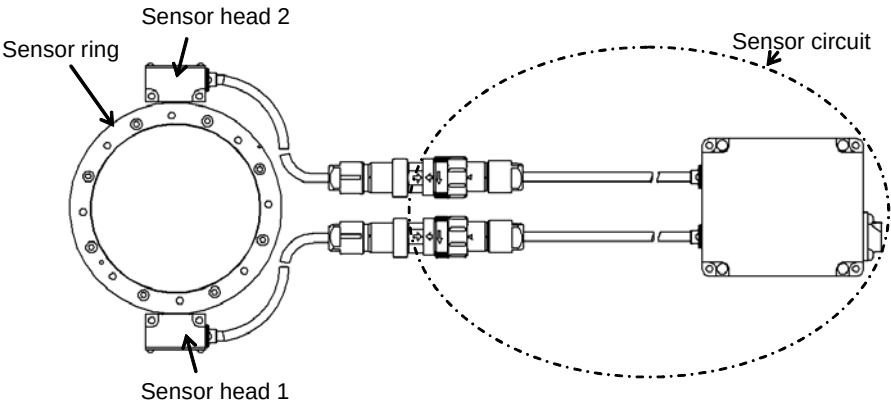


| Parent specification<br>Part specification | $\alpha iCZ$ sensor 512AS<br>A860-2164-T411   | $\alpha iCZ$ sensor 768AS<br>A860-2164-T511 | $\alpha iCZ$ sensor 1024AS<br>A860-2164-T611 |
|--------------------------------------------|-----------------------------------------------|---------------------------------------------|----------------------------------------------|
| Sensor ring                                | A860-2160-V901                                | A860-2160-V902                              | A860-2160-V903                               |
| Sensor head 1                              | A860-2162-V001 (common to all specifications) |                                             |                                              |
| Sensor head 2                              | A860-2162-V012 (common to all specifications) |                                             |                                              |
| Sensor circuit                             | A860-2164-V201 (common to all specifications) |                                             |                                              |

# 11.1.1.7 Output signal check method

\* The description below is applicable to both of A860-2161-T\*\*\* and A860-2163-T\*\*\*.

When checking the signal waveform directly, see the illustration below.

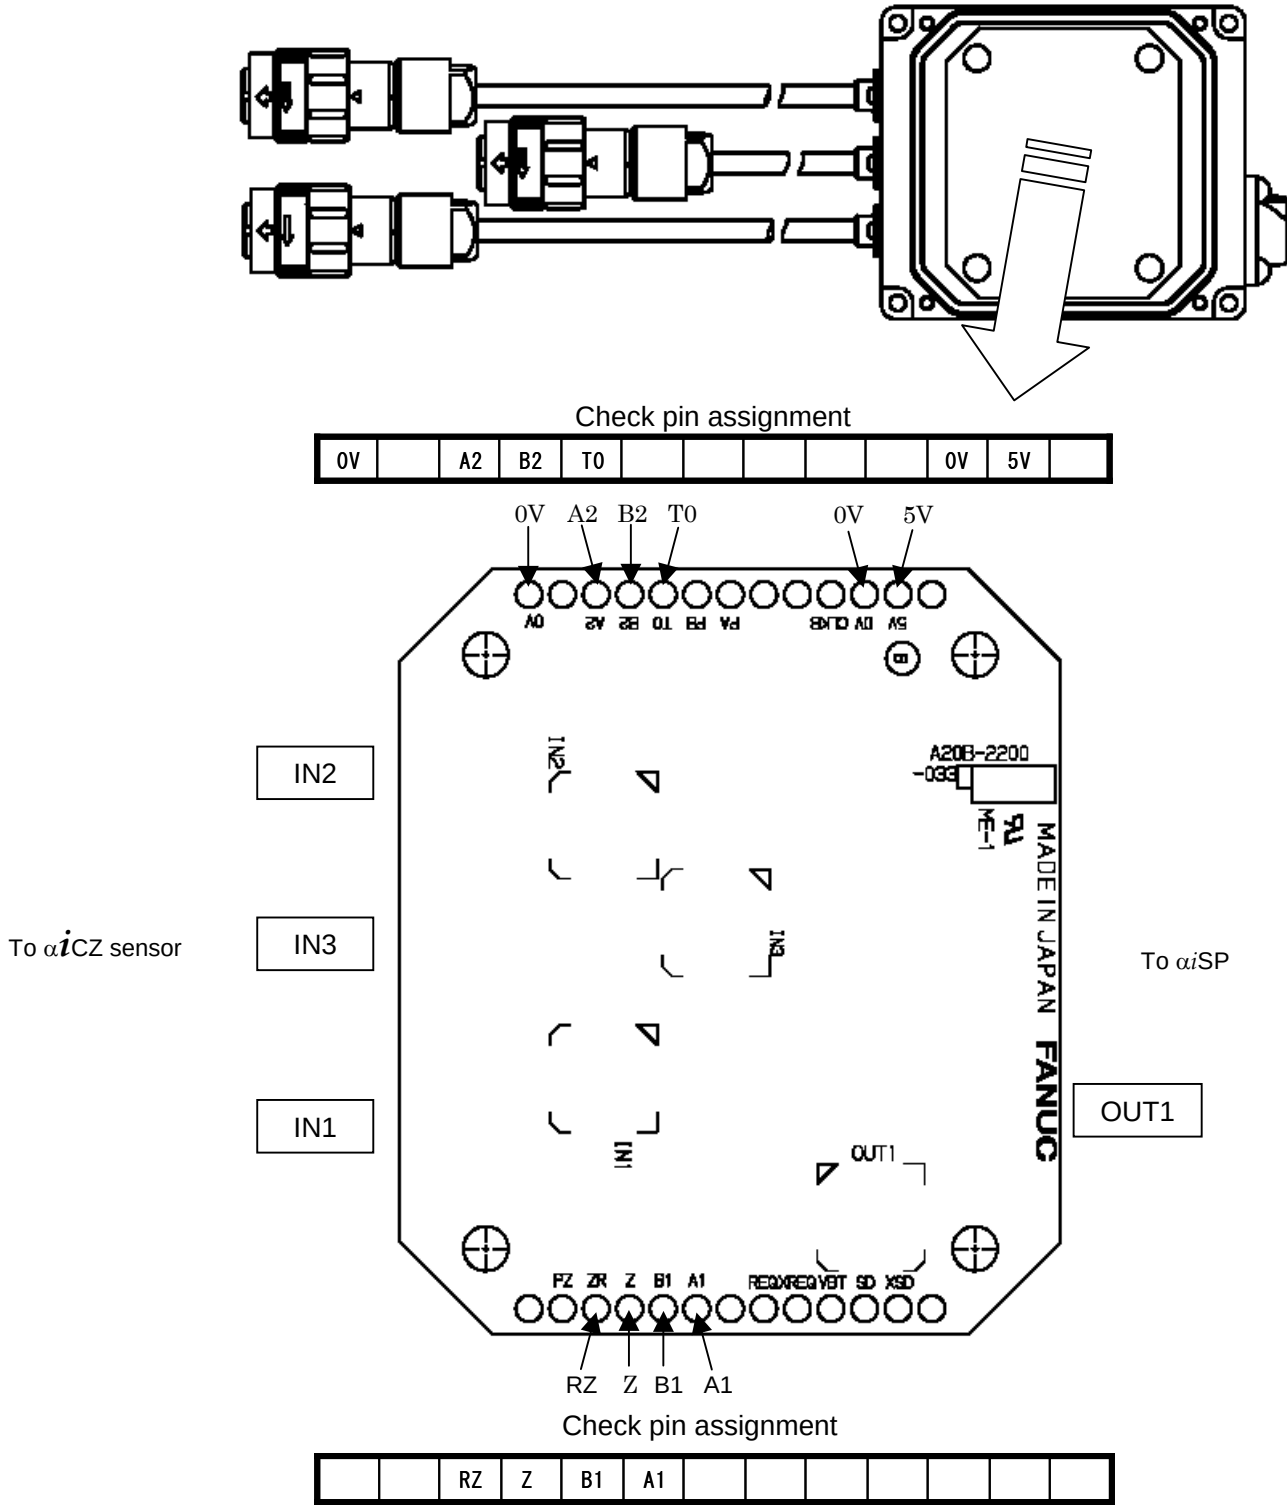





- Supply power to the 0 V and 5 V pins.
- The Lissajous figure of the phase A/B output signal is a complete circle.

Phase A/B and phase Z signal waveforms (measured on the sensor circuit check pins at room temperature and  $500 \text{ min}^{-1}$ )

| Signal name                                 | Check pin | Output amplitude     | Offset                                                                                       |
|---------------------------------------------|-----------|----------------------|----------------------------------------------------------------------------------------------|
| Sensor head 1 phase A (after amplification) | A1        | 1,300 to 3,000 mVp-p | $\pm 180 \text{ mV}$                                                                         |
| Sensor head 1 phase B (after amplification) | B1        |                      |                                                                                              |
| Sensor head 2 phase A (after amplification) | A2        | 1,300 to 3,000 mVp-p | $\pm 180 \text{ mV}$                                                                         |
| Sensor head 2 phase B (after amplification) | B2        |                      |                                                                                              |
| Sensor head 1 phase Z                       | Z         | 400 to 600 mVp-p     | 70 to 150 mV<br>Measure the DC components of Z and RZ and use the differential as an offset. |
| Sensor head 1 RZ                            | RZ        |                      |                                                                                              |

(Measure each signal by connecting the ground of the oscilloscope to T0.)

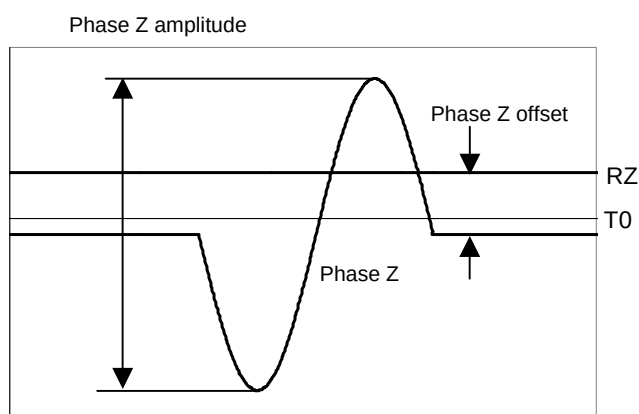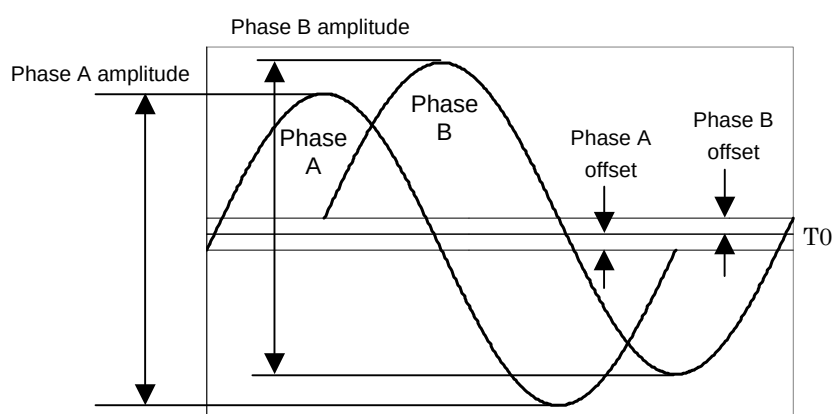

The check pins used with the  $\alpha 1 \text{CZ}$  sensor fit in the following housing and crimp terminals:

Housing : HKP-13FS01 (Honda Tsushin Kogyo)

Crimp terminal: HKP-F113 (Honda Tsushin Kogyo), AWG#24 to 28 ( $\phi 1.0$  to  $1.5 \text{ mm}$ )

HKP-F213 (Honda Tsushin Kogyo), AWG#28 to 32 ( $\phi 0.5$  to  $0.8 \text{ mm}$ )

Crimping tool : KP309D (Honda Tsushin Kogyo)

## 11.2 SENSOR FOR THE SPINDLE

### 11.2.1 Position Coder

#### 11.2.1.1 $\alpha i$ position coder

##### Name and specification number

| Name                      | Specification number | Remarks                                           |
|---------------------------|----------------------|---------------------------------------------------|
| $\alpha i$ position coder | A860-2109-T302       | □ 68 flange mounting,<br>10,000 min <sup>-1</sup> |

##### Absolute maximum ratings

| Item                        | Specification    |
|-----------------------------|------------------|
| Power supply voltage        | -0.5 V to +7.0 V |
| Operating temperature range | 0°C to +50°C     |
| Humidity                    | 95%RH or less    |


##### Electrical specifications

| Item                 | Specification         |
|----------------------|-----------------------|
| Power supply voltage | 5 V $\pm$ 5%          |
| Current consumption  | 350 mA or less        |
| Output signal        | PAE, *PAE, PBE, *PBE  |
|                      | PSE, *PSE             |
|                      | 1,024 pulses/rotation |
|                      | 1 pulse/rotation      |

##### Mechanical specifications

| Item                             | Specification                                                                |
|----------------------------------|------------------------------------------------------------------------------|
| Input axis inertia               | $9.8 \times 10^{-3}$ kg·m <sup>2</sup> or less                               |
| Input axis start torque          | 0.098 N·m or less                                                            |
| Allowable input axis load        | Radial load (operating)                                                      |
|                                  | Thrust load (operating)                                                      |
|                                  | 98N                                                                          |
|                                  | 49N                                                                          |
| Maximum speed                    | 10,000 min <sup>-1</sup>                                                     |
| Structure                        | Water and dust proof (equivalent to IP55 when waterproof connector is mated) |
| Tolerable vibration acceleration | 10G                                                                          |
| Weight                           | Approx. 0.75 kg                                                              |


Signal phase relationships (timing chart)

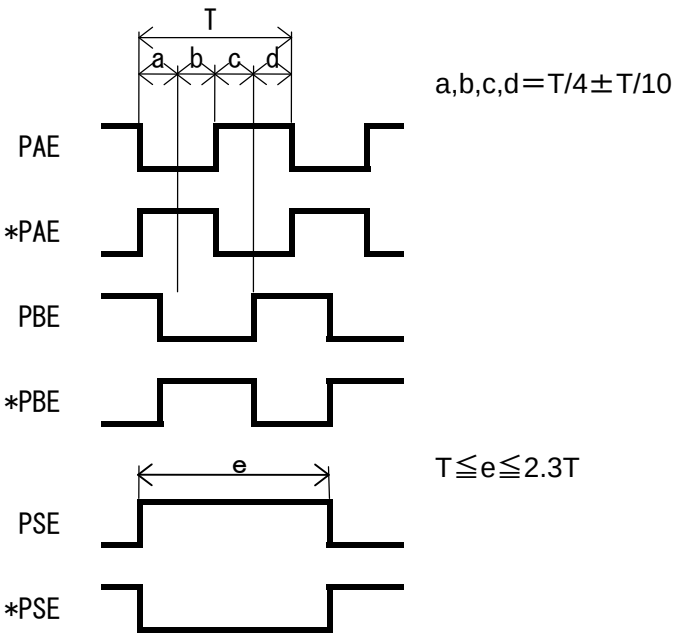

Output pin arrangement

| A   | B   | C   | D    | E    | F    | G | H   | J |
|-----|-----|-----|------|------|------|---|-----|---|
| PAE | PSE | PBE |      |      |      |   | +5V |   |
| K   | L   | M   | N    | P    | R    | S | T   |   |
| 0V  |     |     | *PAE | *PSE | *PBE |   |     |   |

## Dimensions

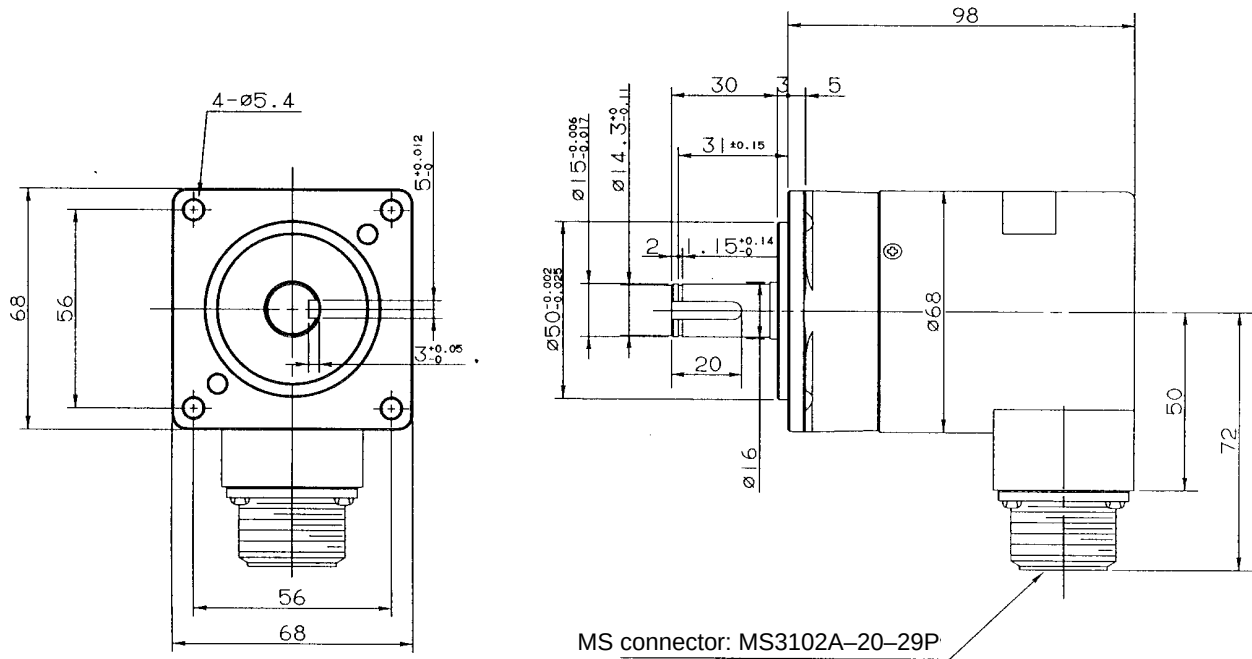

### 11.2.1.2 $\alpha$ position coder S

#### Name and specification number

| Name                      | Specification number | Remarks                                                                  |
|---------------------------|----------------------|--------------------------------------------------------------------------|
| $\alpha$ position coder S | A860-0309-T352       | <input type="checkbox"/> 68 flange mounting,<br>10,000 min <sup>-1</sup> |

#### Absolute maximum ratings

| Item                        | Specification    |
|-----------------------------|------------------|
| Power supply voltage        | -0.5 V to +7.0 V |
| Operating temperature range | 0°C to +50°C     |
| Humidity                    | 95%RH or less    |


#### Electrical specifications

| Item                 |           | Specification             |
|----------------------|-----------|---------------------------|
| Power supply voltage |           | 5 V $\pm$ 5%              |
| Current consumption  |           | 350 mA or less            |
| Output signal        | AP, BP    | 1,024 $\lambda$ /rotation |
|                      | PSE, *PSE | 1 pulse/rotation          |

#### Mechanical specifications

| Item                             | Specification                                                                |     |
|----------------------------------|------------------------------------------------------------------------------|-----|
| Input axis inertia               | 9.8×10 <sup>-3</sup> kg·m <sup>2</sup> or less                               |     |
| Input axis start torque          | 0.098 N·m or less                                                            |     |
| Allowable input axis load        | Radial load (operating)                                                      | 98N |
|                                  | Thrust load (operating)                                                      | 49N |
| Maximum speed                    | 10,000 min <sup>-1</sup>                                                     |     |
| Structure                        | Water and dust proof (equivalent to IP55 when waterproof connector is mated) |     |
| Tolerable vibration acceleration | 10G                                                                          |     |
| Weight                           | Approx. 0.75 kg                                                              |     |


Signal phase relationships (timing chart)

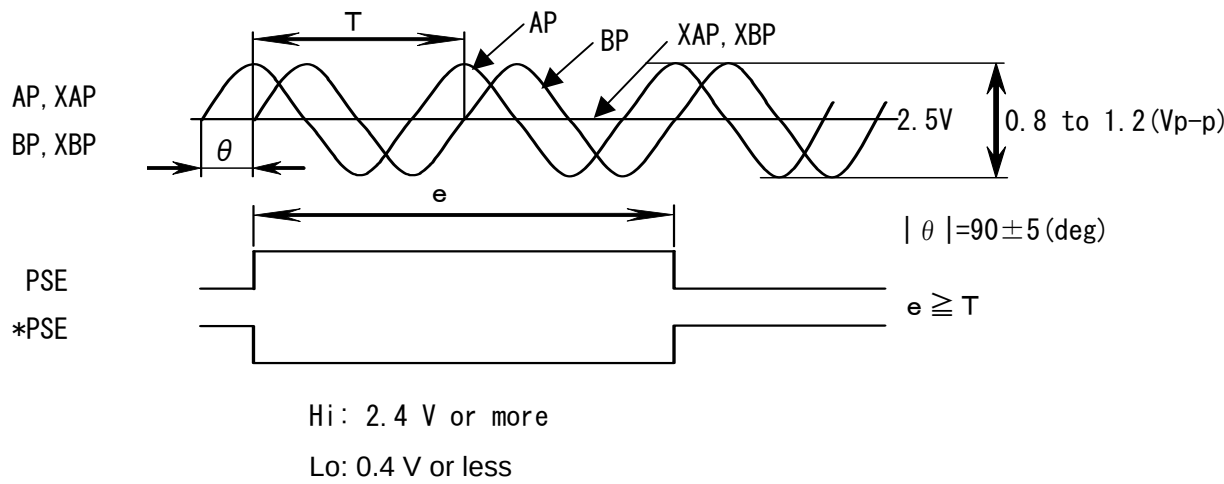

Output pin arrangement

| A  | B   | C  | D   | E    | F   | G | H   | J |
|----|-----|----|-----|------|-----|---|-----|---|
| AP | PSE | BP |     |      |     |   | +5V |   |
| K  | L   | M  | N   | P    | R   | S | T   |   |
| 0V |     |    | XAP | *PSE | XBP |   |     |   |

Dimensions

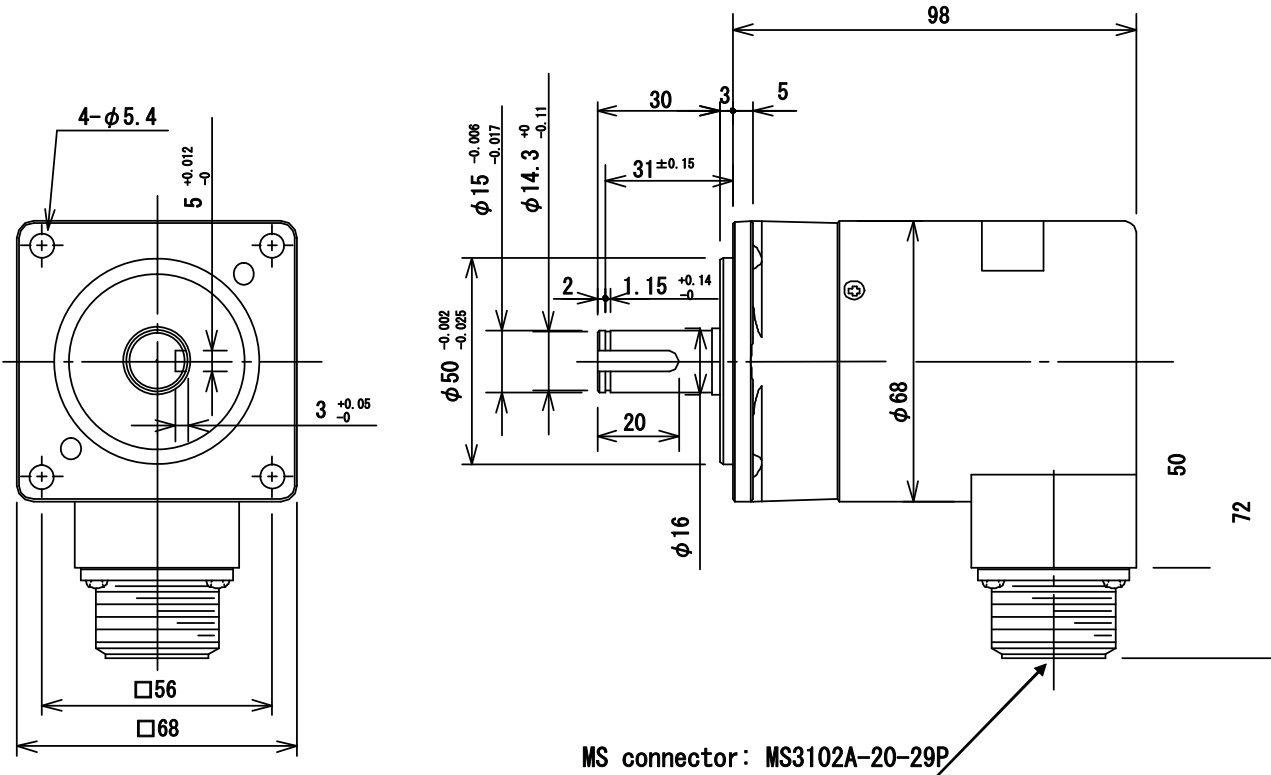


### 11.2.1.3 Installation conditions and notes

(a) Method of connection

Two methods of connecting the  $\alpha i$  position coder or  $\alpha$  position coder S to the spindle are available as described below.

- (1) With one method, the position coder is connected to the rear part of the spindle by using a flexible joint  
In this case, the rotation of the spindle is transported accurately to the position coder, resulting in a higher accuracy in position coder positioning. However, the position coder installation location is limited, so that the mechanical section may need to be modified.
- (2) With the other method, a shaft for holding a pulley is fitted into the shaft of the position coder and is held by two bearings as shown below. In this case, a timing belt is used to connect the pulley of the position coder to the pulley attached to the spindle.

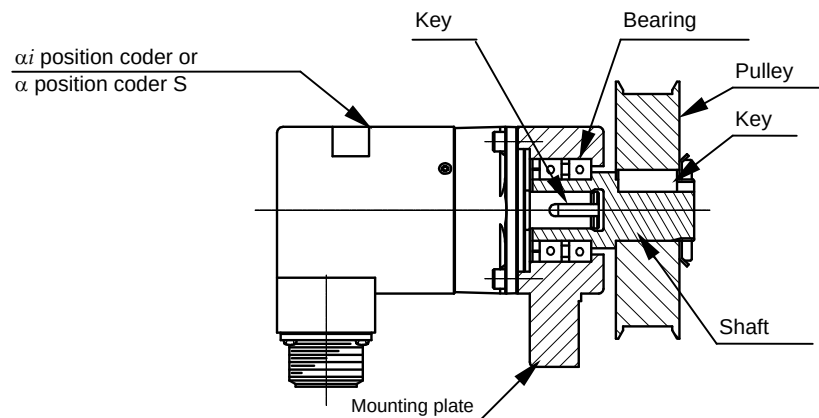

This connection method is generally used to connect a conventional position coder to the spindle. When using this method, note the following:

- <1> If there is a clearance between the shaft for holding the pulley and the shaft of the position coder, the shaft of the position coder can suffer from fretting or the key can become loose, resulting in a degraded accuracy in position coder positioning. So, specify tolerances for good fitting so that there is no clearance between the shaft of the position coder and the shaft for holding the pulley and between the key and key groove.



<2> If the outer diameter center of the pulley of the position coder is not aligned with the axis center of the shaft of the position coder, or if the outer diameter center of the pulley fitted around the spindle is not aligned with the axis center of the spindle, the spindle positioning accuracy is degraded in proportion to the magnitude of eccentricity. So, minimize these eccentricities.

(b) Shock

The position coder is a precision sensor. So, be careful not to apply a shock to the shaft.

(c) Atmosphere

The protection of the position coder satisfies class IP55, but the protection is provided on a short-time basis only. So, ensure that the position coder is not routinely exposed to coolant and lubricant and is free from buildup of oil. If the position coder is exposed to coolant and lubricant, install a protection cover.

## 11.2.2 $\alpha$ iBZ Sensor (A860-2150-T\*\*\* and A860-2155-T\*\*\*)

Two types of  $\alpha$ iBZ sensors are available:  $\alpha$ iBZ sensors of the conventional dimensions (A860-2120-T\*\*\*) and compact-size  $\alpha$ iBZ sensors (A860-2150-T\*\*\* and A860-2155-T\*\*\*). The  $\alpha$ iBZ sensors of the conventional dimensions and compact-size  $\alpha$ iBZ sensors are not compatible with each other from the viewpoint of installation. If the number of sensor ring teeth of an  $\alpha$ iBZ sensor of the conventional dimensions is the same as that of a compact-size  $\alpha$ iBZ sensor, the sensor rings of the sensors have the same inner and outer diameters. The  $\alpha$ iBZ sensors of the conventional dimensions and compact-size  $\alpha$ iBZ sensors have the same output signal specifications. So, when a sensor of one type is replaced with a sensor of the other type, no parameter modification is needed.

### Names and specification numbers

| Name                     | Specification number               |                                        | Remarks         |                         |                |                |
|--------------------------|------------------------------------|----------------------------------------|-----------------|-------------------------|----------------|----------------|
|                          | Waterproof connector specification | Non-waterproof connector specification | Number of teeth | Maximum speed           | Sensor ring    |                |
|                          |                                    |                                        |                 |                         | Inner diameter | Outer diameter |
| $\alpha$ iBZ sensor 128  | A860-2150-T201                     | A860-2155-T201                         | 128             | 20,000min <sup>-1</sup> | $\phi$ 40      | $\phi$ 52      |
| $\alpha$ iBZ sensor 128H | A860-2150-T211                     | A860-2155-T211                         |                 | 70,000min <sup>-1</sup> |                |                |
| $\alpha$ iBZ sensor 192  | A860-2150-T301                     | A860-2155-T301                         | 192             | 20,000min <sup>-1</sup> | $\phi$ 60      | $\phi$ 77.6    |
| $\alpha$ iBZ sensor 192H | A860-2150-T311                     | A860-2155-T311                         |                 | 40,000min <sup>-1</sup> |                |                |
| $\alpha$ iBZ sensor 256  | A860-2150-T401                     | A860-2155-T401                         | 256             | 15,000min <sup>-1</sup> | $\phi$ 82      | $\phi$ 103.2   |
| $\alpha$ iBZ sensor 256S | A860-2150-T404                     | A860-2155-T404                         |                 |                         | $\phi$ 88      |                |
| $\alpha$ iBZ sensor 256H | A860-2150-T411                     | A860-2155-T411                         |                 | 30,000min <sup>-1</sup> | $\phi$ 82      |                |
| $\alpha$ iBZ sensor 384  | A860-2150-T511                     | A860-2155-T511                         | 384             | 15,000min <sup>-1</sup> | $\phi$ 125     | $\phi$ 154.4   |
| $\alpha$ iBZ sensor 512  | A860-2150-T611                     | A860-2155-T611                         | 512             | 10,000min <sup>-1</sup> | $\phi$ 160     | $\phi$ 205.6   |

### Absolute maximum ratings

| Item                        | Specification    |
|-----------------------------|------------------|
| Power supply voltage        | -0.5 V to +7.0 V |
| Operating temperature range | 0°C to +80°C     |
| Humidity                    | 95%RH or less    |

### Electrical specifications

| Item                 |        |                                   | Specification           |
|----------------------|--------|-----------------------------------|-------------------------|
| Power supply voltage |        |                                   | 5 V $\pm$ 5%            |
| Current consumption  |        |                                   | 0.05 A or less          |
| Output signal        | VA, VB | $\alpha$ iBZ sensor 128/128H      | 128 $\lambda$ /rotation |
|                      |        | $\alpha$ iBZ sensor 192/192H      | 192 $\lambda$ /rotation |
|                      |        | $\alpha$ iBZ sensor 256/256H/256S | 256 $\lambda$ /rotation |
|                      |        | $\alpha$ iBZ sensor 384           | 384 $\lambda$ /rotation |
|                      |        | $\alpha$ iBZ sensor 512           | 512 $\lambda$ /rotation |
|                      | VZ     | Common to all models              | 1 $\lambda$ /rotation   |

## Resolution and precision

| Name                              | Resolution in Cs<br>contour control | Precision<br>(typ.) |
|-----------------------------------|-------------------------------------|---------------------|
| $\alpha$ iBZ sensor 128/128H      | 360,000/rotation                    | 30/1000°            |
| $\alpha$ iBZ sensor 192/192H      |                                     | 25/1000°            |
| $\alpha$ iBZ sensor 256/256H/256S |                                     | 20/1000°            |
| $\alpha$ iBZ sensor 384           |                                     | 15/1000°            |
| $\alpha$ iBZ sensor 512           |                                     | 10/1000°            |

### NOTE

- 1 The precision values above are not guaranteed values but typical values.
- 2 The precision values above do not consider the influence of an error due to runout in sensor ring installation. The influence of runout in sensor ring installation on precision can be calculated as follows:

$$\text{Error (}^\circ\text{)} = A \text{ (mm)} \times 360/B \text{ (mm)}$$

A : Axis runout of the machine spindle or sleeve on the sensor ring mounting plane


B : Perimeter of the sensor ring

Example: If the axis runout on the mounting plane is 0.005 mm when a 256 $\lambda$  sensor ring (103.2 in diameter) is used, the error is:

$$0.005 \times 360/(103.2 \times \pi) = 0.0055(^\circ)$$

## Dimensions

[A860-2150-T\*\*\*]

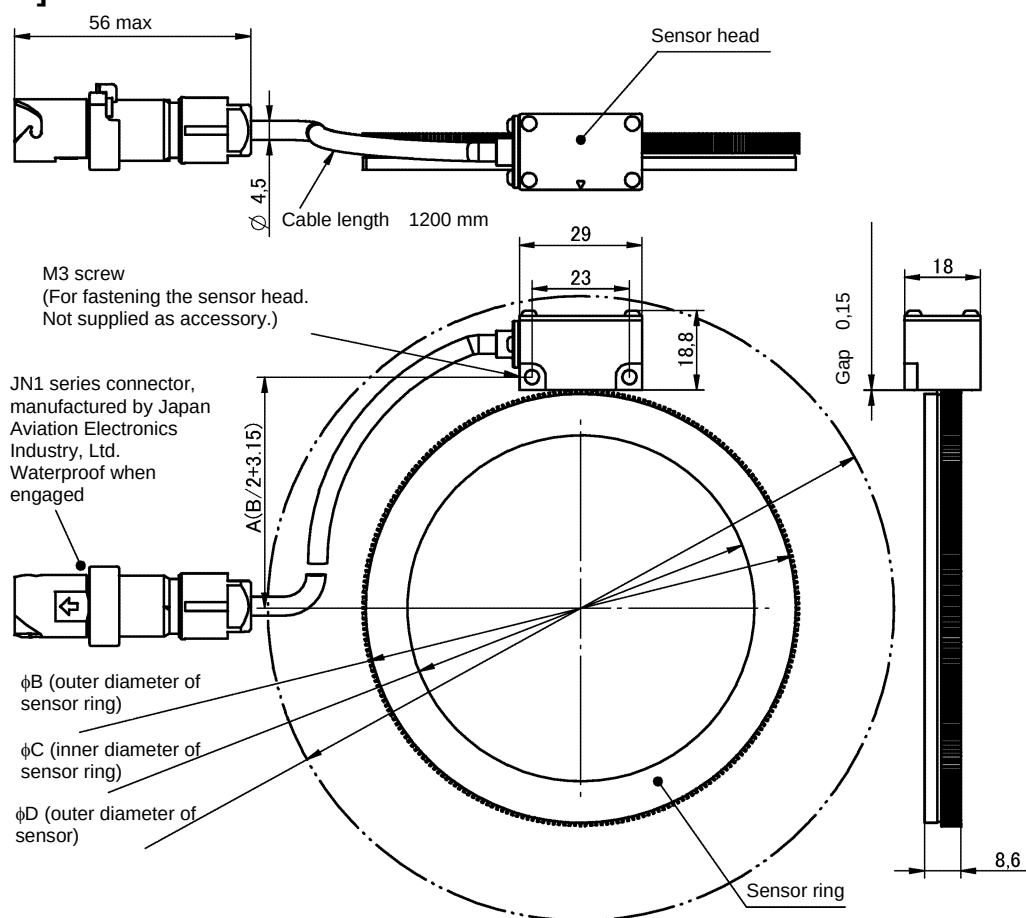


## Accessories:

Straight pin (JIS B 1354-1988, class A, normal diameter of  $\phi 3$ , normal length of  $6 \times 2$ , 0.15-mm thickness gage  $\times 1$ )

Unit (mm)

| Sensor type number | Number of teeth | A      | $\phi B$              | $\phi C$                | $\phi D$ |
|--------------------|-----------------|--------|-----------------------|-------------------------|----------|
| A860-2150-T201     | 128             | 29.15  | $52^{+0}_{-0.020}$    | $40^{+0.016}_{-0}$      | 98       |
| A860-2150-T211     |                 |        |                       |                         |          |
| A860-2150-T301     | 192             | 41.95  | $77.6^{+0}_{-0.020}$  | $60^{+0}_{-0.018}$      | 122      |
| A860-2150-T311     |                 |        |                       |                         |          |
| A860-2150-T401     | 256             | 54.75  | $103.2^{+0}_{-0.020}$ | $82^{+0}_{-0.018}$      | 148      |
| A860-2150-T404     |                 |        |                       | $88^{+0}_{-0.018}$      |          |
| A860-2150-T411     |                 |        |                       | $82^{+0}_{-0.018}$      |          |
| A860-2150-T511     | 384             | 80.35  | $154.4^{+0}_{-0.020}$ | $125^{+0.025}_{-0}$     | 198      |
| A860-2150-T611     | 512             | 105.95 | $205.6^{+0}_{-0.020}$ | $160^{+0.020}_{-0.005}$ | 249      |

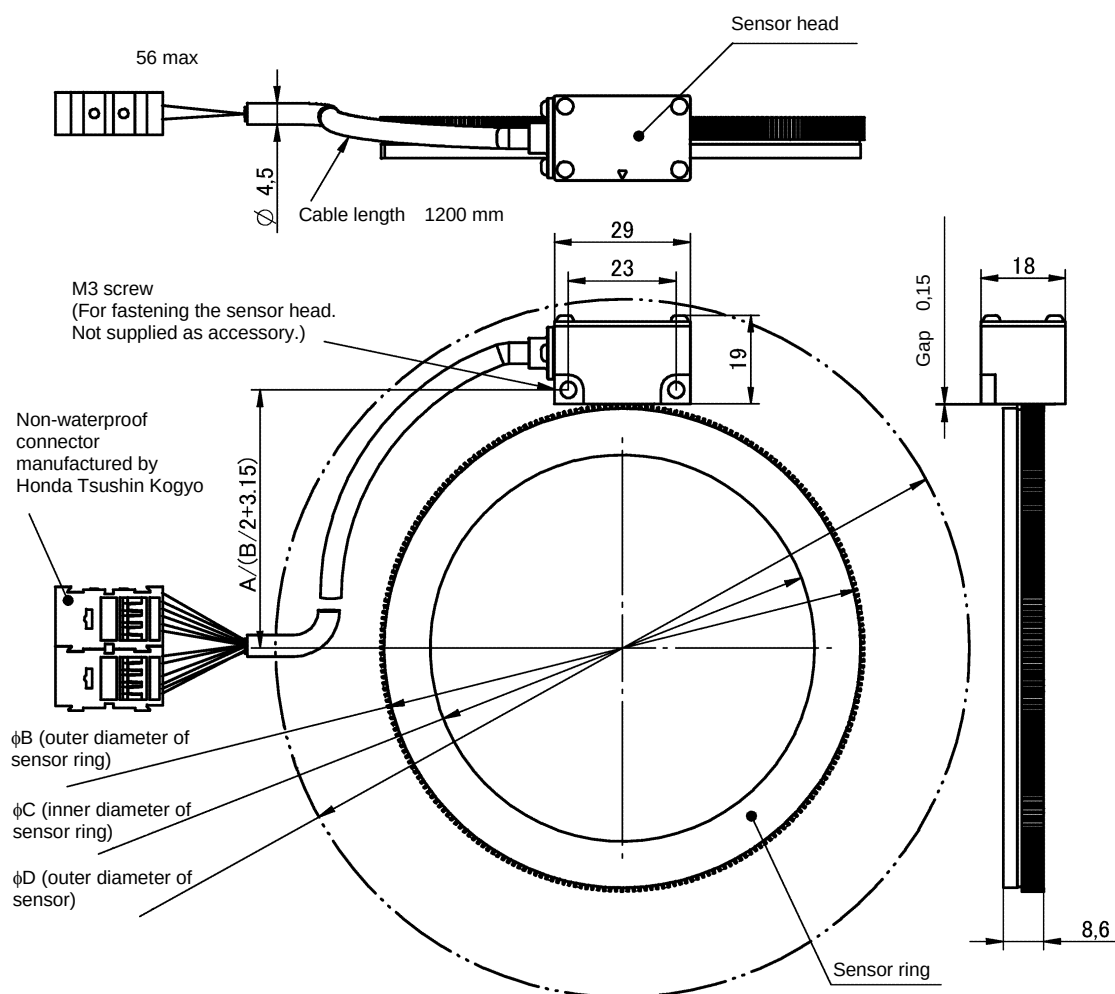**[A860-2155-T\*\*\*]****Accessories:**

Straight pin (JIS B 1354-1988, class A, normal diameter of  $\phi 3$ , normal length of  $6 \times 2$ , 0.15-mm thickness gage  $\times 1$ )

**Unit (mm)**


| Sensor type number | Number of teeth | A      | $\phi B$              | $\phi C$                | $\phi D$ |
|--------------------|-----------------|--------|-----------------------|-------------------------|----------|
| A860-2155-T201     | 128             | 29.15  | $52^{+0}_{-0.020}$    | $40^{+0.016}_{-0}$      | 98       |
| A860-2155-T211     |                 |        |                       |                         |          |
| A860-2155-T301     | 192             | 41.95  | $77.6^{+0}_{-0.020}$  | $60^{+0}_{-0.018}$      | 122      |
| A860-2155-T311     |                 |        |                       |                         |          |
| A860-2155-T401     | 256             | 54.75  | $103.2^{+0}_{-0.020}$ | $82^{+0}_{-0.018}$      | 148      |
| A860-2155-T404     |                 |        |                       | $88^{+0}_{-0.018}$      |          |
| A860-2155-T411     |                 |        |                       | $82^{+0}_{-0.018}$      |          |
| A860-2155-T511     | 384             | 80.35  | $154.4^{+0}_{-0.020}$ | $125^{+0.025}_{-0}$     | 198      |
| A860-2155-T611     | 512             | 105.95 | $205.6^{+0}_{-0.020}$ | $160^{+0.020}_{-0.005}$ | 249      |

**NOTE**

- Use the sensor under 80°C.
- The sensor is a precision part. Use special care in handling. In particular, do not apply force to the sensor head.
- Fasten the cable to the machine at an appropriate position so that no force is applied directly to the sensor head.
- The sensor is waterproof to an IP67 rating. Note, however, that the waterproofness represented by IP indicates short-time resistance to water only and does not guarantee thorough waterproofness. Therefore, protect the sensor head against direct splash of coolant and so on by taking appropriate measures, for example, by installing a cover.
- When installing the sensor, observe the requirements described in "Installation" described later.
- For easy maintenance, mount the  $\alpha iBZ$  sensor at a position where it can be replaced easily.
- Sensor rings with the same specification number can be replaced with each other.

**Notes on the sensor ring**

The sensor ring consists of the phase Z signal generation section and the phase A/B signal generation section. The new  $\alpha iBZ$  sensors are different from the conventional  $\alpha iBZ$  sensors in that the new  $\alpha iBZ$  sensors integrate the phase A/B signal generation section and the phase Z signal generation section into one piece, and that the phase Z signal generation section has a convex shape instead of a concave shape. When handling the sensor ring, be very careful not to deform or damage the teeth on the outer surface of the sensor ring.

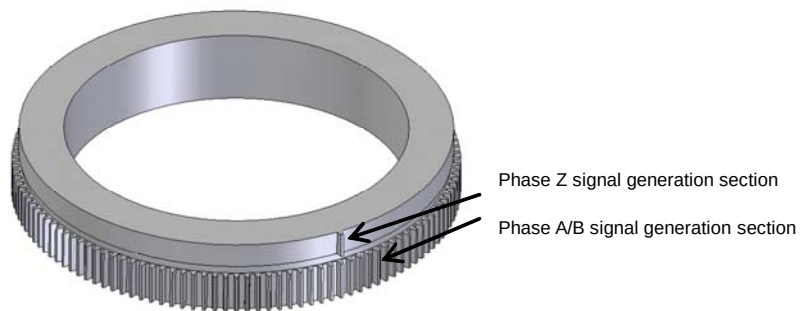

## Interference of the sensor ring

The following table lists the interference for heat shrink fitting for the sensor ring at each maximum speed:

| Max. speed<br>(min <sup>-1</sup> ) | Unit (μm) |           |           |           |              |            |            |            |
|------------------------------------|-----------|-----------|-----------|-----------|--------------|------------|------------|------------|
|                                    | T201      | T211      | T301      | T311      | T401<br>T404 | T411       | T511       | T611       |
| 3000                               | φ6 - φ32  | φ6 - φ32  | φ6 - φ34  | φ6 - φ34  | φ7 - φ35     | φ7 - φ35   | φ8 - φ43   | φ11 - φ41  |
| 3500                               | ↓         | ↓         | ↓         | ↓         | ↓            | ↓          | φ9 - φ44   | φ13 - φ43  |
| 4500                               | ↓         | ↓         | ↓         | ↓         | ↓            | ↓          | φ11 - φ46  | φ19 - φ49  |
| 6000                               | ↓         | ↓         | φ7 - φ35  | φ7 - φ35  | φ9 - φ37     | φ9 - φ37   | φ15 - φ50  | φ29 - φ59  |
| 8000                               | ↓         | ↓         | φ8 - φ36  | φ8 - φ36  | φ11 - φ39    | φ11 - φ39  | φ24 - φ59  | φ47 - φ77  |
| 10000                              | ↓         | ↓         | φ9 - φ37  | φ9 - φ37  | φ15 - φ43    | φ14 - φ42  | φ35 - φ70  | φ71 - φ101 |
| 12000                              | φ7 - φ33  | φ7 - φ33  | φ11 - φ39 | φ11 - φ39 | φ19 - φ47    | φ18 - φ46  | φ47 - φ82  |            |
| 15000                              | φ8 - φ34  | φ8 - φ34  | φ13 - φ41 | φ13 - φ41 | φ28 - φ56    | φ26 - φ54  | φ71 - φ106 |            |
| 20000                              | φ10 - φ36 | φ10 - φ36 | φ19 - φ47 | φ19 - φ47 |              | φ41 - φ69  |            |            |
| 25000                              |           | φ12 - φ38 |           | φ27 - φ55 |              | φ62 - φ90  |            |            |
| 30000                              |           | φ15 - φ41 |           | φ37 - φ65 |              | φ87 - φ115 |            |            |
| 40000                              |           | φ23 - φ49 |           | φ61 - φ89 |              |            |            |            |
| 50000                              |           | φ33 - φ59 |           |           |              |            |            |            |
| 60000                              |           | φ43 - φ69 |           |           |              |            |            |            |
| 70000                              |           | φ57 - φ83 |           |           |              |            |            |            |

### NOTE

- From the above table, select the suitable interference according to the maximum speed and the type of the ring used.  
If an interference not listed above is applied, the ring will be damaged or loosen while the spindle rotates.
- These rings cannot be used at a speed higher than the speeds specified in the above table.

## Installation

Install the sensor according to the procedure below.

- <1> Machine the sensor mounting surface as necessary then insert the straight pins.
- <2> Fit the sensor ring around the machine shaft (or sleeve) by heat shrink fitting.
- <3> Adjust the gap between the sensor head and sensor ring then mount the sensor on the machine. Fig. 1 shows the parts to be installed and Fig. 2 shows the external view after installation.

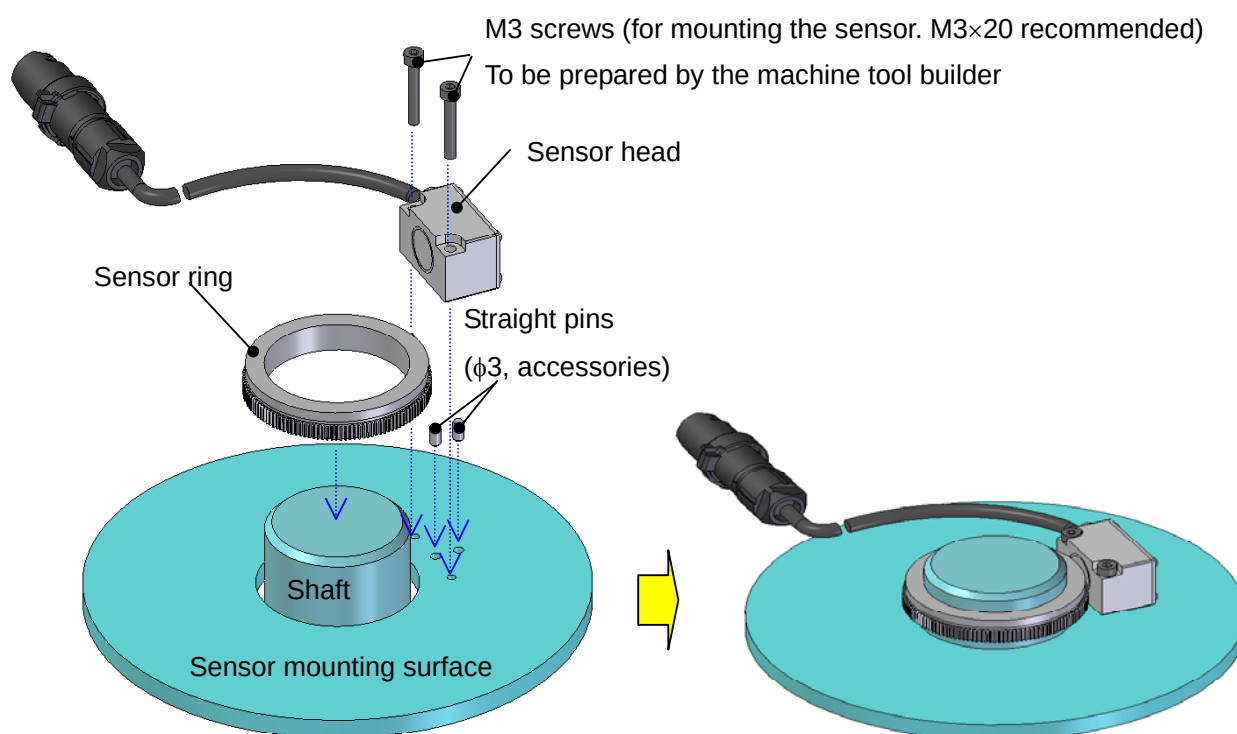


Fig. 1 Parts to be installed

Fig. 2 After installation



## Machining the sensor mounting surface

Machine the sensor mounting surface as shown in Fig. 3. Insert straight pins (supplied as accessories) into the 2- $\phi 3H6$  holes. The straight pins are used as the guide for gap adjustment described later.


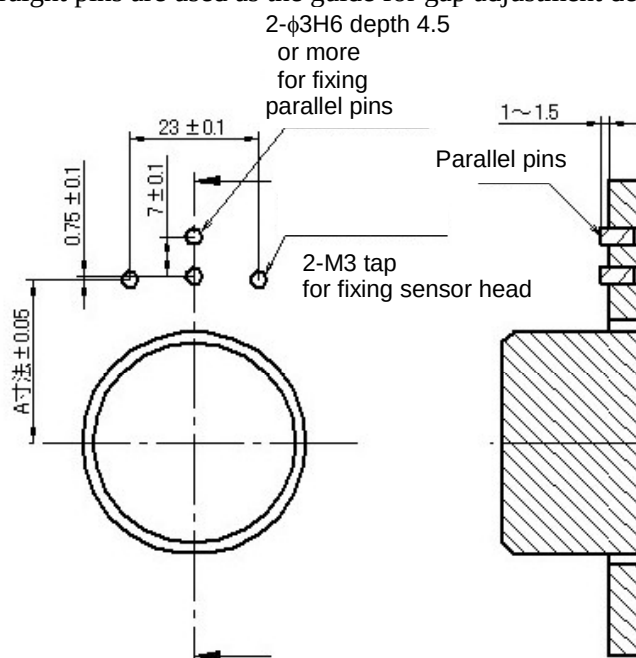


Fig. 3

## Installing the sensor ring


Fit the sensor ring around the shaft or sleeve by heat shrink fitting so that the bottom of the phase A/B signal generation section (gear) is  $4.7 \pm 0.2$  mm off the sensor mounting surface. The runout of the shaft or sleeve part around which the sensor ring is fit by heat shrink fitting must be 0.005 mm or less.

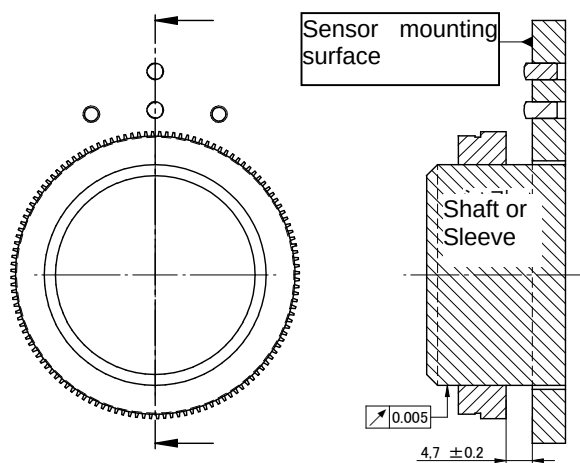

## Installing the sensor head

Install the  $\alpha$ iBZ sensor head according to the procedure below.


Place the sensor head on the sensor mounting surface so that the straight pins are positioned in the slot of the sensor head, and fasten the sensor head temporarily. When mounting the sensor head, be careful not to hit the sensor head against the sensor ring.

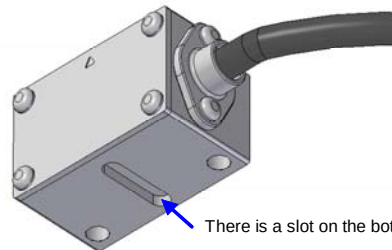

There is a slot on the bottom of the sensor head.

Install the sensor head so that the straight pins are placed in this slot.

Insert the thickness gage (supplied as an accessory,  $t = 0.15 \text{ mm}$ ) between the sensor ring and the sensor head, and while lightly pressing the sensor head against the thickness gage, tighten the sensor mounting screws (recommended tightening torque:  $1.3 \text{ Nm} \pm 10\%$ ). Apply a thread locker or the like to the sensor mounting screws to prevent them from becoming loose.

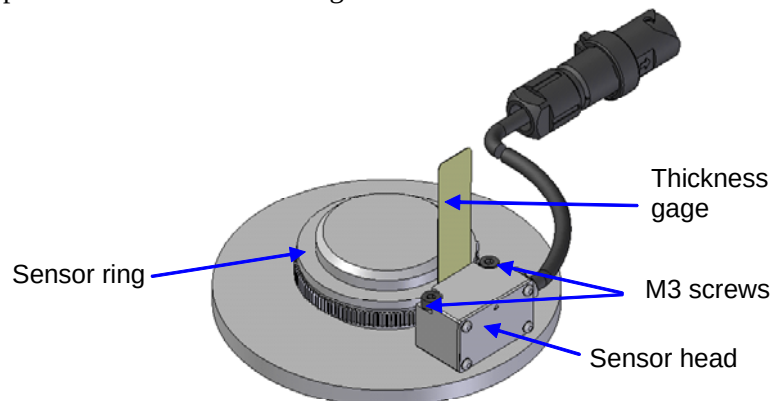

Pull out the thickness gage, and slowly turn the spindle to ensure that the sensor ring and the sensor head do not touch each other.

Check that the gap between the sensor ring and the sensor is at least  $0.1 \text{ mm}$ .


The output signal level of the  $\alpha$ iBZ sensor is designed to fall within the specified range if the sensor head is mounted correctly. Depending on the mounting status, the output signal level may exceed the specified range, which can lead to malfunction. Therefore, make sure that the output signal level is within the specified range.

### 11.2.3 $\alpha i$ CZ Sensor (for the Spindle)


This subsection describes the specifications and handling of the  $\alpha i$ CZ angular displacement sensor.

The  $\alpha i$ CZ sensor is used with the built-in spindle motor BiI series/BiS series or  $\alpha i$  spindle motor to exercise high-precision Cs contour control. Two major types of  $\alpha i$ CZ sensors are available. One type is used for the built-in spindle motor and the other for the spindle. A type needs to be selected according to the system configuration.

#### [ $\alpha i$ CZ sensor (for built-in spindle motor)]

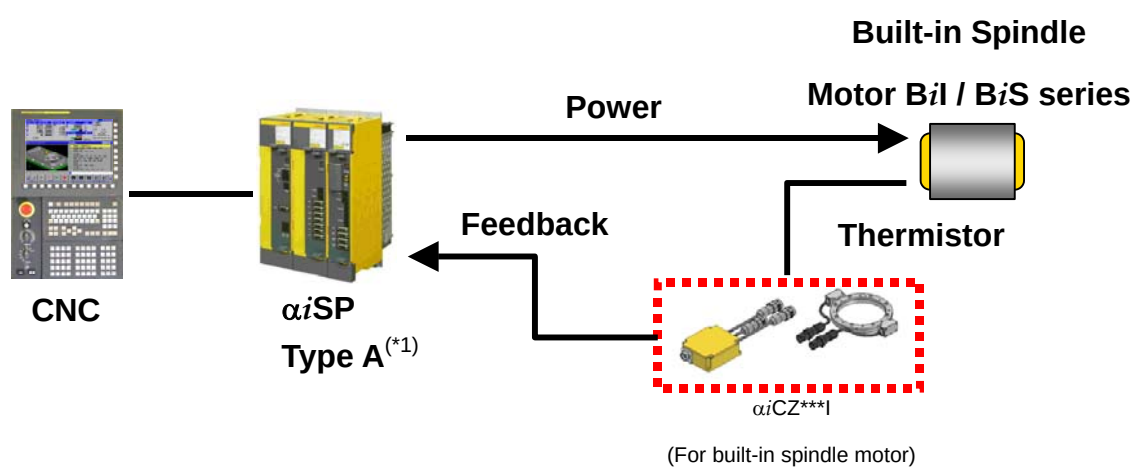

#### [ $\alpha i$ CZ sensor (for spindle)]

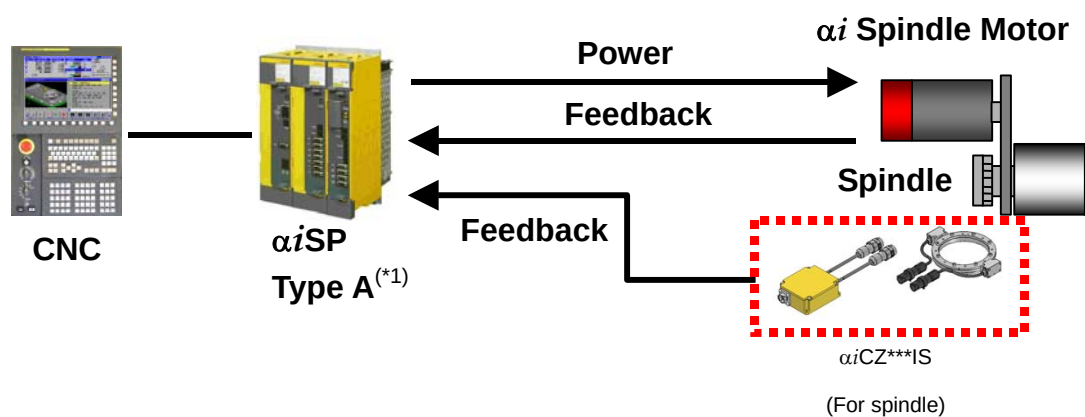

\*1)

Supported unit drawing numbers and versions

| Drawing number                                                                                                                                  | Supported unit version |
|-------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|
| 200V system A06B-6141-H002, -H006, -H011, -H015, -H030, -H037, -H055#H580<br>400V system A06B-6151-H006, -H011, -H015, -H045, -H075, -H100#H580 | Version B or later     |
| 200V system A06B-6141-H022, -H026, -H045#H580<br>400V system A06B-6151-H030#H580                                                                | Version C or later     |

### 11.2.3.1 Names and specification numbers

#### $\alpha i$ CZ sensor (for built-in spindle motor) A860-2161-T\*\*\*

| Name and specification number |                      |                 |                         |
|-------------------------------|----------------------|-----------------|-------------------------|
| Name                          | Specification number | Remarks         |                         |
|                               |                      | Number of teeth | Maximum speed           |
| $\alpha i$ CZ sensor 512I     | A860-2161-T411       | 512             | 15,000min <sup>-1</sup> |
| $\alpha i$ CZ sensor 768I     | A860-2161-T511       | 768             | 10,000min <sup>-1</sup> |
| $\alpha i$ CZ sensor 1024I    | A860-2161-T611       | 1024            | 8,000min <sup>-1</sup>  |

#### $\alpha i$ CZ sensor (for spindle) A860-2163-T\*\*\*

| Name and specification number |                      |                 |                         |
|-------------------------------|----------------------|-----------------|-------------------------|
| Name                          | Specification number | Remarks         |                         |
|                               |                      | Number of teeth | Maximum speed           |
| $\alpha i$ CZ sensor 512IS    | A860-2163-T411       | 512             | 15,000min <sup>-1</sup> |
| $\alpha i$ CZ sensor 768IS    | A860-2163-T511       | 768             | 10,000min <sup>-1</sup> |
| $\alpha i$ CZ sensor 1024IS   | A860-2163-T611       | 1024            | 8,000min <sup>-1</sup>  |

### 11.2.3.2 Absolute maximum ratings

\* The description below is applicable to both of A860-2161-T\*\*\* and A860-2163-T\*\*\*.

| Absolute maximum ratings (common to all specifications) |                  |
|---------------------------------------------------------|------------------|
| Item                                                    | Specification    |
| Power supply voltage                                    | -0.5 V to +6.0 V |
| Operating temperature range                             | 0°C to +50°C     |
| Humidity                                                | 95%RH or less    |

### 11.2.3.3 Specifications

#### [ $\alpha i$ CZ sensor (for built-in spindle motor) A860-2161-T\*\*\*]

##### $\alpha i$ CZ sensor 512I


##### Mechanical and electrical specifications

| Item                       | Min. | Typ.        | Max.   | Unit              |
|----------------------------|------|-------------|--------|-------------------|
| Speed                      |      |             | 15,000 | min <sup>-1</sup> |
| Resolution                 |      | 1/3,600,000 |        | Revolution        |
| Precision                  |      | ±4          |        | Second            |
| Repetition precision       |      | ±1          |        | Second            |
| Power supply voltage       | 4.5  | 5           | 5.25   | V                 |
| Current consumption        |      | 150         |        | mA                |
| Water and dust proof class | IP67 |             |        |                   |

## Dimensions

### $\alpha$ iCZ sensor 512 I A860-2161-T411

- The sensor is a precision part. Use special care in handling. Particularly, do not apply external force to the sensor heads.
- Take dust protection measures to prevent foreign matter such as chips from being attached to the sensor.
- The waterproof class of the  $\alpha$ iCZ sensor is equivalent to IP67. However, if the sensor is continuously exposed to coolant, for example, the sensor can fail. Provide highest-level water protection to prevent the sensor from being exposed to coolant or the like.
- For easy maintenance, mount the sensor at a position where it can be replaced easily.
- Ensure that no vibration greater than 1 G is applied to the sensor circuit.
- Ground the sensor circuit. The bottom of the sensor circuit is not painted. So, the circuit can be grounded only by screwing.
- Fasten the cables to the machine near the sensor heads so that no load is applied directly to the sensor heads.
- All  $\alpha$ iCZ sensor cables are of movable type.

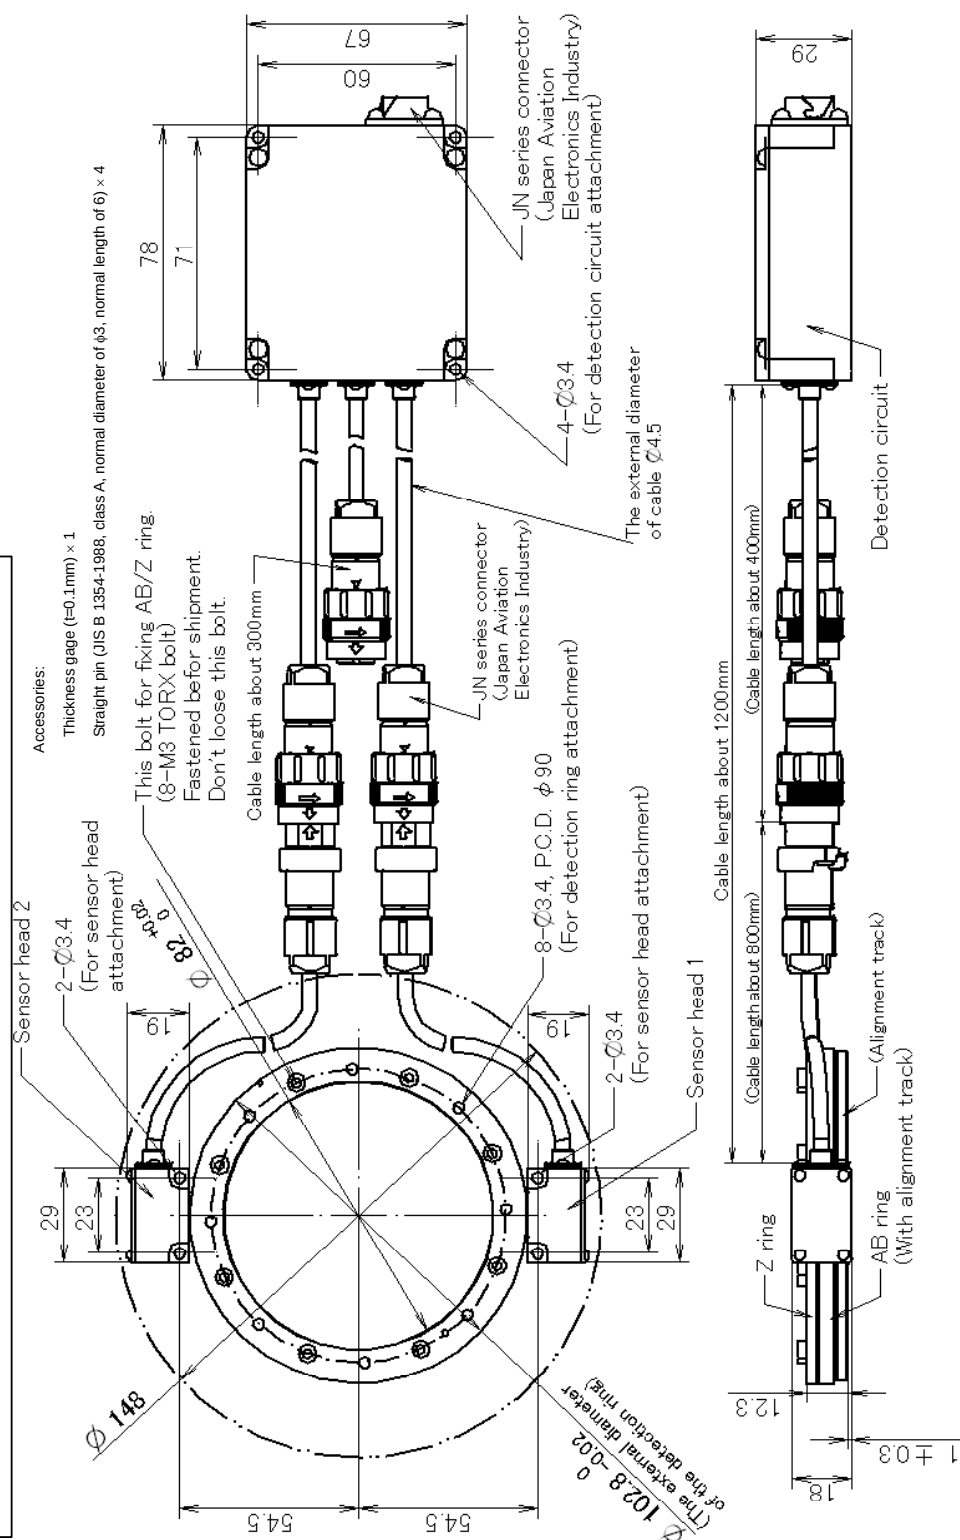


**$\alpha i$ CZ sensor 768 I****Speed, resolution, precision, and electrical specifications**

| Item                       | Min. | Typ.        | Max.   | Unit              |
|----------------------------|------|-------------|--------|-------------------|
| Speed                      |      |             | 10,000 | min <sup>-1</sup> |
| Resolution                 |      | 1/3,600,000 |        | Revolution        |
| Precision                  |      | ±3          |        | Second            |
| Repetition precision       |      | ±1          |        | Second            |
| Power supply voltage       | 4.5  | 5           | 5.25   | V                 |
| Current consumption        |      | 150         |        | mA                |
| Water and dust proof class | IP67 |             |        |                   |

## Dimensions

### $\alpha$ iCZ sensor 768 I A860-2161-T511

- The sensor is a precision part. Use special care in handling. Particularly, do not apply external force to the sensor heads.
- Take dust protection measures to prevent foreign matter such as chips from being attached to the sensor.
- The waterproof class of the  $\alpha$ iCZ sensor is equivalent to IP67. However, if the sensor is continuously exposed to coolant, for example, the sensor can fail. Provide highest-level water protection to prevent the sensor from being exposed to coolant or the like.
- For easy maintenance, mount the sensor at a position where it can be replaced easily.
- Ensure that no vibration greater than 1 G is applied to the sensor circuit.
- Ground the sensor circuit. The bottom of the sensor circuit is not painted. So, the circuit can be grounded only by screwing.
- Fasten the cables to the machine near the sensor heads so that no load is applied directly to the sensor heads.
- All  $\alpha$ iCZ sensor cables are of movable type.

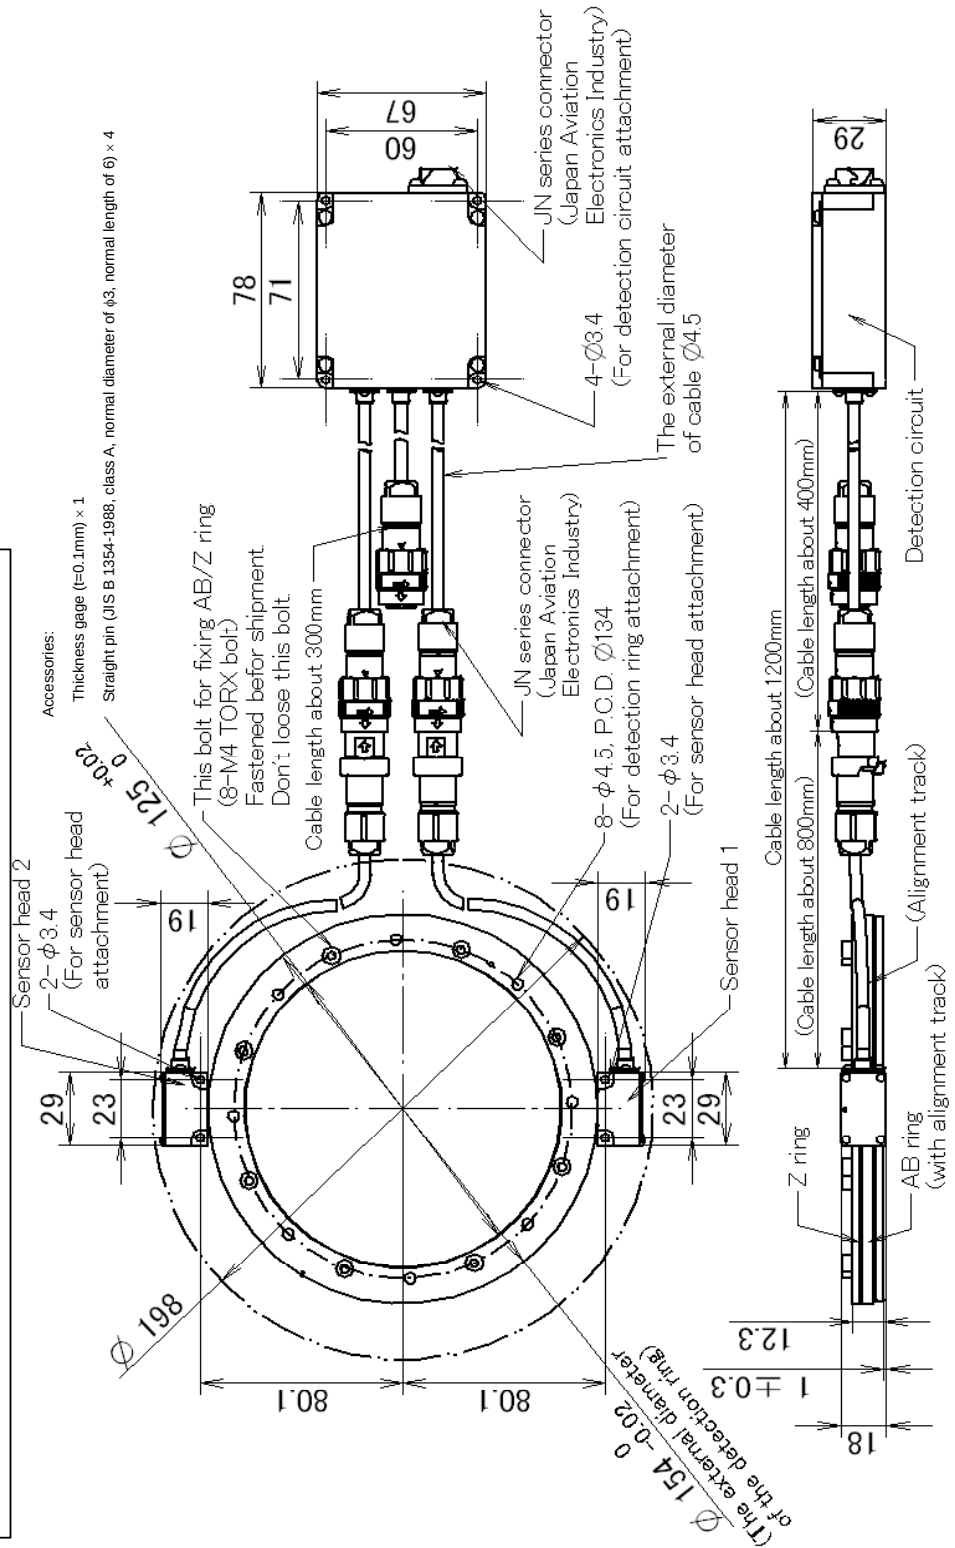

**$\alpha$ iCZ sensor 1024 I****Speed, resolution, precision, and electrical specifications**


| Item                       | Min. | Typ.        | Max.  | Unit              |
|----------------------------|------|-------------|-------|-------------------|
| Speed                      |      |             | 8,000 | min <sup>-1</sup> |
| Resolution                 |      | 1/3,600,000 |       | Revolution        |
| Precision                  |      | ±2          |       | Second            |
| Repetition precision       |      | ±1          |       | Second            |
| Power supply voltage       | 4.5  | 5           | 5.25  | V                 |
| Current consumption        |      | 150         |       | mA                |
| Water and dust proof class | IP67 |             |       |                   |



## Dimensions

**$\alpha i$ CZ sensor 1024 I  
A860-2161-T611**

- The sensor is a precision part. Use special care in handling. Particularly, do not apply external force to the sensor heads.
- Take dust protection measures to prevent foreign matter such as chips from being attached to the sensor.
- The waterproof class of the  $\alpha$ ICZ sensor is equivalent to IP67. However, if the sensor is continuously exposed to coolant, for example, the sensor can fail. Provide highest-level water protection to prevent the sensor from being exposed to coolant or the like.
- For easy maintenance, mount the sensor at a position where it can be replaced easily.
- Ensure that no vibration greater than 1 G is applied to the sensor circuit.
- Ground the sensor circuit. The bottom of the sensor circuit is not painted. So, the circuit can be grounded only by screwing.
- Fasten the cables to the machine near the sensor heads so that no load is applied directly to the sensor heads.
- All  $\alpha$ ICZ sensor cables are of movable type.

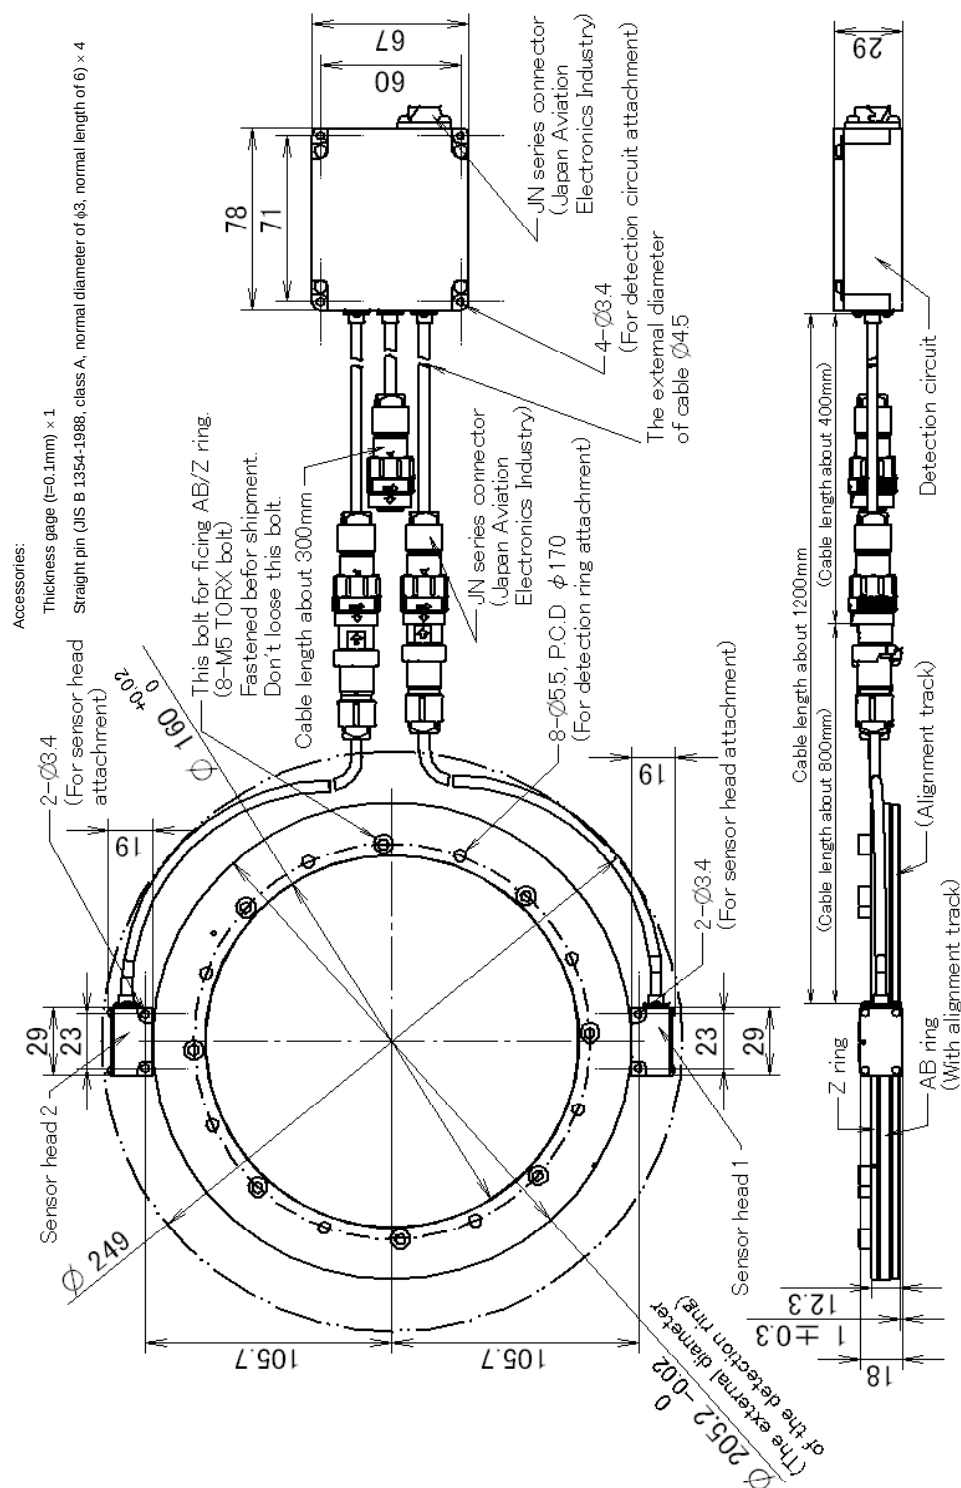

[ $\alpha$ iCZ sensor (for spindle) A860-2163-T\*\*\*]

$\alpha$ iCZ sensor 512 IS

Mechanical and electrical specifications

| Item                       | Min. | Typ.        | Max.   | Unit              |
|----------------------------|------|-------------|--------|-------------------|
| Speed                      |      |             | 15,000 | min <sup>-1</sup> |
| Resolution                 |      | 1/3,600,000 |        | Revolution        |
| Precision                  |      | ±4          |        | Second            |
| Repetition precision       |      | ±1          |        | Second            |
| Power supply voltage       | 4.5  | 5           | 5.25   | V                 |
| Current consumption        |      | 150         |        | mA                |
| Water and dust proof class | IP67 |             |        |                   |

## Dimensions


**$\alpha i$ CZ sensor 512 IS  
A860-2163-T411**

- The sensor is a precision part. Use special care in handling. Particularly, do not apply external force to the sensor heads.
- Take dust protection measures to prevent foreign matter such as chips from being attached to the sensor.
- The waterproof class of the  $\alpha$ ICZ sensor is equivalent to IP67. However, if the sensor is continuously exposed to coolant, for example, the sensor can fail. Provide highest-level water protection to prevent the sensor from being exposed to coolant or the like.
- For easy maintenance, mount the sensor at a position where it can be replaced easily.
- Ensure that no vibration greater than 1 G is applied to the sensor circuit.
- Ground the sensor circuit. The bottom of the sensor circuit is not painted. So, the circuit can be grounded only by screwing.
- Fasten the cables to the machine near the sensor heads so that no load is applied directly to the sensor heads.
- All  $\alpha$ ICZ sensor cables are of movable type.

Accessories:

Thickness gage ( $t=0.1\text{mm}$ )  $\times 1$ 

Straight pin (JIS B 1354-1988, class A, normal diameter of  $\phi 3$ , normal length of  $6'' \times 4$

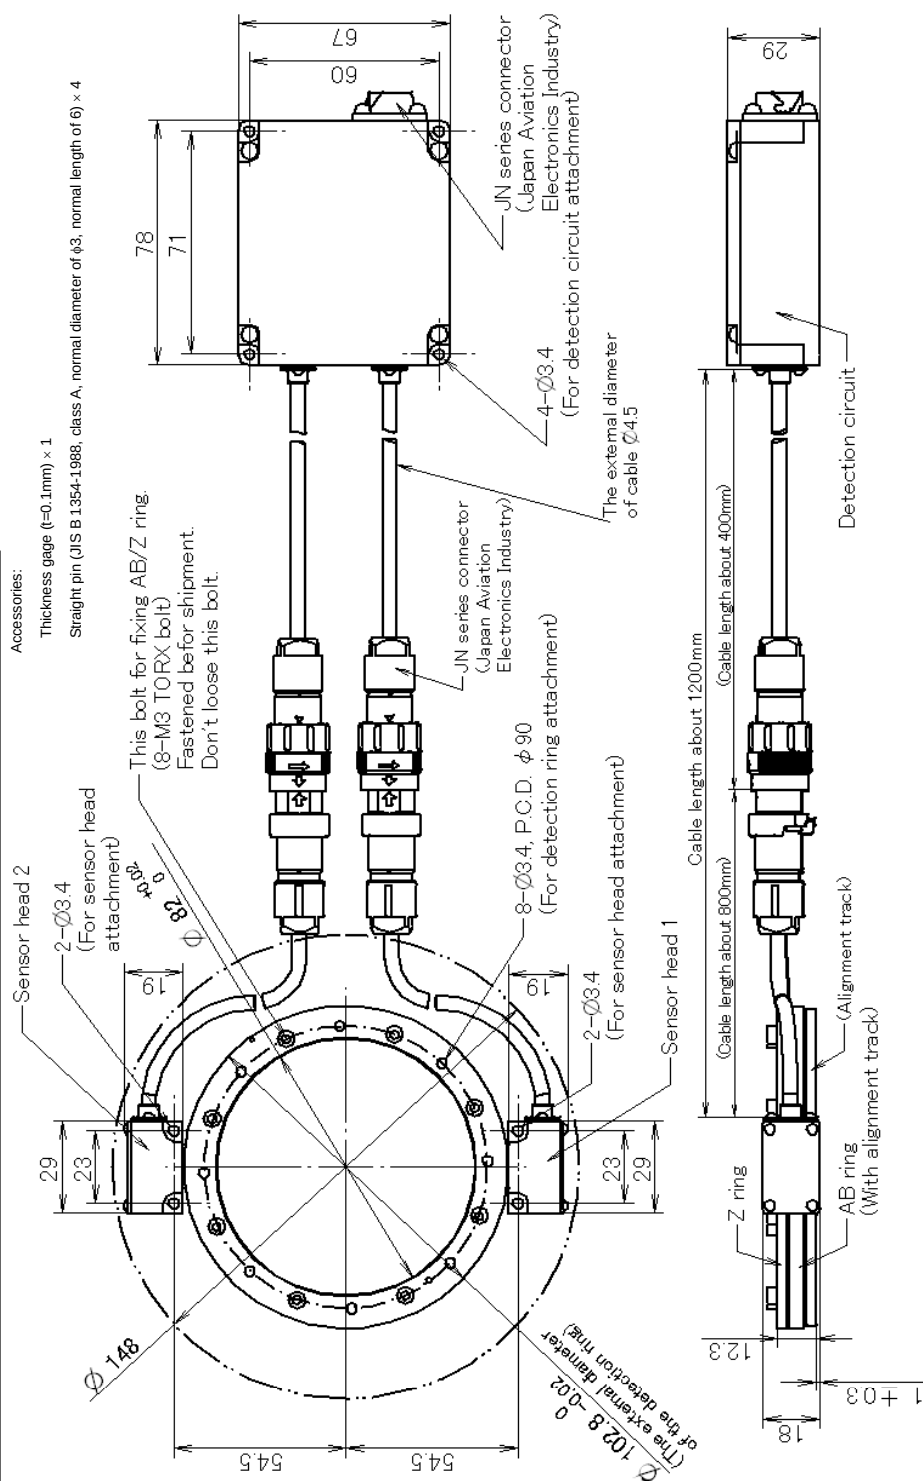


**$\alpha$ iCZ sensor 768 IS****Speed, resolution, precision, and electrical specifications**

| Item                       | Min. | Typ.        | Max.   | Unit              |
|----------------------------|------|-------------|--------|-------------------|
| Speed                      |      |             | 10,000 | min <sup>-1</sup> |
| Resolution                 |      | 1/3,600,000 |        | Revolution        |
| Precision                  |      | ±3          |        | Second            |
| Repetition precision       |      | ±1          |        | Second            |
| Power supply voltage       | 4.5  | 5           | 5.25   | V                 |
| Current consumption        |      | 150         |        | mA                |
| Water and dust proof class | IP67 |             |        |                   |

## Dimensions

**$\alpha$ iCZ sensor 768 IS  
A860-2163-T511**

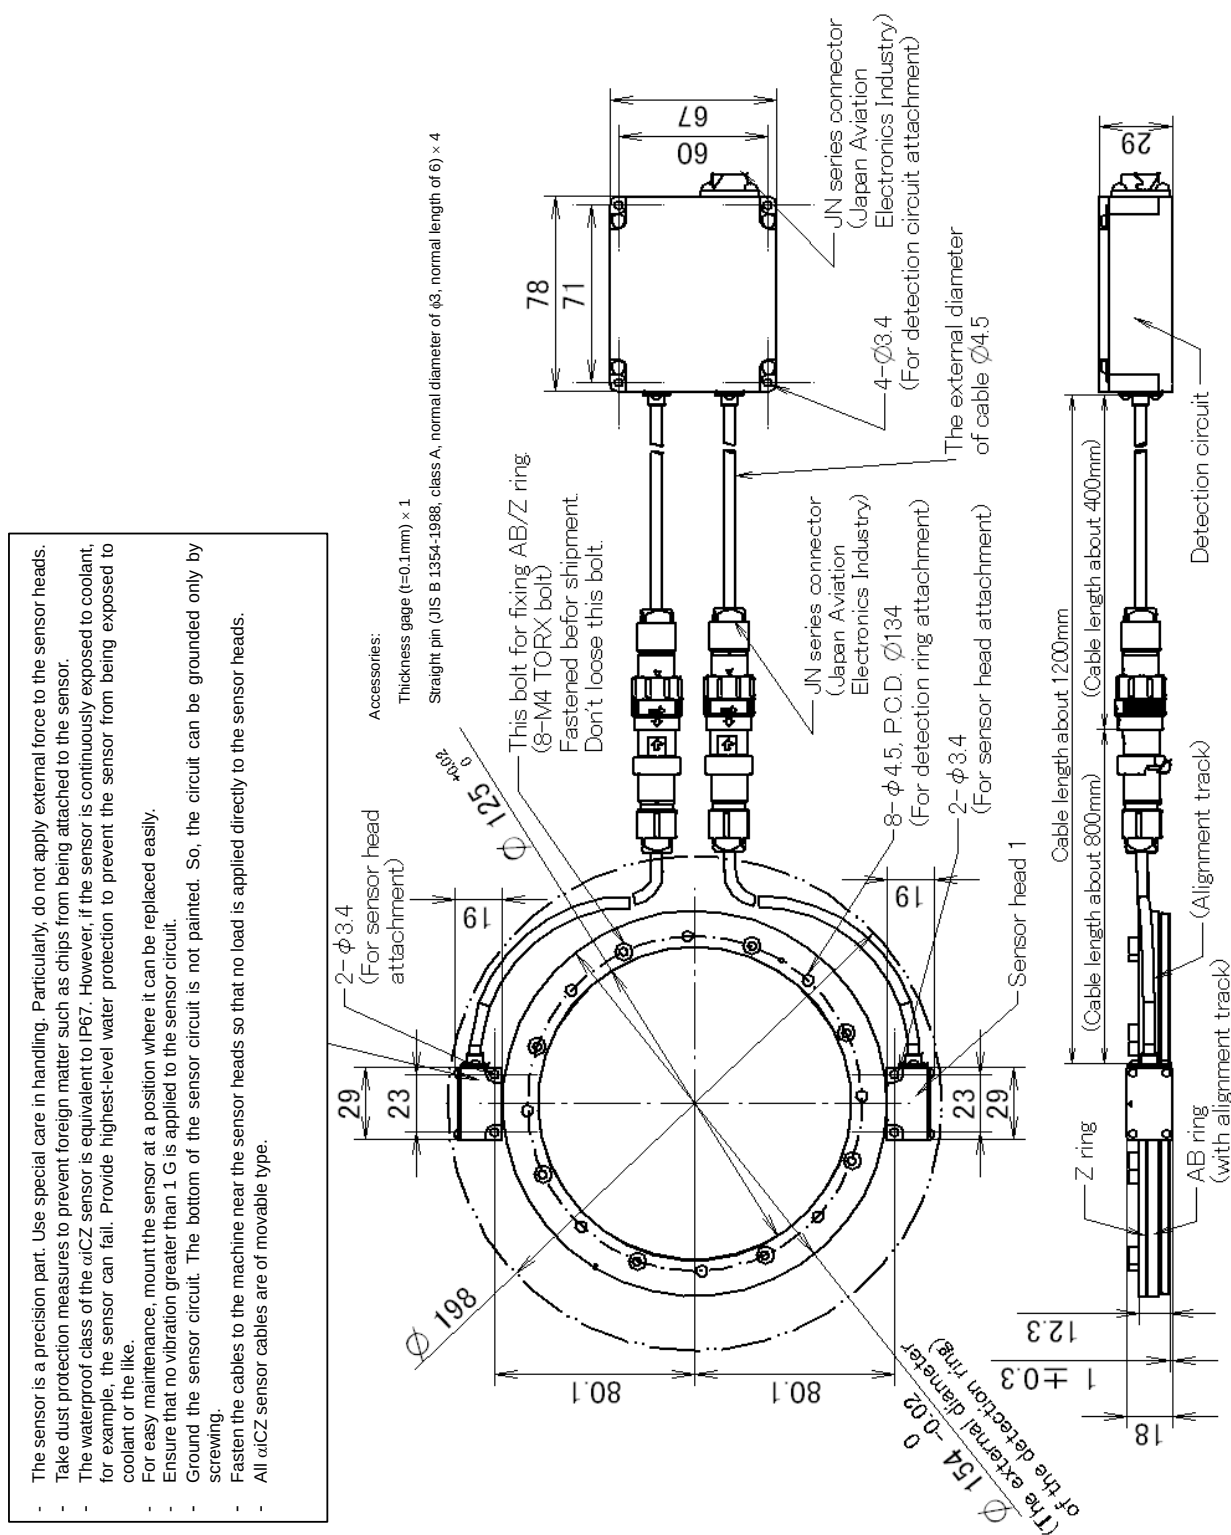


**$\alpha$ iCZ sensor 1024 IS****Speed, resolution, precision, and electrical specifications**

| Item                       | Min. | Typ.        | Max.  | Unit              |
|----------------------------|------|-------------|-------|-------------------|
| Speed                      |      |             | 8,000 | min <sup>-1</sup> |
| Resolution                 |      | 1/3,600,000 |       | Revolution        |
| Precision                  |      | ±2          |       | Second            |
| Repetition precision       |      | ±1          |       | Second            |
| Power supply voltage       | 4.5  | 5           | 5.25  | V                 |
| Current consumption        |      | 150         |       | mA                |
| Water and dust proof class | IP67 |             |       |                   |

## Dimensions


**$\alpha i$ CZ sensor 1024 IS  
A860-2163-T611**

- The sensor is a precision part. Use special care in handling. Particularly, do not apply external force to the sensor heads.
- Take dust protection measures to prevent foreign matter such as chips from being attached to the sensor.
- The waterproof class of the  $\alpha$ ICZ sensor is equivalent to IP67. However, if the sensor is continuously exposed to coolant, for example, the sensor can fail. Provide highest-level water protection to prevent the sensor from being exposed to coolant or the like.
- For easy maintenance, mount the sensor at a position where it can be replaced easily.
- Ensure that no vibration greater than 1 G is applied to the sensor circuit.
- Ground the sensor circuit. The bottom of the sensor circuit is not painted. So, the circuit can be grounded only by screwing.
- Fasten the cables to the machine near the sensor heads so that no load is applied directly to the sensor heads.
- All  $\alpha$ ICZ sensor cables are of movable type.

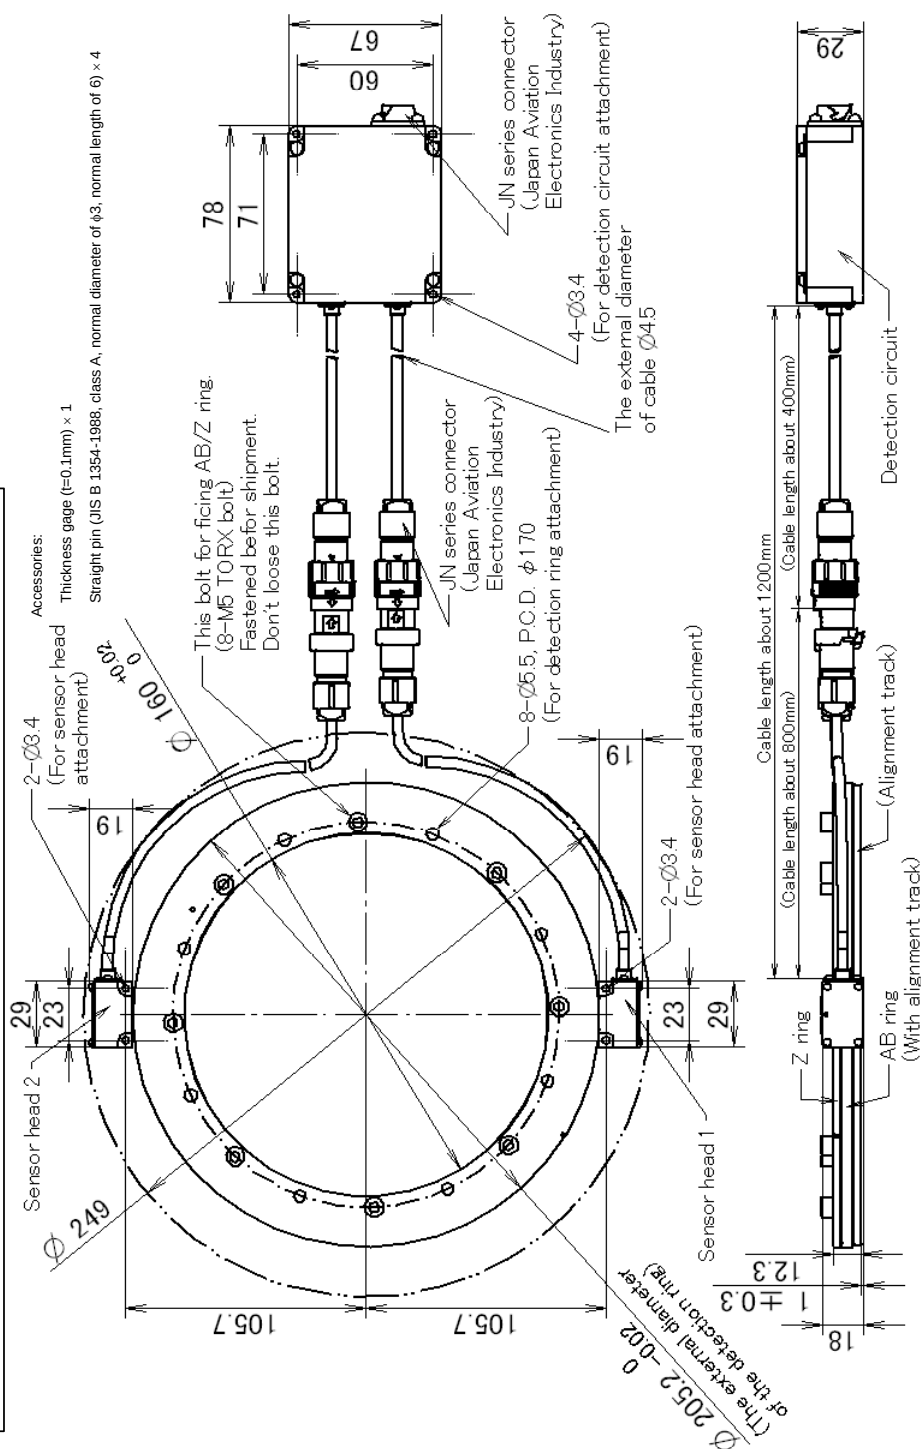


### 11.2.3.4 System configuration and connection block diagram

#### [ $\alpha i$ CZ sensor (for built-in spindle motor) A860-2161-T\*\*\*]

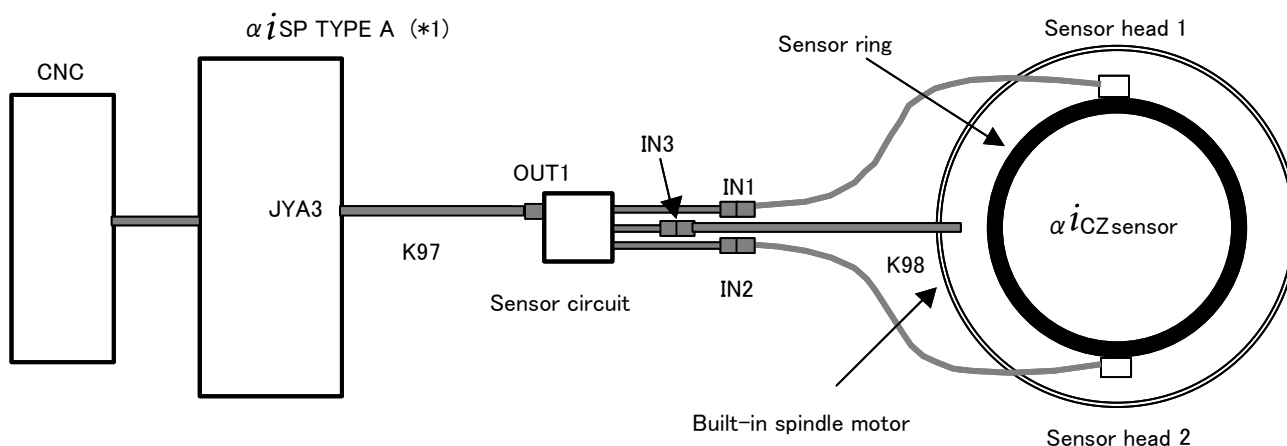

#### [ $\alpha i$ CZ sensor (for spindle) A860-2163-T\*\*\*]

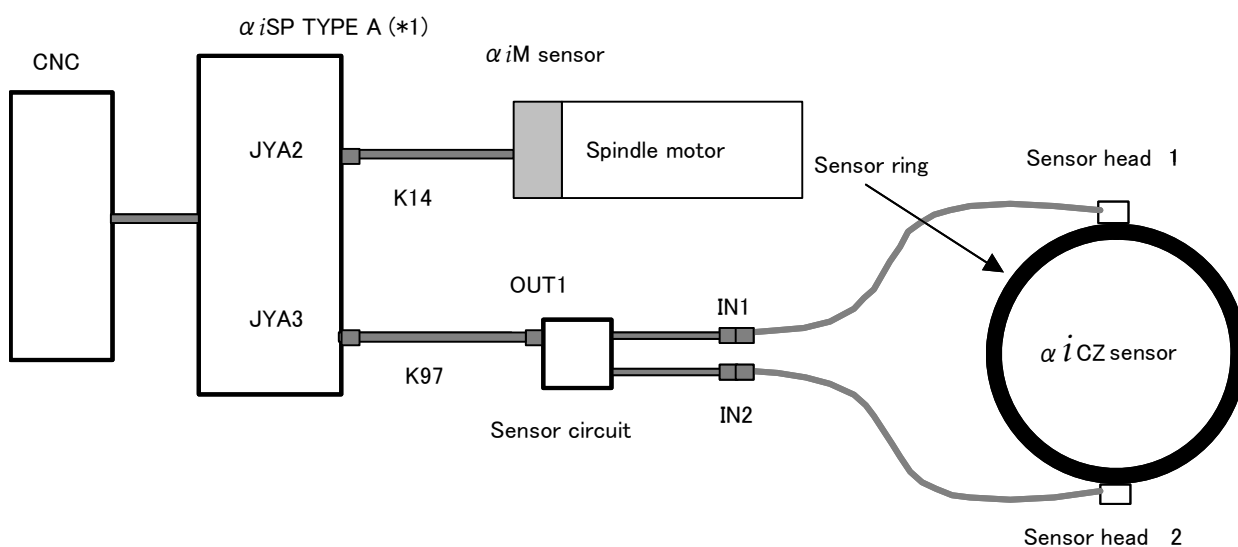

\*1) Supported unit drawing numbers and versions

| Drawing number                                                            | Supported unit version |
|---------------------------------------------------------------------------|------------------------|
| 200V system A06B-6141-H002, -H006, -H011, -H015, -H030, -H037, -H055#H580 | Version B or later     |
| 400V system A06B-6151-H006, -H011, -H015, -H045, -H075, -H100#H580        |                        |
| 200V system A06B-6141-H022, -H026, -H045#H580                             | Version C or later     |
| 400V system A06B-6151-H030#H580                                           |                        |




### 11.2.3.5 Connection specifications

#### Cable K97

See Subsection 9.3.3 for details of this cable.

#### Cable K98

#### Processing of the thermistor line of the built-in spindle motor

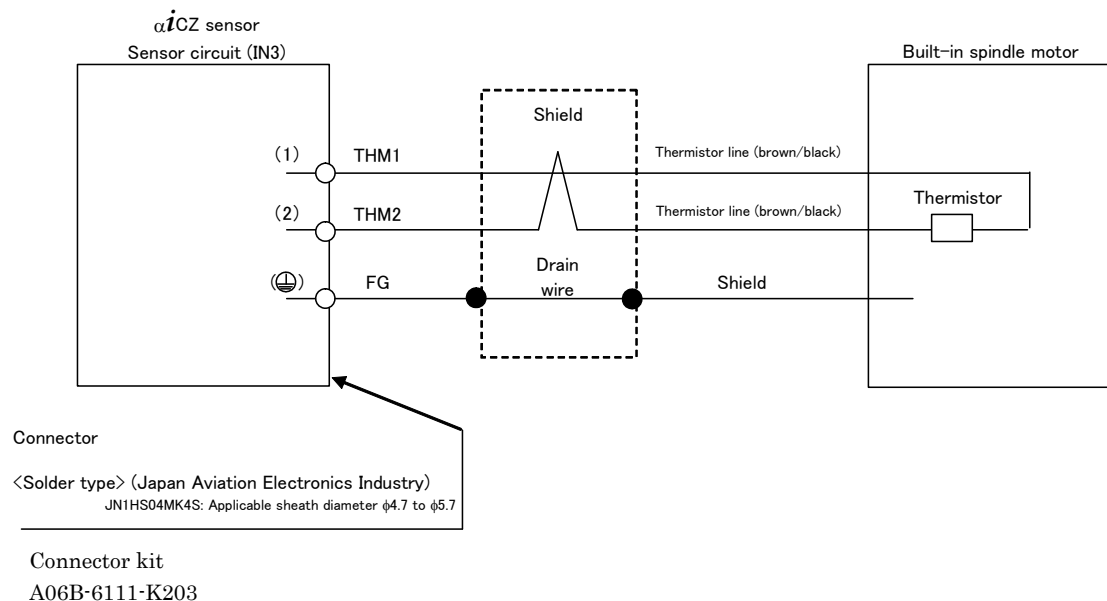

#### Method of extending the sensor cables

The sensor cables from the sensor heads to the sensor circuit can be extended up to 4 m as shown in Fig. 11.2.3.5.

The method of extending the sensor cables is described below.

#### Connection block diagram


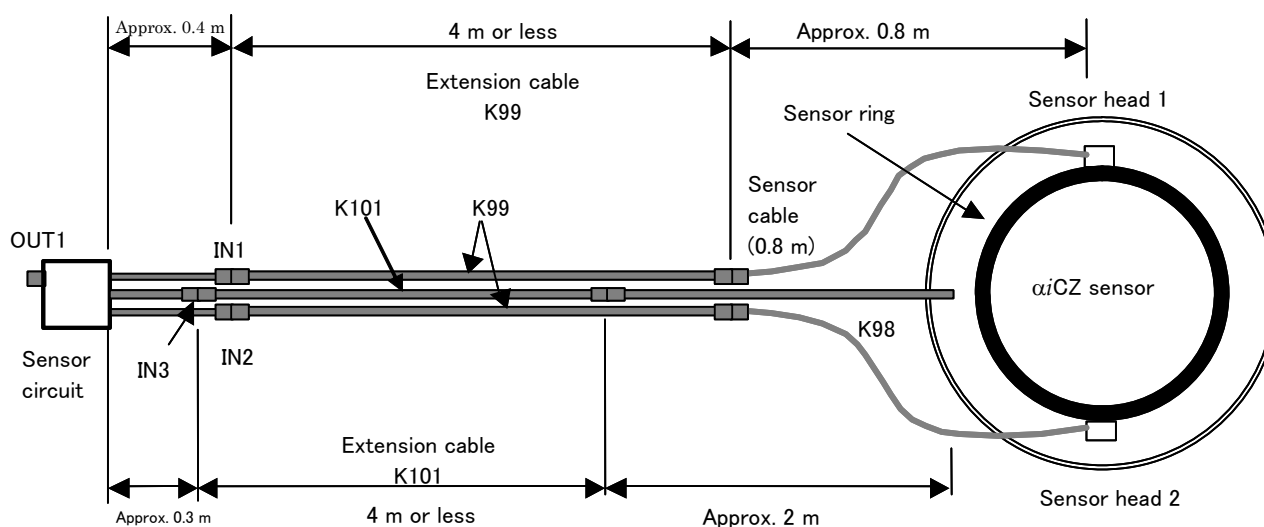


Fig. 11.2.3.5

## Cable K99

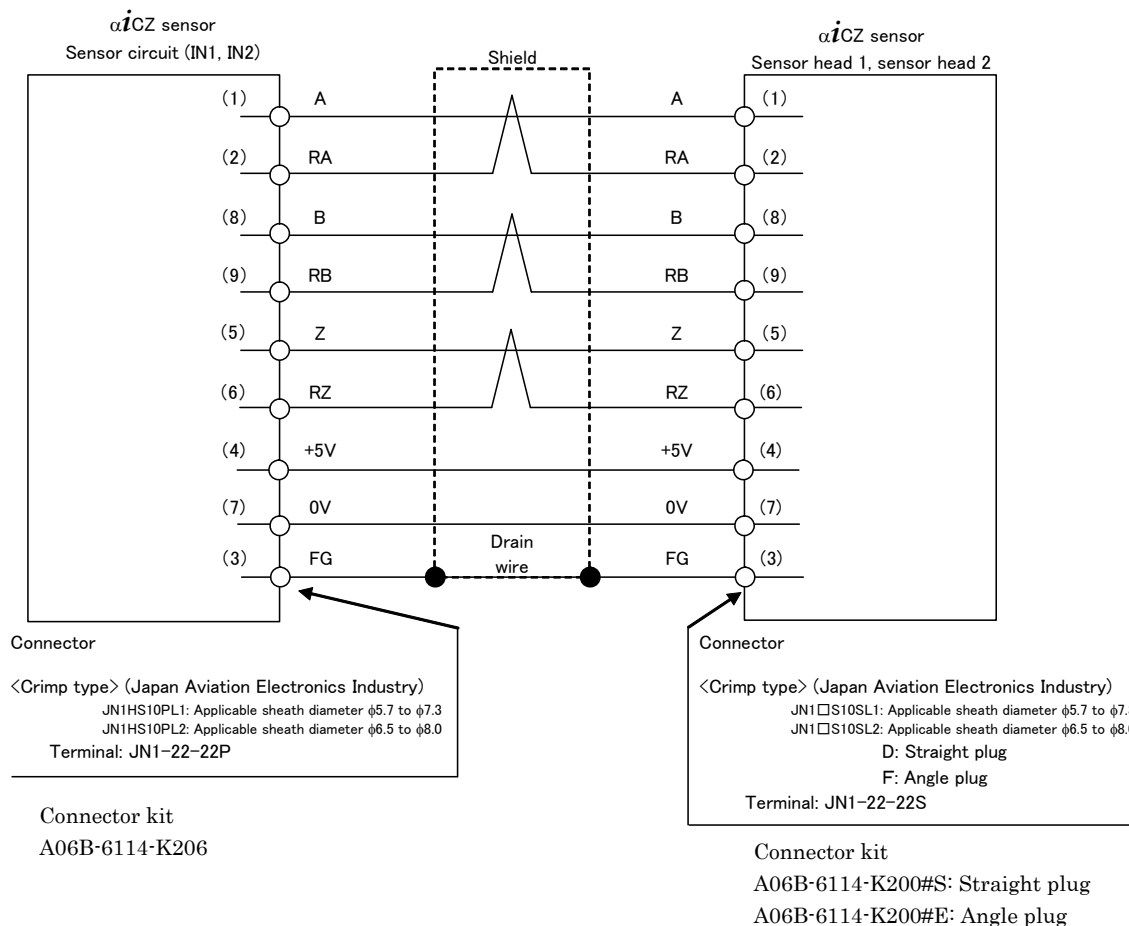

\* Z and RZ are not output from sensor head 2 but may be connected.


| Signal name         |                                            |
|---------------------|--------------------------------------------|
| 5V, 0V              | $0.5 \text{ mm}^2 \times 2$                |
| A, RA, B, RB, Z, RZ | $0.2 \text{ mm}^2$ or more<br>Twisted pair |
| Drain wire          | $0.15 \text{ mm}^2$ or more                |

Recommended cable A66L-0001-0482

**NOTE**

- 1 When using a cable not recommended, ensure that the sum of the resistance values of 0 V and 5 V does not exceed  $2 \Omega$ .
- 2 Run the power and signal lines so that the lines are not parallel with each other.

Cable K101

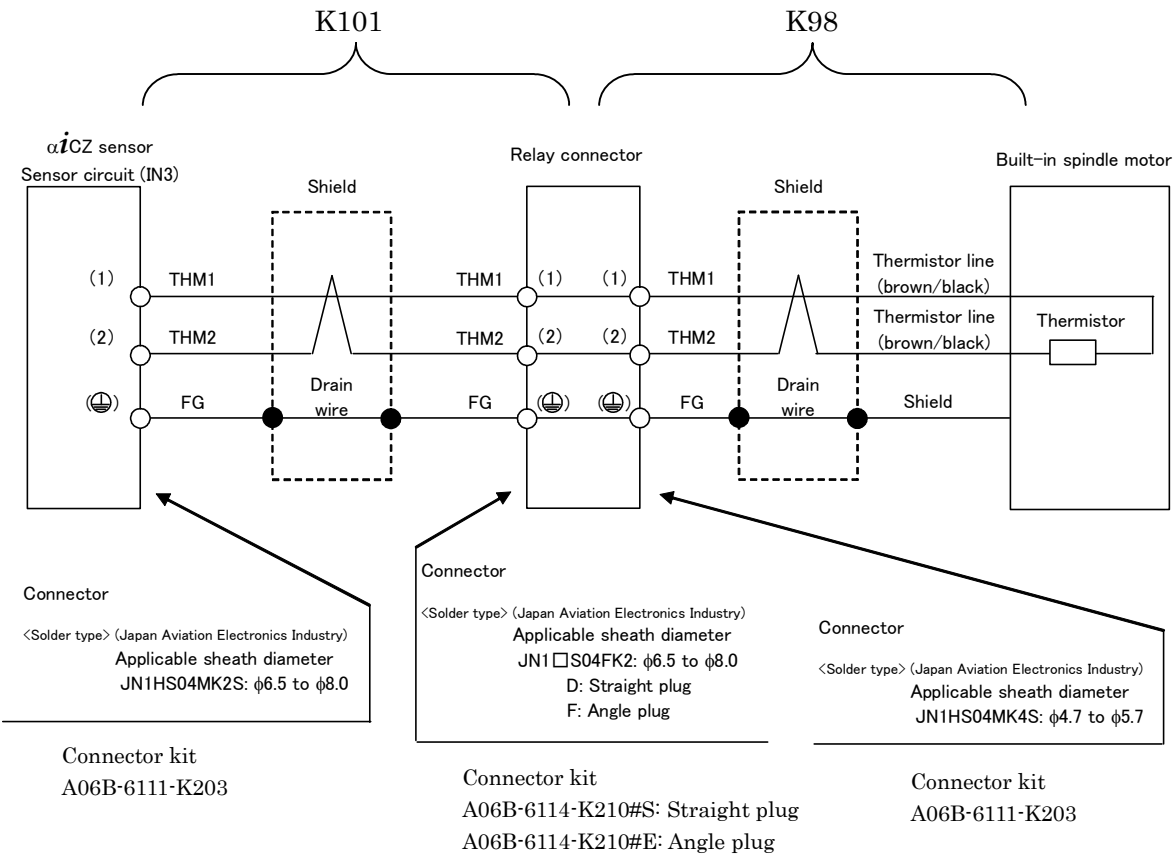


|                   |                      |                     |
|-------------------|----------------------|---------------------|
| Recommended wire  | THM1, THM2, OH1, OH2 | 0.2 mm <sup>2</sup> |
| Recommended cable | A66L-0001-0482       |                     |

### 11.2.3.6 Rotation direction of the $\alpha iCZ$ sensor

\* The description below is applicable to both of A860-2161-T\*\*\* and A860-2163-T\*\*\*.


When the sensor is viewed from the top as shown in the following figure, clockwise rotation of the sensor ring is referred to as forward rotation:

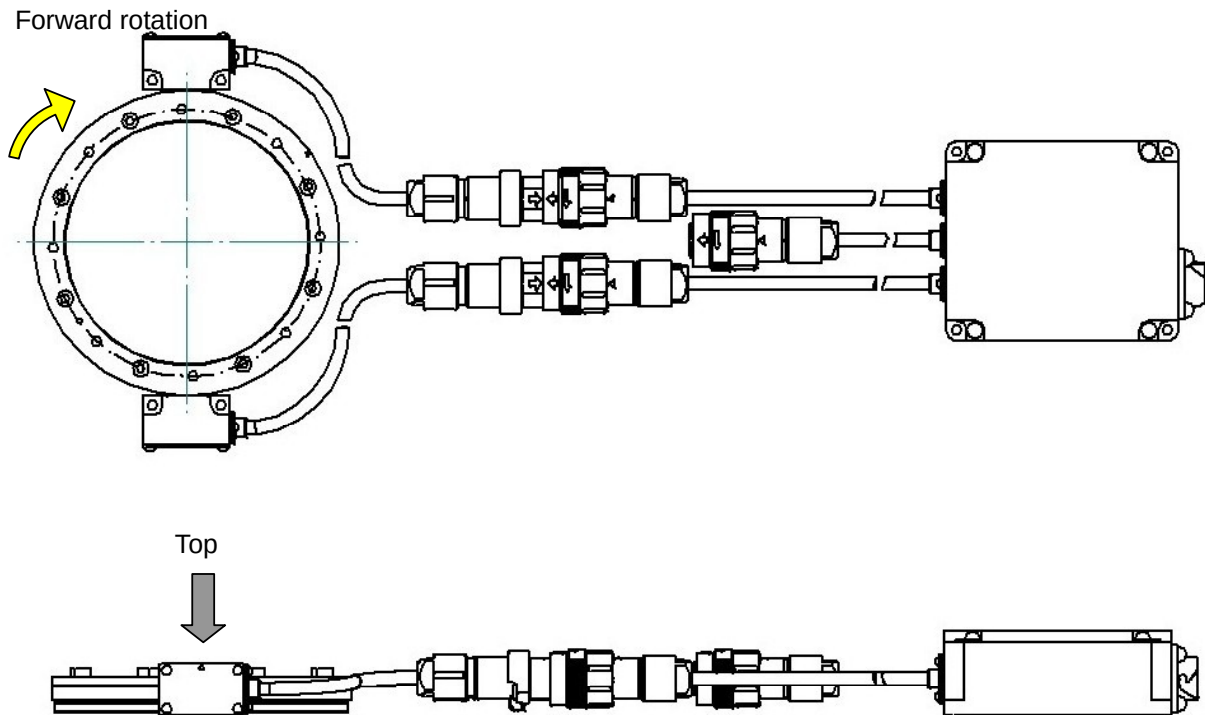

### 11.2.3.7 Machine start-up procedure (outline)

\* The description below is applicable to both of A860-2161-T\*\*\* and A860-2163-T\*\*\*.

This subsection indicates the procedure for incorporating the  $\alpha$ iCZ sensor into the machine.

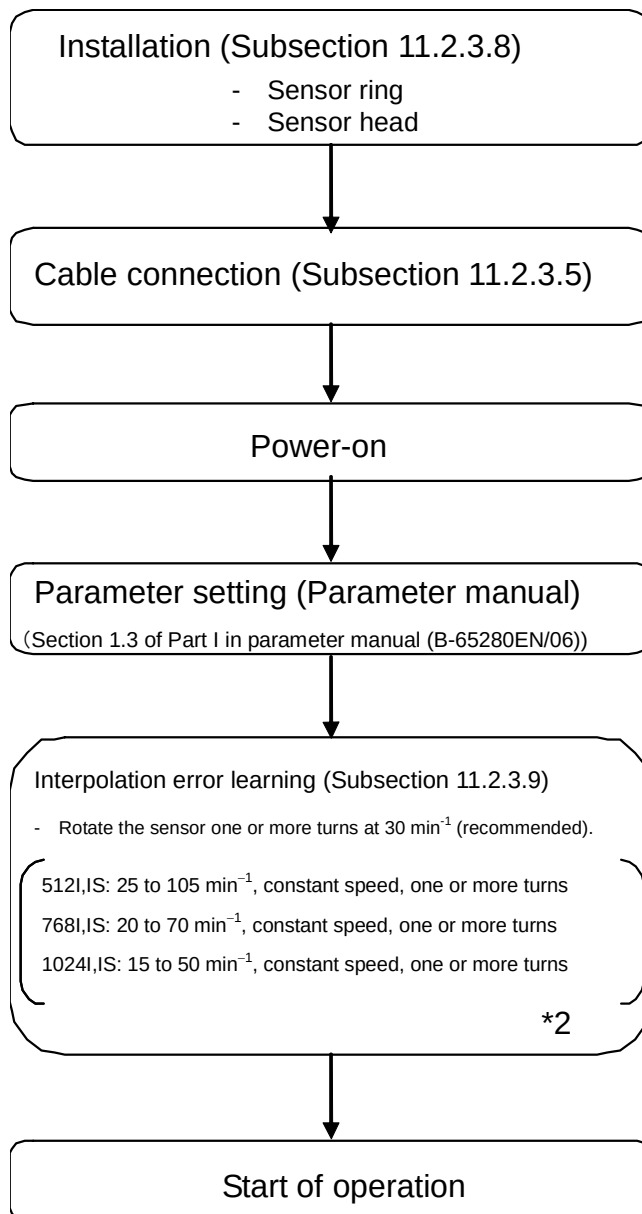

(\*1) The method of checking output signals is described in Subsection 11.2.3.12.

(\*2) Interpolation error learning needs to be performed not only at machine start-up time but also at the time of each power-on operation and at the time of each recovery operation from an alarm indicated in Subsection 11.2.3.13. (If interpolation error learning is not performed, degraded precision may result.)


### 11.2.3.8 Installation

#### Overview

- \* The description below is applicable to both of A860-2161-T\*\*\* and A860-2163-T\*\*\*.

Install the αICZ sensor according to the procedure below.


- <1> Machine the sensor mounting surface as necessary then insert the straight pins.
- <2> Mount the sensor ring onto the shaft (or sleeve) of the machine, center the sensor ring, then fasten the ring with screws.
- <3> Adjust the gap between the sensor heads and sensor ring then mount the sensor heads onto the machine.

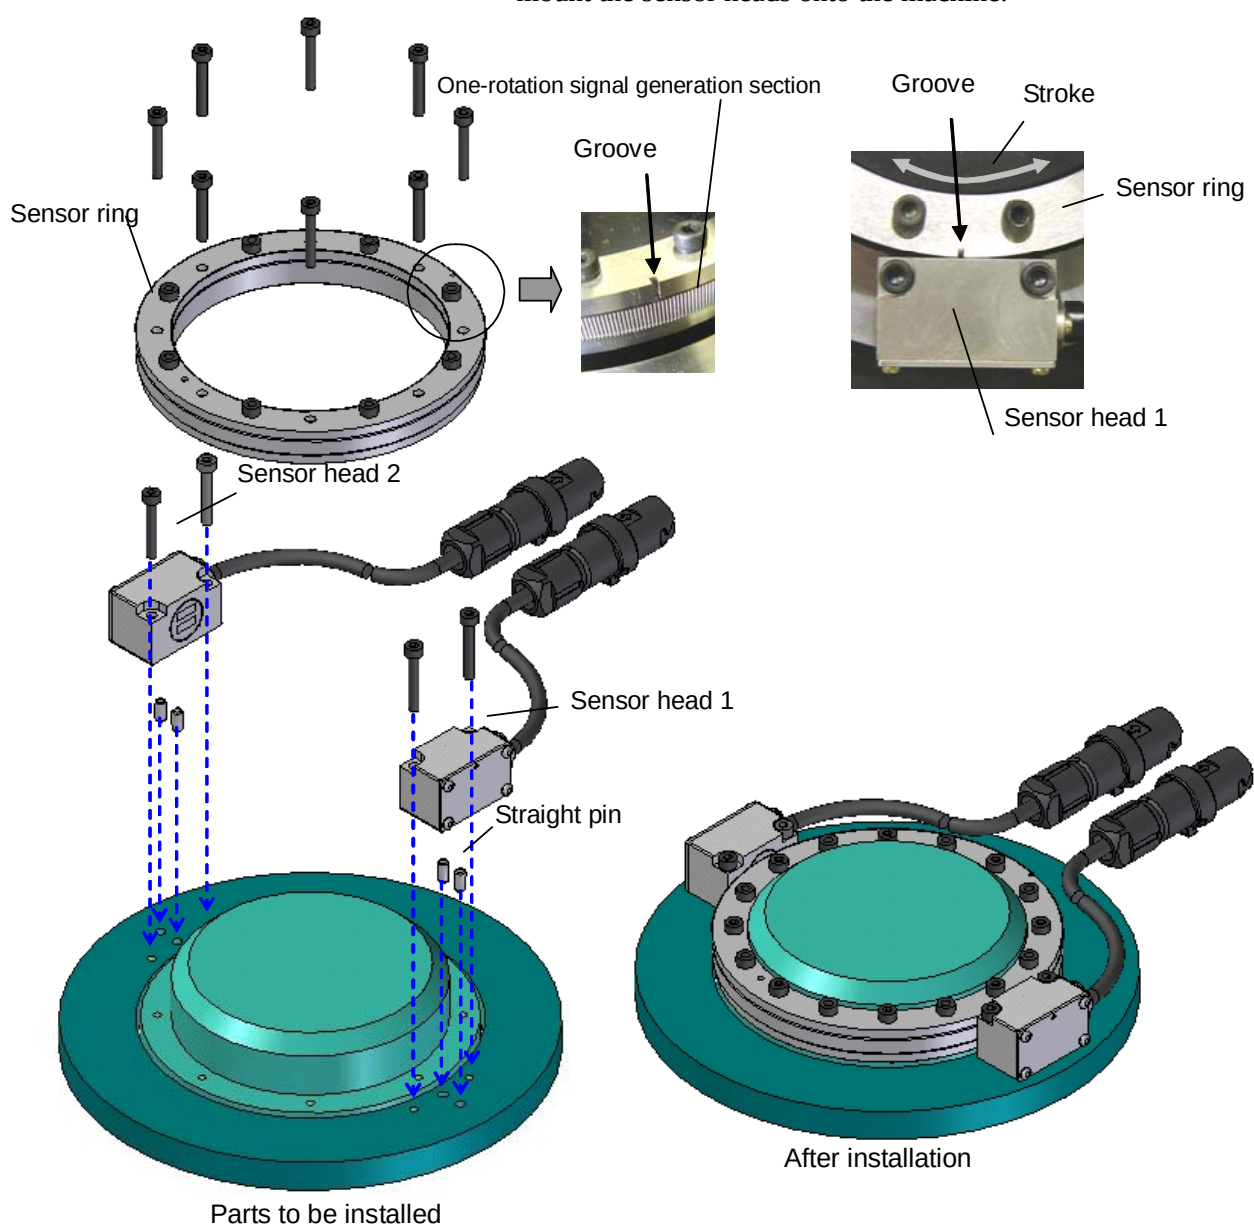

- \* Ensure that the groove of the one-rotation signal generation section of the sensor ring passes sensor head 1 within the stroke.

## Dimensions of the sensor head mounting plane

The dimensions of the sensor head mounting plane are indicated below. Insert straight pins (JIS B 1354-1988, class A, normal diameter of  $\phi 3$ , normal length of 6) into the 2- $\phi 3H6$  holes. The straight pins are used as the guide for gap adjustment described later.

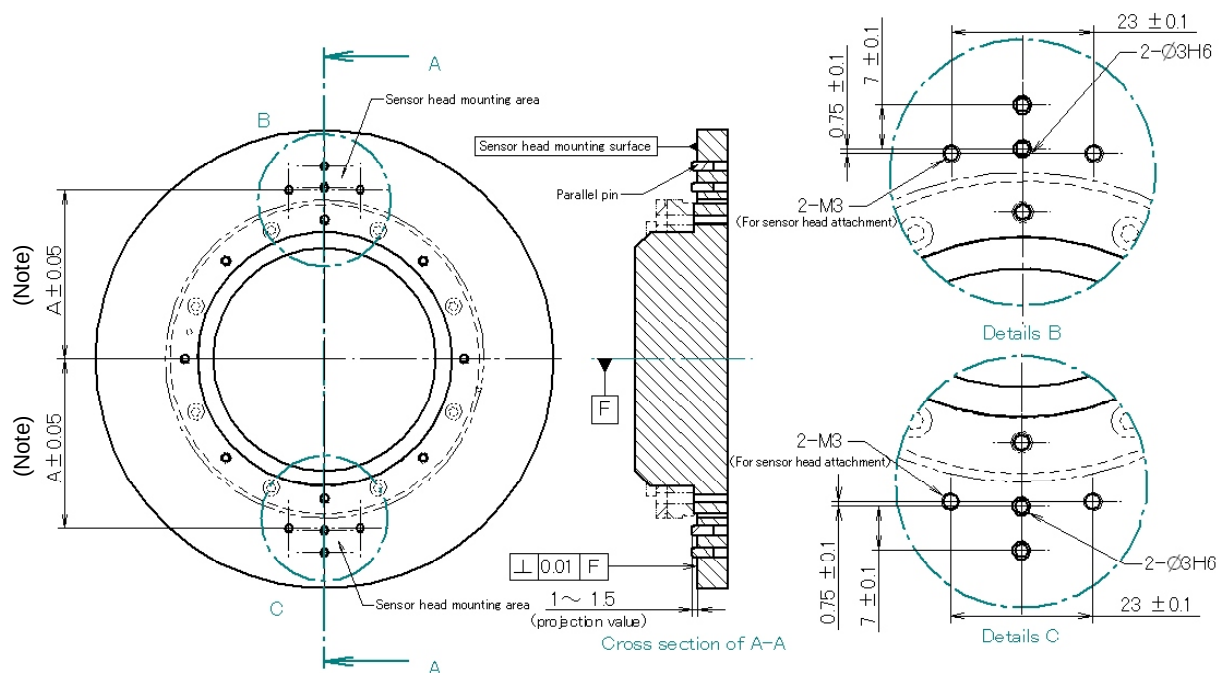


Dimension A

$$= (\text{Sensor ring outer diameter})/2 + 3.1$$

(NOTE) In designing, make sure that the positions of the taps for fastening the sensor heads after machine assembly, in stead of the part having the sensor head mounting plane, satisfy these dimensions.

## Installing the sensor ring

Center the sensor ring by using the centering track so that the runout to the rotation center is 0.01 mm or less. Moreover, in designing, ensure that in the direction along the shaft, the sensor ring mounting plane is  $1 \pm 0.3$  mm off the sensor head mounting plane. Ensure also that the perpendicularity of the sensor ring mounting plane is 0.01 mm or less from the rotation center. Apply a thread locker or the like to the screws to prevent the screws from becoming loose.

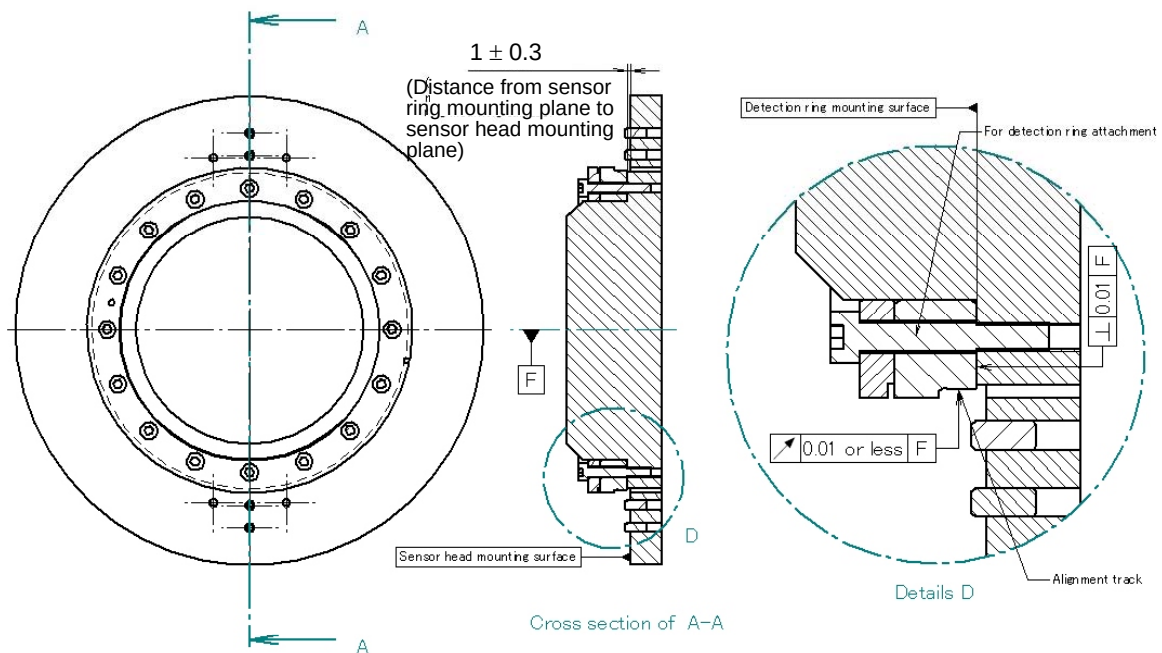

| Specification                    | Outer diameter of centering track (mm) | Positions of sensor ring mounting holes                           | Mounting screw | Recommended tightening torque (Nm) |
|----------------------------------|----------------------------------------|-------------------------------------------------------------------|----------------|------------------------------------|
| A860-2161-T411<br>A860-2163-T411 | $\phi 101$                             | 8- $\phi 3.4$ through, equally spaced on $\phi 90$ circumference  | M3             | $1.5 \pm 5\%$                      |
| A860-2161-T511<br>A860-2163-T511 | $\phi 152.2$                           | 8- $\phi 4.5$ through, equally spaced on $\phi 134$ circumference | M4             | $3.0 \pm 5\%$                      |
| A860-2161-T611<br>A860-2163-T611 | $\phi 203.4$                           | 8- $\phi 5.5$ through, equally spaced on $\phi 170$ circumference | M5             | $6.0 \pm 5\%$                      |




**NOTE**

- For centering, the outer diameter of the shaft (or sleeve) must be designed so that there is a gap of about 0.1 mm on one side between the outer surface of the shaft (or sleeve) and the inner surface of the sensor ring.
- Secure the sensor ring on an end face with screws (avoid shrink fitting to mount the sensor ring).
- The sensor ring consists of a phase Z ring and phase A/B ring, which are fastened together by using screws in advance. Never detach these screws. Spot facing is not provided. So, at the time of machine design, be careful not to cause interference with the screw heads.
- Centering must be performed with the centering track (the outer surface of the phase Z ring and the teeth pitch circle are not coaxial). When performing centering, use a tool such as a plastic hammer not to damage the gear teeth.
- Magnetic matter attached to gear teeth can lead to a detection error. After centering is completed, remove such foreign matter by air blowing. (See Section 12.1.)
- If the sensor ring is tightened with excessive torque, elastic deformation can occur in the sensor ring, resulting in deterioration in detection precision. Use the recommended tightening torque when mounting the sensor ring.

## Installing the sensor head

Install the sensor heads according to the procedure below. (The same procedure is applicable to sensor head 1 and sensor head 2.)


1. Place the sensor head on the sensor mounting surface so that the straight pins are positioned in the slot of the sensor head, and fasten the sensor head temporarily. The magnet in the sensor head and the sensor ring attract each other. When installing the sensor head, be careful not to hit the sensor head against the sensor ring with the thickness gage not placed between them (impact can damage elements in the sensor head).

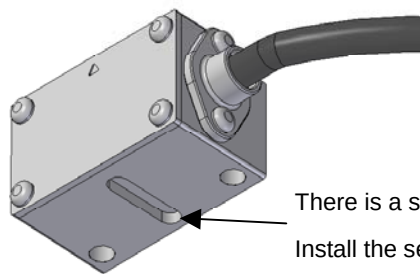

There is a slot on the bottom of the sensor head.

Install the sensor so that the straight pins are placed in the slot.

2. Insert the thickness gage (supplied as an accessory,  $t = 0.1 \text{ mm}$ ) between the sensor ring and the sensor head, and while lightly pressing the sensor head against the thickness gage, tighten the screws (recommended tightening torque:  $1.3 \text{ Nm} \pm 10\%$ ). Apply a thread locker or the like to the screws to prevent them from becoming loose.

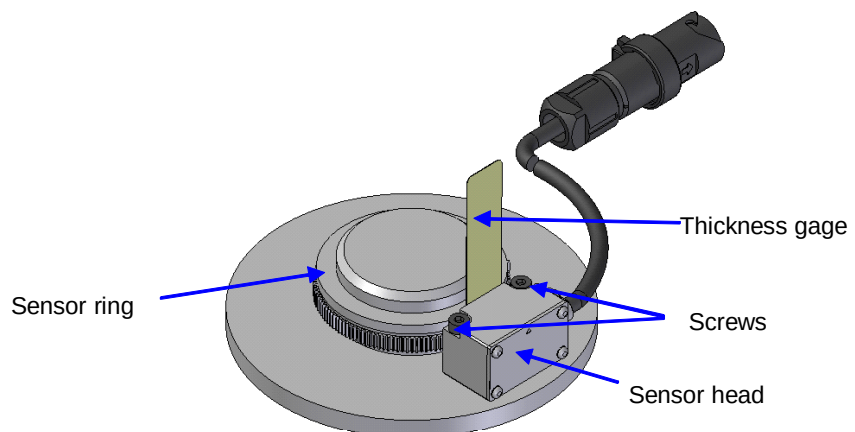

3. Pull out the thickness gage, and slowly turn the sensor ring to ensure that the sensor ring and the sensor head do not touch each other.

### 11.2.3.9 Interpolation error learning

- \* The description below is applicable to both of A860-2161-T\*\*\* and A860-2163-T\*\*\*.
- The  $\alpha iCZ$  sensor includes an automatic interpolation correction circuit that automatically learns interpolation errors and corrects them. When learning conditions are satisfied, learning is performed automatically. When the sensor rotates one or more turns, learning is completed. The learning conditions vary depending on the model. For any model, however, learning at  $30 \text{ min}^{-1}$  is recommended.
- For interpolation error learning, be sure to rotate the sensor under the following conditions after the power is turned on:

(Learning conditions)

|                                   |                                                                      |
|-----------------------------------|----------------------------------------------------------------------|
| $\alpha iCZ$ sensor 512I, 512IS   | : $25$ to $105 \text{ min}^{-1}$ , constant speed, one or more turns |
| $\alpha iCZ$ sensor 768I, 768IS   | : $20$ to $70 \text{ min}^{-1}$ , constant speed, one or more turns  |
| $\alpha iCZ$ sensor 1024I, 1024IS | : $15$ to $50 \text{ min}^{-1}$ , constant speed, one or more turns  |

Recommended learning conditions

Common to thee models :  $30 \text{ min}^{-1}$ , constant speed, one or more turns

- While power is supplied to the  $\alpha iCZ$  sensor, interpolation error learning data is maintained in the sensor. When the power is removed, the data is not maintained. Learning data is lost also when a spindle alarm is issued.
- To ensure precision, rotate the sensor under the automatic learning conditions after each power-on operation.
- When learning is not completed, the detection precision of the  $\alpha iCZ$  sensor may deteriorate.
- If it is difficult to rotate the sensor at least one turn for interpolation error learning, repeat forward and reverse rotations under the above rotation conditions until the sum of angular displacements in one direction becomes one turn or more.

### 11.2.3.10 Notes

---

#### Magnetic powder attached to the sensor ring

- \* The description below is applicable to both of A860-2161-T\*\*\* and A860-2163-T\*\*\*.

The  $\alpha i$ CZ sensor detects an angular displacement according to a change in magnetic flux density between the sensor heads and sensor ring. So, if magnetic powder is attached to a location of the sensor ring, the magnetic flux density at that location changes locally, deteriorating the precision of detection. This precision deterioration occurs each time the location to which magnetic powder is attached passes sensor head 1 and sensor head 2, that is, at every 180°. This deterioration leads to an increased positioning error, torque command variation, abnormal sound, vibration, and so forth.


After installing the sensor, be sure to blow the sensor ring by air. Moreover, to prevent magnetic powder and chips from being attached to the sensor ring and sensor heads during operation, provide protection against dust and water on the machine side.

If nonmagnetic matter (such as aluminum, austenitic stainless steel, resin, and oil) is attached to the sensor ring and sensor head, such precision deterioration as mentioned above does not occur. However, foreign matter caught between the sensor ring and a sensor head can mechanically damage the sensor head. So, attachment of foreign matter, even if nonmagnetic, is undesirable.

### 11.2.3.11 Maintenance target parts


As shown below, the  $\alpha i$ CZ sensor consists of four parts: sensor ring (phase A/B ring and phase Z ring coupled by screws), sensor head 1, sensor head 2, and sensor circuit. Each single part can be maintained separately. So, place an order on each part as needed according to the specification numbers indicated below.

#### [ $\alpha i$ CZ sensor (for built-in spindle motor) A860-2161-T\*\*\*]

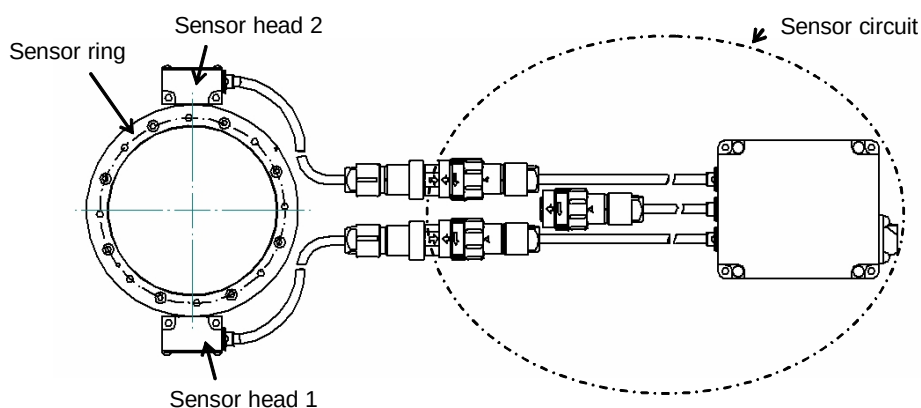

| Parent specification<br>Part specification | $\alpha i$ CZ sensor 512I<br>A860-2161-T411   | $\alpha i$ CZ sensor 768I<br>A860-2161-T511 | $\alpha i$ CZ sensor 1024I<br>A860-2161-T611 |
|--------------------------------------------|-----------------------------------------------|---------------------------------------------|----------------------------------------------|
| Sensor ring                                | A860-2160-V901                                | A860-2160-V902                              | A860-2160-V903                               |
| Sensor head 1                              | A860-2162-V001 (common to all specifications) |                                             |                                              |
| Sensor head 2                              | A860-2162-V012 (common to all specifications) |                                             |                                              |
| Sensor circuit                             | A860-2161-V201 (common to all specifications) |                                             |                                              |

#### [ $\alpha i$ CZ sensor (for spindle) A860-2163-T\*\*\*]

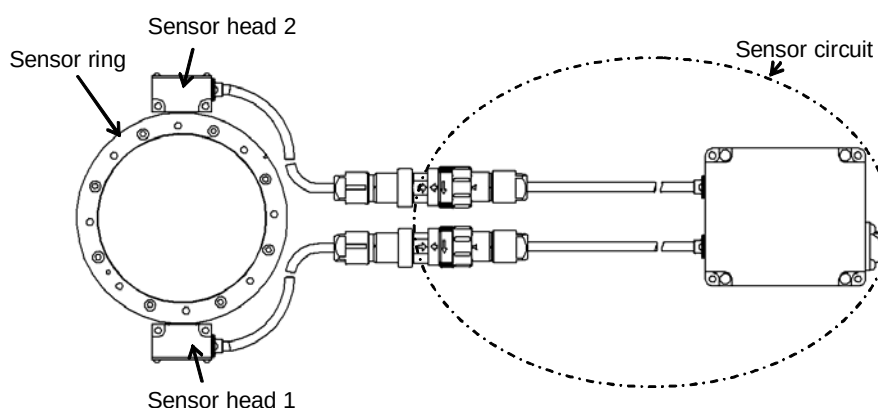


| Parent specification<br>Part specification | $\alpha i$ CZ sensor 512IS<br>A860-2163-T411  | $\alpha i$ CZ sensor 768IS<br>A860-2163-T511 | $\alpha i$ CZ sensor 1024IS<br>A860-2163-T611 |
|--------------------------------------------|-----------------------------------------------|----------------------------------------------|-----------------------------------------------|
| Sensor ring                                | A860-2160-V901                                | A860-2160-V902                               | A860-2160-V903                                |
| Sensor head 1                              | A860-2162-V001 (common to all specifications) |                                              |                                               |
| Sensor head 2                              | A860-2162-V012 (common to all specifications) |                                              |                                               |
| Sensor circuit                             | A860-2163-V201 (common to all specifications) |                                              |                                               |

### 11.2.3.12 Output signal check method

\* The description below is applicable to both of A860-2161-T\*\*\* and A860-2163-T\*\*\*.

When checking the signal waveform directly, see the illustration below.


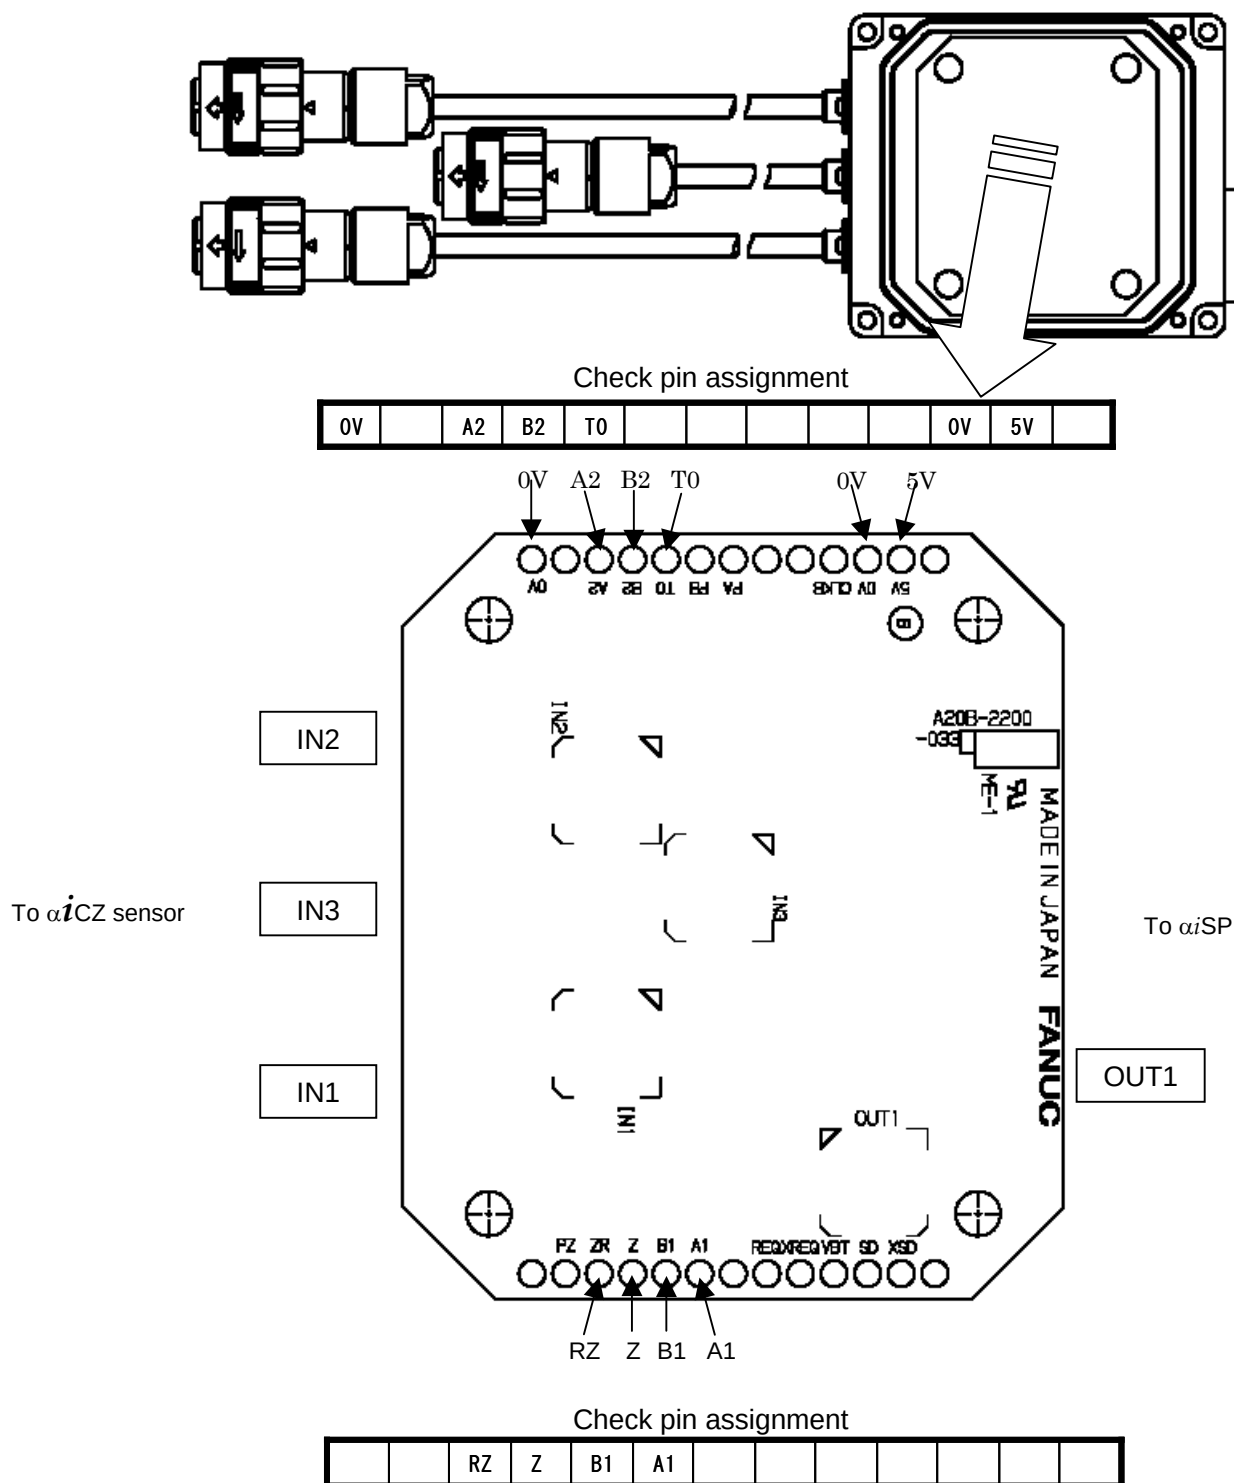


- Supply power to the 0 V and 5 V pins.
- The Lissajous figure of the phase A/B output signal is a complete circle.

Phase A/B and phase Z signal waveform (measured on sensor circuit check pins at room temperature and 500  $\text{min}^{-1}$ )

| Signal name                                 | Check pin | Output amplitude     | Offset                                                                                       |
|---------------------------------------------|-----------|----------------------|----------------------------------------------------------------------------------------------|
| Sensor head 1 phase A (after amplification) | A1        | 1,300 to 3,000 mVp-p | $\pm 180\text{mV}$                                                                           |
| Sensor head 1 phase B (after amplification) | B1        |                      |                                                                                              |
| Sensor head 2 phase A (after amplification) | A2        | 1,300 to 3,000 mVp-p | $\pm 180\text{mV}$                                                                           |
| Sensor head 2 phase B (after amplification) | B2        |                      |                                                                                              |
| Sensor head 1 phase Z                       | Z         | 400 to 600 mVp-p     | 70 to 150 mV<br>Measure the DC components of Z and RZ and use the differential as an offset. |
| Sensor head 1 RZ                            | RZ        |                      |                                                                                              |

(Measure each signal by connecting the ground of the oscilloscope to T0.)

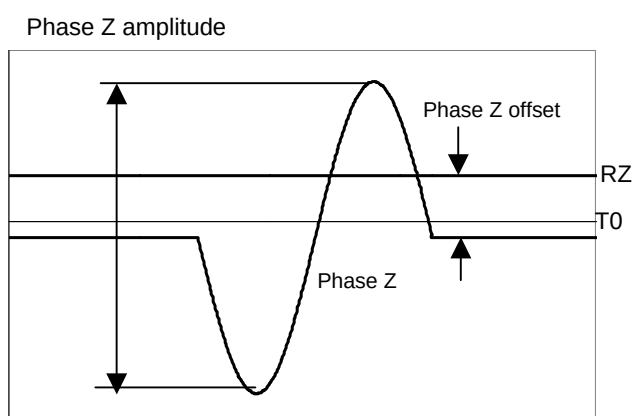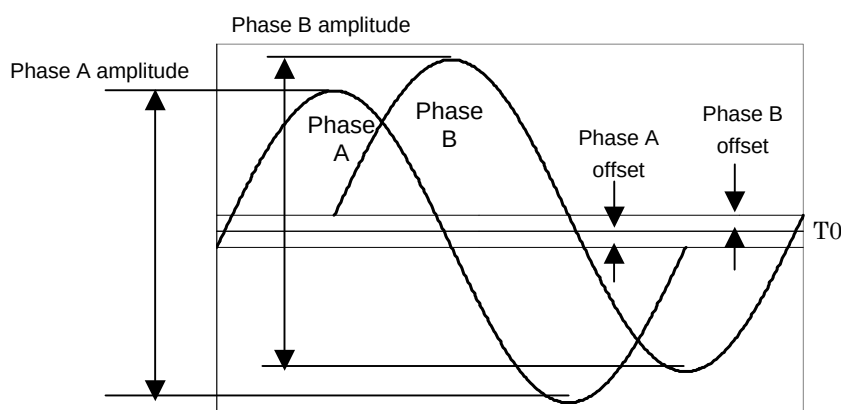

The check pins used with the  $\alpha iCZ$  sensor fit in the following housing and crimp terminals:

Housing : HKP-13FS01 (Honda Tsushin Kogyo)

Crimp terminal: HKP-F113 (Honda Tsushin Kogyo), AWG#24 to 28 ( $\phi 1.0$  to 1.5 mm)  
HKP-F213 (Honda Tsushin Kogyo), AWG#28 to 32 ( $\phi 0.5$  to 0.8 mm)

Crimping tool : KP309D (Honda Tsushin Kogyo)

### 11.2.3.13 Spindle alarms

| Alarm number |      |        | LED indication | Alarm name                            | Alarm description                                                                                                                       |
|--------------|------|--------|----------------|---------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|
| 15i          | 16i  | 30i    | SP             |                                       |                                                                                                                                         |
| SP0132       | 9132 | SP9132 | d2             | Serial data error                     | Communication between the sensor and spindle amplifier is not performed.                                                                |
| SP0133       | 9133 | SP9133 | d3             | Data transfer error                   | Serial data transmission/reception is not performed normally.                                                                           |
| SP0134       | 9134 | SP9134 | d4             | Soft phase alarm                      | An abnormal acceleration rate was detected.                                                                                             |
| SP0139       | 9139 | SP9139 | d9             | Pulse error alarm                     | An error occurred in the interpolation circuit.                                                                                         |
| SP0140       | 9140 | SP9140 | E0             | Count error alarm                     | The number of pulses between one phase Z and another is shifted by 4λ or more.                                                          |
| SP0141       | 9141 | SP9141 | E1             | Sensor one-rotation signal undetected | No absolute position is established within 5 turns immediately after communication between the spindle amplifier and sensor is started. |



# APPENDIX



# A


## **FITTING A LIGHTNING SURGE PROTECTION DEVICE**

---


This appendix describes how to install a lightning surge protector and provides notes on installation.

## A.1 200-V INPUT SERIES POWER SUPPLY

## When a line-to-line and line-to-ground lightning surge protector is used

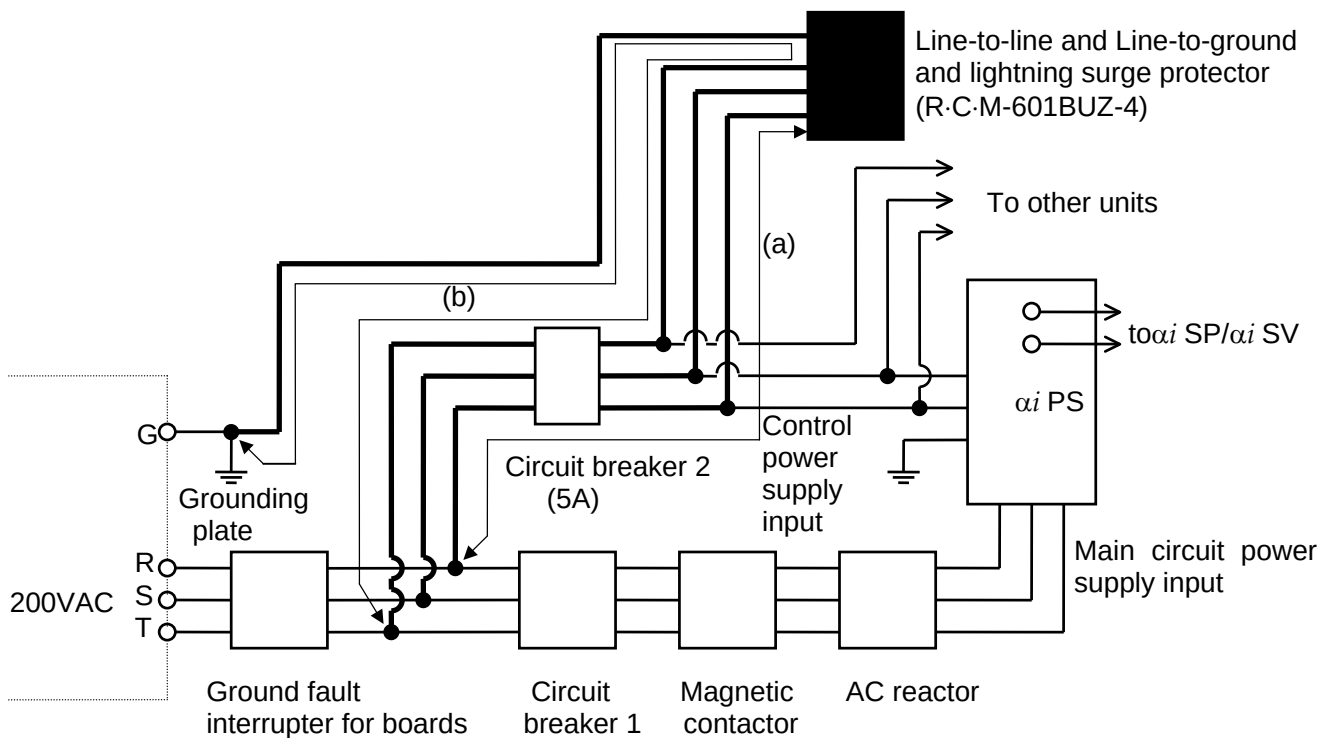


## When line-to-line and line-to-ground lightning surge protectors are individually used

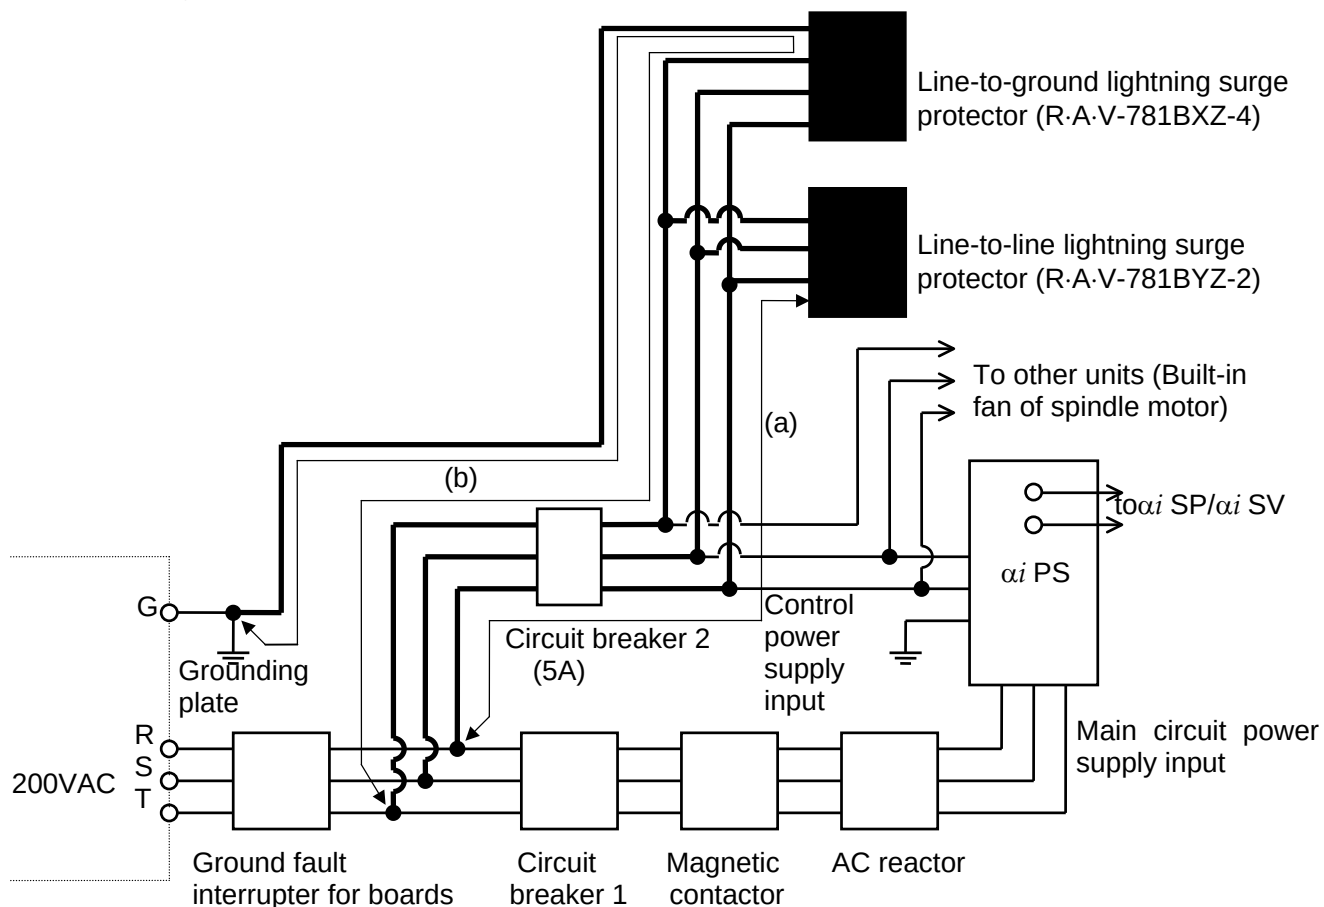

### CAUTION

If a voltage of 200 V is supplied from a 400-V power supply (with a neutral point used), a lightning surge protector should be used for 400 V; no lightning surge protector is needed for 200 V.

## A.2 400-V INPUT SERIES POWER SUPPLY

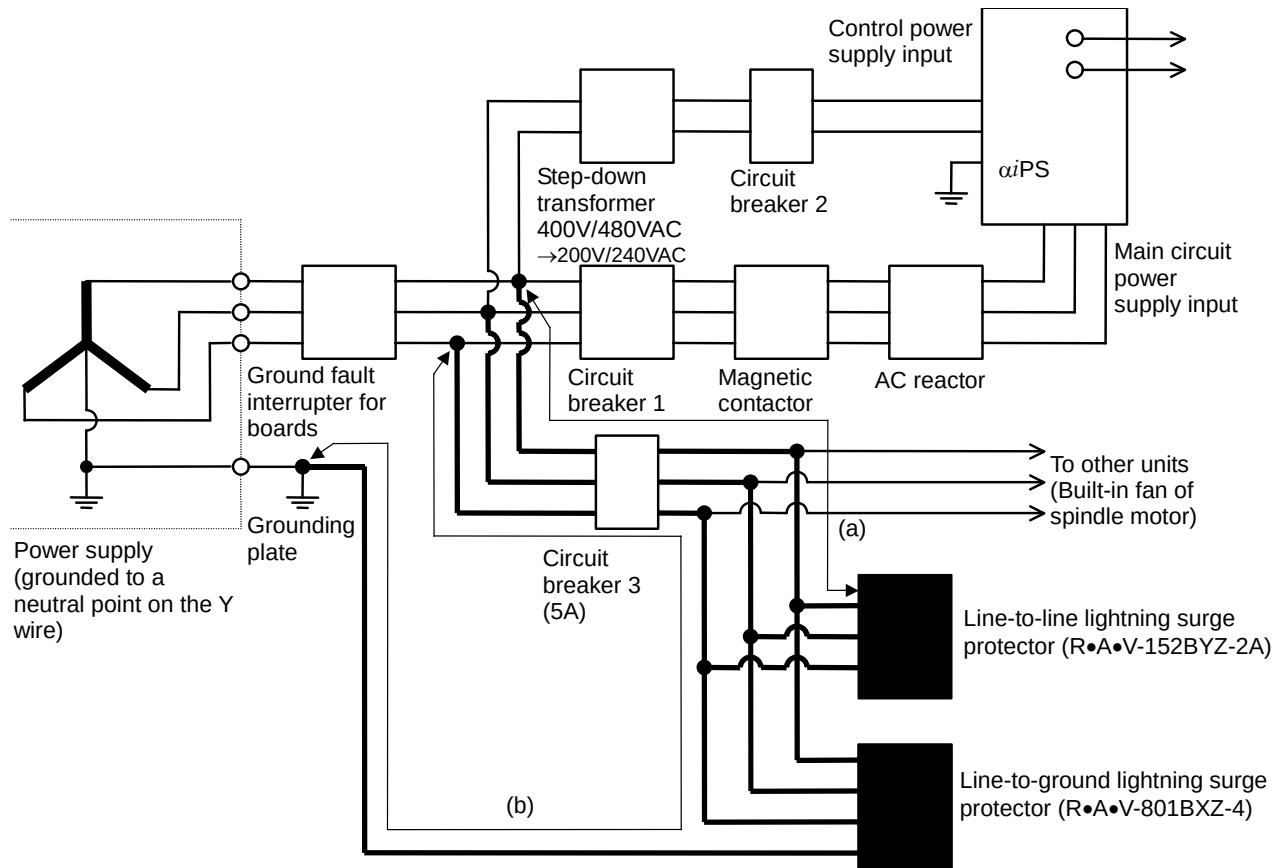

### ⚠ CAUTION

When the spindle motor  $\alpha iI$  1HV,  $\alpha iI$  1.5HV,  $\alpha iI$  2HV, or  $\alpha iI$  3HV is used, specification of the fan motor for  $\alpha iI_T$  1HV,  $\alpha iI_T$  2HV, and  $\alpha iI_T$  3HV is below :

1  $\phi$  200/230VAC

- 2 If a voltage of 200 V is supplied from a 400-V power supply (with a neutral point used), a lightning surge protector should be used for 400 V; no lightning surge protector is needed for 200 V.

## A.3 CAUTIONS

---

- (1) To increase the efficiency of lightning surge absorption, the wires indicated by bold lines should be as short as possible.  
Wire cross-sectional area : 2 mm<sup>2</sup> or more  
Wire length :  
The total length of the cables used for line-to-line lightning surge protector (a) and that used for line-to-ground lightning surge protector (b) must not exceed 2 m.
- (2) When performing a dielectric strength test by applying an overvoltage to the power line, line-to-ground lightning surge protector must be removed to enable the applied voltage to be maintained.
- (3) The circuit breaker 2 (5A) or circuit breaker 3 (5A) works for line protection when the lightning surge absorber is short-circuited because of a surge higher than its rating being applied.
- (4) Because current does not flow through lightning surge protector in a normal state, the circuit breaker 2 (5A) or circuit breaker 3 (5A) can be used together with the surge absorbers as well as with other equipment.

# B

## CABLES

This appendix describes the cables used for the 20-pin interface connectors.

The cables are basically the same as those used for the FS16/18.

The table below lists the cables we have developed for interface connectors.

Contact the manufacturers as required.

| Cable name              | Purpose                                                                                                                               |                      | Configuration                                              | FANUC specification | Manufacturer                                                     | Manufacturer specification                                 |
|-------------------------|---------------------------------------------------------------------------------------------------------------------------------------|----------------------|------------------------------------------------------------|---------------------|------------------------------------------------------------------|------------------------------------------------------------|
| 10-pair cable           | For general use                                                                                                                       |                      | 0.09mm <sup>2</sup> 10 pairs                               | A66L-0001-0284#10P  | Hitachi Electric Cable Co., Ltd.<br>Oki Electric Cable Co., Ltd. | UL20276-SB(0)<br>10P×28AWG(7/0.127)<br>7/0.127 10P VX10-SV |
| Composite 7-core cable  | For Pulsecoder                                                                                                                        | 28m or less Flexible | 0.3mm <sup>2</sup> 5 cables<br>0.20mm <sup>2</sup> 1 pairs | A66L-0001-0460      | Hitachi Electric Cable Co., Ltd.                                 | UL20276-SB(FLEX)<br>5×23AWG+1P×25AWG                       |
|                         |                                                                                                                                       | 50m or less Flexible | 0.5mm <sup>2</sup> 5 cables<br>0.20mm <sup>2</sup> 1 pairs | A66L-0001-0462      | Hitachi Electric Cable Co., Ltd.                                 | UL20276-SB(FLEX)<br>5×20AWG+1P×25AWG                       |
|                         |                                                                                                                                       | 28m or less Fixed    | 0.3mm <sup>2</sup> 5 cables<br>0.18mm <sup>2</sup> 1 pairs | A66L-0001-0481      | Hitachi Electric Cable Co., Ltd.                                 | UL20276-SB(0)<br>5×23AWG+1P×25AWG                          |
|                         |                                                                                                                                       | 50m or less Fixed    | 0.5mm <sup>2</sup> 5 cables<br>0.18mm <sup>2</sup> 1 pairs | A66L-0001-0491      | Hitachi Electric Cable Co., Ltd.                                 | UL20276-SB(0)<br>5×20AWG+1P×25AWG                          |
| Composite 10-core cable | For $\alpha$ iM sensor (for $\alpha$ iL 0.5)<br>For $\alpha$ iMZ sensor (for $\alpha$ iL 0.5)<br>For $\alpha$ iBZ sensor (small type) |                      | 0.3mm <sup>2</sup> 2 cables<br>0.2mm <sup>2</sup> 4 pairs  | A66L-0001-0482      | Hitachi Electric Cable Co., Ltd.                                 | UL20276-SB(FLEX)<br>2×23AWG+4P×25AWG                       |
| Composite 12-core cable | For $\alpha$ i position coder<br>For $\alpha$ i position coder S                                                                      |                      | 0.5mm <sup>2</sup> 6 cables<br>0.18mm <sup>2</sup> 3 pairs | A66L-0001-0286      | Hitachi Electric Cable Co., Ltd.                                 | F-CO-VV(0)-SB<br>6×0.5SQ+3P×0.18SQ                         |
|                         |                                                                                                                                       |                      |                                                            |                     | Oki Electric Cable Co., Ltd.                                     | MIX12C(7/0.18,<br>20/0.18)HRS-SV                           |
| 10-pair cable           | For $\alpha$ i CZ sensor<br>For $\alpha$ iBZ sensor (conventional type)                                                               |                      | 0.18mm <sup>2</sup> 10 pairs                               | A66L-0001-0367      | Shinko Electric Industries Co., Ltd.                             | FNC-019                                                    |
| Composite 16-core cable | For $\alpha$ i M sensor<br>For $\alpha$ i MZ sensor<br>For $\alpha$ i BZ sensor                                                       |                      | 0.5mm <sup>2</sup> 6 cables<br>0.18mm <sup>2</sup> 5 pairs | A66L-0001-0368      | Shinko Electric Industries Co., Ltd.                             | FNC-021                                                    |



## B.1 10-PAIR CABLE

### Specifications

| Item                   |                                | Unit              | Specifications                                                                                                                                                    |
|------------------------|--------------------------------|-------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product No.            |                                | —                 | A66L-0001-0284#10P                                                                                                                                                |
| Manufacturer           |                                | —                 | Hitachi Cable,Ltd.<br>Oki Electric Cable, Co.,Ltd.                                                                                                                |
| Rating                 |                                | —                 | 60°C, 30V:UL2789 80°C, 30V:UL80276                                                                                                                                |
| Material               | Conductor                      | —                 | Stranded wire of tinned annealed copper (ASTM B-286)                                                                                                              |
|                        | Insulator                      | —                 | Cross-linked vinyl                                                                                                                                                |
|                        | Shield braid                   | —                 | Tinned annealed copper wire                                                                                                                                       |
|                        | Sheath                         | —                 | Heat-resistant oilproof vinyl                                                                                                                                     |
| Number of pairs        |                                | Pairs             | 10                                                                                                                                                                |
| Conductor              | Size                           | AWG               | 28                                                                                                                                                                |
|                        | Structure                      | Conductors/<br>mm | 7/0.127                                                                                                                                                           |
|                        | Outside diameter               | mm                | 0.38                                                                                                                                                              |
| Insulator              | Thickness                      | mm                | 0.1 (Thinnest portion : 0.08(3. 1mils))                                                                                                                           |
|                        | Outside diameter (approx.)     | mm                | 0.58                                                                                                                                                              |
|                        | Core style (rating)            | mm                | UL15157(80°C, 30V)                                                                                                                                                |
| Twisted pair           | Outside diameter (approx.)     | mm                | 1.16                                                                                                                                                              |
|                        | Pitch                          | mm                | 20 or less                                                                                                                                                        |
| Lay                    |                                | —                 | Collect the required number of twisted pairs into a cable, then wrap binding tape around the cable. To make the cable round, apply a cable separator as required. |
| Lay diameter (approx.) |                                | mm                | 3.5                                                                                                                                                               |
| Drain wire             |                                | Conductors/<br>mm | Hitachi Cable : Not available<br>Oki Electric Cable : Available,10/0.12                                                                                           |
| Shield braid           | Element wire diameter          | mm                | 0.12                                                                                                                                                              |
|                        | Braid density                  | %                 | 85 or more                                                                                                                                                        |
| Sheath                 | Color                          | —                 | Black                                                                                                                                                             |
|                        | Thickness                      | mm                | 1.0                                                                                                                                                               |
|                        | Outside diameter (approx.)     | mm                | 6.2                                                                                                                                                               |
| Standard length        |                                | mm                | 200                                                                                                                                                               |
| Packing method         |                                | mm                | Bundle                                                                                                                                                            |
| Electrical performance | Resistance of conductor (20°C) | Ω/km              | 233 or less                                                                                                                                                       |
|                        | Insulation resistance (20°C)   | MΩ-km             | 10 or less                                                                                                                                                        |
|                        | Dielectric strength (AC)       | V/min             | 300                                                                                                                                                               |
| Flame resistance       |                                | —                 | Shall pass flame resistance test VW-1SC of UL standards.                                                                                                          |

Cable structure

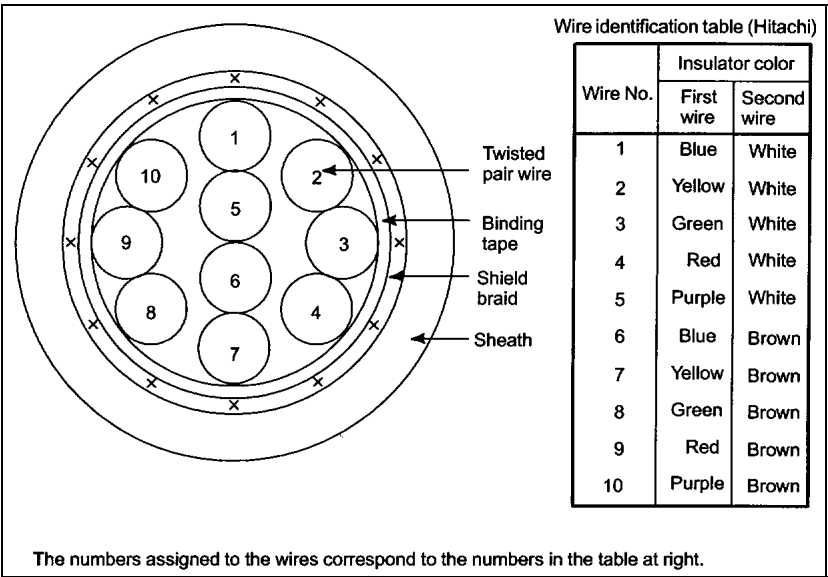


Fig.B.1(a) Cable made by Hitachi Electric Cable

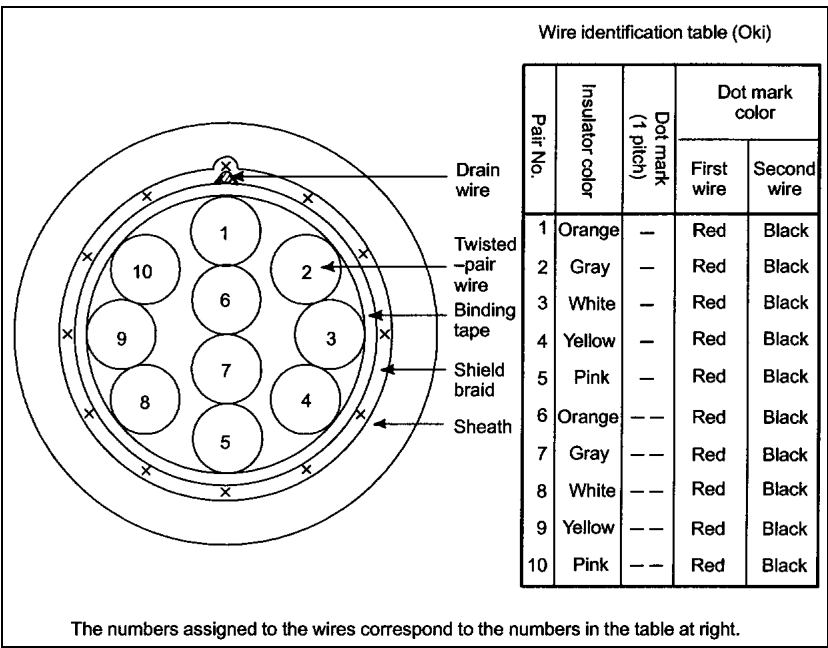


Fig.B.2(b) Cable made by Oki Electric Cable

## B.2 COMPOSITE 7-CORE CABLE


### A66L-0001-0460

#### - Specifications

| Item                        |                                               | Unit            | Specifications                                         |                       |
|-----------------------------|-----------------------------------------------|-----------------|--------------------------------------------------------|-----------------------|
| Product No.                 |                                               | –               | A66L-0001-0460                                         |                       |
| Manufacturer                |                                               | –               | Hitachi Electric Cable Co., Ltd.                       |                       |
| Rating                      |                                               | –               | 80°C, 30V                                              |                       |
| Material                    | Conductor, braid-shielded wire, drain wire    | –               | Strand wire of tinned annealed copper (JIS C3152)      |                       |
|                             | Insulator                                     | –               | Fluorine plastics (ETFE)                               |                       |
|                             | Sheath                                        | –               | Oilproof, heat-resistant vinyl                         |                       |
| Number of wires (wire nos.) |                                               | Cores           | 5 (1 to 5)                                             | 2 (one pair) (6 to 7) |
| Conductor                   | Size                                          | mm <sup>2</sup> | 0.3                                                    | 0.20                  |
|                             | Structure                                     | Conductors /mm  | 60/0.08                                                | 40/0.08               |
|                             | Conductors                                    | mm              | 0.72                                                   | 0.58                  |
| Insulator                   | Standard thickness                            | mm              | 0.15                                                   | 0.15                  |
|                             | Outside diameter                              | mm              | 1.02                                                   | 0.88                  |
| Twisted pair                | Outside diameter                              | mm              | –                                                      | 1.76                  |
|                             | Pitch (approx.)                               | mm              | –                                                      | 13                    |
| Lay diameter (approx.)      |                                               | mm              | 3.4                                                    |                       |
| Drain wire                  | Size                                          | mm <sup>2</sup> | 0.15                                                   |                       |
|                             | Structure                                     | Wires/mm        | 30/0.08                                                |                       |
|                             | Outside diameter                              | mm              | 0.51                                                   |                       |
| Shield braid                | Element wire diameter                         | mm              | 0.12                                                   |                       |
|                             | Thickness                                     | mm              | 0.3                                                    |                       |
|                             | Braid density                                 | %               | 85 or more                                             |                       |
|                             | Outside diameter (approx.)                    | mm              | 4.2                                                    |                       |
| Sheath<br>Sheath            | Color                                         | –               | Black                                                  |                       |
|                             | Standard thickness                            | mm              | 1.0                                                    |                       |
|                             | Standard outside diameter (approx.)           | mm              | 6.2                                                    |                       |
|                             | Outside diameter allowance                    | mm              | 5.7 to 7.3 (Note)                                      |                       |
| Standard length             |                                               | m               | 200                                                    |                       |
| Packing method              |                                               | –               | Bundle                                                 |                       |
| Electrical<br>performance   | Resistance of conductor (at 20°C) (wire nos.) | Ω/km            | 69.5 or less (1 to 5)                                  | 109 or less (6 to 7)  |
|                             | Insulation resistance (20°C)                  | MΩ-km           | 100 or more                                            |                       |
|                             | Dielectric strength (AC)                      | –               | 500VAC for 5 minutes                                   |                       |
| Flame resistance            |                                               | –               | Shall pass flame resistance test VW-1 of UL standards. |                       |

#### NOTE

The maximum outside diameter applies to portions other than the drain wire.

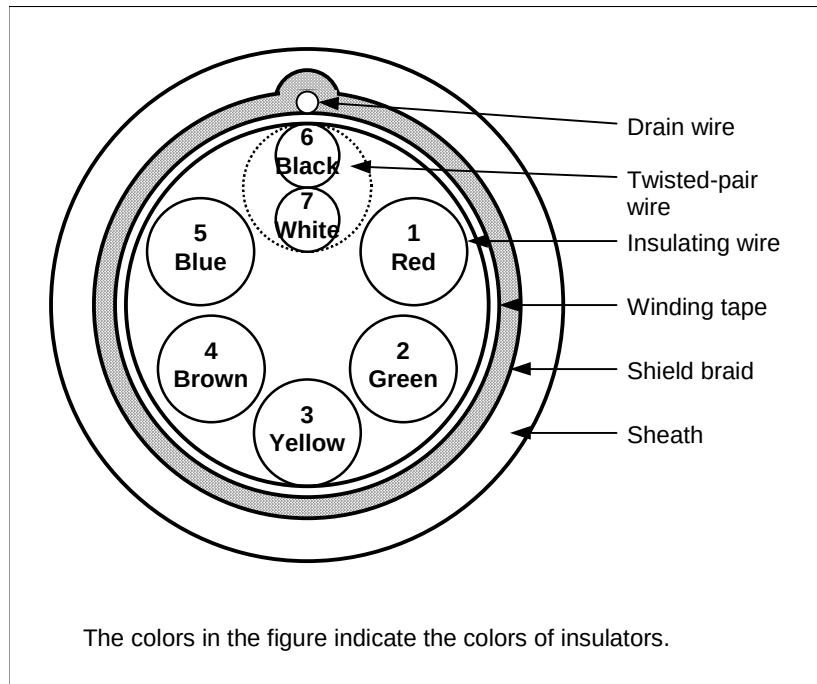
**- Cable structure**

**A66L-0001-0462****- Specifications**

| Item                        |                                               | Unit            | Specifications                                         |                       |
|-----------------------------|-----------------------------------------------|-----------------|--------------------------------------------------------|-----------------------|
| Product No.                 |                                               | —               | A66L-0001-0462                                         |                       |
| Manufacturer                |                                               | —               | Hitachi Electric Cable Co., Ltd.                       |                       |
| Rating                      |                                               | —               | 80°C, 30V                                              |                       |
| Material                    | Conductor, braid-shielded wire, drain wire    | —               | Strand wire of tinned annealed copper (JIS C3152)      |                       |
|                             | Insulator                                     | —               | Fluorine plastics (ETFE)                               |                       |
|                             | Sheath                                        | —               | Oilproof, heat-resistant vinyl                         |                       |
| Number of wires (wire nos.) |                                               | Cores           | 5 (1 to 5)                                             | 2 (one pair) (6 to 7) |
| Conductor                   | Size                                          | mm <sup>2</sup> | 0.5                                                    | 0.20                  |
|                             | Structure                                     | Conductors /mm  | 104/0.08                                               | 40/0.08               |
|                             | Conductors                                    | mm              | 0.94                                                   | 0.58                  |
|                             | Standard thickness                            | mm              | 0.2                                                    | 0.15                  |
| Insulator                   | Outside diameter                              | mm              | 1.34                                                   | 0.88                  |
|                             | Outside diameter                              | mm              | —                                                      | 1.76                  |
| Twisted pair                | Pitch (approx.)                               | mm              | —                                                      | 13                    |
| Lay diameter (approx.)      |                                               | mm              | 4.2                                                    |                       |
| Drain wire                  | Size                                          | mm <sup>2</sup> | 0.15                                                   |                       |
|                             | Structure                                     | Wires/mm        | 30/0.08                                                |                       |
|                             | Outside diameter                              | mm              | 0.51                                                   |                       |
| Shield braid                | Element wire diameter                         | mm              | 0.12                                                   |                       |
|                             | Thickness                                     | mm              | 0.3                                                    |                       |
|                             | Braid density                                 | %               | 85 or more                                             |                       |
|                             | Outside diameter (approx.)                    | mm              | 5.0                                                    |                       |
| Sheath                      | Color                                         | —               | Black                                                  |                       |
|                             | Standard thickness                            | mm              | 1.0                                                    |                       |
|                             | Standard outside diameter (approx.)           | mm              | 7.0                                                    |                       |
|                             | Outside diameter allowance                    | mm              | 6.5 to 8.0 (Note)                                      |                       |
| Standard length             |                                               | m               | 200                                                    |                       |
| Packing method              |                                               | —               | Bundle                                                 |                       |
| Electrical performance      | Resistance of conductor (at 20°C) (wire nos.) | Ω/km            | 40.1 or less (1 to 5)                                  | 109 or less (6 to 7)  |
|                             | Insulation resistance (20°C)                  | MΩ·km           | 100 or more                                            |                       |
|                             | Dielectric strength (AC)                      | —               | 500VAC for 5 minutes                                   |                       |
| Flame resistance            |                                               | —               | Shall pass flame resistance test VW-1 of UL standards. |                       |

**NOTE**

The maximum outside diameter applies to portions other than the drain wire.

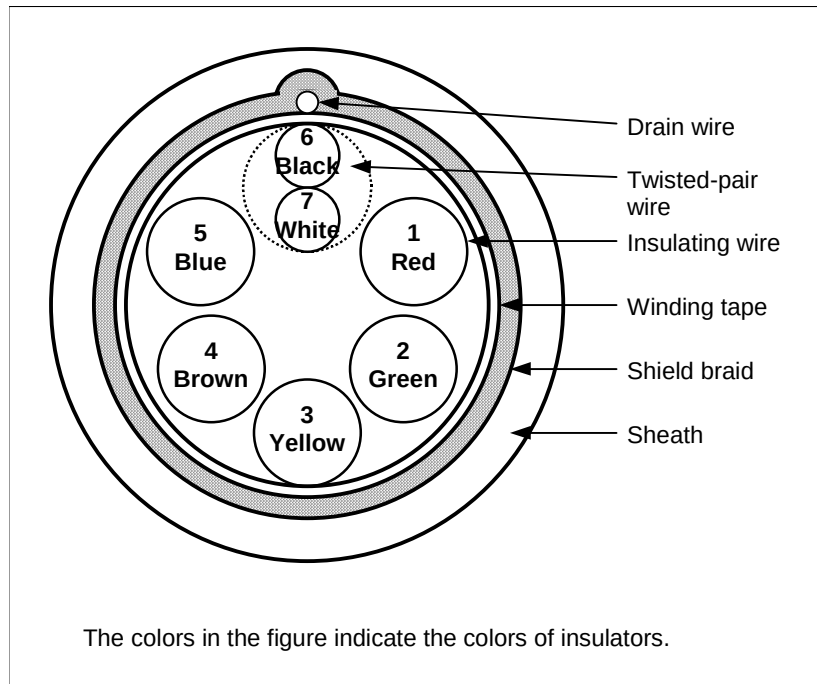**- Cable structure**


**A66L-0001-0481****- Specifications**

| Item                        |                                               | Unit            | Specifications                                         |                       |
|-----------------------------|-----------------------------------------------|-----------------|--------------------------------------------------------|-----------------------|
| Product No.                 |                                               | —               | A66L-0001-0481                                         |                       |
| Manufacturer                |                                               | —               | Hitachi Electric Cable Co., Ltd.                       |                       |
| Rating                      |                                               | —               | 80°C, 30V                                              |                       |
| Material                    | Conductor, braid-shielded wire, drain wire    | —               | Strand wire of tinned annealed copper (JIS C3152)      |                       |
|                             | Insulator                                     | —               | Heat-resistant vinyl                                   |                       |
|                             | Sheath                                        | —               | Oilproof, heat-resistant vinyl                         |                       |
| Number of wires (wire nos.) |                                               | Cores           | 5 (1 to 5)                                             | 2 (one pair) (6 to 7) |
| Conductor                   | Size                                          | mm <sup>2</sup> | 0.3                                                    | 0.18                  |
|                             | Structure                                     | Conductors /mm  | 12/0.18                                                | 7/0.18                |
|                             | Conductors                                    | mm              | 0.72                                                   | 0.54                  |
| Insulator                   | Standard thickness                            | mm              | 0.25                                                   | 0.25                  |
|                             | Outside diameter                              | mm              | 1.22                                                   | 0.94                  |
| Twisted pair                | Outside diameter                              | mm              | —                                                      | 1.88                  |
|                             | Pitch (approx.)                               | mm              | —                                                      | 20                    |
| Lay diameter (approx.)      |                                               | mm              | 3.9                                                    |                       |
| Drain wire                  | Size                                          | mm <sup>2</sup> | 0.18                                                   |                       |
|                             | Structure                                     | Wires/mm        | 7/0.18                                                 |                       |
|                             | Outside diameter                              | mm              | 0.54                                                   |                       |
| Shield braid                | Element wire diameter                         | mm              | 0.12                                                   |                       |
|                             | Thickness                                     | mm              | 0.3                                                    |                       |
|                             | Braid density                                 | %               | 85 or more                                             |                       |
|                             | Outside diameter (approx.)                    | mm              | 4.6                                                    |                       |
| Sheath                      | Color                                         | —               | Black                                                  |                       |
|                             | Standard thickness                            | mm              | 0.8                                                    |                       |
|                             | Standard outside diameter (approx.)           | mm              | 6.2                                                    |                       |
|                             | Outside diameter allowance                    | mm              | 5.7 to 7.3 (Note)                                      |                       |
| Standard length             |                                               | m               | 200                                                    |                       |
| Packing method              |                                               | —               | Bundle                                                 |                       |
| Electrical performance      | Resistance of conductor (at 20°C) (wire nos.) | Ω/km            | 65.7 or less (1 to 5)                                  | 113 or less (6 to 7)  |
|                             | Insulation resistance (20°C)                  | MΩ-km           | 15 or more                                             |                       |
|                             | Dielectric strength (AC)                      | —               | 500VAC for 5 minutes                                   |                       |
| Flame resistance            |                                               | —               | Shall pass flame resistance test VW-1 of UL standards. |                       |

**NOTE**

The maximum outside diameter applies to portions other than the drain wire.

### - Cable structure

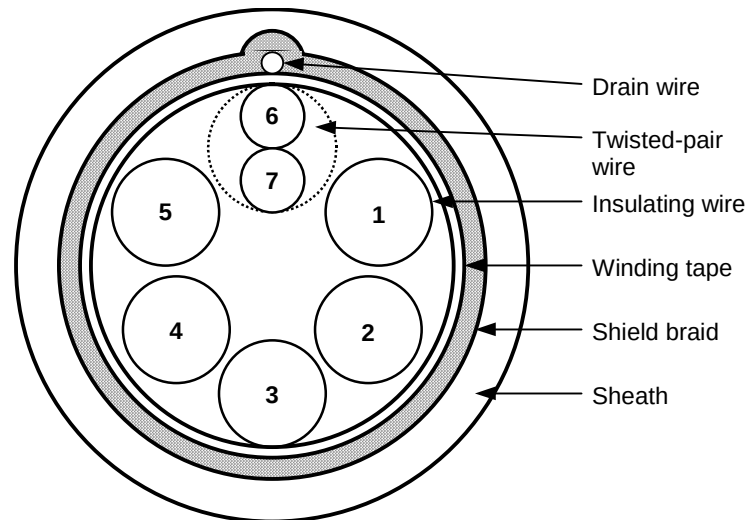

The numbers assigned to the wires correspond to the numbers in the table below.

| Wire No. | Insulator color | Dot mark color |
|----------|-----------------|----------------|
| 1        | Yellow          | --             |
| 2        | Yellow          | Black          |
| 3        | Yellow          | Red            |
| 4        | Bright green    | Black          |
| 5        | Bright green    | Red            |
| 6        | Light brown     | Black          |
| 7        | Light brown     | Red            |




**A66L-0001-0491****- Specifications**

| Item                        |                                               | Unit            | Specifications                                         |                       |
|-----------------------------|-----------------------------------------------|-----------------|--------------------------------------------------------|-----------------------|
| Product No.                 |                                               | —               | A66L-0001-0491                                         |                       |
| Manufacturer                |                                               | —               | Hitachi Electric Cable Co., Ltd.                       |                       |
| Rating                      |                                               | —               | 80°C, 30V                                              |                       |
| Material                    | Conductor, braid-shielded wire, drain wire    | —               | Strand wire of tinned annealed copper (JIS C3152)      |                       |
|                             | Insulator                                     | —               | Heat-resistant vinyl                                   |                       |
|                             | Sheath                                        | —               | Oilproof, heat-resistant vinyl                         |                       |
| Number of wires (wire nos.) |                                               | Cores           | 5 (1 to 5)                                             | 2 (one pair) (6 to 7) |
| Conductor                   | Size                                          | mm <sup>2</sup> | 0.5                                                    | 0.18                  |
|                             | Structure                                     | Conductors /mm  | 20/0.18                                                | 7/0.18                |
|                             | Conductors                                    | mm              | 0.93                                                   | 0.54                  |
| Insulator                   | Standard thickness                            | mm              | 0.25                                                   | 0.25                  |
|                             | Outside diameter                              | mm              | 1.43                                                   | 0.94                  |
| Twisted pair                | Outside diameter                              | mm              | —                                                      | 1.88                  |
|                             | Pitch (approx.)                               | mm              | —                                                      | 23                    |
| Lay diameter (approx.)      |                                               | mm              | 4.4                                                    |                       |
| Drain wire                  | Size                                          | mm <sup>2</sup> | 0.18                                                   |                       |
|                             | Structure                                     | Wires/mm        | 7/0.18                                                 |                       |
|                             | Outside diameter                              | mm              | 0.54                                                   |                       |
| Shield braid                | Element wire diameter                         | mm              | 0.12                                                   |                       |
|                             | Thickness                                     | mm              | 0.3                                                    |                       |
|                             | Braid density                                 | %               | 85 or more                                             |                       |
|                             | Outside diameter (approx.)                    | mm              | 5.1                                                    |                       |
| Sheath                      | Color                                         | —               | Black                                                  |                       |
|                             | Standard thickness                            | mm              | 0.55                                                   |                       |
|                             | Standard outside diameter (approx.)           | mm              | 6.2                                                    |                       |
|                             | Outside diameter allowance                    | mm              | 5.7 to 7.3 (Note)                                      |                       |
| Standard length             |                                               | m               | 200                                                    |                       |
| Packing method              |                                               | —               | Bundle                                                 |                       |
| Electrical performance      | Resistance of conductor (at 20°C) (wire nos.) | Ω/km            | 39.4 or less (1 to 5)                                  | 113 or less (6 to 7)  |
|                             | Insulation resistance (20°C)                  | MΩ-km           | 15 or more                                             |                       |
|                             | Dielectric strength (AC)                      | —               | 500VAC for 5 minutes                                   |                       |
| Flame resistance            |                                               | —               | Shall pass flame resistance test VW-1 of UL standards. |                       |

**NOTE**

The maximum outside diameter applies to portions other than the drain wire.

### - Cable structure

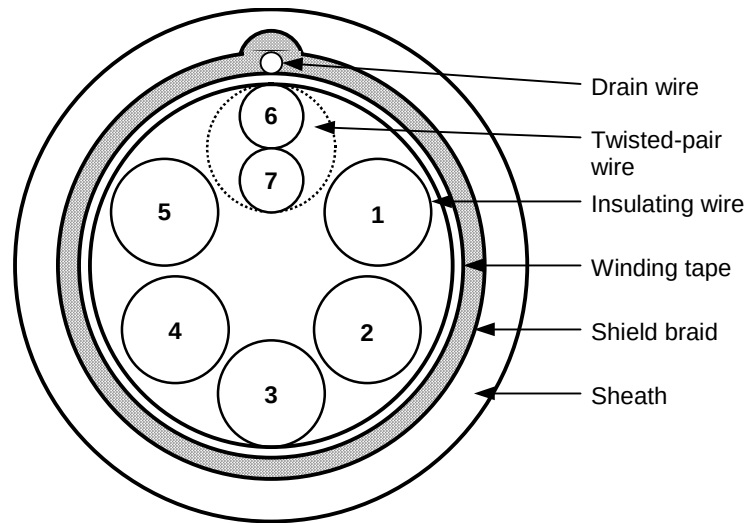

The numbers assigned to the wires correspond to the numbers in the table below.

| Wire No. | Insulator color | Dot mark color |
|----------|-----------------|----------------|
| 1        | Light brown     | --             |
| 2        | Yellow          | --             |
| 3        | Yellow          | Black          |
| 4        | Yellow          | Red            |
| 5        | Bright green    | --             |
| 6        | Light brown     | Black          |
| 7        | Light brown     | Red            |

## B.3 COMPOSITE 10-CORE CABLE


### Specifications

| Item                        |                                               | Unit            | Specifications                                         |                |
|-----------------------------|-----------------------------------------------|-----------------|--------------------------------------------------------|----------------|
| Product No.                 |                                               | —               | A66L-0001-0482                                         |                |
| Manufacturer                |                                               | —               | Hitachi Electric Cable Co., Ltd.                       |                |
| Rating                      |                                               | —               | 80°C, 30V                                              |                |
| Material                    | Conductor, braid-shielded wire, drain wire    | —               | Strand wire of tinned annealed copper (JIS C3152)      |                |
|                             | Insulator                                     | —               | Heat-resistant vinyl                                   |                |
|                             | Sheath                                        | —               | Oilproof, heat-resistant vinyl                         |                |
| Number of wires (wire nos.) |                                               | Cores           | 2                                                      | 8 (four pairs) |
| Conductor                   | Size                                          | mm <sup>2</sup> | 0.3                                                    | 0.2            |
|                             | Structure                                     | Conductors /mm  | 60/0.08                                                | 40/0.08        |
|                             | Conductors                                    | mm              | 0.72                                                   | 0.58           |
| Insulator                   | Standard thickness                            | mm              | 0.25                                                   | 0.2            |
|                             | Outside diameter                              | mm              | 1.22                                                   | 0.98           |
| Twisted pair                | Outside diameter                              | mm              | —                                                      | 1.96           |
|                             | Pitch (approx.)                               | mm              | —                                                      |                |
| Lay diameter                |                                               | mm              | 5.0                                                    |                |
| Drain wire                  | Size                                          | mm <sup>2</sup> | 0.15                                                   |                |
|                             | Structure                                     | Wires/mm        | 30/0.08                                                |                |
|                             | Outside diameter                              | mm              | 0.51                                                   |                |
| Shield braid                | Element wire diameter                         | mm              | 0.12                                                   |                |
|                             | Thickness                                     | mm              | 0.3                                                    |                |
|                             | Braid density                                 | %               | 85 or more                                             |                |
|                             | Outside diameter (approx.)                    | mm              | 5.7                                                    |                |
| Sheath                      | Color                                         | —               | Black                                                  |                |
|                             | Standard thickness                            | mm              | 0.65                                                   |                |
|                             | Standard outside diameter (approx.)           | mm              | 7.0                                                    |                |
|                             | Outside diameter allowance                    | mm              | 6.5 to 8.0 (Note)                                      |                |
| Standard length             |                                               | m               | 200                                                    |                |
| Packing method              |                                               | —               | Bundle                                                 |                |
| Electrical performance      | Resistance of conductor (at 20°C) (wire nos.) | Ω/km            | 69.5 or less                                           | 109 or less    |
|                             | Insulation resistance (20°C)                  | MΩ·km           | 15 or more                                             |                |
|                             | Dielectric strength (AC)                      | —               | 500VAC for 5 minutes                                   |                |
| Flame resistance            |                                               | —               | Shall pass flame resistance test VW-1 of UL standards. |                |

#### NOTE

The maximum outside diameter applies to portions other than the drain wire.

## Cable structure

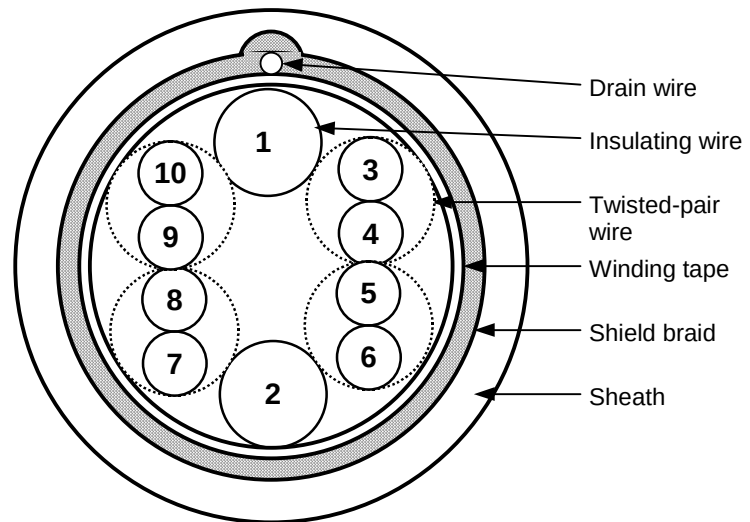

The numbers assigned to the wires correspond to the numbers in the table below.

| Wire No. | Insulator color | Dot mark color |
|----------|-----------------|----------------|
| 1        | Light brown     | --             |
| 2        | Yellow          | --             |
| 3        | Light brown     | Black          |
| 4        | Light brown     | Red            |
| 5        | Yellow          | Black          |
| 6        | Yellow          | Red            |
| 7        | Bright green    | Black          |
| 8        | Bright green    | Red            |
| 9        | Gray            | Black          |
| 10       | Gray            | Red            |

## B.4 COMPOSITE 12-CORE CABLE

### Specifications

| Item                        |                                                                                       | Unit            | Specifications                                                                                                                                                  |                          |
|-----------------------------|---------------------------------------------------------------------------------------|-----------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------|
| Product No.                 |                                                                                       | —               | A66L-0001-0286                                                                                                                                                  |                          |
| Manufacturer                |                                                                                       | —               | Hitachi Electric Cable Co., Ltd.<br>Oki Cable, Ltd.                                                                                                             |                          |
| Rating                      |                                                                                       | —               | 80°C, 30V                                                                                                                                                       |                          |
| Material                    | Conductor, braid-shielded wire, drain wire                                            | —               | Strand wire of tinned annealed copper (JIS C3152)                                                                                                               |                          |
|                             | Insulator                                                                             | —               | Heat-resistant flame-retardant vinyl                                                                                                                            |                          |
|                             | Sheath                                                                                | —               | Oilproof, heat-resistant, flame-retardant vinyl                                                                                                                 |                          |
| Number of wires (wire nos.) |                                                                                       | Cores           | 6 (1 to 6)                                                                                                                                                      | 6 (three pairs) (7 to 9) |
| Conductor                   | Size                                                                                  | mm <sup>2</sup> | 0.5                                                                                                                                                             | 0.18                     |
|                             | Structure                                                                             | Conductors /mm  | 20/0.18                                                                                                                                                         | 7/0.18                   |
|                             | Conductors                                                                            | mm              | 0.94                                                                                                                                                            | 0.54                     |
| Insulator                   | Standard thickness (The minimum thickness is at least 80% of the standard thickness.) | mm              | 0.25                                                                                                                                                            | 0.2                      |
|                             | Outside diameter                                                                      | mm              | 1.50                                                                                                                                                            | 0.94                     |
| Twisted pair                | Outside diameter                                                                      | mm              |                                                                                                                                                                 | 1.88                     |
|                             | Direction of lay                                                                      | —               |                                                                                                                                                                 | Left                     |
|                             | Pitch                                                                                 | mm              |                                                                                                                                                                 | 20 or less               |
| Lay                         |                                                                                       | —               | Twist the wires at an appropriate pitch so the outermost layer is right-twisted, and wrap tape around the outermost layer. Apply a cable separator as required. |                          |
| Lay diameter                |                                                                                       | mm              | 5.7                                                                                                                                                             |                          |
| Drain wire                  | Size                                                                                  | mm <sup>2</sup> | 0.3                                                                                                                                                             |                          |
|                             | Structure                                                                             | Wires/mm        | 12/0.18                                                                                                                                                         |                          |
|                             | Outside diameter                                                                      | mm              | 0.72                                                                                                                                                            |                          |
| Shield braid                | Element wire diameter                                                                 | mm              | 0.12                                                                                                                                                            |                          |
|                             | Thickness                                                                             | mm              | 0.3                                                                                                                                                             |                          |
|                             | Braid density                                                                         | %               | 70                                                                                                                                                              |                          |
|                             | Outside diameter                                                                      | mm              | 6.3                                                                                                                                                             |                          |
| Sheath                      | Color                                                                                 | —               | Black                                                                                                                                                           |                          |
|                             | Standard thickness (The minimum thickness is at least 85% of the standard thickness.) | mm              | 1.1                                                                                                                                                             |                          |
|                             | Outside diameter                                                                      | mm              | 8.5Max.9.0(1)                                                                                                                                                   |                          |
| Standard length             |                                                                                       | m               | 100                                                                                                                                                             |                          |
| Packing method              |                                                                                       | —               | Bundle                                                                                                                                                          |                          |
| Electrical performance      | Resistance of conductor (at 20°C) (wire nos.)                                         | Ω/km            | 39.4 (1 to 6)                                                                                                                                                   | 113 (7 to 9)             |
|                             | Insulation resistance (20°C)                                                          | MΩ-km           | 15                                                                                                                                                              |                          |
|                             | Dielectric strength (AC)                                                              | V/min           | 500                                                                                                                                                             |                          |
| Flame resistance            |                                                                                       | —               | Shall pass flame resistance test VW-1SC of UL standards.                                                                                                        |                          |

#### NOTE


The maximum outside diameter applies to portions other than the drain wire.

## Markings on cable

- (i) Name or symbol of the manufacturer
- (ii) Manufacturing year

## Cable structure

The cable structure is shown below.

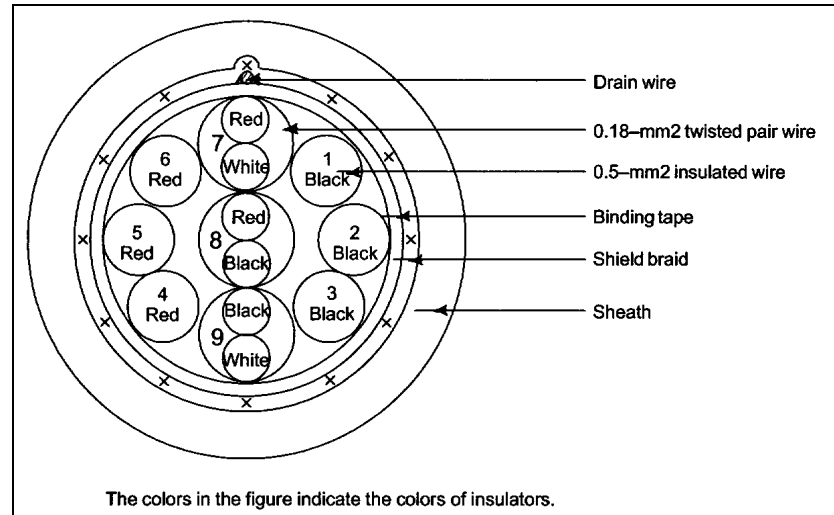


## B.5 COMPOSITE 16-CORE CABLE

### Specifications

| Item                   |                              | Unit                | Specifications                                                           |                                       |
|------------------------|------------------------------|---------------------|--------------------------------------------------------------------------|---------------------------------------|
| Product No.            |                              |                     | A66L-0001-0368(FNC-021)                                                  |                                       |
| Manufacturer           |                              |                     | Shinko Electric Industries Co., Ltd.                                     |                                       |
| Rating                 |                              |                     | 80°C, 60V                                                                |                                       |
| Material               | Conductor                    |                     | Stranded wire of tinned annealed copper (JIS C 3152)                     |                                       |
|                        | Insulator                    |                     | Heat-resistant polyvinyl chloride                                        |                                       |
|                        | Shield braid                 |                     | Tinned annealed copper wire                                              |                                       |
|                        | Sheath                       |                     | Heat-resistant, oil-resistance, flame-retardent polyvinyl chloride (S-3) |                                       |
| Number of pairs        |                              | Pairs               | 6                                                                        | 10 (5-pair)                           |
| Conductor              | Nominal cross-sectional area | mm <sup>2</sup>     | 0.5                                                                      | 0.18                                  |
|                        | Structure                    | Conductors /mm      | 20/0.18                                                                  | 7/0.18                                |
|                        | Outside diameter (approx.)   | mm                  | 0.9                                                                      | 0.54                                  |
| Insulator              | Thickness                    | mm                  | 0.25 (Average thickness : 90% or more)                                   | 0.2 (Average thickness : 90% or more) |
|                        | Outside diameter (approx.)   | mm                  | 1.5                                                                      | 0.94                                  |
| Twisted pair           | Outside diameter (approx.)   | mm                  | —                                                                        | 1.88 (pitch : 20 mm or less)          |
| Lay                    | Diameter (approx.)           | mm                  | 6.5                                                                      |                                       |
| Tape-wound wire        | Diameter (approx.)           | mm                  | 6.6                                                                      |                                       |
| Drain wire             | Structure                    | Conductors /mm      | 12/0.18                                                                  |                                       |
| Shield                 | Element wire diameter        | mm                  | 0.12 (Braid density : 70% or more)                                       |                                       |
| Sheath                 | Color                        |                     | Black                                                                    |                                       |
|                        | Thickness                    | mm                  | 1.0 (Average thickness : 90% or more)                                    |                                       |
|                        | Outside diameter             | mm                  | 9.2 ± 0.3                                                                |                                       |
| Electrical performance | Electric resistance          | 0.18mm <sup>2</sup> | Ω/km                                                                     | 113 or less (20°C JIS C 3005 6)       |
|                        |                              | 0.5mm <sup>2</sup>  |                                                                          | 39.4 or less (20°C JIS C 3005 6)      |
|                        | Dielectric strength          |                     | V/min                                                                    | AC500(JIS C 3005 8 (2))               |
|                        | Insulation resistance        |                     | MΩ-km                                                                    | 15 or more (20°C JIS C 3005 9.1)      |

### Cable structure

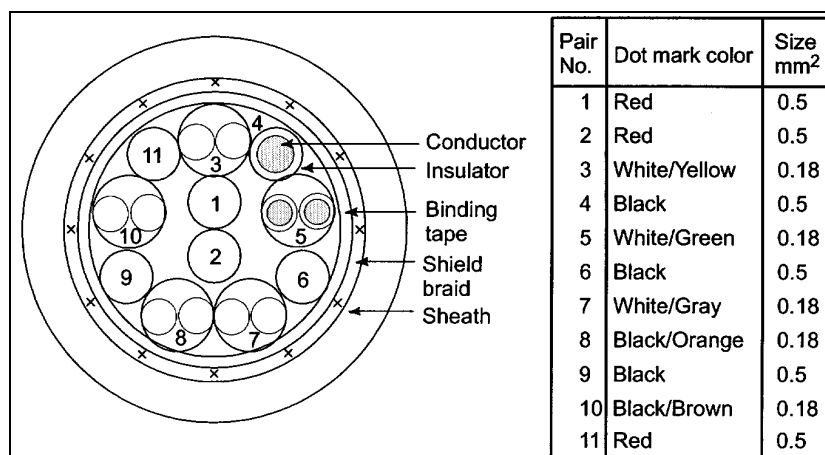


## B.6 10-PAIR CABLE

### Specifications

| Item                   |                              | Unit            | Specifications                                                           |
|------------------------|------------------------------|-----------------|--------------------------------------------------------------------------|
| Product No.            |                              |                 | A66L-0001-0367(FNC-019)                                                  |
| Manufacturer           |                              |                 | Shinko Electric Industries Co., Ltd.                                     |
| Rating                 |                              |                 | 80°C, 60V                                                                |
| Material               | Conductor                    |                 | Stranded wire of tinned annealed copper (JIS C 3152)                     |
|                        | Insulator                    |                 | Heat-resistant polyvinyl chloride                                        |
|                        | Shield braid                 |                 | Tinned annealed copper wire                                              |
|                        | Sheath                       |                 | Heat-resistant, oil-resistance, flame-retardent polyvinyl chloride (S-3) |
| Number of pairs        |                              | Pairs           | 20 (10-pair)                                                             |
| Conductor              | Nominal cross-sectional area | mm <sup>2</sup> | 0.18                                                                     |
|                        | Structure                    | Conductors /mm  | 7/0.18                                                                   |
|                        | Outside diameter (approx.)   | mm              | 0.54                                                                     |
| Insulator              | Thickness                    | mm              | 0.25 (Average thickness : 90% or more)                                   |
|                        | Outside diameter (approx.)   | mm              | 1.04                                                                     |
| Twisted pair           | Outside diameter (approx.)   | mm              | 2.08 (pitch : 25 mm or less)                                             |
| Lay                    | Diameter (approx.)           | mm              | 6.5                                                                      |
| Tape-wound wire        | Diameter (approx.)           | mm              | 6.6                                                                      |
| Shield                 | Element wire diameter        | mm              | 0.12 (Braid density : 70% or more)                                       |
| Sheath                 | Color                        |                 | Black                                                                    |
|                        | Thickness                    | mm              | 1.0 (Average thickness : 90% or more)                                    |
|                        | Outside diameter             | mm              | 9.2 ± 0.3                                                                |
| Electrical performance | Electric resistance          | Ω/km            | 110 or less (20°C JIS C 3005 6)                                          |
|                        | Dielectric strength          | V/min           | AC500(JIS C 3005 8 (2))                                                  |
|                        | Insulation resistance        | MΩ·km           | 15 or more (20°C JIS C 3005 9.1)                                         |

### Cable structure

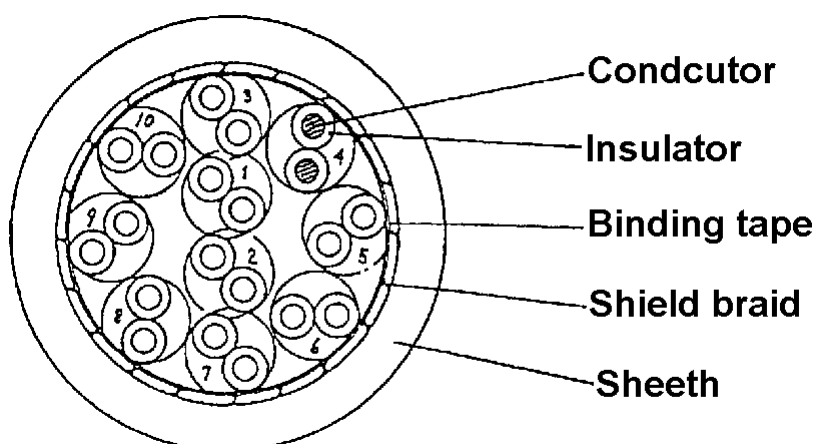

| Pair number | Dot mark color |
|-------------|----------------|
| 1           | Black/Orange   |
| 2           | Black/Gray     |
| 3           | White/Yellow   |
| 4           | White/Green    |
| 5           | White/Brown    |
| 6           | White/Orange   |
| 7           | White/Gray     |
| 8           | Black/Yellow   |
| 9           | Black/Green    |
| 10          | Black/Brown    |



## C

EXTERNAL DIMENSIONS OF EACH  
CONNECTOR

Manufacture: Tyco Electronics AMP  
Type : 1-178128-3

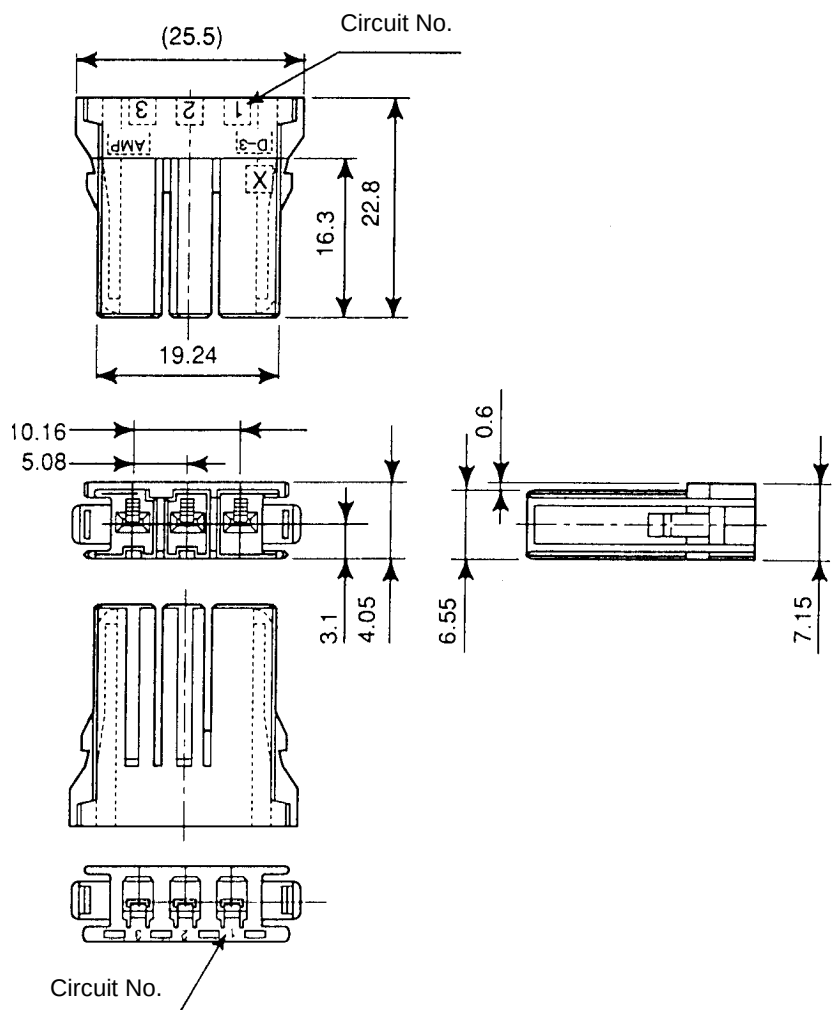


Fig.C(a) Tyco Electronics AMP connector (1)

# C.EXTERNAL DIMENSIONS OF EACH CONNECTOR

## APPENDIX

B-65282EN/06

Manufacture: Tyco Electronics AMP  
Type : 2-178128-3

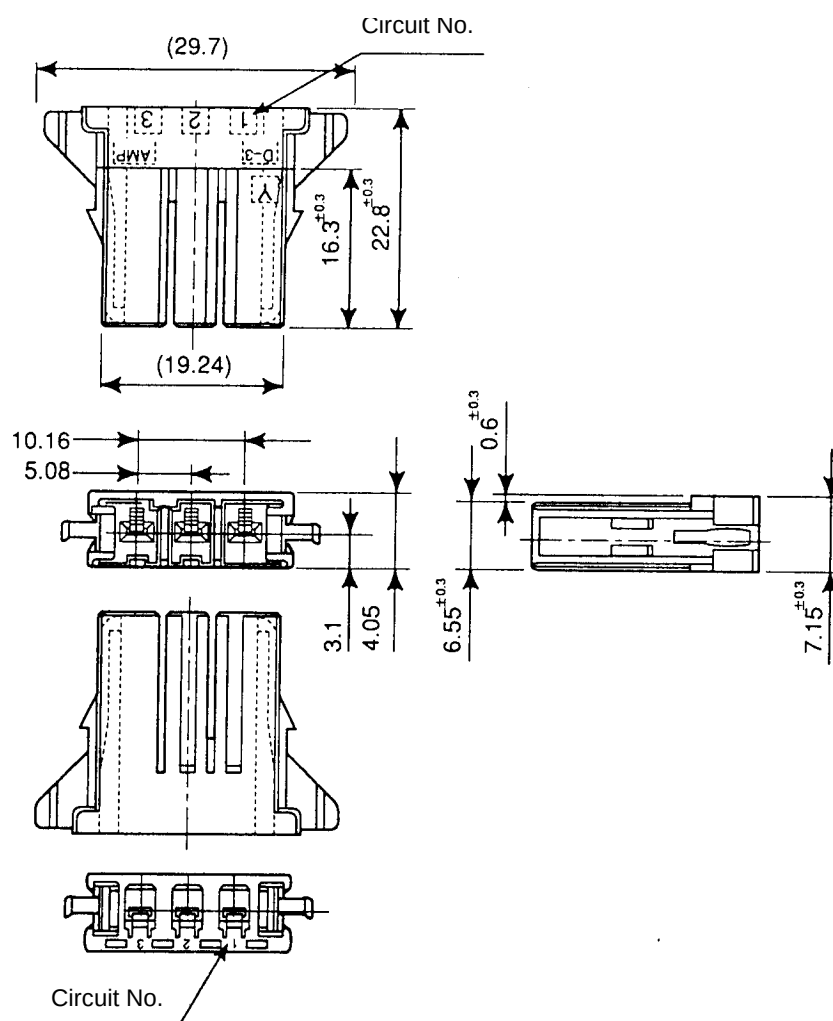


Fig.C(b) Tyco Electronics AMP connector (2)

# C.EXTERNAL DIMENSIONS OF EACH CONNECTOR

Manufacture: Tyco Electronics AMP  
 Type : 1-175218-2  
 Cable : AWG16, 18, 20

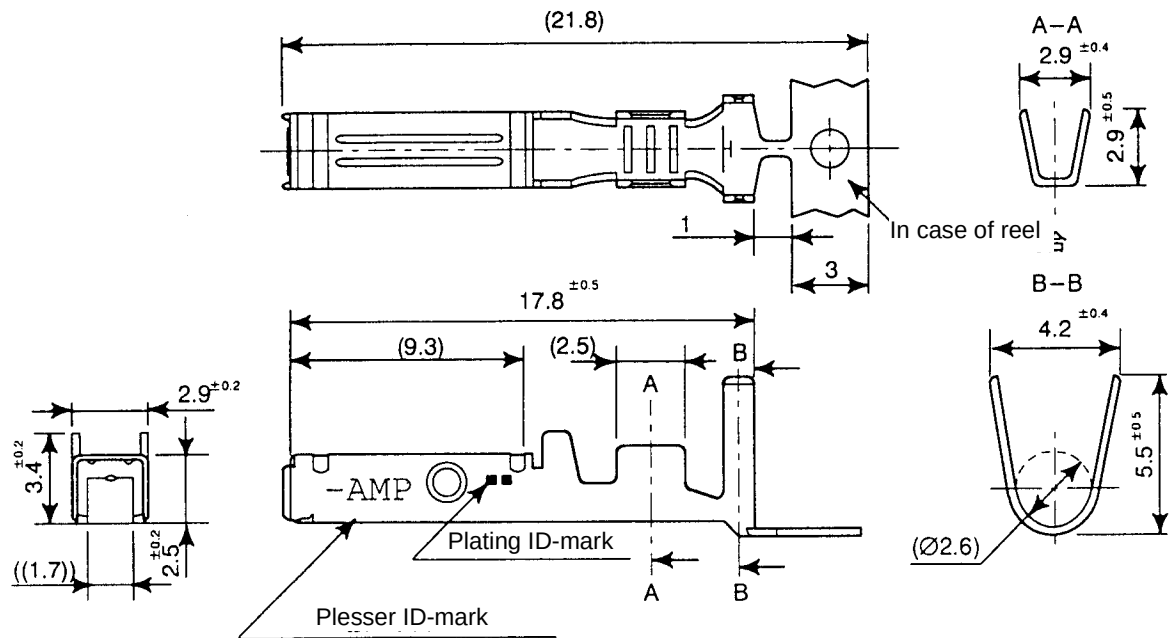


Fig.C(c) Contact for Tyco Electronics AMP connector

# C.EXTERNAL DIMENSIONS OF EACH CONNECTOR

## APPENDIX

B-65282EN/06

Manufacture: Tyco Electronics AMP  
Type : 1-1318119-4

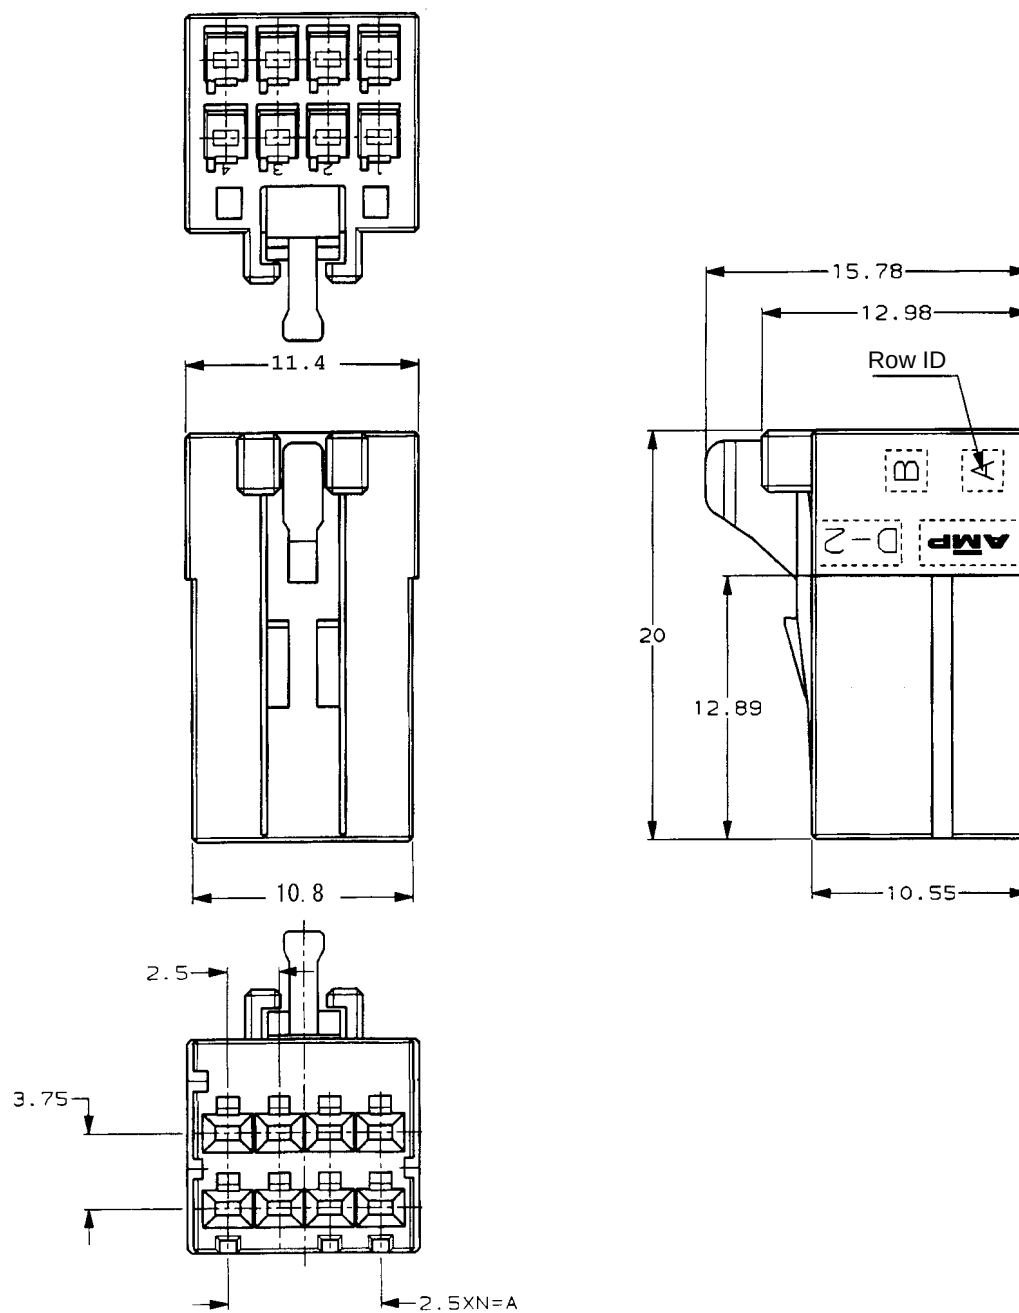


Fig.C(d) Contact for Tyco Electronics AMP connector

# C.EXTERNAL DIMENSIONS OF EACH CONNECTOR

Manufacture: HIROSE ELECTRIC CO., LTD.  
 Type : FI30-20S (crimp type)  
 Housing : FI-20-CVS2 (plastic)

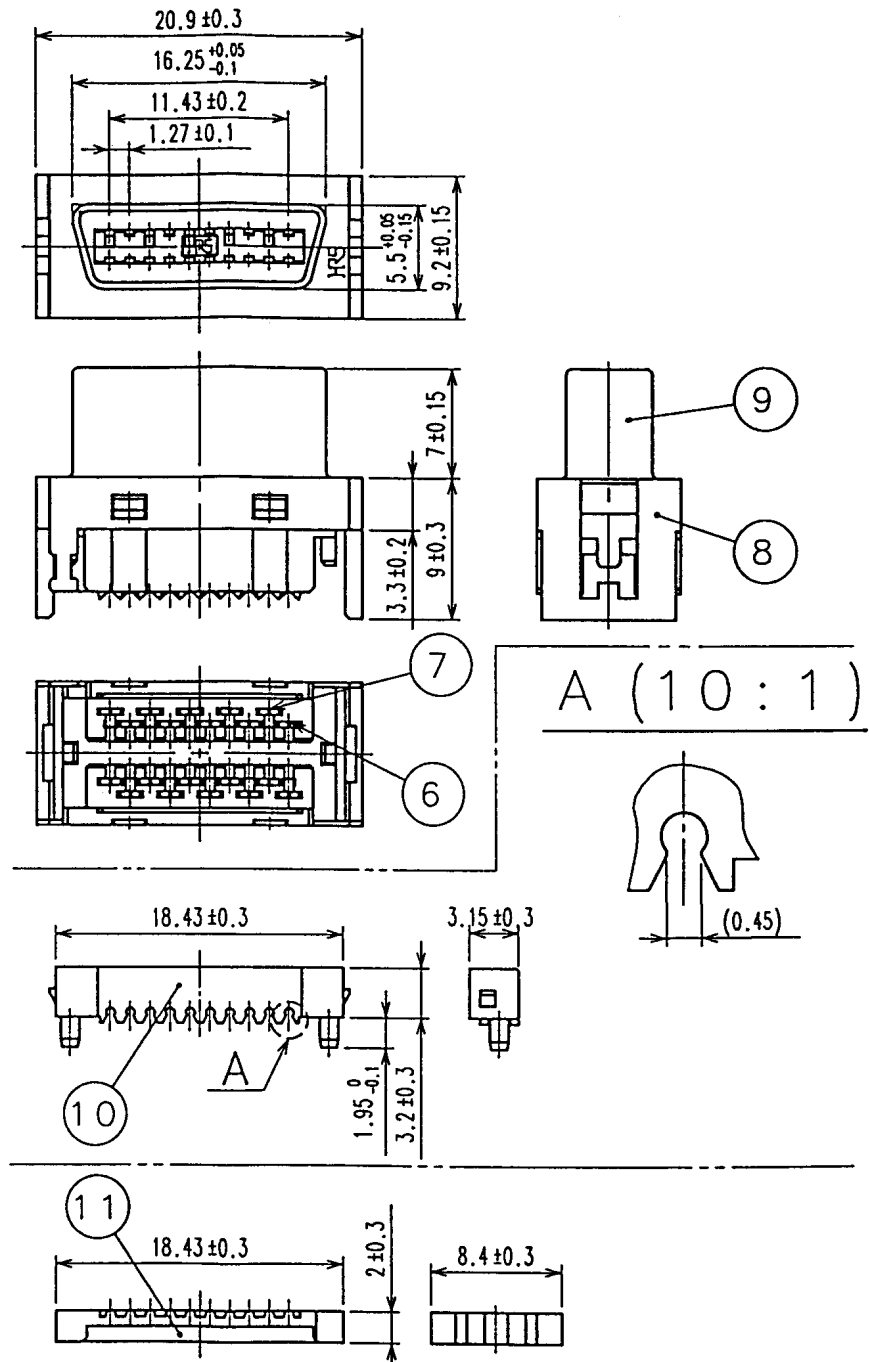


Fig.C(e) Connector for interface (Crimp type)

## C.EXTERNAL DIMENSIONS OF EACH CONNECTOR

### APPENDIX

B-65282EN/06

Manufacture: HIROSE ELECTRIC CO., LTD.  
Type : FI40-20S (solder type)  
Housing : FI-20-CVS5 (plastic)

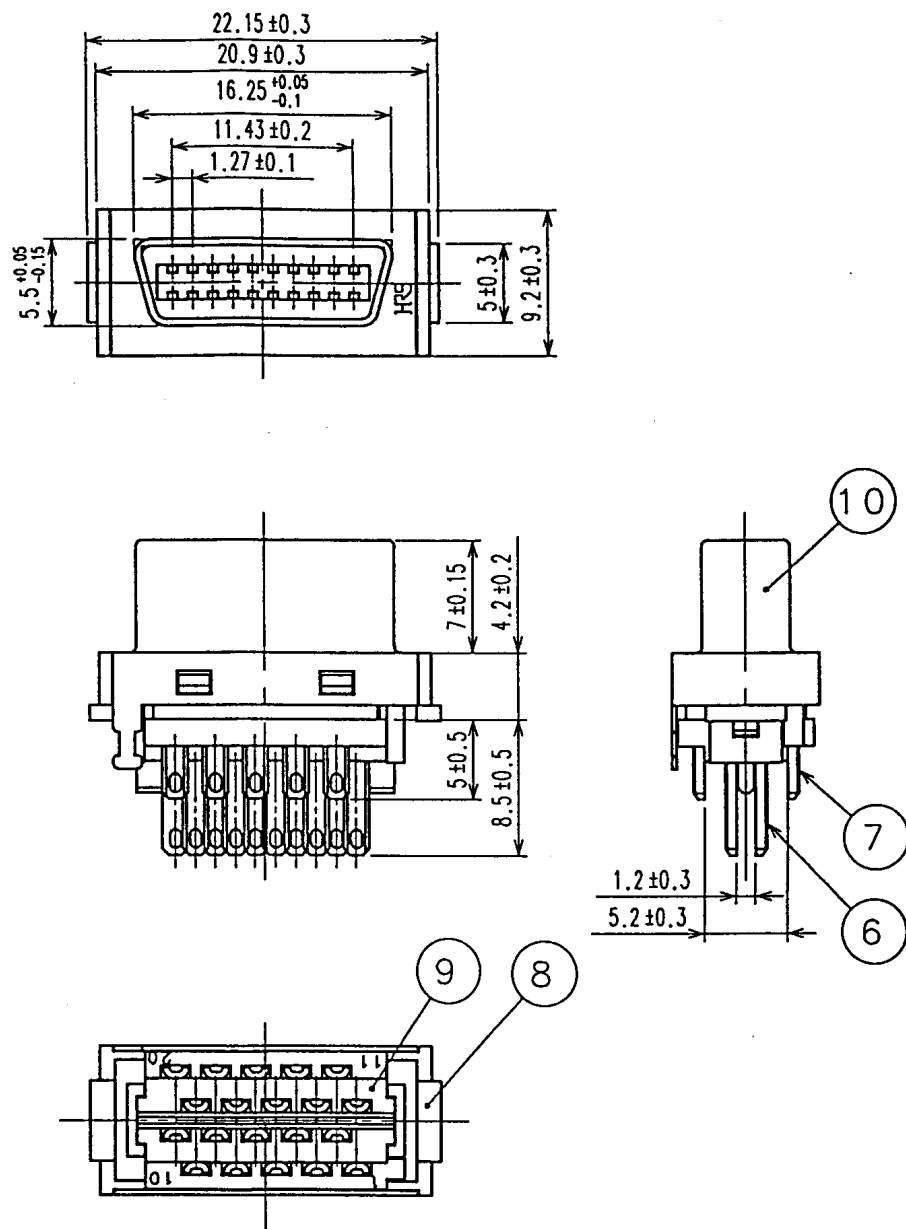


Fig.C(f) Connector for interface (Solder type)

C.EXTERNAL DIMENSIONS OF  
EACH CONNECTOR

Manufacture: HIROSE ELECTRIC CO., LTD.  
 Type : FI40B-2015S (solder type)  
 Housing : FI-2015-CVS (plastic)

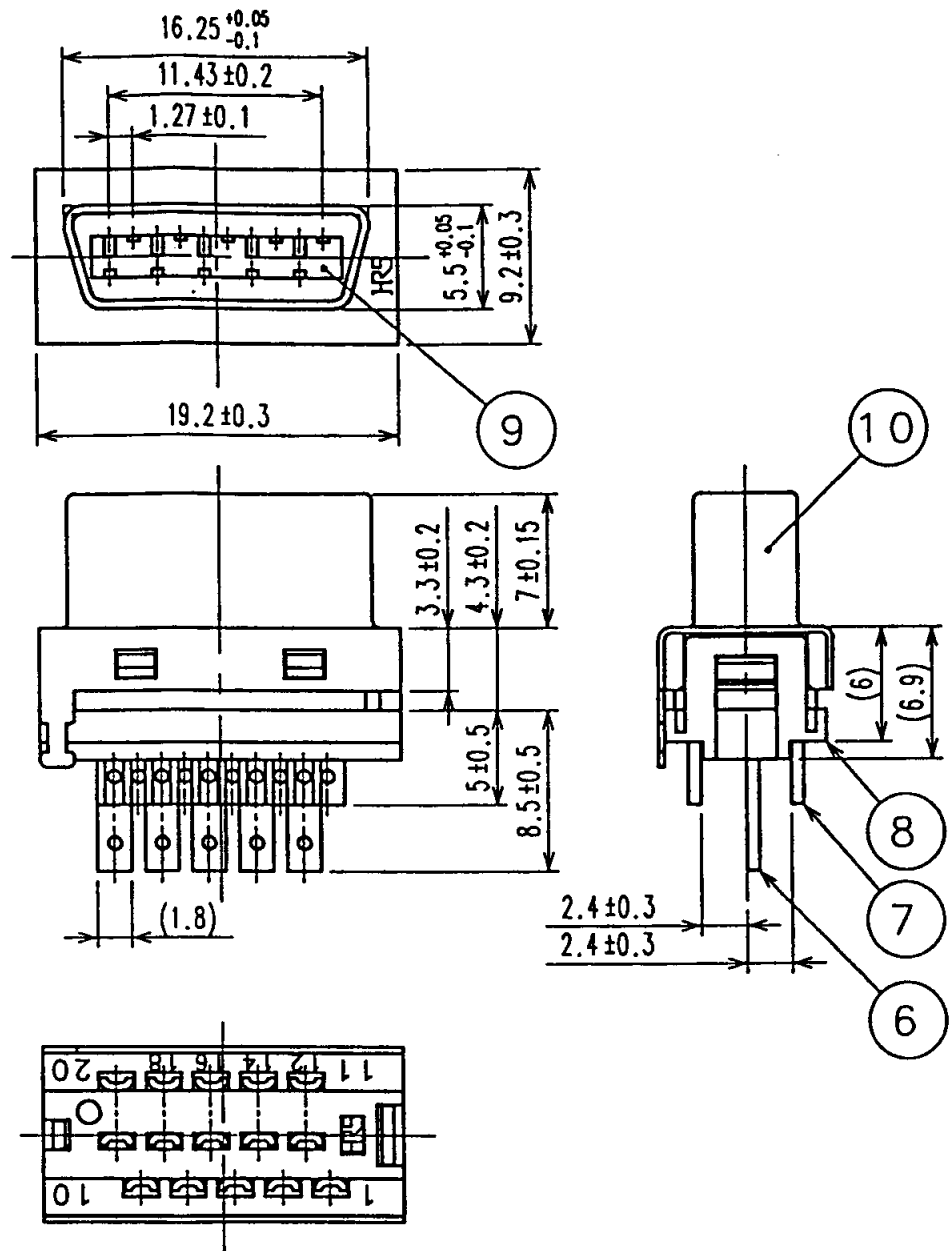


Fig.C(g) Connector for interface (Solder type)

**NOTE**

This connector does not contact locations 11, 13, 15, 17, and 19.

## C.EXTERNAL DIMENSIONS OF EACH CONNECTOR

### APPENDIX

B-65282EN/06

Manufacture: HIROSE ELECTRIC CO., LTD.  
Type : FI-20-CVS2  
Connector : FI30-20S

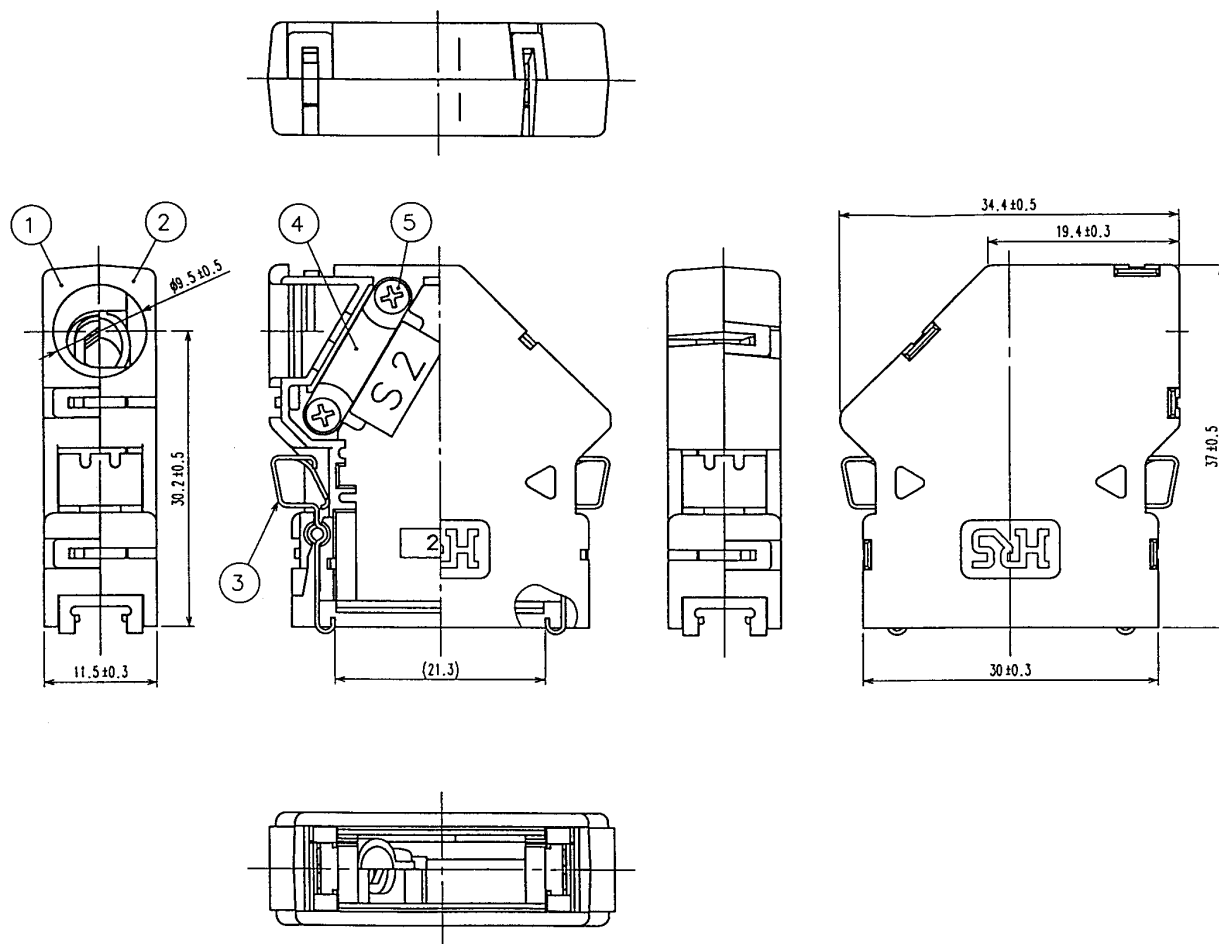


Fig.C(h) Connector housing (Side cable type)



# C.EXTERNAL DIMENSIONS OF EACH CONNECTOR

Manufacture: HIROSE ELECTRIC CO., LTD.  
 Type : FI-20-CVS5  
 Connector : FI40B-20S

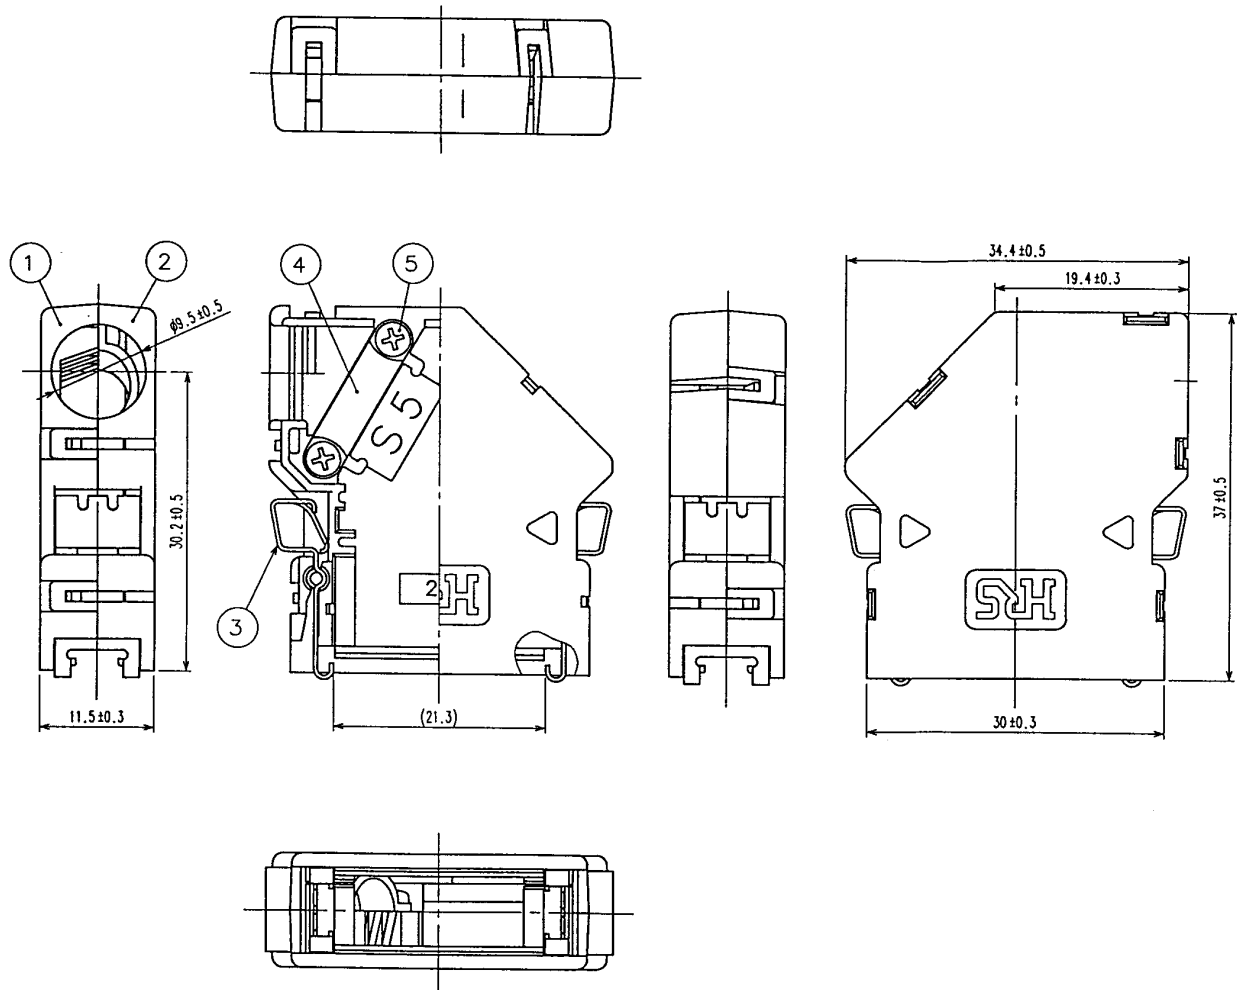


Fig.C(i) Connector housing (Side cable type)

## C.EXTERNAL DIMENSIONS OF EACH CONNECTOR

### APPENDIX

B-65282EN/06

Manufacture: HIROSE ELECTRIC CO., LTD.  
Type : FI-2015-CVS  
Connector : FI40B-2015S

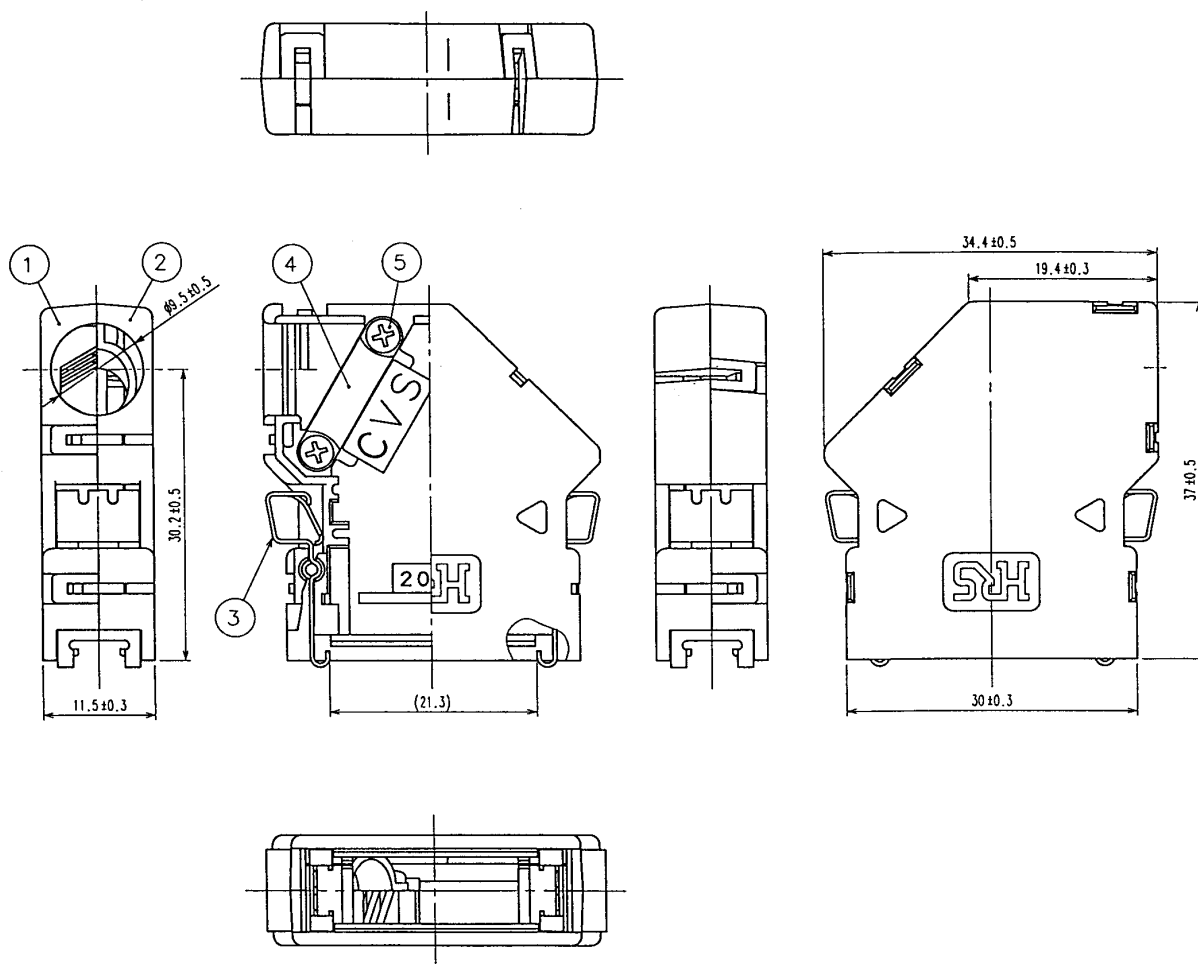


Fig.C(j) Connector housing (Side cable type)

# D

## FEEDBACK CABLE LENGTH

---

Appendix D, "FEEDBACK CABLE LENGTH", consists of the following sections:

|                                                                  |     |
|------------------------------------------------------------------|-----|
| D.1 SPINDLE CABLE LENGTH (WHEN RECOMMENDED CABLES ARE USED)..... | 432 |
| D.2 SERVO CABLE LENGTH (WHEN RECOMMENDED CABLES ARE USED).....   | 433 |

## D.1 SPINDLE CABLE LENGTH (WHEN RECOMMENDED CABLES ARE USED)

| Detector                                   | Recommended cable | Cable structure                                                                                       | Maximum cable length                  |
|--------------------------------------------|-------------------|-------------------------------------------------------------------------------------------------------|---------------------------------------|
| $\alpha i$ M sensor                        | A66L-0001-0368    | 0.5mm <sup>2</sup> , 6 conductors (for power supply)<br>0.18mm <sup>2</sup> , 5 pairs (for signals)   | 72m<br>When one power line is used    |
| $\alpha i$ MZ sensor, $\alpha i$ BZ sensor | A66L-0001-0368    | 0.5mm <sup>2</sup> , 6 conductors (for power supply)<br>0.18mm <sup>2</sup> , 5 pairs (for signals)   | 50m<br>When one power line is used    |
| $\alpha i$ M sensor (for $\alpha 0.5i$ )   | A66L-0001-0482    | 0.3mm <sup>2</sup> , 2 conductors (for power supply)<br>0.2mm <sup>2</sup> , 3 pairs (for signals)    | 41m                                   |
| $\alpha i$ MZ sensor (for $\alpha 0.5i$ )  | A66L-0001-0482    | 0.3mm <sup>2</sup> , 2 conductors (for power supply)<br>0.2mm <sup>2</sup> , 4 pairs (for signals)    | 28m                                   |
| $\alpha i$ CZ sensor                       | A66L-0001-0367    | 0.18mm <sup>2</sup> , 10 pairs (for signals and power supply)                                         | 18m<br>When three power lines is used |
| $\alpha i$ BZ sensor (conventional type)   | A66L-0001-0367    | 0.18 mm <sup>2</sup> , 4 conductors (for power supply)<br>0.18mm <sup>2</sup> , 5 pairs (for signals) | 36m<br>When two power lines is used   |
| $\alpha i$ positioncoder                   | A66L-0001-0286    | 0.5mm <sup>2</sup> , 6 conductors (for power supply)<br>0.18mm <sup>2</sup> , 3 pairs (for signals)   | 7m<br>When one power line is used     |
| $\alpha i$ positioncoder S                 | A66L-0001-0286    | 0.5mm <sup>2</sup> , 6 conductors (for power supply)<br>0.18mm <sup>2</sup> , 3 pairs (for signals)   | 7m<br>When one power line is used     |

When a cable other than one of the recommended cables above is used, the voltage drop in the cable must be within 0.2 V for a +5 V power supply.

(Tip)

Maximum cable length L can be found from the following formula:

$$L[\text{m}] \leq 0.2[\text{V}] \times n[\text{line}] \div 2 \div I[\text{A}] \div R[\Omega/\text{m}]$$

n : Number of power lines (number of +5V or +15V lines)

I : Current consumption of the detector

R : Resistance of a wire used for a power line

| Detector                                                     | Current consumption |
|--------------------------------------------------------------|---------------------|
| $\alpha i$ M sensor (pulse generator)                        | 0.035A              |
| $\alpha i$ MZ sensor, $\alpha i$ BZ sensor (built-in sensor) | 0.05A               |
| $\alpha i$ CZ sensor                                         | 0.15A               |
| $\alpha i$ Positioncoder                                     | 0.35A               |
| $\alpha i$ Positioncoder S                                   | 0.35A               |

## **D.2 SERVO CABLE LENGTH (WHEN RECOMMENDED CABLES ARE USED)**

---

| Recommended cable | Cable structure                                                                                    | Maximum cable length |
|-------------------|----------------------------------------------------------------------------------------------------|----------------------|
| A66L-0001-0460    | 0.3mm <sup>2</sup> , 5 conductors (for power supply)<br>0.20mm <sup>2</sup> , 1 pair (for signals) | 28m                  |
| A66L-0001-0462    | 0.5mm <sup>2</sup> , 5 conductors (for power supply)<br>0.20mm <sup>2</sup> , 1 pair (for signals) | 50m                  |
| A66L-0001-0481    | 0.3mm <sup>2</sup> , 5 conductors (for power supply)<br>0.18mm <sup>2</sup> , 1 pair (for signals) | 28m                  |
| A66L-0001-0491    | 0.5mm <sup>2</sup> , 5 conductors (for power supply)<br>0.18mm <sup>2</sup> , 1 pair (for signals) | 50m                  |

When a cable other than recommended cable is used, ensure that the sum of the resistances of 0 V and 5 V is 2 ohms or less.

# E

## POWER LINE FOR SERVO MOTOR AND AMPLIFIER

---

Appendix E, "POWER LINE FOR SERVO MOTOR AND AMPLIFIER", consists of the following sections:

|                                   |     |
|-----------------------------------|-----|
| E.1 SELECTING A POWER CABLE ..... | 435 |
|-----------------------------------|-----|

## E.1 SELECTING A POWER CABLE

Select the cable specification by considering the following conditions for use:

- <1> Motor current rating or current needed in use on a real machine
- <2> Cable type (heat resistance temperature, etc.)
- <3> Environment in which the cable is installed (operating ambient temperature, etc.)
- <4> Need of water proofing (pay attention to the diameter of the applicable cable clamp)
- <5> Certification for CE marking (compliance with various safety standards and EMC standard)
- <6> Insulation distance between the cable and terminal is secured at the time of wiring.

Examples of selecting a heavy-duty power cable are shown below. Fully check the cable specifications based on the actual use conditions and use an example below.

The cable diameters are determined based on JCS No. 168 D (1980), "Allowable Currents for Power Cables (1)."

### Selection example of power line (reference)

[Selection example 1]

- Heavy-duty power cable specification :  
Maximum allowable conductor temperature 60°C

| Cable diameter<br>[mm <sup>2</sup> ] | Environment<br>temperature 30°C<br>Allowable current value<br>[Arms] | Receptacle contact<br>specification |
|--------------------------------------|----------------------------------------------------------------------|-------------------------------------|
| 0.75                                 | Up to 11                                                             | SS size 1318986-6                   |
| 1.25                                 | Up to 15                                                             | S size 316040-6                     |
| 2                                    | Up to 19                                                             | S size 316040-6                     |
| 3.5                                  | Up to 27                                                             | M size 316041-6                     |
| 5.5                                  | Up to 35                                                             | M size 316041-6                     |
| 8                                    | Up to 43                                                             | L size 1318697-6                    |
| 14                                   | Up to 56                                                             | Crimp terminal only                 |

[Selection example 2]

- Heavy-duty power cable specification :  
Maximum allowable conductor temperature 80°C

| Cable diameter<br>[mm <sup>2</sup> ] | Environment<br>temperature 55°C<br>Allowable current value<br>[Arms] | Receptacle contact<br>specification |
|--------------------------------------|----------------------------------------------------------------------|-------------------------------------|
| 0.75                                 | Up to 9.2                                                            | SS size 1318986-6                   |
| 1.25                                 | Up to 12.7                                                           | S size 316040-6                     |
| 2                                    | Up to 16.3                                                           | S size 316040-6                     |
| 3.5                                  | Up to 23.4                                                           | M size 316041-6                     |
| 5.5                                  | Up to 31.2                                                           | M size 316041-6                     |
| 8                                    | Up to 38.3                                                           | L size 1318697-6                    |

[Selection example 3]

- Fire-retardant polyflex wire or equivalent to LMFC manufactured by The Furukawa Electric Co., Ltd.:  
3 wire bundles

Maximum allowable conductor temperature 105°C

| Cable diameter<br>[mm <sup>2</sup> ] | Environment<br>temperature 30°C<br>Allowable current value<br>[Arms] | Environment<br>temperature 55°C<br>Allowable current value<br>[Arms] |
|--------------------------------------|----------------------------------------------------------------------|----------------------------------------------------------------------|
| 0.75                                 | Up to 12                                                             | Up to 10                                                             |
| 1.25                                 | Up to 16                                                             | Up to 13                                                             |
| 2                                    | Up to 21                                                             | Up to 17                                                             |
| 3.5                                  | Up to 32                                                             | Up to 26                                                             |
| 5.5                                  | Up to 43                                                             | Up to 35                                                             |
| 8                                    | Up to 55                                                             | Up to 44                                                             |
| 14                                   | Up to 79                                                             | Up to 64                                                             |
| 22                                   | Up to 113                                                            | Up to 92                                                             |
| 30                                   | Up to 137                                                            | Up to 112                                                            |
| 38                                   | Up to 160                                                            | Up to 131                                                            |
| 50                                   | Up to 190                                                            | Up to 155                                                            |
| 60                                   | Up to 220                                                            | Up to 180                                                            |
| 80                                   | Up to 269                                                            | Up to 219                                                            |

### Wire diameter versus AWG number table (reference)

| Cable diameter<br>[mm <sup>2</sup> ] | AWG number |
|--------------------------------------|------------|
| 0.8226                               | AWG18      |
| 1.307                                | AWG16      |
| 2.082                                | AWG14      |
| 3.309                                | AWG12      |
| 5.262                                | AWG10      |
| 8.368                                | AWG8       |
| 13.30                                | AWG6       |
| 21.15                                | AWG4       |
| 33.62                                | AWG2       |
| 42.41                                | AWG1       |
| 53.49                                | AWG1/0     |
| 67.42                                | AWG2/0     |
| 85.03                                | AWG3/0     |
| 107.2                                | AWG4/0     |



### Selection example of servo motor power line (reference)

#### Example 1)

A heavy-duty power cable is used for the  $\alpha i$  F22/3000 when the ambient temperature is 55°C.

- Check the continuous current rating of the servo motor with the applicable servo motor specification.  
(See descriptions about the stall current of the servo motor.)  
In this example, it is 18.4 Arms.
- Select a cable wire diameter from [Selection example 2] in this section.  
In this example, it is 3.5 mm<sup>2</sup>.

### Selection example of spindle motor power line (reference)

#### Example 1)

A polyflex wire is used for the  $\alpha i$  I 8/8000 when the ambient temperature is 55°C.

- Check the continuous current rating of the spindle motor with the applicable spindle motor specification.  
(See descriptions about the stall current of the servo motor.)  
In this example, it is 43 Arms.
- Select a cable wire diameter from [Selection example 3] in this section.  
In this example, it is 8 mm<sup>2</sup>.

# F

## MEASURES AGAINST NOISE FROM SERVO AMPLIFIERS

---

This appendix describes what causes noise when servo amplifiers are used to drive servo or spindle motors. It also explains measures that can be taken to protect equipment from noise.

When installing machines, the user is kindly requested to previously arrange measures against noise that may occur in the machines.

Appendix F, “MEASURES AGAINST NOISE FROM SERVO AMPLIFIERS,” consists of:

|                                               |     |
|-----------------------------------------------|-----|
| F.1 NOISE OCCURRENCE IN SERVO AMPLIFIERS..... | 439 |
| F.2 NOISE TYPES.....                          | 440 |
| F.3 ANTI-NOISE MEASURES.....                  | 442 |
| F.4 MISCELLANEOUS .....                       | 450 |

## F.1 NOISE OCCURRENCE IN SERVO AMPLIFIERS

Shown below is an outlined configuration of a servo amplifier.

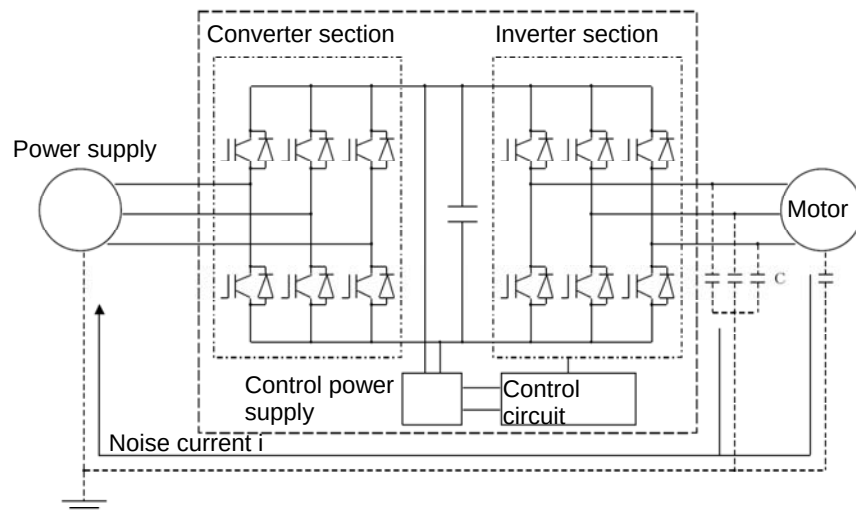


Fig. F-1 Outlined servo amplifier configuration

The servo amplifier shown above converts AC to DC with its converter section and controls the rotation speed of the motor under PWM control by turning ON/OFF the 6 transistors in the inverter section.

Turning the 6 transistors ON/OFF at high speed results in switching noise occurring. This high-speed ON/OFF switching releases noise current ( $i$ ) to the ground through the stray capacitance ( $C$ ) between the cable and motor on every switching cycle. The magnitude of the noise current ( $i$ ) is represented by:

$$i = C \times dV/dt$$

As the expression tells, the noise current is proportional to the stray capacitance ( $C$ ) and the transistor switching speed ( $dV/dt$ ). Because the frequency band of this noise is below about 30 to 40 MHz, it affects equipment (such as AM radio) that uses a low-frequency band. But it hardly affects equipment (such as FM radio and TV) that uses higher frequency bands.

Described so far is how noise occurs in switching transistors to drive motors.

Meanwhile, if a servo amplifier regenerates power (recirculates motor rotation energy to the power supply during deceleration) when a motor driven by it decelerates, the operation of devices that share the power supply may be affected by voltage fluctuations resulting from current phase commutation for power regeneration.

## F.2 NOISE TYPES

Noise that occurs in servo amplifiers can be roughly grouped into any of the following three types.

### (1) Conduction noise

Conduction noise occurs in a servo amplifier, passes through a conductor, such as wire, and enters a device connected to the same power line as the servo amplifier, thus affecting the device.

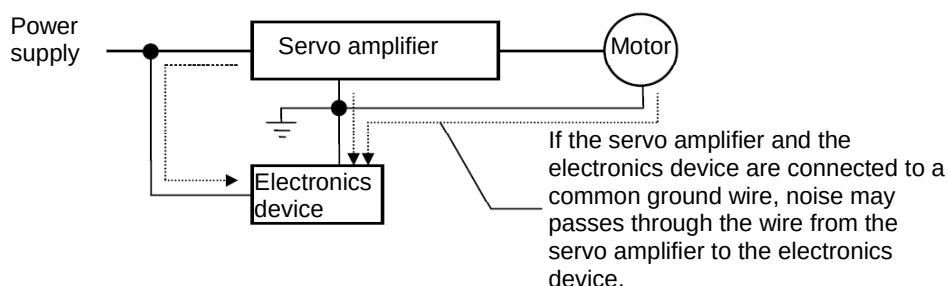


Fig. F2(1) Conduction noise

### (2) Induction noise

Induction noise is caused on the power line or signal line of a peripheral device through induction by putting the line close to an electric line through which noise current is flowing.

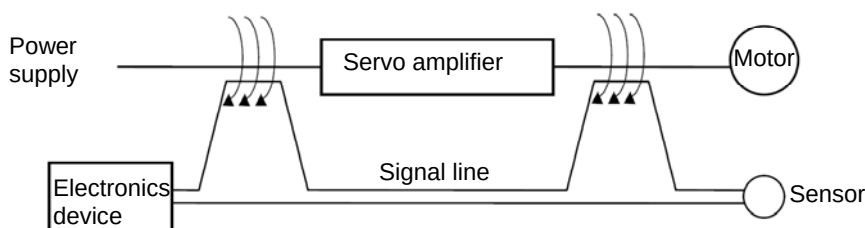


Fig. F2(2) Electromagnetically induced noise

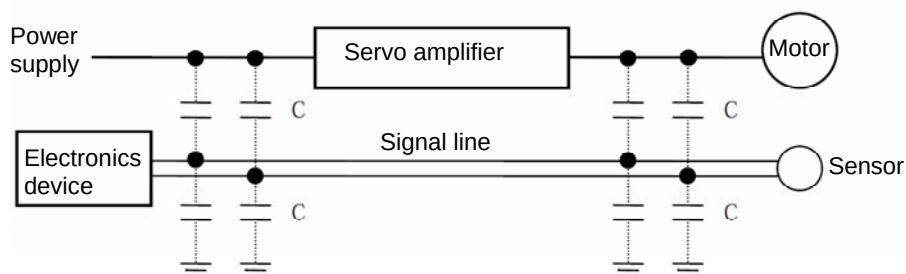


Fig. F2(3) Electrostatically induced noise

### (3) Radiation noise

Radiation noise occurs in a servo amplifier and is radiated into the air from that power supply line or power line connected to the servo amplifier which acts as an antenna.

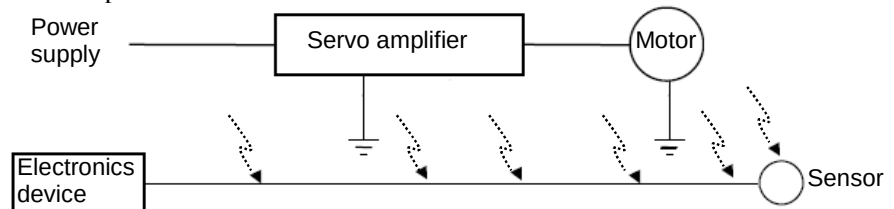


Fig F2(4) Radiation noise

Noise can propagate in diverse ways. In addition, its effect varies depending on how the system is configured.

## **F.3** ANTI-NOISE MEASURES

---

It is difficult for the present technology level to prevent noise occurrence completely. So, it is necessary to arrange economic anti-noise measures according to the level of the noise of interest and the situations of equipment installation.

### **F.3.1** Pre-Installation Arrangement

---

If a noise problem occurs after equipment has been installed, it may cost a lot of money to solve the problem. So, it is necessary to take the following measures previously.

- <1> Separate signal lines from power supply and motor power lines.
- <2> Put power supply and motor power lines in metal conduits.
- <3> Carry out adequate grounding work, and lay down proper grounding wires (for preventing leakage-caused hazard shocks as well).
- <4> Use as thick and short grounding wires as possible.

The “Electrical Equipment Technical Standards” stipulates grounding methods as listed below.

| Grounding type            | Applicable equipment | Grounding resistance  |
|---------------------------|----------------------|-----------------------|
| Class-3 grounding         | 300 VAC or lower     | 100 $\Omega$ or lower |
| Special class-3 grounding | 300 VAC to 600 VAC   | 10 $\Omega$ or lower  |

## F.3.2 Anti-Noise Measures

Suppressing noise from equipment effectively requires applying system-wide anti-noise measures by cooperating with devices that may be affected by the noise.

- (1) Anti-measures that can be taken in noise-affected devices
  - <1> Separate signal lines for noise-affected devices from power supply and motor power lines to reduce effect by noise.
  - <2> Separate power supplies between noise-generating and noise-affected devices to block off noise paths.
  - <3> Increase the impedance of signal lines to noise, for example, by passing the signal lines through ferrite core beads.
  - <4> Use line filters or shielded wires for signal lines to prevent noise from entering the signal lines.
- (2) Anti-measures that can be taken in noise-generating devices
  - <1> Lower noise levels by installing anti-noise devices such as noise filters.
  - <2> Isolate noise, using metal conduits or shielded wires.
  - <3> Block off noise paths, using isolation transformers.
- (3) Noise type-specific anti-noise measures  
 Noise types are described in F.2. Which anti-noise measure is effective varies depending on the noise type of interest. In addition, which anti-noise measure is effective and how effective it is also vary depending on the environment (such as power supply and radio wave strength) in which the machine is used, the situations of machine operation, and the noise immunity level of the equipment involved.

Take the most effective measure by referencing Table F.3.2.

**Table F.3.2 Noise type-specific anti-noise measures**

|                                          | Measure                                                 | Noise type       |                 |                 |
|------------------------------------------|---------------------------------------------------------|------------------|-----------------|-----------------|
|                                          |                                                         | Conduction noise | Induction noise | Radiation noise |
| Wiring and grounding                     | Separate signal lines from power supply and power lines | o                | o               |                 |
|                                          | Use metal conduits                                      |                  | o               | o               |
|                                          | Avoid parallel wiring                                   |                  | o               |                 |
|                                          | Shield power supply and power lines                     |                  |                 | o               |
|                                          | Ground securely                                         |                  | o               |                 |
| Anti-noise device (noise source side)    | Line filter                                             | o                |                 | o               |
|                                          | Isolating transformer                                   | o                |                 | o               |
| Anti-noise device (noise receiving side) | Ferrite core used with signal lines                     |                  | o               | o               |
|                                          | Signal line shielding                                   |                  | o               | o               |
| Others                                   | Separating power supplies                               | o                |                 |                 |

## **F.3.3 Concrete Examples of Anti-Noise Measures**

---

### **(1) AM radio**

<<Symptom>>

When a motor at a factory was energized, radios at the factory sounded bzzz, making voice and music inaudible.

<<Probable cause>>

The radios received radiation noise from the power line of the motor, which is connected to a servo amplifier.

<<Measure>>

- <1> Installed a noise filter (LC filter) on the power supply side.
- <2> Installed a capacitor across each input phase line and ground.

<<Caution>>

- These measures may not be effective in weak-wave areas, such as residential areas and mountain-ringed regions.
- If a noise filter is used, make the wiring between the filter and servo amplifier as short as possible.

### **(2) AM radio**

<<Symptom>>

When a machine at a factory was operated, radios in neighboring houses and cars parked outside the factory received noise.

<<Probable cause>>

The factory and the neighboring houses shared a pole-mounted transformer, and radiation noise from the wiring on the power supply side affected the radios. Alternatively, it was likely that conduction noise from the power supply line might affect the radios.

<<Measure>>

- <1> Installed a noise filter (LC filter) on the power supply side.
- <2> Supplied the neighboring houses with power from another pole-mounted transformer.

<<Caution>>

- If a noise filter is used, make the wiring between the filter and servo amplifier as short as possible.

### **(3) Refrigerator**

<<Symptom>>

Refrigerator motors in neighboring houses growled when a spindle at a factory decelerated.

<<Probable cause>>

The factory and the neighboring houses shared a pole-mounted transformer, causing voltage distortion resulting from power regeneration at spindle deceleration to make the refrigerator motors growl.

<<Measure>>

- <1> Supplied the neighboring houses with power from another pole-mounted transformer.
- <2> Readjusted the capacity of power supply equipment.



<<Caution>>

- In many cases, factories in residential areas receive power from pole-mounted transformers for their equipment and share power with residential buildings, leading to an insufficient power capacity for the factory equipment. In these cases, power distortion become large, being likely to affect home electrical power.

## (4) Telephone

<<Symptom>>

When a machine at a factory was operated, the telephone in a house across the road received noise.

<<Probable cause>>

When high-frequency current from a servo amplifier or motor returned through the grounding of a pole-mounted transformer, it shunted to the shielded ground of the telephone line, inducing noise electrostatically.

<<Measure>>

- <1> Supplied the house with power from another pole-mounted transformer.
- <2> Inserted a capacitor between the servo amplifier power supply and its grounding.

<<Caution>>

- Noise filters (LC filters) may not be effective to suppress noise having audio frequency components.
- Inserting a capacitor between the servo amplifier power supply and its grounding may cause a ground-fault circuit interrupter to trip because of an increasing leakage current.

## (5) FAX

<<Symptom>>

When a machine at a factory was operated, a fax machine in a neighboring firm failed in transmission and also noise entered the telephone at the factory. The telephone uses a 100 V power source. Disconnecting the 100 V power source from the telephone resumed normal communication.

<<Probable cause>>

A pole-mounted transformer was shared, and conduction noise from the power line caused the malfunction.

In addition, it was likely that induction noise might also occur on wiring as in (4).

<<Measure>>

- <1> Supplied the residential building with power from another pole-mounted transformer.
- <2> Inserted an insulating transformer (noise-cut transformer) in the power supply circuitry.

<<Caution>>

- LC filters may not be effective for low-frequency noise as in (4).

### **F.3.4 Anti-Noise Measures for Power Supply Equipment and Grounding**

---

If a noise problem still occurs in a machine already having general anti-noise measures, it may be solved by enhancing the grounding of the machine or installing a noise filter in it as stated below.

(1) Separating grounds

To prevent noise-related trouble from a machine, it is recommended to isolate the ground of the machine from other equipment when the machine is installed.

- What to do  
Isolate the ground of the machine's power transformer from the ground of the power supply transformer for equipment that may malfunction because of noise from the machine.
- Effect  
Isolating the grounds prevents noise from going from the machine to other equipment via a "common ground" so that the equipment will not be affected.

See Material 1 for a practical example.

(2) Enhancing machine grounding

If the impedance of an existing power supply grounding line for a machine (a large multi-axis machine in particular) is high and generates a noise voltage across the machine housing and the ground of the factory, it is recommended to enhance grounding.

- What to do  
Enhance grounding by adding a grounding wire or a ground.
- Effect  
If the impedance of the power supply grounding line is high and it is impossible for the existing power supply grounding wires to provide a good electrical ground, lower the grounding impedance of the machine by adding grounding wires.


See Material 2 for a practical example.

(3) Installing noise filters

If noise from a machine affects other devices through power supply lines adversely, it is recommended to install a noise filter.


- What to do  
Install a noise filter in the input power supply of the machine.
- Effect  
The noise filter prevents noise going from the machine to other devices through power supply lines to affect them adversely.

See Subsection 3.1.3.12 for the noise filters we recommend.

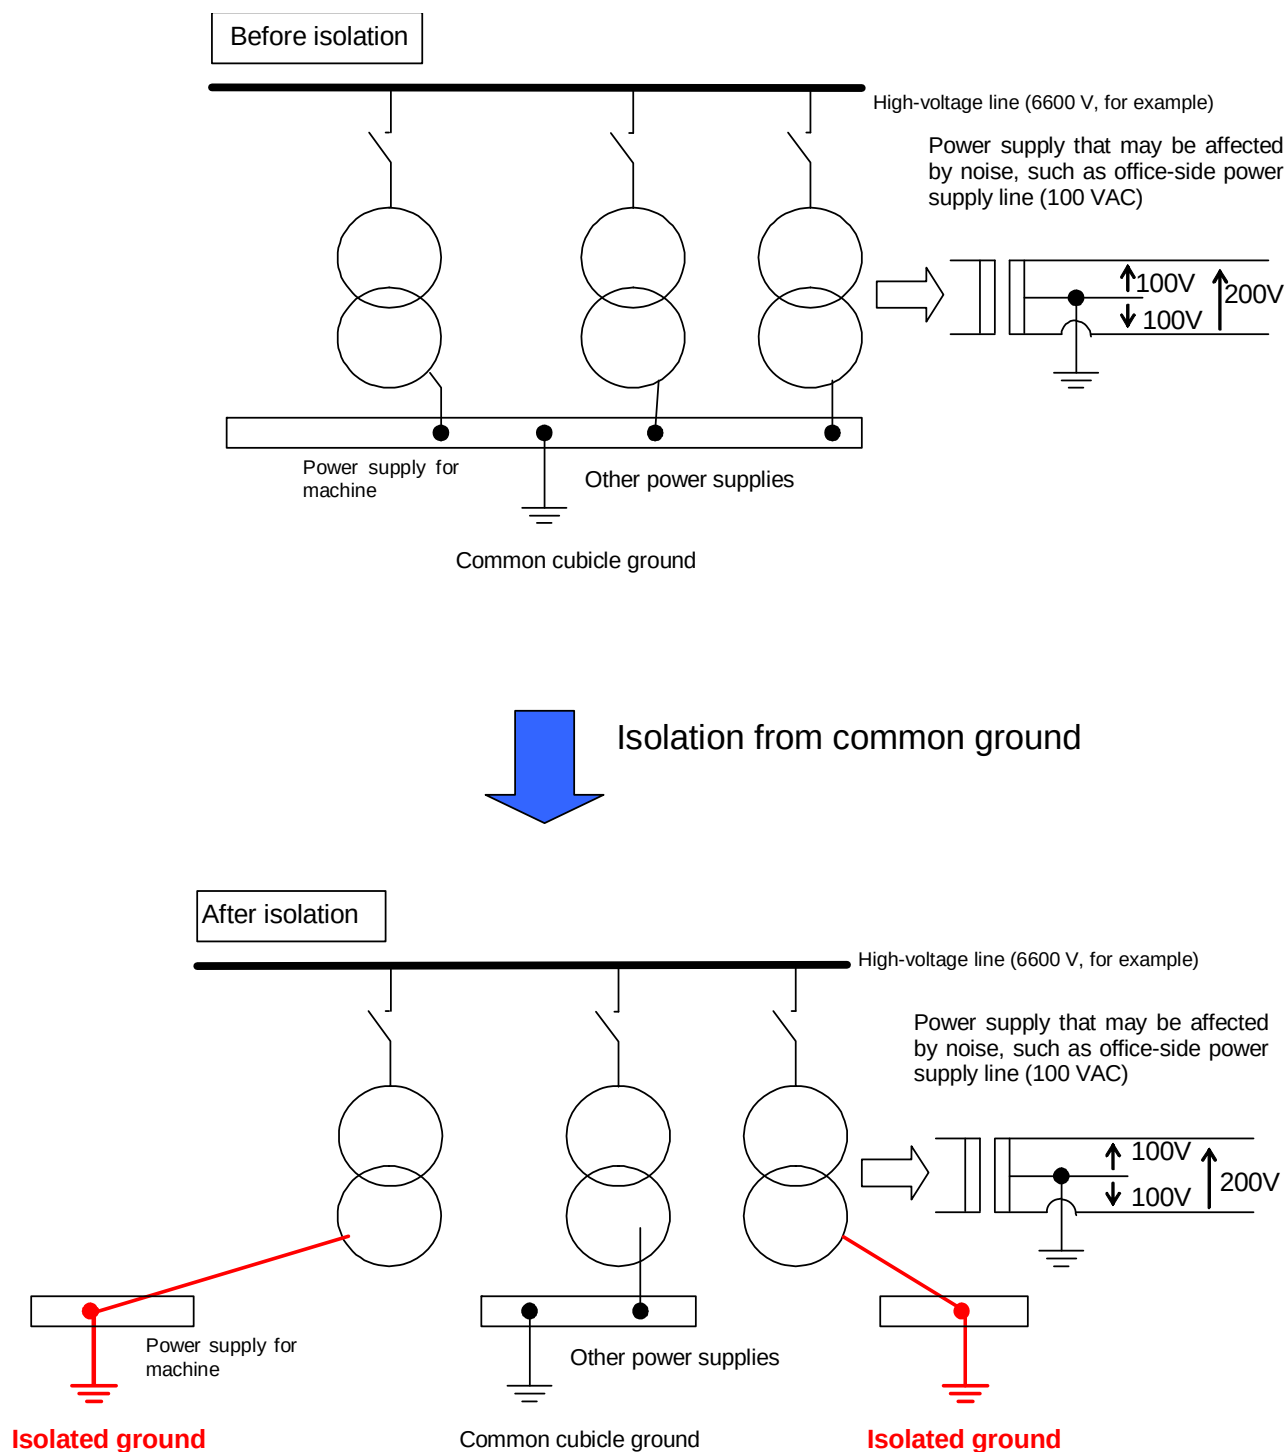**Material 1: Example of Separating Grounds**

## Material 2: Example of Enhancing Grounding

If the impedance of a power supply grounding line is high and it is impossible for the grounding of the power supply to provide a good electrical ground, enhance grounding by adding a grounding line or a ground so that the grounding impedance of the machine is lowered to suppress a noise voltage.

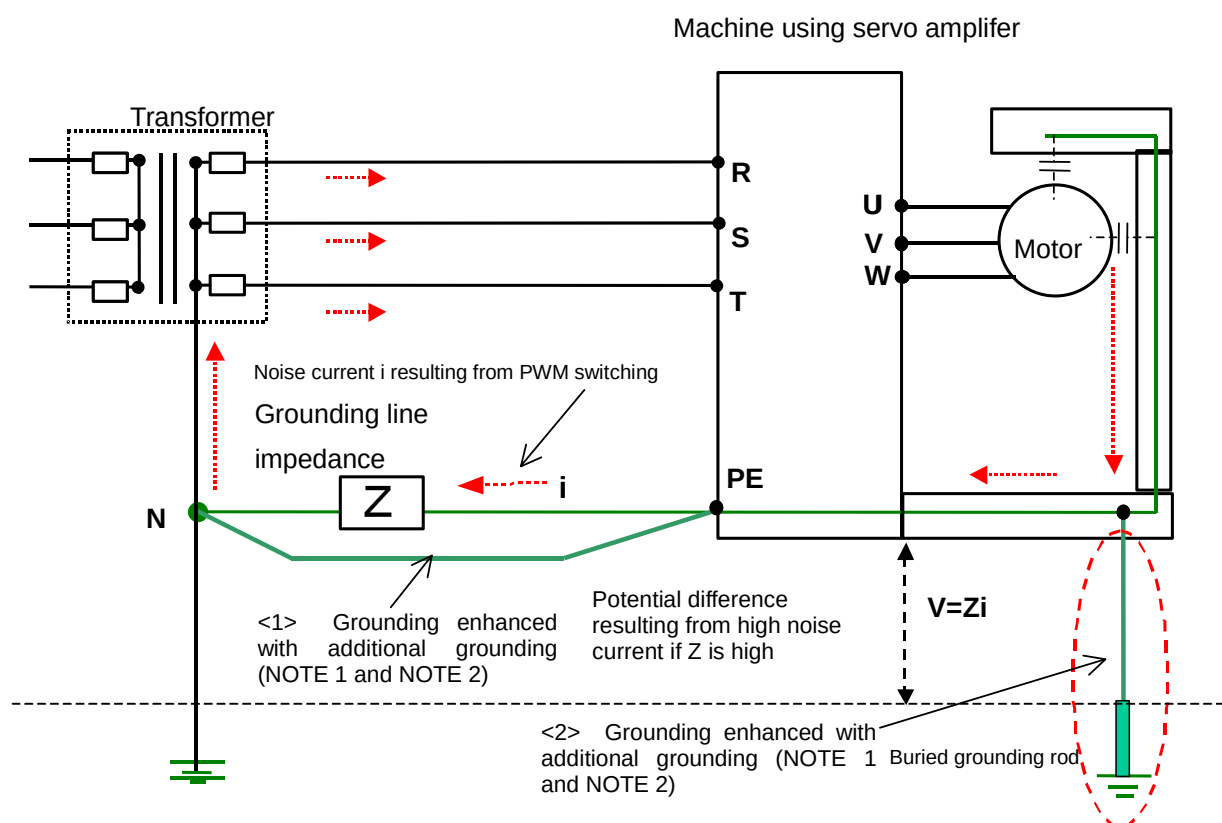

### NOTE

- 1 It is recommended to use mesh cables having a satisfactory high-frequency property for the additional grounding of a machine.
- 2 For TN connections, use additional grounding <1> shown above.  
For TT connections, use additional grounding <2> by, for example, burying a grounding rod near the machine.

## **F.3.5 Anti-Noise Devices**

---

As described earlier, what anti-noise measure to take and what anti-noise device to use vary depending on the type of the noise of interest, where the noise occurs, and how large the effect of the noise is. This subsection briefly describes some anti-noise devices. They should be used to take an appropriate measure according to the situations.

### **(1) Noise filter**

A noise filter can be inserted between a power supply and a servo amplifier to reduce high-frequency noise (noise voltage across terminals) superimposed on a supply voltage. Noise filters are effective on the AM radio frequency band.

Example products:

3SUP-H/3SUP-D Series from Okaya Electric Industries Co., Ltd.

NF3000/HF3000 Series from Soshin Electric Co., Ltd.

ZRCT/ZRGT Series from TDK

LH-3/LH-4 Series from Tokin

### **(2) Capacitor**

A capacitor can be connected directly to a servo amplifier to reduce radiation noise from electrical power lines. Capacitors have a low attenuation property, compared with noise filters. However, they may be effective depending on the situation of radio waves. Select a ground-fault circuit interrupter by giving consideration to leakage current.

Example products:

3XYB-105・104 from Okaya Electric Industries Co., Ltd.

LW3/LY3 Series from Soshin Electric Co., Ltd.

### **(3) Zero-phase reactor**

A zero-phase reactor can be inserted between a power supply and servo amplifier to reduce radiation noise from electrical power lines.

Example products:

RC Series from Soshin Electric Co., Ltd.

### **(4) Noise-cut transformer**

A noise-cut transformer can be inserted between a power supply and device to reduce conduction noise (low frequency) passing through electrical power lines or grounding lines.

Example products:

FFT Series from Fuji Electric

## ***F.4*** MISCELLANEOUS

---

### **(1) Harmonics and noise**

A harmonic is a sinusoidal wave having a frequency that is an integral multiple of the fundamental frequency (50/60 Hz). Usually, harmonics having a frequency of several tens of kHz or higher are specifically called noise, while those having a frequency of up to several kHz are referred to, using the same term (harmonics).

In many cases, noise occurs in inverter sections, and harmonics, in converter sections. What problem occurs and what measure to take differ between noise and harmonics.

For harmonics, the “Harmonics Suppression Measure Guideline” is available.

### **(2) References**

“Skillful Use of Inverters (Electrical Noise),” The Japan Electrical Manufacturers’ Association

# G

## EXAMPLES OF RECOMMENDED POWER MAGNETICS CABINETS FOR SERVO AMPLIFIER INSTALLATION

---

Appendix G, “EXAMPLES OF RECOMMENDED POWER  
MAGNETICS CABINETS FOR SERVO AMPLIFIER  
INSTALLATION,” consists of:

|                       |     |
|-----------------------|-----|
| G.1 OVERVIEW .....    | 452 |
| G.2 DESCRIPTIONS..... | 453 |

## **G.1 OVERVIEW**

In order to prevent the reliability of servo amplifiers from lowering because of their environments, it is important to seal up the power magnetism cabinet for the servo amplifiers and to give consideration to the environment of the inside of the cabinet.

This document presents cautions to be observed when designing power magnetism cabinets. They should be useful to those who are going to design power magnetism cabinets.

| Subsection No. | Subsection heading                            | Summary                                                                                                                                                                                                                                                                                                                                                                       |
|----------------|-----------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| G-2-1          | Power Magnetism Cabinet Seal-up               | Explains how to seal up power magnetism cabinets. Protecting electronics circuits in servo amplifiers requires installing them in a sealed power magnetism cabinet.                                                                                                                                                                                                           |
| G-2-2          | Environments for Amplifier Heat Sink Sections | Explains how to reduce extraneous materials, such as cutting fluid, oil mist, and cutting chips, that may get on heat sink sections. Those extraneous materials can lower the cooling efficiency of the servo amplifiers (leading to a lowered amplifier performance) and reduce the operating life of electronics components (power semiconductor devices, fan motors, etc). |
| G-2-3          | Environments for Amplifier Installation       | Describes cautions regarding environments in which amplifiers are installed. An environment impeding heat generation can lower the performance of the amplifiers and shorten the operating life of electronics components (power semiconductor devices, fan motors, etc).                                                                                                     |



## G.2 DESCRIPTIONS

### G.2.1 Power Magnetics Cabinet Seal-up

This subsection explains how to seal up power magnetics cabinets. In order to protect servo amplifier electronics circuits, it is necessary to house the servo amplifier in a sealed power magnetics cabinet.

- <1> Keep the power magnetics cabinet free of any hole or gap through which external air can enter the cabinet (Fig. 1). Do not make any hole in a cabinet wall panel; fitting air filters in holes cannot necessarily seal up the cabinet.
- <2> Do not make any hole in the cabinet wall panel to install a fan motor in the hole (Fig. 1). In order to release heat from the cabinet to the outside, use a device (such as a heat exchanger or cooler) having a structure that will not hamper seal-up of the cabinet.
- <3> Keep all joining areas of cabinet wall panels free of gaps. If cabinet wall panels are partly bonded (for example, spot-welded), fill any gaps between bonded areas with sealant, for example, in order to seal up the cabinet.

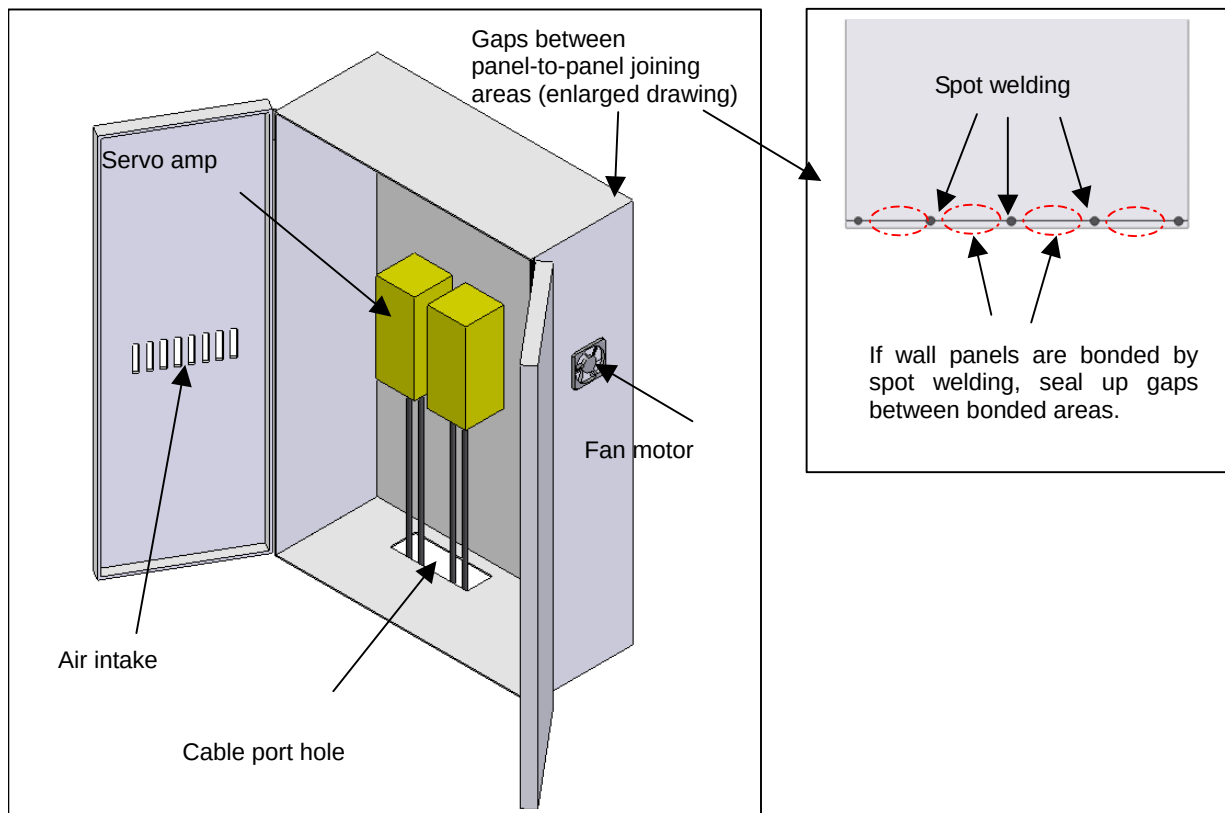


Fig. 1 Example of power magnetics cabinet not sealed well (example of poor

<4> Keep the cable port free of gaps (Fig. 1).

(Concrete method)

- 1) Fit a conduit in the cable port hole (Fig. 2).
- 2) If it is impossible to fit a conduit by any means, at least keep the cable port free of gaps. Shown below is an example of sealing by fitting sponge around cables (Fig 3). Do not allow cables to overlap with one on another; otherwise, gaps will occur around the cables. If there are many cables, separate them into several places.
- 3) If a cable duct is used as a cable port, be sure to seal up the duct. When leading cables into the duct, observe items 1) and 2).



Fig. 2 Fitting a conduit



Fig. 3 Sealing with sponge

<5> In order to prevent external air from entering through screw holes, observe the following:

- 1) Avoid making holes in cabinet wall panels as far as possible; for example, weld male screws (studs) to cabinet wall panels and use nuts with them (Fig. 4). Using cap nuts and applying sealant around them is also effective (Fig 5). When using cap nuts, give consideration to the length of screws used with the cap nuts.
- 2) For the top panel in particular, be sure to observe item 1), because extraneous materials, such as cutting fluid, can easily get on the panel.
- 3) If a screw hole is left unused (open) because of no screw being inserted (for example, a grounding terminal screw hole left unused), be sure to block it up.

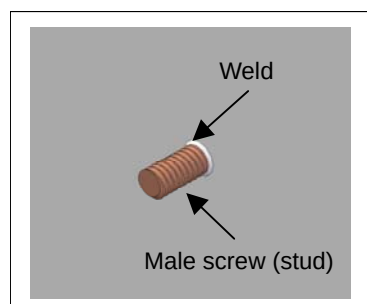


Fig. 4 Welding male screw

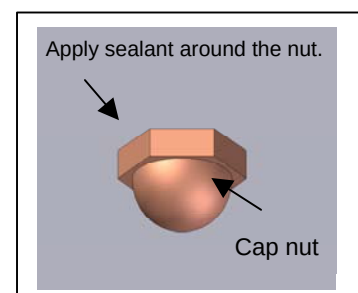


Fig. 5 Using cap nut

- <6> Avoid allowing gaps in the portions where the door meets the door frame.
- 1) Seal the door, for example, by attaching gaskets to the inside edges of the door (Fig. 6).
  - 2) When attaching gaskets, do not leave gaps between the gaskets, especially those at the corner of the door (Fig. 6).
  - 3) If the cabinet has a double-door structure, use a gasket between the doors (Fig. 7).
  - 4) If a hole is made in a door panel to fit a component in it, seal the hole with a gasket to secure seal-up.
  - 5) To seal up the cabinet, be sure to lock the door.

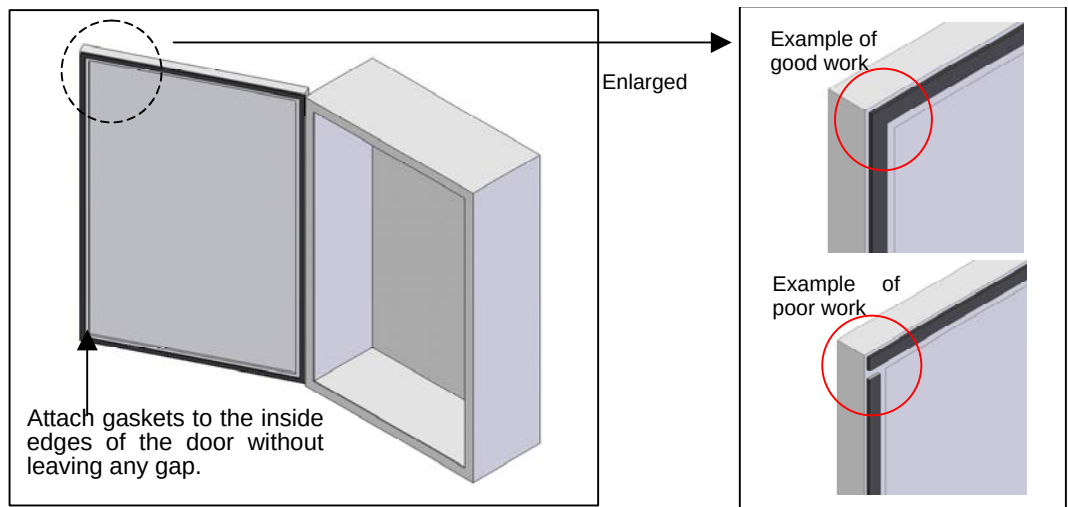


Fig. 6 Sealing doors

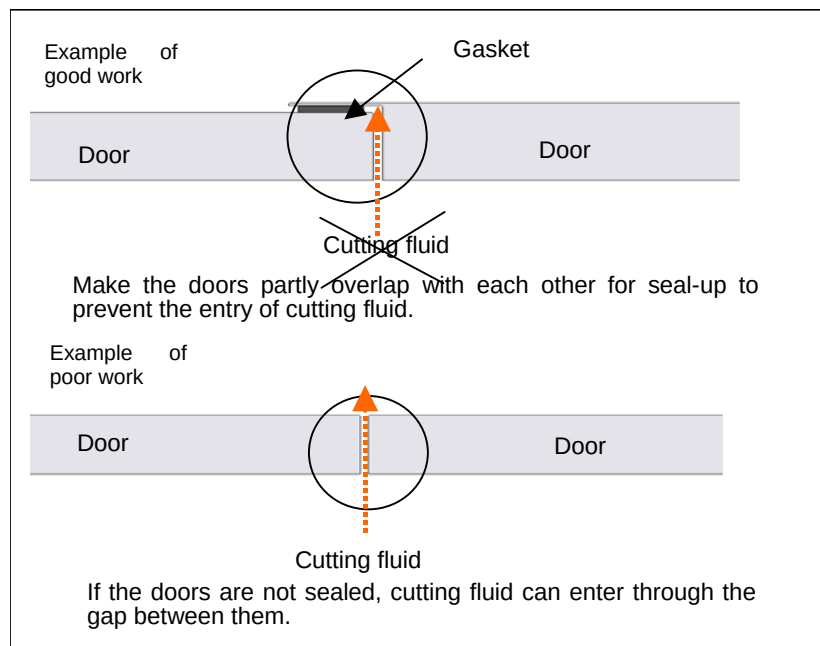


Fig. 7 Double-door structure seal-up (cross-section view of portion where the doors meet)

- <7> Provide an underthroating at the portion where the power magnetism cabinet frame meets the door (Fig. 8) to prevent the entry of cutting fluid.

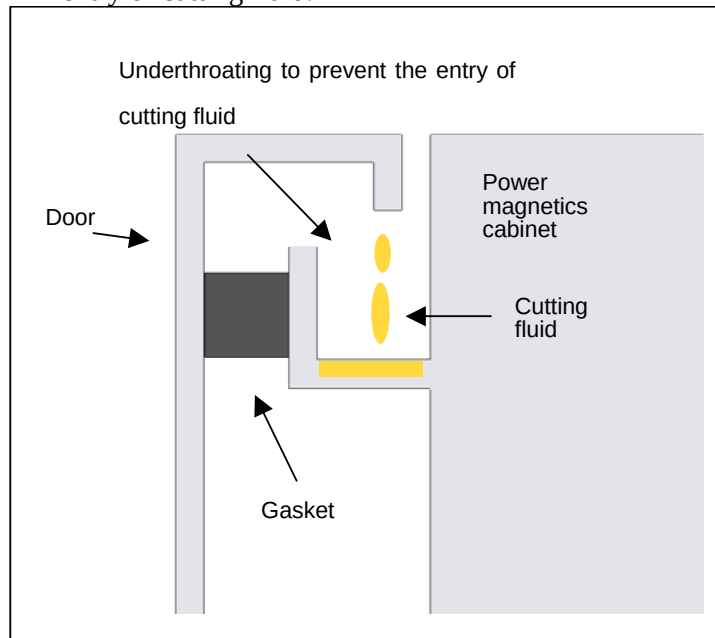


Fig. 8 Explanation of underthroating

- <8> Lead cables into the power magnetism cabinet from below the cable port. This is intended to try to prevent cutting fluid entering the cabinet along cables (Fig. 9).

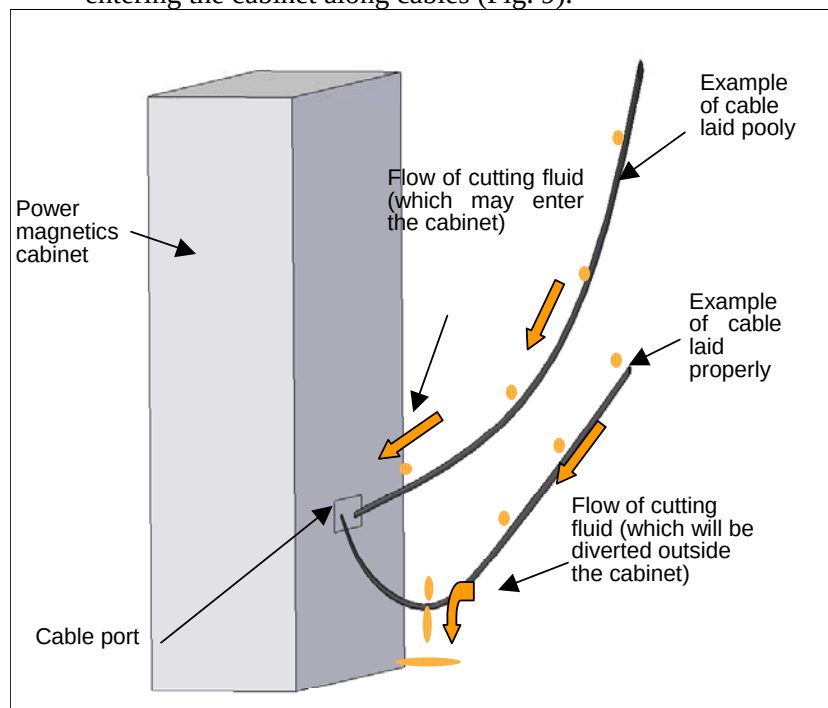


Fig. 9 How to lead in cables

## G.EXAMPLES OF RECOMMENDED POWER MAGNETICS CABINETS FOR SERVO AMPLIFIER

B-65282EN/06

### APPENDIX

- <9> If holes are made in a power magnetism cabinet wall panel to install an amplifier, attach the supplied gaskets to the holes to seal up the cabinet. At each corner of the amplifier, make gaskets overlap with each other. If not (for example, gaskets are cut short), a gap may occur, leading to leakage (Fig. 10).

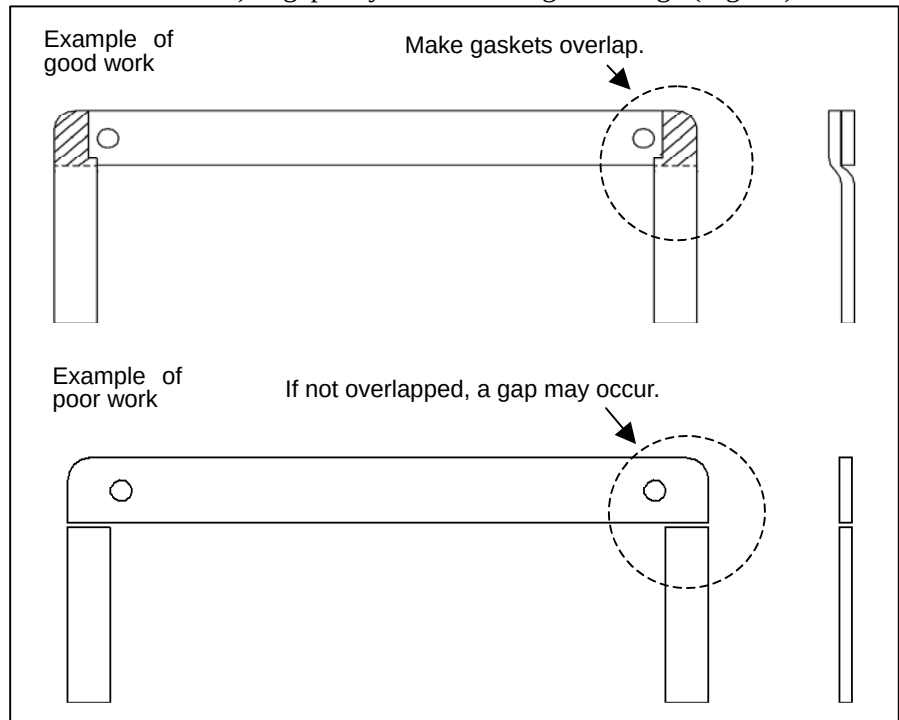


**Fig. 10 How to attach gaskets**

## G.2.2 Environments for Amplifier Heat Sink Sections

This subsection explains how to prevent extraneous materials, such as cutting fluid, oil mist, and cutting chips, from getting on amplifier heat sink sections.

If extraneous materials, such as cutting fluid, oil mist, and cutting chips, get on servo amplifier heat sink sections or fan motors, they can lower the cooling efficiency (performance) of the servo amplifiers and shorten the operating life of electronics components (such as power semiconductor devices and fan motors).

<1> If a structure that takes in fresh air to cool a heat sink section is employed, be sure to enclose the heat sink section in a box having vent holes and cover the vent holes (both intake and discharge holes) with air filters to prevent the entry of cutting fluid mist (Fig. 11).

Select vent holes and air filters designed to release heat properly by giving consideration to the heat release property of the structure. Replace air filters at regular intervals; dirty air filters can lower the cooling efficiency.

Do not provide vent holes in the top panel; cutting fluid would accumulate in the air filter of any vent hole in the top panel and later drop into the box.

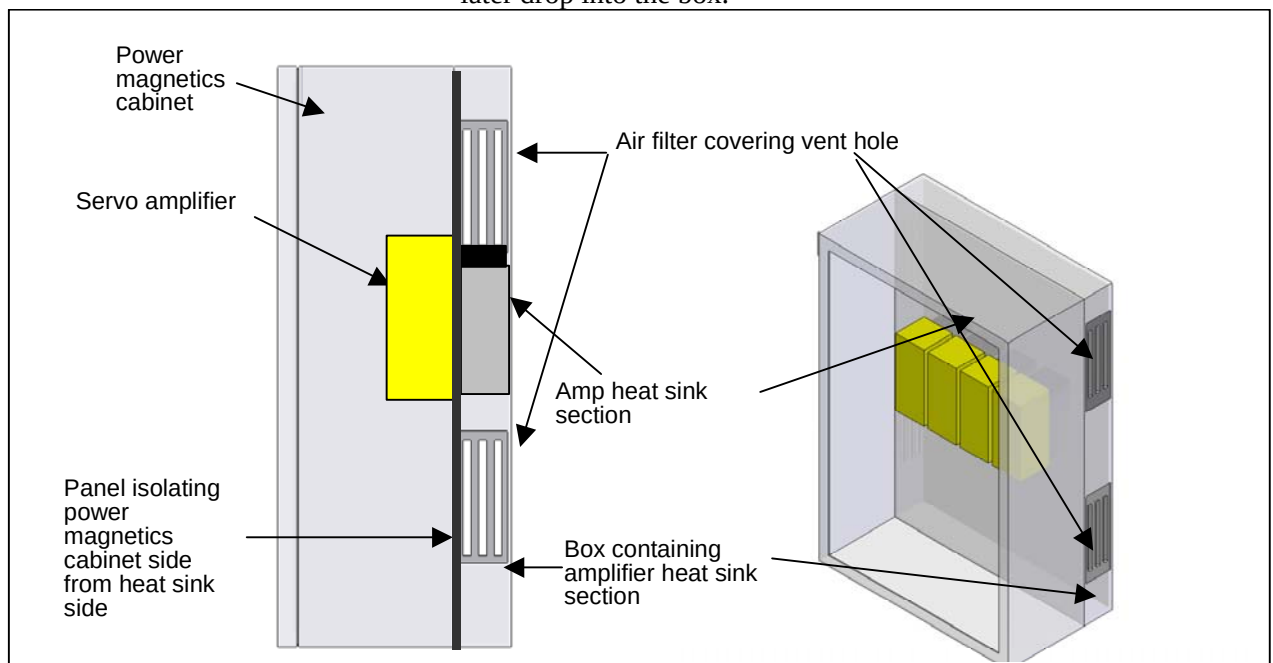


Fig. 11 Air filter locations

<2> Be sure to isolate the machining area from the amplifier heat sink section (Fig. 12); if cutting fluid or cutting chips get in direct contact with an amplifier heat sink section, its heat release property gets lowered (Fig. 13).

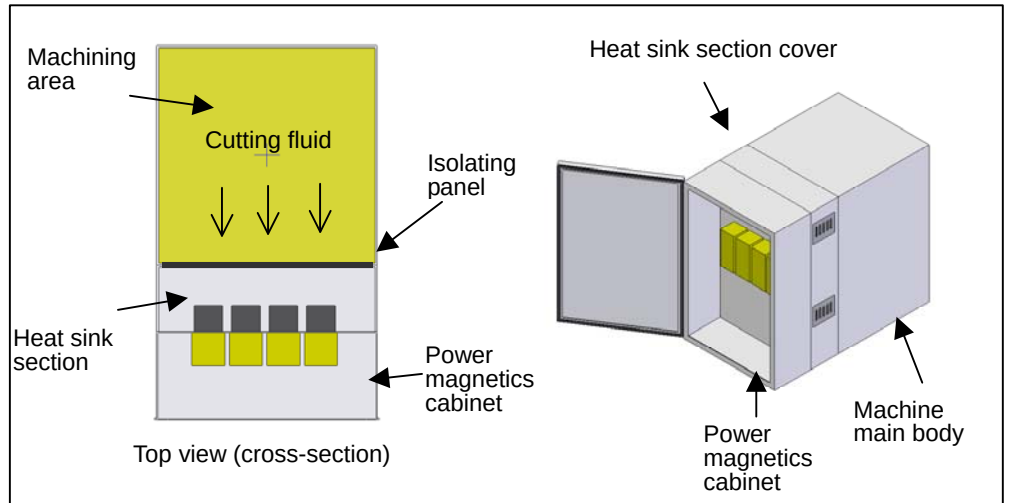


**Fig. 12 Machining area isolated from amp heat sink section (example of good work)**

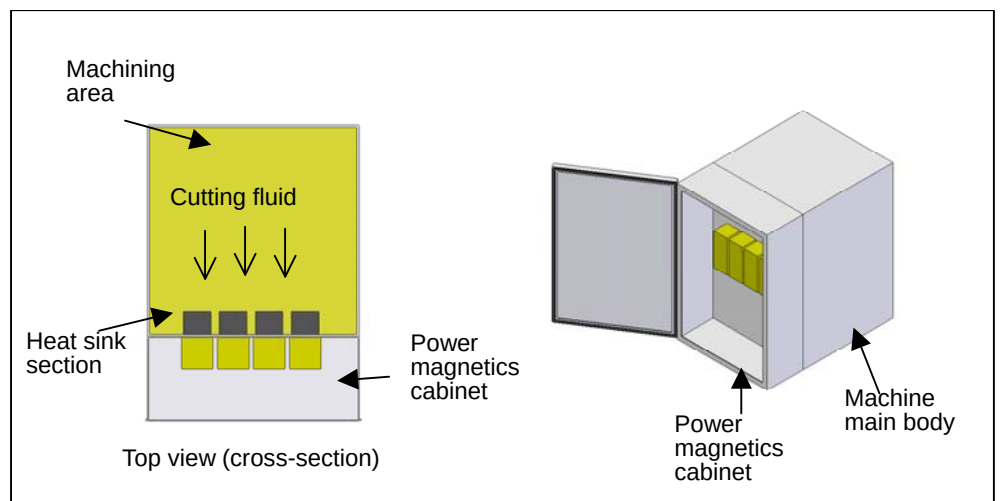


**Fig. 13 Machining area and amp heat sink section sharing the same place (example of poor work)**

## G.2.3 Environments for Amplifier Installation

This subsection describes cautions to be observed with regard to environments for amplifier installation.

If the heat release property of the heat sink section of a servo amplifier gets lowered because of the servo amplifier installation environment being improper, it is likely that the amplifier performance may be lowered and the operating life of electronics components (such as power semiconductor devices and fan motors) may be shortened.

### <1> Mounting heat exchangers

If the temperature inside the power magnetism cabinet is at least 10°C higher than the ambient temperature, use heat exchangers to cool the inside of the cabinet.

\*1: When attaching a heat exchanger, fit gaskets around it to seal up the cabinet.

\*2: Prevent air from heat exchangers from flowing directly onto amplifiers or electronics products; otherwise, it is likely that any dust and dirt in the cabinet may be blown to them.

### <2> Installing a cooling fan for agitating air inside

Installing a cooling fan inside the power magnetism cabinet can homogenize the temperature and increase the heat release efficiency of the power magnetism cabinet (Fig. 14).

\*1: Do not place any cable that may hamper air agitation near the cooling fan air outlet.

\*2: Prevent air blowing from a cooling fan directly onto amplifiers or electronics products; otherwise, it is likely that dust and dirt in the cabinet may be blown to them.

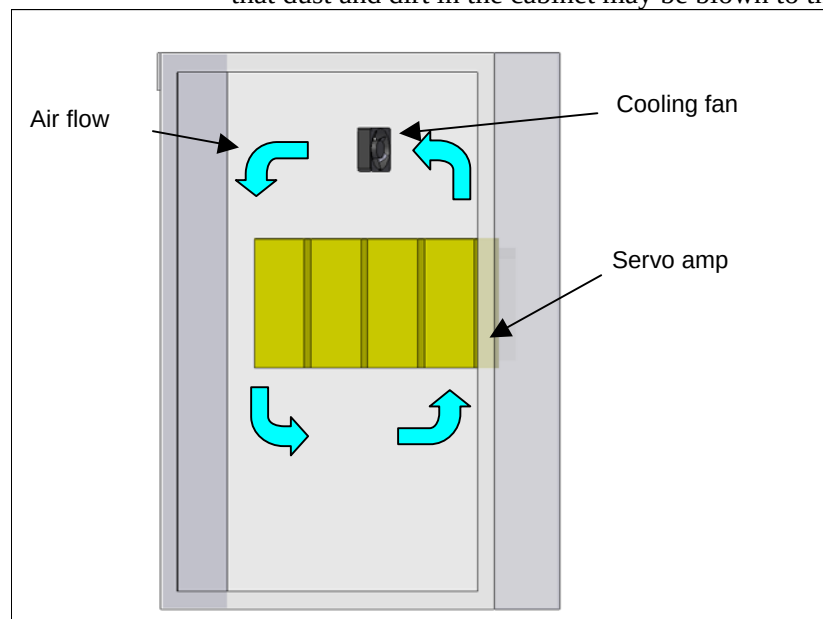


Fig. 14 Example of installing motor-driven fan for agitating air inside



<3> Using dehumidifying agent inside the power magnetics cabinet  
Placing dehumidifying agent, such as dehumidifying sheets, in the power magnetics cabinet can prevent the reliability of servo amplifiers from lowering.

<4> How to install servo amplifiers

It is assumed that, when servo amplifiers are installed, they will be arranged in a row. If you cannot help but arrange them in a column, observe the following (Fig. 15):

\*1: Keep cooling air for the lower amplifier from flowing directly onto the upper amplifier; otherwise, the heat release property of the upper amplifier gets lowered, being likely to result in the upper amplifier failing to deliver its rated output.

\*2: Keep the upper amplifier from blocking up the cooling air flow for the lower amplifier.

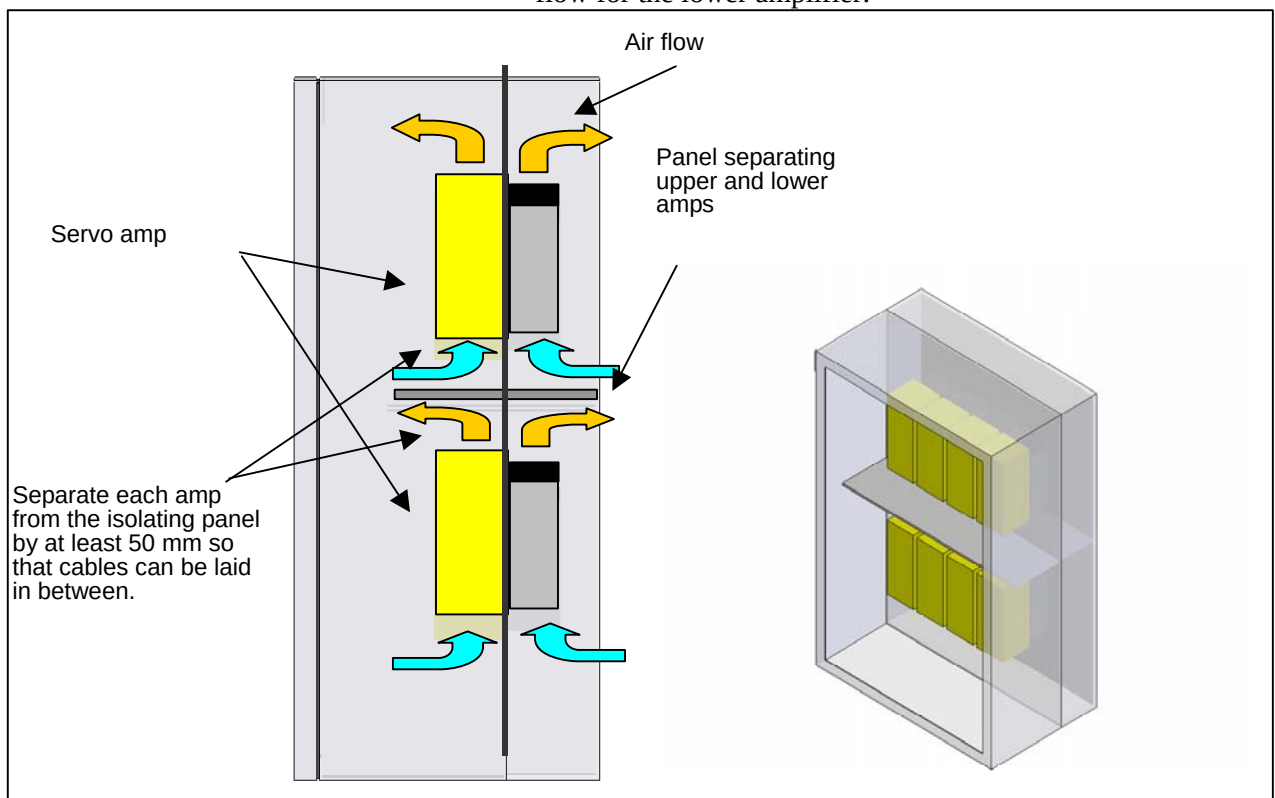


Fig. 15 Example of arranging amps in a column

H

DC LINK TERMINAL BOARD SECTION  
PROTECTIVE COVER

---

Appendix H, “DC LINK TERMINAL BOARD SECTION PROTECTIVE COVER,” consists of:

|                        |     |
|------------------------|-----|
| H.1 OVERVIEW .....     | 463 |
| H.2 HOW TO MOUNT ..... | 464 |

## **H.1** OVERVIEW

---

Protective covers are available for the DC link terminal board section of the  $\alpha i$  series servo amplifier unit. They can be used if necessary.



Ordering information: A06B-6110-K502

Quantity: 1 (4 required)

## H.2 HOW TO MOUNT

Mount protective covers to the DC link terminal board as shown below.


Screw each protective cover with a tightening torque of 3.5 to 4.5 Nm.

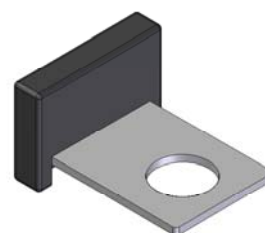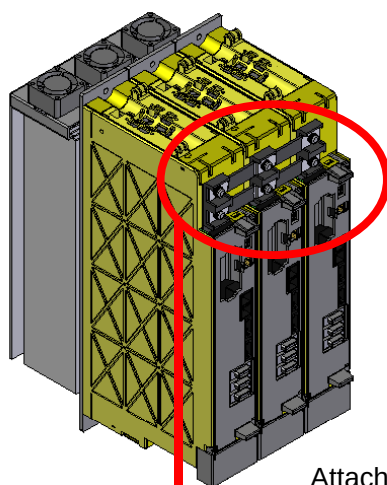


Protective cover  
A06B-6110-K502

Attach protective covers (four) to the DC link terminal board of the amp at either end.

Enlarged

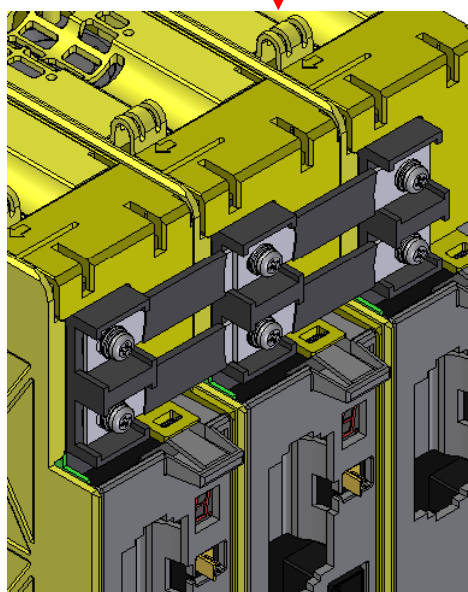

Before mounting

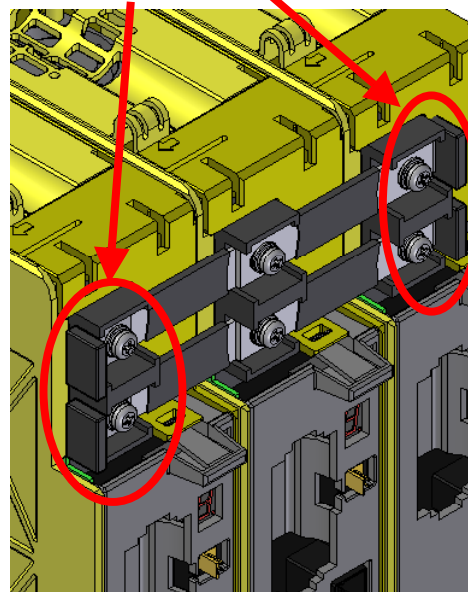

After mounting



## POWER FAILURE DETECTION FUNCTION

---

Appendix I, “POWER FAILURE DETECTION FUNCTION,”  
consists of:

|                                                                                       |     |
|---------------------------------------------------------------------------------------|-----|
| I.1 OVERVIEW .....                                                                    | 466 |
| I.2 POWER FAILURE DETECTION SPECIFICATION .....                                       | 467 |
| I.3 APPLICATION TO PREVENTION OF VERTICAL AXES<br>FROM FALLING AT POWER FAILURE ..... | 469 |

---

## ***I.1***      **OVERVIEW**


---

The upgraded version incorporates a power failure detection function. This function can prevent a vertical axis from falling by applying the brake to the vertical axis promptly as directed by a power failure detection signal output from the  $\alpha i$  PS after a power failure.

## I.2 POWER FAILURE DETECTION SPECIFICATION


- The following voltage drops are detected as power failures:
  - (1) Drop of a 3-phase voltage (L1, L2, or L3) input to the main circuitry of the  $\alpha i$  PS
  - (2) DC link voltage drop
  - (3) Drop of a voltage (between pins 1 and 2 of connector CX1A) input to the control power supply of the  $\alpha i$  PS
- Power failure signals are output through a photo MOS relay (Fig. 1).
- There are two power failure detection output channels, which operate the same way.

Fig. 1 Output circuit

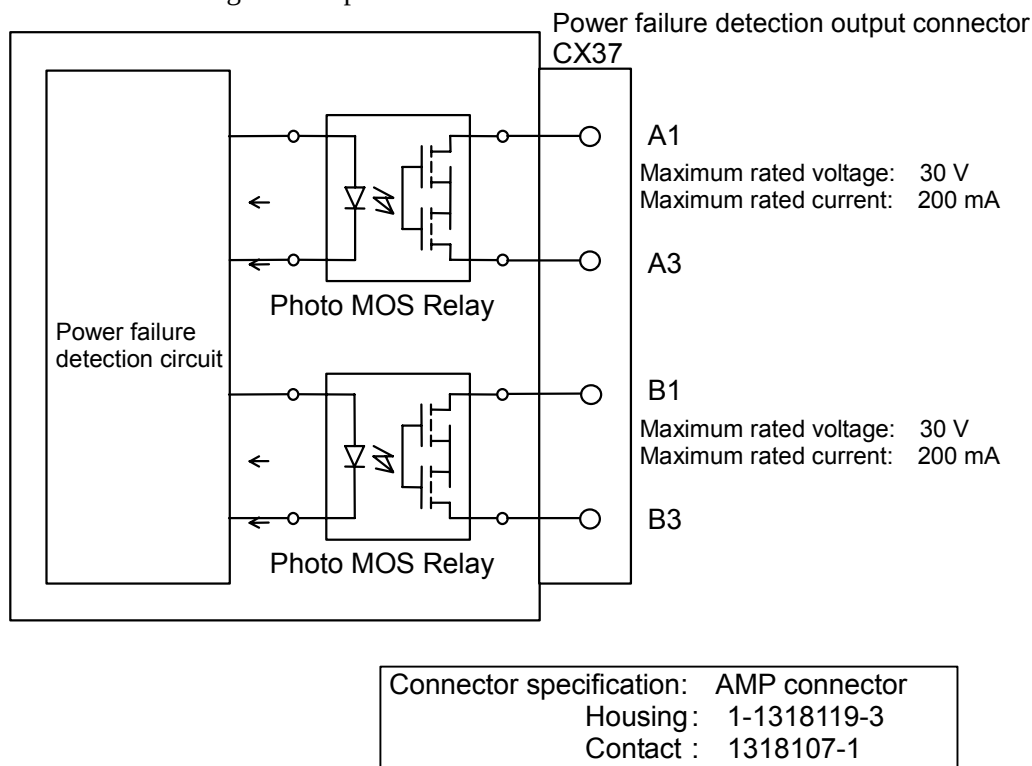


- The power failure detection output is closed normally and becomes open at power failure (Fig. 2).
- The power failure detection output becomes open 10 msec after a power failure occurs. It becomes closed 15 msec after the power is resumed (Fig. 2).
- If an alarm condition occurs in the  $\alpha i$  PS, the power failure detection output becomes open (in the same condition as for the detection of a power failure) (Fig. 2).

Fig. 2 Power failure detection output

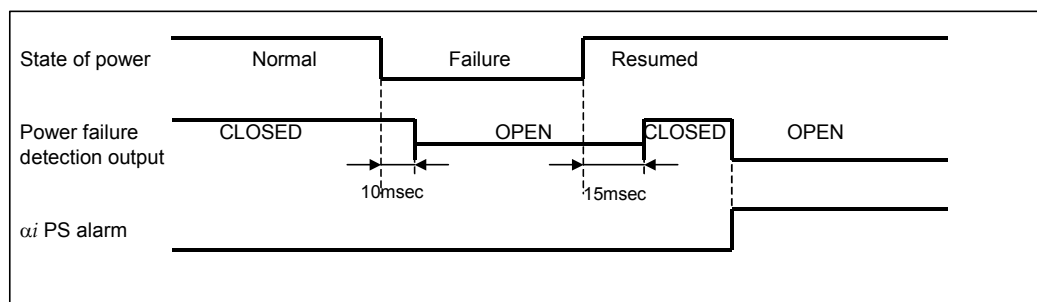

- The power failure detection output becomes closed within 1.5 sec after the control power (200 VAC) is applied to the  $\alpha i$  PS, enabling power failures to be detected after the  $\alpha i$  PS becomes ready (the LED display on the  $\alpha i$  PS becomes "0").
- If the  $\alpha i$  PS is not ready (the LED display on the  $\alpha i$  PS is "-"), the power failure detection output remains closed.

Fig. 3 Conditions enabling power failure detection

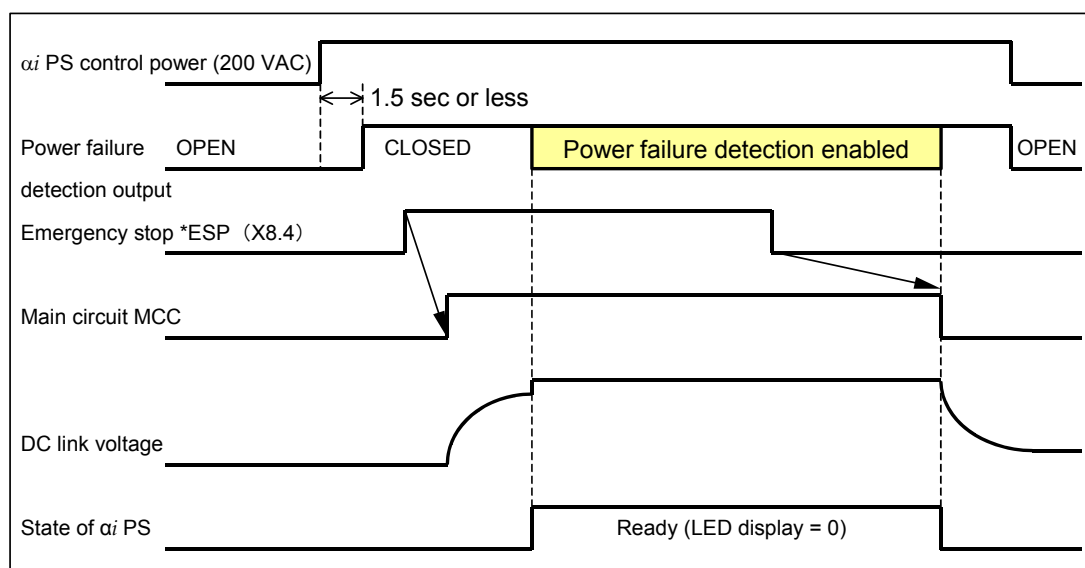




## I.3 APPLICATION TO PREVENTION OF VERTICAL AXES FROM FALLING AT POWER FAILURE

Preventing a vertical axis from falling at power failure requires applying the brake to the vertical axis before its motor is deenergized. To put it another way, it is necessary to perform the following:

- (1) Apply the brake promptly after the occurrence of a power failure.
- (2) Keep the vertical axis motor energized since the occurrence of the power failure until the brake works.

Timing chart

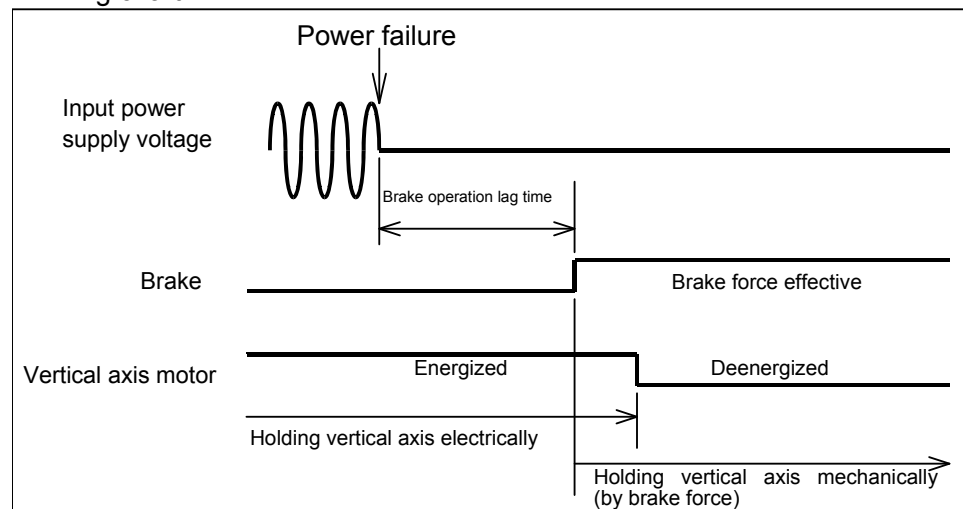


### I.3.1 Procedure

- (1) Configure a brake circuit that operates promptly after the occurrence of a power failure (Subsection I.3.2).
- (2) Keep the vertical axis motor energized until the brake comes into operation (Subsection I. 3. 3).
  - Check the control power supply hold time.
  - Set parameters.
- (3) Confirm the effect of the measure taken (Subsection I.3.5).

## I.3.2 Brake Circuit

The emergency stop signal (\*ESP) and the brake operation relay must be operated together on a power failure detection output from the  $\alpha i$  PS.


Configure a brake circuit as shown below.

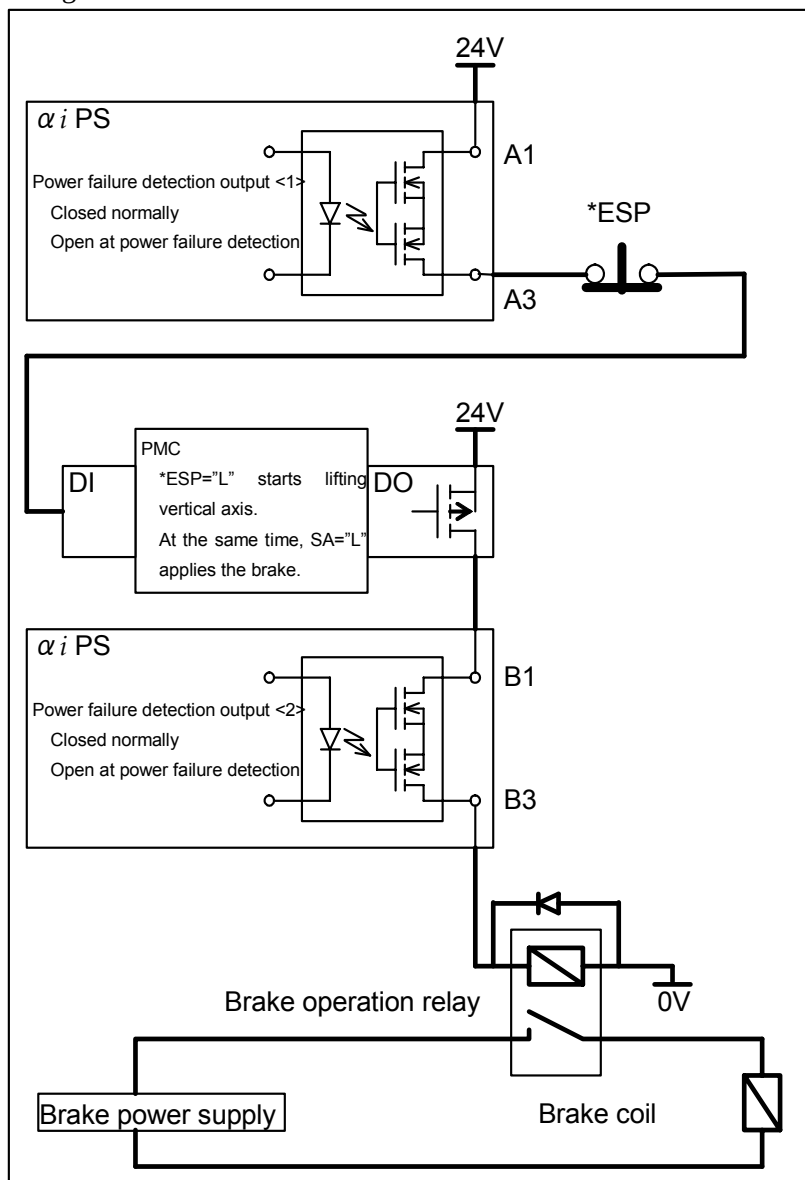

Refer to “FANUC AC SERVO MOTOR  $\alpha i$  series Descriptions” (B-65262EN) for explanations about the specification of the brake operation relay contacts. Connect a surge suppression element (such as a diode) in parallel to the relay coil in order to suppress voltage surges that may occur when the relay is deenergized.

## Time since the occurrence of a power failure until the brake operates

The “brake operation lag time” since the occurrence of a power failure is the sum of the “power failure detection delay time,” “relay release time,” and “brake response time.”

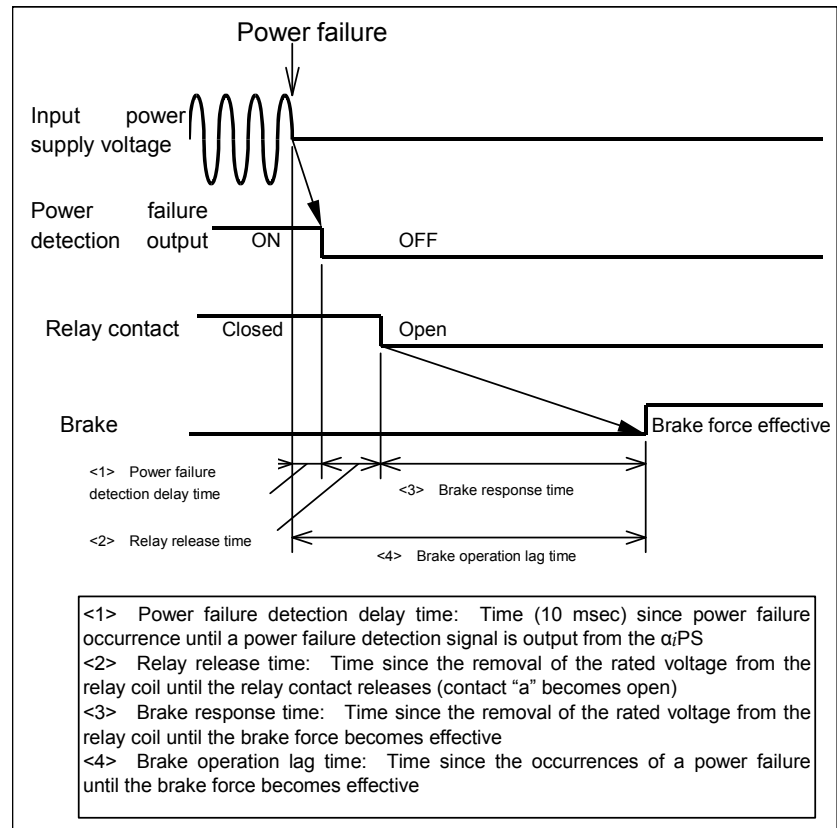

## Relay release time

Select a relay with a short contact release time.

Example:

Omron G2R (coil voltage of 24 VDC, with a built-in diode):  
Release time of 20 msec or less

## Brake response time

Listed below are the specifications of the built-in brake of each motor model.

| Motor model         | $\alpha$ i F1, $\alpha$ i F2<br>$\alpha$ iS2, $\alpha$ iS3<br><br>$\alpha$ iS2HV<br>$\alpha$ iS3HV | $\alpha$ i F4, $\alpha$ i F8<br>$\alpha$ iS8, $\alpha$ iS12<br>$\beta$ i S4, $\beta$ i S 8<br>$\alpha$ i F4HV, $\alpha$ i F8HV<br>$\alpha$ iS8HV, $\alpha$ iS12HV | $\alpha$ i F12- $\alpha$ i F40<br>$\alpha$ iS22 - $\alpha$ iS50<br>$\beta$ i S 12 - $\beta$ i S 30<br>$\alpha$ i F12HV, $\alpha$ i F20HV<br>$\alpha$ iS22HV, $\alpha$ iS50HV | $\alpha$ iS100<br>$\alpha$ iS200<br>$\alpha$ iS100HV<br>$\alpha$ iS200HV |
|---------------------|----------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------|
| Response time (max) | 10msec                                                                                             | 30msec                                                                                                                                                            | 30msec                                                                                                                                                                       | 60msec                                                                   |

**Brake operation lag time**

Given below is an example of calculating the time that elapses since the occurrence of a power failure until the brake operates.

## Conditions

- <1> Power failure detection delay time → 10 msec
- <2> Relay (Omron G2R) release time → 20 msec
- <3> Brake (incorporated in the  $\alpha i$  F8) response time → 30 msec

Result 10 msec + 20 msec + 30 msec = 60 msec


### 1.3.3 Method for Keeping Vertical Axis Motors Energized

The following conditions are required to keep a vertical axis motor energized after the occurrence of a power failure.

- (1) The control power supply for the NC and amplifier remains normal.
- (2) Parameters for enabling brake control are set.

#### Keeping control power on

Keeping a vertical axis motor energized even after the occurrence of a power failure requires keeping the control power for the NC and amplifier on for longer than the “brake operation lag time.”

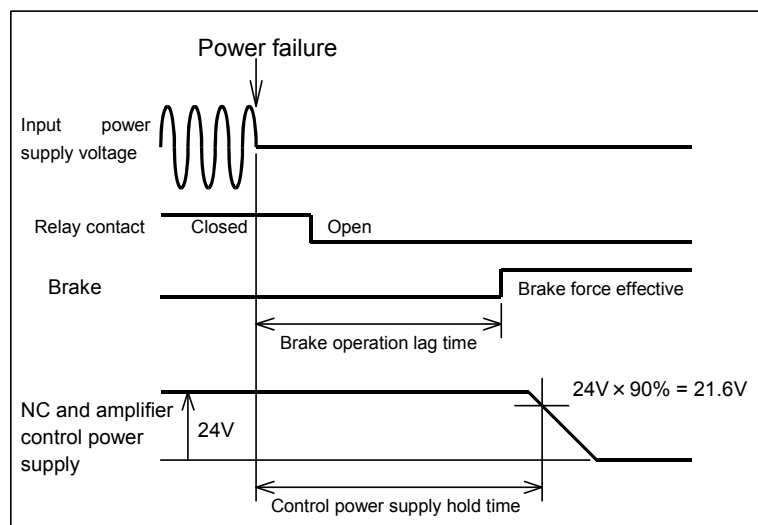

\* See Subsection 5.2.2 for descriptions of the brake operation lag time.

- (1) NC control power supply

Check the specification of an external power supply for supplying a control power voltage of 24 V.

The hold time of external power supplies varies depending on their load ratio (ratio of load current to power supply current rating). The lower the load ratio, the longer is the hold time after power failure occurrence. Using a power supply having a somewhat high current rating compared with the load current is effective in keeping the hold time long.

If a switching power supply with a 200 VAC single-phase input is used as a control power supply for the NC, use the same power supply voltage phase as for the control power inputs (pins 1 and 2 of connector CX1A) of the  $\alpha i$  PS so that a drop in the 200 VAC control power supply input can be detected promptly.

## (2) Amplifier control power supply

The hold time of the amplifier control power supply is determined according to how many SP and SV units are connected to the PS.

The rough hold time of the amplifier control power supply can be determined from the sum (N) of the constants n (Table 1) for each SP and SV connected to the PS according to Table 2.

Example: Assume the following SP and SV units are connected to one PS.

One  $\alpha i$  SP 22 unit/one  $\alpha i$  SV 360 unit/one  $\alpha i$  SV 160 unit/one  $\alpha i$  SV 80/80 unit

(According to Table 1)

$n = 1$        $n = 1.5$        $n = 1$        $n = 1.5$

$N = 1 \times 1 \text{ unit} + 1.5 \times 1 \text{ unit} + 1 \times 1 \text{ unit} + 1.5 \times 1 \text{ unit} = 5$

→ Hold time 40 msec (according to Table 2)

**Table 1 Constant n for SP/SV**

|                | Amplifier model                                                                 | n   |
|----------------|---------------------------------------------------------------------------------|-----|
| SP             | $\alpha i$ SP 2.2 to 30, 5.5HV to 45HV (60 mm-wide/90 mm-wide/150 mm-wide type) | 1   |
|                | $\alpha i$ SP_45, 55, 75HV, 100HV (300 mm-wide type)                            | 1.5 |
| SV<br>(1 axis) | $\alpha i$ SV 20 to 160, 10HV to 80HV (60 mm-wide/90 mm-wide type)              | 1   |
|                | $\alpha i$ SV 360, 180HV (150 mm-wide type)                                     | 1.5 |
|                | $\alpha i$ SV_360HV (300 mm-wide type)                                          | 2   |
| SV<br>(2 axes) | All models                                                                      | 1.5 |
| SV<br>(3 axes) | All models                                                                      | 2   |

**Table 2 Relationships between the amplifier control power supply hold time and N (sum of constants n)**

| Amplifier control power supply hold time | N   |
|------------------------------------------|-----|
| 20 msec                                  | 8   |
| 30 msec                                  | 6.5 |
| 40 msec                                  | 5   |
| 50 msec                                  | 4   |
| 60 msec                                  | 3   |
| 70 msec                                  | 2   |

\* The input voltage is 200 VAC.

### Confirmation on the real machine

The amplifier control power supply hold time obtained using the expression given above is a mere rough estimate. The exact hold time of the amplifier and NC control power supplies must be confirmed on the real machine.

See Subsection 5.2.5 for explanations about a confirmation method.

## Measure for an insufficient amplifier control power supply hold time

- (1) If the hold time of the amplifier control power supply is insufficient (shorter than the brake operation lag time), it can be prolonged by supplying control power to some of the SP and SV units from the outside to reduce the load of the power supply in the PS. See Subsection I.3.6 for explanations about how to supply control power to SP or SV units from the outside.
- (2) If the hold time of the NC and amplifier control power supplies is insufficient and it is difficult to add control power supplies or increase the capacity of existing control power supplies, connecting an UPS (uninterruptible power supply unit) can prolong the hold time.

## Parameter setting

Set parameters for brake control.

- (1) Brake control bit (BRKC): To be set to enable brake control.
- (2) Brake control timer: To be set to a value not less than the brake operation lag time (100 msec or so).
- (3) Emergency stop timer incorporated in the  $\alpha i$  amplifier (ESPTM1, ESPTM0): To be set to a value longer than the brake control timer.

| CNC                                   | Parameter No. |                     |            |            |
|---------------------------------------|---------------|---------------------|------------|------------|
|                                       | BRKC          | Brake control timer | ESPTM1     | ESPTM0     |
| FS15i                                 | No.1883 #6    | No.1976             | No.1750 #6 | No.1750 #5 |
| FS16i, 18i, 21i,<br>30i, 31i, 32i, 0i | No.2005 #6    | No.2083             | No.2210 #6 | No.2210 #5 |
| Example setting                       | 1             | 100                 | 0          | 1          |

Refer to the “FANUC AC SERVO MOTOR  $\alpha i$  series Parameter Manual” (B-65270EN) for detailed descriptions.

### NOTE

If a multiaxis amplifier (such as a 2- or 3-axis amplifier) is used for vertical axes, set the above parameters for all axes on the multiaxis amplifier.

---

### **I.3.4 Cautions**

---

- (1) If a power failure occurs during heavy cutting, it is likely that it may be impossible to prevent a vertical axis from falling. This is because a DC link low voltage alarm occurs before the brake operates. Preventing vertical axes from falling in these situations requires connecting a power failure backup module to submodule C.
- (2) Even if a measure is taken to prevent a vertical axis from falling, it falls through a distance corresponding to the backlash of the brake (for a ball screw pitch of 10 mm, up to 20  $\mu\text{m}$ ). If this distance cannot be ignored, the lifting function against gravity at emergency stop can be used to lift the vertical axis through that distance before a complete stop. Refer to the parameter manual (B-65270EN) for detailed descriptions of this function and parameter setting.
- (3) If the connected drive power supply is a 200 VAC dynamic brake module DBM (A06B-6079-H401 or A06B-6069-H300), an UPS (uninterruptible power supply unit) having a 200 VAC output is needed to drive the DBM. Connect the servo amplifier connector CX1A with an UPS having the following specifications:
  - Output voltage: 200 VAC single-phase sine wave
  - Output frequency: 50 or 60 Hz
  - Changeover time: No instantaneous break
  - Output hold time: Brake operation lag time (see Subsection 4.2.2)
  - Rated output (continuous rating): Number of DBM units  $\times$  22 [VA]
  - Overload strength (20 msec): Number of DBM units  $\times$  220 [VA]

If this UPS is used also as an amplifier control power supply (input to the CX1A of the PS), it must have an output rating (continuous rating) of 700 VA. If a DBM (A06B-6079-H403) driven on 24 VDC is used and the 24 VDC power supply can remain on for the brake operation lag time or longer, no UPS is needed.



### **I.3.5 Confirming Effect**

---

The following procedure can be used to check whether a measure taken to prevent a vertical axis from falling is effective.

- (1) Keep the vertical axis at a halt, and write down its absolute coordinates.
- (2) Turn off the machine's main circuit breaker to cause a power failure condition.
- (3) Restart the machine, and check the absolute coordinates of the vertical axis to see whether it has fallen.
  - \* The vertical axis will fall through a distance corresponding to the backlash of the brake (for a ball screw pitch of 10 mm, up to 20  $\mu\text{m}$ ).

[Measure for a vertical axis falling when the circuit breaker is turned off]


If a vertical axis falls when the circuit breaker is turned off, observe the waveforms described below to find causes.

- (1) Brake coil voltage → Observe the voltage across the brake coil.
- (2) Amplifier control power supply voltage → Observe the voltages at pins A1 (24 V) and A2 (0 V) of connector CXA2B of the last amplifier.
- (3) Control power supply voltage supplied to the NC → Observe the output voltage of the 24 V power supply for the NC.
- (4) Input power source voltage → Observe the voltage of the input AC power source, using an insulated probe.

If the control power of the amplifier or NC drops before the brake operates, take an action stated below and see how it works.


- Exchange the power failure detection relay for operating the brake coil (have another look at the specification of the release time).
- Prolong the hold time of the control power supplies by increasing their capacity (reducing their load ratio).

Shown below are examples of waveforms observed when a measure taken to prevent a vertical axis from falling works normally.

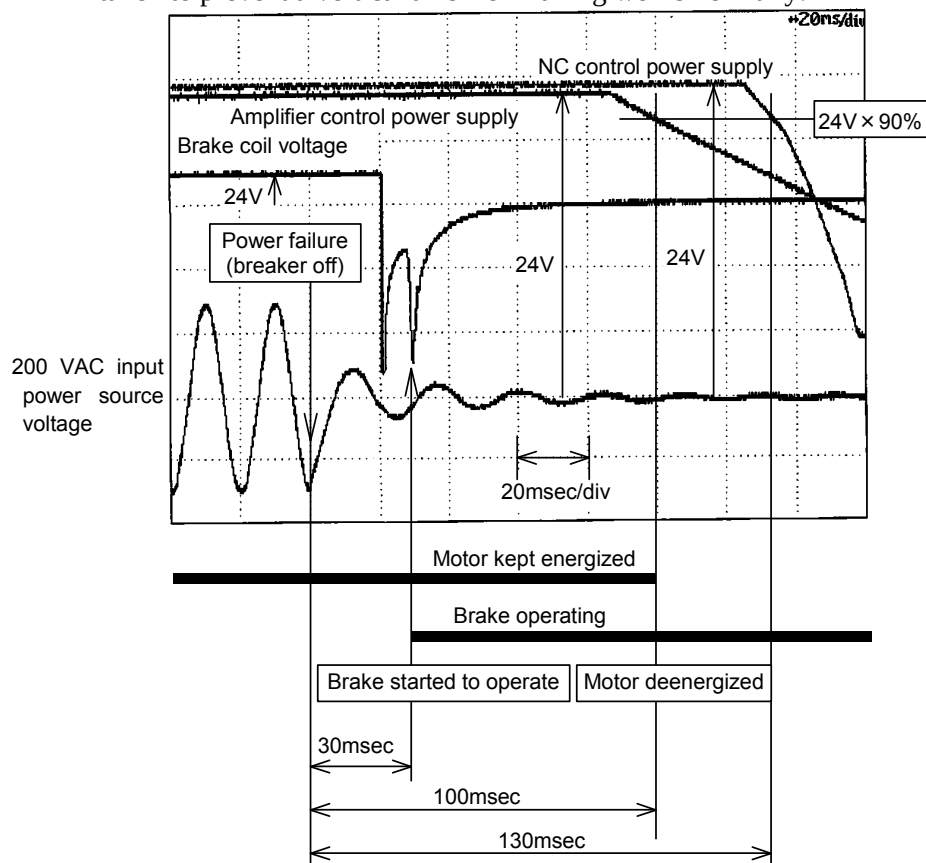

## I.3.6 Method for Supplying External Power to the Amplifier

### Connection diagram


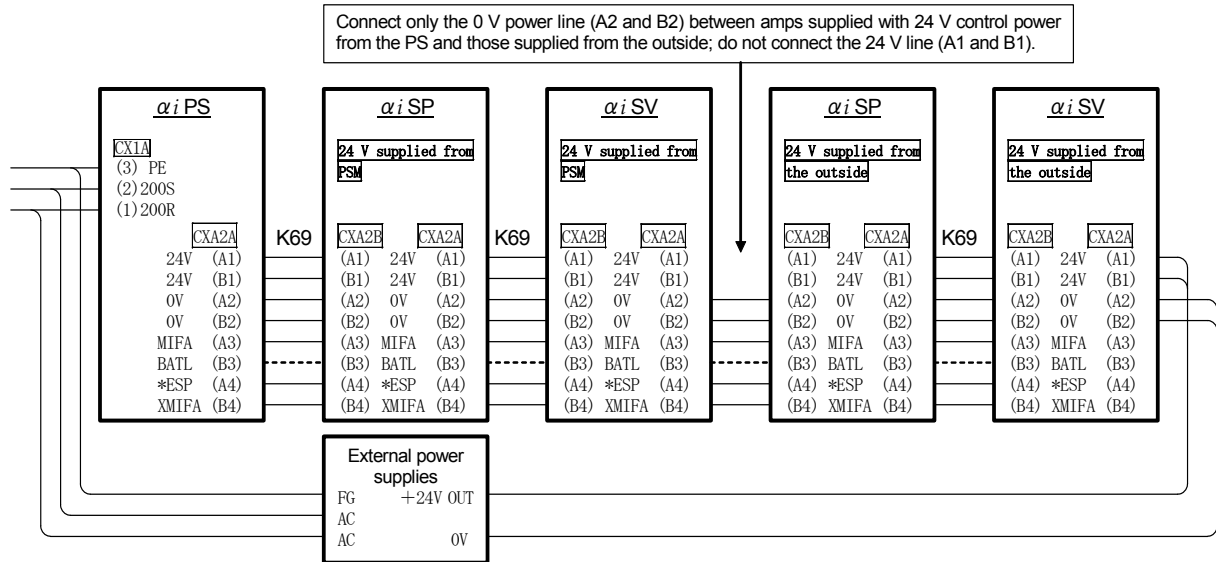


### Power supply capacity

- (1)  $\alpha i$  SV (3-axes),  $\alpha i$  SV 360, 180HV (150 mm-wide SV),  $\alpha i$  SP 45, 55, 75HV, 100HV (300 mm-wide SP) → 1.5A
- (2)  $\alpha i$  SV 360HV (300 mm-wide SV) → 2A
- (3) Others → 1A

## Timing to turn off power supplies

Configure connections of the PS, external power supplies A, and B (see the figure below) so that they will be turned on simultaneously and their output voltages will satisfy the timing requirements shown on the following timing chart. Generally, turning on these power supplies simultaneously would satisfy the timing requirements. If a timing requirement is not satisfied, however, attach a delay timer to the power line in order to satisfy it.

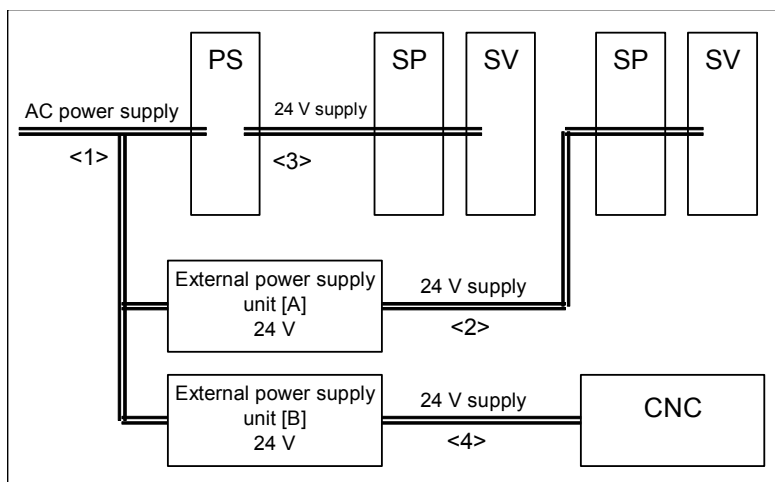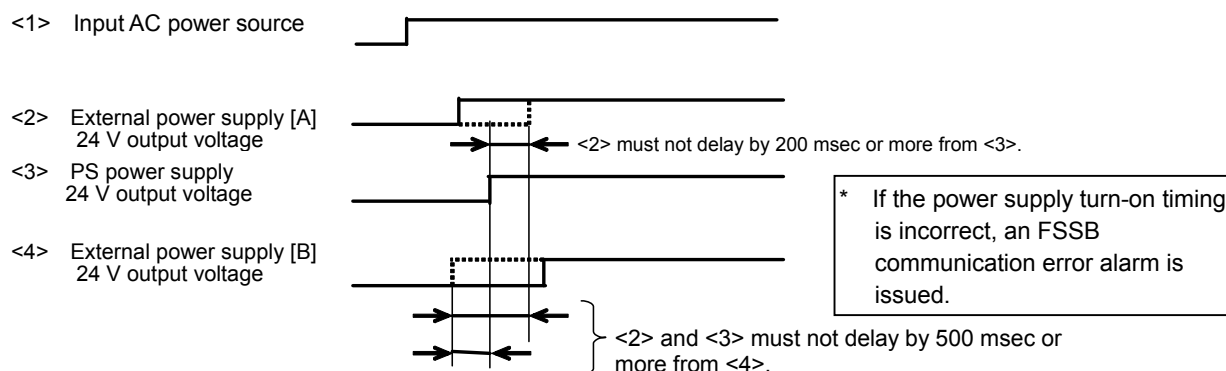


### ⚠ CAUTION

- 1 If an external power supply (24 V) is shared between a servo amplifier and another unit, any fluctuation in the load current of the non-servo amplifier unit affects the 24 V voltage adversely, leading to a possible servo amplifier or CNC alarm.
- 2 Keep voltage fluctuations of the external power supply (24 V) within a tolerable range ( $24\text{ V} \pm 10\%$ ) any time (including momentarily). No 24 V power can be supplied to the PS from the outside. Be sure to supply 200 VAC to the PS (through connector CX1A).

## I.4 USE IN COMBINATION WITH THE DUAL CHECK SAFETY FUNCTION

When using the following functions at the same time, add a relay between A1 and A3 of the connector (CX37) of the  $\alpha$ iPS.

- When using the dual check safety function
- When using  $\alpha$ iPS power failure detection output for the function of preventing vertical axes from falling at power failure

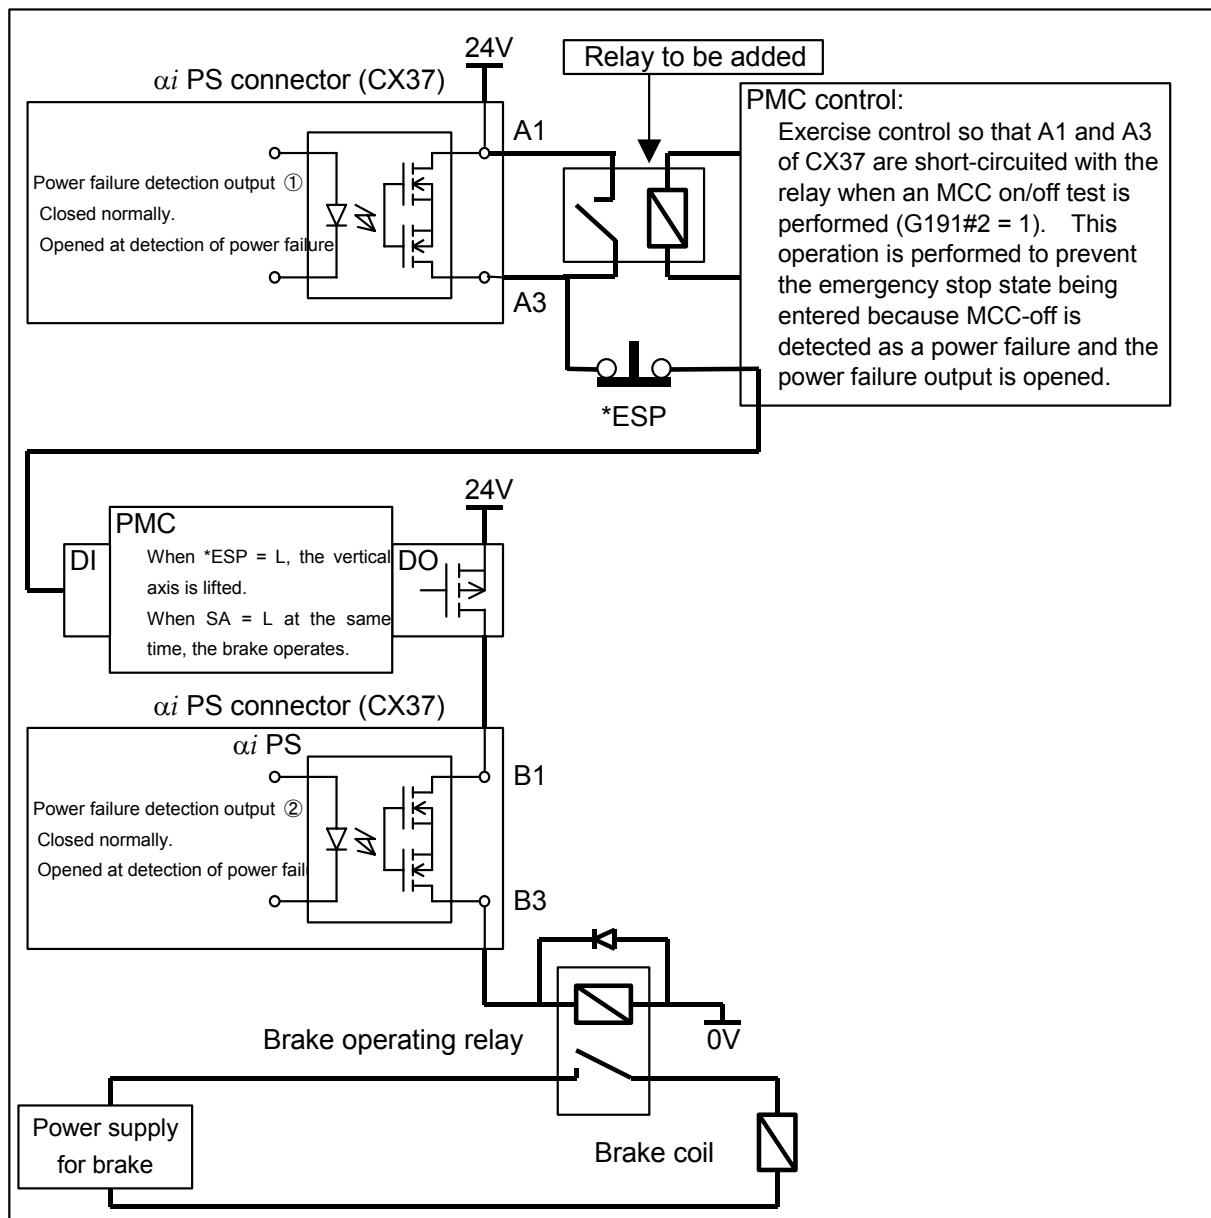

# J

## SENSOR (OLD SPECIFICATIONS)

---

Appendix J, "SENSOR (OLD SPECIFICATIONS)," consists of the following sections:

|     |                                                                           |     |
|-----|---------------------------------------------------------------------------|-----|
| J.1 | SENSOR FOR THE SYNCHRONOUS BUILT-IN SERVO MOTOR AND SEPARATE SENSOR ..... | 483 |
| J.2 | SENSOR FOR THE SPINDLE.....                                               | 498 |

## J.1 SENSOR FOR THE SYNCHRONOUS BUILT-IN SERVO MOTOR AND SEPARATE SENSOR

### J.1.1 Absolute $\alpha$ iCZ Sensor (Serial Output, A860-2142-T\*\*\*)

The absolute  $\alpha$ iCZ sensor is used as an angular displacement sensor for the synchronous built-in servo motor DiS series or as a separate sensor. For this sensor, the FANUC serial interface is used. This sensor can be directly connected to the  $\alpha$ i series servo amplifier or the separate sensor interface unit.

#### Names and specification numbers

| Name                               | Specification number                                                               | Resolution [rotation] | Repetitive positioning precision (Typ.) | Absolute precision (Typ.) | Remarks         |                                    |                |                |          |
|------------------------------------|------------------------------------------------------------------------------------|-----------------------|-----------------------------------------|---------------------------|-----------------|------------------------------------|----------------|----------------|----------|
|                                    |                                                                                    |                       |                                         |                           | Number of teeth | Maximum speed [min <sup>-1</sup> ] | Sensor ring    |                | Function |
|                                    |                                                                                    |                       |                                         |                           |                 |                                    | Inner diameter | Outer diameter |          |
| Absolute $\alpha$ iCZ sensor 512S  | A860-2142-T411<br>(Cable length: 1.2 m)<br>A860-2142-T412<br>(Cable length: 0.4 m) | 1/3,600,000           | ± 1"                                    | ± 7"                      | 512             | 600                                | φ82            | φ102.8         | Absolute |
| Absolute $\alpha$ iCZ sensor 768S  | A860-2142-T511<br>(Cable length: 1.2 m)<br>A860-2142-T512<br>(Cable length: 0.4 m) | 1/3,600,000           | ± 1"                                    | ± 5"                      | 768             | 400                                | φ125           | φ154           | Absolute |
| Absolute $\alpha$ iCZ sensor 1024S | A860-2142-T611<br>(Cable length: 1.2 m)<br>A860-2142-T612<br>(Cable length: 0.4 m) | 1/3,600,000           | ± 1"                                    | ± 3.5"                    | 1024            | 300                                | φ160           | φ205.2         | Absolute |

#### NOTE

When the absolute  $\alpha$ iCZ sensor 768S is used as a position sensor for the synchronous built-in servo motor DiS, the sensor can be used only for a application of finite rotations (10 rotations or less in total).

#### Absolute maximum ratings

| Item                        | Specification    |
|-----------------------------|------------------|
| Power supply voltage        | -0.5 V to +6.0 V |
| Operating temperature range | 0°C to +50°C     |
| Humidity                    | 95%RH or less    |

#### Electrical specifications


| Item                                       | Specification      |
|--------------------------------------------|--------------------|
| Power supply voltage                       | 5 V ±5%            |
| Current consumption                        | 250 mA or less     |
| Current consumption at battery backup time | 400 $\mu$ A (Typ.) |

## Dimensions

### Absolute $\alpha$ iCZ Sensor 512S

A860-2142-T411(cable length: 1.2m)

A860-2142-T412(cable length: 0.4m)

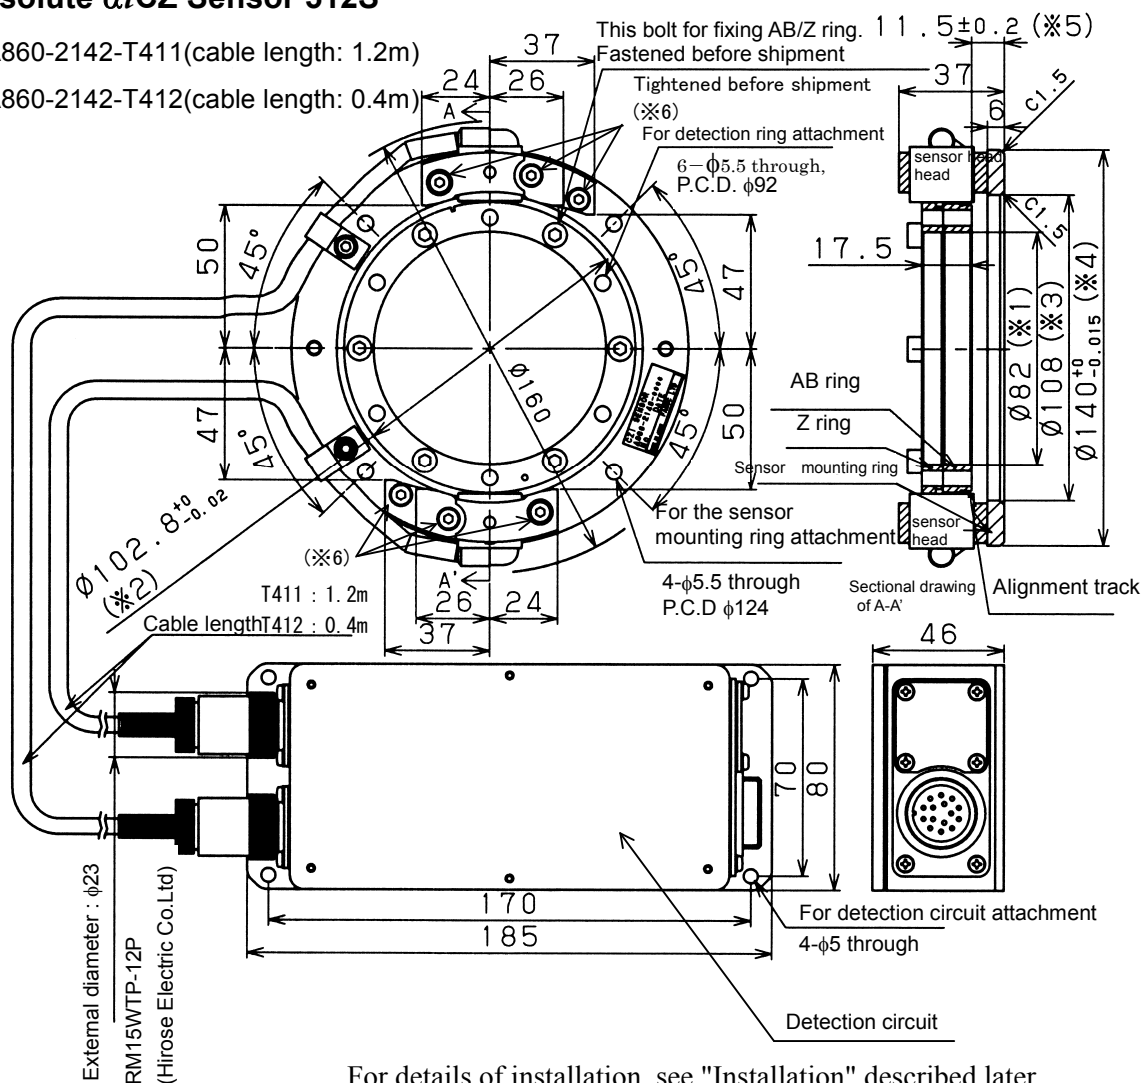


For details of installation, see "Installation" described later.



**NOTE**

- The inner diameter(\*1) of the sensor ring is set with a plus tolerance. (\*2) indicates the outer diameter of the tooth surface of the sensor ring.
- The inner diameter(\*3) of the sensor mounting ring is set with a plus tolerance. (\*4) indicates the outer diameter of the sensor mounting ring.
- (\*5) indicates the distance from the bottom of the sensor mounting ring to the bottom of the sensor ring.
- The sensor head cannot be adjusted mechanically. So, do not loosen the screws marked (\*6).
- Use the sensor at a temperature not higher than 50°C.
- Because the absolute  $\alpha$ iCZ sensor is adjusted as a combination of the sensor ring, sensor, and sensor circuit in advance, they must be used as a set.
- The sensor is a precision part. Use special care in handling. Particularly, do not apply external force to the sensor element.
- The sensor is an electronic part. To prevent chips, oil, water, and other harmful materials from being attached to the sensor, take dust-proof and water-proof measures on the machine side.
- The waterproofness of the sensor circuit box is equivalent to IP55. However, if the sensor circuit box is continuously exposed to coolant, for example, the sensor can fail. Provide highest-level water protection to prevent the sensor circuit box from being exposed to coolant or the like.
- Ensure that no vibration greater than 1 G is applied to the sensor circuit box.
- For easy maintenance, mount the sensor at a position where it can be replaced easily.
- Ground the sensor circuit box. The bottom of the sensor circuit box is not painted. So, the sensor circuit box can be grounded only by screwing.

A860-2142-T511 (Cable length 1.2 m)  
A860-2142-T512 (Cable length 0.4 m)

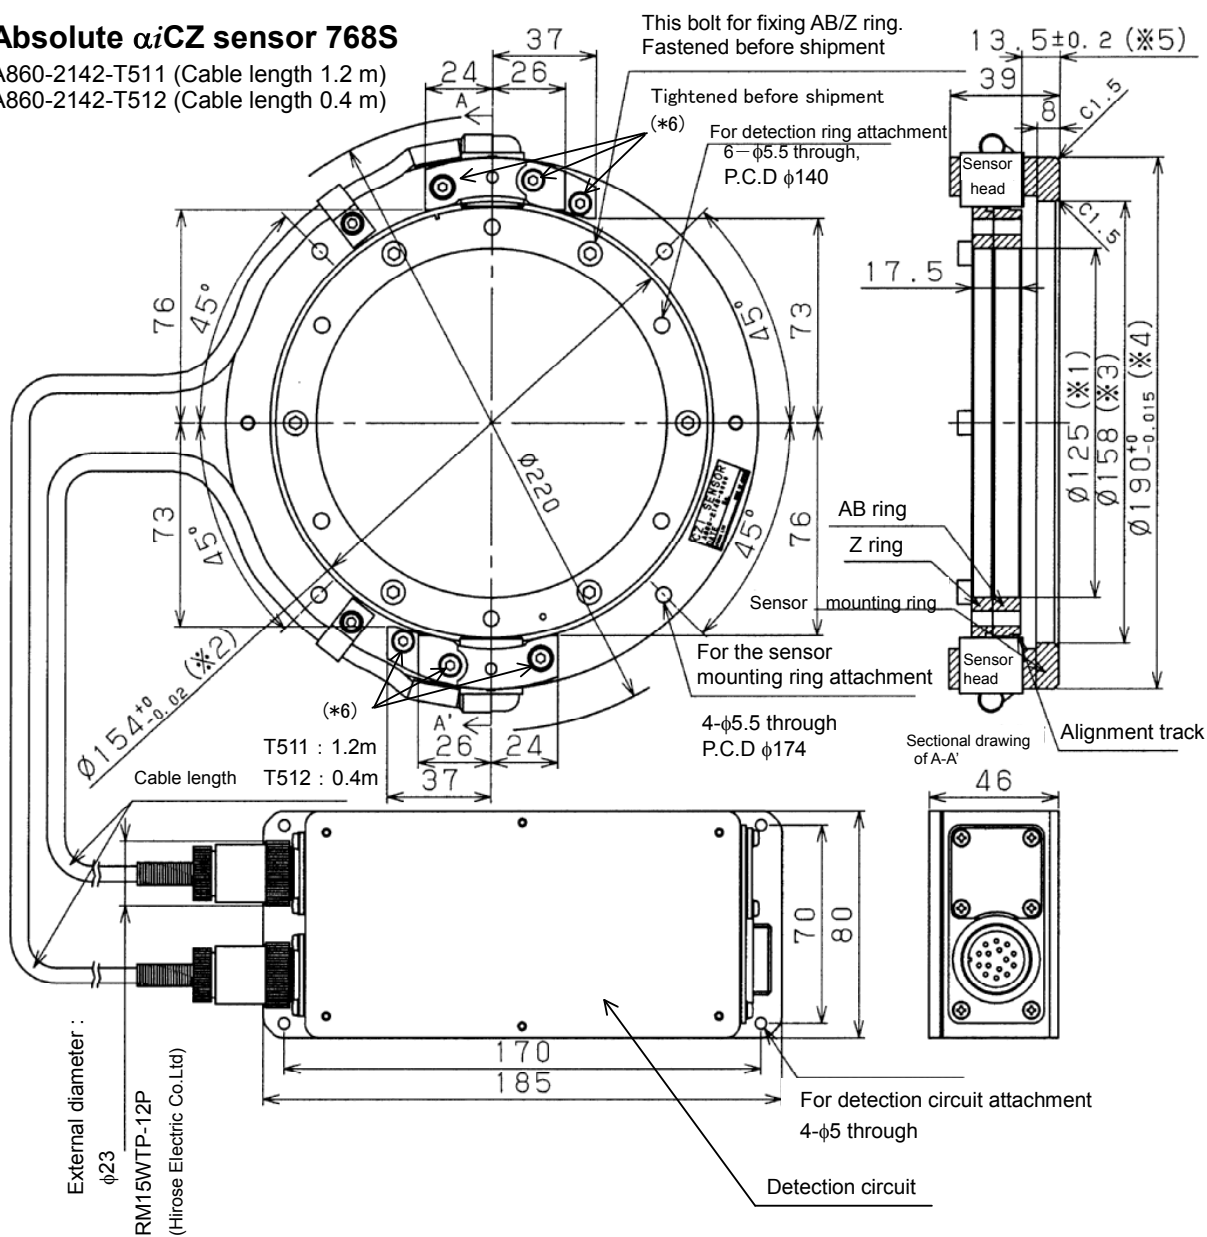


For details of installation, see "Installation" described later.

**NOTE**

- The inner diameter(\*1) of the sensor ring is set with a plus tolerance. (\*2) indicates the outer diameter of the tooth surface of the sensor ring.
- The inner diameter(\*3) of the sensor mounting ring is set with a plus tolerance. (\*4) indicates the outer diameter of the sensor mounting ring.
- (\*5) indicates the distance from the bottom of the sensor mounting ring to the bottom of the sensor ring.
- The sensor head cannot be adjusted mechanically. So, do not loosen the screws marked (\*6).
- Use the sensor at a temperature not higher than 50°C.
- Because the absolute  $\alpha$ iCZ sensor is adjusted as a combination of the sensor ring, sensor, and sensor circuit in advance, they must be used as a set.
- The sensor is a precision part. Use special care in handling. Particularly, do not apply external force to the sensor element.
- The sensor is an electronic part. To prevent chips, oil, water, and other harmful materials from being attached to the sensor, take dust-proof and water-proof measures on the machine side.
- The waterproofness of the sensor circuit box is equivalent to IP55. However, if the sensor circuit box is continuously exposed to coolant, for example, the sensor can fail. Provide highest-level water protection to prevent the sensor circuit box from being exposed to coolant or the like.
- Ensure that no vibration greater than 1 G is applied to the sensor circuit box.
- For easy maintenance, mount the sensor at a position where it can be replaced easily.
- Ground the sensor circuit box. The bottom of the sensor circuit box is not painted. So, the sensor circuit box can be grounded only by screwing.

A860-2142-T611 (Cable length 1.2 m)  
A860-2142-T612 (Cable length 0.4 m)

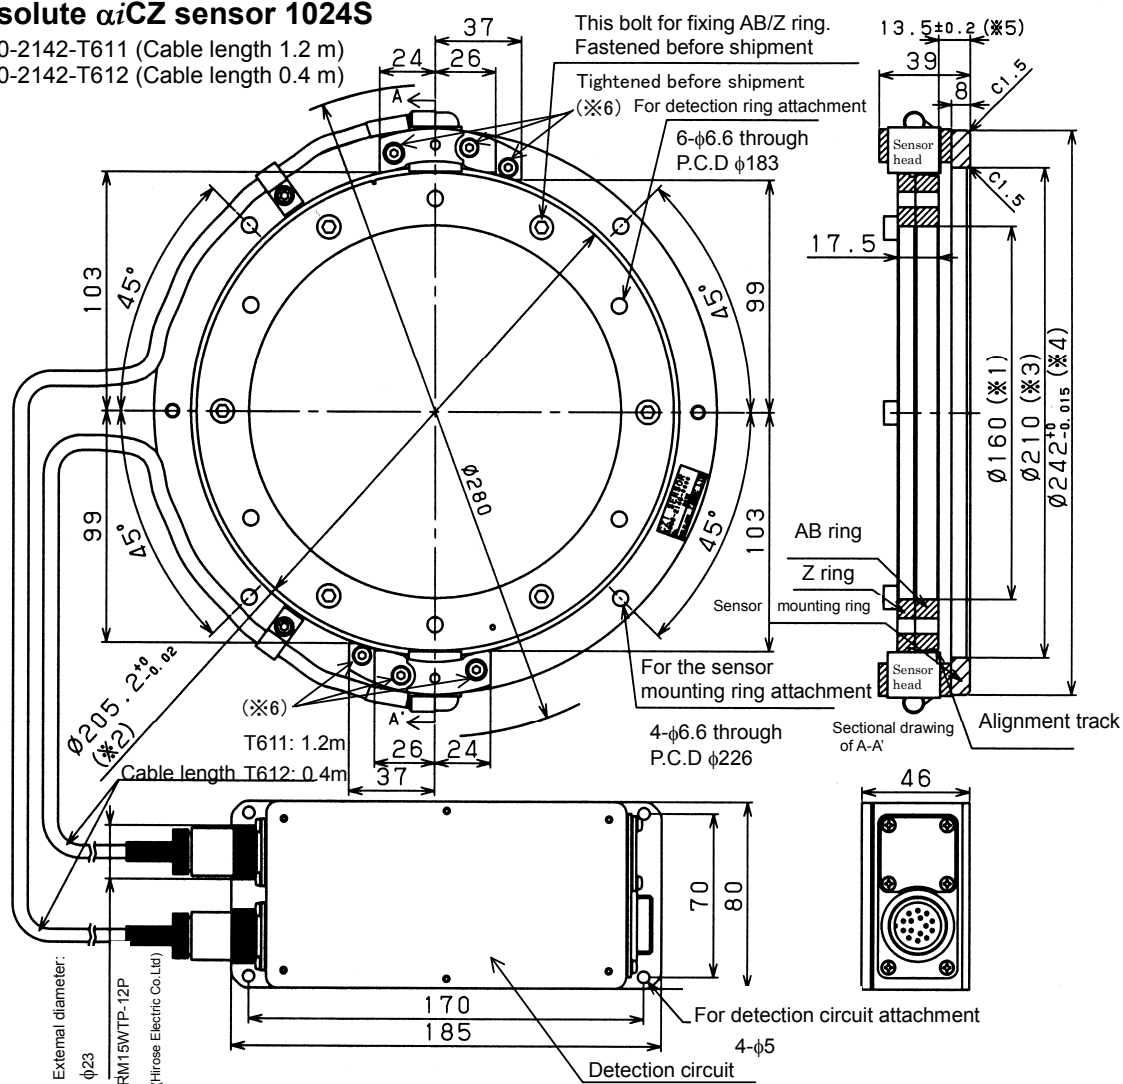

For details of installation, see "Installation" described later.


**NOTE**

- The inner diameter(\*1) of the sensor ring is set with a plus tolerance. (\*2) indicates the outer diameter of the tooth surface of the sensor ring.
- The inner diameter(\*3) of the sensor mounting ring is set with a plus tolerance. (\*4) indicates the outer diameter of the sensor mounting ring.
- (\*5) indicates the distance from the bottom of the sensor mounting ring to the bottom of the sensor ring.
- The sensor head cannot be adjusted mechanically. So, do not loosen the screws marked (\*6).
- Use the sensor at a temperature not higher than 50°C.
- Because the absolute  $\alpha iCZ$  sensor is adjusted as a combination of the sensor ring, sensor, and sensor circuit in advance, they must be used as a set.
- The sensor is a precision part. Use special care in handling. Particularly, do not apply external force to the sensor element.
- The sensor is an electronic part. To prevent chips, oil, water, and other harmful materials from being attached to the sensor, take dust-proof and water-proof measures on the machine side.
- The waterproofness of the sensor circuit box is equivalent to IP55. However, if the sensor circuit box is continuously exposed to coolant, for example, the sensor can fail. Provide highest-level water protection to prevent the sensor circuit box from being exposed to coolant or the like.
- Ensure that no vibration greater than 1 G is applied to the sensor circuit box.
- For easy maintenance, mount the sensor at a position where it can be replaced easily.
- Ground the sensor circuit box. The bottom of the sensor circuit box is not painted. So, the sensor circuit box can be grounded only by screwing.

## Installation

### Installing the sensor ring

Install the flange on the shaft side and screw it in the axis direction by using the sensor ring mounting hole. In assembly, perform centering using the centering track so that the swing from the center of rotation is 10  $\mu\text{m}$  or less.

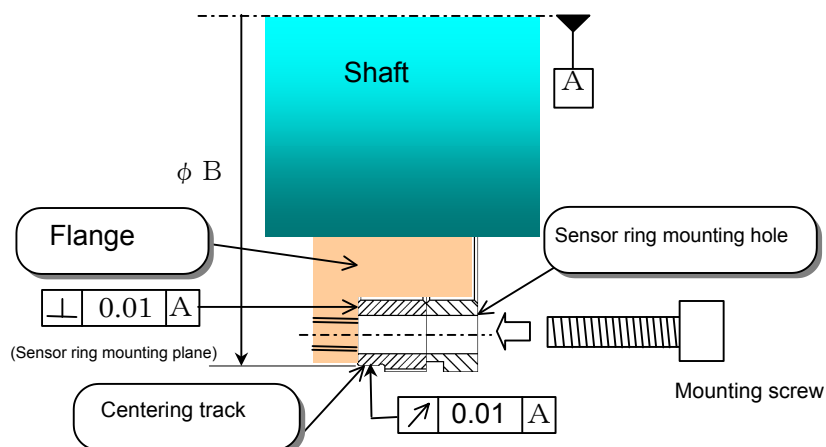


| Specification                    | Outer diameter of centering track ( $\phi B$ ) | Positions of sensor ring mounting holes                           | Mounting screw | Recommended tightening torque (Nm) |
|----------------------------------|------------------------------------------------|-------------------------------------------------------------------|----------------|------------------------------------|
| A860-2142-T411<br>A860-2142-T412 | $\phi 101$                                     | 6- $\phi 5.5$ through, equally spaced on $\phi 92$ circumference  | M5             | 2.4 to 3.4                         |
| A860-2142-T511<br>A860-2142-T512 | $\phi 152.2$                                   | 6- $\phi 5.5$ through, equally spaced on $\phi 140$ circumference | M5             | 2.4 to 3.4                         |
| A860-2142-T611<br>A860-2142-T612 | $\phi 203.4$                                   | 6- $\phi 6.6$ through, equally spaced on $\phi 183$ circumference | M6             | 4.1 to 5.8                         |

#### NOTE

- For centering, the outer diameter of the flange must be designed so that there is a gap of about 0.1 mm between the flange and the inner surface of the sensor ring.
- Secure the sensor ring on the end face with screws (avoid heat shrink fitting to mount the sensor ring).
- The sensor ring consists of a phase Z ring and phase A/B ring, which are fastened together by using screws in advance. Never detach these screws. Spot facing is not provided. So, at the time of machine design, be careful not to cause interference with the screw heads.
- Centering must be performed with the centering track (the outer surface of the phase Z ring and the teeth pitch circle are not coaxial). When performing centering, use a tool such as a plastic hammer not to damage the gear teeth.
- Magnetic matter attached to gear teeth can lead to a detection error. After centering is completed, remove such foreign matter by air blowing.

## Installing the sensor mounting ring

When installing the sensor mounting ring, provide a socket on the machine side, and fit the sensor mounting ring into the socket. (The dimensions of the socket on the machine side must satisfy the accuracy indicated in the table below. Otherwise, detection precision may deteriorate.) When fastening the mounting ring with the screws, press the mounting ring against the socket from the CN1 sensor side as shown in the figure below. After the installation, check that the gap between the sensor ring and sensor is 0.08 mm or more by using a thickness gage.

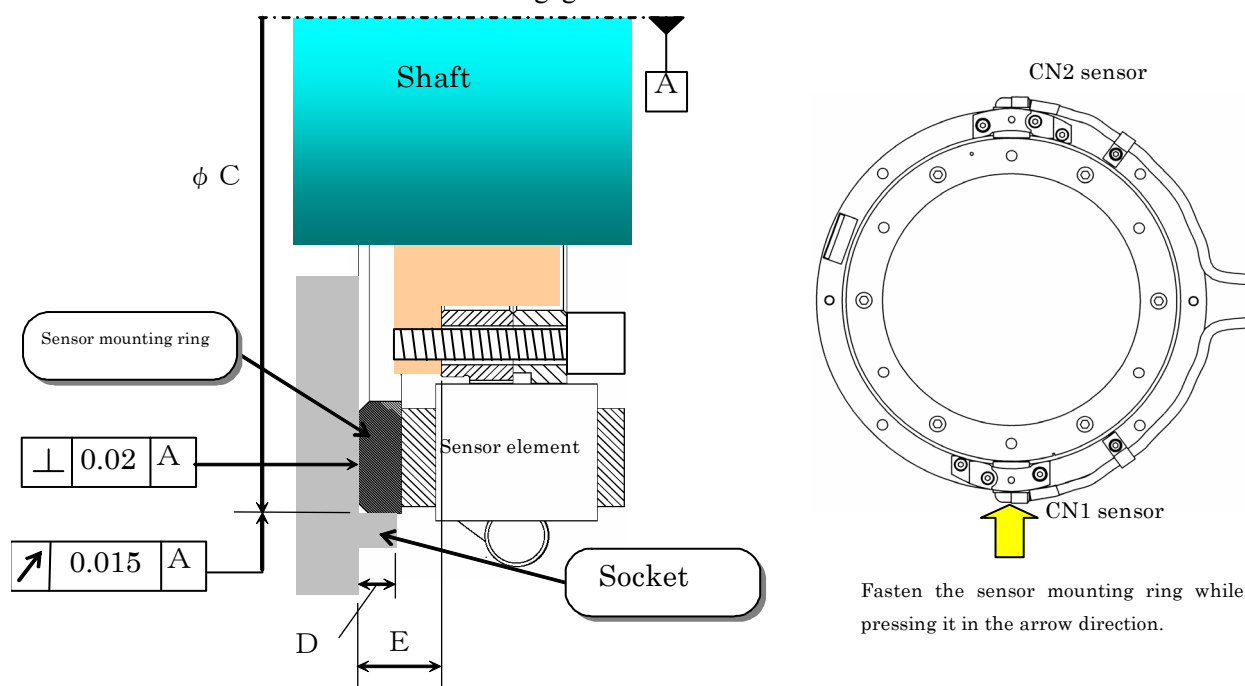


| Specification                    | Outer diameter of sensor mounting ring | Inner diameter of socket ( $\phi C$ ) | Socket height (D) | Distance between bottom of sensor mounting ring and bottom of sensor ring (E) |
|----------------------------------|----------------------------------------|---------------------------------------|-------------------|-------------------------------------------------------------------------------|
| A860-2142-T411<br>A860-2142-T412 | $\phi 140^{+0}_{-0.015}$               | $\phi 140^{+0.015}_{-0}$              | 5.5 or less       | $11.5 \pm 0.2$                                                                |
| A860-2142-T511<br>A860-2142-T512 | $\phi 190^{+0}_{-0.015}$               | $\phi 190^{+0.015}_{-0}$              | 7.5 or less       | $13.5 \pm 0.2$                                                                |
| A860-2142-T611<br>A860-2142-T612 | $\phi 242^{+0}_{-0.015}$               | $\phi 242^{+0.015}_{-0}$              | 7.5 or less       | $13.5 \pm 0.2$                                                                |

### NOTE

- Provide a sock on the machine side where possible, and fit the sensor mounting ring into the socket. Avoid making centering adjustments by tapping the outer surface of the sensor mounting ring.

# When checking the signal waveforms


When checking the signal waveforms, see the description below. (The signals need not be adjusted.) Supply power to the 0 V and 5 V pins. The Lissajous figure of phase A/B output signal is a complete circle.

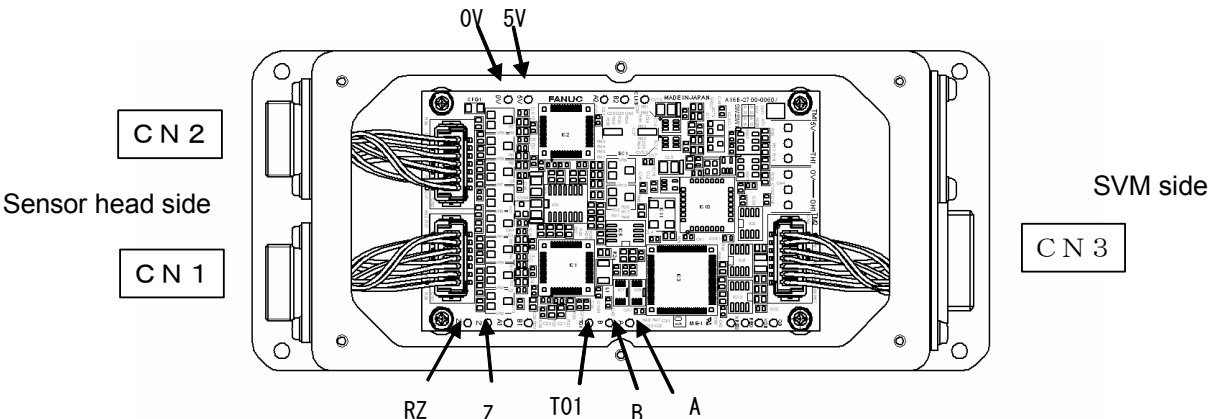

Phase A/B and phase Z signal waveforms (measured on the sensor circuit check pins at room temperature and 500 min<sup>-1</sup>)

| Signal name | Check pin           | Output amplitude   | Offset        |
|-------------|---------------------|--------------------|---------------|
| Phase A     | A (Relative to T01) | 3200 ±300 mVp-p    | ±50 mV        |
| Phase B     | B (Relative to T01) |                    |               |
| Phase Z     | Z (Relative to RZ)  | 660 to 1,650 mVp-p | 100 to 250 mV |

For connector pins, see "Details of cable (K89) for connection with the αiSP series" described later.

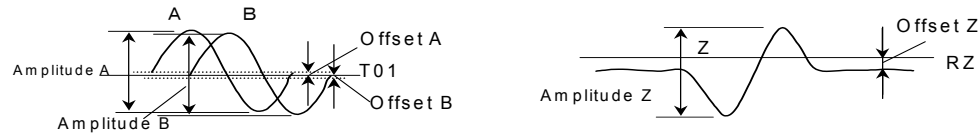

## NOTE


- Adjustments have been made for the sensor, sensor circuit, and sensor ring at the same time. Therefore, use them as a set. The variable resistor on the printed circuit board of the sensor circuit is also adjusted in advance. So, do not readjust the variable resistor. Furthermore, the sensors cannot be adjusted mechanically. So, do not loosen the screws fastening the CN1 and CN2 sensors.

The connectors on the sensor side are labeled "CN1" (in black) and "CN2" (in blue). Make connections according to the figure above.



## Rotation direction of the absolute $\alpha$ iCZ sensor


When the sensor is viewed from the top as shown in the following figure, clockwise rotation of the sensor ring is referred to as forward rotation:

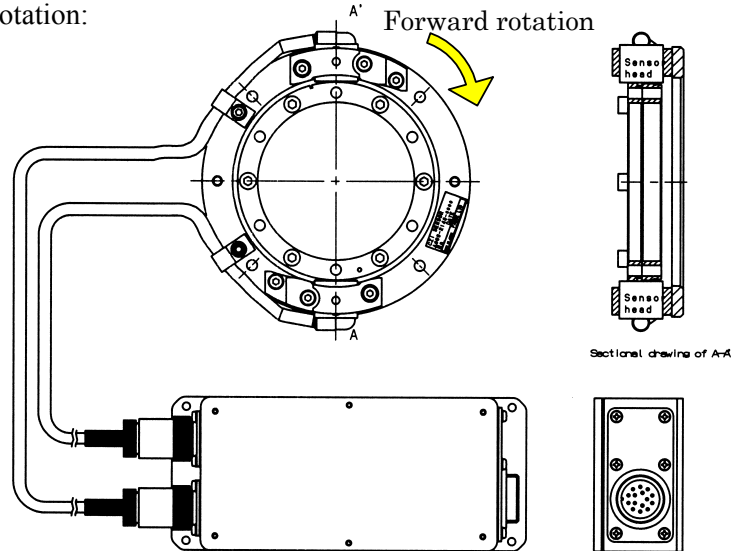

Check the rotation directions of the encoder and motor according to "Synchronous Servo Built-in Motor DiS Series Descriptions (B-65332EN)." If their rotation directions are opposite to each other, connect U-W-V of the motor to U-V-W of the amplifier.

## Notes



Do not detach the connectors of the absolute  $\alpha$ iCZ sensor heads from the sensor circuit. If the connectors are detached, the reference position may be displaced. In such a case, be sure to perform reference position return operation (magnetic pole position detection and reference position return operation when using the sensor with the synchronous built-in servo motor).

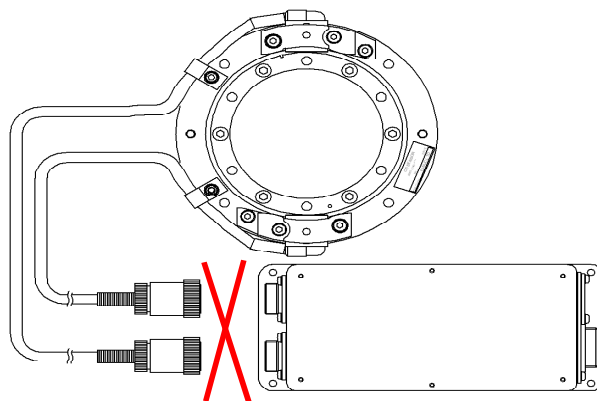

When the absolute  $\alpha$ iCZ sensor is used as a sensor with the synchronous built-in servo motor, the magnetic pole position detection function (option) is needed. For the magnetic pole position detection function, refer to the specifications (A-77769).

## Extending the sensor cables

The sensor cable from each sensor head to the sensor circuit can be extended until the total length becomes 5.2 m.

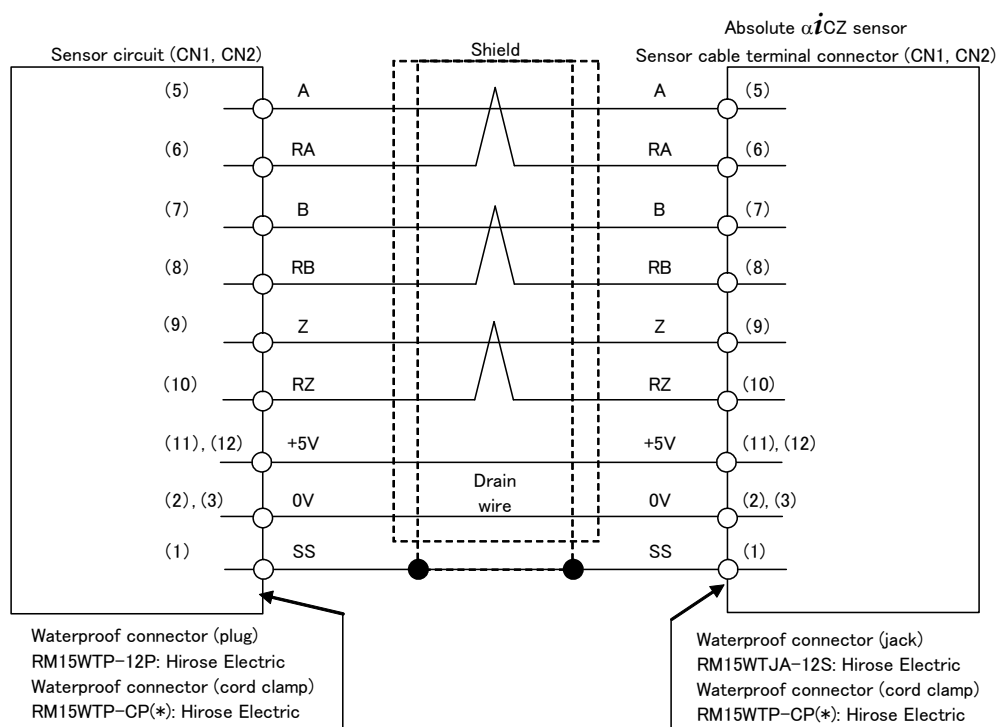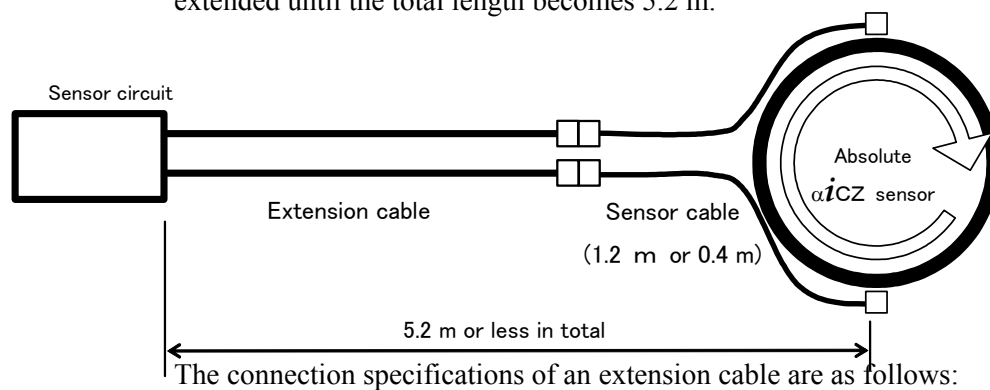

\* When ordering the cord clamp marked with \*, specify the outer diameter of the cable sheath.  
Z and RZ are not output from the sensor head on the CN2 side but may be connected.

| Signal name         |                                             |
|---------------------|---------------------------------------------|
| 5V, 0V              | 0.5 mm <sup>2</sup> × 2                     |
| A, RA, B, RB, Z, RZ | 0.2 mm <sup>2</sup> or more<br>Twisted pair |
| Drain wire          | 0.15 mm <sup>2</sup> or more                |

Recommended cable A66L-0001-0317

## Parameter setting

With the absolute  $\alpha$ iCZ sensor, the number of feedback pulses per rotation varies, depending on the number of teeth. Make parameter settings according the absolute  $\alpha$ iCZ sensor used.

When using the absolute  $\alpha$ iCZ sensor as a sensor for the synchronous built-in servo motor, perform magnetic pole position detection by using the magnetic pole position detection function (option). For the magnetic pole position detection function, refer to the specifications (A-77769).

### [When using the absolute $\alpha$ iCZ sensor as a position sensor for the synchronous built-in servo motor DiS]

(Supported servo software)

The supported servo software depends on the specifications of the NC and sensor used (see the table below). For AMR offset setting, the magnetic pole position detection function needs to be used. The absolute  $\alpha$ iCZ sensor 768S can be used only for an application of finite rotations.

| NC<br>Sensor specification         | Series-0i | Series-15i,16i,18i,21i                                                                                              | Series-30i,31i,32i                                                                                                                                         |
|------------------------------------|-----------|---------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Absolute $\alpha$ iCZ sensor 512S  |           | Series 90B1/Edition A (01) or later                                                                                 | Series 90D0/Edition A (01) or later<br>Series 90E0/Edition A (01) or later                                                                                 |
| Absolute $\alpha$ iCZ sensor 768S  |           | <b>Applicable only to finite rotations (less than 10 rotations in total)</b><br>Series 90B1/Edition C (03) or later | <b>Applicable only to finite rotations (less than 10 rotations in total)</b><br>Series 90D0/Edition J (10) or later<br>Series 90E0/Edition J (10) or later |
| Absolute $\alpha$ iCZ sensor 1024S |           | Series 90B1/Edition A (01) or later                                                                                 | Series 90D0/Edition A (01) or later<br>Series 90E0/Edition A (01) or later                                                                                 |

### (Absolute $\alpha$ iCZ sensor 1024S)

Make parameter settings as a 1,000,000-pulse coder as with the  $\alpha$ i pulse coder.

|                           |                                                                                          |
|---------------------------|------------------------------------------------------------------------------------------|
| F·FG                      | (Number of position pulses needed per motor rotation)/1,000,000                          |
| Number of velocity pulses | 8192                                                                                     |
| Number of position pulses | 12500                                                                                    |
| AMR                       | Set (number of poles)/2 in binary.                                                       |
| Reference counter         | Number of position pulses needed per motor rotation or that number divided by an integer |

Example of setting: 88-pole DD motor, rotation axis, gear ratio of 1:1, 1/1000° detection

$$F \cdot FG = 360000 / 1,000,000 = 36 / 100$$

$$\text{Number of velocity pulses} = 8192$$

$$\text{Number of position pulses} = 12500$$

$$\text{AMR} = 00101100 \text{ (44)}$$

$$\text{Reference counter} = 360000 \text{ (or this number divided by an integer)}$$

**(Absolute  $\alpha$ iCZ sensor 768S)**

Make parameter settings as a 750,000-pulse coder as described below.  
Note that parameter settings different from those for 512S and 1024S need to be made.

The absolute  $\alpha$ iCZ sensor 768S can be used only for an application of finite rotations (less than 10 rotations in total).

|                                                              |                                                                |
|--------------------------------------------------------------|----------------------------------------------------------------|
| F·FG                                                         | (Number of position pulses needed per motor rotation)/750,000  |
| Number of velocity pulses                                    | 6144                                                           |
| Number of position pulses                                    | 9375                                                           |
| Bit 0 of No. 2608 (FS15i)/Bit 0 of No. 2220 (FS16i, 30i) = 1 |                                                                |
| AMR                                                          | 00000000                                                       |
| AMR conversion coefficient 1                                 | No. 1705 (FS15i)/No. 2112 (FS16i, 30i) = 768                   |
| AMR conversion coefficient 2                                 | No. 1768 (FS15i)/No. 2138 (FS16i, 30i) =                       |
| (Number of                                                   | poles)/2                                                       |
| Reference counter                                            | Number of pulses per 120° or that number divided by an integer |

Example of setting: 88-pole DD motor, rotation axis, gear ratio of 1:1, 1/1000° detection

$$F \cdot FG = 360000/750,000 = 36/75$$

$$\text{Number of velocity pulses} = 6144$$

$$\text{Number of position pulses} = 9375$$

$$\text{Bit 0 of No. 2608 or bit 0 of No. 2220} = 1$$

$$AMR = 00000000$$

$$AMR \text{ conversion coefficient 1 (No. 1705 or No. 2112)} = 768$$

$$AMR \text{ conversion coefficient 2 (No. 1768 or No. 2138)} = 44$$

$$(= 88/2)$$

$$\text{Reference counter} = 120000 \text{ (or this number divided by an integer)}$$

**(Absolute  $\alpha$ iCZ sensor 512S)**

Make parameter settings as a 500,000-pulse coder as described below.

|                           |                                                                                          |
|---------------------------|------------------------------------------------------------------------------------------|
| F·FG                      | (Number of position pulses needed per motor rotation)/500,000                            |
| Number of velocity pulses | 4096                                                                                     |
| Number of position pulses | 6250                                                                                     |
| AMR                       | Set the number of poles in binary.                                                       |
| Reference counter         | Number of position pulses needed per motor rotation or that number divided by an integer |

Example of setting: 88-pole DD motor, rotation axis, gear ratio of 1:1, 1/1000° detection

$$F \cdot FG = 360000/500,000 = 36/50$$

$$\text{Number of velocity pulses} = 4096$$

$$\text{Number of position pulses} = 6250$$

$$AMR = 01011000 (88)$$

$$\text{Reference counter} = 360000 \text{ (or this number divided by an integer)}$$

**[When using the absolute  $\alpha$ iCZ sensor as a separate sensor]****(Supported servo software)**

No version restriction is imposed. Any version of servo software may be used.

**(Absolute  $\alpha$ iCZ sensor 1024S)**

Make parameter settings as with a FANUC rotary encoder of serial output type.

|                           |                                                                                           |
|---------------------------|-------------------------------------------------------------------------------------------|
| F·FG                      | (Number of position pulses needed per sensor rotation)/1,000,000                          |
| Number of position pulses | 12500 × (gear reduction ratio from motor to table)                                        |
| Reference counter         | Number of position pulses needed per sensor rotation or that number divided by an integer |

Example of setting: Rotation axis, gear ratio of 1:1, 1/1000° detection

$$F \cdot FG = 360000/1000000 = 36/100$$

$$\text{Number of position pulses} = 12500$$

$$\text{Reference counter} = 360000 \text{ (or this number divided by an integer)}$$

**(Absolute  $\alpha$ iCZ sensor 768S)**

Make parameter settings as a rotary encoder of 750,000 pulses per rotation as described below.

\* Note that parameter settings different from those for 512S and 1024S are made.

|                           |                                                                |
|---------------------------|----------------------------------------------------------------|
| F·FG                      | (Number of position pulses needed per sensor rotation)/750,000 |
| Number of position pulses | 9375 × (gear reduction ratio from motor to table)              |
| Reference counter         | Number of pulses per 120° or that number divided by an integer |

Example of setting: Rotation axis, gear ratio of 1:1, 1/1000° detection

$$F \cdot FG = 360000/750000 = 36/75$$

$$\text{Number of position pulses} = 9375$$

$$\text{Reference counter} = 120000 \text{ (or this number divided by an integer)}$$

**(Absolute  $\alpha$ iCZ sensor 512S)**

Make parameter settings as a rotary encoder of 500,000 pulses per rotation as described below.

|                           |                                                                                           |
|---------------------------|-------------------------------------------------------------------------------------------|
| F·FG                      | (Number of position pulses needed per sensor rotation)/500,000                            |
| Number of position pulses | 6250 × (gear reduction ratio from motor to table)                                         |
| Reference counter         | Number of position pulses needed per sensor rotation or that number divided by an integer |

Example of setting: Rotation axis, gear ratio of 1:1, 1/1000° detection

$$F \cdot FG = 360000/500000 = 36/50$$

$$\text{Number of position pulses} = 6250$$

$$\text{Reference counter} = 360000 \text{ (or this number divided by an integer)}$$

## J.2 SENSOR FOR THE SPINDLE

### J.2.1 $\alpha$ iBZ Sensor (Conventional Dimensions, A860-2120-T\*\*\*)

Two types of  $\alpha$ iBZ sensors are available:  $\alpha$ iBZ sensors of the conventional dimensions (A860-2120-T\*\*\*) and compact-size  $\alpha$ iBZ sensors (A860-2150-T\*\*\* and A860-2155-T\*\*\*). The  $\alpha$ iBZ sensors of the conventional dimensions and compact-size  $\alpha$ iBZ sensors are not compatible with each other from the viewpoint of installation. If the number of sensor ring teeth of an  $\alpha$ iBZ sensor of the conventional dimensions is the same as that of a compact-size  $\alpha$ iBZ sensor, the sensor rings of the two sensors have the same inner and outer diameters. The  $\alpha$ iBZ sensors of the conventional dimensions and compact-size  $\alpha$ iBZ sensors have the same output signal specifications. So, when a sensor of one type is replaced with a sensor of the other type, no parameter modification is needed.

#### Names and specification numbers

| Name                     | Specification number | Remarks         |                         |                |                |
|--------------------------|----------------------|-----------------|-------------------------|----------------|----------------|
|                          |                      | Number of teeth | Maximum speed           | Sensor ring    |                |
|                          |                      |                 |                         | Inner diameter | Outer diameter |
| $\alpha$ iBZ sensor 128  | A860-2120-T201       | 128             | 20,000min <sup>-1</sup> | φ40            | φ52            |
| $\alpha$ iBZ sensor 128H | A860-2120-T211       |                 | 70,000min <sup>-1</sup> |                |                |
| $\alpha$ iBZ sensor 256  | A860-2120-T401       | 256             | 15,000min <sup>-1</sup> | φ82            | φ103.2         |
| $\alpha$ iBZ sensor 256H | A860-2120-T411       |                 | 30,000min <sup>-1</sup> |                |                |
| $\alpha$ iBZ sensor 384  | A860-2120-T511       | 384             | 15,000min <sup>-1</sup> | φ125           | φ154.4         |
| $\alpha$ iBZ sensor 512  | A860-2120-T611       | 512             | 10,000min <sup>-1</sup> | φ160           | φ205.6         |

#### Absolute maximum ratings


| Item                        | Specification    |
|-----------------------------|------------------|
| Power supply voltage        | -0.5 V to +7.0 V |
| Operating temperature range | 0°C to +80°C     |
| Humidity                    | 95%RH or less    |

#### Electrical specifications

| Item                 |        |                              | Specification |
|----------------------|--------|------------------------------|---------------|
| Power supply voltage |        |                              | 5 V ±5%       |
| Current consumption  |        |                              | 0.05 A        |
| Output signal        | VA, VB | $\alpha$ iBZ sensor 128/128H | 128λ/rotation |
|                      |        | $\alpha$ iBZ sensor 256/256H | 256λ/rotation |
|                      |        | $\alpha$ iBZ sensor 384      | 384λ/rotation |
|                      |        | $\alpha$ iBZ sensor 512      | 512λ/rotation |
|                      | VZ     | Common to all models         | 1λ/rotation   |

## Dimensions

### [ $\alpha$ iBZ sensor (conventional dimensions, with mounting ring)]

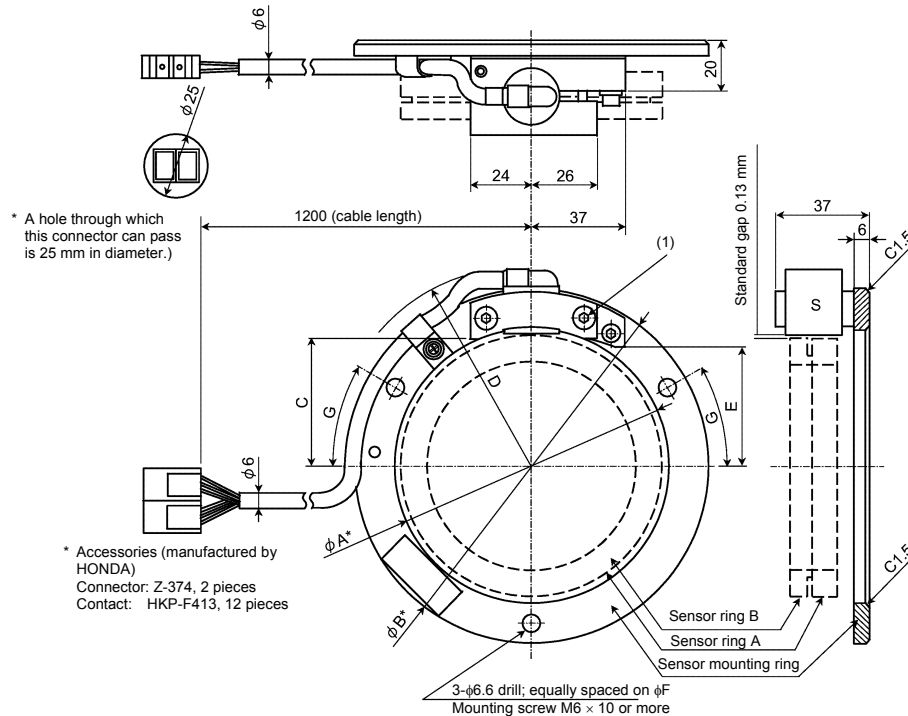

| Sensor specification number | Sensor ring | Number of teeth | $\phi A^*$               | $\phi B^*$               | C  | D   | E  | $\phi F$ | G   |
|-----------------------------|-------------|-----------------|--------------------------|--------------------------|----|-----|----|----------|-----|
| A860-2120-T201              | Ring 1      | 128             | 56H6 $+0.019$<br>$-0.0$  | 100h6 $+0.0$<br>$-0.022$ | 25 | R57 | 20 | 78       | 10° |
| A860-2120-T211              | Ring 2      |                 |                          |                          |    |     |    |          |     |
| A860-2120-T401              | Ring 3      | 256             | 108 $+0.040$<br>$+0.020$ | 140h6 $+0.0$<br>$-0.025$ | 51 | R80 | 46 | 124      | 30° |
| A860-2120-T411              | Ring 4      |                 |                          |                          |    |     |    |          |     |

For the dimensions of the sensor rings, see "Sensor rings" described later.

#### NOTE

- Use the sensor at a temperature not higher than 80°C.
- The sensor is a precision part. Use special care in handling. Particularly, do not apply external force to the S section.
- The sensor is an electronic part. To prevent chips, oil, water, and other harmful materials from being attached to the sensor, take dust-proof and water-proof measures on the machine side.
- The dimensions marked with an asterisk (\*) are the dimensions of the sensor mounting ring. The socket on the machine side must be designed according to these dimensions. If the socket on the machine side is not made properly, the sensor may output an incorrect signal.
- The gap between the sensor and sensor ring is preadjusted. Because of a dimensional error in the mounting socket and so on, the output signal may not satisfy the specified level. Therefore, when mounting the sensor, check the output signal. If the output signal does not satisfy the specified level, loosen the screws(\*1) and adjust the gap. Tighten the screws(\*1) with a torque of 1.2 Nm (12 kgfcm)  $\pm 10\%$ . After tightening the screws, insert a 0.1-mm thickness gage to check that there is a gap of at least 0.1 mm between the sensor and sensor ring. For the output signal level in gap adjustment, refer to Part II, "INSTALLATION," of "FANUC BUILT-IN AC SPINDLE MOTOR  $\alpha$ i series DESCRIPTIONS (B-65292EN)."
- Make a shield wire connection.
- For easy maintenance, mount the sensor at a position where it can be replaced easily.
- Sensor rings with the same specification number can be replaced with each other.
- Sensor rings with different specification numbers cannot be used in combination.
- Mating connectors (accessories) are provided.

[illegible]


| Sensor specification number | Sensor ring | Number of teeth | $\phi A$              | B     | C     | D    |
|-----------------------------|-------------|-----------------|-----------------------|-------|-------|------|
| A860-2120-T511              | Ring 5      | 384             | $158^{+0.0}_{-0.025}$ | 84.3  | 78.3  | R110 |
| A860-2120-T611              | Ring 6      | 512             | $210^{+0.0}_{-0.030}$ | 110.8 | 104.8 | R140 |

## NOTE

- Use the sensor at a temperature not higher than 80°C.
- The sensor is a precision part. Use special care in handling. Particularly, do not apply external force to the S section.
- The sensor is an electronic part. To prevent chips, oil, water, and other harmful materials from being attached to the sensor, take dust-proof and water-proof measures on the machine side.
- Mount the sensor while pressing it against the socket (dimension  $\phi A$ ) on the machine side (the height of the socket on the machine is 4.5 mm or less).
- The gap between the sensor and sensor ring is preadjusted. Because of a dimensional error in the mounting socket and so on, the output signal may not satisfy the specified level. Therefore, when mounting the sensor, check the output signal. If the output signal does not satisfy the specified level, loosen the screws(\*1) and adjust the gap. Tighten the screws(\*1) with a torque of 1.2 Nm (12 kgfcm)  $\pm 10\%$ . After tightening the screws, insert a 0.1-mm thickness gage to check that there is a gap of at least 0.1 mm between the sensor and sensor ring. For the output signal level in gap adjustment, refer to Part II, "INSTALLATION," of "FANUC BUILT-IN AC SPINDLE MOTOR  $\alpha$ i series DESCRIPTIONS (B-65292EN)."
- Use M4  $\times$  20 mm and M4  $\times$  25 mm screws for mounting.
- Fasten the cable at a proper position so that no direct force is applied to the sensor when the cable is pulled.
- Make a shield wire connection.
- For easy maintenance, mount the sensor at a position where it can be replaced easily.
- Sensor rings with the same specification number can be replaced with each other.
- Sensor rings with different specification numbers cannot be used in combination.
- Mating connectors (accessories) are provided.



## Sensor rings

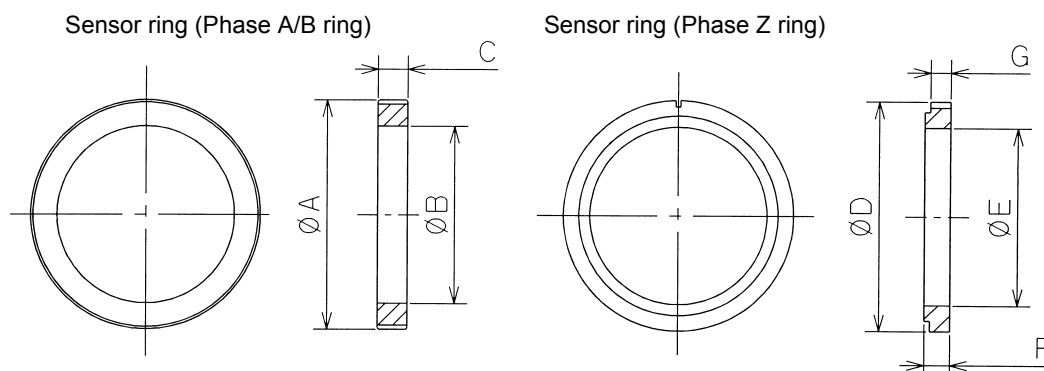

Dimensions of sensor rings

|           | Phase A/B ring                          |                                         |              | Phase Z ring                            |                                         |               |     |
|-----------|-----------------------------------------|-----------------------------------------|--------------|-----------------------------------------|-----------------------------------------|---------------|-----|
|           | $\phi A$                                | $\phi B$                                | C            | $\phi D$                                | $\phi E$                                | F             | G   |
| Ring 1, 2 | 52 <sup>+0.0</sup> <sub>-0.020</sub>    | 40 <sup>+0.016</sup> <sub>-0.0</sub>    | 10 $\pm$ 0.1 | 52 <sup>+0.0</sup> <sub>-0.020</sub>    | 40 <sup>+0.016</sup> <sub>-0.0</sub>    | 8.6 $\pm$ 0.1 | 6.7 |
| Ring 3, 4 | 103.2 <sup>+0.0</sup> <sub>-0.020</sub> | 82 <sup>+0.0</sup> <sub>-0.018</sub>    | 10 $\pm$ 0.1 | 103.2 <sup>+0.0</sup> <sub>-0.020</sub> | 82 <sup>+0.0</sup> <sub>-0.018</sub>    | 8.6 $\pm$ 0.1 | 6.7 |
| Ring 5    | 154.4 <sup>+0.0</sup> <sub>-0.020</sub> | 125 <sup>+0.025</sup> <sub>-0.0</sub>   | 10 $\pm$ 0.1 | 154.4 <sup>+0.0</sup> <sub>-0.020</sub> | 125 <sup>+0.025</sup> <sub>-0.0</sub>   | 8.6 $\pm$ 0.1 | 6.7 |
| Ring 6    | 205.6 <sup>+0.0</sup> <sub>-0.020</sub> | 160 <sup>+0.020</sup> <sub>-0.005</sub> | 10 $\pm$ 0.1 | 205.6 <sup>+0.0</sup> <sub>-0.020</sub> | 160 <sup>+0.020</sup> <sub>-0.005</sub> | 8.6 $\pm$ 0.1 | 6.7 |

For the dimensions of sensors, see "[ $\alpha$ iBZ sensor]" above.

### NOTE

- Press fit the rings around a sleeve then assemble the sleeve with the spindle.
- A used ring can be reused only once.
- The circumference of a ring has special teeth. Therefore, be careful not to deform or chip the circumference by external force.
- Check the sensor output signal. For the adjustment of the output signal, refer to Part II, "INSTALLATION," of "FANUC BUILT-IN AC SPINDLE MOTOR  $\alpha$ i series DESCRIPTIONS (B-65292EN)."

Maximum speed of sensor rings

| Ring                            | Ring 1 | Ring 2 | Ring 3 | Ring 4 | Ring 5 | Ring 6 |
|---------------------------------|--------|--------|--------|--------|--------|--------|
| Sensor specification number     | T201   | T211   | T401   | T411   | T511   | T611   |
| Number of teeth                 | 128    | 128    | 256    | 256    | 384    | 512    |
| Max. speed (min <sup>-1</sup> ) | 20,000 | 70,000 | 15,000 | 30,000 | 15,000 | 10,000 |


### NOTE

- The interference for shrink fitting varies, depending on the maximum speed used. When designing sensor rings, see "Installing the  $\alpha$ iBZ sensor"

## Installing the $\alpha$ iBZ sensor (conventional dimensions)

Install ring A and ring B as shown below.

- Press fit the rings around the sleeve then press fit the sleeve around the shaft. Contact the phase A/B ring with phase Z ring.
- Mount the sensor so that the distance between the mid point of the thickness of the stack of the phase A/B ring and phase Z ring (9.3 mm) and the center of the sensor is within  $\pm 0.5$  mm.
- The runout of the sleeve to the center of the shaft must be within 0.005 mm.
- The runout of the mounting ring to the center of the shaft must be within 0.02 mm.

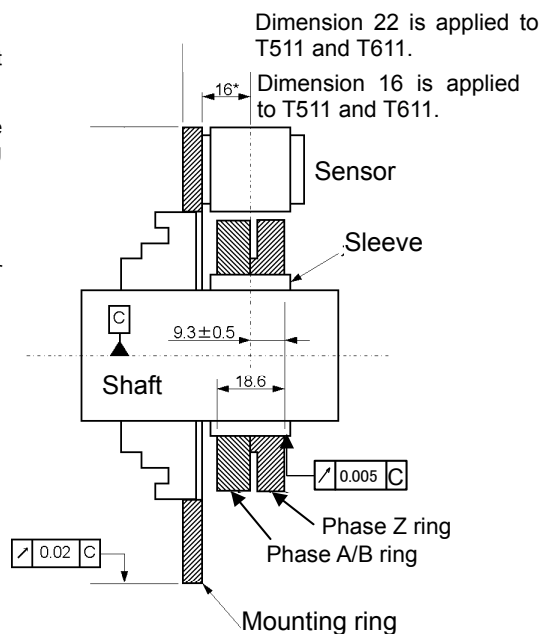

### Interference

The table below indicates the interference of the sensor rings at each maximum speed.

Unit:  $\mu\text{m}$

| Maximum speed<br>( $\text{min}^{-1}$ ) | T201                   | T211                   | T401                   | T411                    | T511                    | T611                    |
|----------------------------------------|------------------------|------------------------|------------------------|-------------------------|-------------------------|-------------------------|
|                                        | Ring 1                 | Ring 2                 | Ring 3                 | Ring 4                  | Ring 5                  | Ring 6                  |
| 3000                                   | $\phi 6$ to $\phi 32$  | $\phi 6$ to $\phi 32$  | $\phi 7$ to $\phi 35$  | $\phi 7$ to $\phi 35$   | $\phi 8$ to $\phi 43$   | $\phi 11$ to $\phi 41$  |
| 3500                                   | ↓                      | ↓                      | ↓                      | ↓                       | $\phi 9$ to $\phi 44$   | $\phi 13$ to $\phi 43$  |
| 4500                                   | ↓                      | ↓                      | ↓                      | ↓                       | $\phi 11$ to $\phi 46$  | $\phi 19$ to $\phi 49$  |
| 6000                                   | ↓                      | ↓                      | $\phi 9$ to $\phi 37$  | $\phi 9$ to $\phi 37$   | $\phi 15$ to $\phi 50$  | $\phi 29$ to $\phi 59$  |
| 8000                                   | ↓                      | ↓                      | $\phi 11$ to $\phi 39$ | $\phi 11$ to $\phi 39$  | $\phi 24$ to $\phi 59$  | $\phi 47$ to $\phi 77$  |
| 10000                                  | ↓                      | ↓                      | $\phi 14$ to $\phi 42$ | $\phi 14$ to $\phi 42$  | $\phi 35$ to $\phi 70$  | $\phi 71$ to $\phi 101$ |
| 12000                                  | $\phi 7$ to $\phi 33$  | $\phi 7$ to $\phi 33$  | $\phi 18$ to $\phi 46$ | $\phi 18$ to $\phi 46$  | $\phi 47$ to $\phi 82$  |                         |
| 15000                                  | $\phi 8$ to $\phi 34$  | $\phi 8$ to $\phi 34$  | $\phi 26$ to $\phi 54$ | $\phi 26$ to $\phi 54$  | $\phi 71$ to $\phi 106$ |                         |
| 20000                                  | $\phi 10$ to $\phi 36$ | $\phi 10$ to $\phi 36$ |                        | $\phi 41$ to $\phi 69$  |                         |                         |
| 25000                                  |                        | $\phi 12$ to $\phi 38$ |                        | $\phi 62$ to $\phi 90$  |                         |                         |
| 30000                                  |                        | $\phi 15$ to $\phi 41$ |                        | $\phi 87$ to $\phi 115$ |                         |                         |
| 40000                                  |                        | $\phi 23$ to $\phi 49$ |                        |                         |                         |                         |
| 50000                                  |                        | $\phi 33$ to $\phi 59$ |                        |                         |                         |                         |
| 60000                                  |                        | $\phi 43$ to $\phi 69$ |                        |                         |                         |                         |
| 70000                                  |                        | $\phi 57$ to $\phi 83$ |                        |                         |                         |                         |

### NOTE

- From the table above, select the suitable interference according to the maximum speed and the type of ring used. If an interference not listed above is applied, the ring will be damaged or loosen while the spindle rotates.
- These rings cannot be used at a speed higher than the speeds specified in the above table.

## J.2.2 $\alpha$ iCZ Sensor (Analog Output, A860-2140-T\*\*\*)

The  $\alpha$ iCZ sensor (analog output, A860-2140-T\*\*\*) is a sensor of analog output type used for the spindle or used as a separate sensor. Note that the interface and system configuration of this sensor differ from those of the absolute  $\alpha$ iCZ sensor (A860-2142-T\*\*\*) described later.

### Names and specification numbers

| Name                     | Specification number | Remarks         |                         |                |                |
|--------------------------|----------------------|-----------------|-------------------------|----------------|----------------|
|                          |                      | Number of teeth | Maximum speed           | Sensor ring    |                |
|                          |                      |                 |                         | Inner diameter | Outer diameter |
| $\alpha$ iCZ sensor 512  | A860-2140-T411       | 512             | 15,000min <sup>-1</sup> | φ82            | φ102.8         |
| $\alpha$ iCZ sensor 768  | A860-2140-T511       | 768             | 10,000min <sup>-1</sup> | φ125           | φ154           |
| $\alpha$ iCZ sensor 1024 | A860-2140-T611       | 1024            | 8,000min <sup>-1</sup>  | φ160           | φ205.2         |

### Absolute maximum ratings

| Item                        | Specification    |
|-----------------------------|------------------|
| Power supply voltage        | -0.5 V to +7.0 V |
| Operating temperature range | 0°C to +50°C     |
| Humidity                    | 95%RH or less    |


### Electrical specifications

| Item                 |        |                          | Specification            |
|----------------------|--------|--------------------------|--------------------------|
| Power supply voltage |        |                          | 5 V $\pm$ 5%             |
| Current consumption  |        |                          | 150 mA or less           |
| Output signal        | VA, VB | $\alpha$ iCZ sensor 512  | 512 $\lambda$ /rotation  |
|                      |        | $\alpha$ iCZ sensor 768  | 768 $\lambda$ /rotation  |
|                      |        | $\alpha$ iCZ sensor 1024 | 1024 $\lambda$ /rotation |
|                      | VZ     | Common to all models     | 1 $\lambda$ /rotation    |


| Signal name | Check pin           | Output amplitude    | Offset     |
|-------------|---------------------|---------------------|------------|
| Phase A     | A (Relative to T01) | 1000 $\pm$ 100mVp-p | $\pm$ 50mV |
| Phase B     | B (Relative to T01) |                     |            |
| Phase Z     | Z (Relative to RZ)  | 660 to 1650 mVp-p   | $\pm$ 50mV |

(Preamplifier output at room temperature and 500 min<sup>-1</sup>)

For connector pins, see "Details of cable (K89) for connection with the  $\alpha$ iSP series" described later.

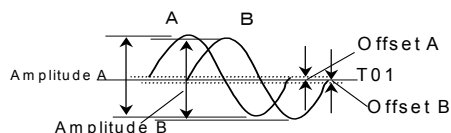

**A860-2140-T411**



**NOTE**

- The inner diameter(\*1) of the sensor ring is set with a plus tolerance. (\*2) indicates the outer diameter of the tooth surface of the sensor ring.
- The inner diameter(\*3) of the sensor mounting ring is set with a plus tolerance. (\*4) indicates the outer diameter of the sensor mounting ring.
- (\*5) indicates the distance from the bottom of the sensor mounting ring to the bottom of the sensor ring.
- The sensor head cannot be adjusted mechanically. So, do not loosen the screws marked (\*6).
- Use the sensor at a temperature not higher than 50°C.
- Because the  $\alpha$ iCZ sensor is adjusted as a combination of the sensor ring, sensor, and preamplifier in advance, they must be used as a set.
- The sensor is a precision part. Use special care in handling. Particularly, do not apply external force to the sensor element.
- The sensor is an electronic part. To prevent chips, oil, water, and other harmful materials from being attached to the sensor, take dust-proof and water-proof measures on the machine side.
- The waterproofness of the preamplifier box is equivalent to IP55. However, if the preamplifier box is continuously exposed to coolant, for example, the sensor can fail. Provide highest-level water protection to prevent the preamplifier box from being exposed to coolant or the like.
- Ensure that no vibration greater than 1 G is applied to the preamplifier box.
- Make a shield wire connection. Connect the preamplifier box to ground or to the machine cabinet.
- For easy maintenance, mount the sensor at a position where it can be replaced easily.

Technical drawing of the RM15WTP-12P sensor unit, showing front, side, and detail views with dimensions and labels.

**Front View Dimensions:**

- Overall diameter:  $\phi 220$
- Outer ring diameter:  $\phi 154^{+0.02}_{-0}$  (※2)
- Inner ring diameter:  $\phi 140$
- Mounting holes: 6- $\phi 5.5$  through, equally spaced on  $\phi 140$
- Mounting holes: 4- $\phi 5.5$  through, equally spaced on  $\phi 174$
- Section A-A' line
- Fastened before shipment
- 6-Screws fastening phase Z ring and phase A/B ring together
- Dimensions: 37, 24, 26, 76, 73, 45°, 76, 73, 45°, 37, 24, 26

**Side View Dimensions:**

- Overall height: 190 (※4)
- Mounting ring diameter:  $\phi 158$  (※3)
- Sensor ring diameter:  $\phi 125$  (※1)
- Dimensions: 13, 5 $\pm 0.2$  (※5), 39, 17.5, 125 (※1), 158 (※3), 190 $\pm 0.015$  (※4)

**Detail View Dimensions (Section A-A'):**

- Dimensions: 46, 70, 80, 170, 185
- Pre-amplifier mounting hole
- 4- $\phi 5$  through

**Other Labels:**


- Connector outer diameter  $\phi 23$
- RM15WTP-12P (manufactured by Hirose Electric)
- Cable length 1200 mm
- Phase A/B ring
- Phase Z ring
- Sensor mounting ring
- Sensor head
- Sensor ring centering track

For details of installation, see "Installation."

**NOTE**

- The inner diameter(\*1) of the sensor ring is set with a plus tolerance. (\*2) indicates the outer diameter of the tooth surface of the sensor ring.
- The inner diameter(\*3) of the sensor mounting ring is set with a plus tolerance. (\*4) indicates the outer diameter of the sensor mounting ring.
- (\*5) indicates the distance from the bottom of the sensor mounting ring to the bottom of the sensor ring.
- The sensor head cannot be adjusted mechanically. So, do not loosen the screws marked (\*6).
- Use the sensor at a temperature not higher than 50°C.
- Because the  $\alpha$ iCZ sensor is adjusted as a combination of the sensor ring, sensor, and preamplifier in advance, they must be used as a set.
- The sensor is a precision part. Use special care in handling. Particularly, do not apply external force to the sensor element.
- The sensor is an electronic part. To prevent chips, oil, water, and other harmful materials from being attached to the sensor, take dust-proof and water-proof measures on the machine side.
- The waterproofness of the preamplifier box is equivalent to IP55. However, if the preamplifier box is continuously exposed to coolant, for example, the sensor can fail. Provide highest-level water protection to prevent the preamplifier box from being exposed to coolant or the like.
- Ensure that no vibration greater than 1 G is applied to the preamplifier box.
- Make a shield wire connection. Connect the preamplifier box to ground or to the machine cabinet.
- For easy maintenance, mount the sensor at a position where it can be replaced easily.

**$\alpha$ iCZ sensor 1024**  
**A860-2140-T611**

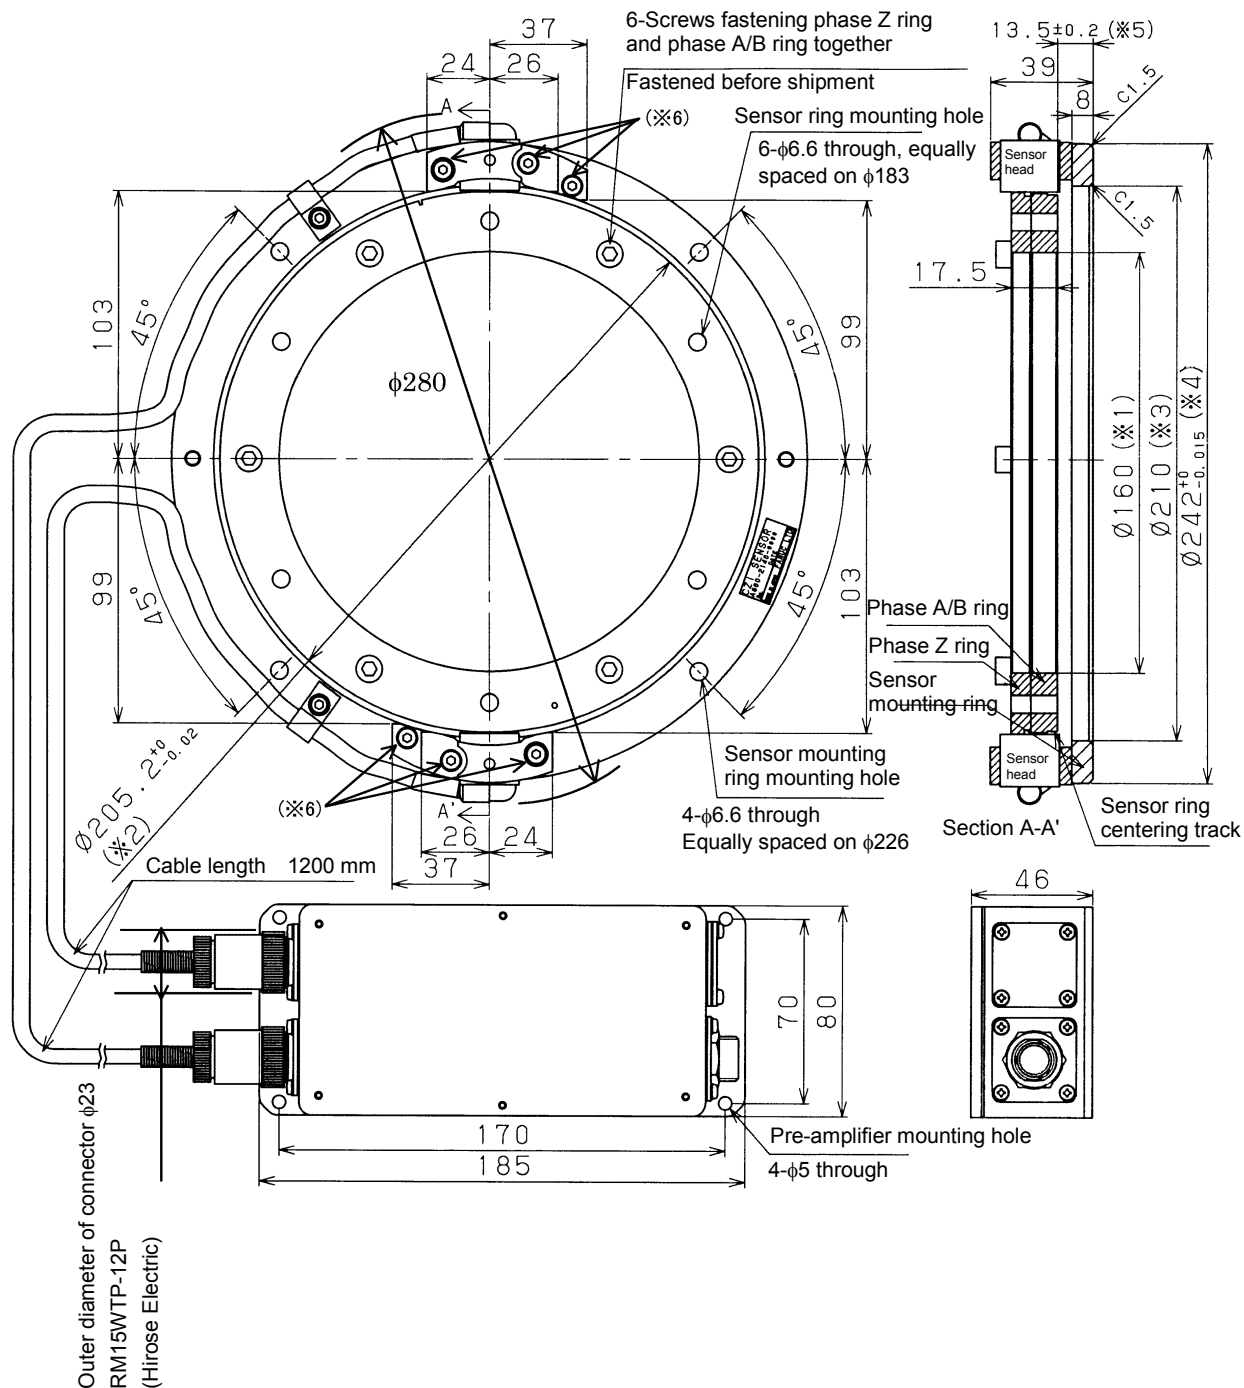

For details of installation, see "Installation."




**NOTE**

- The inner diameter(\*1) of the sensor ring is set with a plus tolerance. (\*2) indicates the outer diameter of the tooth surface of the sensor ring.
- The inner diameter(\*3) of the sensor mounting ring is set with a plus tolerance. (\*4) indicates the outer diameter of the sensor mounting ring.
- (\*5) indicates the distance from the bottom of the sensor mounting ring to the bottom of the sensor ring.
- The sensor head cannot be adjusted mechanically. So, do not loosen the screws marked (\*6).
- Use the sensor at a temperature not higher than 50°C.
- Because the  $\alpha$ iCZ sensor is adjusted as a combination of the sensor ring, sensor, and preamplifier in advance, they must be used as a set.
- The sensor is a precision part. Use special care in handling. Particularly, do not apply external force to the sensor element.
- The sensor is an electronic part. To prevent chips, oil, water, and other harmful materials from being attached to the sensor, take dust-proof and water-proof measures on the machine side.
- The waterproofness of the preamplifier box is equivalent to IP55. However, if the preamplifier box is continuously exposed to coolant, for example, the sensor can fail. Provide highest-level water protection to prevent the preamplifier box from being exposed to coolant or the like.
- Ensure that no vibration greater than 1 G is applied to the preamplifier box.
- Make a shield wire connection. Connect the preamplifier box to ground or to the machine cabinet.
- For easy maintenance, mount the sensor at a position where it can be replaced easily.

## Installation

### Installing the sensor ring

Install the flange on the shaft side and screw it in the axis direction by using the sensor ring mounting hole. In assembly, perform centering using the centering track so that the swing from the center of rotation is 10  $\mu\text{m}$  or less.

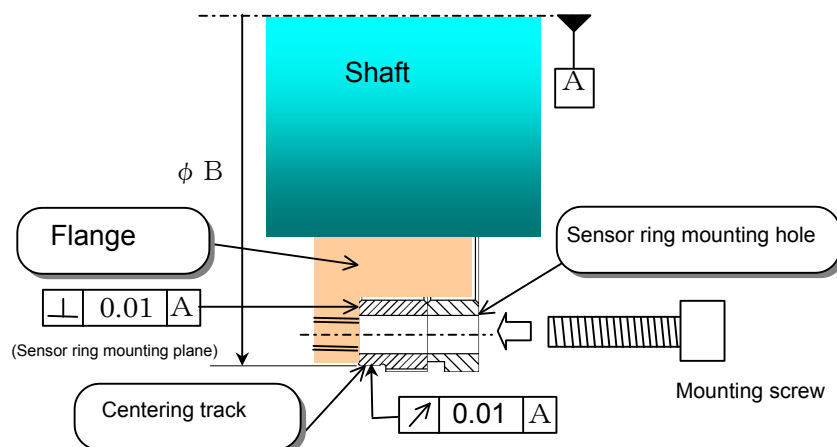


| Specification  | Outer diameter of centering track ( $\phi B$ ) | Positions of sensor ring mounting holes                           | Mounting screw | Recommended tightening torque (Nm) |
|----------------|------------------------------------------------|-------------------------------------------------------------------|----------------|------------------------------------|
| A860-2140-T411 | $\phi 101$                                     | 6- $\phi 5.5$ through, equally spaced on $\phi 92$ circumference  | M5             | 2.4 to 3.4                         |
| A860-2140-T511 | $\phi 152.2$                                   | 6- $\phi 5.5$ through, equally spaced on $\phi 140$ circumference | M5             | 2.4 to 3.4                         |
| A860-2140-T611 | $\phi 203.4$                                   | 6- $\phi 6.6$ through, equally spaced on $\phi 183$ circumference | M6             | 4.1 to 5.8                         |

#### NOTE

- For centering, the outer diameter of the flange must be designed so that there is a gap of about 0.1 mm between the flange and the inner surface of the sensor ring.
- Secure the sensor ring on the end face with screws (avoid heat shrink fitting to mount the sensor ring).
- The sensor ring consists of a phase Z ring and phase A/B ring, which are fastened together by using screws in advance. Never detach these screws. Spot facing is not provided. So, at the time of machine design, be careful not to cause interference with the screw heads.
- Centering must be performed with the centering track (the outer surface of the phase Z ring and the teeth pitch circle are not coaxial). When performing centering, use a tool such as a plastic hammer not to damage the gear teeth.
- Magnetic matter attached to gear teeth can lead to a detection error. After centering is completed, remove such foreign matter by air blowing.

## Installing the sensor mounting ring

When installing the sensor mounting ring, provide a socket on the machine side, and fit the sensor mounting ring into the socket. (The dimensions of the socket on the machine side must satisfy the accuracy indicated in the table below. Otherwise, detection precision may deteriorate.) When fastening the mounting ring with the screws, press the mounting ring against the socket from the CN1 sensor side as shown in the figure below. After the installation, check that the gap between the sensor ring and sensor is 0.08 mm or more by using a thickness gage.

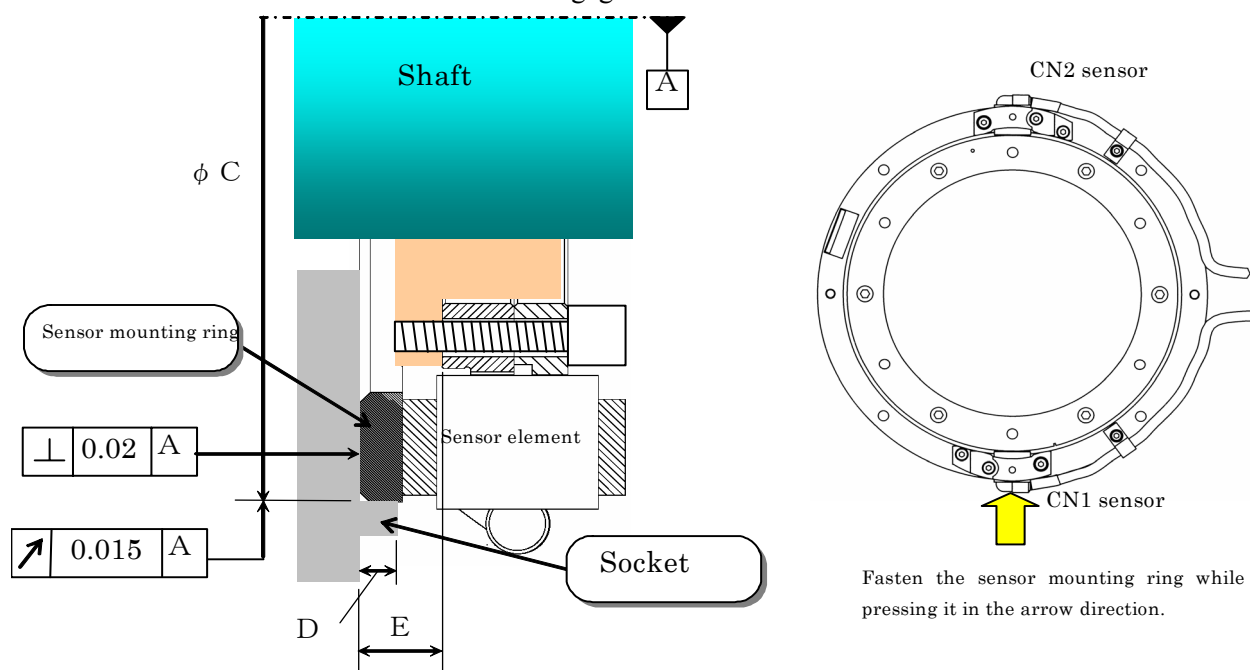

Fasten the sensor mounting ring while pressing it in the arrow direction.


| Specification  | Outer diameter of sensor mounting ring | Inner diameter of socket ( $\phi C$ ) | Socket height (D) | Distance between bottom of sensor mounting ring and bottom of sensor ring (E) |
|----------------|----------------------------------------|---------------------------------------|-------------------|-------------------------------------------------------------------------------|
| A860-2140-T411 | $\phi 140^{+0}_{-0.015}$               | $\phi 140^{+0.015}_{-0}$              | 5.5 or less       | $11.5 \pm 0.2$                                                                |
| A860-2140-T511 | $\phi 190^{+0}_{-0.015}$               | $\phi 190^{+0.015}_{-0}$              | 7.5 or less       | $13.5 \pm 0.2$                                                                |
| A860-2140-T611 | $\phi 242^{+0}_{-0.015}$               | $\phi 242^{+0.015}_{-0}$              | 7.5 or less       | $13.5 \pm 0.2$                                                                |

### NOTE

- Provide a sock on the machine side where possible, and fit the sensor mounting ring into the socket. Avoid making centering adjustments by tapping the outer surface of the sensor mounting ring.

## Installing the OH line

Open the lid of the preamplifier box, and remove the connector cover on the CN4 side. Draw the OH line from CN4 and connect the line to the terminal block on the printed circuit board.

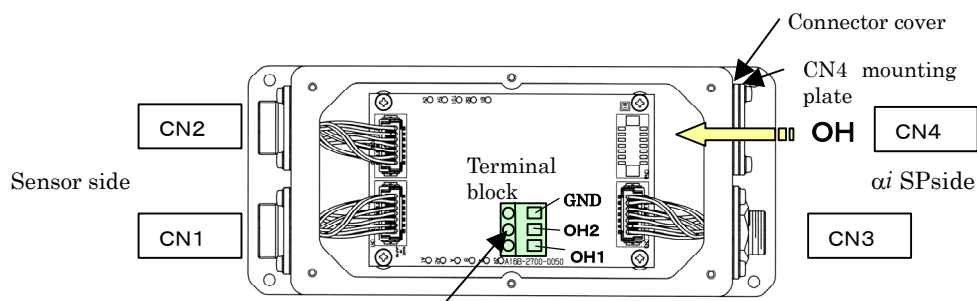


Tighten with flat-blade screwdriver (tightening torque: 0.3 Nm).

A cable clamp for the OH line is to be prepared by the user. Use the attached CN4 connector mounting plate to secure the cable clamp.

Recommended cable clamp: SKINTOP ST-7 from Lapp Kabel

Outer diameter of the OH cable:  $\phi 5.2 \pm 0.3$

Hole diameter on the CN4 connector mounting plate:  $\phi 13$



CN4 connector mounting plate


### NOTE

- Adjustments have been made for the sensor, preamplifier, and sensor ring at the same time. Therefore, use them as a set. The variable resistor on the printed circuit board in the preamplifier is also adjusted in advance. So, do not readjust the variable resistor. Furthermore, the sensors cannot be adjusted mechanically. So, do not loosen the screws fastening the CN1 and CN2 sensors.
- The connectors on the sensor side are labeled "CN1" (in black) and "CN2" (in blue). Make connections according to the figure above.

## Checking the output signals


When checking the output signals, see "Electrical specifications."  
(The output signals need not be adjusted.)

- Supply power to the 0 V and 5 V pins when checking the waveforms without making a connection to the  $\alpha i$  SP.
- The Lissajous figure of the phase A/B output signal is a complete circle.

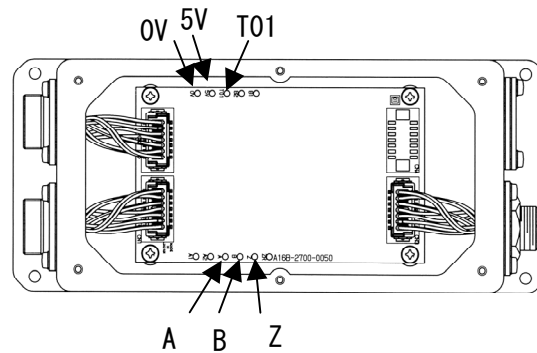

## Details of cable (K89) for connection with the $\alpha i$ SP series

When the CZi sensor is used as a separate sensor (connected to connector JYA4), THR1 and THR2 need not be wired.

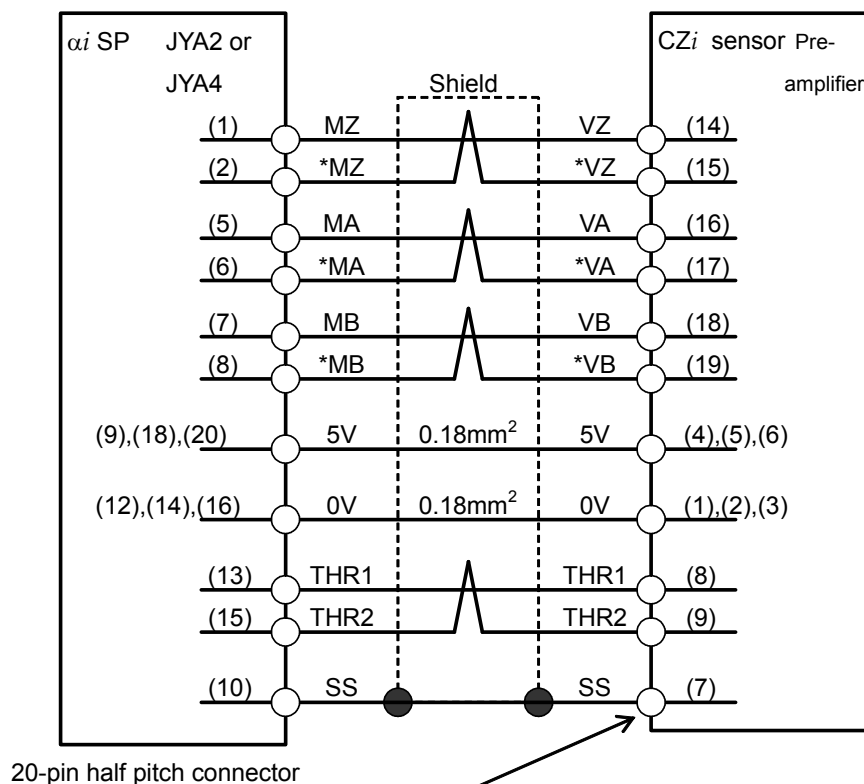

Hirose Electric

Crimp type

Crimp pin: HR22-SC-122 (15 pins required per connector)

Housing: HR22-12WTPA-20SC

Crimping tool: HR22-TA-2428HC (Hirose Electric)

Solder type

HR22-12WTPA-20S

Cable specification: 0.18-mm<sup>2</sup> twisted pair 4 pairs + 0.18-mm<sup>2</sup> 6 common shielded cable

Recommended wire: A66L-0001-0367

For the connector conforming to the recommended wire on the JYA2 side, see Subsection 9.4.1.

For cable details, see Appendix B, "CABLES."

# K

## MAGNETIC SENSOR SIGNAL CONVERSION ADAPTER

---

By using a magnetic sensor signal conversion adapter for compatibility with the  $\alpha$  series, orientation based on the magnetic sensor method can be used with the  $\alpha i$  SP series.

In the case of new design, however, employment of a standard spindle sensor of the  $\alpha i$  series (such as the  $\alpha i$  BZ sensor) is recommended.

## K.1 ORDERING INFORMATION


- Magnetic sensor signal conversion adapter

| Specification number |               |
|----------------------|---------------|
| A06B-6111-H402       | With no cable |

- This adapter needs to be used in combination with the  $\alpha i$  SP series TYPE B.
- For details of the magnetic sensor, refer to "FANUC SERVO AMPLIFIER a series DESCRIPTIONS (B-65162EN)."

## K.2 SPECIFICATIONS

### Example of configuration

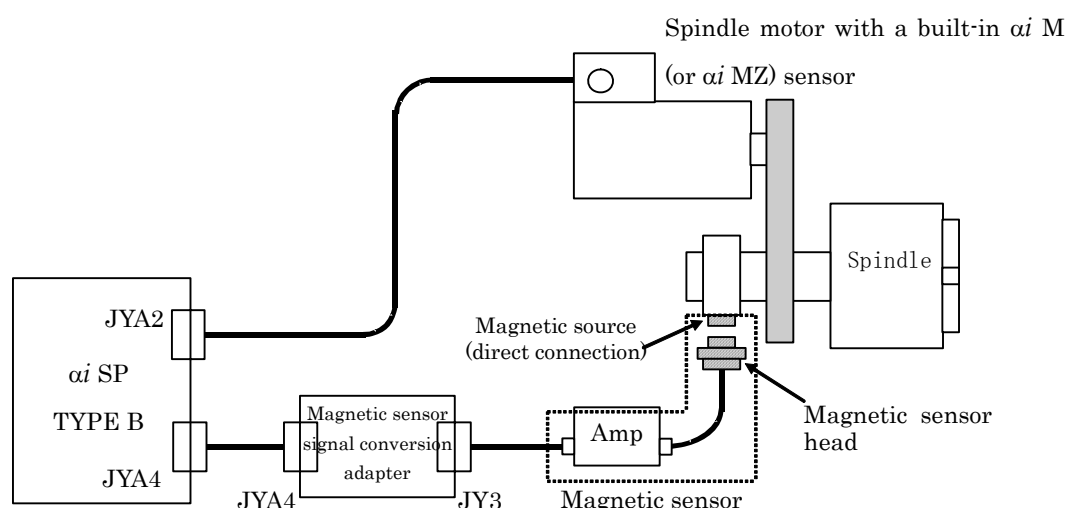

### Applicable $\alpha i$ SP series


| Specification number | Model               |
|----------------------|---------------------|
| A06B-6142-Hxxx#H580  | TYPE B, 200 V input |
| A06B-6152-Hxxx#H580  | TYPE B, 400 V input |

### Notes

- A cable for connection between the  $\alpha i$  SP and magnetic sensor signal conversion adapter needs to be prepared by the user.
- Operating temperature range: 0°C to 55°C
- The design of this adapter assumes that this adapter is housed in a cabinet such as a power magnetics cabinet, and no waterproof measures are taken.




## K.3 DIMENSIONS

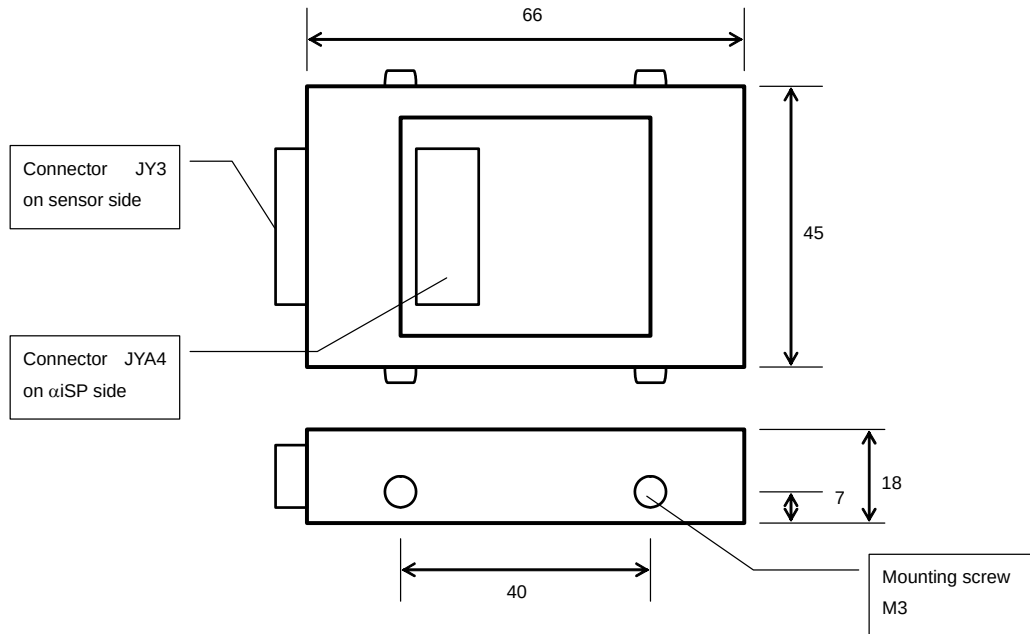**NOTE**


When installing this adapter in a cabinet, use the M3 mounting screws on the side with an L-shaped mounting hardware.

## K.4 CONNECTION

### Overall connection

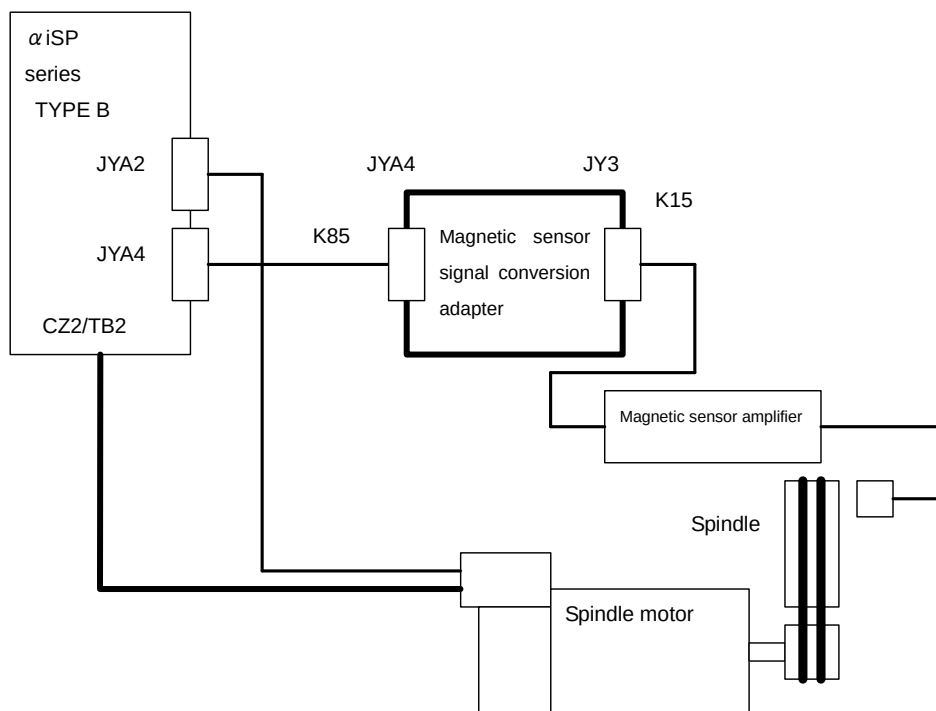

## Details of K85 connection

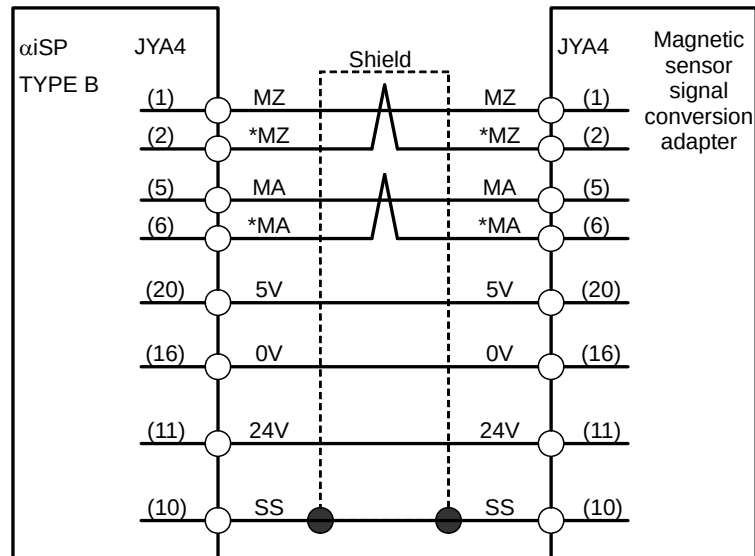

### Cable specification

0.18-mm<sup>2</sup> twisted pair 2 pairs + 0.5-mm<sup>2</sup> 3 common shielded cable

Recommended wire: A66L-0001-0368

Maximum cable length: 3 m

### Connector to be used


Connector: FI40A-20S, Housing: FI-20-CV5, Manufacturer: Hirose Electric

## Details of K15 connection


Refer to "FANUC SERVO AMPLIFIER a series DESCRIPTIONS (B-65162EN)."

## K.5 METHOD OF ADJUSTMENT

While rotating the spindle at a speed of about  $100 \text{ min}^{-1}$ , check that the following waveforms can be obtained from the check pins PA2 and PS2 on the spindle check board (A06B-6078-H001). The waveforms below are obtained when the spindle is rotated in the reverse direction (SRV direction).

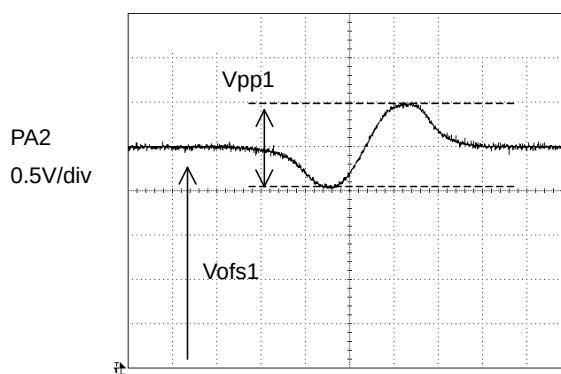


Specification:  $V_{pp1} = 0.5 \text{ V to } 1.2 \text{ V}$ ,  $V_{ofs1} = 2.5 \text{ V} \pm 100 \text{ mV}$

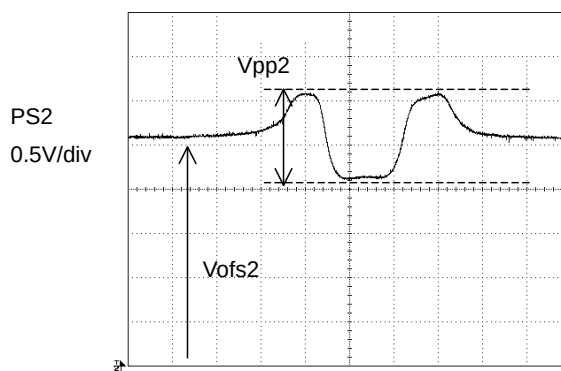

Specification:  $V_{pp2} = 0.5 \text{ V to } 1.2 \text{ V}$ ,  $V_{ofs2} = 2.6 \text{ V} \pm 100 \text{ mV}$

(Tip) Combining PA2 and PS2

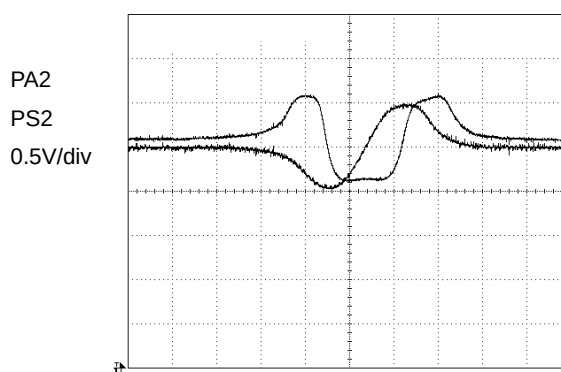



## HARMONIC LEAKAGE CURRENT

### Method of filling the harmonic leakage current calculation sheet according to the harmonics suppression measure guideline

This appendix provides the method of filling "Calculation sheet of harmonic leakage current from harmonic emission devices (No. 1)" by the user in connection with "Harmonics suppression measure guideline for users who receive power at high or specially high voltages" issued from Agency for JAPAN Natural Resources and Energy of the Ministry of Economy, Trade, and Industry.

Servo amplifier data needed for filling the calculation sheet is provided below.

#### Servo amplifier data

Device name: Servo amplifier for velocity control

Manufacturer: FANUC LTD.

Model: Enter the drawing number of the servo amplifier.

Rated capacity: Refer to the descriptions of each servo amplifier.

- For rated capacity calculation, see "How to calculate the power equipment capacity" in Subsection 2.3.1.  
For "Minor circuit classification No." and "Conversion coefficient  $K_i$ ," use the values on the table provided below.
- This appendix describes the method of filling the calculation sheet when no device for harmonic leakage current suppression is installed.  
If a device for harmonic leakage current suppression is already installed, "Calculation sheet of harmonic leakage current from harmonic emission devices (No. 2)" needs to be submitted.
- The circuit classification of a servo amplifier is 1 or 3. So, "Application of harmonic emission device manufacturers," which is required for circuit classification 10, need not be prepared.
- For details of the guideline, calculation method, and so forth, the user is requested to contact its electric power company.

| Name                                               | Target amplifier drawing number | Minor circuit classification No. | Conversion coefficient Ki | Remarks |
|----------------------------------------------------|---------------------------------|----------------------------------|---------------------------|---------|
| Power supply ( $\alpha i$ PS)                      | A06B-6110-Hxxx                  | 32                               | 1.8                       | NOTE    |
| Power supply ( $\alpha i$ PS HV)                   | A06B-6120-Hxxx                  | 32                               | 1.8                       | NOTE    |
| Power supply ( $\alpha i$ PSR)                     | A06B-6115-Hxxx                  | 32                               | 1.8                       | NOTE    |
| Power supply ( $\alpha i$ PS, Upgraded Version)    | A06B-6140-Hxxx                  | 32                               | 1.8                       | NOTE    |
| Power supply ( $\alpha i$ PS HV, Upgraded Version) | A06B-6150-Hxxx                  | 32                               | 1.8                       | NOTE    |

**NOTE**

When the  $\alpha i$  series amplifier is used, no separate calculation is needed for each of the servo amplifier ( $\alpha i$ SV) and spindle amplifier ( $\alpha i$ SP). A calculation may be made for the  $\alpha i$ PS or  $\alpha i$ PSR.

# INDEX

## <Number>

|                                       |                |
|---------------------------------------|----------------|
| 10-PAIR CABLE .....                   | 405,420        |
| 200-V Input Series .....              | 3,46,81,85,128 |
| 200-V INPUT SERIES POWER SUPPLY ..... | 400            |
| 20-Pin Half-Pitch Connectors .....    | 301            |
| 24-V power supply .....               | 122,125        |
| 400-V Input Series .....              | 6,50,82,85,134 |
| 400-V INPUT SERIES POWER SUPPLY ..... | 402            |

## < $\alpha$ >

|                                                                        |                      |
|------------------------------------------------------------------------|----------------------|
| $\alpha$ position coder S .....                                        | 353                  |
| $\alpha$ i position coder .....                                        | 350                  |
| $\alpha$ i PS series .....                                             | 33,46,50,128,134,195 |
| $\alpha$ i PS Series Connection Diagram.....                           | 207                  |
| $\alpha$ i PS <sub>R</sub> series.....                                 | 46                   |
| $\alpha$ i SP series .....                                             | 40,49,53,133,139,203 |
| $\alpha$ i SP Series Connection Diagram.....                           | 259                  |
| $\alpha$ i SV series.....                                              | 37,47,51,129,135,200 |
| $\alpha$ i SV series Connection Diagram.....                           | 234                  |
| $\alpha$ iBZ Sensor (A860-2150-T*** and A860-2155-T***)                | 358                  |
| $\alpha$ iBZ Sensor (Conventional Dimensions,<br>A860-2120-T***) ..... | 498                  |
| $\alpha$ iCZ Sensor (Analog Output, A860-2140-T***) .....              | 503                  |
| $\alpha$ iCZ Sensor (for the Spindle).....                             | 367                  |

## <A>

|                                                                                   |         |
|-----------------------------------------------------------------------------------|---------|
| Absolute $\alpha$ iCZ Sensor (Separate Sensor).....                               | 328     |
| Absolute $\alpha$ iCZ Sensor (Serial Output, A860-2142-T***)                      | 483     |
| Absolute maximum ratings .....                                                    | 368     |
| AC Line Filter .....                                                              | 56,158  |
| AC reactor.....                                                                   | 54      |
| AC Reactor Unit.....                                                              | 148     |
| AMPLIFIER INSTALLATION .....                                                      | 117     |
| AMPLIFIER INSTALLATION NOTES RELATING TO<br>SAFETY STANDARDS .....                | 118     |
| Anti-Noise Devices .....                                                          | 449     |
| Anti-Noise Measures .....                                                         | 442,443 |
| Anti-Noise Measures for Power Supply Equipment and<br>Grounding .....             | 446     |
| APPLICATION TO PREVENTION OF VERTICAL<br>AXES FROM FALLING AT POWER FAILURE ..... | 469     |

## <B>

|                                      |     |
|--------------------------------------|-----|
| Battery for absolute Pulsecoder..... | 78  |
| Brake Circuit .....                  | 470 |

## <C>

|                                                                                |                      |
|--------------------------------------------------------------------------------|----------------------|
| Cabinet .....                                                                  | 113                  |
| Cable Clamp and Shield Processing.....                                         | 109                  |
| CABLE CONNECTION DETAILS .....                                                 | 207                  |
| Cables.....                                                                    | 70,404               |
| Caution.....                                                                   | s-5,s-9,s-12,403,476 |
| Circuit Breaker .....                                                          | 170                  |
| Circuit breaker and magnetic contactor.....                                    | 71                   |
| Classification in standards on insulation design.....                          | 118,123              |
| COMPOSITE 10-CORE CABLE .....                                                  | 415                  |
| COMPOSITE 12-CORE CABLE .....                                                  | 417                  |
| COMPOSITE 16-CORE CABLE .....                                                  | 419                  |
| COMPOSITE 7-CORE CABLE .....                                                   | 407                  |
| Concrete Examples of Anti-Noise Measures.....                                  | 444                  |
| Configuration .....                                                            | 1,3,316              |
| Confirming Effect .....                                                        | 477                  |
| Connecting the battery (for the absolute Pulsecoder)....                       | 252                  |
| Connection .....                                                               | 192,518,313,322,326  |
| Connection block diagram (common to three models)..                            | 335                  |
| Connection specifications .....                                                | 336,381              |
| Connector Installation Diagram<br>(for Combination with $\alpha$ i SP 15)..... | 321                  |
| CONNECTOR LOCATION .....                                                       | 195                  |
| Connectors .....                                                               | 58                   |
| COOLING.....                                                                   | 140                  |

## <D>

|                                                                                                    |     |
|----------------------------------------------------------------------------------------------------|-----|
| DC LINK TERMINAL BOARD SECTION                                                                     |     |
| PROTECTIVE COVER .....                                                                             | 462 |
| DEFINITION OF WARNING, CAUTION, AND<br>NOTE .....                                                  | s-2 |
| DESCRIPTIONS.....                                                                                  | 453 |
| Detailed description of the connection of cables                                                   |     |
| K41 (for regenerative discharge resistance),<br>K42 (for thermostat), and K43 (for fan motor)..... | 231 |
| Details of cable K1 (power supply line).....                                                       | 213 |
| Details of cable K10 (power cable).....                                                            | 260 |
| Details of cable K100<br>(for power failure detection output) .....                                | 233 |

|                                                     |             |                                                                    |             |
|-----------------------------------------------------|-------------|--------------------------------------------------------------------|-------------|
| Details of cable K11.....                           | 263         | <F>                                                                |             |
| Details of cable K12.....                           | 264         | FEATURES OF THE SERVO AMPLIFIER $\alpha i$ SERIES ..               | 2           |
| Details of cable K14.....                           | 267         | FEEDBACK CABLE LENGTH.....                                         | 431         |
| Details of cable K16.....                           | 271         | FITTING A LIGHTNING SURGE PROTECTION                               |             |
| Details of cable K17.....                           | 273         | DEVICE .....                                                       | 399         |
| Details of cable K2.....                            | 237,260     | Fuses.....                                                         | 64          |
| Details of cable K21.....                           | 238         | <G>                                                                |             |
| Details of cable K22.....                           | 243         | GROUND.....                                                        | 104         |
| Details of cable K24.....                           | 248         | Ground Systems .....                                               | 104         |
| Details of cable K25.....                           | 249         | Grounding Method.....                                              | 105         |
| Details of cable K26.....                           | 250         | <H>                                                                |             |
| Details of cable K27.....                           | 251         | HARMONIC LEAKAGE CURRENT .....                                     | 521         |
| Details of cable K3.....                            | 225         | HEAT DISSIPATION.....                                              | 127         |
| Details of cable K33.....                           | 281         | HOW TO MOUNT .....                                                 | 464         |
| Details of cable K36.....                           | 287         | How to Obtain the $\alpha i$ PS series maximum output              |             |
| Details of cable K4.....                            | 237         | capability .....                                                   | 87          |
| Details of cable K6.....                            | 227         | How to Obtain the $\alpha i$ PS series peak maximum output         |             |
| Details of cable K69.....                           | 226,237,260 | capability .....                                                   | 88          |
| Details of cable K7.....                            | 228         | How to Obtain the $\alpha i$ PS series rated output capability ..  | 87          |
| Details of cable K70.....                           | 230,258,263 | How to Obtain the $\alpha i$ PS <sub>R</sub> series Maximum Output |             |
| Details of cable K71.....                           | 290         | Capability .....                                                   | 91          |
| Details of cable K86.....                           | 293         | How to Obtain the $\alpha i$ PS <sub>R</sub> series Rated Output   |             |
| Details of cable K88.....                           | 294         | Capability .....                                                   | 91          |
| Details of cable K90.....                           | 295         | HOW TO SELECT THE $\alpha i$ PS series                             |             |
| Details of cable K96.....                           | 296         | (POWER SUPPLY) .....                                               | 86          |
| Details of cable K97.....                           | 297         | HOW TO SELECT THE $\alpha i$ PSR series (POWER                     |             |
| DETAILS OF CONNECTORS.....                          | 301         | SUPPLY, RESISTANCE DISCHARGE TYPE) .....                           | 90          |
| Details of short bar K2 .....                       | 220         | HOW TO SELECT THE $\alpha i$ SP series(SPINDLE                     |             |
| DIMENSIONS .....                                    | 517         | AMPLIFIER) .....                                                   | 84          |
| Dynamic Brake Module (DBM).....                     | 168         | HOW TO SELECT THE $\alpha i$ SV SERIES (SERVO                      |             |
| <E>                                                 |             | AMPLIFIER) .....                                                   | 80          |
| EMC.....                                            | 121         | How to Select the Dynamic Brake Module (DBM) .....                 | 83          |
| ENVIRONMENTAL CONDITIONS .....                      | 25          | HOW TO SELECT THE MODULE.....                                      | 79          |
| Environments for Amplifier Heat Sink Sections ..... | 458         | <I>                                                                |             |
| Environments for Amplifier Installation .....       | 460         | INPUT POWER .....                                                  | 12          |
| EXAMPLES OF RECOMMENDED POWER                       |             | Installation.....                                                  | 102,340,386 |
| MAGNETICS CABINETS FOR SERVO AMPLIFIER              |             | Installation conditions and notes .....                            | 356         |
| INSTALLATION.....                                   | 451         | Interpolation error learning .....                                 | 391         |
| External Dimensions .....                           | 319         | <L>                                                                |             |
| EXTERNAL DIMENSIONS AND MAINTENANCE                 |             | LEAKAGE CURRENT .....                                              | 103         |
| AREA.....                                           | 141         | Lightning Surge Protector .....                                    | 74,179      |
| EXTERNAL DIMENSIONS OF EACH                         |             | LINEUP .....                                                       | 10          |
| CONNECTOR .....                                     | 421         |                                                                    |             |
| External overload protection device.....            | 122,124     |                                                                    |             |



|                                                                                             |                  |                                                                                  |                            |
|---------------------------------------------------------------------------------------------|------------------|----------------------------------------------------------------------------------|----------------------------|
| LIST OF MOTOR OUTPUT CAPACITIES FOR<br><i>αi</i> PS AND <i>αi</i> PSR series SELECTION..... | 96               | POWER FAILURE DETECTION FUNCTION.....                                            | 465                        |
| <b>&lt;M&gt;</b>                                                                            |                  | POWER FAILURE DETECTION SPECIFICATION..                                          | 467                        |
| Machine start-up procedure (outline).....                                                   | 385              | POWER LINE FOR SERVO MOTOR AND<br>AMPLIFIER.....                                 | 434                        |
| Magnetic Contactors .....                                                                   | 172              | POWER LINE SWITCH CIRCUIT .....                                                  | 306                        |
| MAGNETIC SENSOR SIGNAL CONVERSION<br>ADAPTER .....                                          | 515              | Power Line Switch Unit.....                                                      | 77,308                     |
| Maintenance target parts .....                                                              | 393              | Power Magnetics Cabinet Seal-up.....                                             | 453                        |
| MEASURES AGAINST NOISE FROM SERVO<br>AMPLIFIERS .....                                       | 438              | Power Transformer.....                                                           | 65,159                     |
| Method for Keeping Vertical Axis Motors Energized ..                                        | 473              | Pre-Installation Arrangement .....                                               | 442                        |
| Method for Supplying External Power to the Amplifier                                        | 479              | Procedure .....                                                                  | 469                        |
| METHOD OF ADJUSTMENT.....                                                                   | 520              | Protection against electric shock .....                                          | 119,124                    |
| MISCELLANEOUS.....                                                                          | 450              | Protective grounding .....                                                       | 121,124                    |
| <b>&lt;N&gt;</b>                                                                            |                  | <b>&lt;R&gt;</b>                                                                 |                            |
| Names and specification numbers.....                                                        | 368              | Reduction of load ratio to ambient temperature .....                             | 122                        |
| Noise Filter.....                                                                           | 75,182           | Regenerative discharge unit .....                                                | 69                         |
| NOISE OCCURRENCE IN SERVO AMPLIFIERS ....                                                   | 439              | Regenerative Discharge Unit.....                                                 | 165                        |
| NOISE PREVENTION .....                                                                      | 108              | Requirements of EN and IEC Standards .....                                       | 118                        |
| NOISE TYPES.....                                                                            | 440              | Requirements of UL Standards .....                                               | 123                        |
| Note.....                                                                                   | s-7,s-13,314,392 | Rotation direction of the absolute <i>αi</i> CZ sensor.....                      | 338                        |
| Notes on 400-V Input <i>αi</i> PS series selection.....                                     | 89               | Rotation direction of the <i>αi</i> CZ sensor.....                               | 384                        |
| Notes on Connecting .....                                                                   | 107              | <b>&lt;S&gt;</b>                                                                 |                            |
| NOTES ON COOLANT (REFERENCE).....                                                           | 126              | SAFETY PRECAUTIONS .....                                                         | s-1                        |
| Notes on the emergency stop circuit configuration.....                                      | 121              | Screw tightening torque .....                                                    | 122,125                    |
| Notes on use .....                                                                          | 345              | SELECTING A POWER CABLE .....                                                    | 435                        |
| Number of Connected <i>αi</i> SV series and <i>αi</i> SP Series                             | 89,92            | Selecting a Regenerative Discharge Unit.....                                     | 93                         |
| <b>&lt;O&gt;</b>                                                                            |                  | SENSOR .....                                                                     | 327                        |
| ORDERING INFORMATION .....                                                                  | 45,516           | SENSOR (OLD SPECIFICATIONS) .....                                                | 482                        |
| Others .....                                                                                | 54,116           | SENSOR FOR THE SERVO SYSTEM.....                                                 | 328                        |
| Outline Drawing.....                                                                        | 325              | SENSOR FOR THE SPINDLE.....                                                      | 350,498                    |
| OUTLINE DRAWINGS .....                                                                      | 142              | SENSOR FOR THE SYNCHRONOUS BUILT-IN                                              |                            |
| Outline Drawings of Amplifiers, Panel Cut-out, and<br>Maintenance Area .....                | 142              | SERVO MOTOR AND SEPARATE SENSOR.....                                             | 483                        |
| Output signal check method.....                                                             | 348,394          | Sensors for servo .....                                                          | 75                         |
| Outside and Mounting Dimension Diagrams .....                                               | 309              | Sensors for spindle .....                                                        | 76                         |
| Overload protection.....                                                                    | 122,124          | Separation of Signal Lines .....                                                 | 108                        |
| Over-speed protection .....                                                                 | 122,125          | SERVO AMPLIFIER.....                                                             | 8,46                       |
| <b>&lt;P&gt;</b>                                                                            |                  | SERVO CABLE LENGTH (WHEN<br>RECOMMENDED CABLES ARE USED).....                    | 433                        |
| Panel Cut-out.....                                                                          | 326              | Servo Motor Continuous Rated Outputs and Maximum<br>Outputs at Acceleration..... | 96                         |
| PANEL CUT-OUT DIAGRAMS .....                                                                | 185              | Short-circuit protection .....                                                   | 125                        |
| Position Coder .....                                                                        | 350              | Specification.....                                                               | 11,308,317,324,329,368,516 |
|                                                                                             |                  | SPECIFICATIONS OF THE MODULES .....                                              | 33                         |
|                                                                                             |                  | Spindle alarms .....                                                             | 396                        |

|                                                                                     |              |
|-------------------------------------------------------------------------------------|--------------|
| SPINDLE CABLE LENGTH (WHEN<br>RECOMMENDED CABLES ARE USED).....                     | 432          |
| Spindle Motor Continuous Rated Outputs and<br>Maximum Outputs at Acceleration ..... | 100          |
| Spindle Motor Feedback Cable Connection.....                                        | 299          |
| SPINDLE ORIENTATION .....                                                           | 305          |
| SPINDLE-RELATED OPTIONS .....                                                       | 304          |
| Sub module SM.....                                                                  | 57,323       |
| Sub module SW.....                                                                  | 57,316       |
| Switch Circuit Configuration .....                                                  | 306          |
| System configuration and connection block diagram....                               | 380          |
| <b>&lt;T&gt;</b>                                                                    |              |
| TOTAL CONNECTION DIAGRAM.....                                                       | 193          |
| Tyco Electronics AMP D-5000 Series Connector.....                                   | 302          |
| <b>&lt;U&gt;</b>                                                                    |              |
| USE IN COMBINATION WITH THE DUAL CHECK<br>SAFETY FUNCTION.....                      | 481          |
| <b>&lt;W&gt;</b>                                                                    |              |
| Warning.....                                                                        | s-3,s-8,s-10 |
| WARNINGS AND CAUTIONS RELATING TO A<br>PILOT RUN .....                              | s-8          |
| WARNINGS AND CAUTIONS RELATING TO<br>MAINTENANCE .....                              | s-10         |
| WARNINGS AND CAUTIONS RELATING TO<br>MOUNTING .....                                 | s-3          |
| WEIGHT .....                                                                        | 43           |

## Revision Record

### FANUC SERVO AMPLIFIER $\alpha i$ series DESCRIPTIONS (B-65282EN)

|         |            |                                                                                                                                                                                                                                                                                                                                                |         |            |                                                                                                                                                                                                                           |
|---------|------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 05      | Mar., 2003 | <ul style="list-style-type: none"> <li>- Addition and correction of following contents in the Chapter 9 CONNECTION</li> <li>- Pulsecoder connection and cables around SPM</li> <li>- Addition of CZi sensor</li> <li>- Addition and Correction of <math>\alpha i_s, \beta i, \alpha i_P, \alpha i_T</math> series</li> </ul>                   |         |            |                                                                                                                                                                                                                           |
| 04      | Sep., 2002 | <ul style="list-style-type: none"> <li>- Addition of following chapter</li> <li>Chapter 10 SPINDLE-RELATED OPTIONS</li> <li>Chapter 11 SPINDLE-RELATED DETECTORS</li> <li>- Addition of data in the Chapter 6 HEAT DISSIPATION</li> <li>- Correction of errors</li> </ul>                                                                      |         |            |                                                                                                                                                                                                                           |
| 03      | Dec., 2001 | <ul style="list-style-type: none"> <li>- Correction of errors</li> </ul>                                                                                                                                                                                                                                                                       |         |            |                                                                                                                                                                                                                           |
| 02      | Nov., 2001 | <ul style="list-style-type: none"> <li>- Addition of <math>\alpha(HV)i</math> series Amplifier</li> <li>- Addition of PSMR(register discharge type)</li> <li>- Addition of Spindle Amplifier Module (SPMC) for <math>\alpha Ci</math> series</li> <li>- Addition of Models (PSM-55i, SPM-45/55i, SVM1-360i, SVM2-4/4i, SVM3-4/4/4i)</li> </ul> |         |            |                                                                                                                                                                                                                           |
| 01      | Apr., 2001 | _____                                                                                                                                                                                                                                                                                                                                          | 06      | Dec., 2008 | <ul style="list-style-type: none"> <li>- Changing of model names</li> <li>- Switching level-up amplifiers</li> <li>- Deletion of SPMC</li> <li>- Reflection of technical reports of edition 05 to this edition</li> </ul> |
| Edition | Date       | Contents                                                                                                                                                                                                                                                                                                                                       | Edition | Date       | Contents                                                                                                                                                                                                                  |



## **ADDITIONAL INFORMATION**



## About addition of the power cable of servo amplifier

### 1.Type of applied technical documents

|               |                                                 |
|---------------|-------------------------------------------------|
| Name          | FANUC SERVO AMPLIFIER ai series<br>DESCRIPTIONS |
| Spec.No./Ver. | B-65282EN/06                                    |

### 2.Summary of change

| Group                | Name / Outline  | New,Add<br>Correct,Del | Applicable<br>Date |
|----------------------|-----------------|------------------------|--------------------|
| Basic Function       | Add power cable | Add                    | 11-Aug-2008        |
| Optional<br>Function |                 |                        |                    |
| Unit                 |                 |                        |                    |
| Maintenance<br>Parts |                 |                        |                    |
| Notice               |                 |                        |                    |
| Correction           |                 |                        |                    |
| Another              |                 |                        |                    |

|      |          |        |               |              |                                                         |
|------|----------|--------|---------------|--------------|---------------------------------------------------------|
|      |          |        |               | TITLE        | About addition of the power<br>cable of servo amplifier |
| 01   | 08.08.11 | Hirai  | First edithon | DRAW.<br>No. | B-65282EN/06-01                                         |
| EDIT | DATE     | DESIGN | DESCRIPTION   | FANUC LTD    | Page 001/14                                             |

## 1. Outline

As a power cable of servo amplifier, the four-conductor power cable (U/V/W/G) is generally used, and the PWM noise generated by switching of the power transistor inside servo amplifier returns to the servo amplifier through a ground line, however, in case the impedance of the ground line becomes high when the power cable is long, some of PWM noise may not return through the ground line, and may affect other equipment.

Moreover, if electric connection of the motor flange and a machine is not enough, PWM noise may flow through the feedback cable of a pulse coder, and communication alarm between the servo amplifier and the pulse coder may be generated.

In these cases, an additional measure against PWM noise and an additional ground line were needed.

This time, a new cable that reduced the inductance of a ground line is prepared for the power cable of a servo amplifier. By reducing the inductance of a ground line, the PWM noise returns to the amplifier efficiently, and the risk of the malfunction by PWM noise is reduced.

## 2. Cable specification

(1) Specification (see the 4th clause about the details of specification)

| Maker<br>specification<br>(OKI<br>ELECTRIC<br>CABLE) | Cross<br>section<br>(U/V/W) | Cross<br>section<br>(Ground) | FANUC<br>specification | Rating             | Standard<br>length |
|------------------------------------------------------|-----------------------------|------------------------------|------------------------|--------------------|--------------------|
| SYM3X0.75SQ                                          | 0.75 mm <sup>2</sup>        | 0.25mm <sup>2</sup> x3       | A66L-0001-0607         | 105 degrees / 600V | 100m               |
| SYM3X1.25SQ                                          | 1.25 mm <sup>2</sup>        | 0.43mm <sup>2</sup> x3       | A66L-0001-0608         | 105 degrees / 600V | 100m               |
| SYM3X2SQ                                             | 2.0 mm <sup>2</sup>         | 0.75mm <sup>2</sup> x3       | A66L-0001-0609         | 105 degrees / 600V | 100m               |
| SYM3X3.5SQ                                           | 3.5 mm <sup>2</sup>         | 1.25mm <sup>2</sup> x3       | A66L-0001-0610         | 105 degrees / 600V | 100m               |
| SYM3X5.5SQ                                           | 5.5 mm <sup>2</sup>         | 2.0mm <sup>2</sup> x3        | A66L-0001-0611         | 105 degrees / 600V | 100m               |
| SYM3X8SQ                                             | 8 mm <sup>2</sup>           | 2.7mm <sup>2</sup> x3        | A66L-0001-0612         | 105 degrees / 600V | 100m               |

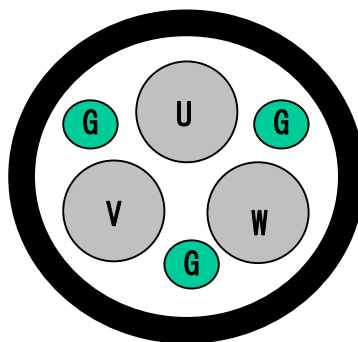


Fig. 1 Structure outline of cable

|      |      |        |             |              |                                                      |      |        |
|------|------|--------|-------------|--------------|------------------------------------------------------|------|--------|
|      |      |        |             | TITLE        | About addition of the power cable of servo amplifier |      |        |
|      |      |        |             |              |                                                      |      |        |
|      |      |        |             | DRAW.<br>No. | B-65282EN/06-01                                      |      |        |
| EDIT | DATE | DESIGN | DESCRIPTION | FANUC LTD    |                                                      | Page | 002/14 |



3. The method of creating cable

The procedure of creating cable is shown below.

3.1 Processing of Cable by the side of Servo Amplifier

(1) When the power line is connected by a connector

Please refer to B-65282JA/05 "FANUC SERVO AMPLIFIER alpha i series description" about the connector to servo amplifier.


Please refer to B-65262JA/03 "FANUC AC SERVO MOTOR alpha iS / alpha I series description." about the connector to motor.

① Crimp U/V/W line


Please crimp contact as the usual power line.

② Crimp ground line

(a) Put three ground lines together, and cover it with a heat contraction tube showing a ground line color.

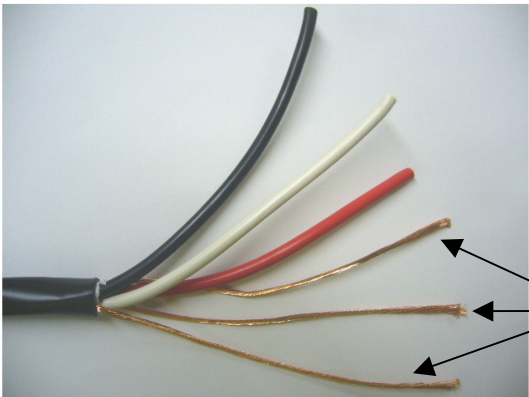


Three ground lines (with no cover)

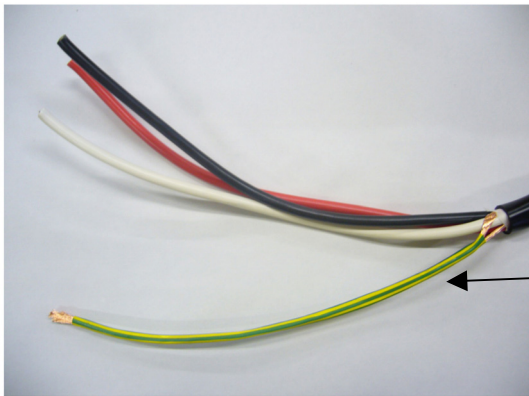

Cover with a heat contraction tube showing a ground line color


|      |      |        |             |           |                                                      |      |        |
|------|------|--------|-------------|-----------|------------------------------------------------------|------|--------|
|      |      |        |             | TITLE     | About addition of the power cable of servo amplifier |      |        |
|      |      |        |             |           |                                                      |      |        |
|      |      |        |             | DRAW. No. | B-65282EN/06-01                                      |      |        |
| EDIT | DATE | DESIGN | DESCRIPTION | FANUC LTD |                                                      | Page | 003/14 |

(b) Protect the exposed wire by the flame-retardant tape or a heat contraction tube.  
The tape or tube needs to be 105 degrees heat-resistant and be 94-V0 flame-retardant.

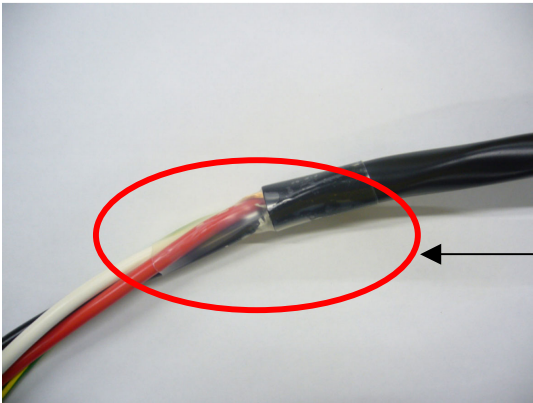


Cover with a flame-retardant tape or a heat contraction tube.

(c) Bind a flame-retardant tape around the part that a crimp contact presses down.  
Because this cable does not have sheath of the ground line and a wire may be cut by a crimp contact, please be sure to protect it by a flame-retardant tape.  
Since the temperature of power line becomes high, a flame-retardant tape should be used.

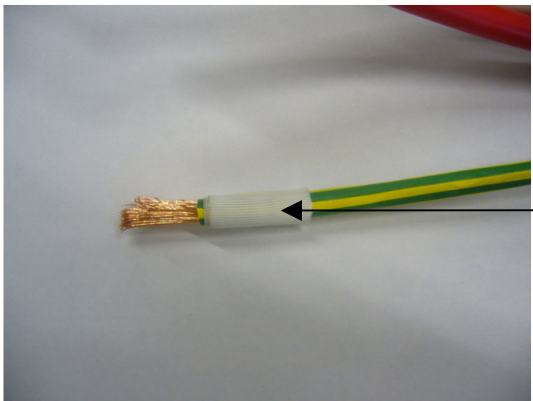

Because a wire may be cut by a crimp contact, please bind a flame-retardant tape around.

③ Insertion into housing  
Please insert the crimped contact into housing.

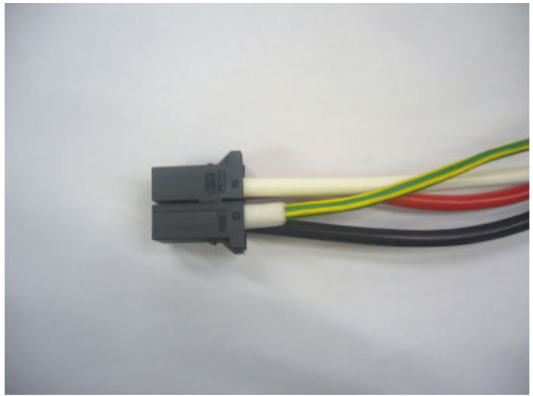

|      |      |        |             |           |                                                      |      |        |
|------|------|--------|-------------|-----------|------------------------------------------------------|------|--------|
|      |      |        |             | TITLE     | About addition of the power cable of servo amplifier |      |        |
|      |      |        |             |           |                                                      |      |        |
|      |      |        |             | DRAW. No. | B-65282EN/06-01                                      |      |        |
| EDIT | DATE | DESIGN | DESCRIPTION | FANUC LTD |                                                      | Page | 004/14 |


(2) When the power line is connected on a terminal block

④ Crimp U/V/W line

Please crimp contact as the usual power line.


① Crimp ground line

(a) Put three ground lines together, and cover it with a heat contraction tube showing a ground line color.

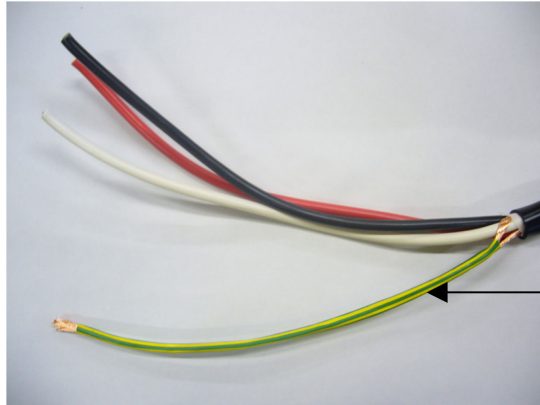


Cover with a heat contraction tube showing a ground line color

(b) Protect the exposed wire by the flame-retardant tape or a heat contraction tube. The tape or tube needs to be 105 degrees heat-resistant and be 94-V0 flame-retardant.

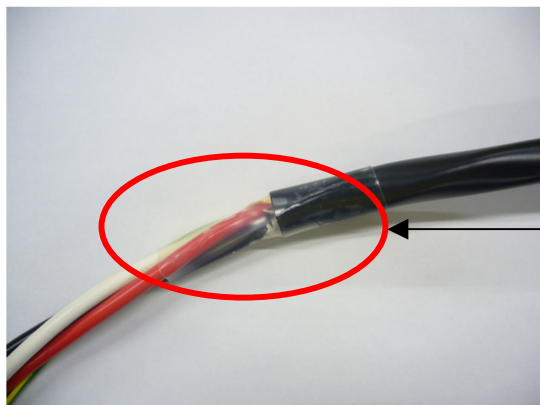

Cover with a flame-retardant tape or a heat contraction tube.

(c) Crimp three ground lines together with one crimp contact.

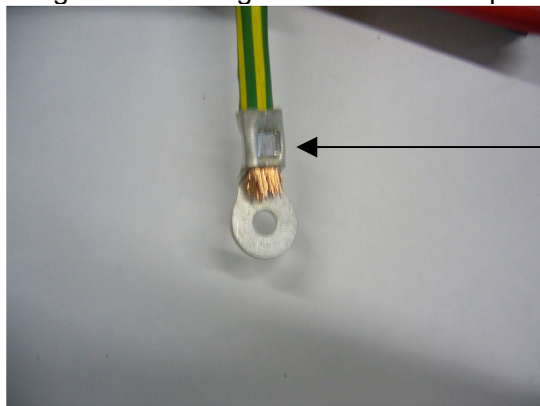

Crimp three ground lines together

|      |      |        |             |           |                                                      |      |        |
|------|------|--------|-------------|-----------|------------------------------------------------------|------|--------|
|      |      |        |             | TITLE     | About addition of the power cable of servo amplifier |      |        |
|      |      |        |             | DRAW. No. | B-65282EN/06-01                                      |      |        |
| EDIT | DATE | DESIGN | DESCRIPTION | FANUC LTD |                                                      | Page | 005/14 |


3.2 Processing of Cable by the side of motor

(1) In the case of a plug connector

(1) Soldering of U/V/W line  
Solder U/V/W line as it is.


(2) Soldering of ground line

(a) Put three ground lines together, and cover it with a heat contraction tube.

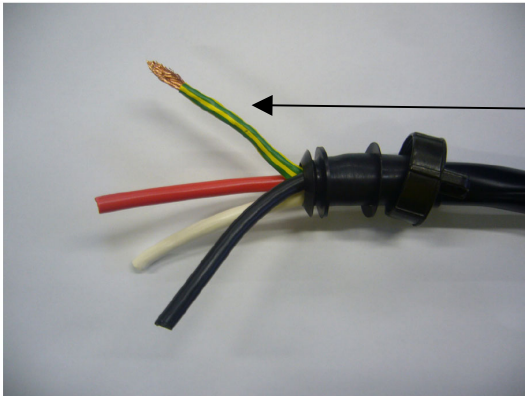

Put three lines together, and cover it with a heat contraction tube.

(b) Solder the ground line and a connector, and cover the soldered part with a heat contraction tube or flame-retardant tube.

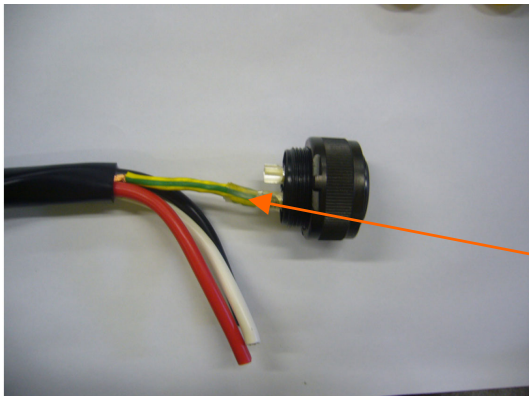

Solder a connector and cover the soldered part with a heat contraction tube

(3) Attach a case.



|      |      |        |             |           |                                                      |      |        |
|------|------|--------|-------------|-----------|------------------------------------------------------|------|--------|
|      |      |        |             | TITLE     | About addition of the power cable of servo amplifier |      |        |
|      |      |        |             |           |                                                      |      |        |
|      |      |        |             | DRAW. No. | B-65282EN/06-01                                      |      |        |
| EDIT | DATE | DESIGN | DESCRIPTION | FANUC LTD |                                                      | Page | 006/14 |


(2) In the case of the connector of dynamic series

① Crimp U/V/W line


Please crimp contact as the usual power line.

(2) Crimp ground line

(a) Put three ground lines together, and cover it with a heat contraction tube showing a ground line color.

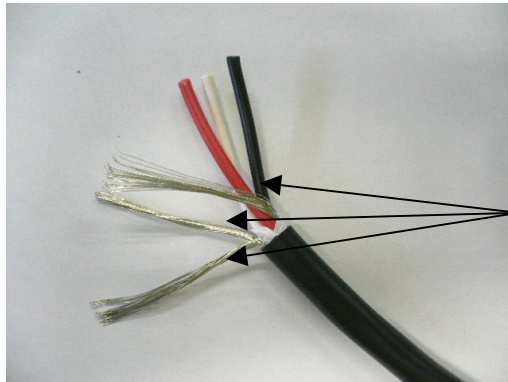


Three ground lines (with no cover)

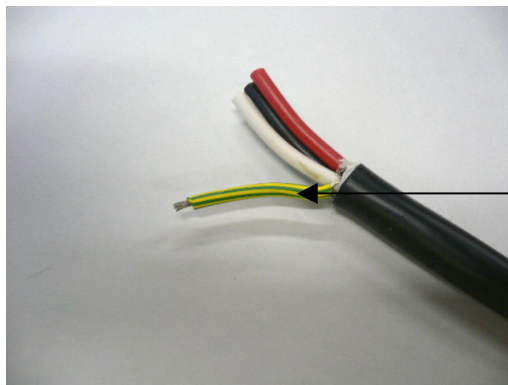

Cover with a heat contraction tube showing a ground line color

(b) Protect the exposed wire by the flame-retardant tape or a heat contraction tube.

The tape or tube needs to be 105 degrees heat-resistant and be 94-V0 flame-retardant.

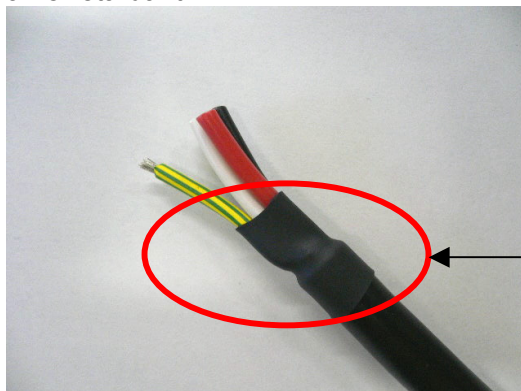


Cover with a flame-retardant tape or a heat contraction tube.

|      |      |        |             |           |                                                      |      |        |
|------|------|--------|-------------|-----------|------------------------------------------------------|------|--------|
|      |      |        |             | TITLE     | About addition of the power cable of servo amplifier |      |        |
|      |      |        |             | DRAW. No. | B-65282EN/06-01                                      |      |        |
| EDIT | DATE | DESIGN | DESCRIPTION | FANUC LTD |                                                      | Page | 007/14 |




(c) Bind a flame-retardant tape around the part that a crimp contact presses down.  
Because this cable does not have cover of the ground line and a wire may be cut by a crimp contact, please be sure to protect it by a flame-retardant tape.  
Since the temperature of power line becomes high, a flame-retardant tape should be used.

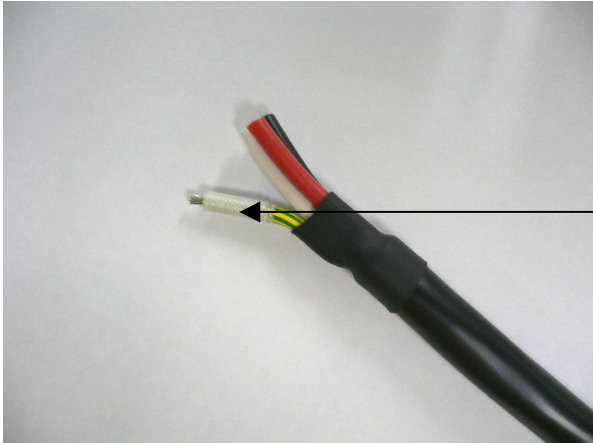


Because a wire may be cut by a crimp contact, please bind a flame-retardant tape around.

(d) Crimp a contact

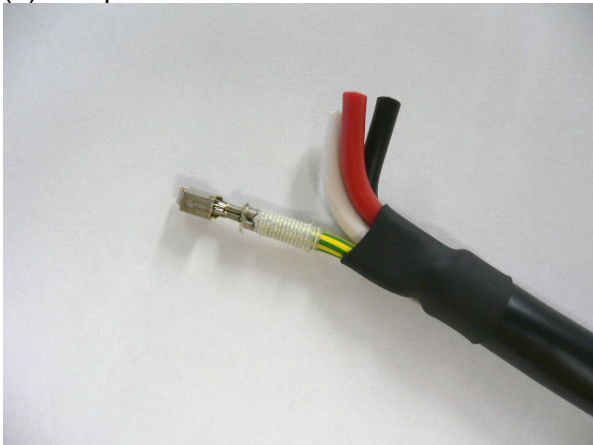

(e) Insert into housing

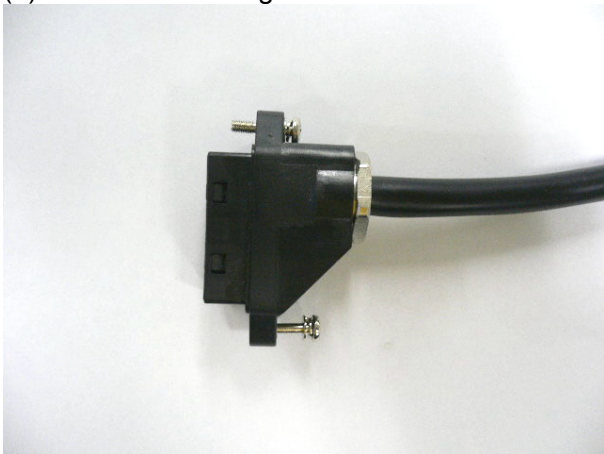

|      |      |        |             |           |                                                      |      |        |
|------|------|--------|-------------|-----------|------------------------------------------------------|------|--------|
|      |      |        |             | TITLE     | About addition of the power cable of servo amplifier |      |        |
|      |      |        |             |           |                                                      |      |        |
|      |      |        |             | DRAW. No. | B-65282EN/06-01                                      |      |        |
| EDIT | DATE | DESIGN | DESCRIPTION | FANUC LTD |                                                      | Page | 008/14 |

#### 4. Cable specification details

##### (1) SYM 3X0.75SQ

| Item                                          |                                 | Specifications                                                                                                                                                                                                                                                                                                  |                                  |
|-----------------------------------------------|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------|
| Core wire classification                      |                                 | Power line                                                                                                                                                                                                                                                                                                      | Ground line                      |
| Nominal cross-section area (mm <sup>2</sup> ) |                                 | 0.75                                                                                                                                                                                                                                                                                                            | 0.25                             |
| Conductor                                     | Material                        | Stranded wire of annealed copper                                                                                                                                                                                                                                                                                | Stranded wire of annealed copper |
|                                               | Structure (conductors/mm)       | 30/0.18                                                                                                                                                                                                                                                                                                         | 10/0.18                          |
|                                               | Size (mm)                       | 1.2                                                                                                                                                                                                                                                                                                             | 0.66                             |
| Insulator                                     | Material                        | Heat-resistant PVC                                                                                                                                                                                                                                                                                              |                                  |
|                                               | Color                           | Red, white, black                                                                                                                                                                                                                                                                                               |                                  |
|                                               | Thickness (mm)                  | 0.81                                                                                                                                                                                                                                                                                                            |                                  |
|                                               | Outside diameter (mm)           | 2.82                                                                                                                                                                                                                                                                                                            |                                  |
| Lay                                           | Structure                       | See Fig.2                                                                                                                                                                                                                                                                                                       |                                  |
|                                               | Binder tape                     | Plastics tape                                                                                                                                                                                                                                                                                                   |                                  |
| Sheath                                        | Material                        | Heat-resistant, oilproof PVC                                                                                                                                                                                                                                                                                    |                                  |
|                                               | Color                           | Black                                                                                                                                                                                                                                                                                                           |                                  |
|                                               | Display                         | OKI ELECTRIC CABLE AWG19  AWM 2501 105°C 600V VW-1 SYM 3×0.75SQ<br>or<br>OKI ELECTRIC CABLE(G) AWG19  AWM 2501 105°C 600V VW-1 SYM 3×0.75SQ |                                  |
|                                               | Outside diameter (mm)           | 10.3                                                                                                                                                                                                                                                                                                            |                                  |
|                                               |                                 |                                                                                                                                                                                                                                                                                                                 |                                  |
| Finished product                              | Length (m)                      | 100                                                                                                                                                                                                                                                                                                             |                                  |
|                                               | Packing method                  | Bundle                                                                                                                                                                                                                                                                                                          |                                  |
|                                               | Estimated weight (kg/km)        | 115                                                                                                                                                                                                                                                                                                             |                                  |
| Electrical performance                        | Conductor resistance (ohm/km)   | 24.4 or less (20 degrees)                                                                                                                                                                                                                                                                                       | 73.4 or less (20 degrees)        |
|                                               | Insulation resistance (Mohm/km) | 10 or more (20 degrees)                                                                                                                                                                                                                                                                                         | -                                |
|                                               | Dielectric strength (V-min)     | 2000VAC                                                                                                                                                                                                                                                                                                         | -                                |
|                                               | Inductance (uH/m)               | Standard                                                                                                                                                                                                                                                                                                        | 0.31                             |
|                                               | Capacitance (pF/m)              | Standard                                                                                                                                                                                                                                                                                                        | 100                              |

|      |      |        |             |           |                                                      |      |        |
|------|------|--------|-------------|-----------|------------------------------------------------------|------|--------|
|      |      |        |             | TITLE     | About addition of the power cable of servo amplifier |      |        |
|      |      |        |             |           |                                                      |      |        |
|      |      |        |             | DRAW. No. | B-65282EN/06-01                                      |      |        |
| EDIT | DATE | DESIGN | DESCRIPTION | FANUC LTD |                                                      | Page | 009/14 |

## (2) SYM 3X1.25SQ

| Item                                          |                                 | Specifications                                                                                                                                                                                                                                                                                                   |                                  |
|-----------------------------------------------|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------|
| Core wire classification                      |                                 | Power line                                                                                                                                                                                                                                                                                                       | Ground line                      |
| Nominal cross-section area (mm <sup>2</sup> ) |                                 | 1.25                                                                                                                                                                                                                                                                                                             | 0.43                             |
| Conductor                                     | Material                        | Stranded wire of annealed copper                                                                                                                                                                                                                                                                                 | Stranded wire of annealed copper |
|                                               | Structure (conductors/mm)       | 50/0.18                                                                                                                                                                                                                                                                                                          | 17/0.18                          |
|                                               | Size (mm)                       | 1.5                                                                                                                                                                                                                                                                                                              | 0.86                             |
| Insulator                                     | Material                        | Heat-resistant PVC                                                                                                                                                                                                                                                                                               |                                  |
|                                               | Color                           | Red, white, black                                                                                                                                                                                                                                                                                                |                                  |
|                                               | Thickness (mm)                  | 0.81                                                                                                                                                                                                                                                                                                             |                                  |
|                                               | Outside diameter (mm)           | 3.12                                                                                                                                                                                                                                                                                                             |                                  |
| Lay                                           | Structure                       | See Fig.2.                                                                                                                                                                                                                                                                                                       |                                  |
|                                               | Binder tape                     | Plastics tape                                                                                                                                                                                                                                                                                                    |                                  |
| Sheath                                        | Material                        | Heat-resistant, oilproof PVC                                                                                                                                                                                                                                                                                     |                                  |
|                                               | Color                           | Black                                                                                                                                                                                                                                                                                                            |                                  |
|                                               | Display                         | OKI ELECTRIC CABLE AWG19  AWM 2501 105°C 600V VW-1 SYM 3×1.25SQ<br>or<br>OKI ELECTRIC CABLE(G) AWG19  AWM 2501 105°C 600V VW-1 SYM 3×1.25SQ |                                  |
|                                               | Outside diameter (mm)           | 11.0                                                                                                                                                                                                                                                                                                             |                                  |
| Finished product                              | Length (m)                      | 100                                                                                                                                                                                                                                                                                                              |                                  |
|                                               | Packing method                  | Bundle                                                                                                                                                                                                                                                                                                           |                                  |
|                                               | Estimated weight (kg/km)        | 140                                                                                                                                                                                                                                                                                                              |                                  |
| Electrical performance                        | Conductor resistance (ohm/km)   | 14.7 or less (20 degrees)                                                                                                                                                                                                                                                                                        | 43.2 or less (20 degrees)        |
|                                               | Insulation resistance (Mohm/km) | 10 or more (20 degrees)                                                                                                                                                                                                                                                                                          | -                                |
|                                               | Dielectric strength (V-min)     | 2000VAC                                                                                                                                                                                                                                                                                                          | -                                |
|                                               | Inductance (uH/m)               | Standard 0.28                                                                                                                                                                                                                                                                                                    |                                  |
|                                               | Capacitance (pF/m)              | Standard 110                                                                                                                                                                                                                                                                                                     |                                  |

|      |      |        |             |           |                                                      |      |        |
|------|------|--------|-------------|-----------|------------------------------------------------------|------|--------|
|      |      |        |             | TITLE     | About addition of the power cable of servo amplifier |      |        |
|      |      |        |             |           |                                                      |      |        |
|      |      |        |             | DRAW. No. | B-65282EN/06-01                                      |      |        |
| EDIT | DATE | DESIGN | DESCRIPTION | FANUC LTD |                                                      | Page | 010/14 |



## (3) SYM 3X2SQ

| Item                                          |                                 | Specifications                                                                                                                                                                                                                                                                                             |                                  |
|-----------------------------------------------|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------|
| Core wire classification                      |                                 | Power line                                                                                                                                                                                                                                                                                                 | Ground line                      |
| Nominal cross-section area (mm <sup>2</sup> ) |                                 | 2.0                                                                                                                                                                                                                                                                                                        | 0.75                             |
| Conductor                                     | Material                        | Stranded wire of annealed copper                                                                                                                                                                                                                                                                           | Stranded wire of annealed copper |
|                                               | Structure (conductors/mm)       | 37/0.26                                                                                                                                                                                                                                                                                                    | 30/0.18                          |
|                                               | Size (mm)                       | 1.8                                                                                                                                                                                                                                                                                                        | 1.2                              |
| Insulator                                     | Material                        | Heat-resistant PVC                                                                                                                                                                                                                                                                                         |                                  |
|                                               | Color                           | Red, white, black                                                                                                                                                                                                                                                                                          |                                  |
|                                               | Thickness (mm)                  | 0.81                                                                                                                                                                                                                                                                                                       |                                  |
|                                               | Outside diameter (mm)           | 3.42                                                                                                                                                                                                                                                                                                       |                                  |
| Lay                                           | Structure                       | See Fig.2                                                                                                                                                                                                                                                                                                  |                                  |
|                                               | Binder tape                     | Plastics tape                                                                                                                                                                                                                                                                                              |                                  |
| Sheath                                        | Material                        | Heat-resistant, oilproof PVC                                                                                                                                                                                                                                                                               |                                  |
|                                               | Color                           | Black                                                                                                                                                                                                                                                                                                      |                                  |
|                                               | Display                         | OKI ELECTRIC CABLE AWG19  AWM 2501 105°C 600V VW-1 SYM 3×2SQ<br>or<br>OKI ELECTRIC CABLE(G) AWG19  AWM 2501 105°C 600V VW-1 SYM 3×2SQ |                                  |
|                                               | Outside diameter (mm)           | 11.6                                                                                                                                                                                                                                                                                                       |                                  |
|                                               |                                 |                                                                                                                                                                                                                                                                                                            |                                  |
| Finished product                              | Length (m)                      | 100                                                                                                                                                                                                                                                                                                        |                                  |
|                                               | Packing method                  | Bundle                                                                                                                                                                                                                                                                                                     |                                  |
|                                               | Estimated weight (kg/km)        | 180                                                                                                                                                                                                                                                                                                        |                                  |
| Electrical performance                        | Conductor resistance (ohm/km)   | 9.5 or less (20 degrees)                                                                                                                                                                                                                                                                                   | 24.4 or less (20 degrees)        |
|                                               | Insulation resistance (Mohm/km) | Ten or more (20 degrees)                                                                                                                                                                                                                                                                                   | -                                |
|                                               | Dielectric strength (V-min)     | 2000VAC                                                                                                                                                                                                                                                                                                    | -                                |
|                                               | Inductance (uH/m)               | Standard                                                                                                                                                                                                                                                                                                   | 0.25                             |
|                                               | Capacitance (pf/m)              | Standard                                                                                                                                                                                                                                                                                                   | 130                              |

|      |      |        |             |           |                                                      |      |        |
|------|------|--------|-------------|-----------|------------------------------------------------------|------|--------|
|      |      |        |             | TITLE     | About addition of the power cable of servo amplifier |      |        |
|      |      |        |             |           |                                                      |      |        |
|      |      |        |             | DRAW. No. | B-65282EN/06-01                                      |      |        |
| EDIT | DATE | DESIGN | DESCRIPTION | FANUC LTD |                                                      | Page | 011/14 |

## (4) SYM 3X3.5SQ

| Item                                          |                                 | Specifications                                                                                                                                                                                                                                                                                                 |                                  |
|-----------------------------------------------|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------|
| Core wire classification                      |                                 | Power line                                                                                                                                                                                                                                                                                                     | Ground line                      |
| Nominal cross-section area (mm <sup>2</sup> ) |                                 | 3.5                                                                                                                                                                                                                                                                                                            | 1.25                             |
| Conductor                                     | Material                        | Stranded wire of annealed copper                                                                                                                                                                                                                                                                               | Stranded wire of annealed copper |
|                                               | Structure (conductors/mm)       | 45/0.32                                                                                                                                                                                                                                                                                                        | 50/0.18                          |
|                                               | Size (mm)                       | 2.6                                                                                                                                                                                                                                                                                                            | 1.5                              |
| Insulator                                     | Material                        | Heat-resistant PVC                                                                                                                                                                                                                                                                                             |                                  |
|                                               | Color                           | Red, white, black                                                                                                                                                                                                                                                                                              |                                  |
|                                               | Thickness (mm)                  | 0.81                                                                                                                                                                                                                                                                                                           |                                  |
|                                               | Outside diameter (mm)           | 4.22                                                                                                                                                                                                                                                                                                           |                                  |
| Lay                                           | Structure                       | See Fig.2                                                                                                                                                                                                                                                                                                      |                                  |
|                                               | Binder tape                     | Plastics tape                                                                                                                                                                                                                                                                                                  |                                  |
| Sheath                                        | Material                        | Heat-resistant, oilproof PVC                                                                                                                                                                                                                                                                                   |                                  |
|                                               | Color                           | Black                                                                                                                                                                                                                                                                                                          |                                  |
|                                               | Display                         | OKI ELECTRIC CABLE AWG19  AWM 2501 105°C 600V VW-1 SYM 3×3.5SQ<br>or<br>OKI ELECTRIC CABLE(G) AWG19  AWM 2501 105°C 600V VW-1 SYM 3×3.5SQ |                                  |
|                                               | Outside diameter (mm)           | 13.2                                                                                                                                                                                                                                                                                                           |                                  |
|                                               |                                 |                                                                                                                                                                                                                                                                                                                |                                  |
| Finished product                              | Length (m)                      | 100                                                                                                                                                                                                                                                                                                            |                                  |
|                                               | Packing method                  | Drum                                                                                                                                                                                                                                                                                                           |                                  |
|                                               | Estimated weight (kg/km)        | 350                                                                                                                                                                                                                                                                                                            |                                  |
| Electrical performance                        | Conductor resistance (ohm/km)   | 5.1 or less (20 degrees)                                                                                                                                                                                                                                                                                       | 14.7 or less (20 degrees)        |
|                                               | Insulation resistance (Mohm/km) | 10 or more (20 degrees)                                                                                                                                                                                                                                                                                        | -                                |
|                                               | Dielectric strength (V-min)     | 2000VAC                                                                                                                                                                                                                                                                                                        | -                                |
|                                               | Inductance (uH/m)               | Standard                                                                                                                                                                                                                                                                                                       | 0.24                             |
|                                               | Capacitance (pf/m)              | Standard                                                                                                                                                                                                                                                                                                       | 160                              |

|      |      |        |             |           |                                                      |      |        |
|------|------|--------|-------------|-----------|------------------------------------------------------|------|--------|
|      |      |        |             | TITLE     | About addition of the power cable of servo amplifier |      |        |
|      |      |        |             |           |                                                      |      |        |
|      |      |        |             | DRAW. No. | B-65282EN/06-01                                      |      |        |
| EDIT | DATE | DESIGN | DESCRIPTION | FANUC LTD |                                                      | Page | 012/14 |

## (5) SYM 3X5.5SQ

| Item                                          |                                 | Specifications                                                                                                                                                                                                                                                                                                 |                                  |
|-----------------------------------------------|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------|
| Core wire classification                      |                                 | Power line                                                                                                                                                                                                                                                                                                     | Ground line                      |
| Nominal cross-section area (mm <sup>2</sup> ) |                                 | 5.5                                                                                                                                                                                                                                                                                                            | 2.0                              |
| Conductor                                     | Material                        | Stranded wire of annealed copper                                                                                                                                                                                                                                                                               | Stranded wire of annealed copper |
|                                               | Structure (conductors/mm)       | 70/0.32                                                                                                                                                                                                                                                                                                        | 37/0.26                          |
|                                               | Size (mm)                       | 3.1                                                                                                                                                                                                                                                                                                            | 1.8                              |
| Insulator                                     | Material                        | Heat-resistant PVC                                                                                                                                                                                                                                                                                             |                                  |
|                                               | Color                           | Red, white, black                                                                                                                                                                                                                                                                                              |                                  |
|                                               | Thickness (mm)                  | 1.0                                                                                                                                                                                                                                                                                                            |                                  |
|                                               | Outside diameter (mm)           | 5.1                                                                                                                                                                                                                                                                                                            |                                  |
| Lay                                           | Structure                       | See Fig.2                                                                                                                                                                                                                                                                                                      |                                  |
|                                               | Binder tape                     | Plastics tape                                                                                                                                                                                                                                                                                                  |                                  |
| Sheath                                        | Material                        | Heat-resistant, oilproof PVC                                                                                                                                                                                                                                                                                   |                                  |
|                                               | Color                           | Black                                                                                                                                                                                                                                                                                                          |                                  |
|                                               | Display                         | OKI ELECTRIC CABLE AWG19  AWM 2501 105°C 600V VW-1 SYM 3×5.5SQ<br>or<br>OKI ELECTRIC CABLE(G) AWG19  AWM 2501 105°C 600V VW-1 SYM 3×5.5SQ |                                  |
|                                               | Outside diameter (mm)           | 15.2                                                                                                                                                                                                                                                                                                           |                                  |
|                                               |                                 |                                                                                                                                                                                                                                                                                                                |                                  |
| Finished product                              | Length (m)                      | 100                                                                                                                                                                                                                                                                                                            |                                  |
|                                               | Packing method                  | Drum                                                                                                                                                                                                                                                                                                           |                                  |
|                                               | Estimated weight (kg/km)        | 520                                                                                                                                                                                                                                                                                                            |                                  |
| Electrical performance                        | Conductor resistance (Ohm/km)   | 3.4 or less (20 degrees)                                                                                                                                                                                                                                                                                       | 9.5 or less (20 degrees)         |
|                                               | Insulation resistance (Mohm/km) | 10 or more (20 degrees)                                                                                                                                                                                                                                                                                        | -                                |
|                                               | Dielectric strength (V-min)     | 2000VAC                                                                                                                                                                                                                                                                                                        | -                                |
|                                               | Inductance (uH/m)               | Standard                                                                                                                                                                                                                                                                                                       | 0.24                             |
|                                               | Capacitance (pF/m)              | Standard                                                                                                                                                                                                                                                                                                       | 160                              |

|      |      |        |             |           |                                                      |      |        |
|------|------|--------|-------------|-----------|------------------------------------------------------|------|--------|
|      |      |        |             | TITLE     | About addition of the power cable of servo amplifier |      |        |
|      |      |        |             |           |                                                      |      |        |
|      |      |        |             | DRAW. No. | B-65282EN/06-01                                      |      |        |
| EDIT | DATE | DESIGN | DESCRIPTION | FANUC LTD |                                                      | Page | 013/14 |

## (6) SYM 3X8SQ

| Item                                          |                                 | Specifications                                                                                                                                                                                                                                                                                             |                                  |
|-----------------------------------------------|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------|
| Core wire classification                      |                                 | Power line                                                                                                                                                                                                                                                                                                 | Ground line                      |
| Nominal cross-section area (mm <sup>2</sup> ) |                                 | 8.0                                                                                                                                                                                                                                                                                                        | 2.7                              |
| Conductor                                     | Material                        | Stranded wire of annealed copper                                                                                                                                                                                                                                                                           | Stranded wire of annealed copper |
|                                               | Structure (conductors/mm)       | 50/0.45                                                                                                                                                                                                                                                                                                    | 50/0.26                          |
|                                               | Size (mm)                       | 3.7                                                                                                                                                                                                                                                                                                        | 2.1                              |
| Insulator                                     | Material                        | Heat-resistant PVC                                                                                                                                                                                                                                                                                         |                                  |
|                                               | Color                           | Red, white, black                                                                                                                                                                                                                                                                                          |                                  |
|                                               | Thickness (mm)                  | 1.2                                                                                                                                                                                                                                                                                                        |                                  |
|                                               | Outside diameter (mm)           | 6.1                                                                                                                                                                                                                                                                                                        |                                  |
| Lay                                           | Structure                       | See Fig.2                                                                                                                                                                                                                                                                                                  |                                  |
|                                               | Binder tape                     | Plastics tape                                                                                                                                                                                                                                                                                              |                                  |
| Sheath                                        | Material                        | Heat-resistant, oilproof PVC                                                                                                                                                                                                                                                                               |                                  |
|                                               | Color                           | Black                                                                                                                                                                                                                                                                                                      |                                  |
|                                               | Display                         | OKI ELECTRIC CABLE AWG19  AWM 2501 105°C 600V VW-1 SYM 3×8SQ<br>or<br>OKI ELECTRIC CABLE(G) AWG19  AWM 2501 105°C 600V VW-1 SYM 3×8SQ |                                  |
|                                               | Outline diameter (mm)           | 17.6                                                                                                                                                                                                                                                                                                       |                                  |
|                                               |                                 |                                                                                                                                                                                                                                                                                                            |                                  |
| Finished product                              | Length (m)                      | 100                                                                                                                                                                                                                                                                                                        |                                  |
|                                               | Packing method                  | Drum                                                                                                                                                                                                                                                                                                       |                                  |
|                                               | Estimated weight (kg/km)        | 650                                                                                                                                                                                                                                                                                                        |                                  |
| Electrical performance                        | Conductor resistance (ohm/km)   | 2.4 or less (20 degrees)                                                                                                                                                                                                                                                                                   | 7.1 or less (20 degrees)         |
|                                               | Insulation resistance (Mohm/km) | 10 or more (20 degrees)                                                                                                                                                                                                                                                                                    | -                                |
|                                               | Dielectric strength (V-min)     | 2000VAC                                                                                                                                                                                                                                                                                                    | -                                |
|                                               | Inductance (uH/m)               | Standard                                                                                                                                                                                                                                                                                                   | 0.24                             |
|                                               | Capacitance (pF/m)              | Standard                                                                                                                                                                                                                                                                                                   | 160                              |

|      |      |        |             |           |                                                      |      |        |
|------|------|--------|-------------|-----------|------------------------------------------------------|------|--------|
|      |      |        |             | TITLE     | About addition of the power cable of servo amplifier |      |        |
|      |      |        |             |           |                                                      |      |        |
|      |      |        |             | DRAW. No. | B-65282EN/06-01                                      |      |        |
| EDIT | DATE | DESIGN | DESCRIPTION | FANUC LTD |                                                      | Page | 014/14 |

|                                         |
|-----------------------------------------|
| Energy Charge Module (ECM) DESCRIPTIONS |
|-----------------------------------------|

1. Type of applied documents

|                |                                                      |
|----------------|------------------------------------------------------|
| Name           | FANUC SERVO AMPLIFIER $\alpha$ i series DESCRIPTIONS |
| Spec. No./Ver. | B-65282EN/06-02                                      |

2. Summary of Change

| Group                | Name / Outline                             | New, Add<br>Correct, Del | Applicable<br>Date |
|----------------------|--------------------------------------------|--------------------------|--------------------|
| Basic Function       |                                            |                          |                    |
| Optional<br>Function | Energy Charge Module (ECM)<br>DESCRIPTIONS | New                      | 2008.10            |
| Unit                 |                                            |                          |                    |
| Maintenance<br>Parts |                                            |                          |                    |
| Notice               |                                            |                          |                    |
| Correction           |                                            |                          |                    |
| Another              |                                            |                          |                    |

|       |          |        |             |                                   |                                 |
|-------|----------|--------|-------------|-----------------------------------|---------------------------------|
|       |          |        |             | TITLE                             |                                 |
|       |          |        |             | Energy Charge Module DESCRIPTIONS |                                 |
| 01    | 08.10.27 | Yamada | NEW ADDED   | Yamada                            | DRAW. NO. B-65282EN/06-02 CUST. |
| EDIT. | DATE     | DESIG. | DESCRIPTION |                                   | FANUC LTD SHEET 1 / 3 6         |

- No part of this manual may be reproduced in any form.
- All specifications and designs are subject to change without notice.

- The instructions for use of Energy Charge Module are the same as that of Servo amplifier.
- Energy Charge Module should be used according to "Safety Precautions" described in the FANUC SERVO AMPLIFIER  $\alpha$  i series DESCRIPTIONS B-65282EN.
- Users should also read the relevant description in this manual to become fully familiar with the functions of ECM.

The products in this manual are controlled based on Japan's "Foreign Exchange and Foreign Trade Law". The export from Japan may be subject to an export license by the government of Japan.

Further, re-export to another country may be subject to the license of the government of the country from where the product is re-exported. Furthermore, the product may also be controlled by re-export regulations of the United States government.

Should you wish to export or re-export these products, please contact FANUC for advice.

In this manual we have tried as much as possible to describe all the various matters.

However, we cannot describe all the matters which must not be done, or which cannot be done, because there are so many possibilities.

Therefore, matters which are not especially described as possible in this manual should be regarded as "impossible".

- When an abnormality occurs such as an alarm or a hardware failure, the operations described in the specifications are not guaranteed unless otherwise specifically noted. About a measure to abnormality, when there is a definite description, please correspond according to the description, and when there is not a description, ask our company for the measure to abnormality.
- The signals and functions described in the specifications cannot be used separately for safety functions to protect the operator from machine hazards unless otherwise they are described as being usable for the safety functions. Since it is the specification that does not expect using those signals and functions as the safety functions, there is a possibility of causing unexpected hazards. If you plan to use such signals or functions for safety functions, please contact FANUC.
- An incorrect device connection or setting may lead to an unpredictable operation. When starting to operate the machine for the first time after assembling the machine, replacing components, or modifying parameter settings, exercise the greatest care.

|       |      |        |             |                                   |               |
|-------|------|--------|-------------|-----------------------------------|---------------|
|       |      |        |             | TITLE                             |               |
|       |      |        |             | Energy Charge Module DESCRIPTIONS |               |
|       |      |        |             | DRAW. NO. B-65282EN/06-02         | CUST.         |
| EDIT. | DATE | DESIG. | DESCRIPTION | FANUC LTD                         | SHEET 2 / 3 6 |

 **WARNING**

Protection against electric shock

(1) Protection against direct contact with charged parts

This amplifier must be installed in a power magnetics cabinet. The power magnetics cabinet must be equipped with a lock so that when the power to the amplifier is on, the power magnetics cabinet cannot be opened by persons except special maintenance personnel or persons authorized to do maintenance work who have been sufficiently trained in prevention of electric shock.

If the operator of the machine needs to open the power magnetics cabinet for some operations, the operator must be given thorough safety training, or a protection cover must be provided to prevent the operator from touching the amplifier.

(2) Confirmation of discharge of the electrolytic capacitor (UL508C 21)

This amplifier includes a large-capacity electrolytic capacitor for the power smoothing circuit. Even after the power supply input circuit is shut off, this capacitor remains charged for a while.

When it becomes necessary to touch the amplifier to do maintenance work or for other purposes, wait until the discharge time indicated on the face plate of the amplifier is passed, or start work after ensuring safety by measuring the residual voltage of the DC link section with a volt-ohm meter and checking that the LED (red) indicating charging is turned off.

(3) Isolation of the terminal of the cable

The terminals of the cables that connect to the equipment should be covered by the isolation tube etc., so that live parts should not be exposed.

|       |      |        |             |                                   |               |
|-------|------|--------|-------------|-----------------------------------|---------------|
|       |      |        |             | TITLE                             |               |
|       |      |        |             | Energy Charge Module DESCRIPTIONS |               |
|       |      |        |             | DRAW. NO. B-65282EN/06-02         | CUST.         |
| EDIT. | DATE | DESIG. | DESCRIPTION | FANUC LTD                         | SHEET 3 / 3 6 |

## Energy Charge Module (ECM) DESCRIPTIONS

### Table of contents

|     |                                                         |       |    |
|-----|---------------------------------------------------------|-------|----|
| 1.  | Abstract                                                | ----- | 5  |
| 2.  | Configuration and Ordering                              | ----- | 6  |
| 2.1 | Configuration                                           | ----- | 6  |
| 2.2 | Ordering number                                         | ----- | 7  |
| 3.  | Specifications                                          | ----- | 8  |
| 3.1 | Behavior of ECM                                         | ----- | 8  |
| 3.2 | Control Module                                          | ----- | 9  |
| 3.3 | Capacitor Module (For smoothing)                        | ----- | 9  |
| 3.4 | Capacitor Module (For charge)                           | ----- | 9  |
| 3.5 | Resistor Module                                         | ----- | 10 |
| 3.6 | DC Reactor                                              | ----- | 10 |
| 3.7 | Continuous output power of the motor connected to ECM   | ----- | 10 |
| 4.  | Selection                                               | ----- | 11 |
| 4.1 | The maximum instantaneous power of the machine          | ----- | 11 |
| 4.2 | Limit of the maximum instantaneous power of the machine | ----- | 12 |
| 4.3 | Selection of Capacitor Module                           | ----- | 15 |
| 4.4 | Setup of ECM                                            | ----- | 17 |
| 5.  | Functions and Interface                                 | ----- | 18 |
| 5.1 | Interfaces with Servo amplifier                         | ----- | 18 |
| 5.2 | Interfaces with PMC (I/O)                               | ----- | 19 |
| 5.3 | Alarm and status display                                | ----- | 20 |
| 6.  | Outline and Panel cut                                   | ----- | 21 |
| 6.1 | Control Module (A06B-6158-H010)                         | ----- | 23 |
| 6.2 | Capacitor Module (A06B-6158-H020)                       | ----- | 24 |
| 6.3 | Resistor Module (A06B-6158-H030)                        | ----- | 25 |
| 6.4 | DC Reactor (A06B-6158-H040)                             | ----- | 26 |
| 7.  | Connection                                              | ----- | 27 |
| 7.1 | Connection diagram                                      | ----- | 27 |
| 7.2 | Cable connection details                                | ----- | 28 |

|       |      |        |             |                                   |               |
|-------|------|--------|-------------|-----------------------------------|---------------|
|       |      |        |             | TITLE                             |               |
|       |      |        |             | Energy Charge Module DESCRIPTIONS |               |
|       |      |        |             | DRAW. NO. B-65282EN/06-02         | CUST.         |
| EDIT. | DATE | DESIG. | DESCRIPTION | FANUC LTD                         | SHEET 4 / 3 6 |




## 1. Abstract

The use of servo motors for driving industrial machines reduces an average electric power consumption compared with hydraulic driving, thereby contributing to energy saving. On the other hand, the peak power increases at acceleration and deceleration, which causes larger fluctuation in power source voltage, sometimes requiring the electrical facilities capacity to be increased.

Energy Charge Module reduces large power source current at the peak of electric power consumption, and reduces voltage fluctuation of electrical facilities.

## FEATURES


- Assists power running energy during motor acceleration and recharges regenerated energy during motor deceleration to reduce voltage fluctuation of the electrical facilities.
- Supplies only a portion of electric power which exceeds the electricity level of the electrical facilities capacity from Energy Charge Module at acceleration, and limits the capacity of the capacitor to minimum in combination with Power Source Regeneration Function at regeneration.
- Added with various types of alarm detection functions and discharging and protection circuits for capacitor, to secure safety as the capacitor is charged with large energy.

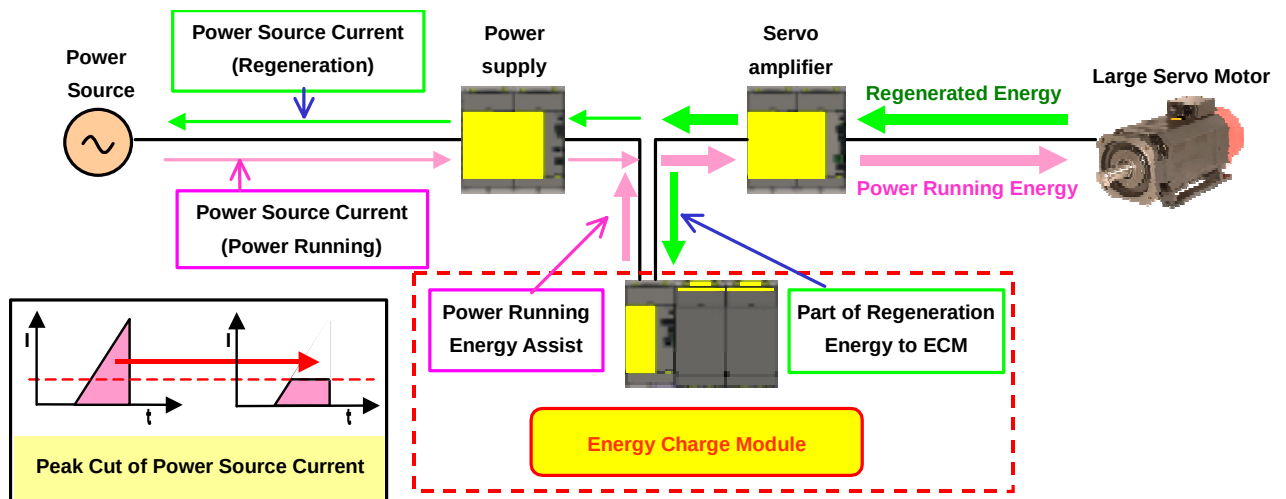

|       |      |        |             |                                   |            |
|-------|------|--------|-------------|-----------------------------------|------------|
|       |      |        |             | TITLE                             |            |
|       |      |        |             | Energy Charge Module DESCRIPTIONS |            |
|       |      |        |             | DRAW. NO. B-65282EN/06-02         | CUST.      |
| EDIT. | DATE | DESIG. | DESCRIPTION | FANUC LTD                         | SHEET 5/36 |

## 2. Configuration and Ordering

### 2.1 Configuration

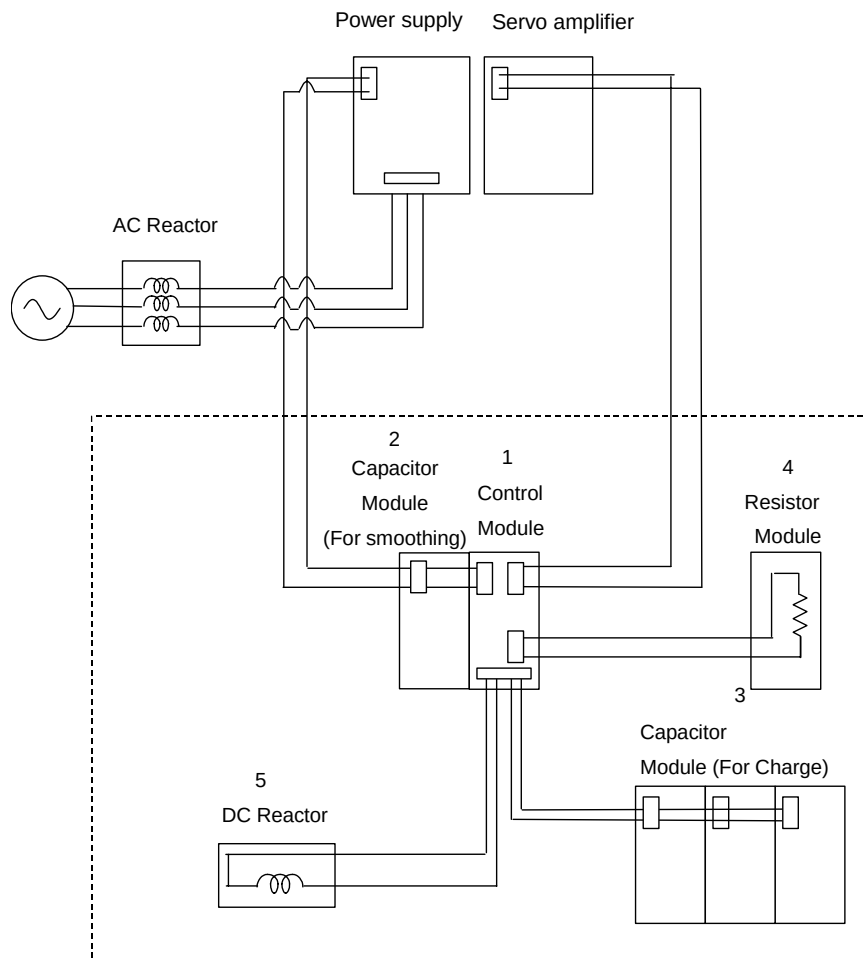

| NO. | Name                             | Functions                                                |
|-----|----------------------------------|----------------------------------------------------------|
| 1   | Control Module                   | Controlling charge/discharge of Capacitor Module         |
| 2   | Capacitor Module (For smoothing) | Smoothing input/output current of Control Module         |
| 3   | Capacitor Module (For charge)    | Charging energy                                          |
| 4   | Resistor Module                  | Resistor to discharge Capacitor Module at Emergency stop |
| 5   | DC Reactor                       | For controlling charge/discharge current                 |

|       |      |        |             |                                   |            |
|-------|------|--------|-------------|-----------------------------------|------------|
|       |      |        |             | TITLE                             |            |
|       |      |        |             | Energy Charge Module DESCRIPTIONS |            |
|       |      |        |             | DRAW. NO. B-65282EN/06-02         | CUST.      |
| EDIT. | DATE | DESIG. | DESCRIPTION | FANUC LTD                         | SHEET 6/36 |

## 2.2 Ordering number

### 2.2.1 Basics

| Category | Name             | Ordering number | Remarks                     |
|----------|------------------|-----------------|-----------------------------|
| Standard | Control Module   | A06B-6158-H010  |                             |
| Standard | Capacitor Module | A06B-6158-H020  |                             |
| Standard | Resistor Module  | A06B-6158-H030  |                             |
| Standard | DC Reactor       | A06B-6158-H040  | Continuous current: 100Arms |

### 2.2.2 Short bar, Connector

#### [Short bar]

| Category | Name      | Ordering number | Remarks                                                                                                                 |
|----------|-----------|-----------------|-------------------------------------------------------------------------------------------------------------------------|
| Optional | Short bar | A06B-6110-K504  | K1, K2<br>The short bar must be attached to DC link terminal of Power supply (300mm) width and Servo amplifier (300mm). |
| Optional | Short bar | A06B-6078-K804  | K3<br>The connection between "DC link of Control Module" and "Capacitor Module (for smoothing)"                         |
| Optional | Short bar | A06B-6078-K800  | K5<br>Connection between "Capacitor Modules (for charge)"                                                               |

#### [Connector]


| Category | Name      | Ordering number | Remarks                                                                                           |
|----------|-----------|-----------------|---------------------------------------------------------------------------------------------------|
| Optional | Connector | A06B-6110-K505  | K6, K7<br>Connection between "Control Module" and "Resistor Module"                               |
| Optional | Connector | A06B-6110-K210  | K21<br>Connection of the interface signal between "Servo amplifier" and a "Control Module"        |
| Optional | Connector | A06B-6110-K506  | K22<br>Connection between "Control Module" and "The break signal of the fuse in Capacitor Module" |
| Optional | Connector | A06B-6130-K202  | K23<br>Dummy connector for the termination of the break signal of the fuse.                       |
| Optional | Connector | A06B-6110-K508  | K24<br>Connection of the interface signal between a "Control Module" and "I/O"                    |

|       |      |        |             |                                   |               |
|-------|------|--------|-------------|-----------------------------------|---------------|
|       |      |        |             | TITLE                             |               |
|       |      |        |             | Energy Charge Module DESCRIPTIONS |               |
|       |      |        |             | DRAW. NO. B-65282EN/06-02         | CUST.         |
| EDIT. | DATE | DESIG. | DESCRIPTION | FANUC LTD                         | SHEET 7 / 3 6 |


### 3. Specifications

#### 3.1 Behavior of ECM


- (1) Energy supplies the Capacitor Module of ECM from power source after the Power supply is ready.  
(Pre-charge)
- (2) When the power that the Servo amplifier requires exceeds the level set as ECM, ECM assists the energy for the power running.
- (3) The regeneration energy is stored in the Capacitor Module of ECM. The regeneration energy regenerates to the electrical facilities after the Capacitor Module is fully charged.

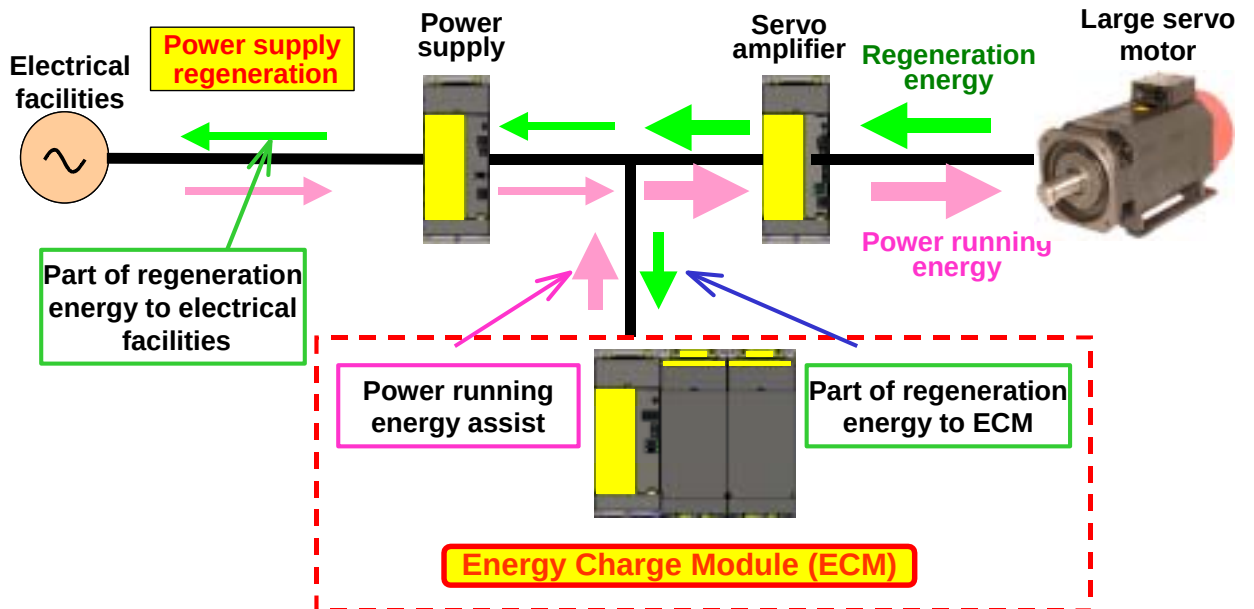

#### Without ECM

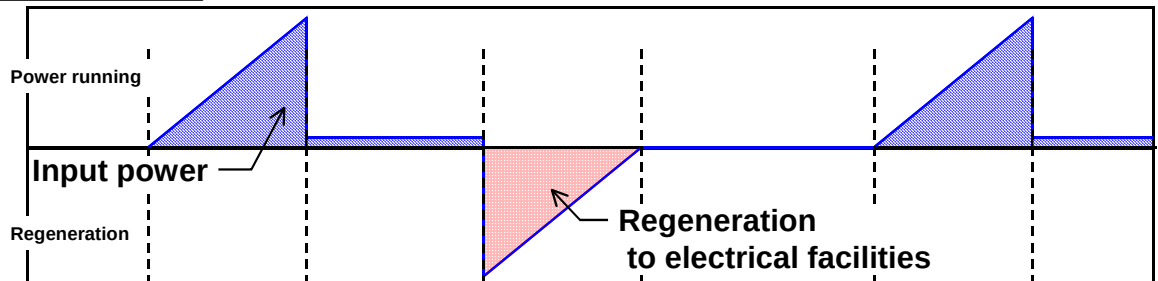

#### With ECM

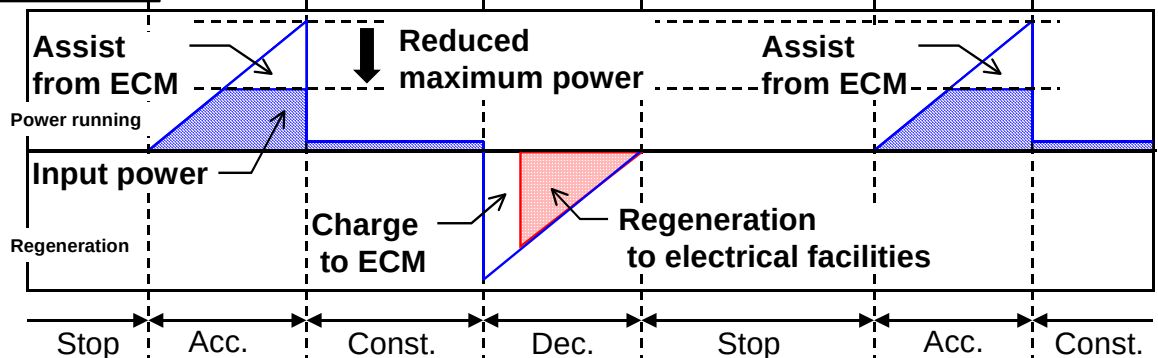

|       |      |        |             |                                   |            |
|-------|------|--------|-------------|-----------------------------------|------------|
|       |      |        |             | TITLE                             |            |
|       |      |        |             | Energy Charge Module DESCRIPTIONS |            |
|       |      |        |             | DRAW. NO. B-65282EN/06-02         | CUST.      |
| EDIT. | DATE | DESIG. | DESCRIPTION | FANUC LTD                         | SHEET 8/36 |

This Energy Charge Module is equipment applicable to SERVO AMPLIFIER of 400V input series.  
The specification of the following units is explained.

| Item | Name                             | Functions                                                |
|------|----------------------------------|----------------------------------------------------------|
| 3.2  | Control Module                   | Controlling charge/discharge of Capacitor Module         |
| 3.3  | Capacitor Module (For smoothing) | Smoothing input/output current of Control Module         |
| 3.4  | Capacitor Module (For charge)    | Charging energy                                          |
| 3.5  | Resistor Module                  | Resistor to discharge Capacitor Module at Emergency stop |
| 3.6  | DC Reactor                       | For controlling charge/discharge current                 |

### 3.2 Control Module


Control Module controls the current from Capacitor Module.

| Item                                                       | Specifications                                                  |
|------------------------------------------------------------|-----------------------------------------------------------------|
| Maximum output                                             | (1) 120kW (2) 90kW                                              |
| Continuous output                                          | 6kW or less Note)                                               |
| Maximum connection number of Capacitor Module (for charge) | (1) 120kW: Up to 10<br>(2) 90kW: Up to 8                        |
| Continuous output of motor                                 | 55kW or less                                                    |
| Maximum stored energy                                      | About 11 kJ                                                     |
| Limit of input Power supply current                        | Refer to section 4.4                                            |
| Protection functions                                       | Refer to section 5.3<br>(Fuse, Over current, Over Voltage, etc) |


Note) For example, in case of the energy supply per one time is 100kW during 100msec, 36 energy supplies are possible in 1 minute. In case of the energy supply per one time is 50kW during 50msec, 144 energy supplies are possible in 1 minute.

Example)

(1) Maximum output 120kW

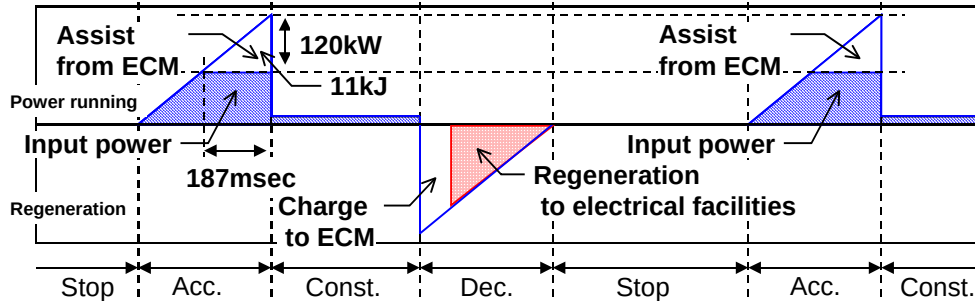

(2) Maximum output 90kW

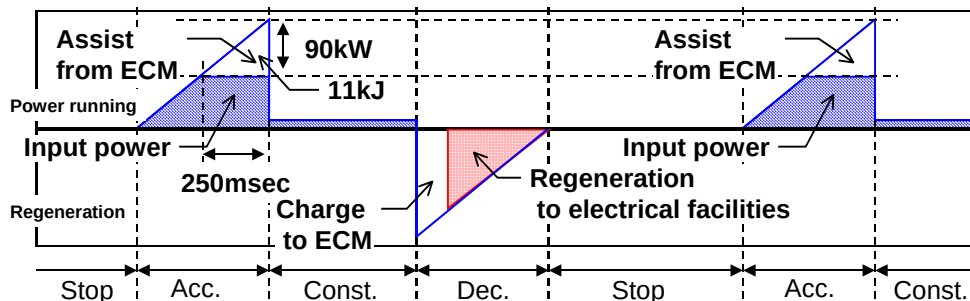

|       |      |        |             |                                   |            |
|-------|------|--------|-------------|-----------------------------------|------------|
|       |      |        |             | TITLE                             |            |
|       |      |        |             | Energy Charge Module DESCRIPTIONS |            |
|       |      |        |             | DRAW. NO. B-65282EN/06-02         | CUST.      |
| EDIT. | DATE | DESIG. | DESCRIPTION | FANUC LTD                         | SHEET 9/36 |

### 3.3 Capacitor Module (For smoothing)

It is the capacitor that smoothes the current. It is installed between Control Module and Power supply.

| Item                  | Specifications                    |
|-----------------------|-----------------------------------|
| Capacitance           | 0.011F                            |
| Fuse built-in         | Circuit is interrupted with fuse. |
| The number to be used | 1                                 |

### 3.4 Capacitor Module (For Charge)

It is the capacitor to charge energy. The regeneration energy is charged in Capacitor Module at deceleration and the power running energy is assisted the by the charged energy at acceleration.

As for the selection of the number of Capacitor Module, please refer to section 4.1.

| Item                                        | Specifications                                                                                                                                              |
|---------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Capacitance                                 | 0.011F                                                                                                                                                      |
| Protection                                  | Circuit is interrupted with fuse.                                                                                                                           |
| The number of discharge (at maximum output) | <ul style="list-style-type: none"> <li>The number of acc/dec: 50 million times or more Note)</li> <li>The number of ESP: 1 million times or more</li> </ul> |

Note) If the number of acc/dec is required 50 million times or more, please inquire to our company.

### 3.5 Resistor Module

It is the resistor in order to discharge the energy of Capacitor Module at ESP or Alarm.

| Item                    | Specifications                                                      |
|-------------------------|---------------------------------------------------------------------|
| Resistance              | 30 ohm                                                              |
| Discharge time          | about 20 seconds (In case of the number of Capacitor Module is 10)  |
| Charge time             | about 5 seconds (In case of the number of Capacitor Module is 10)   |
| Protection              | The thermostat in Resistor Module detects abnormal heat generation. |
| The number to be used   | 1                                                                   |
| The number of discharge | 1 million times or more<br>Conditions: one discharge in 5 minutes   |

### 3.6 DC Reactor

It is DC Reactor in order to smooth the charge and discharge current.

| Item               | Specifications |
|--------------------|----------------|
| Continuous current | 100Arms        |

|       |      |        |             |                                   |             |
|-------|------|--------|-------------|-----------------------------------|-------------|
|       |      |        |             | TITLE                             |             |
|       |      |        |             | Energy Charge Module DESCRIPTIONS |             |
|       |      |        |             | DRAW. NO. B-65282EN/06-02         | CUST.       |
| EDIT. | DATE | DESIG. | DESCRIPTION | FANUC LTD                         | SHEET 10/36 |

#### 4. Selection

Selection of the number of Capacitor Module (for charge) and the setup of the switch of the energy supply start level from ECM are explained.

[The selection procedure of ECM]

| Order | Contents                                                                                                                                                                                                                  | Reference |
|-------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|
| (1)   | Confirm the maximum instantaneous power and the power pattern of the machine.                                                                                                                                             | 4.1       |
| (2)   | Limit of the maximum instantaneous power of the machine is estimated according to the specification of the machine or permissible maximum instantaneous power of the electrical facilities.                               | 4.2       |
| (3)   | The number of Capacitor Module (for charge) is selected according to (1) and (2).                                                                                                                                         | 4.3       |
| (4)   | The level of the energy supply from ECM is set up with the setting switch on ECM so that the power from a power source is less than the permissible maximum instantaneous power. (At the time of mechanical installation) | 4.4       |

##### 4.1 The maximum instantaneous power and the power pattern of the machine (Order (1))

- The output of the motor can be calculated with multiplication of the torque and the speed of the motor.


In the case of the existing machine, it can be calculated by measuring the torque and speed of the motor.  
In the case of the machine is being designed, it can be calculated according to the specification of the motor, the inertia of the machine and the operating conditions of the machine.

The output of the motor (W) = the speed of the motor (rad/s) x the torque of the motor (Nm)

- The loss of the amplifier and the motor is not included in the output of the motor. Therefore the power from the power source and ECM is as the output of the motor x 1.2

The power from the power source (W)= the output of the motor (W) x 1.2

- The maximum instantaneous power of the machine is the sum total of the maximum instantaneous power of the motor and the power of the other equipment installed in the machine.

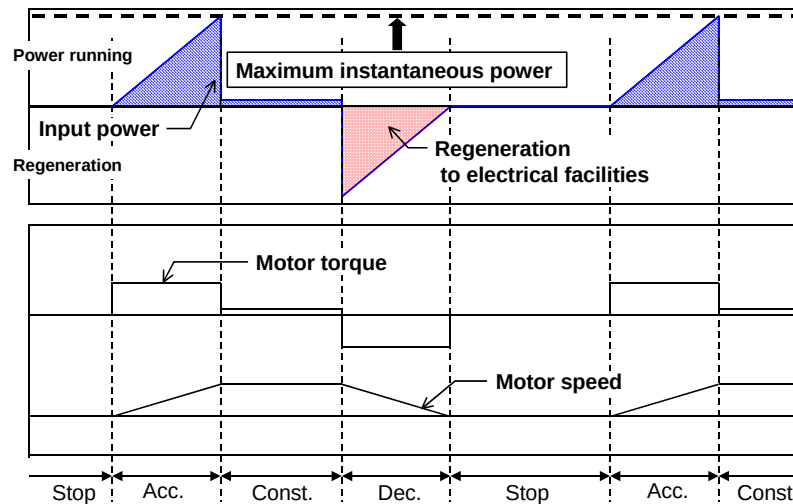


|       |      |        |             |                                   |             |
|-------|------|--------|-------------|-----------------------------------|-------------|
|       |      |        |             | TITLE                             |             |
|       |      |        |             | Energy Charge Module DESCRIPTIONS |             |
|       |      |        |             | DRAW. NO. B-65282EN/06-02         | CUST.       |
| EDIT. | DATE | DESIG. | DESCRIPTION | FANUC LTD                         | SHEET 11/36 |

#### 4.2 Limit of the maximum instantaneous power of the machine (Order (2))

Limit of the maximum instantaneous power of the machine is estimated according to the specification of the machine or permissible maximum instantaneous power of the electrical facilities.

[The calculation method of the permissible maximum instantaneous power of the electrical facilities]

- The power company regulates the voltage drop ratio in the receiving point of the power system because the voltage drop may affect the neighboring equipment when the customer uses maximum instantaneous power. Since each power company decides the regulation of the voltage drop ratio, please ask the power company.
- Please check the voltage drop ratio in the receiving point of the power system when the customer uses maximum instantaneous power. If it is more than the regulation of the voltage drop ratio of the power company, the customer needs to improve the voltage drop ratio.
- The calculation method of the voltage drop ratio in the receiving point and the permissible maximum instantaneous power of the electrical facilities are described as follows.

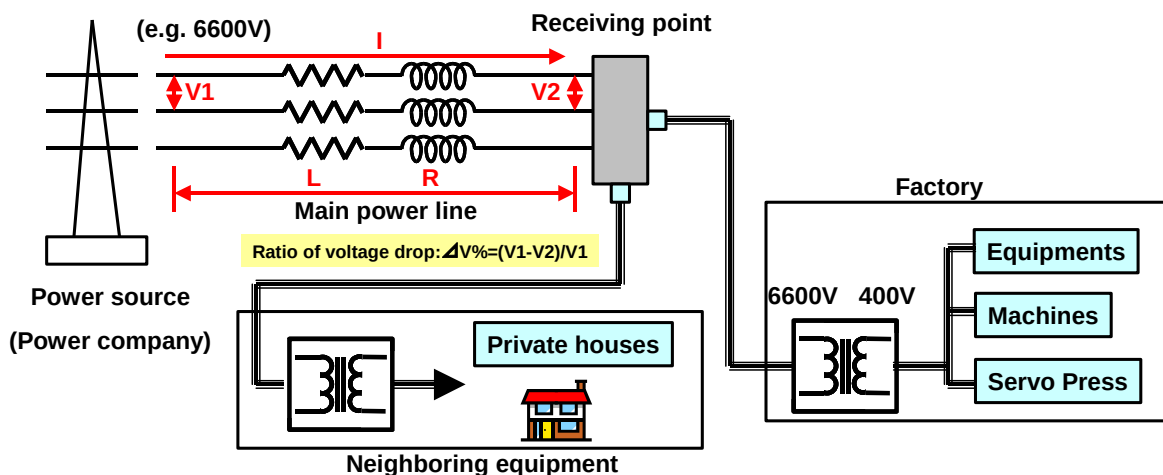

Note 1)

Please ask to electric power company about the impedance of a power line.

Note 2)

Generally, the voltage drop ratio depends on the impedance of the power line between the receiving point from the power supply of the power company. But if the impedance of the power supply of the power company cannot be disregarded, the voltage drop ratio should be calculated with the impedance is added to that of a power line.

|       |      |        |             |                                   |                 |
|-------|------|--------|-------------|-----------------------------------|-----------------|
|       |      |        |             | TITLE                             |                 |
|       |      |        |             | Energy Charge Module DESCRIPTIONS |                 |
|       |      |        |             | DRAW. NO. B-65282EN/06-02         | CUST.           |
| EDIT. | DATE | DESIG. | DESCRIPTION | FANUC LTD                         | SHEET 1 2 / 3 6 |



[Calculation method (1)]

| Sign  | Item                       | Unit | Remarks                                         |
|-------|----------------------------|------|-------------------------------------------------|
| V1    | Line Voltage               | Vrms | Line Voltage with no load                       |
| V2    | Voltage at receiving point | Vrms | Voltage at the receiving point with load        |
| I     | Max. current               | Arms | Current when the machine output Max. power      |
| R     | Resistance                 | ohm  | Resistance of main power line                   |
| X     | Reactance                  | ohm  | Reactance of main power line (X [ohm]=jωL [H])  |
| cos φ | Power factor               | -    | When unknown, please give as 0.9 as a standard. |
| sin φ | -                          | -    | When unknown, please give as 0.4 as a standard. |

- The ratio of voltage drop (ΔV%) is calculated with the value of the above table.

$$\Delta V\% = (V1 - V2) / V1 = \{I \times (R \times \cos \phi + X \times \sin \phi) / (V1 / \sqrt{3})\} \times 100 \quad [\%]$$

- If the ratio of voltage drop (ΔV%) is less than the regulation of an electric power company, the countermeasure is unnecessary.
- If the ratio of voltage drop (ΔV%) is more than the regulation of an electric power company, calculate the permissible maximum instantaneous power by the following formula.

$$\text{Permissible maximum instantaneous power} = V1^2 \times \Delta V\% / \{(R \times \cos \phi + X \times \sin \phi) \times 100\} \quad [\text{VA}]$$

- It is necessary that the maximum instantaneous power of the machine is less than the permissible maximum instantaneous power.

Example of calculation)

Conditions

| Sign  | Item         | Value    |
|-------|--------------|----------|
| V1    | Line Voltage | 6600Vrms |
| I     | Max. current | 306Arms  |
| R     | Resistance   | 0.87ohm  |
| X     | Reactance    | 2.18ohm  |
| cos φ | Power factor | 0.9      |
| sin φ | -            | 0.4      |

(1) Calculation of the ratio of voltage drop (ΔV%)

$$\begin{aligned} \Delta V\% &= \{306 \times (0.87 \times 0.9 + 2.18 \times 0.4) / (6600 / \sqrt{3})\} \times 100 \quad [\%] \\ &= 13.3 \quad [\%] \end{aligned}$$

(2) Calculation of the permissible maximum instantaneous power

The permissible ratio of voltage drop is 4.2%

$$\begin{aligned} \text{Permissible maximum instantaneous power} &= 6600^2 \times 4.2 / \{(0.87 \times 0.9 + 2.18 \times 0.4) \times 100\} \quad [\text{VA}] \\ &= 1105 \quad [\text{kVA}] \\ &= 1227 \quad [\text{kW}] \quad (\text{Power factor: } 0.9) \end{aligned}$$

|       |      |        |             |                                   |             |
|-------|------|--------|-------------|-----------------------------------|-------------|
|       |      |        |             | TITLE                             |             |
|       |      |        |             | Energy Charge Module DESCRIPTIONS |             |
|       |      |        |             | DRAW. NO. B-65282EN/06-02         | CUST.       |
| EDIT. | DATE | DESIG. | DESCRIPTION | FANUC LTD                         | SHEET 13/36 |

[Calculation method (2)]

| Sign  | Item                           | Unit | Remarks                                         |
|-------|--------------------------------|------|-------------------------------------------------|
| Po    | Max. output power              | kVA  | Max. output power of machine                    |
| %R    | % Resistance                   | %    | % Resistance of power line                      |
| %X    | % Reactance                    | %    | % Reactance of power line                       |
| P     | Basic capacity of power source | MVA  | Basic capacity of %L and %R                     |
| cos φ | Power factor                   | -    | When unknown, please give as 0.9 as a standard. |
| sin φ | -                              | -    | When unknown, please give as 0.4 as a standard. |

- The ratio of voltage drop ( $\Delta V\%$ ) is calculated with the value of the above table.

$$\Delta V\% = P_o \times (\%R \times \cos \phi + \%X \times \sin \phi) \times 10^{-4} \quad [\%] \quad (\text{Condition: } P=10\text{MVA})$$

- If the ratio of voltage drop ( $\Delta V\%$ ) is less than the regulation of an electric power company, the countermeasure is unnecessary.
- If the ratio of voltage drop ( $\Delta V\%$ ) is more than the regulation of an electric power company, calculate the Permissible maximum instantaneous power by the following formula.
- $$\text{Permissible maximum instantaneous power} = \Delta V\% / \{(\%R \times \cos \phi + \%X \times \sin \phi) \times 10^{-4}\} \quad [\text{kVA}]$$
- It is necessary that the maximum instantaneous power of the machine is less than the permissible maximum instantaneous power.

Example of calculation)

Conditions

| Sign  | Item                           | Value   |
|-------|--------------------------------|---------|
| Po    | Max. output power              | 3500kVA |
| %R    | % Resistance                   | 20%     |
| %X    | % Reactance                    | 50%     |
| P     | Basic capacity of power source | 10MVA   |
| cos φ | Power factor                   | 0.9     |
| sin φ | -                              | 0.4     |

(1) Calculation of the ratio of voltage drop ( $\Delta V\%$ )

$$\begin{aligned} \Delta V\% &= 3500 \times (20 \times 0.9 + 50 \times 0.4) \times 10^{-4} \quad [\%] \\ &= 13.3 \quad [\%] \end{aligned}$$

(2) Calculation of the permissible maximum instantaneous power

The permissible ratio of voltage drop is 4.2%

$$\begin{aligned} \text{Permissible maximum instantaneous power} &= 4.2 / \{(20 \times 0.9 + 50 \times 0.4) \times 10^{-4}\} \quad [\text{VA}] \\ &= 1105 \quad [\text{kVA}] \\ &= 1227 \quad [\text{kW}] \quad (\text{Power factor: } 0.9) \end{aligned}$$

|       |      |        |             |                                   |             |
|-------|------|--------|-------------|-----------------------------------|-------------|
|       |      |        |             | TITLE                             |             |
|       |      |        |             | Energy Charge Module DESCRIPTIONS |             |
|       |      |        |             | DRAW. NO. B-65282EN/06-02         | CUST.       |
| EDIT. | DATE | DESIG. | DESCRIPTION | FANUC LTD                         | SHEET 14/36 |

#### 4.3 Selection of Capacitor Module (Order (3))

The energy assisted from ECM is calculated and the number of a Capacitor Module is selected.

The energy assisted from ECM (J) < the energy stored in one capacitor module x N (J)

N: The number of a capacitor module


[The energy assisted from ECM]

The energy assisted from ECM is calculated from the maximum instantaneous power of the machine (4.1) and the permissible maximum instantaneous power (4.2). The energy assisted from ECM is the area of the portion beyond the level of the permissible maximum instantaneous power.

The instant maximum power from the power source cannot be made smaller than " the maximum instantaneous power of the machine -the maximum output of ECM".

For example, the energy assisted from ECM is calculated by the following formulas in the following figure.

The energy assisted from ECM (J) = 0.5xT(sec) x (the maximum instantaneous power of the motor(w)  
- the permissible maximum instantaneous power(w))

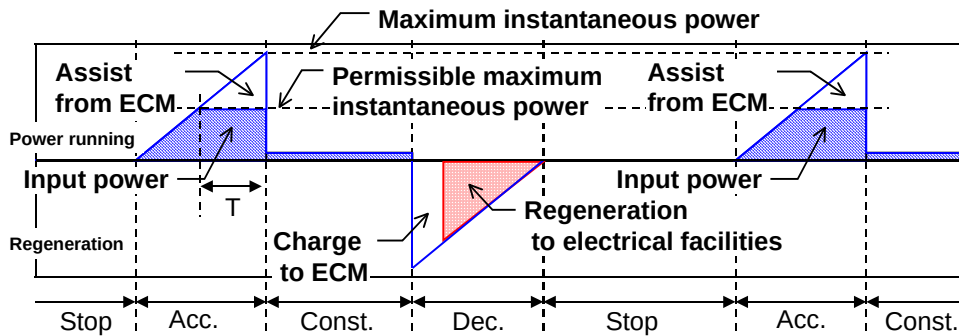

[Stored energy per a Capacitor Module]

(1) Maximum output 120kW

| Power source voltage | 400 V  | 420 V  | 440 V  | 460 V  | 480 V  |
|----------------------|--------|--------|--------|--------|--------|
| Stored energy        | 1024 J | 1087 J | 1149 J | 1211 J | 1273 J |

Note:  $P_c = 0.5 \times 0.011 F \times [V_{\text{norm}}^2 - (V_{\text{norm}} - 200V)^2]$  J

$P_c$ : Stored energy per a Capacitor Module

$V_{\text{norm}}$ : Power source voltage  $\times \sqrt{2}$

(2) Maximum output 90kW

| Power source voltage | 400 V  | 420 V  | 440 V  | 460 V  | 480 V  |
|----------------------|--------|--------|--------|--------|--------|
| Stored energy        | 1372 J | 1465 J | 1558 J | 1652 J | 1745 J |

Note:  $P_c = 0.5 \times 0.011 F \times [V_{\text{norm}}^2 - (V_{\text{norm}} - 300V)^2]$

|       |      |        |             |                                   |             |
|-------|------|--------|-------------|-----------------------------------|-------------|
|       |      |        |             | TITLE                             |             |
|       |      |        |             | Energy Charge Module DESCRIPTIONS |             |
|       |      |        |             | DRAW. NO. B-65282EN/06-02         | CUST.       |
| EDIT. | DATE | DESIG. | DESCRIPTION | FANUC LTD                         | SHEET 15/36 |

Example of calculation)

Conditions

| Item                                    | Value  |
|-----------------------------------------|--------|
| Maximum instantaneous power             | 100kW  |
| Permissible maximum instantaneous power | 50kW   |
| Time: T                                 | 0.2sec |

The energy assisted from ECM (J)=0.5 x 0.2(sec) x (100(kW)-50(kW))  
=5000 (J)

Maximum output 120kW :120kW or less, Power source voltage:400V


5000 (J)< 1024 (J) x 5

5 Capacitor Modules (for charge) are required.

|       |      |        |             |                                   |                 |
|-------|------|--------|-------------|-----------------------------------|-----------------|
|       |      |        |             | TITLE                             |                 |
|       |      |        |             | Energy Charge Module DESCRIPTIONS |                 |
|       |      |        |             | DRAW. NO. B-65282EN/06-02         | CUST.           |
| EDIT. | DATE | DESIG. | DESCRIPTION | F A N U C L T D                   | SHEET 1 6 / 3 6 |

#### 4.4 Setup of ECM (Order (4))

- The level of the energy supply from ECM is set up with the setting switch on ECM so that the power from a power source is less than the permissible maximum instantaneous power.
- When the output of the motor exceeds a setting level, the power from a power source is limited by the energy assisted from ECM.
- Setting levels are 16 levels. Setting levels are set by a 4-bit switch.

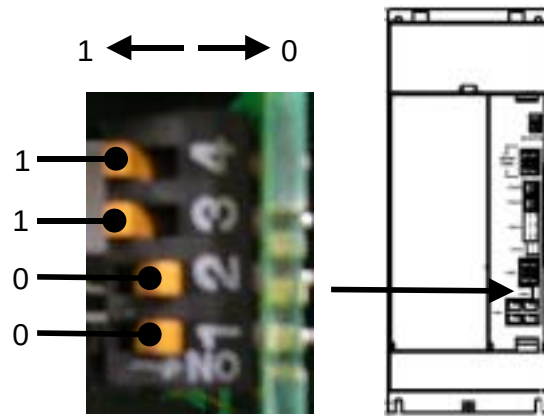

- The limit value of the power from the power source in each setting level is shown in the following table.

| Setup | 4   | 3   | 2   | 1   | Power source<br>current (Arms) | Limit value of the power from<br>the power source (kW)<br>The inside of ( ) is power source voltage. |        |        |
|-------|-----|-----|-----|-----|--------------------------------|------------------------------------------------------------------------------------------------------|--------|--------|
|       |     |     |     |     |                                | (400V)                                                                                               | (440V) | (480V) |
| 0001  | ON  | ON  | ON  | OFF | 42                             | 26                                                                                                   | 29     | 31     |
| 0010  | ON  | ON  | OFF | ON  | 45                             | 28                                                                                                   | 31     | 34     |
| 0011  | ON  | ON  | OFF | OFF | 50                             | 31                                                                                                   | 34     | 38     |
| 0100  | ON  | OFF | ON  | ON  | 54                             | 34                                                                                                   | 37     | 40     |
| 0101  | ON  | OFF | ON  | OFF | 57                             | 35                                                                                                   | 39     | 42     |
| 0110  | ON  | OFF | OFF | ON  | 66                             | 41                                                                                                   | 45     | 49     |
| 0111  | ON  | OFF | OFF | OFF | 73                             | 45                                                                                                   | 50     | 54     |
| 1000  | OFF | ON  | ON  | ON  | 82                             | 51                                                                                                   | 56     | 62     |
| 1001  | OFF | ON  | ON  | OFF | 88                             | 55                                                                                                   | 61     | 66     |
| 1010  | OFF | ON  | OFF | ON  | 99                             | 62                                                                                                   | 68     | 74     |
| 1011  | OFF | ON  | OFF | OFF | 113                            | 70                                                                                                   | 77     | 85     |
| 1100  | OFF | OFF | ON  | ON  | 128                            | 80                                                                                                   | 88     | 96     |
| 1101  | OFF | OFF | ON  | OFF | 143                            | 89                                                                                                   | 98     | 107    |
| 1110  | OFF | OFF | OFF | ON  | 161                            | 100                                                                                                  | 110    | 120    |
| 1111  | OFF | OFF | OFF | OFF | 176                            | 110                                                                                                  | 121    | 131    |

Note) The value of a table is not guaranteed.

At the time of machine installation, please measure power source current or power, and set the switch.

|       |      |        |             |                                   |             |
|-------|------|--------|-------------|-----------------------------------|-------------|
|       |      |        |             | TITLE                             |             |
|       |      |        |             | Energy Charge Module DESCRIPTIONS |             |
|       |      |        |             | DRAW. NO. B-65282EN/06-02         | CUST.       |
| EDIT. | DATE | DESIG. | DESCRIPTION | FANUC LTD                         | SHEET 17/36 |

## 5. Functions and Interface

### 5.1 Interfaces with Servo amplifier

- ECM receives an emergency stop signal and the ready signal of the Power supply(PS) by the communication between modules.

#### [Operation of ECM]


- When the Power supply has been ready.
  - (1) The ECM has been ready after completing the charge to the Capacitor Modules.  
(Charge time: about 5 second)
- In case of "Emergency stop which is input from CNC"
  - (1) The functions of ECM stop.  
(The current between ECM and Servo amplifier is intercepted.)
  - (2) The energy of Capacitor Modules (for charge) is discharged.  
(Discharge time: about 20 seconds)
- In case of "Emergency stop which is input to the Power supply(connector CX4) "
  - (1) The functions of ECM stop.  
(The current between ECM and Servo amplifier is intercepted.)
  - (2) The energy of Capacitor Modules (for charge and smoothing) and capacitors of Servo amplifiers is discharged. (Discharge time: about 20 seconds)

#### Note)

- The charge and discharge time of Capacitor Modules are time when ten Capacitor Modules are connected.
- The Capacitor Modules are not discharged when the discharge circuit of the Control Module malfunctions.

#### ⚠ WARNING)

- The contactor (MCC) for the Power supply should be OFF during Emergency Stop.  
If the contactor is not OFF, the current from power source flows into Resistance Module, and Resistance Module is overheated abnormally.
- Even if the red LED that indicates charging is not lit, before starting the replacement work or wiring work and so on, please ensure that the power source is disconnected by the breaker and the voltages of DC links of the Control Module, the Capacitor Modules (for smoothing and charge), Resistor Module, DC Reactor, the Power supply and the Servo amplifier are falling. As for the voltage of DC link, measure the voltage of the terminal of DC link of each unit by the voltmeter (Tester etc.).

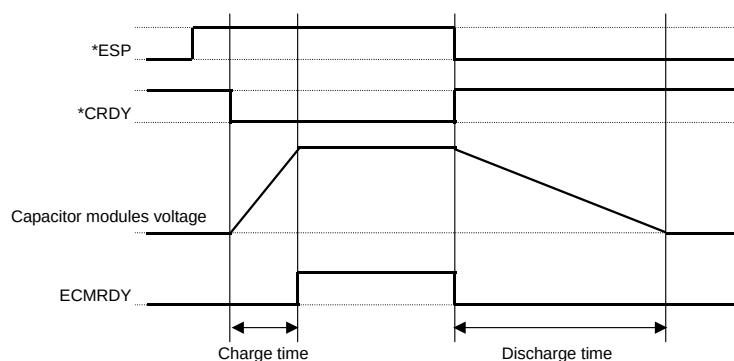

| Signal name | Note                                                                 |
|-------------|----------------------------------------------------------------------|
| *ESP        | Emergency stop signal (L: Emergency stop, H: Emergency stop release) |
| *CRDY       | Ready signal of the Power supply (L: Ready, H: Not ready)            |
| ECMRDY      | Ready signal of ECM (L: Not ready, H: Ready)                         |

|       |      |        |             |                                   |             |
|-------|------|--------|-------------|-----------------------------------|-------------|
|       |      |        |             | TITLE                             |             |
|       |      |        |             | Energy Charge Module DESCRIPTIONS |             |
|       |      |        |             | DRAW. NO. B-65282EN/06-02         | CUST.       |
| EDIT. | DATE | DESIG. | DESCRIPTION | FANUC LTD                         | SHEET 18/36 |

## 5.2 Interfaces with PMC (I/O)

- The control signal (CX41) of the Control Module is connected to I/O.  
(Refer to 7.2.9 Cable K24 about the details of connection)
- The status of ECM is sent to PMC from ECM via I/O and the control signal of ECM is sent to ECM from PMC via I/O.

[The signals which communicate the status of ECM from ECM to PMC]

(1) Ready signal (ECMRDY)

It is a signal for communicating that ECM has been ready.

ECM has been ready within 10 seconds after emergency stop release.

(2) Status signal (ST 1B, ST2B)

It is the 2-bit signal which communicate the status of ECM. (Refer to 5.3 Alarm and status display)

(3) Alarm code (ALM\*B)

It is the 4-bit signal which shows the kind of alarm. (Refer to 5.3 Alarm and status display)

[The signal for controlling ECM from PMC to ECM]

(1) Discharge mask signal (DCMASK)

The discharge mask signal can inhibit to discharge the energy of Capacitor Modules by the Resistor Module. In case of the emergency stop is frequently, this signal is available.

(2) Supply mask signal (SPSTP)

The supply mask signal can inhibit to supply the energy from ECM in the period that does not need to supply the energy from ECM. The energy in the Capacitor Modules can be used by this signal when the energy is required, and the quantity of a Capacitor Module can be reduced.

| Signal name | The meaning of signal | The state of signal Note)             |                         |
|-------------|-----------------------|---------------------------------------|-------------------------|
|             |                       | L                                     | H                       |
| ECMRDY      | Ready signal          | Not ready                             | Ready                   |
| ST1B, ST2B  | Status signal         | Refer to 5.3 Alarm and status display |                         |
| ALM*B       | Alarm code            | Refer to 5.3 Alarm and status display |                         |
| DCMASK      | Discharge mask signal | Enabling to discharge                 | Inhibiting to discharge |

Note)

- The output signal from ECM is a high side switch circuit. When a high side switch turns off, it is necessary to set a signal level to L. Therefore, please use the circuit that the pull down resistor is connected as an input circuit of I/O.
- Please use the output circuit with a high side switch as an output circuit of I/O for DCMASK.
- In the case of the emergency stop by the emergency stop signal inputted into Power supply, Capacitor Modules are discharged even if the discharge mask signal is input.

|       |      |        |             |                                   |             |
|-------|------|--------|-------------|-----------------------------------|-------------|
|       |      |        |             | TITLE                             |             |
|       |      |        |             | Energy Charge Module DESCRIPTIONS |             |
|       |      |        |             | DRAW. NO. B-65282EN/06-02         | CUST.       |
| EDIT. | DATE | DESIG. | DESCRIPTION | FANUC LTD                         | SHEET 19/36 |

### 5.3 Alarm and status display

- When alarm occurs in ECM, the function of ECM stops. (The current between ECM and Servo amplifier is intercepted.)
- Even if alarm occurs in ECM, ECM cannot stop Servo amplifiers and motors. Therefore, the rudder program of PMC is created from the status signal communicate to I/O from ECM in order to stop the machine.

[The status display of ECM]

- The status of ECM is displayed on LED of ECM.

| Classification | LED display           | State                                  | Note                                                                      |
|----------------|-----------------------|----------------------------------------|---------------------------------------------------------------------------|
| Normal         | -                     | Not ready                              |                                                                           |
|                | 0                     | Ready, Operating                       |                                                                           |
|                | Right-handed rotation | Under charging                         |                                                                           |
|                | Left-handed rotation  | Under discharging                      |                                                                           |
| Alarm          | 1                     | Over-current at power running          | Over-current of DC link current at power running                          |
|                | 2                     | Over-current at regeneration           | Over-current of DC link current at the time of regeneration               |
|                | 3                     | Over-current of charge current         | Over-current of charge current to Capacitor Modules                       |
|                | 4                     | Over-current of discharge current      | Over-current of discharge current from Capacitor Modules                  |
|                | 5                     | Low-voltage of control power supply    | Low-voltage of control power supply (24V)                                 |
|                | 6                     | Over-voltage of DC link                | Over-voltage of DC link of Servo amplifier                                |
|                | 7                     | Over-voltage of Capacitor Module       |                                                                           |
|                | 8                     | Low-voltage of Capacitor Module        |                                                                           |
|                | 9                     | Over-heat of Control Module            | Detected by the thermostat on the heat sink                               |
|                | C                     | Alarm of Power supply                  | Alarm occurs in the Power supply                                          |
|                | E                     | Abnormal charge of Capacitor Module    | Capacitor Modules are not charged.                                        |
|                | F                     | Resistor Module Abnormal discharge (1) | Capacitor Modules are not discharged.                                     |
|                | H                     | Resistor Module Abnormal discharge (2) | Capacitor Modules are discharged by malfunction of the discharge circuit. |
|                | J                     | Over-heat of Resistor Module           | Detected by the built-in thermostat                                       |
|                | P                     | Communication error                    | Communication between modules error                                       |
|                | b                     | Current control circuit malfunction    | The circuit to control the current of ECM malfunctions.                   |
|                | h                     | Fuse blowing                           | The fuse of the Capacitor Module is blown.                                |
| Warning        | A                     | Cooling fan stop (Refer to Note 1)     | The cooling fan stop for the heat sink of the Control Module.             |
|                | U                     | Energy supply stop                     | Potential difference of a capacitor module is more than 300V.             |

Note 1)

In case of the cooling fan stop occurs, although ECM works continuously, please exchange the cooling fan a little early. Depending on ambient air temperature or the operating condition of ECM, the life of parts of the Control Module becomes short, or over-heat of Control Module may occur.

|       |      |        |             |                                   |             |
|-------|------|--------|-------------|-----------------------------------|-------------|
|       |      |        |             | TITLE                             |             |
|       |      |        |             | Energy Charge Module DESCRIPTIONS |             |
|       |      |        |             | DRAW. NO. B-65282EN/06-02         | CUST.       |
| EDIT. | DATE | DESIG. | DESCRIPTION | FANUC LTD                         | SHEET 20/36 |



[Operations when alarm occurs]

- When the alarm occurs in ECM, the status signal is communicated to I/O from ECM.
- The status signal ST1B changes from "H" to "L" when the alarm occurs. After ST1B changes from "H" to "L", please check the status signal ST1B and ST2B.
- Please stop the machine according to a status signal.

The stop method of the machine when alarm occurs

| Status signal |      | Status                               | Stop method of the machine                                                                                                                                                                               |
|---------------|------|--------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ST2B          | ST1B |                                      |                                                                                                                                                                                                          |
| H             | H    | Normal                               | -                                                                                                                                                                                                        |
| H             | L    | Abnormality occurred in ECM.         | (1) The machine is stopped after moving to a safe position.<br>(2) After (1), the machine should be stopped immediately by the emergency stop and the external MCC of the Power supply should be opened. |
| L             | L    | Serious abnormality occurred in ECM. | (1) The machine should be stopped immediately by the emergency stop and the external MCC of the Power supply should be opened.                                                                           |

\* When a cable is disconnected, the signal to I/O is set to "L".

The status signal of ECM

| Classification | LED display           | Status                                    | Status signal |      |
|----------------|-----------------------|-------------------------------------------|---------------|------|
|                |                       |                                           | ST2B          | ST1B |
| Normal         | -                     | Not ready                                 | H             | H    |
|                | 0                     | Ready, Operating                          | H             | H    |
|                | Right-handed rotation | Under charging                            | H             | H    |
|                | Left-handed rotation  | Under discharging                         | H             | H    |
| Alarm          | 1                     | Over-current at power running             | L             | L    |
|                | 2                     | Over-current at regeneration              | L             | L    |
|                | 3                     | Over-current of charge current            | L             | L    |
|                | 4                     | Over-current of discharge current         | L             | L    |
|                | 5                     | Low-voltage of control power supply       | L             | L    |
|                | 6                     | Over-voltage of DC link                   | L             | L    |
|                | 7                     | Over-voltage of Capacitor Module          | L             | L    |
|                | 8                     | Low-voltage of Capacitor Module           | H             | L    |
|                | 9                     | Over-heat of Control Module               | H             | L    |
|                | C                     | Alarm of Power supply                     | H             | L    |
|                | E                     | Abnormal charge of Capacitor Module       | H             | L    |
|                | F                     | Resistor Module<br>Abnormal discharge (1) | H             | L    |
|                | H                     | Resistor Module<br>Abnormal discharge (2) | H             | L    |
|                | J                     | Over-heat of Resistor Module              | H             | L    |
|                | P                     | Communication error                       | H             | L    |
|                | b                     | Current control circuit malfunction       | H             | L    |
|                | h                     | Fuse blowing                              | H             | L    |
| Warning        | A                     | Cooling fan stop (Refer to Note 1)        | H             | L    |
|                | U                     | Energy supply stop                        | H             | L    |

|       |      |        |             |                                   |             |
|-------|------|--------|-------------|-----------------------------------|-------------|
|       |      |        |             | TITLE                             |             |
|       |      |        |             | Energy Charge Module DESCRIPTIONS |             |
|       |      |        |             | DRAW. NO. B-65282EN/06-02         | CUST.       |
| EDIT. | DATE | DESIG. | DESCRIPTION | FANUC LTD                         | SHEET 21/36 |

[Alarm code]

- When the alarm occurs in ECM, the alarm code is communicated to I/O from ECM.
- The status signal ST1B changes from "H" to "L" when the alarm occurs. After ST1B changes from "H" to "L", please check the alarm codes.
- Please use the alarm code in order to display the kind of alarm to a monitor etc..  
It makes maintenance easy.

| Alarm code |       |       |       | Alarm                                                                                                            |
|------------|-------|-------|-------|------------------------------------------------------------------------------------------------------------------|
| ALM8B      | ALM4B | ALM2B | ALM1B |                                                                                                                  |
| L          | L     | L     | L     | No alarm                                                                                                         |
| L          | L     | L     | H     | Over-current at power running<br>Over-current at regeneration                                                    |
| L          | L     | H     | L     | Over-current of charge current<br>Over-current of discharge current                                              |
| L          | L     | H     | H     | Low-voltage of control power supply                                                                              |
| L          | H     | L     | L     | Over-voltage of DC link                                                                                          |
| L          | H     | L     | H     | Over-voltage of Capacitor Module                                                                                 |
| L          | H     | H     | L     | Low-voltage of Capacitor Module                                                                                  |
| L          | H     | H     | H     | Over-heat of Control Module                                                                                      |
| H          | L     | L     | L     | Alarm of Power supply                                                                                            |
| H          | L     | L     | H     | Abnormal charge of Capacitor Module                                                                              |
| H          | L     | H     | L     | Resistor Module Abnormal discharge (1)<br>Resistor Module Abnormal discharge (2)<br>Over-heat of Resistor Module |
| H          | L     | H     | H     | Communication error                                                                                              |
| H          | H     | L     | L     | Energy supply stop                                                                                               |
| H          | H     | L     | H     | Current control circuit malfunction                                                                              |
| H          | H     | H     | L     | Fuse blowing Note1)                                                                                              |
| H          | H     | H     | H     | Cooling fan stop Note2)                                                                                          |

Note 1)

When the fuse blowing alarm occurs, the LED (D2) in the front of a Capacitor Module that the fuse was blown turn off the light. It shows which the fuse of a Capacitor Module was blown. In addition, please keep the control voltage (24V) ON during confirming.

Note 2)


In case of the cooling fan stop occurs, although ECM works continuously, please exchange the cooling fan a little early. Depending on ambient air temperature or the operating condition of ECM, the life of parts of the Control Module becomes short, or over-heat of Control Module may occur.

|       |      |        |             |                                   |             |
|-------|------|--------|-------------|-----------------------------------|-------------|
|       |      |        |             | TITLE                             |             |
|       |      |        |             | Energy Charge Module DESCRIPTIONS |             |
|       |      |        |             | DRAW. NO. B-65282EN/06-02         | CUST.       |
| EDIT. | DATE | DESIG. | DESCRIPTION | FANUC LTD                         | SHEET 22/36 |

## 6. Outline and Panel cut

### 6.1 Control Module (A06B-6158-H010)


Weight: 7.7kg

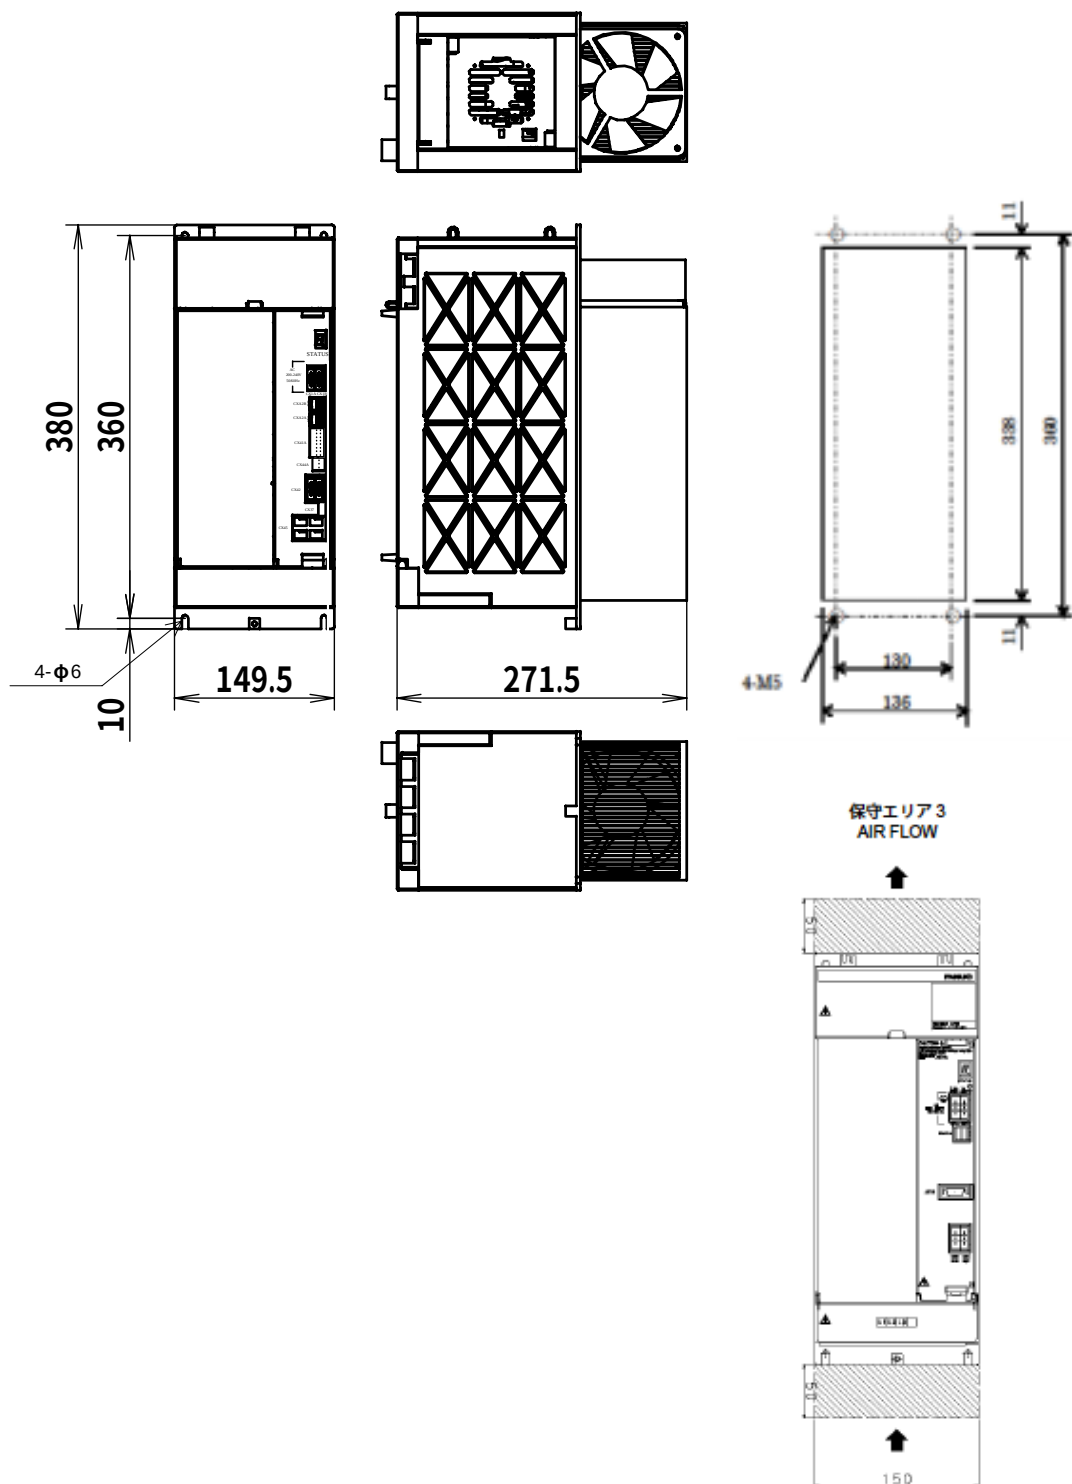

|       |      |        |             |                                   |                 |
|-------|------|--------|-------------|-----------------------------------|-----------------|
|       |      |        |             | TITLE                             |                 |
|       |      |        |             | Energy Charge Module DESCRIPTIONS |                 |
|       |      |        |             | DRAW. NO. B-65282EN/06-02         | CUST.           |
| EDIT. | DATE | DESIG. | DESCRIPTION | FANUC LTD                         | SHEET 2 3 / 3 6 |

## 6.2 Capacitor Module (A06B-6158-H020)


Weight: 11.4kg

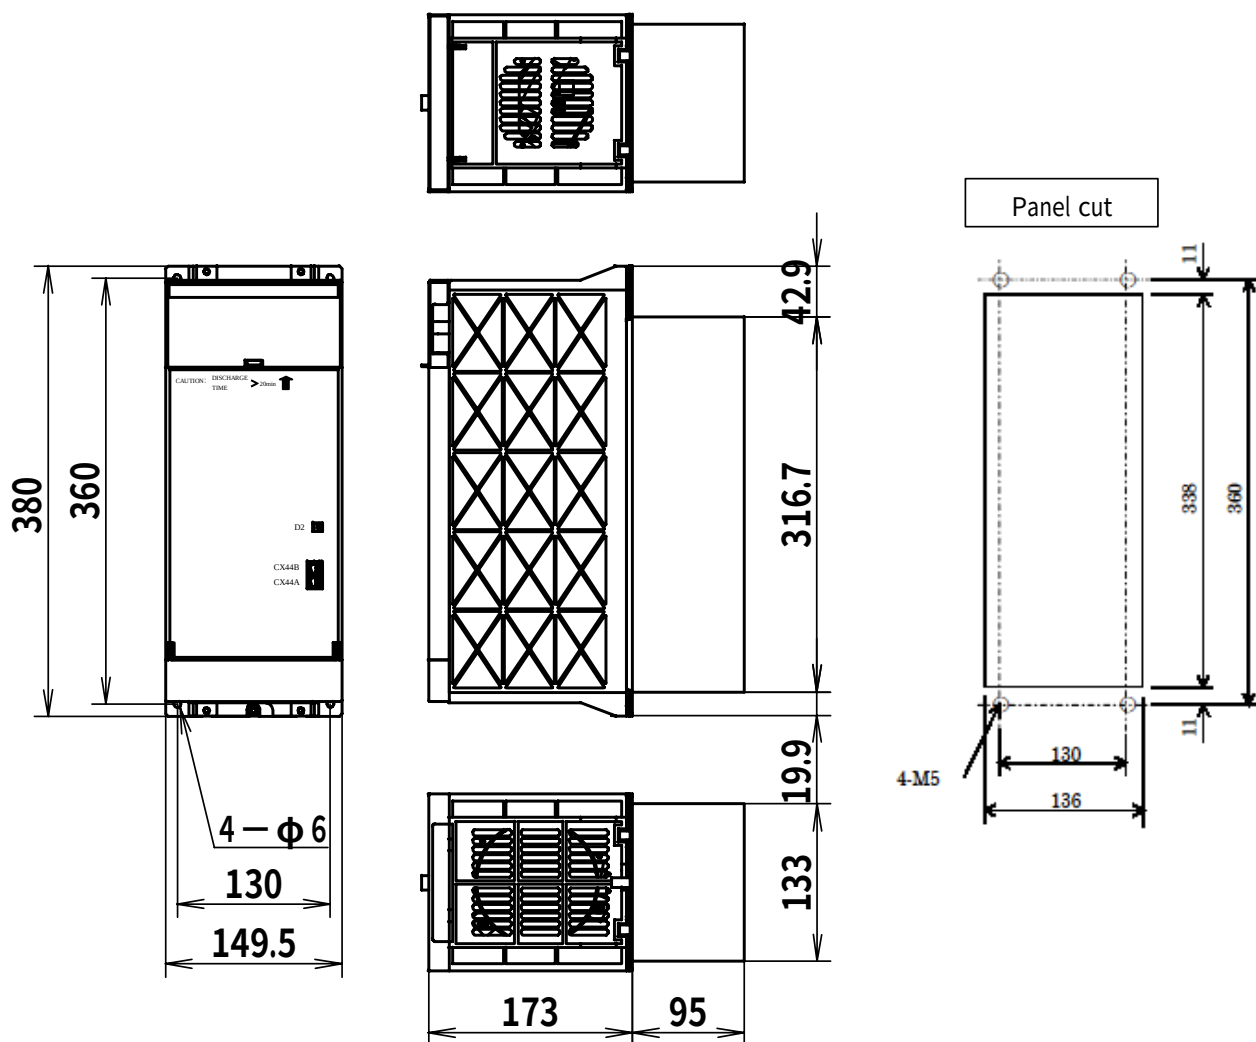

Note) A Capacitor Module (for smoothing) must be attached to the left side of a Control Module without a gap.


|       |      |        |             |                                   |               |
|-------|------|--------|-------------|-----------------------------------|---------------|
|       |      |        |             | TITLE                             |               |
|       |      |        |             | Energy Charge Module DESCRIPTIONS |               |
|       |      |        |             | DRAW. NO. B-65282EN/06-02         | CUST.         |
| EDIT. | DATE | DESIG. | DESCRIPTION | FANUC LTD                         | SHEET 2 4/3 6 |

6.3 Resistor Module (A06B-6158-H030)  
Weight of 7.1kg

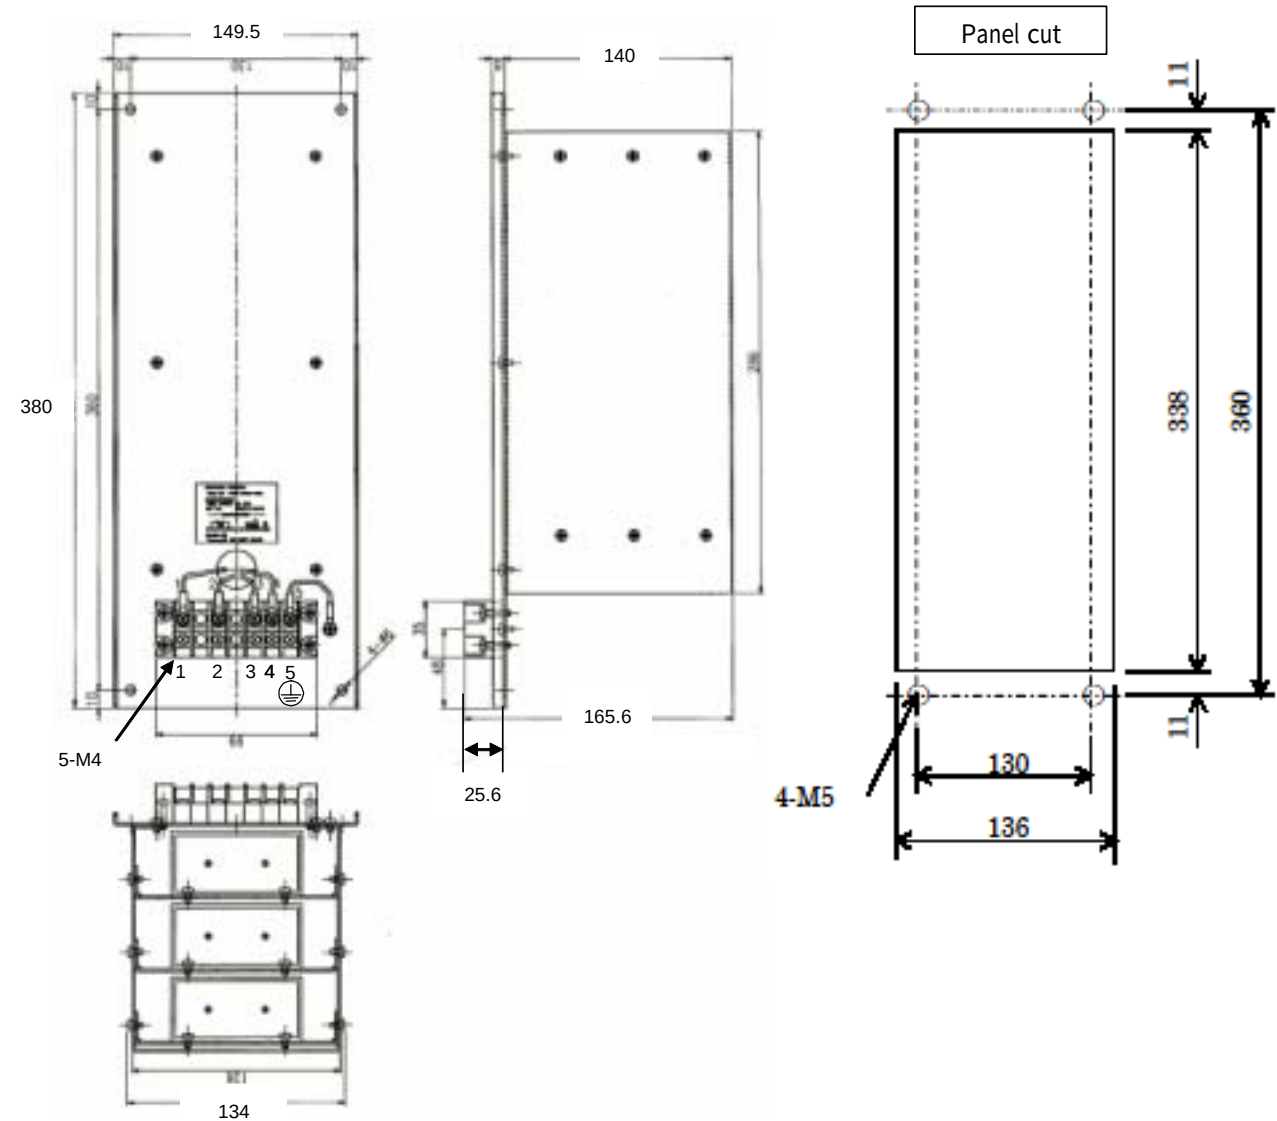

|       |      |        |             |                                   |               |
|-------|------|--------|-------------|-----------------------------------|---------------|
|       |      |        |             | TITLE                             |               |
|       |      |        |             | Energy Charge Module DESCRIPTIONS |               |
|       |      |        |             | DRAW. NO. B-65282EN/06-02         | CUST.         |
| EDIT. | DATE | DESIG. | DESCRIPTION | FANUC LTD                         | SHEET 2 5/3 6 |


6. 4 DC Reactor (A06B-6158-H040)  
 100A 0.5mH  
 Weight: 32kg

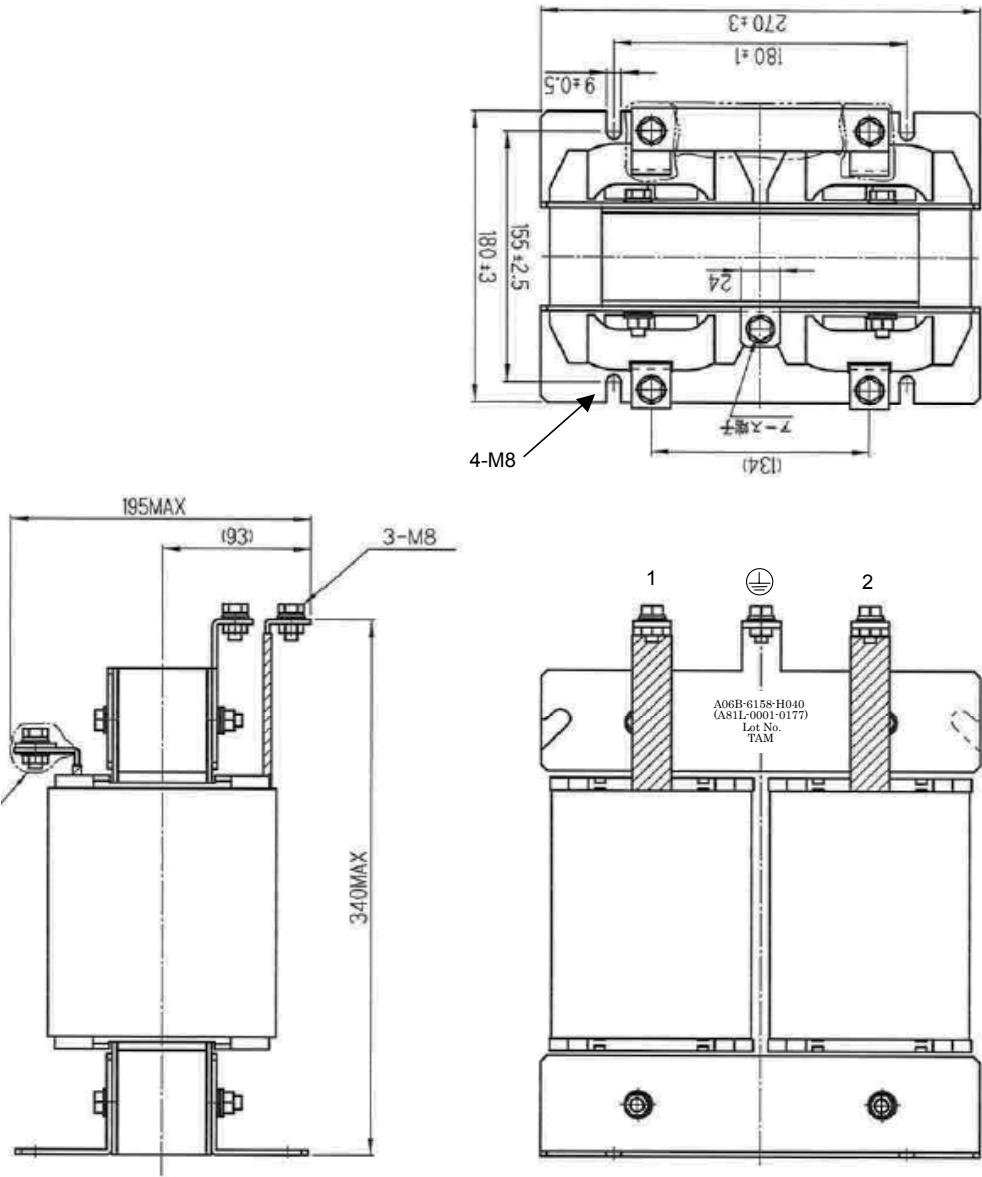

|       |      |        |             |                                   |                 |
|-------|------|--------|-------------|-----------------------------------|-----------------|
|       |      |        |             | TITLE                             |                 |
|       |      |        |             | Energy Charge Module DESCRIPTIONS |                 |
|       |      |        |             | DRAW. NO. B-65282EN/06-02         | CUST.           |
| EDIT. | DATE | DESIG. | DESCRIPTION | FANUC LTD                         | SHEET 2 6 / 3 6 |

## 7. Connection

### 7.1 Connection diagram

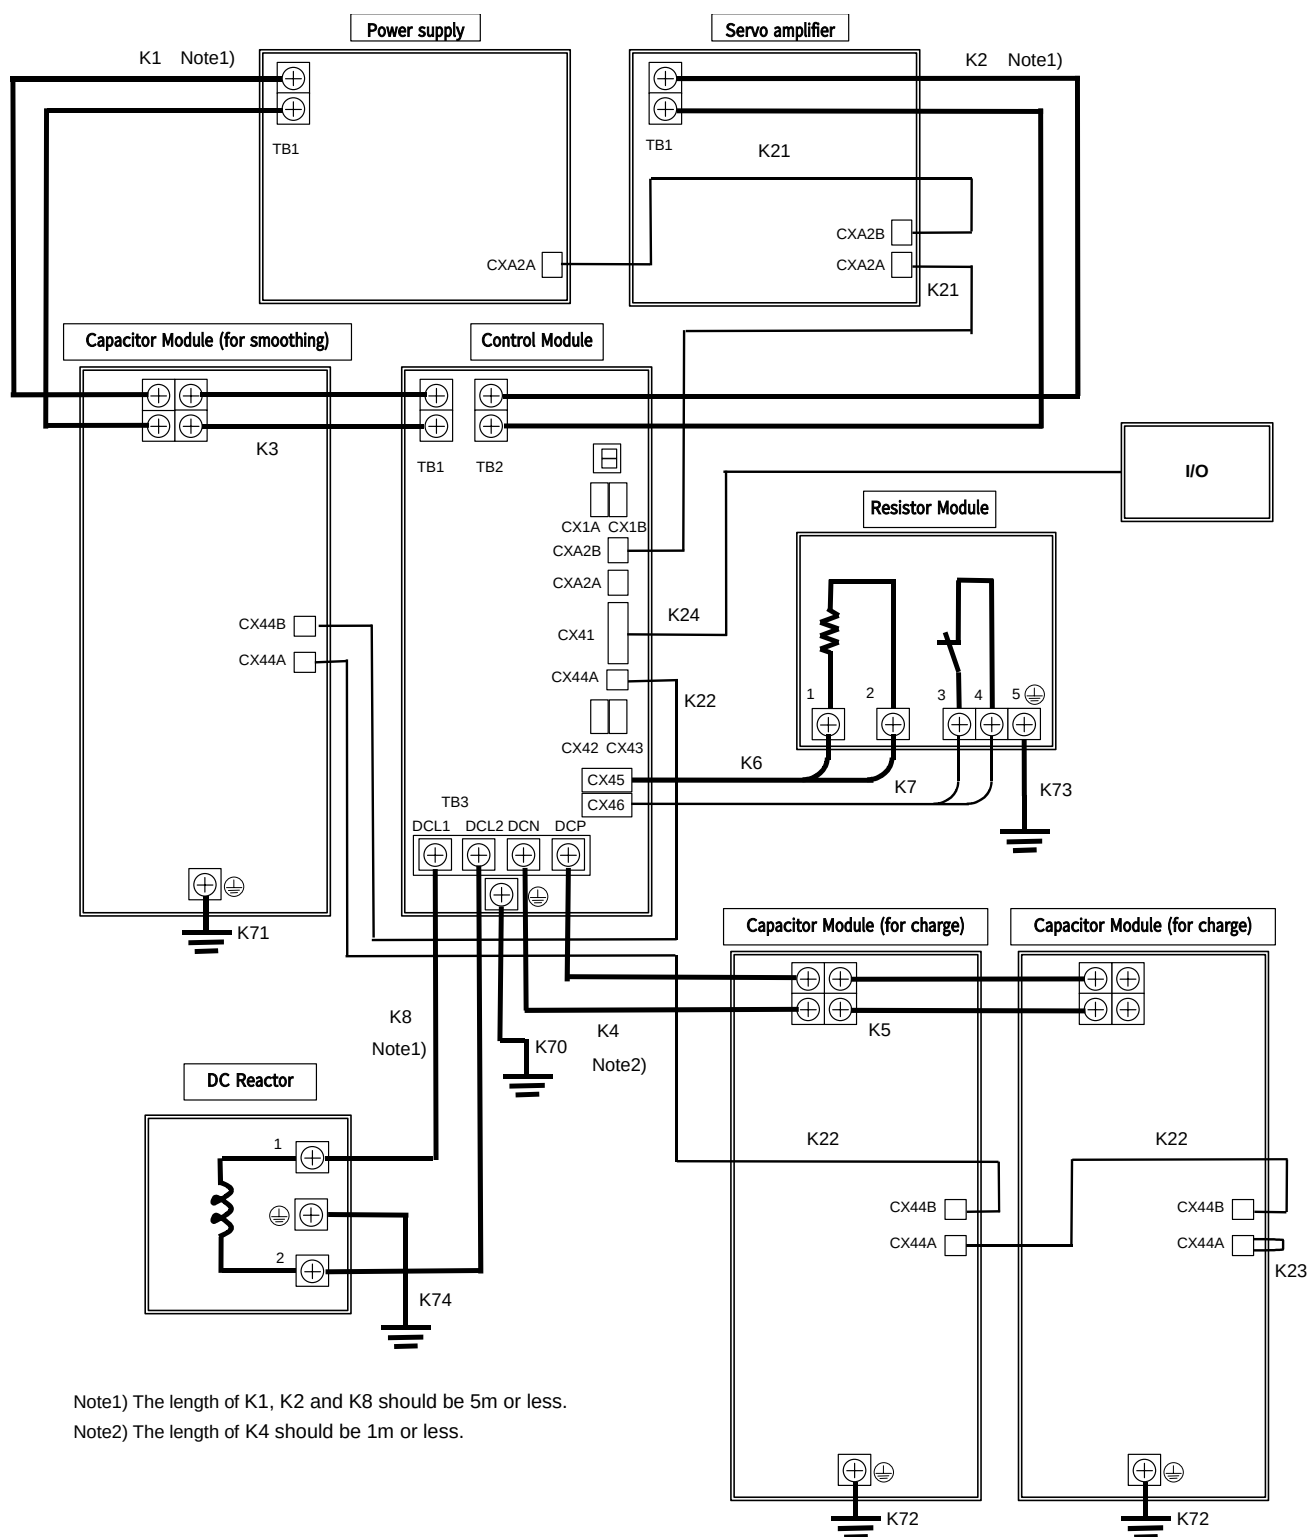


|       |      |        |             |                                   |             |
|-------|------|--------|-------------|-----------------------------------|-------------|
|       |      |        |             | TITLE                             |             |
|       |      |        |             | Energy Charge Module DESCRIPTIONS |             |
|       |      |        |             | DRAW. NO. B-65282EN/06-02         | CUST.       |
| EDIT. | DATE | DESIG. | DESCRIPTION | FANUC LTD                         | SHEET 27/36 |

## 7.2 Cable connection details

### 7.2.1 Connection of cables K1, K2 and K3 (Connection of DC link)

- Cable K1: The connection between "Power supply" and "Capacitor Module (for smoothing)"
- Cable K2: The connection between "Servo amplifier" and "Control Module"
- Cable K3: The connection between "Control Module" and "Capacitor Module (for smoothing)"
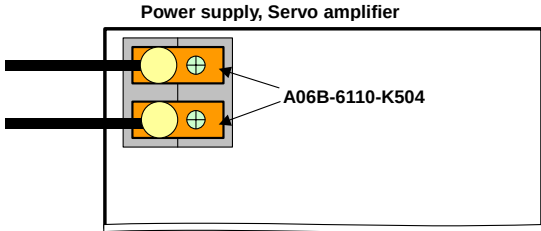
| Item           | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                  |                               |                |
|----------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------|-------------------------------|----------------|
| Size           | Effective current of DC link                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Average output of motor (Note 1) | Heat-resistant cable (Note 2) | AWG            |
|                | 92Arms or less                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 23kW or less                     | 22 mm <sup>2</sup> or more    | AWG4 or more   |
|                | 112rms or less                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 29kW or less                     | 30 mm <sup>2</sup> or more    | AWG2 or more   |
|                | 131Arms or less                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 33kW or less                     | 38 mm <sup>2</sup> or more    | AWG1 or more   |
|                | 155Arms or less                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 40kW or less                     | 50 mm <sup>2</sup> or more    | AWG1/0 or more |
|                | (Note 1) The relation between the effective current of DC link and the average output of motor depends on the operational pattern of the motor. So these values are for reference.<br>(Note 2) Fire-retardant polyflex wire (heat-resistant 105°C) or equivalent to LMFC manufactured by The Furukawa Electric Co., Ltd.<br>(Note 3) The cable size must be selected according to a user's environment and requirements.                                                                                                                                                                                                                                                                                                                                                                                               |                                  |                               |                |
| Terminal screw | M6                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                                  |                               |                |
| Rigid torque   | 3.5-4.5Nm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                  |                               |                |
| Consideration  | [Connection of K1 and K2] <ul style="list-style-type: none"> <li>• Line length should use 5m or less.</li> <li>• Two cables must be made into a twisted pair.</li> <li>• K1 and K2 separates from a signal line and must be wired.</li> <li>• The metal plate (A06B-6110-K504) must be attached to DC link terminal of Power supply (300mm) width and Servo amplifier (300mm).</li> </ul> <div style="text-align: center;">  </div><br>[Connection of K3] <ul style="list-style-type: none"> <li>• A Capacitor Module (for smoothing) must be attached to the left side of a Control Module without a gap.</li> <li>• In the case of the wire size of K3 is 22mm<sup>2</sup>, the short bar A06B-6078-K804 can be used.</li> </ul> |                                  |                               |                |

|       |      |        |             |                                   |             |
|-------|------|--------|-------------|-----------------------------------|-------------|
|       |      |        |             | TITLE                             |             |
|       |      |        |             | Energy Charge Module DESCRIPTIONS |             |
|       |      |        |             | DRAW. NO. B-65282EN/06-02         | CUST.       |
| EDIT. | DATE | DESIG. | DESCRIPTION | FANUC LTD                         | SHEET 28/36 |



### 7.2.2 Connection of cable K4

- Cable K4: The connection between "Control Module" and "Capacitor Module (for charge)"

| Item           | Description                                                                                                                                    |              |
|----------------|------------------------------------------------------------------------------------------------------------------------------------------------|--------------|
| Cable size     | Heat-resistant cable (Note 1)                                                                                                                  | AWG          |
|                | 22 mm <sup>2</sup> or more                                                                                                                     | AWG4 or more |
|                | (Note 1) Fire-retardant polyflex wire (heat-resistant 105°C) or equivalent to LMFC manufactured by The Furukawa Electric Co., Ltd.             |              |
| Terminal screw | M6                                                                                                                                             |              |
| Rigid torque   | 3.5-4.5Nm                                                                                                                                      |              |
| Consideration  | <ul style="list-style-type: none"> <li>• Line length should use 1m or less.</li> <li>• Two cables must be made into a twisted pair.</li> </ul> |              |

### 7.2.3 Connection of cable K5

- Cable K5: Connection between "Capacitor Modules (for charge)"

| Item           | Description                                                                                                                                                                                                                                           |                               |              |
|----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------|--------------|
| Cable size     | Short bar (Note 1)                                                                                                                                                                                                                                    | Heat-resistant cable (Note 2) | AWG          |
|                | A06B-6078-K800                                                                                                                                                                                                                                        | 22 mm <sup>2</sup> or more    | AWG4 or more |
|                | (Note 1) In the case of Capacitor Modules are attached without a gap, the short bar A06B-6078-K800 can be used.<br>(Note 2) Fire-retardant polyflex wire (heat-resistant 105°C) or equivalent to LMFC manufactured by The Furukawa Electric Co., Ltd. |                               |              |
| Terminal screw | M6                                                                                                                                                                                                                                                    |                               |              |
| Rigid torque   | 3.5-4.5Nm                                                                                                                                                                                                                                             |                               |              |
| Consideration  | <ul style="list-style-type: none"> <li>• In the case of Capacitor Modules (for charge) cannot be installed without a gap, the length of the cable should be 1m or less and two cables must be made into a twisted pair.</li> </ul>                    |                               |              |

|       |      |        |             |                                   |             |
|-------|------|--------|-------------|-----------------------------------|-------------|
|       |      |        |             | TITLE                             |             |
|       |      |        |             | Energy Charge Module DESCRIPTIONS |             |
|       |      |        |             | DRAW. NO. B-65282EN/06-02         | CUST.       |
| EDIT. | DATE | DESIG. | DESCRIPTION | FANUC LTD                         | SHEET 29/36 |

#### 7.2.4 Connection of cables K6 and K7

- Cable K6: Connection between "Control Module" and "The resistor built in Resistor Module"
- Cable K7: Connection between "Control Module" and "The thermostat built in Resistor Module"

| Cable Identifier | Conformity cable              | Housing (Note 1)       | Contact (Note 1)   | Connection tool (Note 1) |
|------------------|-------------------------------|------------------------|--------------------|--------------------------|
| K6 (Note 2)      | 5.5 mm <sup>2</sup> (Note 3)  | Key: Y-Y<br>2-917807-2 | M size<br>316041-6 | M size<br>234171-1       |
| K7 (Note 2)      | 1.25 mm <sup>2</sup> (Note 3) |                        | S size<br>316040-6 | S size<br>234170-1       |

(Note 1) The housing and the contact of a connector are D-5000 series of Tyco electronics AMP.

(Note 2) Cables K6 and K7 should wire without bundling.



(Note 3) Fire-retardant polyflex wire (heat-resistant 105°C) or equivalent to LMFC manufactured by the Furukawa Electric Co., Ltd  
or Two-conductor polyvinyl heavy-duty power cable (JIS C3312) (heat-resistant 60°C)

#### ⚠ WARNING)

- Control Module should be damaged if the resistor is conversely connected with the thermostat. Please be careful with the connection.
- Please be sure to check the following with a tester before inserting the connector in Control Module.

(1) The resistance between B1-B2 of the connector should be 30ohm±5%.

(2) The resistance between A1-A2 of the connector should be 0.5ohms or less.

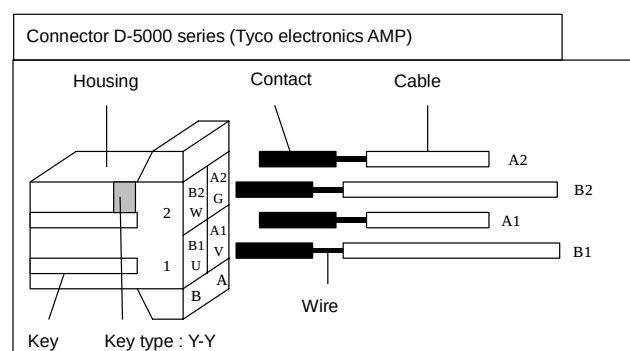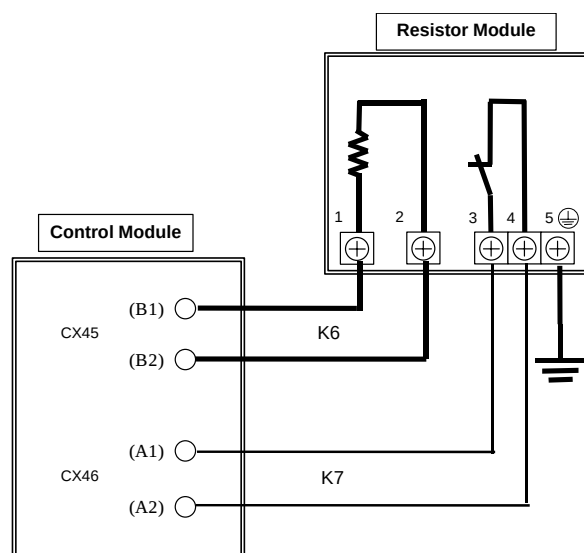

|       |      |        |             |                                   |             |
|-------|------|--------|-------------|-----------------------------------|-------------|
|       |      |        |             | TITLE                             |             |
|       |      |        |             | Energy Charge Module DESCRIPTIONS |             |
|       |      |        |             | DRAW. NO. B-65282EN/06-02         | CUST.       |
| EDIT. | DATE | DESIG. | DESCRIPTION | FANUC LTD                         | SHEET 30/36 |

### 7.2.5 Connection of cable K8

- Cable K8: Connection between "Control Module" and "DC Reactor"

| Item           | Description                                                                                                                                |                                 |
|----------------|--------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------|
| Cable size     | Heat-resistant cable (Note 1)                                                                                                              | AWG                             |
|                | 22 mm <sup>2</sup> or more                                                                                                                 | AWG2 or more                    |
|                | (Note 1) Fire-retardant polyflex wire (heat-resistant 105°C) or equivalent to LMFC manufactured by the Furukawa Electric Co., Ltd          |                                 |
| Terminal screw | The Control Module side: M6                                                                                                                | The DC Reactor side: M8         |
| Rigid torque   | The Control Module side: 3.5 to 4.5 Nm                                                                                                     | The DC Reactor side: 8.5-9.5 Nm |
| Consideration  | <ul style="list-style-type: none"> <li>Line length should use 5m or less.</li> <li>Two cables must be made into a twisted pair.</li> </ul> |                                 |

### 7.2.6 Connections of Cable K70, K71, K72, K73 and K74

- Cable K70-K74: For grounding connection

| Cable | Section                          | Cable size (Note 1)                                  | Terminal screw | Rigid torque |
|-------|----------------------------------|------------------------------------------------------|----------------|--------------|
| K70   | Control Module                   | 16 mm <sup>2</sup> or more (K1: 22 mm <sup>2</sup> ) | M5             | 2.0-2.5Nm    |
| K71   | Capacitor Module (For smoothing) | 16 mm <sup>2</sup> or more (K1: 22mm <sup>2</sup> )  | M5             | 2.0-2.5Nm    |
| K72   | Capacitor Module (For charge)    | 16 mm <sup>2</sup> or more (K4: 22 mm <sup>2</sup> ) | M5             | 2.0-2.5Nm    |
| K73   | Resistor Module                  | 5.5 mm <sup>2</sup> or more                          | M4             | 1.1-1.5Nm    |
| K74   | DC Reactor                       | 16 mm <sup>2</sup> or more (K8: 22 mm <sup>2</sup> ) | M8             | 8.5-9.5 Nm   |

(Note 1) The cable size for grounding depends on the cable size of a power line (K1, K4, K8).  
 In the case of the cable size is 22 mm<sup>2</sup>, the cable size is 16 mm<sup>2</sup> or more.  
 In the other case, the cable size for grounding can be selected according to the following table.

| Cable size of Power line S (mm <sup>2</sup> ) | Cable size of groundings (mm <sup>2</sup> ) |
|-----------------------------------------------|---------------------------------------------|
| $S \leq 5.5$                                  | 5.5 or more                                 |
| $5.5 < S \leq 16$                             | More than S                                 |
| $16 < S \leq 35$                              | 16 or more                                  |
| $35 < S$                                      | More than S/2                               |

|       |      |        |             |                                   |             |
|-------|------|--------|-------------|-----------------------------------|-------------|
|       |      |        |             | TITLE                             |             |
|       |      |        |             | Energy Charge Module DESCRIPTIONS |             |
|       |      |        |             | DRAW. NO. B-65282EN/06-02         | CUST.       |
| EDIT. | DATE | DESIG. | DESCRIPTION | FANUC LTD                         | SHEET 31/36 |

### 7.2.7 Connection of cable K21

- Cable K21: Connection of the interface signal between "Servo amplifier" and a "Control Module"


| Cable Identifier | Conformity cable             | Instruction outer daimeter | Housing (Note 1) | Contact (Note 1) | Connection tool (Note 1) |
|------------------|------------------------------|----------------------------|------------------|------------------|--------------------------|
| K21 (Note 2)     | 0.5 mm <sup>2</sup> or AWG20 | 1.08-2.83 mm               | 1-1318119-4      | 1318107-1        | 91595-1                  |

(Note 1) The housing and the contact of a connector are D-2100 series of Tyco electronics AMP.

Two connectors and 16 contacts are required.

(Note 2) (B3) BATL is the connection of a battery for the absolute Pulsecoder. Refer to FANUC SERVO AMPLIFIER  $\alpha$ i series DESCRIPTIONS B-65282EN.

(Note 3) Cable K21and power line should be wired without bundling..

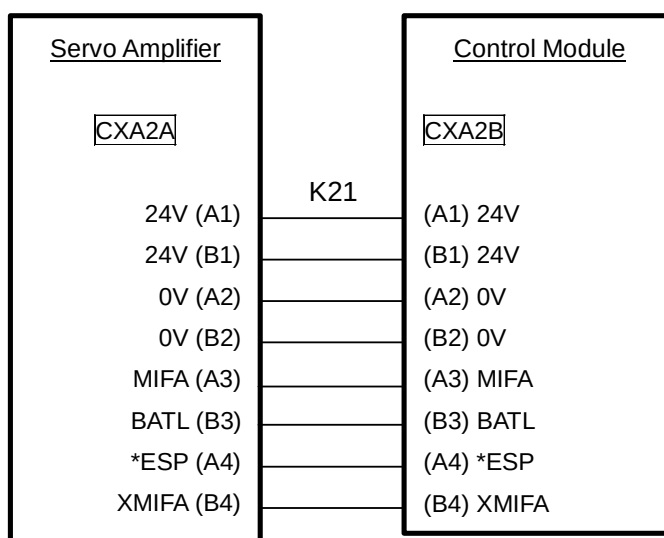

|       |      |        |             |                                   |                 |
|-------|------|--------|-------------|-----------------------------------|-----------------|
|       |      |        |             | TITLE                             |                 |
|       |      |        |             | Energy Charge Module DESCRIPTIONS |                 |
|       |      |        |             | DRAW. NO. B-65282EN/06-02         | CUST.           |
| EDIT. | DATE | DESIG. | DESCRIPTION | FANUC LTD                         | SHEET 3 2 / 3 6 |

### 7.2.8 Connection of cables K22 and K23

- Cable K22: Connection between "Control Module" and "The signal of the fuse blowing in Capacitor Module"
- Cable K23: Dummy connector for the termination of the signal of the fuse blowing.


| Cable Identifier       | Conformity cable   | Instruction outer daimeter | Housing (Note 1) | Contact (Note 1) | Connection tool (Note 1) |
|------------------------|--------------------|----------------------------|------------------|------------------|--------------------------|
| K22<br>K23<br>(Note 2) | 0.5mm2<br>or AWG20 | 1.11-1.87mm                | 1-1318120-3      | 1318107-1        | 91595-1                  |

(Note 1) The housing and the contact of a connector are D-2100 series of Tyco electronics AMP.

AS for K22, two connectors and six contacts are required.

AS for K23, one connector and two contacts are required.

(Note 2) Cable K22 and power line should be wired without bundling.

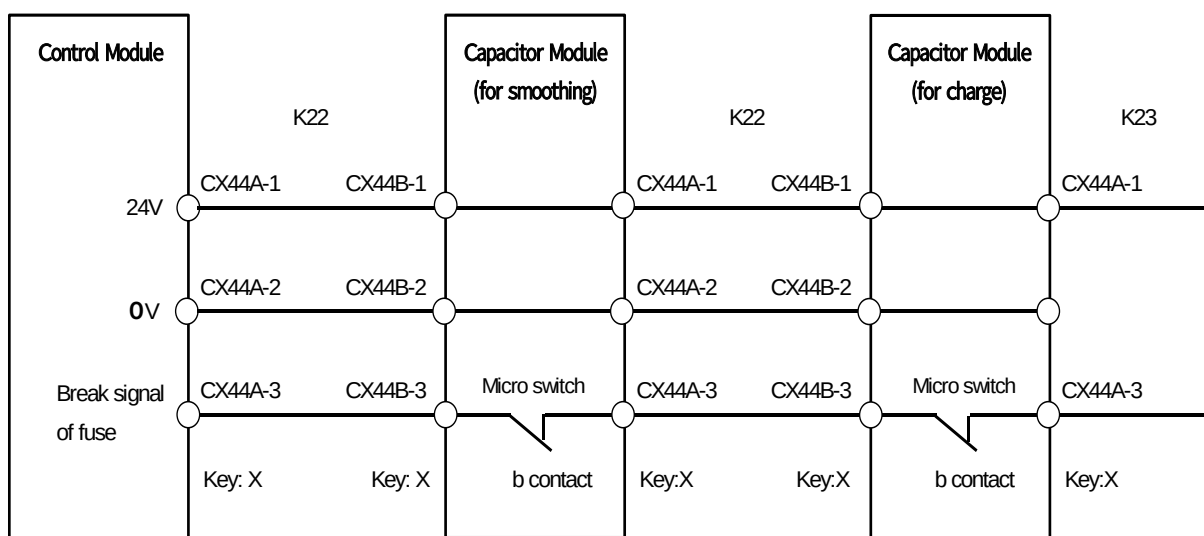

|       |      |        |             |                                   |             |
|-------|------|--------|-------------|-----------------------------------|-------------|
|       |      |        |             | TITLE                             |             |
|       |      |        |             | Energy Charge Module DESCRIPTIONS |             |
|       |      |        |             | DRAW. NO. B-65282EN/06-02         | CUST.       |
| EDIT. | DATE | DESIG. | DESCRIPTION | FANUC LTD                         | SHEET 33/36 |

### 7.2.9 Cable K24

- Cable K24: Connection of the interface signal between a "Control Module" and "I/O"


| Cable Identifier | Conformity cable | Instruction outer daimeter | Connector (Note 1) | Electric contact point (Note 1) | Sticking-by-pres sure tool (Note 1) |
|------------------|------------------|----------------------------|--------------------|---------------------------------|-------------------------------------|
| K24 (Note 2)     | 0.5mm2 or AWG20  | 1.11-1.87mm                | 1-1318118-9        | 1318107-1                       | 91595-1                             |

(Note 1) The housing and the contact of a connector are D-2100 series of Tyco electronics AMP.

One connector is required. The number of contact is ordered according to the using signals.

(Note 2) Cable K24 and power line should be wired without bundling.

(Note 3) In case of the distance between Servo amplifier, a Control Module, and I/O is long (for example, by the reason that modules are mounted in separated cabinet ), FANUC I/O Unit-Model A which is insulated type is recommended in order to prevent malfunction of the signal by a noise.

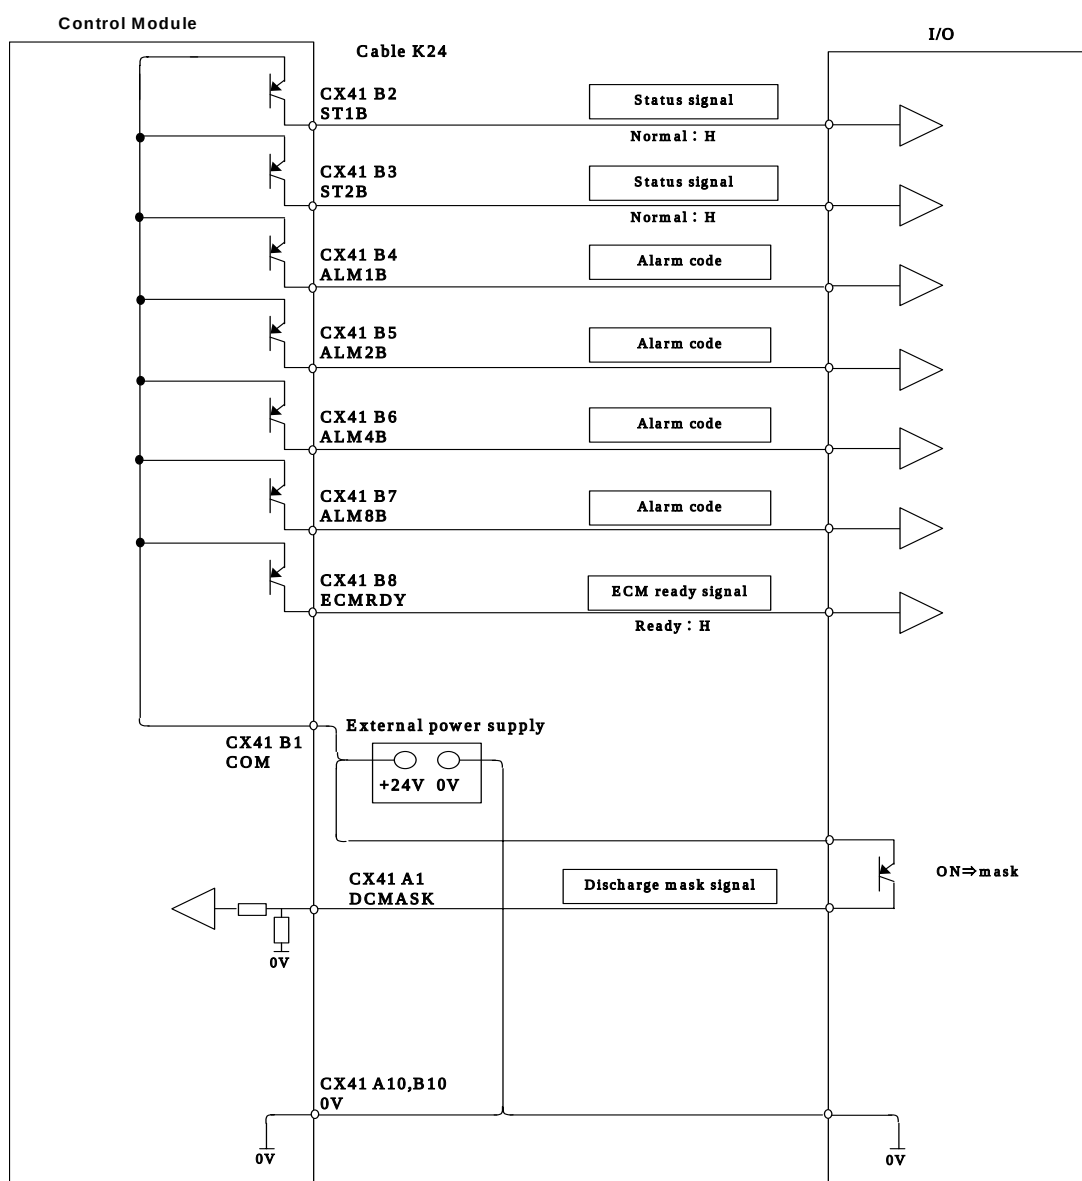


|       |      |        |             |                                   |                 |
|-------|------|--------|-------------|-----------------------------------|-----------------|
|       |      |        |             | TITLE                             |                 |
|       |      |        |             | Energy Charge Module DESCRIPTIONS |                 |
|       |      |        |             | DRAW. NO. B-65282EN/06-02         | CUST.           |
| EDIT. | DATE | DESIG. | DESCRIPTION | FANUC LTD                         | SHEET 3 4 / 3 6 |

[Input signal specifications (DCMASK, SPSTP)]

|                                                |                                                            |
|------------------------------------------------|------------------------------------------------------------|
| Contact capacity                               | DC24V+10% 10mA                                             |
| Voltage drop between contacts which are closed | Less than 2V<br>(Voltage drop of a cable is also included) |

[Output signal specifications (ST\*B, ALM\*B, ECMRDY)]

|                                  |                                       |
|----------------------------------|---------------------------------------|
| Maximum load current             | 200mA or less                         |
| Maximum voltage                  | 24V+20% or less                       |
| Saturation voltage of transistor | 1V or less (at load current is 200mA) |
| Leakage current of transistor    | 20μA or less                          |

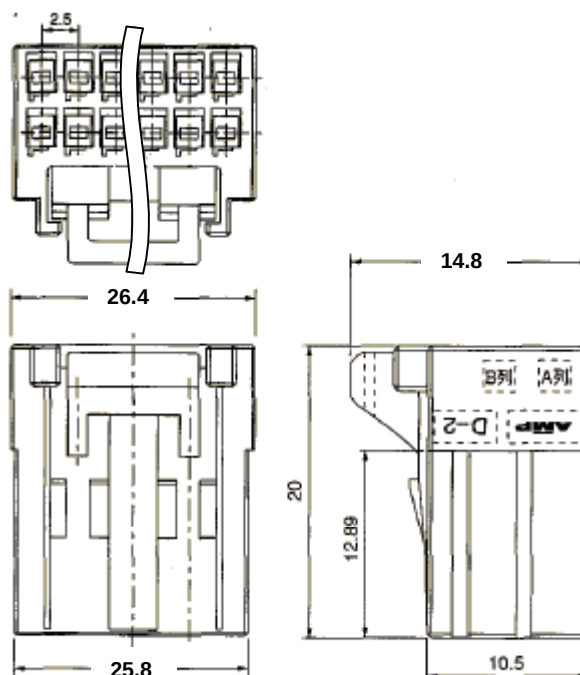

|       |      |        |             |                                   |                 |
|-------|------|--------|-------------|-----------------------------------|-----------------|
|       |      |        |             | TITLE                             |                 |
|       |      |        |             | Energy Charge Module DESCRIPTIONS |                 |
|       |      |        |             | DRAW. NO. B-65282EN/06-02         | CUST.           |
| EDIT. | DATE | DESIG. | DESCRIPTION | FANUC LTD                         | SHEET 3 5 / 3 6 |

#### 7.2.10 Separation of power line and signal line

In order to prevent the influence of the noise from a power line to a signal line, power line and signal line should be wired without bundling.

| Line name   | Cable name                 |
|-------------|----------------------------|
| Power line  | K1, K2, K3, K4, K5, K6, K8 |
| Signal line | K7, K21, K22, K24          |

#### 7.2.11 Short bar and Connector

[Short bar]

| Cable name | Remarks                                                                                                         | Specifications                 |
|------------|-----------------------------------------------------------------------------------------------------------------|--------------------------------|
| K1, K2     | The metal plate must be attached to DC link terminal of Power supply (300mm) width and Servo amplifier (300mm). | A06B-6110-K504<br>2 Short bars |
| K3         | The connection between "DC link of Control Module" and "Capacitor Module (for smoothing)"                       | A06B-6078-K804<br>2 Short bars |
| K5         | Connection between "Capacitor Modules (for charge)"                                                             | A06B-6078-K800<br>2 Short bars |

[Connector]

| Cable name | Remarks                                                                                    | Specifications                                                   |
|------------|--------------------------------------------------------------------------------------------|------------------------------------------------------------------|
| K6, K7     | Connection between "Control Module" and "Resistor Module"                                  | A06B-6110-K505<br>Housing: 1<br>Contact (M): 2<br>Contact (S): 2 |
| K21        | Connection of the interface signal between "Servo amplifier" and a "Control Module"        | A06B-6110-K210<br>Housing: 1<br>Contact: 8                       |
| K22        | Connection between "Control Module" and "The break signal of the fuse in Capacitor Module" | A06B-6110-K506<br>Housing: 1<br>Contact: 3                       |
| K23        | Dummy connector for the termination of the break signal of the fuse.                       | A06B-6130-K202<br>Housing: 1<br>Contact: 2                       |
| K24        | Connection of the interface signal between a "Control Module" and "I/O"                    | A06B-6110-K508<br>Housing: 1<br>Contact: 13                      |

|       |      |        |             |                                   |             |
|-------|------|--------|-------------|-----------------------------------|-------------|
|       |      |        |             | TITLE                             |             |
|       |      |        |             | Energy Charge Module DESCRIPTIONS |             |
|       |      |        |             | DRAW. NO. B-65282EN/06-02         | CUST.       |
| EDIT. | DATE | DESIG. | DESCRIPTION | FANUC LTD                         | SHEET 36/36 |