

# Rexroth IndraDrive Cs Drive Systems with HCS01

**R911322210**  
Edition 03

## Project Planning Manual



|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Title</b>                    | Rexroth IndraDrive Cs<br>Drive Systems with HCS01                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Type of Documentation</b>    | Project Planning Manual                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Document Typecode</b>        | DOK-INDRV*-HCS01*****-PR03-EN-P                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Internal File Reference</b>  | RS-898e3e765ff4d61d0a6846a000329fdd-4-en-US-3                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Purpose of Documentation</b> | <ul style="list-style-type: none"> <li>• Overview information of the Rexroth IndraDrive Cs drive system</li> <li>• Description of the allowed combinations of Rexroth IndraDrive Cs system components</li> <li>• Selection of the system components of the Rexroth IndraDrive Cs drive system</li> <li>• Specification applying to all components (ambient and operating conditions)</li> <li>• Application description of system characteristics</li> </ul> |

**Record of Revision**

| Edition | Release Date | Notes                         |
|---------|--------------|-------------------------------|
| 01      | 08/2009      | -                             |
| 02      | 07/2012      | -                             |
| 03      | 12/2013      | See index entry<br>"Editions" |

**Copyright** © Bosch Rexroth AG 2013

This document, as well as the data, specifications and other information set forth in it, are the exclusive property of Bosch Rexroth AG. It may not be reproduced or given to third parties without its consent.

**Liability** The specified data is intended for product description purposes only and shall not be deemed to be a guaranteed characteristic unless expressly stipulated in the contract. All rights are reserved with respect to the content of this documentation and the availability of the product.

**Published by** Bosch Rexroth AG

Bgm.-Dr.-Nebel-Str. 2 ■ 97816 Lohr a. Main, Germany

Phone +49 9352 18 0 ■ Fax +49 9352 18 8400

<http://www.boschrexroth.com/>

Dept. DC-IA/EDY (MW), DC-IA/EDY1 (RB/US/BB), DC-IA/EDY2 (CG, MR), DC-IA/EDY4 (CR), DC-IA/EDH1 (LM)

# Table of Contents

|                                                                                                 | Page      |
|-------------------------------------------------------------------------------------------------|-----------|
| <b>1 System Presentation.....</b>                                                               | <b>7</b>  |
| 1.1 Rexroth IndraDrive Cs Drive Range.....                                                      | 7         |
| 1.1.1 Overview – Rexroth IndraDrive Cs.....                                                     | 7         |
| 1.1.2 Target Applications.....                                                                  | 8         |
| 1.1.3 Features.....                                                                             | 9         |
| Functional Features.....                                                                        | 9         |
| Performance Features.....                                                                       | 11        |
| Combination of HCS01 and MSM/MSK.....                                                           | 12        |
| Interfaces.....                                                                                 | 12        |
| Supported Encoder Systems.....                                                                  | 12        |
| 1.2 System Configuration.....                                                                   | 14        |
| 1.2.1 System Structure.....                                                                     | 14        |
| 1.2.2 Components of the System.....                                                             | 15        |
| Drive Controllers HCS01.....                                                                    | 15        |
| Control Panel HAP01.....                                                                        | 16        |
| Firmware.....                                                                                   | 17        |
| 1.2.3 About This Documentation.....                                                             | 18        |
| Purpose.....                                                                                    | 18        |
| Editions.....                                                                                   | 19        |
| Documentations.....                                                                             | 21        |
| Your Feedback.....                                                                              | 22        |
| <b>2 Important Directions for Use .....</b>                                                     | <b>23</b> |
| 2.1 Appropriate Use .....                                                                       | 23        |
| 2.1.1 Introduction.....                                                                         | 23        |
| 2.1.2 Areas of Use and Application.....                                                         | 23        |
| 2.2 Inappropriate Use.....                                                                      | 24        |
| <b>3 Safety Instructions for Electric Drives and Controls.....</b>                              | <b>25</b> |
| 3.1 Definitions of Terms.....                                                                   | 25        |
| 3.2 General Information.....                                                                    | 26        |
| 3.2.1 Using the Safety Instructions and Passing Them on to Others.....                          | 26        |
| 3.2.2 Requirements for Safe Use.....                                                            | 26        |
| 3.2.3 Hazards by Improper Use.....                                                              | 27        |
| 3.3 Instructions with Regard to Specific Dangers.....                                           | 28        |
| 3.3.1 Protection Against Contact with Electrical Parts and Housings.....                        | 28        |
| 3.3.2 Protective Extra-Low Voltage as Protection Against Electric Shock .....                   | 29        |
| 3.3.3 Protection Against Dangerous Movements.....                                               | 30        |
| 3.3.4 Protection Against Magnetic and Electromagnetic Fields During Operation and Mounting..... | 31        |
| 3.3.5 Protection Against Contact with Hot Parts.....                                            | 32        |
| 3.3.6 Protection During Handling and Mounting.....                                              | 32        |
| 3.3.7 Battery Safety.....                                                                       | 32        |
| 3.3.8 Protection Against Pressurized Systems.....                                               | 33        |

## Table of Contents

|          | Page                                                                                |
|----------|-------------------------------------------------------------------------------------|
| 3.4      | Explanation of Signal Words and the Safety Alert Symbol..... 33                     |
| <b>4</b> | <b>Combining the Individual Components..... 35</b>                                  |
| 4.1      | Documentations..... 35                                                              |
| 4.2      | Brief Description of the Individual Components..... 35                              |
| 4.2.1    | HCS01 - Brief Description and Design..... 35                                        |
| 4.3      | Configuring the Drive System..... 35                                                |
| 4.3.1    | Converter..... 35                                                                   |
| 4.3.2    | Functional Equipment..... 37                                                        |
| 4.3.3    | Firmware..... 38                                                                    |
|          | Firmware and Device Types..... 38                                                   |
|          | Firmware Types..... 38                                                              |
|          | Firmware Variants..... 39                                                           |
| 4.3.4    | Motors..... 40                                                                      |
|          | IndraDyn..... 40                                                                    |
|          | Third-Party Motors..... 40                                                          |
| 4.3.5    | Cables..... 45                                                                      |
|          | Motor power cables..... 45                                                          |
|          | Encoder Cables..... 46                                                              |
| 4.4      | Installation Conditions..... 47                                                     |
| 4.4.1    | Ambient and Operating Conditions..... 47                                            |
| 4.4.2    | Control Cabinet Design and Cooling..... 49                                          |
| 4.4.3    | UL Ratings..... 50                                                                  |
| 4.4.4    | Compatibility With Foreign Matters..... 51                                          |
| 4.5      | Mechanical Project Planning..... 51                                                 |
| 4.5.1    | Drive Controller..... 51                                                            |
|          | Dimensional Drawings..... 51                                                        |
|          | Dimensions, Mass, Insulation, Sound Pressure Level..... 54                          |
|          | Temperatures, Cooling, Power Dissipation, Distances..... 55                         |
|          | Mounting Positions of Components..... 59                                            |
| 4.6      | Electrical Project Planning..... 60                                                 |
| 4.6.1    | Overall Connection Diagram..... 60                                                  |
| 4.6.2    | Project Planning of Control Voltage..... 60                                         |
|          | Control Voltage for Drive Systems..... 60                                           |
|          | Sizing the Control Voltage Supply..... 61                                           |
| 4.6.3    | Mains Connection ..... 66                                                           |
|          | Residual-Current-Operated Circuit Breakers (RCD, RCCB) as Additional Fusing..... 66 |
|          | Mains Types..... 69                                                                 |
|          | Type of Mains Connection..... 72                                                    |
|          | Mains Connected Load and Mains Current ..... 76                                     |
|          | Dimensioning the Line Cross Sections and Fuses ..... 77                             |
|          | Dimensioning and Selecting the Mains Transformer..... 83                            |
|          | Dimensioning the Mains Filter..... 84                                               |
|          | Selecting the Mains Filter..... 86                                                  |
|          | Determining the Mains Choke..... 90                                                 |
|          | Dimensioning the Mains Contactor..... 90                                            |



## Table of Contents

|                                                                            | Page       |
|----------------------------------------------------------------------------|------------|
| Combining Transformer, Mains Filter and Mains Choke.....                   | 90         |
| Control Circuit for the Mains Connection.....                              | 91         |
| 4.6.4 DC Bus Coupling.....                                                 | 92         |
| Requirements for DC Bus Coupling.....                                      | 92         |
| Central Supply and DC Bus Coupling.....                                    | 92         |
| Group Supply and DC Bus Coupling.....                                      | 93         |
| Implementation of DC Bus Coupling.....                                     | 95         |
| DC Bus Capacitor Unit.....                                                 | 98         |
| Module Bus and Parameterization.....                                       | 99         |
| Bb Relay Contact.....                                                      | 99         |
| 4.7 Acceptance Tests and Approvals.....                                    | 100        |
| <b>5 Condition as Supplied, Identification, Transport and Storage.....</b> | <b>103</b> |
| 5.1 Condition as Supplied.....                                             | 103        |
| 5.1.1 Factory-Side Test.....                                               | 103        |
| Voltage Test and Insulation Resistance Test.....                           | 103        |
| 5.1.2 Customer-Side Test.....                                              | 103        |
| 5.2 Identification.....                                                    | 104        |
| 5.2.1 Type Plates.....                                                     | 104        |
| Arrangement.....                                                           | 104        |
| Design.....                                                                | 104        |
| 5.2.2 Scope of Supply.....                                                 | 105        |
| 5.3 Transport of the Components.....                                       | 106        |
| 5.4 Storage of the Components.....                                         | 106        |
| <b>6 Mounting and Installation.....</b>                                    | <b>107</b> |
| 6.1 Mounting HCS01 Devices in the Control Cabinet.....                     | 107        |
| 6.2 Electrical Connection.....                                             | 108        |
| 6.2.1 Overall Connection Diagram.....                                      | 108        |
| 6.2.2 Connection Points.....                                               | 109        |
| Arrangement of the Connection Points HCS01.....                            | 109        |
| 6.2.3 On-Board Connection Points.....                                      | 112        |
| Connection of Equipment Grounding Conductor.....                           | 112        |
| X3, Mains Connection.....                                                  | 114        |
| X4, Motor Encoder Connection.....                                          | 117        |
| X5, Motor Connection.....                                                  | 119        |
| X6, Motor Temperature Monitoring and Motor Holding Brake .....             | 123        |
| X9, Integrated/External Braking Resistor.....                              | 126        |
| X13, 24V Supply (Control Voltage).....                                     | 128        |
| X24 P2, X25 P1, Communication.....                                         | 129        |
| X26, Engineering Interface.....                                            | 131        |
| X31, Digital Inputs, Digital Output.....                                   | 132        |
| X32, Analog Input.....                                                     | 133        |
| X47, Bb Relay Contact, Module Bus.....                                     | 134        |
| X77, L+ L-, DC Bus Connection.....                                         | 136        |

## Table of Contents

|          | Page                                                                                                                        |
|----------|-----------------------------------------------------------------------------------------------------------------------------|
|          | Shield Connection..... 140                                                                                                  |
|          | Ground Connection..... 142                                                                                                  |
| 6.2.4    | Optional Connection Points..... 143                                                                                         |
|          | X8, Optional Encoder (Option EC)..... 143                                                                                   |
|          | X8, Encoder Emulation (Option EM)..... 143                                                                                  |
|          | X22 P2, X23 P1, Multi-Ethernet / sercos III (ET Option)..... 145                                                            |
|          | X30, PROFIBUS PB..... 146                                                                                                   |
|          | X37, Digital Inputs/Outputs (Option DA)..... 149                                                                            |
|          | X38, Analog Inputs/Outputs (Option DA)..... 150                                                                             |
|          | X41, Safety Technology Safe Motion..... 151                                                                                 |
|          | X42, X43, Safety Technology Safe Motion (Communication)..... 152                                                            |
|          | X49, Optional Safety Technology L3 or L4..... 153                                                                           |
|          | X61, CANopen (CN Option)..... 154                                                                                           |
| 6.2.5    | EMC Measures for Design and Installation..... 155                                                                           |
|          | Rules for Design of Installations With Drive Controllers in Compliance With EMC..... 155                                    |
|          | EMC-Optimal Installation in Facility and Control Cabinet..... 156                                                           |
|          | Ground Connections..... 162                                                                                                 |
|          | Installing Signal Lines and Signal Cables..... 163                                                                          |
|          | General Measures of Radio Interference Suppression for Relays, Contactors, Switches, Chokes<br>and Inductive Loads..... 164 |
| <b>7</b> | <b>Technical Data of the Components..... 165</b>                                                                            |
| 7.1      | Control Section..... 165                                                                                                    |
| 7.1.1    | EC - Standard Encoder Evaluation..... 165                                                                                   |
|          | Supported Encoder Systems..... 165                                                                                          |
|          | Encoder Type..... 165                                                                                                       |
|          | Power Supply..... 179                                                                                                       |
|          | Encoder Cable Length..... 179                                                                                               |
|          | Technical Data of Encoder Evaluation EC..... 181                                                                            |
|          | Signal Assignment to the Actual Position Value..... 183                                                                     |
| 7.1.2    | EM - Encoder Emulation..... 185                                                                                             |
|          | Cables..... 185                                                                                                             |
|          | Incremental Encoder Emulation..... 185                                                                                      |
|          | Incremental Encoder Emulation with Signal Level Conversion..... 187                                                         |
|          | Absolute Encoder Emulation (SSI Format)..... 187                                                                            |
| 7.1.3    | ET - Multi-Ethernet..... 190                                                                                                |
|          | Display Elements..... 190                                                                                                   |
|          | Ethernet/IP..... 191                                                                                                        |
|          | EtherCAT..... 192                                                                                                           |
| 7.1.4    | PB - PROFIBUS..... 193                                                                                                      |
| 7.1.5    | CN - CANopen..... 194                                                                                                       |
| 7.1.6    | Sx - Safe Motion..... 195                                                                                                   |
|          | Display Elements..... 195                                                                                                   |
| 7.1.7    | Digital Inputs/Outputs..... 196                                                                                             |
|          | General Information..... 196                                                                                                |
|          | Digital Inputs..... 196                                                                                                     |

## Table of Contents

|                                                                                   | Page       |
|-----------------------------------------------------------------------------------|------------|
| Digital Outputs.....                                                              | 200        |
| 7.1.8 Analog Voltage Input.....                                                   | 204        |
| 7.1.9 Analog Current Input.....                                                   | 205        |
| 7.1.10 Analog Output.....                                                         | 206        |
| 7.1.11 Relay Contacts.....                                                        | 207        |
| Relay Contact Type 2.....                                                         | 207        |
| 7.2 Control Panel.....                                                            | 208        |
| 7.2.1 Design.....                                                                 | 208        |
| Standard Control Panel HAP01.1N.....                                              | 208        |
| ADVANCED Control Panel HAP01.1A.....                                              | 209        |
| 7.3 Power Section.....                                                            | 210        |
| 7.3.1 Control Voltage.....                                                        | 210        |
| 7.3.2 Mains Voltage.....                                                          | 211        |
| 7.3.3 DC Bus.....                                                                 | 218        |
| 7.3.4 Integrated Braking Resistor.....                                            | 220        |
| 7.3.5 Inverter.....                                                               | 221        |
| <b>8 Cables, Accessories, Additional Components.....</b>                          | <b>225</b> |
| 8.1 Overview.....                                                                 | 225        |
| 8.1.1 Cables.....                                                                 | 225        |
| 8.1.2 Accessories.....                                                            | 225        |
| 8.1.3 Additional Components.....                                                  | 226        |
| 8.2 Accessories.....                                                              | 227        |
| 8.2.1 Mounting and Connection Accessories (HAS09).....                            | 227        |
| 8.2.2 DC Bus Connector (RLS0778/K06).....                                         | 232        |
| 8.2.3 Battery Box for MSM Motors (SUP-E01-MSM-BATTERYBOX).....                    | 233        |
| 8.2.4 Battery and Refresh Resistor (SUP-E03-DKC*CS-BATTERY).....                  | 235        |
| 8.2.5 Encoder Cable for MSM Motors with Absolute Value Encoder (RKG0041).....     | 239        |
| Use.....                                                                          | 239        |
| Properties.....                                                                   | 240        |
| Project Planning.....                                                             | 241        |
| Installation.....                                                                 | 242        |
| Replacing the Device.....                                                         | 244        |
| 8.2.6 D-Sub Connector for Encoder Cable and Battery Connection (RGS0001/K01)..... | 245        |
| 8.2.7 RKB0011, Multi-Ethernet Cable.....                                          | 249        |
| 8.2.8 RKB0013, Multi-Ethernet Cable.....                                          | 250        |
| 8.2.9 Hall Sensor Adapter Box (SHL03.1-NNN-S-NNN).....                            | 251        |
| 8.2.10 Snap-On Ferrite (HAS05.1-015).....                                         | 257        |
| 8.3 Additional Components.....                                                    | 260        |
| 8.3.1 Transformers.....                                                           | 260        |
| General Information.....                                                          | 260        |
| Autotransformers for Drive Controllers.....                                       | 261        |
| 8.3.2 Mains Filters NFD / NFE.....                                                | 265        |
| Type Code NFE / NFD.....                                                          | 265        |
| Mechanical Data NFE / NFD.....                                                    | 266        |
| Electrical Data NFE / NFD.....                                                    | 268        |


## Table of Contents

|                                                           | Page       |
|-----------------------------------------------------------|------------|
| 8.3.3 Mains Chokes.....                                   | 270        |
| Type Code.....                                            | 270        |
| Type Plate.....                                           | 271        |
| HNL01.1E - Mains Chokes, Feeding .....                    | 272        |
| 8.3.4 External Braking Resistors HLR.....                 | 274        |
| Types.....                                                | 274        |
| Dimensions.....                                           | 275        |
| Installation.....                                         | 276        |
| 8.3.5 DC Bus Capacitor Units HLC.....                     | 277        |
| Type Code.....                                            | 277        |
| Technical Data.....                                       | 278        |
| Connection.....                                           | 279        |
| Operation.....                                            | 279        |
| <b>9 Environmental Protection and Disposal .....</b>      | <b>281</b> |
| 9.1 Environmental Protection.....                         | 281        |
| 9.2 Disposal.....                                         | 281        |
| <b>10 Service and Support.....</b>                        | <b>283</b> |
| <b>11 Appendix.....</b>                                   | <b>285</b> |
| 11.1 Dimensioning the Line Cross Sections and Fuses ..... | 285        |
| 11.2 Determining the Leakage Capacitance.....             | 291        |
| 11.3 Leakage Capacitances.....                            | 292        |
| 11.3.1 Leakage Capacitance of Motors.....                 | 292        |
| 11.3.2 Leakage Capacitance of Power Cables .....          | 294        |
| <b>Index.....</b>                                         | <b>297</b> |

1 System Presentation

1.1 Rexroth IndraDrive Cs Drive Range

1.1.1 Overview – Rexroth IndraDrive Cs
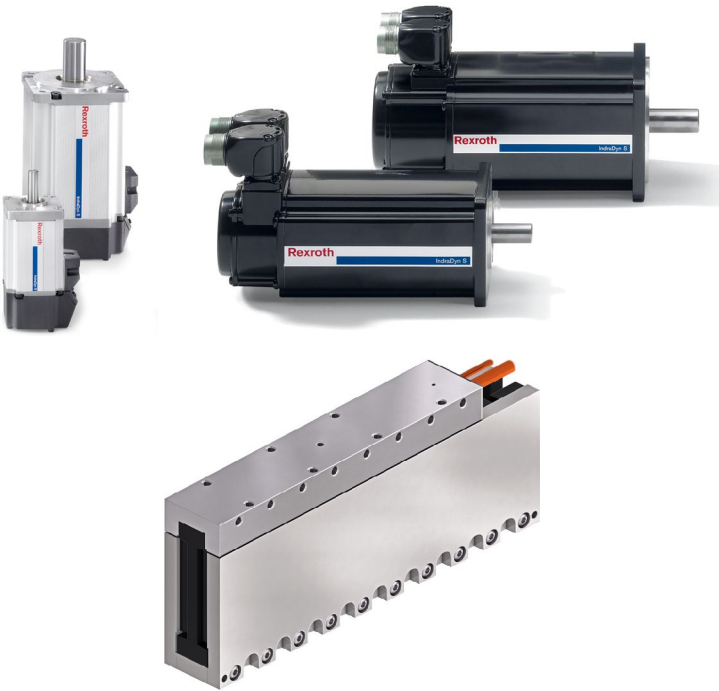
| Rexroth IndraDrive Cs                                                             |                                                                                     |
|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| Converter HCS01                                                                   | Motors MSM, MSK, MCL, third-party motors                                            |
|  |  |

Tab. 1-1: Components of the Rexroth IndraDrive Cs Range



## System Presentation

## 1.1.2 Target Applications

|                                                                                   |                                                                                                                                                      |
|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|
|   | <b>General automation, handling, assembly</b><br>Automated assembly and handling systems, palletizing systems, pick-and-place systems, logistics ... |
|   | <b>Machine tools</b><br>Compact machines (e.g., for wood machining), secondary and servo drives ...                                                  |
|   | <b>Food and packaging industry</b><br>Filling and closing, palletizing, erecting cartons, closing cartons, labeling ...                              |
|   | <b>Printing machines</b><br>Label printing, labeling, digital printing, positioning, servo drives ...                                                |
|  | <b>Semiconductor industry</b><br>Semiconductor/wafer production and handling, metalizing, cleaning, solar cell production ...                        |

Tab. 1-2: Target Applications

## 1.1.3 Features

### Functional Features

- Compact type of construction
- Degree of protection IP20
- Control panel with programming module function
- Scaleable signal processing and firmware
- Multi-encoder interface for all standard encoders (HIPERFACE®, EnDat2.1, SSI, TTL, sin/cos, resolver, MSM encoder)
- DC bus connection (at HCS01.1E-W00xx-x-03 devices)
- Analog input (14 bit,  $\pm 10$  V)
- 8 digital inputs
  - 2 probe inputs
  - 1 combined I/O which can be configured as digital input or as digital output
- Performance-dependent fan control
- Integrated brake current measurement and monitoring
- Winding short circuit at motor output for shutdown as reaction to fatal errors
- Compact MSM motors
- 2 options for buffering the data of MSM encoders
  - Battery box (SUP-E01-MSM-BATTERYBOX; mounting near the motor is possible; one battery box is required for each drive controller)
  - D-Sub connector (RGS0001/K01) for encoder cable (RKG0041) and connection of a battery or an uninterruptible power supply
- Hall sensor adapter box SHL03.1 to operate MCL linear motors with digital Hall sensors

## System Presentation

## HCS01 - ECONOMY vs. BASIC vs. ADVANCED

| Functional equipment                                     | HCS01.1E-W00**-A-0*-...                                          |                                                                                      |                                                                                      |
|----------------------------------------------------------|------------------------------------------------------------------|--------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
|                                                          | ...E-S3<br>(ECONOMY)                                             | ...B-ET<br>(BASIC)                                                                   | ...A-CC<br>(ADVANCED)                                                                |
| Communication                                            | sercos III                                                       | Multi-Ethernet<br>(incl. sercos III)                                                 | sercos III master (cross communication)                                              |
|                                                          |                                                                  | Alternative interface <sup>1)</sup><br>(PROFIBUS DP, CANopen) <sup>2)</sup>          | Alternative interface <sup>1)</sup><br>(Multi-Ethernet,<br>PROFIBUS DP, CANopen)     |
| Encoder evaluation                                       | Multi-encoder interface                                          | Multi-encoder interface                                                              | Multi-encoder interface                                                              |
|                                                          |                                                                  | Optional multi-encoder interface <sup>1)</sup>                                       | Optional multi-encoder interface <sup>1)</sup>                                       |
| Encoder emulation                                        | –                                                                | ✓                                                                                    | ✓                                                                                    |
| Integrated Safety Technology                             | L3 (Safe Torque Off)<br>L4 (Safe Torque Off, Safe Brake Control) | L3 (Safe Torque Off)<br>L4 (Safe Torque Off, Safe Brake Control)<br>S4 (Safe Motion) | L3 (Safe Torque Off)<br>L4 (Safe Torque Off, Safe Brake Control)<br>S4 (Safe Motion) |
| IndraMotion                                              | –                                                                | MLD-S <sup>3)</sup>                                                                  | MLD-S <sup>3)</sup><br>MLD-M <sup>3)</sup>                                           |
| Freely configurable digital inputs/outputs (incl. probe) | ✓                                                                | ✓                                                                                    | ✓                                                                                    |
| Analog input                                             | ✓                                                                | ✓                                                                                    | ✓                                                                                    |
| Control Panel                                            | With programming module function                                 | ✓                                                                                    | ✓                                                                                    |
|                                                          | With slot for microSD memory card                                | –                                                                                    | ✓                                                                                    |
| Optional I/O extension digital/analog                    | –                                                                | ✓                                                                                    | ✓                                                                                    |

1)

**One** additional interface per converter for communication **or** encoder evaluation

2)

If you use "PROFIBUS DP" or "CANopen" communication, the Multi-Ethernet function is no longer available. However, you can still use the connection points X24 and X25 as engineering interfaces.

3)

Firmware version MPx-17 or higher

Tab. 1-3:

*ECONOMY vs. BASIC vs. ADVANCED*

Performance Features

|                          |                  |                                                                                                                               |     |     |      |                      |     |                                                                                                                                 |                      |                                                                                                                                  |      |
|--------------------------|------------------|-------------------------------------------------------------------------------------------------------------------------------|-----|-----|------|----------------------|-----|---------------------------------------------------------------------------------------------------------------------------------|----------------------|----------------------------------------------------------------------------------------------------------------------------------|------|
|                          |                  | <br>Size 1<br>(Width: 50 mm; Height: 215 mm) |     |     |      |                      |     | <br>Size 2<br>(Width: 70 mm; Height: 268 mm) |                      | <br>Size 3<br>(Width: 130 mm; Height: 268 mm) |      |
| HCS01.1E-W00... →        |                  | 03                                                                                                                            | 06  | 09  | 13   | 05                   | 08  | 18-A-02                                                                                                                         | 18-A-03              | 28                                                                                                                               | 54   |
| Mains connection voltage | V                | 3 AC 110 ... 230 V*                                                                                                           |     |     |      | 3 AC 200 ... 500 V** |     | 3 AC 110 ... 230 V*                                                                                                             | 3 AC 200 ... 500 V** |                                                                                                                                  |      |
| Maximum current          | A <sub>rms</sub> | 3,3                                                                                                                           | 6,0 | 9,0 | 13,0 | 5,0                  | 8,0 | 18,0                                                                                                                            | 18,0                 | 28,0                                                                                                                             | 54,0 |

\* Single-phase operation allowed; for HCS01.1E-W0013 and HCS01.1E-W0018-A-02 with derating

\*\* Single-phase operation not allowed  
Tab. 1-4: Converter HCS01 - Performance Features

System Presentation

Combination of HCS01 and MSM/MSK

|                                          | HCS01              |       |       |       |       |                    |       |       |       |       |
|------------------------------------------|--------------------|-------|-------|-------|-------|--------------------|-------|-------|-------|-------|
|                                          | 3 AC 110 ... 230 V |       |       |       |       | 3 AC 200 ... 500 V |       |       |       |       |
|                                          | W0003              | W0006 | W0009 | W0013 | W0018 | W0005              | W0008 | W0018 | W0028 | W0054 |
| <b>MSM</b><br>MSM019 ... MSM041          | ■                  |       |       |       |       | T                  |       |       | -     | -     |
| <b>MSK</b><br>MSK030 ...<br>MSK070C-0150 | □                  |       |       |       |       | ■                  |       |       |       | □     |
| <b>MSK</b><br>MSK070C-0300<br>... MSK103 | -                  |       |       |       |       | □                  |       |       |       | ■     |

- Optimum combination
- Some allowed combinations are possible
- TAllowed combination (transformer required, as operation of MSM only allowed with a maximum of 3 AC 230 V)
- Combination not allowed
- Tab. 1-5: Converter HCS01 and Motors MSM/MSK



**Drive sizing with Rexroth IndraSize**  
Rexroth IndraSize is a software for optimum sizing of a drive system consisting of the components Rexroth IndraDrive and IndraDyn.  
Rexroth IndraSize is available as a download.

Interfaces

- Overview
- Compatible with IndraDrive platform
  - Ethernet-based communication with the following supported protocols:
    - sercos III
    - PROFINET IO
    - EtherNet/IP
    - EtherCAT
  - Alternative communication:
    - PROFIBUS DP
    - CANopen
  - Optional safety technology
  - Optional multi-encoder interface
  - Optional encoder emulation
  - Analog input
  - Freely configurable digital inputs/outputs

Supported Encoder Systems

Supported Encoder Systems Encoder systems with a supply voltage of 5 and 12 volt:


## System Presentation

- MSM motor encoder
- MSK motor encoder
- Sin-cos encoder  $1V_{pp}$ ; HIPERFACE®
- Sin-cos encoder  $1V_{pp}$ ; EnDat 2.1; (EnDat 2.2 in preparation)
- Sin-cos encoder  $1V_{pp}$ ; with reference track
- 5V-TTL square-wave encoder; with reference track
- SSI
- Combined encoder for SSI (combination of SSI and sin-cos encoder  $1V_{pp}$ )
- Resolver (resolvers are **not** supported if an optional "Safe Motion" safety technology is available at the same time.)
- Hall sensor box SHL02.1
- Digital Hall sensor in conjunction with Hall sensor adapter box SHL03.1

## System Presentation

## 1.2 System Configuration

## 1.2.1 System Structure

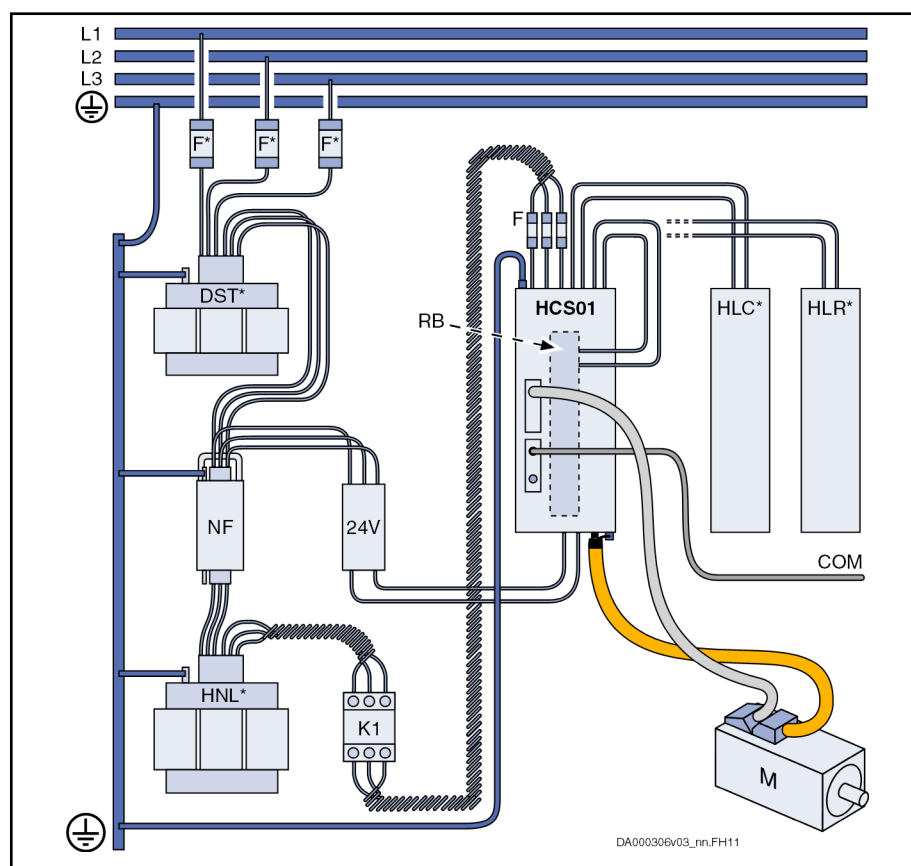

DA000306v03\_rn.FH11

|       |                                                                   |
|-------|-------------------------------------------------------------------|
| *     | Optional                                                          |
| 24V   | Control voltage supply                                            |
| COM   | Communication                                                     |
| DST   | Autotransformer                                                   |
| F     | Fuses                                                             |
| HCS01 | Converter                                                         |
| HLC   | DC bus capacitor unit (for devices with DC bus connection)        |
| HLR   | External braking resistor                                         |
| HNL   | Mains choke                                                       |
| NF    | Mains filter                                                      |
| K1    | External mains contactor                                          |
| M     | Motor                                                             |
| RB    | Integrated braking resistor (at the back of the drive controller) |

Fig. 1-1: Drive System Rexroth IndraDrive Cs

### 1.2.2 Components of the System

## Drive Controllers HCS01

### Type Code

| Short text column | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0 |   |   |   |   |   |   |   |   |   |
|-------------------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Example:          | H | C | S | 0 | 1 | . | 1 | E | - | W | 0 | 0 | 1 | 3 | - | A | - | 0 | 2 | - | E | - | S | 3 | - | E | C | - | N | N | - | N | N | - | N | N | - | F | W |

Product

HCS ..... = HCS

Series

01 ..... = 01

Design

1 ..... = 1

Power supply unit

Feeding ..... = E

Cooling type

Air, internal ..... = W

Maximum current

With mains connection voltage "02"

3 A ..... = 0003

6 A ..... = 0006

9 A ..... = 0009

13 A ..... = 0013

18 A ..... = 0018

With mains connection voltage "03"

5 A ..... = 0005

8 A ..... = 0008

18 A ..... = 0018

28 A ..... = 0028

54 A ..... = 0054

Degree of protection

IP 20 ..... = A

Mains connection voltage

3 x AC 110...230 V ±10% ..... = 02

3 x AC 200...500 V ±10% ..... = 03

Control section design | Communication

ADVANCED | sercos III master (cross communication) ..... = A-CC

BASIC | MultiEthernet ..... = B-ET

ECONOMY | sercos III ..... = E-S3

Interface 1

Encoder IndraDyn / Hiperface® / 1Vpp / TTL / EnDat / SSI / Resolver ..... = EC

Interface 2

CANopen ..... = CN ①

Encoder IndraDyn / Hiperface® / 1Vpp / TTL / EnDat / SSI / Resolver ..... = EC ①

Encoder emulation ..... = EM ①

MultiEthernet ..... = ET ②

Not equipped ..... = NN

PROFIBUS ..... = PB ①

I/O extension digital/analog ..... = DA ①

Interface 3

STO (Safe Torque Off) ..... = L3 ③

STO (Safe Torque Off) and SBC (Safe Brake Control) ..... = L4 ③

Not equipped ..... = NN

SS1 (Safe Stop 1) ..... = S0 ③

Safe Motion ..... = S4 ① ③

Other design

None ..... = NN

Firmware

Denotes that firmware must be ordered as separate subposition ..... = FW

Note

① Not available with Control section design | Communication "E-S3"

② Only available with Control section design | Communication "A-CC"

③ The "L3", "L4", "S0" and "S4" interfaces guarantee the function, as well as its certification

Standard reference

| Standard     | Edition | Title                                                  |
|--------------|---------|--------------------------------------------------------|
| DIN EN 60529 | 2009-09 | Degrees of protection provided by enclosures (IP code) |

DT000063v05\_en.fh11

*Fig. 1-2: Type Code HCS01*



System Presentation

 The figure illustrates the basic structure of the type code. Our sales representative will help you with the current state of available versions.

Control Panel HAP01

View



Fig.1-3:      Control Panel HAP01

Type Code

| Short text column | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 |
|-------------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|
| Example:          | H | A | P | 0 | 1 | . | 1 | N | - | 0  | 1  | 8  | -  | N  | N  | -  | F  | W  |    |    |

**Product**  
HAP ..... = HAP

**Series**  
1 .....01

**Design**  
1 ..... = 1

**Additional option**  
ADVANCED control panel with memory card slot ..... = A  
Standard control panel with memory card slot ..... = E  
Standard control panel without memory card slot ..... = N

**Memory size**  
e.g. 18 MB ..... = 018

**Other design**  
None ..... = NN

**Firmware**  
Denotes that firmware must be ordered as separate subposition ..... = FW

DT000079v02\_en.fh11

Fig.1-4:      Type Code of Control Panel

 The figure illustrates the basic structure of the type code. Our sales representative will help you with the current state of available versions.

## Assignment HAP01 ↔ HCS01

| Control Panel | Drive controller                                                   |
|---------------|--------------------------------------------------------------------|
| HAP01.1A      | HCS01.1E-W****-**-A-CC (ADVANCED)                                  |
| HAP01.1N      | HCS01.1E-W****-**-B-ET (BASIC)<br>HCS01.1E-W****-**-E-S3 (ECONOMY) |
| HAP01.1E      | -                                                                  |

Tab. 1-6: Assignment HAP01 ↔ HCS01

- [chapter "Standard Control Panel HAP01.1N" on page 208](#)
- [chapter "ADVANCED Control Panel HAP01.1A" on page 209](#)

## Firmware

### Firmware Types

#### *ECONOMY*

- FWA-INDRV\*-MPE-16VRS-D5-x-NNN-NN
- FWA-INDRV\*-MPE-17VRS-D5-x-NNN-NN
- FWA-INDRV\*-MPE-18VRS-D5-x-NNN-NN

#### *BASIC*

- FWA-INDRV\*-MPB-16VRS-D5-x-xxx-xx
- FWA-INDRV\*-MPB-17VRS-D5-x-xxx-xx
- FWA-INDRV\*-MPB-18VRS-D5-x-xxx-xx

#### *ADVANCED*

- FWA-INDRV\*-MPC-17VRS-D5-x-xxx-xx
- FWA-INDRV\*-MPC-18VRS-D5-x-xxx-xx

See also [chapter "Firmware Types" on page 38](#)

 For detailed information, see the Functional Description of the firmware used (index entry "Overview of functions/functional packages").

## System Presentation

## 1.2.3 About This Documentation

### Purpose

**⚠ WARNING**

Personal injury and property damage caused by incorrect project planning for applications, machines and installations!

Observe the contents of the documentations relevant to your drive system (see [chapter "Documentations" on page 21](#)).

This documentation contains

- Overview information of the Rexroth IndraDrive Cs drive system
- Description of the allowed combinations of Rexroth IndraDrive Cs system components
- Selection of the system components of the Rexroth IndraDrive Cs drive system
- Specification applying to all components (ambient and operating conditions)
- Application description of system characteristics

## Editions

| Edition | Notes                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|---------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 03      | <p>Changes in comparison to previous edition:</p> <p><i>New Contents</i></p> <ul style="list-style-type: none"><li>• Safety technology Safe Motion (optional module S4)</li><li>• Analog/digital I/O extension (optional module DA)</li><li>• Accessory HAS05.1-015-NNN-NN (snap-on ferrite)</li></ul> <p><i>Revised Contents</i></p> <ul style="list-style-type: none"><li>• Type code<ul style="list-style-type: none"><li>– HCS01</li><li>– HLR01</li></ul></li><li>• Revised note on fuses for individual and group supply</li><li>• Dimensioning of line cross sections and fuses:<br/>Revised recommendations for fuses</li><li>• On-board connection point X24/X25</li><li>• Revised data tables of inputs/outputs (digital, analog)</li></ul> |

## System Presentation

| Edition | Notes                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|---------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 02      | <p>Changes in comparison to previous edition:</p> <p><i>New Contents</i></p> <ul style="list-style-type: none"> <li>• HCS01.1E-W0054-_-03</li> <li>• HCS01.1E-W0018-_-02</li> <li>• Safety technology (L3, L4)</li> <li>• Encoder emulation (EM)</li> <li>• Communication CANopen (CN)</li> <li>• Hall sensor adapter box SHL03.1-NNN-S-NNN</li> <li>• Encoder cable RKG0041</li> <li>• D-Sub connector RGS0001/K01 for encoder cable and battery connection</li> <li>• Braking resistors HLR01.2</li> <li>• DC bus capacitor units HLC01.2</li> <li>• Transformers</li> <li>• ADVANCED control panel</li> <li>• Third-party motors</li> <li>• Tightening torques of the connection points</li> <li>• EtherCAT display elements</li> </ul> <p><i>Revised Contents</i></p> <ul style="list-style-type: none"> <li>• Type code</li> <li>• Technical Data</li> <li>• Project planning for control voltage supply</li> <li>• DC bus coupling</li> <li>• Mains filter: Dimensioning and selection</li> <li>• Standard encoder evaluation</li> <li>• Connection diagram for HIPERFACE encoder</li> <li>• Mounting and connection accessories HAS09</li> <li>• Accessory SUP-E03-DKC*CS-BATTERY</li> <li>• Control cabinet cooling</li> <li>• Overview of documentations</li> </ul> |
| 01      | First edition                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |

Tab. 1-7: Editions

## Documentations

### Drive Systems, System Components

| Title<br>Rexroth IndraDrive ... | Kind of documentation   | Document typecode <sup>1)</sup><br>DOK-INDRV*-... | Material number<br>R911... |
|---------------------------------|-------------------------|---------------------------------------------------|----------------------------|
| Cs Drive Systems                | Project Planning Manual | HCS01*****-PRxx-EN-P                              | 322210                     |

1) In the document typecodes, "xx" is a wild card for the current edition of the documentation (example: PR01 is the first edition of a Project Planning Manual)

Tab. 1-8: Documentations – Drive Systems, System Components

### Motors

| Title<br>Rexroth IndraDyn ...    | Kind of documentation   | Document typecode <sup>1)</sup><br>DOK-MOTOR*-... | Material number<br>R911... |
|----------------------------------|-------------------------|---------------------------------------------------|----------------------------|
| A Asynchronous Motors MAD / MAF  | Project Planning Manual | MAD/MAF****-PRxx-EN-P                             | 295781                     |
| H Synchronous Kit Spindle Motors | Project Planning Manual | MBS-H*****-PRxx-EN-P                              | 297895                     |
| L Synchronous Linear Motors      | Project Planning Manual | MLF*****-PRxx-EN-P                                | 293635                     |
| L Ironless Linear Motors MCL     | Project Planning Manual | MCL*****-PRxx-EN-P                                | 330592                     |
| S Synchronous Motors MKE         | Project Planning Manual | MKE*GEN2***-PRxx-EN-P                             | 297663                     |
| S Synchronous Motors MSK         | Project Planning Manual | MSK*****-PRxx-EN-P                                | 296289                     |
| S Synchronous Motors MSM         | Data Sheet              | MSM*****-DAxx-EN-P                                | 329338                     |
| S Synchronous Motors QSK         | Project Planning Manual | QSK*****-PRxx-EN-P                                | 330321                     |
| T Synchronous Torque Motors      | Project Planning Manual | MBT*****-PRxx-EN-P                                | 298798                     |

1) In the document typecodes, "xx" is a wild card for the current edition of the documentation (example: PR01 is the first edition of a Project Planning Manual)

Tab. 1-9: Documentations – Motors

### Cables

| Title                                                | Kind of documentation | Document typecode <sup>1)</sup><br>DOK-CONNEC-... | Material number<br>R911... |
|------------------------------------------------------|-----------------------|---------------------------------------------------|----------------------------|
| Rexroth Connection Cables<br>IndraDrive and IndraDyn | Selection Data        | CABLE*INDRV-CAxx-EN-P                             | 322949                     |

1) In the document typecodes, "xx" is a wild card for the current edition of the documentation (example: CA03 is the third edition of the documentation "Catalog")

Tab. 1-10: Documentations – Cables

### Firmware

| Title<br>Rexroth IndraDrive ... | Kind of documentation | Document typecode <sup>1)</sup><br>DOK-INDRV*-... | Material number<br>R911... |
|---------------------------------|-----------------------|---------------------------------------------------|----------------------------|
| MPx-18<br>Functions             | Application Manual    | MP*-18VRS**-APxx-EN-P                             | 338673                     |
| MPx-18<br>Version Notes         | Release Notes         | MP*-18VRS**-RNxx-EN-P                             | 338658                     |

## System Presentation

| Title<br>Rexroth IndraDrive ...                            | Kind of documentation | Document typecode <sup>1)</sup><br>DOK-INDRV*-... | Material number<br>R911... |
|------------------------------------------------------------|-----------------------|---------------------------------------------------|----------------------------|
| MPx-17<br>Functions                                        | Application Manual    | MP*-17VRS**-APxx-EN-P                             | 331236                     |
| MPx-17<br>Version Notes                                    | Release Notes         | MP*-17VRS**-RNxx-EN-P                             | 331588                     |
| MPx-16<br>Functions                                        | Application Manual    | MP*-16VRS**-APxx-EN-P                             | 326767                     |
| MPx-16<br>Version Notes                                    | Release Notes         | MP*-16VRS**-RNxx-EN-P                             | 329272                     |
| MPx-16 to MPx-18<br>Parameters                             | Reference Book        | GEN1-PARA**-RExx-EN-P                             | 328651                     |
| MPx-16 to MPx-18<br>Diagnostic Messages                    | Reference Book        | GEN1-DIAG**-RExx-EN-P                             | 326738                     |
| Integrated Safety Technology<br>as of MPx-1x               | Application Manual    | SI3-**VRS**-APxx-EN-P                             | 332634                     |
| Integrated Safety Technology<br>as of MPx-1x (Safe Motion) | Application Manual    | SI3*SMO-VRS-APxx-EN-P                             | 338920                     |
| Rexroth IndraMotion MLD<br>Libraries as of MPx-17          | Reference Book        | MLD-SYSLIB2-RExx-EN-P                             | 332627                     |
| Rexroth IndraMotion MLD<br>Libraries as of MPx-18          | Reference Book        | MLD-SYSLIB3-RExx-EN-P                             | 338916                     |
| Rexroth IndraMotion MLD<br>as of MPx-17                    | Application Manual    | MLD2-**VRS*-APxx-EN-P                             | 334351                     |
| Rexroth IndraMotion MLD<br>as of MPx-18                    | Application Manual    | MLD3-**VRS*-APRS-EN-P                             | 338914                     |

1) In the document typecodes, "xx" is a wild card for the current edition of the documentation (example: RE02 is the second edition of a Reference Book)

Tab. 1-11: Documentations – Firmware

## Your Feedback



Your experience is important for our improvement processes of products and documentations.

Inform us about mistakes you discovered in this documentation and changes you suggest; we would be grateful for your feedback.

Please send your remarks to:

## Address for Your Feedback

Bosch Rexroth AG  
Dept. DC-IA/EDY1  
Buergermeister-Dr.-Nebel-Str. 2  
97816 Lohr, Germany  
E-mail: [dokusupport@boschrexroth.de](mailto:dokusupport@boschrexroth.de)

## 2 Important Directions for Use

### 2.1 Appropriate Use

#### 2.1.1 Introduction

Rexroth products reflect the state-of-the-art in their development and their manufacture. They are tested prior to delivery to ensure operating safety and reliability.

#### WARNING

**Personal injury and property damage caused by incorrect use of the products!**

The products have been designed for use in industrial environments and may only be used in the appropriate way. If they are not used in the appropriate way, situations resulting in property damage and personal injury can occur.



Rexroth as manufacturer is not liable for any damages resulting from inappropriate use. In such cases, the guarantee and the right to payment of damages resulting from inappropriate use are forfeited. The user alone carries all responsibility of the risks.

Before using Rexroth products, the following pre-requisites must be met to ensure appropriate use of the products:

- Personnel that in any way, shape or form uses our products must first read and understand the relevant safety instructions and be familiar with their appropriate use.
- If the products take the form of hardware, then they must remain in their original state, in other words, no structural changes are permitted. It is not permitted to decompile software products or alter source codes.
- Damaged or faulty products may not be installed or put into operation.
- Make sure that the products have been installed in the manner described in the relevant documentation.

#### 2.1.2 Areas of Use and Application

Drive controllers made by Rexroth are designed to control electrical motors and monitor their operation.

Control and monitoring of the Drive controllers may require additional sensors and actors.



The drive controllers may only be used with the accessories and parts specified in this documentation. If a component has not been specifically named, then it may neither be mounted nor connected. The same applies to cables and lines.

Operation is only permitted in the specified configurations and combinations of components using the software and firmware as specified in the relevant Functional Descriptions.

Drive controllers have to be programmed before commissioning to ensure that the motor executes the specific functions of an application.

Drive controllers of the Rexroth IndraDrive Cs line have been developed for use in single- and multi-axis drive and control tasks.



## Important Directions for Use

To ensure application-specific use of Drive controllers, device types of different drive power and different interfaces are available.

Typical applications include, for example:

- Handling and mounting systems,
- Packaging and food machines,
- Printing and paper processing machines and
- Machine tools.

Drive controllers may only be operated under the assembly and installation conditions described in this documentation, in the specified position of normal use and under the ambient conditions as described (temperature, degree of protection, humidity, EMC, etc.).

## 2.2 Inappropriate Use

Using the Drive controllers outside of the operating conditions described in this documentation and outside of the technical data and specifications given is defined as "inappropriate use".

Drive controllers may not be used, if ...

- they are subject to operating conditions that do not meet the specified ambient conditions. This includes, for example, operation under water, under extreme temperature fluctuations or extremely high maximum temperatures.
- Furthermore, Drive controllers may not be used in applications which have not been expressly authorized by Rexroth. Please carefully follow the specifications outlined in the general Safety Instructions!



Components of the Rexroth IndraDrive Cs system are **products of category C3** (with limited availability) according to IEC 61800-3. To ensure that this category (limit values) is maintained, suitable line filters must be used in the drive system.

These components are not provided for use in a public low-voltage network supplying residential areas with power. If these components are used in such a public network, high-frequency interference is to be expected. This can require additional measures of radio interference suppression.

## 3 Safety Instructions for Electric Drives and Controls

### 3.1 Definitions of Terms

|                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|----------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Application Documentation</b> | Application documentation comprises the entire documentation used to inform the user of the product about the use and safety-relevant features for configuring, integrating, installing, mounting, commissioning, operating, maintaining, repairing and decommissioning the product. The following terms are also used for this kind of documentation: Operating Instructions, Commissioning Manual, Instruction Manual, Project Planning Manual, Application Description, etc.                                   |
| <b>Component</b>                 | A component is a combination of elements with a specified function, which are part of a piece of equipment, device or system. Components of the electric drive and control system are, for example, supply units, drive controllers, mains choke, mains filter, motors, cables, etc.                                                                                                                                                                                                                              |
| <b>Control System</b>            | A control system comprises several interconnected control components placed on the market as a single functional unit.                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Device</b>                    | A device is a finished product with a defined function, intended for users and placed on the market as an individual piece of merchandise.                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Electrical Equipment</b>      | Electrical equipment encompasses all devices used to generate, convert, transmit, distribute or apply electrical energy, such as electric motors, transformers, switching devices, cables, lines, power-consuming devices, circuit board assemblies, plug-in units, control cabinets, etc.                                                                                                                                                                                                                        |
| <b>Electric Drive System</b>     | An electric drive system comprises all components from mains supply to motor shaft; this includes, for example, electric motor(s), motor encoder(s), supply units and drive controllers, as well as auxiliary and additional components, such as mains filter, mains choke and the corresponding lines and cables.                                                                                                                                                                                                |
| <b>Installation</b>              | An installation consists of several devices or systems interconnected for a defined purpose and on a defined site which, however, are not intended to be placed on the market as a single functional unit.                                                                                                                                                                                                                                                                                                        |
| <b>Machine</b>                   | A machine is the entirety of interconnected parts or units at least one of which is movable. Thus, a machine consists of the appropriate machine drive elements, as well as control and power circuits, which have been assembled for a specific application. A machine is, for example, intended for processing, treatment, movement or packaging of a material. The term "machine" also covers a combination of machines which are arranged and controlled in such a way that they function as a unified whole. |
| <b>Manufacturer</b>              | The manufacturer is an individual or legal entity bearing responsibility for the design and manufacture of a product which is placed on the market in the individual's or legal entity's name. The manufacturer can use finished products, finished parts or finished elements, or contract out work to subcontractors. However, the manufacturer must always have overall control and possess the required authority to take responsibility for the product.                                                     |
| <b>Product</b>                   | Examples of a product: Device, component, part, system, software, firmware, among other things.                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Project Planning Manual</b>   | A project planning manual is part of the application documentation used to support the sizing and planning of systems, machines or installations.                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Qualified Persons</b>         | In terms of this application documentation, qualified persons are those persons who are familiar with the installation, mounting, commissioning and operation of the components of the electric drive and control system, as well as with the hazards this implies, and who possess the qualifications their work                                                                                                                                                                                                 |

## Safety Instructions for Electric Drives and Controls

requires. To comply with these qualifications, it is necessary, among other things,

- 1) to be trained, instructed or authorized to switch electric circuits and devices safely on and off, to ground them and to mark them
- 2) to be trained or instructed to maintain and use adequate safety equipment
- 3) to attend a course of instruction in first aid

**User** A user is a person installing, commissioning or using a product which has been placed on the market.

## 3.2 General Information

### 3.2.1 Using the Safety Instructions and Passing Them on to Others

Do not attempt to install and operate the components of the electric drive and control system without first reading all documentation provided with the product. Read and understand these safety instructions and all user documentation prior to working with these components. If you do not have the user documentation for the components, contact your responsible Rexroth sales partner. Ask for these documents to be sent immediately to the person or persons responsible for the safe operation of the components.

If the component is resold, rented and/or passed on to others in any other form, these safety instructions must be delivered with the component in the official language of the user's country.

**Improper use of these components, failure to follow the safety instructions in this document or tampering with the product, including disabling of safety devices, could result in property damage, injury, electric shock or even death.**

### 3.2.2 Requirements for Safe Use

Read the following instructions before initial commissioning of the components of the electric drive and control system in order to eliminate the risk of injury and/or property damage. You must follow these safety instructions.

- Rexroth is not liable for damages resulting from failure to observe the safety instructions.
- Read the operating, maintenance and safety instructions in your language before commissioning. If you find that you cannot completely understand the application documentation in the available language, please ask your supplier to clarify.
- Proper and correct transport, storage, mounting and installation, as well as care in operation and maintenance, are prerequisites for optimal and safe operation of the component.
- Only qualified persons may work with components of the electric drive and control system or within its proximity.
- Only use accessories and spare parts approved by Rexroth.
- Follow the safety regulations and requirements of the country in which the components of the electric drive and control system are operated.
- Only use the components of the electric drive and control system in the manner that is defined as appropriate. See chapter "Appropriate Use".
- The ambient and operating conditions given in the available application documentation must be observed.
- Applications for functional safety are only allowed if clearly and explicitly specified in the application documentation "Integrated Safety Technolo-

## Safety Instructions for Electric Drives and Controls

gy". If this is not the case, they are excluded. Functional safety is a safety concept in which measures of risk reduction for personal safety depend on electrical, electronic or programmable control systems.

- The information given in the application documentation with regard to the use of the delivered components contains only examples of applications and suggestions.

The machine and installation manufacturers must

- make sure that the delivered components are suited for their individual application and check the information given in this application documentation with regard to the use of the components,
- make sure that their individual application complies with the applicable safety regulations and standards and carry out the required measures, modifications and complements.
- Commissioning of the delivered components is only allowed once it is sure that the machine or installation in which the components are installed complies with the national regulations, safety specifications and standards of the application.
- Operation is only allowed if the national EMC regulations for the application are met.
- The instructions for installation in accordance with EMC requirements can be found in the section on EMC in the respective application documentation.

The machine or installation manufacturer is responsible for compliance with the limit values as prescribed in the national regulations.

- The technical data, connection and installation conditions of the components are specified in the respective application documentations and must be followed at all times.

*National regulations which the user must take into account*

- European countries: In accordance with European EN standards
- United States of America (USA):
  - National Electrical Code (NEC)
  - National Electrical Manufacturers Association (NEMA), as well as local engineering regulations
  - Regulations of the National Fire Protection Association (NFPA)
- Canada: Canadian Standards Association (CSA)
- Other countries:
  - International Organization for Standardization (ISO)
  - International Electrotechnical Commission (IEC)

### 3.2.3 Hazards by Improper Use

- High electrical voltage and high working current! Danger to life or serious injury by electric shock!
- High electrical voltage by incorrect connection! Danger to life or injury by electric shock!
- Dangerous movements! Danger to life, serious injury or property damage by unintended motor movements!
- Health hazard for persons with heart pacemakers, metal implants and hearing aids in proximity to electric drive systems!

## Safety Instructions for Electric Drives and Controls

- Risk of burns by hot housing surfaces!
- Risk of injury by improper handling! Injury by crushing, shearing, cutting, hitting!
- Risk of injury by improper handling of batteries!
- Risk of injury by improper handling of pressurized lines!

## 3.3 Instructions with Regard to Specific Dangers

### 3.3.1 Protection Against Contact with Electrical Parts and Housings



This section concerns components of the electric drive and control system with voltages of **more than 50 volts**.

Contact with parts conducting voltages above 50 volts can cause personal danger and electric shock. When operating components of the electric drive and control system, it is unavoidable that some parts of these components conduct dangerous voltage.

#### **High electrical voltage! Danger to life, risk of injury by electric shock or serious injury!**

- Only qualified persons are allowed to operate, maintain and/or repair the components of the electric drive and control system.
- Follow the general installation and safety regulations when working on power installations.
- Before switching on, the equipment grounding conductor must have been permanently connected to all electric components in accordance with the connection diagram.
- Even for brief measurements or tests, operation is only allowed if the equipment grounding conductor has been permanently connected to the points of the components provided for this purpose.
- Before accessing electrical parts with voltage potentials higher than 50 V, you must disconnect electric components from the mains or from the power supply unit. Secure the electric component from reconnection.
- With electric components, observe the following aspects:  
Always wait **30 minutes** after switching off power to allow live capacitors to discharge before accessing an electric component. Measure the electrical voltage of live parts before beginning to work to make sure that the equipment is safe to touch.
- Install the covers and guards provided for this purpose before switching on.
- Never touch electrical connection points of the components while power is turned on.
- Do not remove or plug in connectors when the component has been powered.
- Under specific conditions, electric drive systems can be operated at mains protected by residual-current-operated circuit-breakers sensitive to universal current (RCDs/RCMs).

## Safety Instructions for Electric Drives and Controls

- Secure built-in devices from penetrating foreign objects and water, as well as from direct contact, by providing an external housing, for example a control cabinet.

### High housing voltage and high leakage current! Danger to life, risk of injury by electric shock!

- Before switching on and before commissioning, ground or connect the components of the electric drive and control system to the equipment grounding conductor at the grounding points.
- Connect the equipment grounding conductor of the components of the electric drive and control system permanently to the main power supply at all times. The leakage current is greater than 3.5 mA.
- Establish an equipment grounding connection with a minimum cross section according to the table below. With an outer conductor cross section smaller than 10 mm<sup>2</sup> (8 AWG), the alternative connection of two equipment grounding conductors is allowed, each having the same cross section as the outer conductors.

| Cross section outer conductor | Minimum cross section equipment grounding conductor |                                  |
|-------------------------------|-----------------------------------------------------|----------------------------------|
|                               | Leakage current $\geq 3.5$ mA                       |                                  |
|                               | 1 equipment grounding conductor                     | 2 equipment grounding conductors |
| 1.5 mm <sup>2</sup> (16 AWG)  | 10 mm <sup>2</sup> (8 AWG)                          | 2 × 1.5 mm <sup>2</sup> (16 AWG) |
| 2.5 mm <sup>2</sup> (14 AWG)  |                                                     | 2 × 2.5 mm <sup>2</sup> (14 AWG) |
| 4 mm <sup>2</sup> (12 AWG)    |                                                     | 2 × 4 mm <sup>2</sup> (12 AWG)   |
| 6 mm <sup>2</sup> (10 AWG)    |                                                     | 2 × 6 mm <sup>2</sup> (10 AWG)   |
| 10 mm <sup>2</sup> (8 AWG)    |                                                     | -                                |
| 16 mm <sup>2</sup> (6 AWG)    | 16 mm <sup>2</sup> (6 AWG)                          | -                                |
| 25 mm <sup>2</sup> (4 AWG)    |                                                     | -                                |
| 35 mm <sup>2</sup> (2 AWG)    |                                                     | -                                |
| 50 mm <sup>2</sup> (1/0 AWG)  | 25 mm <sup>2</sup> (4 AWG)                          | -                                |
| 70 mm <sup>2</sup> (2/0 AWG)  | 35 mm <sup>2</sup> (2 AWG)                          | -                                |
| ...                           | ...                                                 | ...                              |

Tab.3-1: Minimum Cross Section of the Equipment Grounding Connection

## 3.3.2 Protective Extra-Low Voltage as Protection Against Electric Shock

Protective extra-low voltage is used to allow connecting devices with basic insulation to extra-low voltage circuits.

On components of an electric drive and control system provided by Rexroth, all connections and terminals with voltages up to 50 volts are PELV ("Protective Extra-Low Voltage") systems. It is allowed to connect devices equipped with basic insulation (such as programming devices, PCs, notebooks, display units) to these connections.

## Safety Instructions for Electric Drives and Controls

**Danger to life, risk of injury by electric shock! High electrical voltage by incorrect connection!**

If extra-low voltage circuits of devices containing voltages and circuits of more than 50 volts (e.g., the mains connection) are connected to Rexroth products, the connected extra-low voltage circuits must comply with the requirements for PELV ("Protective Extra-Low Voltage").

### 3.3.3 Protection Against Dangerous Movements

Dangerous movements can be caused by faulty control of connected motors. Some common examples are:

- Improper or wrong wiring or cable connection
- Operator errors
- Wrong input of parameters before commissioning
- Malfunction of sensors and encoders
- Defective components
- Software or firmware errors

These errors can occur immediately after equipment is switched on or even after an unspecified time of trouble-free operation.

The monitoring functions in the components of the electric drive and control system will normally be sufficient to avoid malfunction in the connected drives. Regarding personal safety, especially the danger of injury and/or property damage, this alone cannot be relied upon to ensure complete safety. Until the integrated monitoring functions become effective, it must be assumed in any case that faulty drive movements will occur. The extent of faulty drive movements depends upon the type of control and the state of operation.

**Dangerous movements! Danger to life, risk of injury, serious injury or property damage!**

A **risk assessment** must be prepared for the installation or machine, with its specific conditions, in which the components of the electric drive and control system are installed.

As a result of the risk assessment, the user must provide for monitoring functions and higher-level measures on the installation side for personal safety. The safety regulations applicable to the installation or machine must be taken into consideration. Unintended machine movements or other malfunctions are possible if safety devices are disabled, bypassed or not activated.

**To avoid accidents, injury and/or property damage:**

- Keep free and clear of the machine's range of motion and moving machine parts. Prevent personnel from accidentally entering the machine's range of motion by using, for example:
  - Safety fences
  - Safety guards
  - Protective coverings
  - Light barriers
- Make sure the safety fences and protective coverings are strong enough to resist maximum possible kinetic energy.
- Mount emergency stopping switches in the immediate reach of the operator. Before commissioning, verify that the emergency stopping equip-

## Safety Instructions for Electric Drives and Controls

ment works. Do not operate the machine if the emergency stopping switch is not working.

- Prevent unintended start-up. Isolate the drive power connection by means of OFF switches/OFF buttons or use a safe starting lockout.
- Make sure that the drives are brought to safe standstill before accessing or entering the danger zone.
- Additionally secure vertical axes against falling or dropping after switching off the motor power by, for example,
  - mechanically securing the vertical axes,
  - adding an external braking/arrester/clamping mechanism or
  - ensuring sufficient counterbalancing of the vertical axes.
- The standard equipment **motor holding brake** or an external holding brake controlled by the drive controller is **not sufficient to guarantee personal safety!**
- Disconnect electrical power to the components of the electric drive and control system using the master switch and secure them from reconnection ("lock out") for:
  - Maintenance and repair work
  - Cleaning of equipment
  - Long periods of discontinued equipment use
- Prevent the operation of high-frequency, remote control and radio equipment near components of the electric drive and control system and their supply leads. If the use of these devices cannot be avoided, check the machine or installation, at initial commissioning of the electric drive and control system, for possible malfunctions when operating such high-frequency, remote control and radio equipment in its possible positions of normal use. It might possibly be necessary to perform a special electromagnetic compatibility (EMC) test.

### 3.3.4 Protection Against Magnetic and Electromagnetic Fields During Operation and Mounting

Magnetic and electromagnetic fields generated by current-carrying conductors or permanent magnets of electric motors represent a serious danger to persons with heart pacemakers, metal implants and hearing aids.

**Health hazard for persons with heart pacemakers, metal implants and hearing aids in proximity to electric components!**

- Persons with heart pacemakers and metal implants are not allowed to enter the following areas:
  - Areas in which components of the electric drive and control systems are mounted, commissioned and operated.
  - Areas in which parts of motors with permanent magnets are stored, repaired or mounted.
- If it is necessary for somebody with a heart pacemaker to enter such an area, a doctor must be consulted prior to doing so. The noise immunity of implanted heart pacemakers differs so greatly that no general rules can be given.
- Those with metal implants or metal pieces, as well as with hearing aids, must consult a doctor before they enter the areas described above.



## Safety Instructions for Electric Drives and Controls

### 3.3.5 Protection Against Contact with Hot Parts

**Hot surfaces of components of the electric drive and control system. Risk of burns!**

- Do not touch hot surfaces of, for example, braking resistors, heat sinks, supply units and drive controllers, motors, windings and laminated cores!
- According to the operating conditions, temperatures of the surfaces can be **higher than 60 °C** (140 °F) during or after operation.
- Before touching motors after having switched them off, let them cool down for a sufficient period of time. Cooling down can require **up to 140 minutes!** The time required for cooling down is approximately five times the thermal time constant specified in the technical data.
- After switching chokes, supply units and drive controllers off, wait **15 minutes** to allow them to cool down before touching them.
- Wear safety gloves or do not work at hot surfaces.
- For certain applications, and in accordance with the respective safety regulations, the manufacturer of the machine or installation must take measures to avoid injuries caused by burns in the final application. These measures can be, for example: Warnings at the machine or installation, guards (shieldings or barriers) or safety instructions in the application documentation.

### 3.3.6 Protection During Handling and Mounting

**Risk of injury by improper handling! Injury by crushing, shearing, cutting, hitting!**

- Observe the relevant statutory regulations of accident prevention.
- Use suitable equipment for mounting and transport.
- Avoid jamming and crushing by appropriate measures.
- Always use suitable tools. Use special tools if specified.
- Use lifting equipment and tools in the correct manner.
- Use suitable protective equipment (hard hat, safety goggles, safety shoes, safety gloves, for example).
- Do not stand under hanging loads.
- Immediately clean up any spilled liquids from the floor due to the risk of falling!

### 3.3.7 Battery Safety

Batteries consist of active chemicals in a solid housing. Therefore, improper handling can cause injury or property damage.

**Risk of injury by improper handling!**

- Do not attempt to reactivate low batteries by heating or other methods (risk of explosion and cauterization).
- Do not attempt to recharge the batteries as this may cause leakage or explosion.
- Do not throw batteries into open flames.
- Do not dismantle batteries.

## Safety Instructions for Electric Drives and Controls

- When replacing the battery/batteries, do not damage the electrical parts installed in the devices.
- Only use the battery types specified for the product.



Environmental protection and disposal! The batteries contained in the product are considered dangerous goods during land, air, and sea transport (risk of explosion) in the sense of the legal regulations. Dispose of used batteries separately from other waste. Observe the national regulations of your country.

### 3.3.8 Protection Against Pressurized Systems

According to the information given in the Project Planning Manuals, motors and components cooled with liquids and compressed air can be partially supplied with externally fed, pressurized media, such as compressed air, hydraulics oil, cooling liquids and cooling lubricants. Improper handling of the connected supply systems, supply lines or connections can cause injuries or property damage.

#### **Risk of injury by improper handling of pressurized lines!**

- Do not attempt to disconnect, open or cut pressurized lines (risk of explosion).
- Observe the respective manufacturer's operating instructions.
- Before dismounting lines, relieve pressure and empty medium.
- Use suitable protective equipment (safety goggles, safety shoes, safety gloves, for example).
- Immediately clean up any spilled liquids from the floor due to the risk of falling!



Environmental protection and disposal! The agents (e.g., fluids) used to operate the product might not be environmentally friendly. Dispose of agents harmful to the environment separately from other waste. Observe the national regulations of your country.

## 3.4 Explanation of Signal Words and the Safety Alert Symbol

The Safety Instructions in the available application documentation contain specific signal words (DANGER, WARNING, CAUTION or NOTICE) and, where required, a safety alert symbol (in accordance with ANSI Z535.6-2011).

The signal word is meant to draw the reader's attention to the safety instruction and identifies the hazard severity.

The safety alert symbol (a triangle with an exclamation point), which precedes the signal words DANGER, WARNING and CAUTION, is used to alert the reader to personal injury hazards.

### **DANGER**

In case of non-compliance with this safety instruction, death or serious injury will occur.

## Safety Instructions for Electric Drives and Controls

**⚠ WARNING**

In case of non-compliance with this safety instruction, death or serious injury **could** occur.

**⚠ CAUTION**

In case of non-compliance with this safety instruction, minor or moderate injury could occur.

***NOTICE***

In case of non-compliance with this safety instruction, property damage could occur.

## 4 Combining the Individual Components

### 4.1 Documentations

See [chapter "Documentations" on page 21](#)

### 4.2 Brief Description of the Individual Components

#### 4.2.1 HCS01 - Brief Description and Design


##### Brief Description

The compact converters HCS01 are part of the Rexroth IndraDrive Cs product range and are used to operate Rexroth IndraDyn motors or third-party motors.

HCS01 types:

- **02:** Mains connection voltage 3 AC 110 ... 230 V
- **03:** Mains connection voltage 3 AC 200 ... 500 V

##### Design, Block Diagram

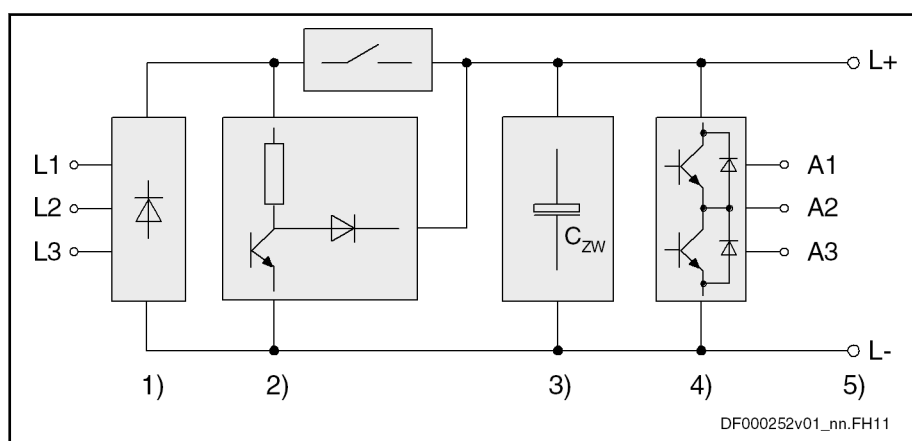

- 1) Mains input with rectifier
- 2) Braking resistor circuit; charging current limitation
- 3) DC bus capacitors
- 4) Inverter stage with output to motor
- 5) DC bus connection

Fig. 4-1: Block Diagram HCS01

### 4.3 Configuring the Drive System

#### 4.3.1 Converter

The selection of the appropriate converter depends on

- Mains type
- Mains Voltage
- Mains supply (1-phase or 3-phase)

## Combining the Individual Components

## Mains Type and Mains Voltage

| IT mains<br>Mains grounded via outer conductor                                                                                                                                                                                     |                                                                                                                 | TN-S mains<br>TN-C mains<br>TT mains                                                                                                                                                                                               |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Mains voltage ≤ 3 AC 230V                                                                                                                                                                                                          | Mains voltage 3 AC 230 ... 500 V                                                                                | To be noticed with 1-phase mains voltage: See table "Mains Supply"                                                                                                                                                                 |
| No transformer required                                                                                                                                                                                                            | Isolating transformer with grounded neutral point required                                                      |                                                                                                                                                                                                                                    |
| HCS01.1E-W0003-A-02<br>HCS01.1E-W0006-A-02<br>HCS01.1E-W0009-A-02<br>HCS01.1E-W0013-A-02<br>HCS01.1E-W0018-A-02<br>HCS01.1E-W0005-A-03<br>HCS01.1E-W0008-A-03<br>HCS01.1E-W0018-A-03<br>HCS01.1E-W0028-A-03<br>HCS01.1E-W0054-A-03 | HCS01.1E-W0005-A-03<br>HCS01.1E-W0008-A-03<br>HCS01.1E-W0018-A-03<br>HCS01.1E-W0028-A-03<br>HCS01.1E-W0054-A-03 | HCS01.1E-W0003-A-02<br>HCS01.1E-W0006-A-02<br>HCS01.1E-W0009-A-02<br>HCS01.1E-W0013-A-02<br>HCS01.1E-W0018-A-02<br>HCS01.1E-W0005-A-03<br>HCS01.1E-W0008-A-03<br>HCS01.1E-W0018-A-03<br>HCS01.1E-W0028-A-03<br>HCS01.1E-W0054-A-03 |

Tab.4-1: Mains Type and Mains Voltage

## Mains Supply

| 1-phase <sup>1)</sup> | 3-phase             |   |
|-----------------------|---------------------|---|
| 1 AC 110 ... 230 V    | 3 AC 200 ... 500 V  |   |
|                       | Autotransformer     | - |
|                       | 3 AC 110 ... 230 V  | - |
| HCS01.1E-W0003-A-02   | HCS01.1E-W0005-A-03 |   |
| HCS01.1E-W0006-A-02   | HCS01.1E-W0008-A-03 |   |
| HCS01.1E-W0009-A-02   | HCS01.1E-W0018-A-03 |   |
| HCS01.1E-W0013-A-02   | HCS01.1E-W0028-A-03 |   |
| HCS01.1E-W0018-A-02   | HCS01.1E-W0054-A-03 |   |
| Mains supply          |                     |   |
| Individual supply     | Individual supply   |   |
|                       | Group supply        |   |
|                       | Central supply      |   |

<sup>1)</sup> With 1-phase mains supply, you can connect the mains supply line to connector X3 at L1, L2 or L3

Tab.4-2: Mains Supply

## DC bus coupling

If energy compensation is to be available between the individual devices, the DC buses of these devices must be coupled. DC bus coupling restricts the selection of HCS01 converters.

See also [chapter 4.6.4 "DC Bus Coupling" on page 92.](#)

## 4.3.2 Functional Equipment

### HCS01 - ECONOMY vs. BASIC vs. ADVANCED

| Functional equipment                                     | HCS01.1E-W00**-A-0*-...                                          |                                                                                      |                                                                                      |
|----------------------------------------------------------|------------------------------------------------------------------|--------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
|                                                          | ...E-S3<br>(ECONOMY)                                             | ...B-ET<br>(BASIC)                                                                   | ...A-CC<br>(ADVANCED)                                                                |
| Communication                                            | sercos III                                                       | Multi-Ethernet<br>(incl. sercos III)                                                 | sercos III master (cross communication)                                              |
|                                                          |                                                                  | Alternative interface <sup>1)</sup><br>(PROFIBUS DP, CANopen) <sup>2)</sup>          | Alternative interface <sup>1)</sup><br>(Multi-Ethernet,<br>PROFIBUS DP, CANopen)     |
| Encoder evaluation                                       | Multi-encoder interface                                          | Multi-encoder interface                                                              | Multi-encoder interface                                                              |
|                                                          |                                                                  | Optional multi-encoder interface <sup>1)</sup>                                       | Optional multi-encoder interface <sup>1)</sup>                                       |
| Encoder emulation                                        | –                                                                | ✓                                                                                    | ✓                                                                                    |
| Integrated Safety Technology                             | L3 (Safe Torque Off)<br>L4 (Safe Torque Off, Safe Brake Control) | L3 (Safe Torque Off)<br>L4 (Safe Torque Off, Safe Brake Control)<br>S4 (Safe Motion) | L3 (Safe Torque Off)<br>L4 (Safe Torque Off, Safe Brake Control)<br>S4 (Safe Motion) |
| IndraMotion                                              | –                                                                | MLD-S <sup>3)</sup>                                                                  | MLD-S <sup>3)</sup><br>MLD-M <sup>3)</sup>                                           |
| Freely configurable digital inputs/outputs (incl. probe) | ✓                                                                | ✓                                                                                    | ✓                                                                                    |
| Analog input                                             | ✓                                                                | ✓                                                                                    | ✓                                                                                    |
| Control Panel                                            | With programming module function                                 | ✓                                                                                    | ✓                                                                                    |
|                                                          | With slot for microSD memory card                                | –                                                                                    | ✓                                                                                    |
| Optional I/O extension digital/analog                    | –                                                                | ✓                                                                                    | ✓                                                                                    |

1)

**One** additional interface per converter for communication **or** encoder evaluation

2)

If you use "PROFIBUS DP" or "CANopen" communication, the Multi-Ethernet function is no longer available. However, you can still use the connection points X24 and X25 as engineering interfaces.

3)

Firmware version MPx-17 or higher

Tab.4-3:

*ECONOMY vs. BASIC vs. ADVANCED*

Combining the Individual Components

### 4.3.3 Firmware

#### Firmware and Device Types

| Firmware                                                                                                 | Assigned device type                |
|----------------------------------------------------------------------------------------------------------|-------------------------------------|
| FWA-INDRV*-MPE-16VRS-D5-x-NNN-NN<br>FWA-INDRV*-MPE-17VRS-D5-x-NNN-NN<br>FWA-INDRV*-MPE-18VRS-D5-x-NNN-NN | HCS01.1E-W00**-A-0*-E-S3 (ECONOMY)  |
| FWA-INDRV*-MPB-16VRS-D5-x-xxx-xx<br>FWA-INDRV*-MPB-17VRS-D5-x-xxx-xx<br>FWA-INDRV*-MPB-18VRS-D5-x-xxx-xx | HCS01.1E-W00**-A-0*-B-ET (BASIC)    |
| FWA-INDRV*-MPC-17VRS-D5-x-xxx-xx<br>FWA-INDRV*-MPC-18VRS-D5-x-xxx-xx                                     | HCS01.1E-W00**-A-0*-A-CC (ADVANCED) |

Tab.4-4: Device Types and Firmware

#### Firmware Types

##### Structure of the Firmware Type Designation

The type designation of the firmware consists of the following type code elements:

| Firmware    | Base package of variant ... | Version | Release | Language | Characteristic Open-loop / Closed-loop | Alternative expansion packages | Additive expansion packages |
|-------------|-----------------------------|---------|---------|----------|----------------------------------------|--------------------------------|-----------------------------|
| FWA-INDRV*- | MPE-                        | 16      | VRS-    | D5-      | x-                                     | NNN-                           | NN                          |
|             |                             | 17      |         |          |                                        |                                |                             |
|             |                             | 18      |         |          |                                        |                                |                             |
| FWA-INDRV*- | MPB-                        | 16      | VRS-    | D5-      | x-                                     | xxx-                           | xx                          |
|             |                             | 17      |         |          |                                        |                                |                             |
|             |                             | 18      |         |          |                                        |                                |                             |
| FWA-INDRV*- | MPC-                        | 17      | VRS-    | D5-      | x-                                     | xxx-                           | xx                          |
|             |                             | 18      |         |          |                                        |                                |                             |

Tab.4-5: Basic Structure of the Firmware Type Designation

##### Function-Specific Abbreviations in Type Designation of Firmware

##### Base package (application and performance)

- **MPE** → Firmware with ECONOMY performance and ECONOMY functionality
- **MPB** → Firmware with BASIC performance and BASIC functionality
- **MPC** → Firmware with ADVANCED performance and ADVANCED functionality

##### Characteristic (open-loop/closed-loop)

- **0** → Open-loop
- **1** → Closed-loop

## Combining the Individual Components

### Alternative expansion packages

- **NNN** → Without alternative expansion package
- **SRV** → Functional package "Servo function"
- **SNC** → Functional package "Synchronization"
- **MSP** → Functional package "Main spindle"
- **ALL** → All alternative expansion packages

### Additive expansion packages

- **NN** → Without additive expansion package
- **MA** → IndraMotion MLD Advanced (only for MPB, MPC firmware)
- **ML** → IndraMotion MLD for free programming; incl. use of technology functions (for MPB, MPC firmware)



The Rexroth sales representative in charge will help you with the current state of available firmware types.



For detailed information, see the Functional Description of the firmware used (index entry "Overview of functions/functional packages").

## Firmware Variants

### MPx-1xVRS

| Firmware variant →              |                            | MPE <sup>1)</sup> |    | MPB |    | MPC |    |
|---------------------------------|----------------------------|-------------------|----|-----|----|-----|----|
| Firmware characteristic →       |                            | OL                | CL | OL  | CL | OL  | CL |
| Base package                    | Basic functions            | ■                 | ■  | ■   | ■  | ■   | ■  |
|                                 | Base package "open-loop"   | ■                 | ■  | ■   | ■  | ■   | ■  |
|                                 | Base package "closed-loop" | –                 | ■  | –   | ■  | –   | ■  |
| Alternative functional packages | Servo function             | –                 | –  | –   | ■  | –   | ■  |
|                                 | Synchronization            | –                 | –  | ■   | ■  | ■   | ■  |
|                                 | Main spindle               | –                 | 2) | ■   | ■  | ■   | ■  |
| Additive functional package     | IndraMotion MLD            | –                 | –  | ■   | ■  | ■   | ■  |

MPE

Single-axis firmware with Economy performance

MPB

Single-axis firmware with Basic performance

MPC

Single-axis firmware with Advanced performance

OL

Open-loop characteristic

CL

Closed-loop characteristic

1)

For Economy firmware MPE, there is only one expanded base package available

2)

The expanded base package contains the "parameter set switching" function.

Tab.4-6:

Dependence of Functional Packages on Hardware and Firmware Variant



## Combining the Individual Components

## 4.3.4 Motors

## IndraDyn

The table below contains an overview of the combinations of MSM motors with HCS01 converters.

| Motor   | HCS01              |       |       |       |       |                    |        |       |        |       |
|---------|--------------------|-------|-------|-------|-------|--------------------|--------|-------|--------|-------|
|         | Size 1             |       |       |       |       |                    | Size 2 |       | Size 3 |       |
|         | 3 AC 110 ... 230 V |       |       |       |       | 3 AC 200 ... 500 V |        |       |        |       |
|         | W0003              | W0006 | W0009 | W0013 | W0018 | W0005              | W0008  | W0018 | W0028  | W0054 |
| MSM019A | ■                  | □     | □     | □     | -     | T                  | T      | -     | -      | -     |
| MSM019B | ■                  | □     | □     | □     | -     | T                  | T      | -     | -      | -     |
| MSM031B | x                  | ■     | □     | □     | -     | T                  | T      | -     | -      | -     |
| MSM031C | -                  | x     | ■     | □     | -     | T                  | T      | -     | -      | -     |
| MSM041B | -                  | -     | x     | ■     | □     | -                  | T      | T     | -      | -     |

- Optimum combination
- Allowed combination (converter overdimensioned)
- x Allowed combination (motor overdimensioned)
- T Allowed combination (transformer required, as operation of MSM motors only allowed with a maximum of 3 AC 230 V)
- Combination not allowed

Tab.4-7: Combination of HCS01 Converters and MSM Motors

## Third-Party Motors

## General Information on Third-Party Motors

## Why Use Third-Party Motors at Rexroth IndraDrive Cs Controllers?

Today, machine axes are mainly moved with electric drives. Motors of standard design are used in most cases, as this is the most cost-efficient solution.

## Special Requirements

Due to special requirements at machine axes, constructional or safety-related aspects, it may be necessary for the machine manufacturer to use a motor construction diverging from the standard.

## Motor Design not Included in Product Range

For these cases, there is the demand on drive suppliers to realize drives with motors that are not included in their own product ranges due to the special design.

## Check Before Using Third-Party Motors

At drive controllers of the Rexroth IndraDrive Cs range, it is possible to use third-party motors. For this purpose, check whether the third-party motor complies with the requirements of use.

The Functional Description of the firmware contains forms for motor data. Procure the completed forms for the performance test of a third-party motor.

## Which are the Important Directives?

In accordance with the legal regulations (EU Directive EMC 89/336/EEC and the German EMC laws), installations and machines must be designed and built in accordance with the present state-of-the-art of standardization.

In order to comply with the machine directives regarding "electromagnetic compatibility (EMC)", a conformity test of the drive system (motor with controller and connection design) must be carried out. The machine manufacturer must guarantee the test of the drive system and compliance with the directives.

## Third-Party Motors to be Controlled

### Motor Types

The following motor types can be controlled:

- Asynchronous motors, rotary
- Asynchronous motors, linear
- Synchronous motors, rotary
- Synchronous motors, linear

These motors can be operated within the scope of the technical data of the selected Rexroth IndraDrive Cs controller. If motors have been provided with a holding brake, it should be controlled via the drive controller. Make sure that the relevant technical data of the motor holding brake are complying with those of the holding brake output!



For third-party motors Rexroth, as a matter of principle, does not assume the guarantee for the power data at the motor shaft!

### Synchronous Motors

For synchronous motors with motor encoder, the commutation offset must be set during commissioning. The drive firmware provides several methods for determining this offset so that it is possible to determine the value for different motor characteristics.



Observe the restrictions in conjunction with the commutation offset determination when using synchronous motors! See firmware documentation, chapter "Drive Control", "Commutation Setting".

Possibly available reluctance property cannot be used for synchronous third-party motors! For third-party motors, it is impossible to determine fail-safe motor parameter values for using the reluctance property. The respective bit of "P-0-4014, Type of construction of motor" therefore mustn't be set!

## Requirements on Third-Party Motors

### General Information

For successful and fail-safe use of a third-party motor, check

- whether the third-party motor to be controlled satisfies the voltage loads
- which drive controller is suitable due to the motor torques to be delivered
- whether the third-party motor has the required minimum inductance
- whether the motor can be protected against inadmissible temperature rise in the case of overload (temperature evaluation)
- whether the mounted position measuring system can be evaluated by the drive controller or which position measuring system can be selected for kit motors

### Voltage Load of the Third-Party Motor

The voltage load of the insulation system of a motor occurring in practical application is mainly influenced by the following characteristics:

- The output variables of the drive controller which is used (feed the transmission distance)
- Cable parameters depending on cable design and length (determine the properties of the transmission distance, such as the attenuation)
- The motor design regarding capacitive and inductive properties (form the end of the transmission distance)

## Combining the Individual Components

As a result of the variables, the insulation system of the third-party motor, as regards voltage, is loaded by the following values:

- Periodic peak voltage  $U_{pp}$  and
- Voltage change  $dv/dt$

The occurring periodic peak voltages at the motor terminals are caused by reflections at the motor cable end. The insulation of the motor is thereby loaded with a higher peak voltage than the one occurring at the output of the power section.



Determine the occurring voltage load at the **terminals** of the third-party motor in the application with all involved components.

## Using the HMF Motor Filter

Use voltage-reducing components (e.g. motor filter HMF), if one of the following criteria applies:

- Allowed voltage change ( $dv/dt$ ) of third-party motor: **< 5 kV/μs**
- **With mains voltage 3 AC 230 V ... 500 V:**  
Allowed periodic peak voltage (crest value) of third-party motor between phase-phase and phase-housing: **< 1,500 V**
- **With mains voltage up to 3 AC 230 V:**  
Allowed periodic peak voltage (crest value) of third-party motor between phase-phase and phase-housing: **< 850 V**  
(To operate motors which do not require any voltage-reducing components at this mains voltage, the switch-on threshold of the braking resistor must be reduced to DC 430 V for devices with the mains connection voltage identifier "03"!)
- The voltage change ( $dv/dt$ ) and periodic peak voltage ( $U_{pp}$ ) at the motor terminals are influenced by the length and the electrical properties of the motor cable:
  - The longer the motor cable, the higher the degree of voltage overshoot (periodic peak voltage) at the motor-side cable end. With a cable length of approx. 25 m and more, the maximum periodic peak voltage occurs. Further voltage increase is not to be expected even with longer cables.
  - With cable lengths of less than 15 m, the periodic peak voltage is reduced, depending on the length and as compared to the specified maximum value, down to the DC bus voltage value.



Apart from the nominal current  $I_N$ , especially take the maximum allowed switching frequency of the power output stage ( $f_s$ ) into account with which the motor filter HMF may be operated.

Verify the success of the voltage-reducing measures by measuring the voltage at the motor terminals. Use an isolated measuring device!

## Minimum Inductance of Third-Party Motor

Depending on the drive controller used, the motor has to have a minimum value for inductance. The actually available inductance of a motor can be measured directly between two motor terminals by means of an inductance measuring bridge. The measurement has to be made for a complete motor wired for normal operation but not yet connected. During the measurement, one motor terminal remains open! For asynchronous motors, the measured value can only be used if the rotor doesn't have closed slots!

Combining the Individual Components

| Drive controller        | Minimum required motor inductance                                       |
|-------------------------|-------------------------------------------------------------------------|
| HCS01 with 3 × AC 230 V | $L_{U-V} = 60 \times 4 / (\sqrt{2} \times I_{Typ} \times f_s)$ (in mH)  |
| HCS01 with 3 × AC 400 V | $L_{U-V} = 80 \times 4 / (\sqrt{2} \times I_{Typ} \times f_s)$ (in mH)  |
| HCS01 with 3 × AC 480 V | $L_{U-V} = 116 \times 4 / (\sqrt{2} \times I_{Typ} \times f_s)$ (in mH) |

$I_{Typ}$   
 $f_s$   
*Tab.4-8:*


Maximum current of drive controller according to type code (rms value)  
Desired switching frequency in kHz  
*Minimum Inductances Depending on Drive Controller Data, Supply Units and Supply Voltage*

Install a three-phase choke in the motor feed wire, if the inductance of the third-party motor is smaller than indicated in the table above. This choke has to increase the inductance that can be measured between two motor terminals to the minimum value.



When the inductance is measured, different inductance values can be determined at different rotor positions within one pole pair distance of the motor. The average value is relevant for the check of the minimum value.

Correct values can only be determined when the motor is in standstill!
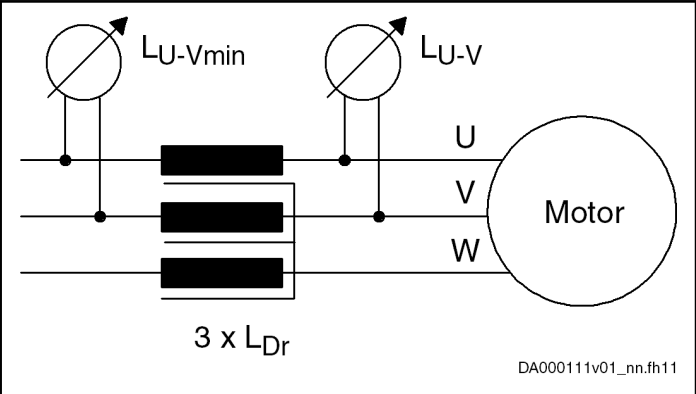
| Available third-party motor                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Planned third-party motor                                                                                                                                                                                                                                                                                                         |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <div><p><math>L_{U-Vmin}</math> <math>L_{U-V}</math></p><p>U<br/>V<br/>W</p><p>Motor</p><p><math>3 \times L_{Dr}</math></p><p>DA000111v01_nn.fh11</p></div> <div><math>L_{Dr} = 0.5 \times (L_{U-Vmin} - L_{U-V})</math> (inductance measurement with 1 kHz)</div> <div><i>Fig.4-2: Mounting of <math>3 \times L_{Dr}</math> (Three-Phase Choke)</i></div>                                                                                                                                | <p>Calculate the leakage inductance (asynchronous motor) or inductance (synchronous motor) of the third-party motor by means of the single-phase equivalent circuit diagram (manufacturer's specification!).</p> <p>Determine choke by means of calculation, if necessary.</p> <p>It is recommended that you contact Rexroth!</p> |
| <p>Requirements on the choke:</p> <ul style="list-style-type: none"><li><math>I_{n\_Dr} \geq I_{n\_Mot}</math><br/>The rated current of the choke has to be greater than or equal to the rated motor current.</li><li>Depending on the maximum speed, the choke is loaded with the respective output frequency and the PWM frequency of the drive controller.</li><li>The insulation class has to correspond at least to that of the motor or has to be sized for higher temperatures.</li><li>The voltage load of the choke depends on the drive controller used.</li></ul> |                                                                                                                                                                                                                                                                                                                                   |

Tab.4-9: Data for Possibly Required Choke

Temperature Evaluation of Third-Party Motor

Only operate such motors with incorporated temperature sensor at Rexroth IndraDrive Cs controllers so that the motor can be thermally moni-

## Combining the Individual Components

tored by the drive controller and protected against destruction by too high temperature rise (see "P-0-0512, Temperature sensor").

When, in exceptional cases, you would like to operate third-party motors without temperature sensor at Rexroth IndraDrive Cs controllers, you must determine the thermal time constants of motor housing (P-0-4035) and motor winding (P-0-4034, P-0-4037). By means of its temperature model, the firmware can correctly reflect the cooling situation of the motor.



In case the motor housing or fan is dirty, this worsens the cooling situation of the motor and protection against thermal overload is therefore insufficient!

## Requirements on the Encoder of the Third-Party Motor

### Motor Encoder of Asynchronous Third-Party Motor

Asynchronous motors can also be controlled by Rexroth IndraDrive Cs controllers in "open-loop" operation (without motor encoder). In "closed-loop" operation (with motor encoder), a relative measuring system is sufficient for asynchronous motors.

### Motor Encoder of Synchronous Third-Party Motor

For fail-safe drives with synchronous third-party motors at Rexroth IndraDrive Cs controllers, the following possible combinations or restrictions have to be taken into account when selecting the measuring system:

| Drive range           | Motor measuring system | Synchronous third-party motor |
|-----------------------|------------------------|-------------------------------|
| Rexroth IndraDrive Cs | Absolute               | ■                             |
|                       | Relative               | □                             |

- Advantageous combination
- Combination is possible (restrictions specific to application), commissioning may be more complicated!

Tab.4-10: Possible Combinations of Synchronous Third-Party Motor and Motor Measuring System



The drive controller can evaluate measuring systems as motor encoder when they are contained in "P-0-0074, Encoder type 1 (motor encoder)".

For information on absolute and relative measuring systems, see section "Measuring Systems" of firmware documentation!

## Motor Encoder Resolver - Notes on Selection

Resolvers must first be checked as to whether they are suited as motor encoders. To check whether they can be evaluated by the drive controllers, the following resolver data are required:

- Data of resolver system to be compared must be available at 8 kHz
- Ratio
- Current consumption
- DC resistance of stator
- Number of poles
- Phase shift

## Combining the Individual Components

By means of the resolver data, check whether the supply voltage of the encoder interface and the signal levels of the encoder tracks are sufficient.

### Notes on Selection and Commissioning

#### Selecting the Controller as Regards Continuous Current

The drive controller required for the respective motor is determined by comparing the motor data to the device data.



The continuous current of the drive controller should be greater than the continuous current of the motor.

The continuous power of the drive controller must be greater than the required average power!

#### Selecting the Connection Technique

For the available power cables and encoder cables, see documentation "Rexroth Connection Cables IndraDrive and IndraDyn".

### Notes on Commissioning



For further information, notes on commissioning and supporting documents (e.g., forms for entering the required data) see firmware documentation.

## 4.3.5 Cables

### Motor power cables

#### Selection

How to select a suitable motor power cable:

See documentation "Rexroth Connection Cables IndraDrive and IndraDyn" (R911322949).

Combining the Individual Components

Allowed Cable Lengths

Allowed Cable Lengths at Ambient Temperature  $T_{a,work} \leq 40\text{ }^{\circ}\text{C}$  according to EN 60 204:

| HCS01.1E-...-A-02 | PWM frequency [kHz] |      |      |      |
|-------------------|---------------------|------|------|------|
|                   | 4                   | 8    | 12   | 16   |
| W0003             | 40 m                | 20 m | 15 m | 10 m |
| W0006             |                     |      |      |      |
| W0009             |                     |      |      |      |
| W0013             |                     |      |      |      |
| W0018             |                     |      |      |      |
| HCS01.1E-...-A-03 |                     |      |      |      |
| W0005             |                     |      |      |      |
| W0008             |                     |      |      |      |
| W0018             |                     |      |      |      |
| W0028             |                     |      |      |      |
| W0054             | 75 m                | 38 m | 25 m | -    |

Tab.4-11: Allowed Motor Cable Lengths

Encoder Cables

MSM Motors

|         | HCS01                                           |       |       |       |       |                    |        |       |        |       |
|---------|-------------------------------------------------|-------|-------|-------|-------|--------------------|--------|-------|--------|-------|
|         | Size 1                                          |       |       |       |       |                    | Size 2 |       | Size 3 |       |
|         | 3 AC 110 ... 230 V                              |       |       |       |       | 3 AC 200 ... 500 V |        |       |        |       |
| Motor   | W0003                                           | W0006 | W0009 | W0013 | W0018 | W0005              | W0008  | W0018 | W0028  | W0054 |
| MSM019A | RKG0033; RKG0041; RKG0034 (extension, optional) |       |       |       |       |                    |        | -     | -      | -     |
| MSM019B |                                                 |       |       |       |       |                    |        | -     | -      | -     |
| MSM031B |                                                 |       |       |       |       |                    |        | -     | -      | -     |
| MSM031C |                                                 |       |       |       |       |                    |        | -     | -      | -     |
| MSM041B | RKG0033; RKG0041; RKG0034 (extension, optional) |       |       |       |       |                    |        | -     |        | -     |

- Combination not allowed  
Tab.4-12: Encoder Cables for HCS01 Converters and MSM Motors

Encoder Cable Length See chapter "Encoder Cable Length" on page 179

MSK Motors

See documentation "Rexroth Connection Cables IndraDrive and IndraDyn" → Selection for Encoder Cables.

## 4.4 Installation Conditions

### 4.4.1 Ambient and Operating Conditions

#### ⚠ WARNING

Lethal electric shock by live parts with more than 50 V!

Exclusively operate the device

- with plugged on connectors (even if there haven't been any lines connected to the connectors) and
- with connected equipment grounding conductor!

#### Control Cabinet

The devices of the Rexroth IndraDrive Cs product range, as well as their additional components (except for some braking resistors), must be mounted in **control cabinets**.



Check that the ambient and operating conditions, in particular the control cabinet temperature, are complied with by calculating the heat levels in the control cabinet. Afterwards, make the corresponding measurements to find out that the ambient and operating conditions have actually been complied with. In the technical data of the individual components, the power dissipation is indicated as an important input value for calculating the heat levels.

#### Ambient and Operating Conditions

| Description                                                                                                                              | Symbol               | Unit | Value                                                                                                                                                                                            |
|------------------------------------------------------------------------------------------------------------------------------------------|----------------------|------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Conductive dirt contamination                                                                                                            |                      |      | Not allowed<br>(You can protect the devices against conductive dirt contamination, for example by mounting them in control cabinets of the degree of protection IP54 in accordance with IEC529.) |
| Degree of protection (IEC529)                                                                                                            |                      |      | IP20                                                                                                                                                                                             |
| Use in the scope of CSA / UL                                                                                                             |                      |      | For use in NFPA 79 Applications only.                                                                                                                                                            |
| Temperature during storage                                                                                                               |                      |      | See <a href="#">chapter 5.4 "Storage of the Components" on page 106</a>                                                                                                                          |
| Temperature during transport                                                                                                             |                      |      | See <a href="#">chapter 5.3 "Transport of the Components" on page 106</a>                                                                                                                        |
| Allowed mounting position<br>Definition of mounting positions: See <a href="#">chapter "Mounting Positions of Components" on page 59</a> |                      |      | G1                                                                                                                                                                                               |
| Installation altitude                                                                                                                    | $h_{\text{nenn}}$    | m    | 1000                                                                                                                                                                                             |
| Ambient temperature range                                                                                                                | $T_{\text{a\_work}}$ | °C   | 0 ... 40                                                                                                                                                                                         |



## Combining the Individual Components
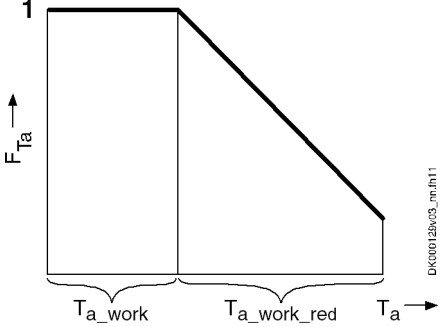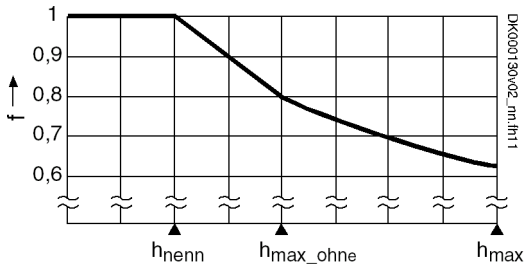
| Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Symbol             | Unit  | Value                                                                                                                                                                                                                     |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|-------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Derating vs. ambient temperature:</b><br>In the ambient temperature range $T_{a\_work\_red}$ , the performance data are reduced by the factor $F_{Ta}$ :<br>$F_{Ta} = 1 - [(T_a - 40) \times f_{Ta}]$<br>Example: With an ambient temperature $T_a = 50\text{ °C}$ and a capacity utilization factor $f_{Ta} = 2\%$ , the rated power is reduced to<br>$P_{DC\_cont\_red} = P_{DC\_cont} \times F_{Ta} =$<br>$P_{DC\_cont} \times (1 - [(50 - 40) \times 0.02]) =$<br>$P_{DC\_cont} \times 0.8$<br>Operation at ambient temperatures outside of $T_{a\_work}$ and $T_{a\_work\_red}$ is not allowed! |                    |       |                                                                                                                                         |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | $T_{a\_work\_red}$ | °C    | 40 ... 55                                                                                                                                                                                                                 |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | $f_{Ta}$           | %/K   | Capacity utilization factor: See technical data of the respective component (Data for Cooling and Power Dissipation → Derating of $P_{DC\_cont}$ , $P_{BD}$ , $I_{out\_cont}$ at $T_{a\_work} < T_a < T_{a\_work\_red}$ ) |
| <b>Derating vs. installation altitude:</b><br>With installation altitudes $h > h_{nenn}$ , the available performance data are reduced by the factor $f^{(3) 4)}$ .<br>With installation altitudes in the range of $h_{max\_ohne}$ to $h_{max}$ , an <b>overvoltage limiter</b> against transient overvoltage must be installed in the installation.<br>Use above $h_{max}$ is not allowed!                                                                                                                                                                                                              |                    |       |                                                                                                                                        |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | $h_{max\_ohne}$    | m     | 2000                                                                                                                                                                                                                      |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | $h_{max}$          | m     | 4000                                                                                                                                                                                                                      |
| <b>Simultaneous derating</b> for ambient temperature and installation altitude                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                    |       | Allowed;<br>reduce with factors $f$ and $f_{Ta}$                                                                                                                                                                          |
| Relative humidity                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                    | %     | 5 ... 95                                                                                                                                                                                                                  |
| Absolute humidity                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                    | g/m³  | 1 ... 29                                                                                                                                                                                                                  |
| Moisture condensation                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                    |       | Not allowed                                                                                                                                                                                                               |
| Climatic category (IEC721)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                    |       | 3K3                                                                                                                                                                                                                       |
| Allowed pollution degree (IEC 60664-1)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                    |       | 2                                                                                                                                                                                                                         |
| Allowed dust, steam                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                    |       | EN 50178 tab. A.2                                                                                                                                                                                                         |
| Vibration sine: Amplitude (peak-peak) at 5 ... 32 Hz <sup>2)</sup>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                    | mm    | 0,6 ±15 %                                                                                                                                                                                                                 |
| Vibration sine: Acceleration at 32 ... 200 Hz <sup>2)</sup>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                    | g     | 1,3 ±15 %                                                                                                                                                                                                                 |
| Vibration noise (random) frequency <sup>1)</sup>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                    | Hz    | 20 ... 500                                                                                                                                                                                                                |
| Vibration noise (random) spectral acceleration density, amplitude <sup>1)</sup>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                    | g²/Hz | 0,05                                                                                                                                                                                                                      |
| Vibration noise (random) rms value of total acceleration <sup>1)</sup>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                    | g     | 1,5                                                                                                                                                                                                                       |

Combining the Individual Components

| Description                                                             | Symbol | Unit | Value                         |
|-------------------------------------------------------------------------|--------|------|-------------------------------|
| Vibration sine: Axial<br>Acceleration at 10 ... 2,000 Hz <sup>2)</sup>  |        | g    | -                             |
| Vibration sine: Radial<br>Acceleration at 10 ... 2,000 Hz <sup>2)</sup> |        | g    | -                             |
| Overvoltage category                                                    |        |      | III (according to IEC60664-1) |

- 1)
- 2)
- 3)
- 4)
- According to EN 60068-2-64
- According to EN 60068-2-6
- Reduced performance data for drive controllers: Allowed DC bus continuous power, allowed mains voltage, braking resistor continuous power, continuous current
- Reduced performance data for motors: Performance, torque S1 and S3





Tab.4-13: Ambient and Operating Conditions

4.4.2 Control Cabinet Design and Cooling



The only mounting position allowed for supply units and drive controllers to be installed in control cabinets is G1.

Possibilities of Heat Dissipation
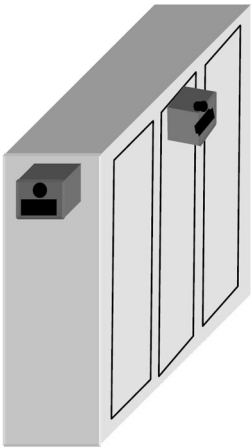
| Closed control cabinet with air circulation                                                               | Closed control cabinet with heat exchanger                                                                | Control cabinet with fan                                                                                   | Closed control cabinet with air conditioning unit                                                           |
|-----------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------|
| <br>DF000644v01_nn.tif | <br>DF000645v01_nn.tif | <br>DF000646v01_nn.tif | <br>DF000647v01_nn.tif |
| $P_Q \sim 400\text{ W}$                                                                                   | $P_Q \sim 1700\text{ W}$                                                                                  | $P_Q \sim 2700\text{ W}$                                                                                   | $P_Q \sim 4000\text{ W}$                                                                                    |

$P_Q$  Dissipated heat output  
Tab.4-14: Possibilities of Heat Dissipation

The section below describes the "control cabinet with fan".

Requirements for Control Cabinets with Fan

NOTICE


Risk of damage by unclean air in the control cabinet!

Operating a control cabinet with a fan, but without the corresponding filters, can damage the devices or cause malfunction.

## Combining the Individual Components

- Install filters at the air intake opening of the control cabinet so that impure air cannot get into the control cabinet.
- Service the filters at regular intervals according to the dust loading in the environment.
- Only replace the filters when the fan has been switched off, because otherwise the fan sucks in the dirt coming off the filter and the dirt gets into the control cabinet.

Control Cabinet Ventilation (Schematic Diagram)

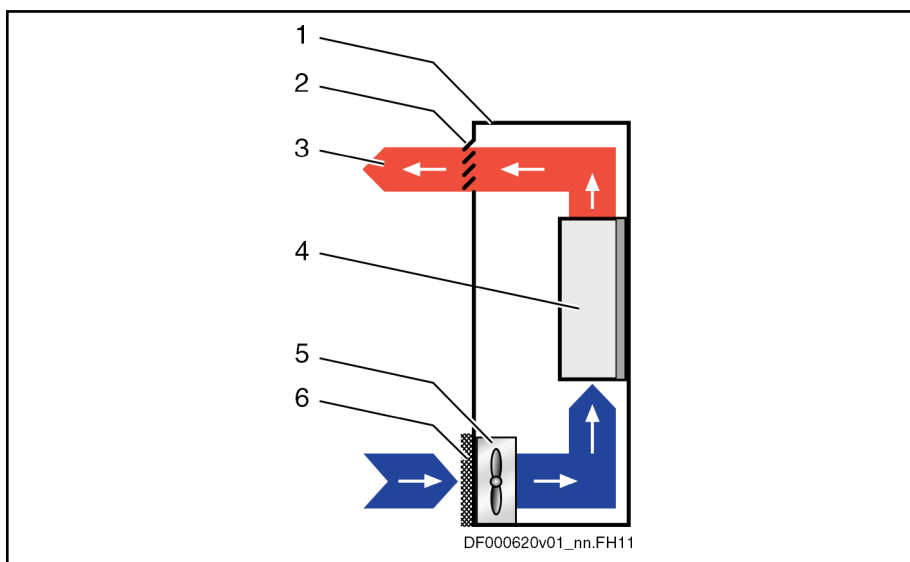

- |   |                              |
|---|------------------------------|
| 1 | Control cabinet              |
| 2 | Air outlet opening           |
| 3 | Heat discharge               |
| 4 | Device in control cabinet    |
| 5 | Control cabinet fan          |
| 6 | Filter at air intake opening |

Fig. 4-3: Control Cabinet Ventilation (Schematic Diagram)

Only clean air gets into the control cabinet through the filter at the air intake opening. The control cabinet fan behind the air intake opening delivers the air into the control cabinet and generates overpressure in the control cabinet. This overpressure prevents unclean air from entering into the control cabinet through potentially leaky points (leaky cable passages, damaged seals, etc.).

### 4.4.3 UL Ratings

This chapter contains:

- Limit values for use in the scope of CSA / UL
- Applied standards (CE conformity, UL listing)

## Combining the Individual Components

### Ambient and Operating Conditions - UL Ratings

| Description                              | Symbol         | Unit  | HCS01.1E<br>-W0003-<br>_02 | HCS01.1E<br>-W0006-<br>_02 | HCS01.1E<br>-W0009-<br>_02 | HCS01.1E<br>-W0013-<br>_02 | HCS01.1E<br>-W0018-<br>_02 |
|------------------------------------------|----------------|-------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|
| Short circuit current rating             | SCCR           | A rms | 42000                      |                            |                            |                            |                            |
| Rated input voltage, power <sup>1)</sup> | $U_{LN\_nenn}$ | V     | 1 or 3 x AC 110...230      |                            |                            |                            |                            |
| Rated input current                      | $I_{LN}$       | A     | 1.8 or 0.6                 | 2.8 or 1.2                 | 5.0 or 2.3                 | 8.3 or 4.5                 | 12.8 or 9.6                |
| Output voltage                           | $U_{out}$      | V     | 3 x AC 0...230             |                            |                            |                            |                            |
| Output current                           | $I_{out}$      | A     | 1,1                        | 2,0                        | 3,0                        | 4,5                        | 7,6                        |
| Last modification: 2012-01-23            |                |       |                            |                            |                            |                            |                            |

1) Mains input L1, L2, L3; approved only for use at a solidly grounded, star-connected source.

Tab.4-15: HCS - Ambient and Operating Conditions - UL Ratings

### Ambient and Operating Conditions - UL Ratings

| Description                              | Symbol         | Unit  | HCS01.1E<br>-W0005-<br>_03 | HCS01.1E<br>-W0008-<br>_03 | HCS01.1E<br>-W0018-<br>_03 | HCS01.1E<br>-W0028-<br>_03 | HCS01.1E<br>-W0054-<br>_03 |
|------------------------------------------|----------------|-------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|
| Short circuit current rating             | SCCR           | A rms | 42000                      |                            |                            |                            |                            |
| Rated input voltage, power <sup>1)</sup> | $U_{LN\_nenn}$ | V     | 3 x AC 200...500           |                            |                            |                            |                            |
| Rated input current                      | $I_{LN}$       | A     | 1,5                        | 2,5                        | 5,0                        | 10,0                       | 28,0                       |
| Output voltage                           | $U_{out}$      | V     | 3 x AC 0...500             |                            |                            |                            |                            |
| Output current                           | $I_{out}$      | A     | 1,7                        | 2,7                        | 7,6                        | 11,5                       | 21,0                       |
| Last modification: 2013-01-10            |                |       |                            |                            |                            |                            |                            |

1) Mains input L1, L2, L3; approved only for use at a solidly grounded, star-connected source.

Tab.4-16: HCS - Ambient and Operating Conditions - UL Ratings

## 4.4.4 Compatibility With Foreign Matters

All Rexroth controls and drives are developed and tested according to the state-of-the-art technology.

As it is impossible to follow the continuing development of all materials (e.g. lubricants in machine tools) which may interact with the controls and drives, it cannot be completely ruled out that any reactions with the materials we use might occur.

For this reason, before using the respective material a compatibility test has to be carried out for new lubricants, cleaning agents etc. and our housings/ materials.

## 4.5 Mechanical Project Planning

### 4.5.1 Drive Controller

#### Dimensional Drawings

Options for Mounting • Standard mounting:

## Combining the Individual Components

The back of the device is directly mounted to the mounting surface in the control cabinet


- **Left-hand or right-hand mounting:**

The left or right side of the device is directly mounted to the mounting surface in the control cabinet

See also [chapter 6.1 "Mounting HCS01 Devices in the Control Cabinet"](#) on [page 107](#).

HCS01.1E-W0003/5/6/8/9/13


Standard mounting:

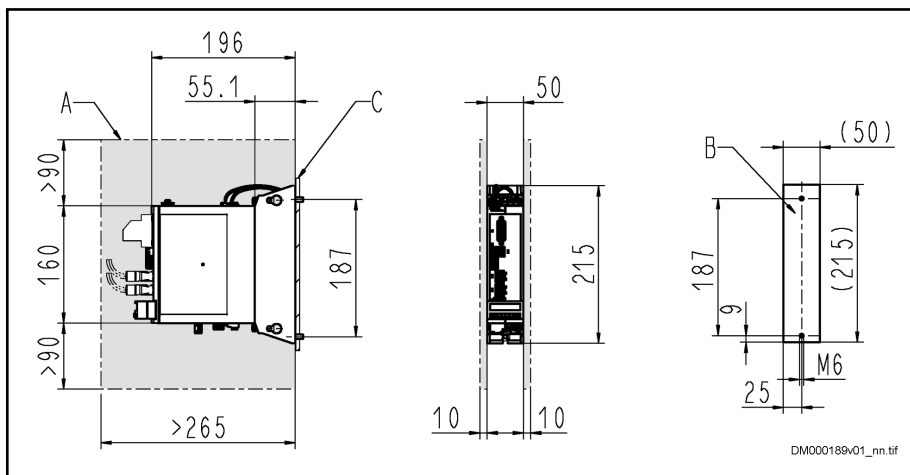

- A Minimum mounting clearance  
B Boring dimensions  
C Mounting surface

Fig. 4-4: Dimensional Drawing HCS01.1E-W0003/5/6/8/9/13 (Standard Mounting)

Left-hand or right-hand mounting:

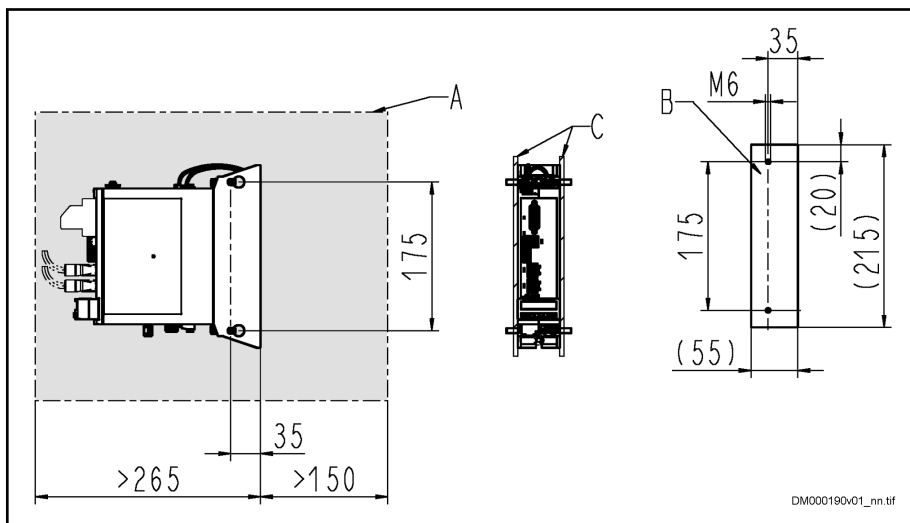

- A Minimum mounting clearance  
B Boring dimensions  
C Mounting surface

Fig. 4-5: Dimensional Drawing HCS01.1E-W0003/5/6/8/9/13 (Left-Hand or Right-Hand Mounting)

**HCS01.1E-W0018/28**

- Fig.4-6: Dimensional Drawing HCS01.1E-W0018/28 (Standard Mounting)*

Technical drawings of the DM000192v01 unit, showing front, side, and top views with dimensions.

**Front View:** The unit is shown within a dashed rectangular frame. The overall width is indicated as  $>265$  and the depth as  $>150$ . The height of the unit is  $228$ . A dimension of  $35$  is shown for the width of the front panel.

**Side View:** The side profile of the unit is shown. The height is  $228$ . A dimension of  $35$  is shown for the depth of the front panel. The label 'C' points to the top edge of the unit.


**Top View:** The top of the unit is shown. The width is  $35$ . The depth is indicated as  $(20)$  and  $(268)$ . A dimension of  $228$  is shown for the height of the front panel. A dimension of  $(55)$  is shown for the depth of the front panel. A dimension of  $M6$  is shown for the mounting hole. The label 'B' points to the front panel.

DM000192v01\_nn.tif

- Fig.4-7: Dimensional Drawing HCS01.1E-W0018/28 (Left-Hand or Right-Hand Mounting)

## Combining the Individual Components


**HCS01.1E-W0054**     Standard mounting:

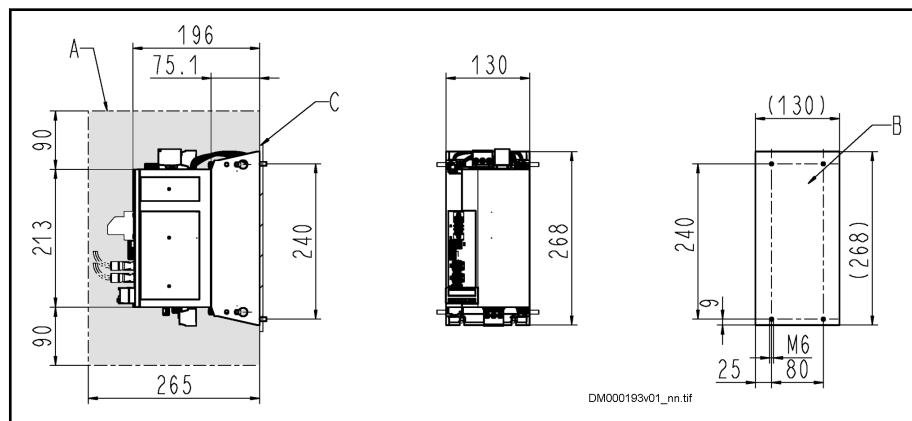

- |   |                                                     |
|---|-----------------------------------------------------|
| A | Minimum mounting clearance                          |
| * | With left-hand or right-hand mounting of the device |
| B | Boring dimensions                                   |
| C | Mounting surface                                    |

**Fig.4-8:** *Dimensional Drawing HCS01.1E-W0054 (Standard Mounting)*

Left-hand or right-hand mounting:

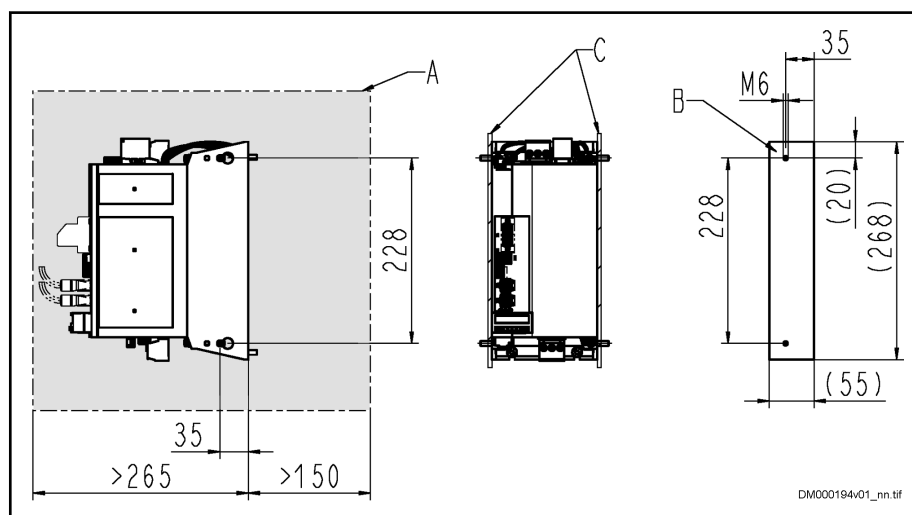

- |   |                                                     |
|---|-----------------------------------------------------|
| A | Minimum mounting clearance                          |
| * | With left-hand or right-hand mounting of the device |
| B | Boring dimensions                                   |
| C | Mounting surface                                    |

**Fig.4-9:** *Dimensional Drawing HCS01.1E-W0054 (Left-Hand or Right-Hand Mounting)*

### Dimensions, Mass, Insulation, Sound Pressure Level

### Data for Mass, Dimensions, Sound Pressure Level, Insulation

| Description                   | Symbol | Unit | HCS01.1E<br>-W0003-<br>_02 | HCS01.1E<br>-W0006-<br>_02 | HCS01.1E<br>-W0009-<br>_02 | HCS01.1E<br>-W0013-<br>_02 | HCS01.1E<br>-W0018-<br>_02 |
|-------------------------------|--------|------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|
| Mass                          | m      | kg   | 0,72                       |                            |                            |                            | 1,70                       |
| Device height <sup>1)</sup>   | H      | mm   | 215                        |                            |                            |                            | 268                        |
| Last modification: 2012-01-23 |        |      |                            |                            |                            |                            |                            |

## Combining the Individual Components

| Description                                                                                | Symbol          | Unit   | HCS01.1E<br>-W0003-<br>_02 | HCS01.1E<br>-W0006-<br>_02 | HCS01.1E<br>-W0009-<br>_02 | HCS01.1E<br>-W0013-<br>_02 | HCS01.1E<br>-W0018-<br>_02 |         |
|--------------------------------------------------------------------------------------------|-----------------|--------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|---------|
| Device depth <sup>2)</sup>                                                                 | T               | mm     | 196                        |                            |                            |                            |                            |         |
| Device width <sup>3)</sup>                                                                 | B               | mm     | 50                         |                            |                            |                            |                            | 70      |
| Insulation resistance at DC 500 V                                                          | R <sub>is</sub> | Mohm   | 10,00                      |                            |                            |                            |                            |         |
| Capacitance against housing                                                                | C <sub>Y</sub>  | nF     | 2 x 68                     |                            |                            |                            |                            | 2 x 100 |
| Average sound pressure level (ac-<br>curacy class 2) at P <sub>DC_cont</sub> <sup>4)</sup> | L <sub>P</sub>  | dB (A) | tbd                        |                            |                            |                            |                            |         |
| Last modification: 2012-01-23                                                              |                 |        |                            |                            |                            |                            |                            |         |

1) 2) 3) Housing dimension; see also related dimensional drawing  
4) According to DIN EN ISO 11205; comparative value at distance 1 m,  
out of cabinet; HCS types with order code -L\*\*\*; load-dependent  
*Tab.4-17: HCS - Data for Mass, Dimensions, Sound Pressure Level, Insulation*

### Data for Mass, Dimensions, Sound Pressure Level, Insulation

| Description                                                                                | Symbol          | Unit   | HCS01.1E<br>-W0005-<br>_03 | HCS01.1E<br>-W0008-<br>_03 | HCS01.1E<br>-W0018-<br>_03 | HCS01.1E<br>-W0028-<br>_03 | HCS01.1E<br>-W0054-<br>_03 |
|--------------------------------------------------------------------------------------------|-----------------|--------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|
| Mass                                                                                       | m               | kg     | 0,72                       |                            | 1,70                       |                            | 4,22                       |
| Device height <sup>1)</sup>                                                                | H               | mm     | 215                        |                            | 268                        |                            |                            |
| Device depth <sup>2)</sup>                                                                 | T               | mm     | 196                        |                            |                            |                            |                            |
| Device width <sup>3)</sup>                                                                 | B               | mm     | 50                         |                            | 70                         |                            | 130                        |
| Insulation resistance at DC 500 V                                                          | R <sub>is</sub> | Mohm   | 10,00                      |                            |                            |                            |                            |
| Capacitance against housing                                                                | C <sub>Y</sub>  | nF     | 2 x 68                     |                            | 2 x 100                    |                            |                            |
| Average sound pressure level (ac-<br>curacy class 2) at P <sub>DC_cont</sub> <sup>4)</sup> | L <sub>P</sub>  | dB (A) | tbd                        |                            |                            |                            |                            |
| Last modification: 2012-01-23                                                              |                 |        |                            |                            |                            |                            |                            |

1) 2) 3) Housing dimension; see also related dimensional drawing  
4) According to DIN EN ISO 11205; comparative value at distance 1 m,  
out of cabinet; HCS types with order code -L\*\*\*; load-dependent  
*Tab.4-18: HCS - Data for Mass, Dimensions, Sound Pressure Level, Insulation*

## Temperatures, Cooling, Power Dissipation, Distances

### Data for Cooling and Power Dissipation

| Description                                                       | Symbol                  | Unit | HCS01.1E<br>-W0003-<br>_02 | HCS01.1E<br>-W0006-<br>_02 | HCS01.1E<br>-W0009-<br>_02 | HCS01.1E<br>-W0013-<br>_02 | HCS01.1E<br>-W0018-<br>_02 |
|-------------------------------------------------------------------|-------------------------|------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|
| Ambient temperature range for operation with nominal data         | T <sub>a_work</sub>     | °C   | 0...40                     |                            |                            |                            |                            |
| Ambient temperature range for operation with reduced nominal data | T <sub>a_work_red</sub> | °C   | 0...55                     |                            |                            |                            |                            |
| Last modification: 2012-05-16                                     |                         |      |                            |                            |                            |                            |                            |



## Combining the Individual Components

| Description                                                                                                                                     | Symbol                         | Unit | HCS01.1E<br>-W0003-<br>_02 | HCS01.1E<br>-W0006-<br>_02 | HCS01.1E<br>-W0009-<br>_02 | HCS01.1E<br>-W0013-<br>_02 | HCS01.1E<br>-W0018-<br>_02 |
|-------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------|------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|
| Derating of P <sub>DC_cont</sub> ; P <sub>BD</sub> ; I <sub>out_cont</sub> at<br>T <sub>a_work</sub> < T <sub>a</sub> < T <sub>a_work_red</sub> | f <sub>Ta</sub>                | %/K  | 2,0                        |                            |                            |                            |                            |
| Allowed mounting position                                                                                                                       |                                |      | G1                         |                            |                            |                            |                            |
| Cooling type                                                                                                                                    |                                |      | Not ventilated             |                            |                            | Forced ventilation         |                            |
| Volumetric capacity of forced cool-<br>ing                                                                                                      | V                              | m³/h | -                          |                            |                            | 11,00                      | 56,00                      |
| Allowed switching frequencies <sup>1)</sup>                                                                                                     | f <sub>s</sub>                 | kHz  | 4, 8, 12, 16               |                            |                            |                            |                            |
| Power dissipation at I <sub>out_cont</sub> = 0 A;<br>f <sub>s</sub> = f <sub>s</sub> (min.) <sup>2)</sup>                                       | P <sub>Diss_0A_fs</sub><br>min | W    | 4                          |                            | 6                          |                            | 8                          |
| Power dissipation at I <sub>out_cont</sub> = 0 A;<br>f <sub>s</sub> = f <sub>s</sub> (max.) <sup>3)</sup>                                       | P <sub>Diss_0A_fs</sub><br>max | W    | 15                         |                            | 17                         |                            | 21                         |
| Power dissipation at continuous<br>current and continuous DC bus<br>power respectively <sup>4)</sup>                                            | P <sub>Diss_cont</sub>         | W    | 8,00                       | 10,00                      | 12,00                      | 20,00                      | 70,00                      |
| Minimum distance on the top of<br>the device <sup>5)</sup>                                                                                      | d <sub>top</sub>               | mm   | 90                         |                            |                            |                            |                            |
| Minimum distance on the bottom<br>of the device <sup>6)</sup>                                                                                   | d <sub>bot</sub>               | mm   | 90                         |                            |                            |                            |                            |
| Horizontal spacing on the device <sup>7)</sup>                                                                                                  | d <sub>hor</sub>               | mm   | 10                         |                            |                            |                            | 0                          |
| Temperature rise with minimum<br>distances d <sub>bot</sub> ; d <sub>top</sub> ; P <sub>BD</sub>                                                | ΔT                             | K    | tbd                        |                            |                            |                            |                            |
| Last modification: 2012-05-16                                                                                                                   |                                |      |                            |                            |                            |                            |                            |

- 1) Also depending on firmware and control section; see parameter description "P-0-0001, Switching frequency of the power output stage"; see "P-0-4058, Amplifier type data"
- 2) 3) Plus dissipation of braking resistor and control section; find interim values by interpolation to  $P_{Diss\_cont}$
- 4) Plus dissipation of braking resistor and control section
- 5) 6) 7) See fig. "Air Intake and Air Outlet at Device"
- Tab.4-19: HCS - Data for Cooling and Power Dissipation

## Data for Cooling and Power Dissipation

| Description                                                                                                                                  | Symbol                  | Unit | HCS01.1E<br>-W0005-<br>_03 | HCS01.1E<br>-W0008-<br>_03 | HCS01.1E<br>-W0018-<br>_03 | HCS01.1E<br>-W0028-<br>_03 | HCS01.1E<br>-W0054-<br>_03 |
|----------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|
| Ambient temperature range for operation with nominal data                                                                                    | T <sub>a_work</sub>     | °C   | 0...40                     |                            |                            |                            |                            |
| Ambient temperature range for operation with reduced nominal data                                                                            | T <sub>a_work_red</sub> | °C   | 0...55                     |                            |                            |                            |                            |
| Derating of P <sub>DC_cont</sub> ; P <sub>BD</sub> ; I <sub>out_cont</sub> at T <sub>a_work</sub> < T <sub>a</sub> < T <sub>a_work_red</sub> | f <sub>Ta</sub>         | %/K  | 2,0                        |                            |                            |                            |                            |
| Last modification: 2012-05-16                                                                                                                |                         |      |                            |                            |                            |                            |                            |

Combining the Individual Components

| Description                                                                                               | Symbol                         | Unit | HCS01.1E<br>-W0005-<br>_03 | HCS01.1E<br>-W0008-<br>_03 | HCS01.1E<br>-W0018-<br>_03 | HCS01.1E<br>-W0028-<br>_03 | HCS01.1E<br>-W0054-<br>_03 |          |
|-----------------------------------------------------------------------------------------------------------|--------------------------------|------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|----------|
| Allowed mounting position                                                                                 |                                |      | G1                         |                            |                            |                            |                            |          |
| Cooling type                                                                                              |                                |      | Forced ventilation         |                            |                            |                            |                            |          |
| Volumetric capacity of forced cooling                                                                     | V                              | m³/h | 11,00                      |                            | 56,00                      |                            | 113,00                     |          |
| Allowed switching frequencies <sup>1)</sup>                                                               | f <sub>s</sub>                 | kHz  | 4, 8, 12, 16               |                            |                            |                            |                            | 4, 8, 12 |
| Power dissipation at I <sub>out_cont</sub> = 0 A;<br>f <sub>s</sub> = f <sub>s</sub> (min.) <sup>2)</sup> | P <sub>Diss_0A_fs</sub><br>min | W    | 23                         |                            | 30                         | 36                         | 55                         |          |
| Power dissipation at I <sub>out_cont</sub> = 0 A;<br>f <sub>s</sub> = f <sub>s</sub> (max.) <sup>3)</sup> | P <sub>Diss_0A_fs</sub><br>max | W    | 65                         |                            | 85                         | 91                         | 135                        |          |
| Power dissipation at continuous<br>current and continuous DC bus<br>power respectively <sup>4)</sup>      | P <sub>Diss_cont</sub>         | W    | 37,00                      | 46,00                      | 80,00                      | 120,00                     | 400,00                     |          |
| Minimum distance on the top of<br>the device <sup>5)</sup>                                                | d <sub>top</sub>               | mm   | 90                         |                            |                            |                            |                            |          |
| Minimum distance on the bottom<br>of the device <sup>6)</sup>                                             | d <sub>bot</sub>               | mm   | 90                         |                            |                            |                            |                            |          |
| Horizontal spacing on the device <sup>7)</sup>                                                            | d <sub>hor</sub>               | mm   | 10                         |                            | 0                          |                            |                            |          |
| Temperature rise with minimum<br>distances d <sub>bot</sub> ; d <sub>top</sub> ; P <sub>BD</sub>          | ΔT                             | K    | tbd                        | tbd                        |                            |                            |                            |          |
| Last modification: 2012-05-16                                                                             |                                |      |                            |                            |                            |                            |                            |          |

- 1) Also depending on firmware and control section; see parameter description "P-0-0001, Switching frequency of the power output stage"; see "P-0-4058, Amplifier type data"
- 2) 3) Plus dissipation of braking resistor and control section; find interim values by interpolation to P<sub>Diss\_cont</sub>
- 4) Plus dissipation of braking resistor and control section
- 5) 6) 7) See fig. "Air Intake and Air Outlet at Device"
- Tab.4-20: HCS - Data for Cooling and Power Dissipation

**NOTICE**


**Property damage due to temperatures higher than 105 °C!**

Observe the indicated minimum distances!

Above the devices there may only be such materials which

- are not combustible
- are insensitive to the occurring high temperatures

## Combining the Individual Components

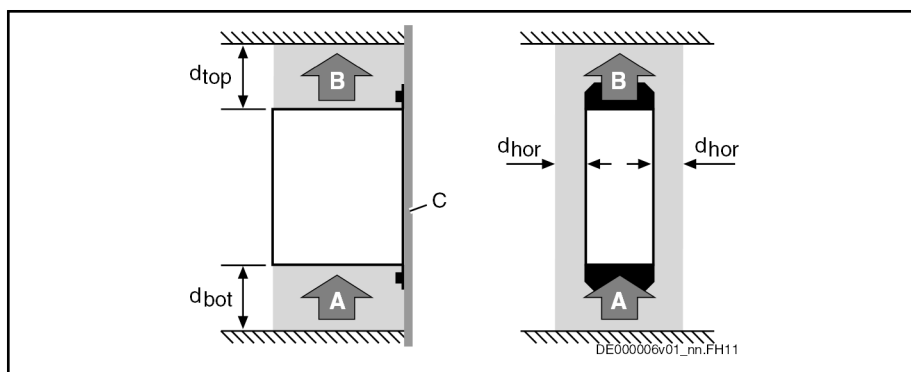

- A Air intake  
 B Air outlet  
 C Mounting surface in control cabinet  
 $d_{top}$  Distance top  
 $d_{bot}$  Distance bottom  
 $d_{hor}$  Distance horizontal

Fig. 4-10: Air Intake and Air Outlet at Device

Mounting Positions of Components


**NOTICE**

**Risk of damage to the components!**

Only operate the components in their allowed mounting positions.

Allowed Mounting Position of the Components

Only the mounting position **G1** is allowed for HCS01 components.

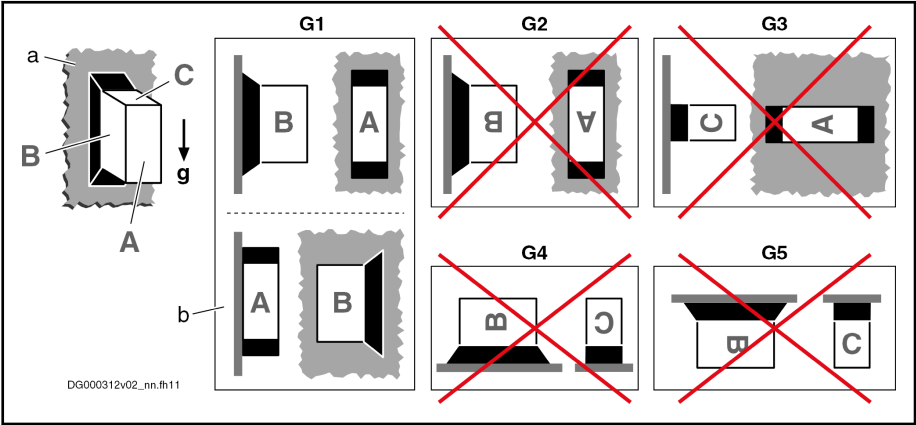


- A, B, C      Sides of a component: A = front side, B = left or right side, C = top side
- a      Mounting surface in control cabinet
- b      Mounting position G1, when side B of component directly mounted to mounting surface
- g      Direction of gravitational force
- G1      **Normal mounting position:** The natural convection supports the forced cooling air current. This avoids the generation of pockets of heat in the component.
- G2      180° to normal mounting position
- G3      90° to normal mounting position
- G4      Bottom mounting; mounting surface on bottom of control cabinet
- G5      Top mounting; mounting surface at top of control cabinet
- Fig. 4-11:      *Allowed Mounting Position of the Components*

## Combining the Individual Components

## 4.6 Electrical Project Planning

## 4.6.1 Overall Connection Diagram

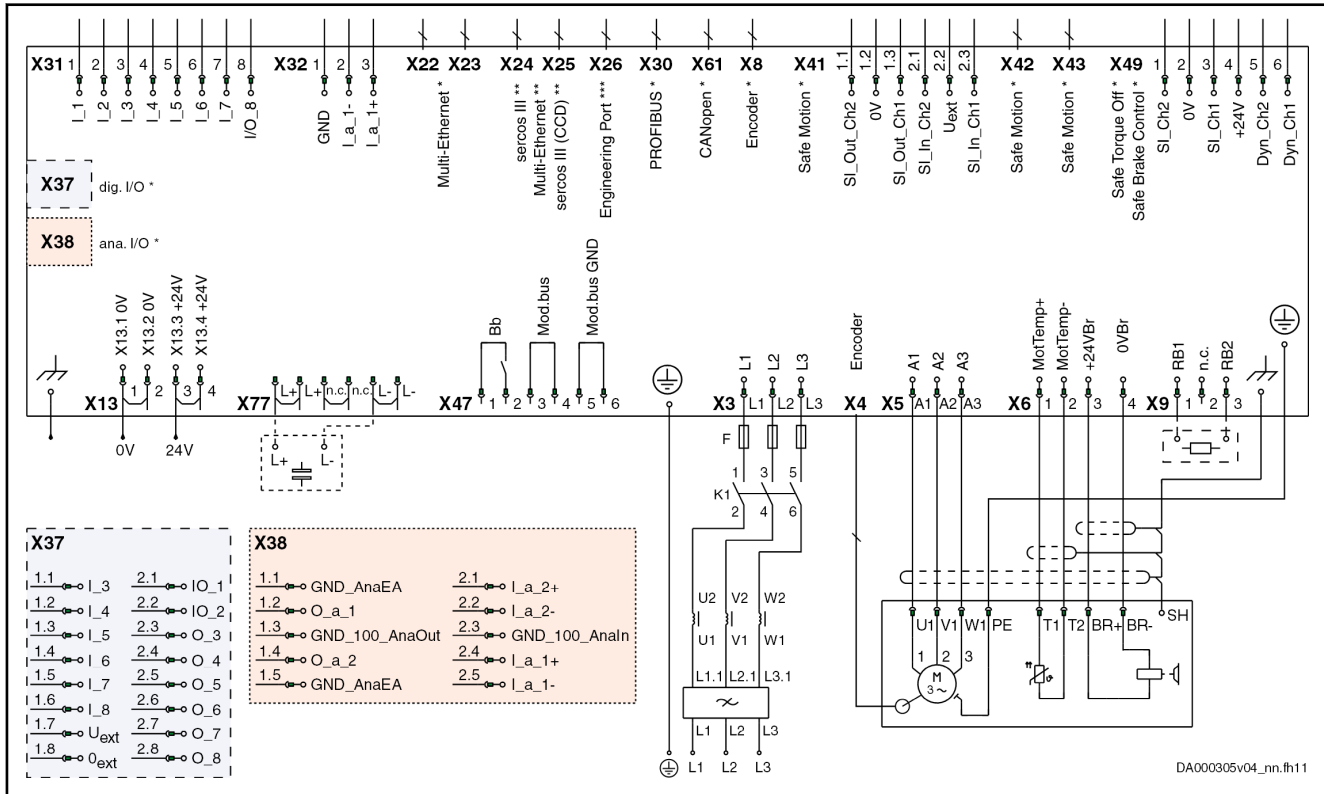

- \* Optional
- \*\* **ECONOMY** = sercos III; **BASIC** = Multi-Ethernet; **ADVANCED** = sercos III cross communication (CCD)
- \*\*\* Only available at HCS01.1E-W00\*\*-A-0\*-A-CC (ADVANCED) devices
- X6.1, X6.2 T1 and T2 are not available at MSM motors. In order that the temperature control of the motor works correctly, the motor temperature sensor must be connected as specified in the wiring diagram; otherwise, motor overtemperature detection in the drive is impossible. For Rexroth motors, such as MSK, the motor overload protection level is automatically set when the motor is connected to the drive. It is not necessary to make any adjustment. Apart from that, please refer to the Rexroth firmware documentation.
- X31 No standard assignment preset; make the assignment by means of firmware documentation (see Functional Description, index entry "Digital inputs/outputs")
- X47.1, X47.2 For the "ready for operation" message of the device, the Bb relay contact (X47.1, X47.2) must be wired
- X47.3...6 Module bus only available at HCS01.1E-W00xx-x-03 devices
- X77 DC bus connection (L+, L-) only available at HCS01.1E-W00xx-x-03 devices

Fig.4-12: Connection Diagram

## 4.6.2 Project Planning of Control Voltage

## Control Voltage for Drive Systems

Some components of a drive system must be supplied with control voltage. When doing the project planning for control voltage supply, take the requirements of the drive system components into account:

- **Allowed tolerances of the supply voltage** depending on the length of the motor cable and the use of motor holding brakes

## Combining the Individual Components

- Power consumption of the **drive controllers**
- Power consumption of **other loads** (e.g. motor holding brake, digital outputs)
- **Current carrying capacity of the connection point** for control voltage supply at the component for the purpose of looping through the control voltage to other components

## Sizing the Control Voltage Supply

### Determining the Power Requirement


#### Power Requirement of the Drive Controller

The **total power requirement** of the control voltage supply of a drive controller results from the sum of the following power values:

- Basic device (drive controller without connected encoders)
- Optional connection interfaces (e.g. communication, additional encoder evaluation)
- Connected encoder systems
- External loads

For the configuration of your drive controller, see the type plate and the type code.

**Example of a type code:**

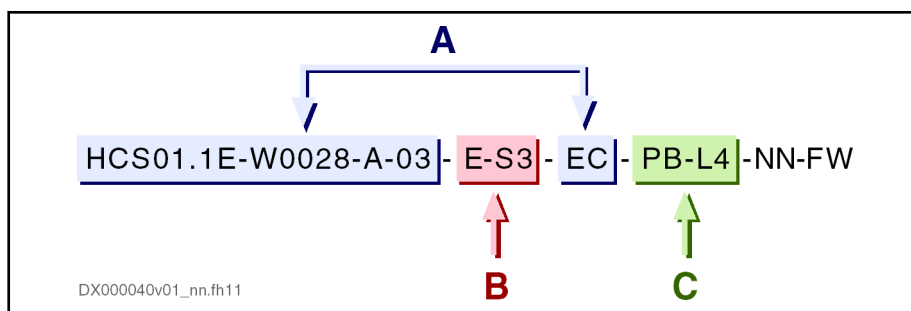

- A Basic device (maximum current [W0028 = 28 A], line [03], on-board connection point [EC])
- B Control section design (E = Economy; S3 = sercos III)
- C Optional connection points (PB = Profibus; L4 = safety technology [STO, SBC])

Fig.4-13: Type Code HCS01

The tables below contain the individual power values required by the drive controller. The power requirement of the supplying 24V power supply unit results from the sum of these individual power values.

#### Power Requirement of the Basic Device

The power requirement of the basic device results from

- Maximum current of drive controller
- Design of control section

## Combining the Individual Components

Table 1: Power Requirement of the Basic Device

| Maximum current, line <sup>1)</sup><br><br>HCS01.1E-... | Control section design |                 |                    |
|---------------------------------------------------------|------------------------|-----------------|--------------------|
|                                                         | E-S3<br>(ECONOMY)      | B-ET<br>(BASIC) | A-CC<br>(ADVANCED) |
| W0003-A-02-x-xx-EC                                      | 8.1 W                  | 12.7 W          | 13.4 W             |
| W0006-A-02-x-xx-EC                                      |                        |                 |                    |
| W0009-A-02-x-xx-EC                                      |                        |                 |                    |
| W0013-A-02-x-xx-EC                                      | 9.4 W                  | 14.3 W          | 15 W               |
| W0018-A-02-x-xx-EC                                      | 12.7 W                 | 17.3 W          | 18 W               |
| W0005-A-03-x-xx-EC                                      | 9.4 W                  | 14.3 W          | 15 W               |
| W0008-A-03-x-xx-EC                                      |                        |                 |                    |
| W0018-A-03-x-xx-EC                                      | 12.7 W                 | 17.3 W          | 18 W               |
| W0028-A-03-x-xx-EC                                      |                        |                 |                    |
| W0054-A-03-x-xx-EC                                      | 25.7 W                 | 30.3 W          | 31 W               |

<sup>1)</sup> The wild card **x-xx** in this column represents the control section design. Example: The basic device HCS01.1E-W0028-A-03-E-S3-EC has a power requirement of 12.7 W.

Tab.4-21: Power Requirement of the Basic Device

## Power Requirement of the Optional Connection Points

If the drive controller has optional connection points, the power requirement of the basic device is increased.

Table 2: Power Requirement of the Optional Connection Point

| Optional connection point<br>(Identifier in type code) | Power requirement | Explanation                                                                                                                                                                                                                                                                                                                                                |
|--------------------------------------------------------|-------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| EC <sup>1)</sup>                                       | 1.1 W             | <i>Encoder Systems</i> <ul style="list-style-type: none"> <li>MSM motor encoder</li> <li>MSK motor encoder</li> <li>Sin-cos encoder 1 V<sub>pp</sub>; HIPERFACE®</li> <li>Sin-cos encoder 1 V<sub>pp</sub>; EnDat 2.1</li> <li>Sin-cos encoder 1 V<sub>pp</sub>; with reference track</li> <li>5V-TTL square-wave encoder; with reference track</li> </ul> |
| L3                                                     | 1.0 W             | STO (Safe Torque Off )                                                                                                                                                                                                                                                                                                                                     |
| L4                                                     | 1.0 W             | STO (Safe Torque Off )<br>SBC (Safe Brake Control)                                                                                                                                                                                                                                                                                                         |
| PB                                                     | 1.1 W             | Profibus (communication)                                                                                                                                                                                                                                                                                                                                   |
| ET <sup>2)</sup>                                       | 2.7 W             | Multi-Ethernet interface (communication)                                                                                                                                                                                                                                                                                                                   |

## Combining the Individual Components

| Optional connection point<br>(Identifier in type code) | Power requirement | Explanation       |
|--------------------------------------------------------|-------------------|-------------------|
| CN                                                     | 1.5 W             | CANopen           |
| EM                                                     | 1.2 W             | Encoder emulation |

- 1) The power requirement of the on-board connection point EC (HCS01-1E-W00xx-A-0x-x-xx-**EC**) is already taken into account with the power requirement of the basic device (see table 1, column "Maximum current, line")
- 2) The power requirement of the on-board connection point ET (HCS01-1E-W00xx-A-0x-x-xx-**ET**) is already taken into account with the power requirement of the basic device (see table 1, column "Maximum current, line")

Tab.4-22: Power Requirement of the Optional Connection Points

### Power Requirement of the External Loads

External loads are, for example,

- Encoder system of the motor
- Motor holding brake
- Load at a digital output

The drive controller must supply the external loads with power.

Table 3: Power Requirement of the External Loads

| External load          | Power requirement                                                 |
|------------------------|-------------------------------------------------------------------|
| 5 V encoder system     | $P = I_{\text{Encoder}} \times 5 \text{ V} \times 1.75^{1), 5)}$  |
| 12 V encoder system    | $P = I_{\text{Encoder}} \times 12 \text{ V} \times 1.25^{1), 5)}$ |
| Load at digital output | $P = I_{\text{Load}} \times U_{N3}^{2), 4)}$                      |
| Motor holding brake    | $P = I_{\text{Brake}} \times U_{N3}^{3), 4)}$                     |

- 1)  $I_{\text{Encoder}}$  : Current consumption of encoder system
- 2)  $I_{\text{Load}}$  : Current consumption of external load
- 3)  $I_{\text{Brake}}$  : Current consumption of motor holding brake
- 4)  $U_{N3}$  : Control voltage supply of drive controller
- 5) The sum of the power consumptions of all connected encoder systems incl. encoder emulation mustn't exceed **6 W**.

Tab.4-23: Power Requirement of the External Loads

### Calculation Formula

The total power consumption ( $P_{N3}$ ) from the 24V control voltage of a drive controller is calculated with:

$$P_{N3} = P_{\text{Basic device}} + \sum P_{\text{Optional connection points}} + \sum P_{\text{External loads}}$$

### Example of Calculation

| Component                               |                             | Power requirement |
|-----------------------------------------|-----------------------------|-------------------|
| HCS01.1E-W0028-A-03-B-ET-EC-PB-L4-NN-FW |                             |                   |
| Basic device                            | HCS01.1E-W0028-A-03-B-ET-EC | 17.3 W            |
| Optional connection point               | PROFIBUS "PB"               | 1.1 W             |



## Combining the Individual Components

| Component                                                                                                                                           |               | Power requirement                                                                                            |
|-----------------------------------------------------------------------------------------------------------------------------------------------------|---------------|--------------------------------------------------------------------------------------------------------------|
| HCS01.1E-W0028-A-03-B-ET-EC-PB-L4-NN-FW                                                                                                             |               |                                                                                                              |
| Optional connection point                                                                                                                           | STO/SBC "L4"  | 1.0 W                                                                                                        |
| 12 V encoder system of motor                                                                                                                        | 12 V / 200 mA | $P = I_{\text{Encoder}} \times 12 \text{ V} \times 1.25 = 0.2 \text{ A} \times 15 \text{ V} = 3.0 \text{ W}$ |
| Motor holding brake                                                                                                                                 | 300 mA        | $P = I_{\text{Brake}} \times U_{\text{N3}} = 0.3 \text{ A} \times 24 \text{ V} = 7.2 \text{ W}$              |
| Load at digital output                                                                                                                              | 250 mA        | $P = I_{\text{Load}} \times U_{\text{N3}} = 0.25 \text{ A} \times 24 \text{ V} = 6.0 \text{ W}$              |
| Total power consumption $P_{\text{N3}} = P_{\text{Basic device}} + \Sigma P_{\text{Optional connection points}} + \Sigma P_{\text{External loads}}$ |               |                                                                                                              |
| $P_{\text{N3}} = 17.3 \text{ W} + 1.1 \text{ W} + 1.0 \text{ W} + 3.0 \text{ W} + 7.2 \text{ W} + 6.0 \text{ W} = 35.6 \text{ W}$                   |               |                                                                                                              |

Tab.4-24: Example of Calculation

## Requirements to the 24V Power Supply Unit

The following **parameters** contain the essential electrical requirements on the 24V power supply unit:

- **Output voltage** or range of output voltage
- **Continuous power** which the 24V power supply unit must supply during operation
- **Peak current** which the 24V power supply unit must supply when switching on

## Required Continuous Power

The continuous power of the 24V power supply unit must be greater than the sum of power consumptions  $P_{\text{N3}}$  of the components to be supplied.

To select the 24V power supply unit, determine the continuous current  $I_{\text{N3}}$  of all components:

$$I_{\text{N3}} = P_{\text{N3}} / U_{\text{N3}}$$

( $P_{\text{N3}}$  : Power consumption of all components)

The calculated current  $I_{\text{N3}}$  corresponds to the continuous current of the 24V power supply unit.

The power consumption is indicated as maximum value of the respective component and can occur at **individual components**.

In drive systems with **several components**, the occurring power consumption under statistical assumptions will be lower than the calculated one.

## Required Peak Current

When the 24V control voltage unit is switched on, the 24V power supply unit is loaded with the charging current of the capacitors of the connected components. This charging current is electronically limited in the components.

The required peak current of the power supply unit is calculated with:

$$I_{\text{PeakCurrent\_PowerSupplyUnit}} = 1.2 \times P_{\text{N3}} / U_{\text{N3}}$$

( $P_{\text{N3}}$  : Power consumption of all components)

The power supply unit must make available the calculated peak current  $I_{\text{PeakCurrent\_PowerSupplyUnit}}$  for at least 1 second.

## Installing the 24V Supply


## Notes on Installation

- As a matter of principle, the 24V supply of the components of the drive system Rexroth IndraDrive Cs should be installed in **star-shaped form**. For each group of drive controllers or third-party components it is there-

## Combining the Individual Components

fore necessary that you run separate supply lines. This, too, applies to multiple-line arrangement in the case of supply from a supply unit, for example.

- Route lines with sufficiently dimensioned line cross sections to reduce load-dependent voltage drops.
- For looping through the control voltage, observe the maximum current carrying capacity of the connection points. The maximum current carrying capacity limits the number of devices to which the control voltage can be looped through.

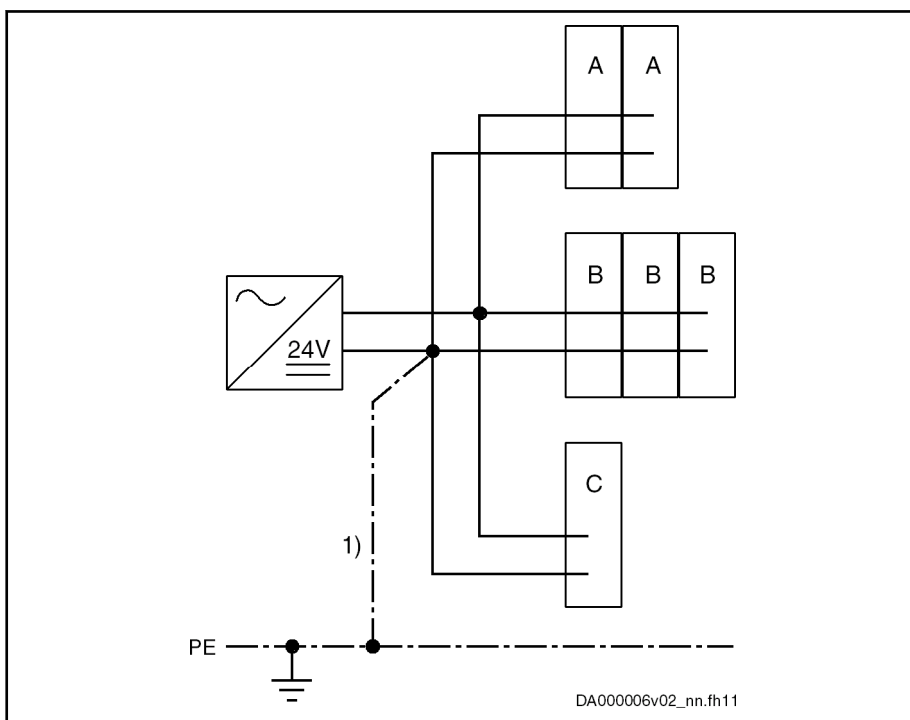

- A Number of devices is limited to 2 components with a current consumption of  $\leq 5$  A / component
- B Number of devices is limited to 3 components with a current consumption of  $\leq 3.3$  A / component
- C Third-party component (e.g. PLC, valve etc.)
- 1) Connection to central ground point (e.g. earth-circuit connector PE)

Fig. 4-14: Installing the 24V Supply



If you use several 24V power supply units:

- Output voltages of the 24V power supply units must be within the allowed voltage range
- Interconnect reference conductors 0 V of the individual 24V power supply units with low impedance
- Always switch 24V power supply units on and off synchronously

### Chronological Order of 24V Supply and Mains Voltage

Before mains voltage or DC bus voltage is applied to the components, they have to be supplied by the 24V supply.

## Combining the Individual Components

## Looping Through the Control Voltage

**NOTICE****Property damage in case of error caused by too small line cross section!**

Observe the current carrying capacity of the connection points for control voltage supply at the components used.

You may only loop through the control voltage between the components, when the **sum** of current consumptions  $\Sigma I_{N3}$  of the individual components is smaller than **10 A** (current carrying capacity of the connection point X13).

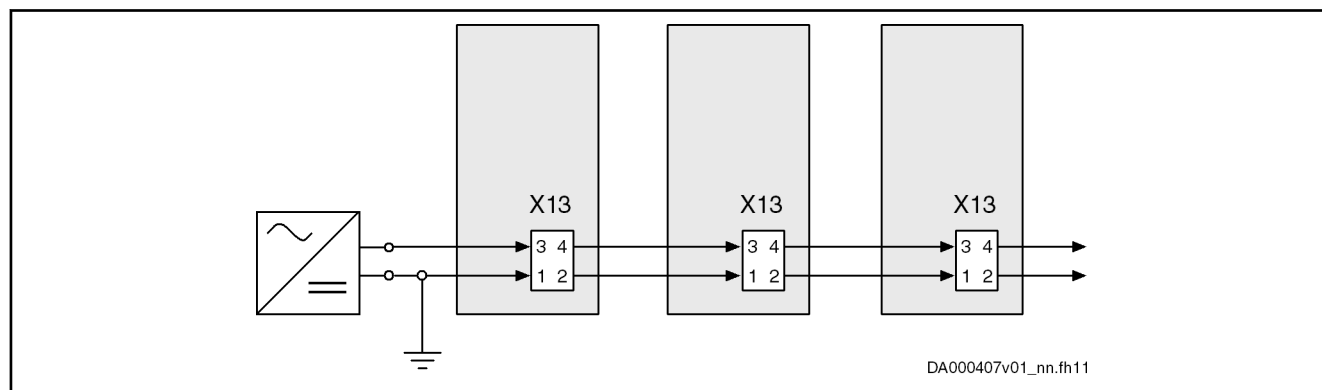


Fig.4-15: Looping Through the Control Voltage

Exemplary calculation for 3 drive controllers:

$$I_D = 3 \times \frac{P_{N3}}{U_{N3}}$$

Fig.4-16: Continuous Current

The result  $I_D$  must be smaller than the specified current carrying capacity of the connection point.

### 4.6.3 Mains Connection

#### Residual-Current-Operated Circuit Breakers (RCD, RCCB) as Additional Fusing

##### General Information

The following designations are used for residual-current-operated circuit breakers:

- RCCB (Residual-Current-Operated Circuit Breaker)
- RCD (Residual-Current-Operated Device)
- RCM (Residual-Current Monitoring Device)
- Earth-leakage circuit breaker (voltage-independent)
- Residual-current circuit breaker (voltage-dependent)



It is only to a limited extent that residual-current-operated circuit breakers can be used with Rexroth IndraDrive Cs systems.

If these circuit breakers are to be used, the company erecting the installation has to check the mutual compatibility of the residual-current-operated circuit breakers and installation or machine with the drive system, in order to avoid accidental triggering of the residual-current-operated circuit breaker. This has to be taken into account

## Combining the Individual Components

- for switch-on processes, due to high asymmetric inrush currents and
- during operation of the installation, due to leakage currents produced in normal operation.

### Cause of Leakage Currents

For the purpose of stepless speed variation with a high degree of positioning accuracy and dynamic response, certain modulation procedures are necessary for drive systems. For physical reasons, these modulation procedures give rise to inevitable leakage current produced during normal operation. Especially with unbalanced loads of the mains phases or a large number of drives it can easily reach some amperes (rms value).

The leakage current is not sinusoidal but pulse-shaped. For this reason, measuring instruments normally sized for alternating currents in the range of 50 Hz are not suited. Use measuring instruments with rms value measuring ranges up to at least 150 kHz.

The degree of leakage current depends on the following features of the installation:

- Kind of inrush current limitation
- Number, kind and size drives used
- Length and cross section of connected motor power cables
- Grounding conditions of the mains at the site of installation
- Unbalance of the three-phase system
- Kind of filters and chokes connected in the incoming circuit
- EMC measures that are taken

If measures are taken to improve the electromagnetic compatibility (EMC) of the installation (mains filters, shielded lines), the leakage current in the ground wire is inevitably increased, especially when switching on or in the case of mains unbalance. Given these operating conditions, residual-current-operated circuit breakers can trigger without an error having occurred.

The EMC measures are mainly based on capacitive short-circuiting of the interference currents within the drive system. Inductive filter measures can reduce the leakage currents, but affect the dynamic response of the drive and bring about

- higher construction volume
- higher weight
- expensive core material

### Possibilities of Use

#### Motor Cable Length

Keep the motor cables as short as possible. Only short motor cables do allow low leakage currents and thereby enable residual-current-operated circuit breakers to work.

#### Kinds of Residual-Current-Operated Circuit Breakers

There are two kinds of residual-current-operated circuit breakers:

1. **Residual-current-operated circuit breakers sensitive to power pulse current** (type A acc. to IEC 60755)

These are normally used. However, it is only pulsating direct fault currents of a maximum of 5 mA and sinusoidal alternating fault currents that they switch off safely. This is why they are not allowed for devices that can generate smoothed direct fault currents. In the case of smoothed direct fault currents that can be produced in power supply units, mains rectifiers and drive controllers with power converters in B6 circuit,

## Combining the Individual Components

the residual-current-operated circuit breaker is not triggered. This blocks the triggering of a residual-current-operated circuit breaker sensitive to power pulse current in the case of ground contact, i.e. in the case of error.

**Residual-current-operated circuit breakers sensitive to power pulse current do not provide any protection against inadmissible contact voltage.**

2. **Residual-current-operated circuit breakers sensitive to universal current (type B acc. to IEC 60755)**

These circuit breakers are suited for smoothed direct fault currents, too, and safely switch off devices with B6 input rectifiers.

When a current with 30 mA triggers the residual-current-operated circuit breaker, it is possible to use a residual-current-operated circuit breaker with higher tripping current for machine protection.

If this residual-current-operated circuit breaker triggers accidentally, too, check in how far the above conditions and dependencies can be improved (for example, by connecting current-compensated mains chokes in the incoming circuit, increasing the inrush current limitation).

**Using Isolating Transformer to Reduce Leakage Current in Mains**

If there is no improvement achieved and the residual-current-operated circuit breaker, due to specific mains conditions on site, has to be used nevertheless on the mains input side, connect an isolating transformer between mains connection and power connection of the drive system. This reduces the leakage current in the ground wire of the mains that is produced during normal operation which allows using the residual-current-operated circuit breaker. Connect the neutral point of the secondary winding of the isolating transformer to the equipment grounding conductor of the drive system.

Adjust the ground-fault loop impedance to the overcurrent protective device so that the unit can be switched off in the case of failure.

Before operating enable, check the correct function of the overcurrent protection device including activation in the case of failure.

**Exclusive fusing by residual-current-operated circuit breaker**

For drive systems with electronic drive controllers, exclusive protection by means of a residual-current-operated circuit breaker normally is not possible and not allowed.

Electronic equipment that has a nominal power higher than 4 kVA or is destined for permanent connection does not need residual-current-operated circuit breakers.

According to IEC 364 and EN 50178, the supply-side protection against contact for indirect contact, i.e. in the case of insulation failure, has to be provided in a different way, for example by means of overcurrent protective device, protective grounding, protective-conductor system, protective separation or total insulation.

**Using Residual-Current-Operated Circuit Breakers at HCS Drive Controllers**

**HCS Drive Controllers at Residual-Current-Operated Circuit Breaker**

Residual-current-operated circuit breakers can be used under the following conditions:

- Residual-current-operated circuit breaker is of type B (IEC60755)
- Trip limit of the residual-current circuit breaker is  $\geq 300$  mA
- Supplying TN-S mains
- Maximum length of motor cable 20 m in shielded design
- Use of an NFD03 mains filter


## Combining the Individual Components

- Each residual-current-operated circuit breaker only supplies one drive controller
- Only Rexroth components and accessories including cables and filters are used

## Mains Types

### TN-S Mains Type

The TN-S mains type is the usual mains type in Europe.

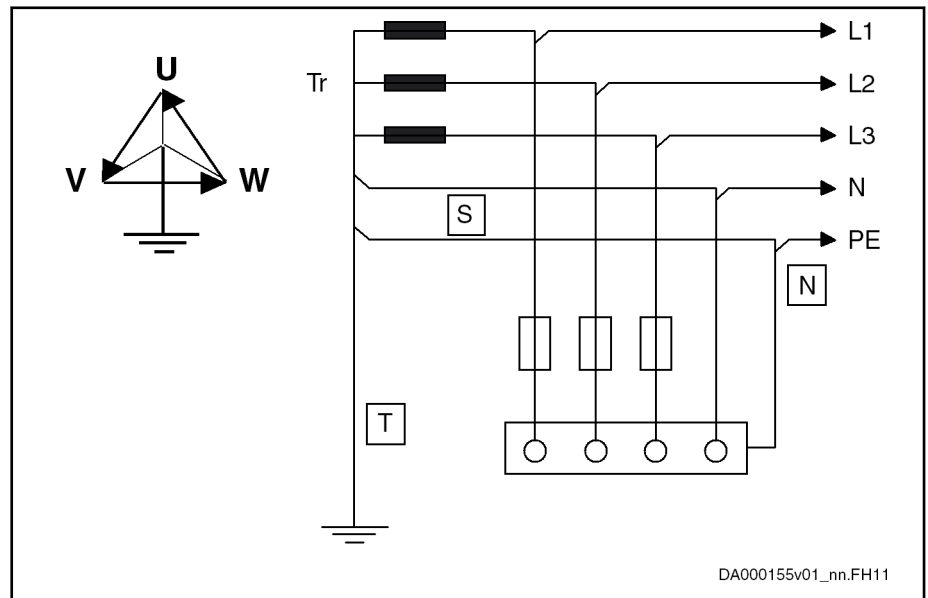


- T = Direct grounding of a point (station ground)  
 N = Exposed conductive parts directly connected to station ground  
 S = Separate neutral conductor and equipment grounding conductor in entire mains

Fig. 4-17: TN-S Mains Type

## Combining the Individual Components


## TN-C Mains Type

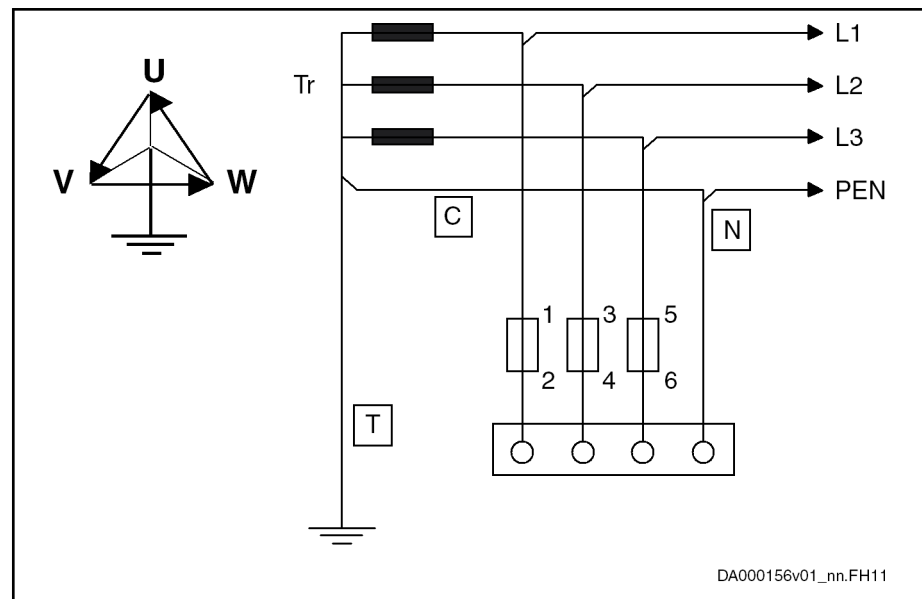

|     |                                                                                                                                  |
|-----|----------------------------------------------------------------------------------------------------------------------------------|
| T = | Direct grounding of a point (station ground)                                                                                     |
| N = | Exposed conductive parts directly connected to station ground                                                                    |
| C = | Neutral conductor and equipment grounding conductor functions in entire mains combined in a single conductor, the PEN conductor. |

*Fig.4-18: TN-C Mains Type*

## IT Mains Type

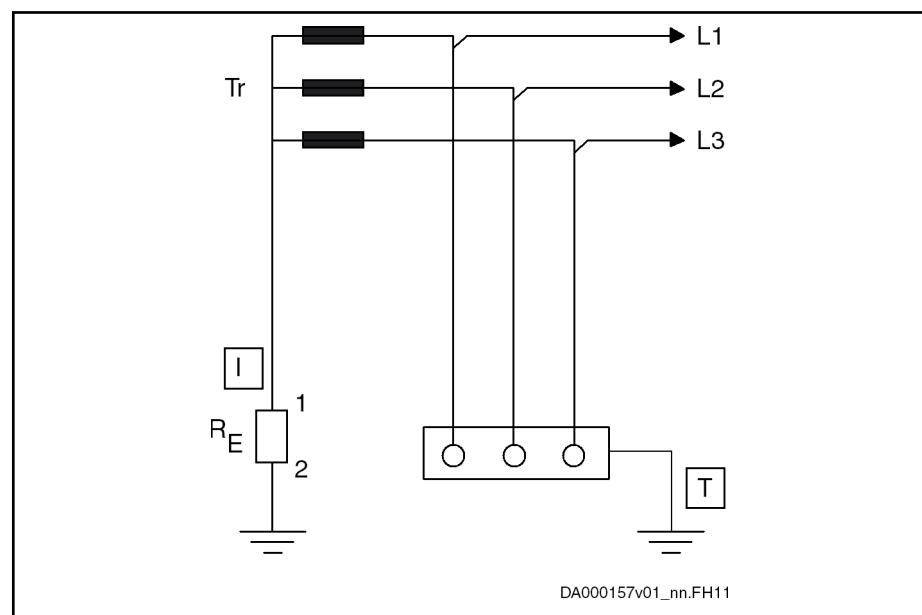

|   |                                                                                                         |
|---|---------------------------------------------------------------------------------------------------------|
| I | Isolation of all active parts from ground or connection of one point to ground via an impedance $R_E$   |
| T | Exposed conductive parts directly grounded, independent of grounding of current source (station ground) |

**Fig.4-19:** *IT Mains Type*

Notes on Project Planning

**NOTICE**

**Damage to the devices by voltage arcing!**

For applications with static charging (e.g. printing, packaging) and operation at IT mains type, use an **isolating transformer** with  $U_K \leq 2.5\%$ .




**Voltage increase in the case of ground fault!**

In case of the error "ground fault" in the IT mains type, higher voltages against ground (device housing) than in error-free operation affect the device.

For operation at the IT mains type, the drive system including mains filter and mains choke should be galvanically decoupled from the mains via an **isolating transformer**.

In this way, the ground fault detection or monitoring can remain effective in the installation.

**TT System**

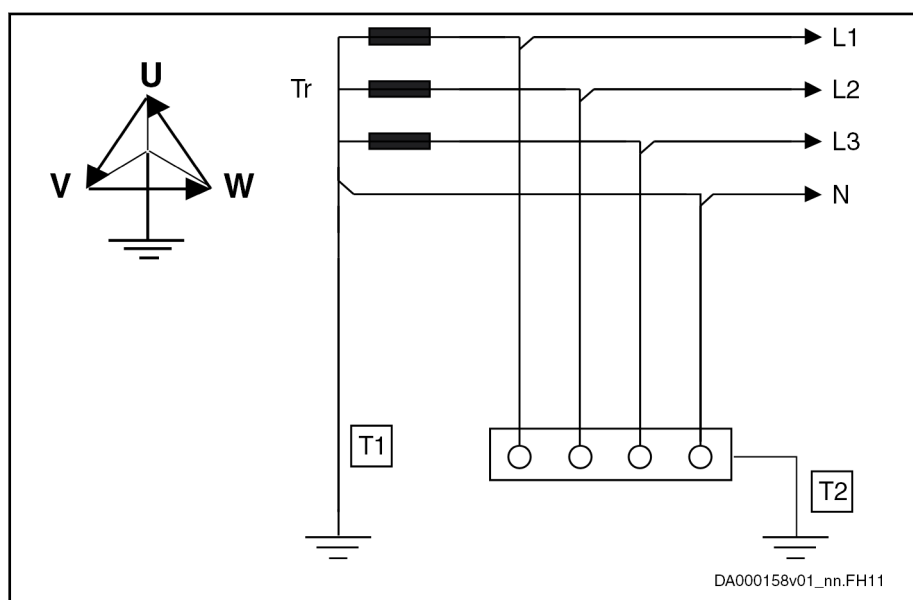

- T = Direct grounding of a point (station ground)
- T = Exposed conductive parts directly grounded, independent of grounding of current source (station ground)


Fig. 4-20: TT Mains System

The EMC requirements are only complied with by specific measures (special mains filters, among other things).



Combining the Individual Components

Mains Grounded via Outer Conductor (Corner-Grounded Delta Mains)

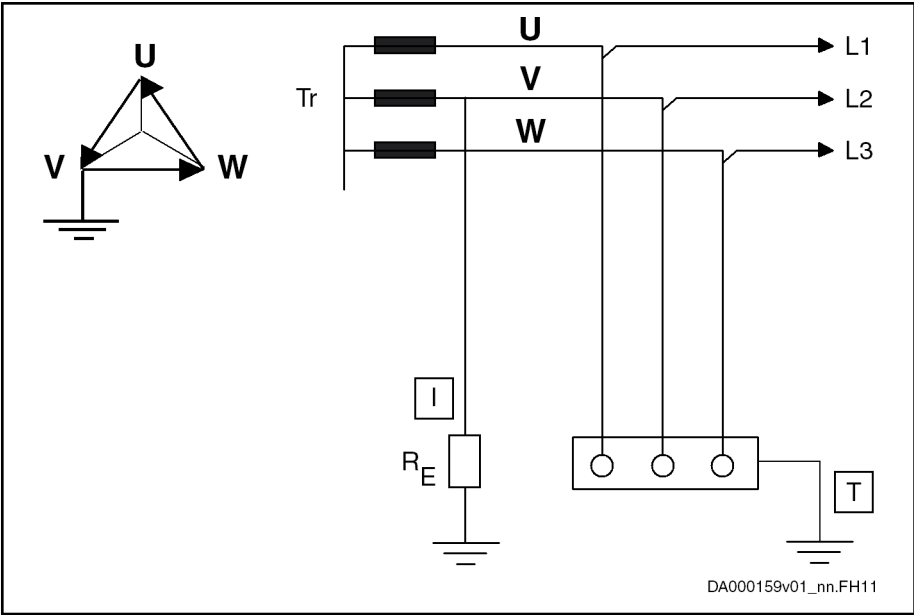

I = Isolation of all active parts from ground, connection of one phase - generally phase V - to ground or via an impedance  $R_E$   
T = Exposed conductive parts directly grounded, independent of grounding of current source (station ground)

Fig.4-21: Mains Grounded via Outer Conductor

Notes on Project Planning

The EMC requirements are only complied with by specific measures (special mains filters, among other things).

 **Mains filters HNF01, NFD at mains grounded via outer conductor**  
HNF01.1 or NFD03.1 mains filters are not suited for operation on mains grounded via outer conductor. Use isolating transformers.  
Allowed mains connection voltage: See technical data of the respective device

Type of Mains Connection

Mains Supply

| 1-phase <sup>1)</sup> | 3-phase            |                     |
|-----------------------|--------------------|---------------------|
| 1 AC 110 ... 230 V    | 3 AC 200 ... 500 V |                     |
|                       | Autotransformer    | -                   |
|                       | 3 AC 110 ... 230 V | -                   |
| HCS01.1E-W0003-A-02   |                    | HCS01.1E-W0005-A-03 |
| HCS01.1E-W0006-A-02   |                    | HCS01.1E-W0008-A-03 |
| HCS01.1E-W0009-A-02   |                    | HCS01.1E-W0018-A-03 |
| HCS01.1E-W0013-A-02   |                    | HCS01.1E-W0028-A-03 |
| HCS01.1E-W0018-A-02   |                    | HCS01.1E-W0054-A-03 |
| Mains supply          |                    |                     |


Combining the Individual Components

| Individual supply | Individual supply |
|-------------------|-------------------|
|                   | Group supply      |
|                   | Central supply    |

1) With 1-phase mains supply, you can connect the mains supply line to connector X3 at L1, L2 or L3  
Tab.4-25: Mains Supply

Individual Supply

Wire the **Bb relay contacts** of the drive controllers supplied with mains voltage in the control circuit of the mains contactor.  
Each component is **individually** connected to the supply mains. There is **no** DC bus connection between the devices.

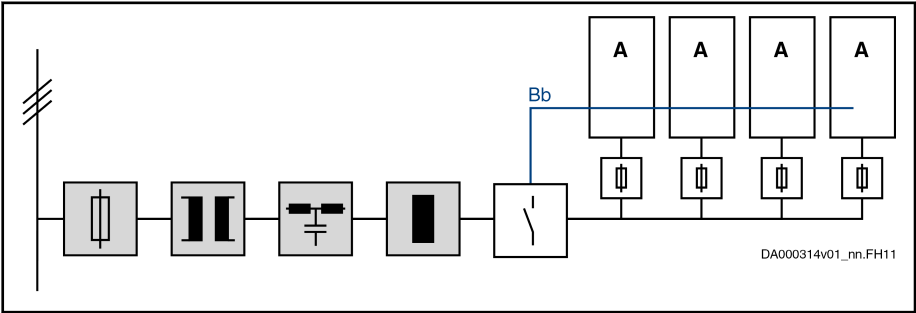

Components marked with gray background color: Optional, depending on the application  
A Component HCS01  
Bb Bb relay contact wiring  
Fig.4-22: Individual Supply

**NOTICE**

**Risk of fire caused by missing fuses!**  
Install a fuse **before each drive controller**. In case a short circuit occurs in the drive controller, a fuse provides optimum safety against overheating or fire (see also IEC 61800-5-1 and UL 508C).  
For distribution in North America, single fuses are required for this type of mains connection (see UL 508A).  
In the scope of international and European standards (IEC/EN, not North America), it is allowed to use a group fuse instead of the single fuses. When selecting the nominal current of the group fuse, observe the loop impedance, the line length and the line cross section of the mains supply feeder (see IEC 60204-1, chapter Appendix A).  
Observe the data for dimensioning line cross sections and fuses (see also IEC 60204-1, UL 508A and NFPA 79).


Central Supply



- Only HCS01.1E-W0028 and -W0054 components are suited for central supply.
- Central supply via HCS02.1, HCS03.1, HMV01.1 or HMV02.1 components is not allowed.
- Use the corresponding mains chokes to increase the DC bus continuous power.
- Wire the Bb relay contacts.

**One powerful component** supplies other components via the common DC bus connection.

## Combining the Individual Components

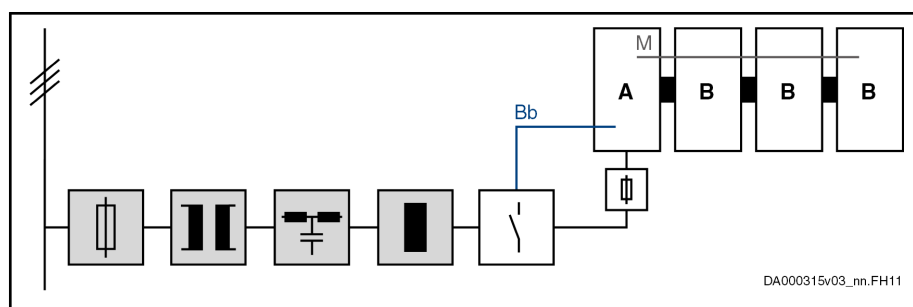

Components marked with gray background color: Optional, depending on the application


- A Component HCS01 (more powerful than component B); connected to other components via DC bus
- B Component HCS01 (less powerful than component A); connected to other components via DC bus
- Bb Bb relay contact wiring
- M Module bus

Fig. 4-23: Central Supply

## Group Supply

- Option 1:

**Several powerful components** HCS01 (of the same size!) are connected to the mains and supply other components via the common DC bus connection. This requires balancing chokes between supply mains and components.

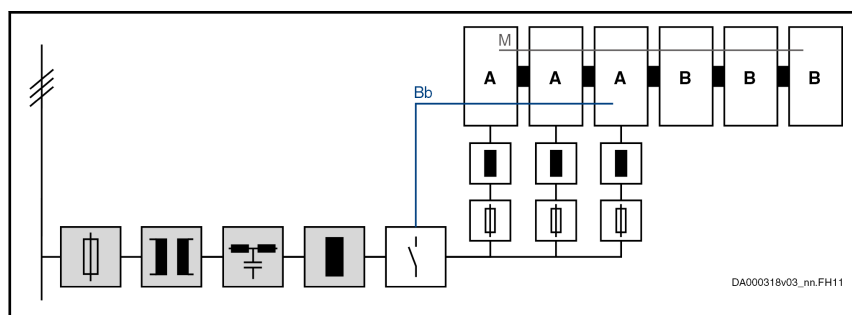

Components marked with gray background color: Optional, depending on the application; the choke is used to reduce current harmonics


- A Component HCS01 (more powerful than component B; all components A identical); connected to supply mains via balancing chokes; connected to other components via DC bus
- B Component HCS01 (less powerful than component A); connected to other components via DC bus
- Bb Bb relay contact wiring
- M Module bus

Fig. 4-24: Group Supply; Several HCS01 Components Connected to Supply Mains

- Option 2:

**All components** HCS01 (of the same size!) are connected to the mains and interconnected via the common DC bus connection. This requires balancing chokes between supply mains and components.

## Combining the Individual Components

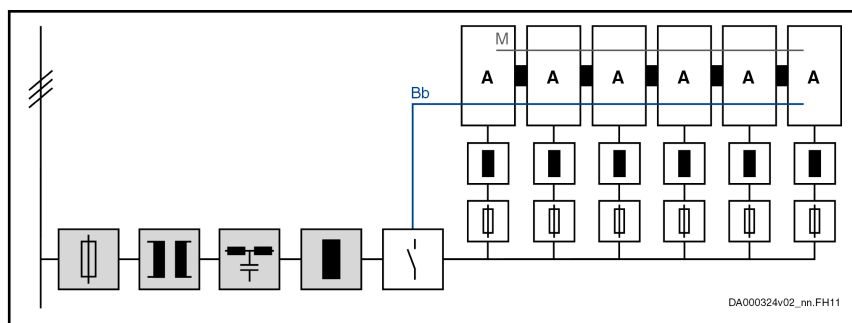

Components marked with gray background color: Optional, depending on the application; the choke is used to reduce current harmonics

- A Component HCS01 (all components A identical); connected to supply mains via balancing chokes; interconnected via DC bus
- Bb Bb relay contact wiring
- M Module bus (not obligatory)

Fig.4-25: Group Supply; all HCS01 Components Connected to Supply Mains

### NOTICE

### Risk of fire caused by missing fuses!

Install a fuse **before each drive controller**. In case a short circuit occurs in the drive controller, a fuse provides optimum safety against overheating or fire (see also IEC 61800-5-1 and UL 508C).

For distribution in North America, single fuses are required for this type of mains connection (see UL 508A).

In the scope of international and European standards (IEC/EN, not North America), it is allowed to use a group fuse instead of the single fuses. When selecting the nominal current of the group fuse, observe the loop impedance, the line length and the line cross section of the mains supply feeder (see IEC 60204-1, chapter Appendix A).

Observe the data for dimensioning line cross sections and fuses (see also IEC 60204-1, UL 508A and NFPA 79).

### Parallel Operation


Group supply or central supply allows parallel operation of the HCS01 components to increase the DC bus continuous power.



Parallel operation of HCS01 components is only allowed under the following conditions:

- The components are of the same range HCS01
- The infeeding HCS01 components are of the same type
- Additional chokes balance the mains current

## Combining the Individual Components

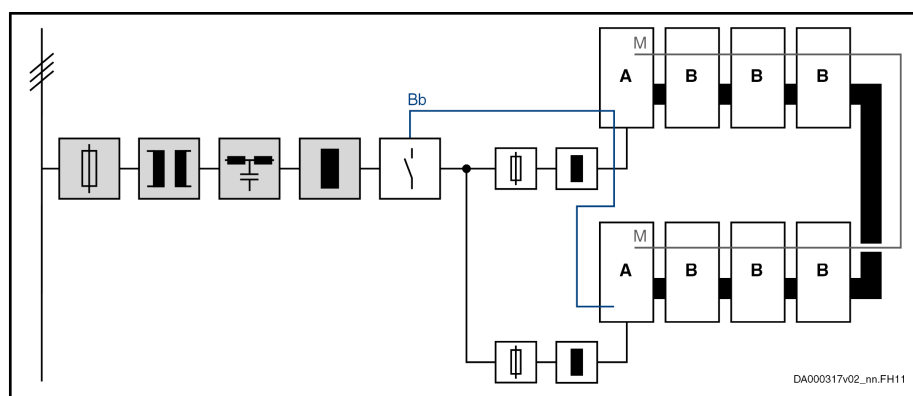

- Components marked with gray background color: Optional, depending on the application; the choke is used to reduce current harmonics
- A Component HCS01 (more powerful than component B); connected to other components via DC bus
- B Component HCS01 (less powerful than component A); connected to other components via DC bus
- Bb Bb relay contact wiring
- M Module bus
- Fig.4-26: Parallel operation



Connect the Bb relay contacts of all supplying components in series. You thereby ensure that the mains contactor is switched off in case there is an error in a component.

## Mains Connected Load and Mains Current

## Technical Data of the Components

- See [chapter 7.3.2 "Mains Voltage" on page 211](#)
- See [chapter 7.3.3 "DC Bus" on page 218](#)

## Calculating the Mains-Side Phase Current

The mains-side phase current is required for the following cases:

- Selecting mains contactor
- Determining fuses in the mains connection
- Determining line cross section
- Selecting other components in the mains connection (mains filter, mains choke)

## Operation Under Rated Conditions

For data on mains contactor, fuses and cross section in operation under rated conditions, see technical data of the respective component.

## Operation at Partial Load

Operation at partial load can lead to smaller mains contactors, fuses and line cross sections.

If defined data for operation at partial load are available, the mains-side phase current can be determined as follows:

1. Determine **motor power**

Take power of drive controller-motor combination from Rexroth Indra-Size or calculate it.

$$P_{mHa} = \frac{M_n \times \eta_n}{9550}$$

## Combining the Individual Components

|           |                                                              |
|-----------|--------------------------------------------------------------|
| $P_{mHa}$ | Mechanical nominal power for main drives (shaft output) [kW] |
| $M_n$     | Nominal motor torque [Nm]                                    |
| $n_n$     | Nominal motor speed [ $\text{min}^{-1}$ ]                    |

- Determine **DC bus power** from motor power and efficiency

$$P_{DC} = \frac{M_{eff} \times n_m \times 2\pi}{60} \times k$$

|           |                                                   |
|-----------|---------------------------------------------------|
| $P_{DC}$  | Required DC bus continuous power [W]              |
| $M_{rms}$ | Effective torque in Nm                            |
| $n_m$     | Average speed in $\text{min}^{-1}$                |
| $k$       | Factor for motor and controller efficiency = 1.25 |

- Add **powers of all axes** at common DC bus and put them into relation to rated power of supply unit

⇒ Partial load of  $P_{DC\_cont}$  is available

- Determine **power factor TPF** for partial load (TPF = Total Power Factor)  
For the value **TPF** at rated power and **TPF<sub>10</sub>** (at 10% of rated power), see technical data (mains voltage) of the component.

- Calculate **mains connected load**

$$S_{LN} = \frac{P_{DC}}{TPF}$$

|            |                              |
|------------|------------------------------|
| $S_{LN}$   | Mains connected load [VA]    |
| $P_{DC}$   | DC bus continuous power [W]  |
| <b>TPF</b> | Total Power Factor $\lambda$ |

- Calculate **mains-side phase current**

$$\text{3-phase: } I_{LN} = \frac{S_{LN}}{U_{LN} \sqrt{3}}$$

$$\text{1-phase: } I_{LN} = \frac{S_{LN}}{U_{LN}}$$

|          |                                     |
|----------|-------------------------------------|
| $I_{LN}$ | Mains-side phase current in [A]     |
| $S_{LN}$ | Mains connected load [VA]           |
| $U_{LN}$ | Voltage between phases of mains [V] |

- Select **mains contactor**

- Determine **mains circuit breaker and line cross section**

See [chapter "Dimensioning the Line Cross Sections and Fuses "](#) on [page 77](#)

## Dimensioning the Line Cross Sections and Fuses

### Dimensioning the line cross sections and fuses in the supply feeder and branches to the drive system:

- Determine current in supply feeder of drive system and correct it with correction factors for [ambient temperature](#) and [bundling](#).

## Combining the Individual Components

(In the technical data of the components in section "Data for Mains Voltage Supply", you can find standardized data for connection cross section and mains circuit breaker at operation under rated conditions.)

- Determine country of use ("international except for USA/Canada" or "USA/Canada")
- Determine installation type (e.g. B1 or B2)
- In table row "Current I", select value immediately above the value determined in the first step
- In table row "Nominal current fuse", read corresponding fuse
- In table row "Cross section A ...", read corresponding required cross section

| Country of use: International except for USA/Canada |                      |                                                                                                                                                                                                 |
|-----------------------------------------------------|----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Current I                                           | Nominal current fuse | Cross section A<br>for installation type B1                                                                                                                                                     |
| A                                                   | A                    | mm <sup>2</sup>                                                                                                                                                                                 |
| 1,6                                                 | 2                    | 1,5<br>Minimum cross section acc. to<br>EN 60204-1:2006, table 5<br>(Main circuits; outside of hous-<br>ings; permanently installed; sin-<br>gle-core lines; stranded wire de-<br>sign class 2) |
| 3,3                                                 | 4                    |                                                                                                                                                                                                 |
| 5,0                                                 | 6                    |                                                                                                                                                                                                 |
| 8,6                                                 | 10                   |                                                                                                                                                                                                 |
| 10,3                                                | 16                   |                                                                                                                                                                                                 |
| 13,5                                                | 16                   |                                                                                                                                                                                                 |
| 18,3                                                | 20                   | 2,5                                                                                                                                                                                             |
| 22                                                  | 25                   | 4                                                                                                                                                                                               |
| 28                                                  | 32                   | 6                                                                                                                                                                                               |
| 31                                                  | 40                   | 6                                                                                                                                                                                               |
| 35                                                  | 40                   | 10                                                                                                                                                                                              |
| 44                                                  | 50                   | 10                                                                                                                                                                                              |
| 59                                                  | 63                   | 16                                                                                                                                                                                              |
| 77                                                  | 80                   | 25                                                                                                                                                                                              |
| 96                                                  | 100                  | 35                                                                                                                                                                                              |
| 117                                                 | 125                  | 50                                                                                                                                                                                              |
| 149                                                 | 160                  | 70                                                                                                                                                                                              |
| 180                                                 | 200                  | 95                                                                                                                                                                                              |
| 208                                                 | 250                  | 120                                                                                                                                                                                             |
| 227                                                 | 250                  | 150                                                                                                                                                                                             |
| 257                                                 | 315                  | 185                                                                                                                                                                                             |
| 301                                                 | 355                  | 240                                                                                                                                                                                             |
| 342                                                 | 400                  | 300                                                                                                                                                                                             |

Tab.4-26: Line Cross Sections and Fuses, B1 According to EN 60204-1:2006, Table 6, as of 150mm<sup>2</sup> DIN IEC 60364-5-52:2004, Table B.52-4

Combining the Individual Components

| Country of use: International except for USA/Canada |                      |                                                                                                                                                              |
|-----------------------------------------------------|----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Current I                                           | Nominal current fuse | Cross section A<br>for installation type B2                                                                                                                  |
| A                                                   | A                    | mm <sup>2</sup>                                                                                                                                              |
| 1,6                                                 | 2                    | 0,75<br>Minimum cross section acc. to<br>EN 60204-1:2006, table 5<br>(Main circuits; outside of hous-<br>ings; permanently installed; mul-<br>ti-core lines) |
| 3,3                                                 | 4                    |                                                                                                                                                              |
| 5,0                                                 | 6                    |                                                                                                                                                              |
| 8,5                                                 | 10                   |                                                                                                                                                              |
| 10,1                                                | 16                   | 1,0                                                                                                                                                          |
| 13,1                                                | 16                   | 1,5                                                                                                                                                          |
| 17,4                                                | 20                   | 2,5                                                                                                                                                          |
| 23                                                  | 25                   | 4                                                                                                                                                            |
| 28                                                  | 32                   | 6                                                                                                                                                            |
| 30                                                  | 40                   | 6                                                                                                                                                            |
| 35                                                  | 40                   | 10                                                                                                                                                           |
| 40                                                  | 50                   | 10                                                                                                                                                           |
| 54                                                  | 63                   | 16                                                                                                                                                           |
| 70                                                  | 80                   | 25                                                                                                                                                           |
| 86                                                  | 100                  | 35                                                                                                                                                           |
| 103                                                 | 125                  | 50                                                                                                                                                           |
| 130                                                 | 160                  | 70                                                                                                                                                           |
| 156                                                 | 200                  | 95                                                                                                                                                           |
| 179                                                 | 200                  | 120                                                                                                                                                          |
| 195                                                 | 224                  | 150                                                                                                                                                          |
| 221                                                 | 250                  | 185                                                                                                                                                          |
| 258                                                 | 315                  | 240                                                                                                                                                          |
| 294                                                 | 355                  | 300                                                                                                                                                          |

Tab.4-27: Line Cross Sections and Fuses, B2 According to EN 60204-1:2006, Table 6, as of 150mm<sup>2</sup> DIN IEC 60364-5-52:2004, Table B.52-4



## Combining the Individual Components

| Country of use: International except for USA/Canada |                      |                                                                                                                                     |
|-----------------------------------------------------|----------------------|-------------------------------------------------------------------------------------------------------------------------------------|
| Current I                                           | Nominal current fuse | Cross section A<br>for installation type E                                                                                          |
| A                                                   | A                    | mm <sup>2</sup>                                                                                                                     |
| 1,6                                                 | 2                    | 0,75<br>Minimum cross section acc. to<br>EN 60204-1:2006, table 5<br>(outside of housings; permanently installed; multi-core lines) |
| 3,3                                                 | 4                    |                                                                                                                                     |
| 5,0                                                 | 6                    |                                                                                                                                     |
| 8,3                                                 | 10                   |                                                                                                                                     |
| 10,4                                                | 16                   |                                                                                                                                     |
| 12,4                                                | 16                   | 1                                                                                                                                   |
| 16,1                                                | 20                   | 1,5                                                                                                                                 |
| 22                                                  | 25                   | 2,5                                                                                                                                 |
| 28                                                  | 32                   | 4                                                                                                                                   |
| 30                                                  | 40                   | 4                                                                                                                                   |
| 37                                                  | 40                   | 6                                                                                                                                   |
| 44                                                  | 50                   | 10                                                                                                                                  |
| 52                                                  | 63                   | 10                                                                                                                                  |
| 70                                                  | 80                   | 16                                                                                                                                  |
| 88                                                  | 100                  | 25                                                                                                                                  |
| 110                                                 | 125                  | 35                                                                                                                                  |
| 133                                                 | 160                  | 50                                                                                                                                  |
| 171                                                 | 200                  | 70                                                                                                                                  |
| 207                                                 | 250                  | 95                                                                                                                                  |
| 240                                                 | 315                  | 120                                                                                                                                 |
| 277                                                 | 355                  | 150                                                                                                                                 |
| 316                                                 | 400                  | 185                                                                                                                                 |
| 374                                                 | 425                  | 240                                                                                                                                 |
| 432                                                 | 500                  | 300                                                                                                                                 |

Tab.4-28: Line Cross Sections and Fuses, E According to EN 60204-1:2006, Table 6, as of 150mm<sup>2</sup> DIN IEC 60364-5-52:2004, Table B.52-10

Combining the Individual Components

| Country of use: USA/Canada |                      |                                                                    |
|----------------------------|----------------------|--------------------------------------------------------------------|
| Current I                  | Nominal current fuse | Cross section A                                                    |
| A                          | A                    | AWG                                                                |
| 1,6                        | 2                    | 14<br>Minimum cross section acc. to<br>UL 508 A:2007, chapter 29.6 |
| 3,3                        | 4                    | 14                                                                 |
| 5,0                        | 6                    | 14                                                                 |
| 8,3                        | 10                   | 14                                                                 |
| 13                         | 15                   | 14                                                                 |
| 15                         | 20                   | 14                                                                 |
| 20                         | 25                   | 12                                                                 |
| 30                         | 40                   | 10                                                                 |
| 50                         | 70                   | 8                                                                  |
| 65                         | 80                   | 6                                                                  |
| 85                         | 100                  | 4                                                                  |
| 100                        | 110                  | 3                                                                  |
| 115                        | 125                  | 2                                                                  |
| 130                        | 150                  | 1                                                                  |
| 150                        | 175                  | 1/0                                                                |
| 175                        | 200                  | 2/0                                                                |
| 200                        | 225                  | 3/0                                                                |
| 230                        | 250                  | 4/0                                                                |
| 255                        | 300                  | 250 kcmil                                                          |
| 285                        | 300                  | 300 kcmil                                                          |
| 310                        | 350                  | 350 kcmil                                                          |
| 335                        | 350                  | 400 kcmil                                                          |
| 380                        | 400                  | 500 kcmil                                                          |
| 420                        | 450                  | 600 kcmil                                                          |

Tab.4-29: Line Cross Sections and Fuses According to UL508A:2007, Table 28.1

Dimensioning variables of the table values

1. Ambient temperature  $T_A$  of routed lines  $\leq 40^\circ\text{C}$
2. Temperature  $T_L$  at conductor at nominal current:  $90^\circ\text{C}$  for UL-listed lines (USA/Canada) or  $70^\circ\text{C}$  for PVC lines
3. The nominal current of the fuse is approx. 10-20% above the nominal current  $I_{LN}$  of the converter/supply unit or the determined current of the drive system.
4. Installation types:

## Combining the Individual Components

- B1 in accordance with IEC 60364-5-52, e.g. stranded wires routed in cable duct
- B2 in accordance with IEC 60364-5-52, e.g. multi-core line routed in cable duct
- E in accordance with EN 60204-1, e.g. multi-core line routed on open cable tray
- In accordance with NFPA 79 (external wiring), UL508A (internal wiring), NEC, NFPA 70:
  - 1 cable with 3 conductors, 1 neutral conductor and 1 equipment grounding conductor
  - Routed in pipe on the wall

Internal wiring: Routing inside of control cabinet or inside of devices

External wiring: Routing outside of control cabinet

Field wiring: Data of cross sections of terminal connectors wired by the user (in the field)

## 5. Recommendation for design of the fuses:

- **International except for USA/Canada:**
  - Fuse-link in accordance with IEC 60269-1, characteristic gG (fuses)
  - Circuit breakers in accordance with IEC 60898-1/2, type B or C
  - Circuit breakers in accordance with IEC 60947-2/6-2
- **USA / Canada:**
  - Class J; 600 V

**Correction factors**

For deviating dimensioning variables, the corresponding standards specify correction factors.

Below you can find the correction factors for ambient temperature and numbers of routed lines and circuits. If necessary, multiply the determined current in the supply feeder with these factors.

**Correction Factor Ambient Temperature**

| Ambient temperature $T_A$ / °C                               | 30   | 35   | 40   | 45  | 50   | 55   | 60   |
|--------------------------------------------------------------|------|------|------|-----|------|------|------|
| Correction factor according to EN 60204-1:2006, table D.1    | 0,87 | 0,93 | 1,00 | 1,1 | 1,22 | 1,41 | 1,73 |
| Correction factor according to NFPA 79:2007, table 12.5.5(a) | 0,88 | 0,94 | 1,00 | 1,1 | 1,18 | 1,32 | 1,52 |

Tab.4-30: Correction Factor Ambient Temperature in Accordance with EN 60204-1:2006 and NFPA 79:2007


Combining the Individual Components

Correction Factor for Bundling of Lines (Installation Methods B2 and E) and Circuits (Installation Method B1<sup>1)</sup>)

| Number of lines                                              | 1 | 2    | 3    | 4    | 5    |
|--------------------------------------------------------------|---|------|------|------|------|
| Correction factor according to EN 60204-1:2006, table D.2    | 1 | 1,25 | 1,43 | 1,54 | 1,67 |
| Correction factor according to NFPA 79:2007, table 12.5.5(b) | 1 | 1,25 |      |      |      |

1) Three single cores (L1, L2, L3) for mains supply of a device are to be considered as one circuit.

Tab.4-31: Correction Factor for Bundling of Lines and Circuits in Accordance with EN 60204-1:2006 and NFPA 79:2007

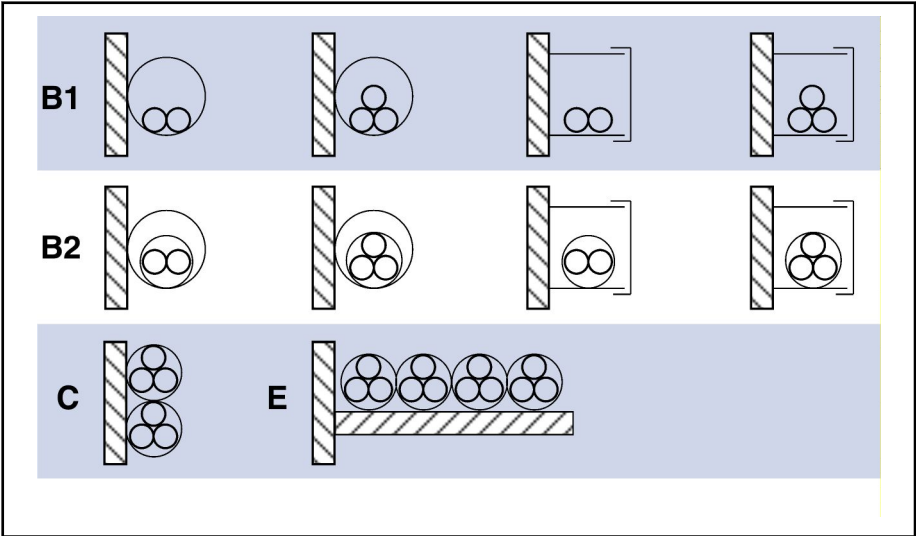

B1 Conductor in installation pipes and in installation channels to be opened  
B2 Cables or lines in installation pipes and in installation channels to be opened  
C Cables or lines on walls  
E Cables or lines on open cable trays.  
Fig.4-27: Installation methods (compare IEC 60364-5-52; VDE0298-7; EN 60204-1)

Dimensioning and Selecting the Mains Transformer

Mains transformers are always needed when the mains voltage is outside of the allowed nominal voltage of the component.

- Grounded Mains** As a matter of principle, the mains voltage for grounded mains is adjusted by means of **autotransformers**.
- Ungrounded Mains** As a matter of principle, the mains voltage for ungrounded mains is adjusted by means of **isolating transformers** to avoid prevent overvoltages between outer conductor and ground. Short-circuit voltage of the isolating transformer:  $\leq 4\%$

**Applications for Autotransformers** With HCS01 components, there are two applications for which autotransformers are necessary:

- HCS01.1E-W00xx-A-02 components are used:

## Combining the Individual Components

With a mains voltage of 3 AC 400 V, the voltage must be adjusted via an autotransformer to use HCS01.1E-W00xx-A-02 components with an input voltage range of 3 AC 110...230 V.

2. An MSM motor is used in conjunction with an HCS01.1E-W00xx-A-03 component:

MSM motors have been dimensioned for a voltage of 230 V. To operate MSM motors at a mains voltage of 3 AC 400 V at an HCS01.1E-W00xx-A-03 component, the mains voltage must be adjusted to 3 AC 230 V via an autotransformer.

## Dimensioning the Mains Filter

### Criteria for Selecting the Mains Filter

Take the following criteria into account for selecting the appropriate mains filter:

- EMC limit value class on site
- Ambient conditions on site
- Harmonics on mains voltage on site
- Loading by mains voltage and mains frequency on site
- Loading by harmonics on site
- Loading by mains-side phase current
- Total length of connected power cables
- Sum of leakage capacitances
- Clock frequency of drive controller

### How to Proceed for Selecting the Mains Filter

The selection of the mains filter is significantly determined by the operating conditions.

*How to proceed for selecting the mains filter:*

1. Determine the required EMC limit value class for the application.
2. Determine the maximum applied mains voltage.  
Observe that not all Rexroth IndraDrive Cs mains filters are suited for a mains voltage of 3 AC 500 V.  
Check whether the mains voltage of the mains filter is loaded with harmonics and still allowed for the mains filter.  
If necessary, reduce the harmonics on site.
3. Determine the kind of mains connection, such as central supply, group supply etc. (to do this, it is useful to outline the involved components and their interaction).
4. Calculate the **mains-side phase current** of the mains filter. You can find the procedure for calculating the mains-side phase current in a separate chapter (see [chapter "Calculating the Mains-Side Phase Current " on page 76](#)). For selecting the components, calculate the effective rms value.  
Check or determine the maximum occurring ambient temperature. Select a mains filter with higher nominal current, when the ambient temperature is above 45 °C.
5. Select a mains contactor the nominal current of which does not exceed nominal current of the mains filter.
6. Determine the number of drive axes.
7. Determine the total length of the connected power cables.

## Combining the Individual Components

8. Determine the sum of the leakage capacitances on the load side of the mains filter. The sum of the leakage capacitances results from the number of operated axes and the length of the connected power cables. You can find the procedure for determining the leakage capacitance in a separate chapter (see [chapter 11.2 "Determining the Leakage Capacitance" on page 291](#)).
9. Take the clock frequency of the drive controller into account.  
The higher the clock frequency of the drive controller, the higher the leakage currents and the interference emissions they involve.  
The following leakage capacitances (motor cable + motor) mustn't be exceeded per drive controller.

### HCS01.1E-W0003, -W0006, -W0009, -W0013

| Clock frequency<br>[kHz] | Maximum leakage capacitance<br>(Motor + cable) per device [nF] | Motor cable length<br>[m] |
|--------------------------|----------------------------------------------------------------|---------------------------|
| 4                        | 33                                                             | 40                        |
| 8                        | 17                                                             | 20                        |
| 12                       | 13                                                             | 15                        |
| 16                       | 5                                                              | 5                         |

Tab.4-32: Clock Frequency, Leakage Capacitance, Motor Cable Length

### HCS01.1E-W0005, -W0008

| Clock frequency<br>[kHz] | Maximum leakage capacitance<br>(Motor + cable) per device [nF] | Motor cable length<br>[m] |
|--------------------------|----------------------------------------------------------------|---------------------------|
| 4                        | 34                                                             | 40                        |
| 8                        | 18                                                             | 20                        |
| 12                       | 14                                                             | 15                        |
| 16                       | 6                                                              | 5                         |

Tab.4-33: Clock Frequency, Leakage Capacitance, Motor Cable Length

### HCS01.1E-W0018, -W0028

| Clock frequency<br>[kHz] | Maximum leakage capacitance<br>(Motor + cable) per device [nF] | Motor cable length<br>[m] |
|--------------------------|----------------------------------------------------------------|---------------------------|
| 4                        | 40                                                             | 40                        |
| 8                        | 24                                                             | 20                        |
| 12                       | 20                                                             | 15                        |
| 16                       | 12                                                             | 5                         |

Tab.4-34: Clock Frequency, Leakage Capacitance, Motor Cable Length

Combining the Individual Components

HCS01.1E-W0054

| Clock frequency<br>[kHz] | Maximum leakage capacitance<br>(Motor + cable) per device [nF] | Motor cable length<br>[m] |
|--------------------------|----------------------------------------------------------------|---------------------------|
| 4                        | 85                                                             | 75                        |
| 8                        | 43                                                             | 38                        |
| 12                       | 30                                                             | 25                        |

Tab.4-35: Clock Frequency, Leakage Capacitance, Motor Cable Length

Select the appropriate mains connection (supply unit/converter, mains choke, mains filter) from the tables in the corresponding chapter (see [chapter "Combining Transformer, Mains Filter and Mains Choke" on page 90](#)).

Notes on Installation



When using NFE02 or NFD03 mains filters at **mains grounded via outer conductor**, install an isolating transformer between mains and mains filter.

Selecting the Mains Filter



The specified mains filter types are exclusively suited for TN and TT mains.  
The EMC limit values relate to line-based noise emission in the frequency range of 0.15... 30 MHz on the mains connection lines.

| HCS01.1E-W0005, -W0008, -W0018-A-03, -W00028, -W00054 |                                             |              |                                                            |
|-------------------------------------------------------|---------------------------------------------|--------------|------------------------------------------------------------|
| Nominal voltage of mains filter: 3 × 400 V            |                                             |              |                                                            |
| Clock frequency<br>[kHz]                              | Leakage capacitance (motor + cable)<br>[nF] | Mains filter | EMC limit value class to be achieved<br>(IEC / EN 61800-3) |
| 4; 8                                                  | < 100                                       | NFD03.1      | C2                                                         |
| 4; 8                                                  | 100 < ... < 150                             |              | C3                                                         |
| 12; 16                                                | < 30                                        |              | C2                                                         |
| 12; 16                                                | 30 < ... < 70                               |              | C3                                                         |

Tab.4-36: Mains Filter; 3 × 400 V

Combining the Individual Components

| HCS01.1E-W0005, -W0008, -W0018-A-03, -W00028, -W00054<br>Nominal voltage of mains filter: 3 × 400 ... 500 V |                                             |                     |                                                            |
|-------------------------------------------------------------------------------------------------------------|---------------------------------------------|---------------------|------------------------------------------------------------|
| Clock frequency<br>[kHz]                                                                                    | Leakage capacitance (motor + cable)<br>[nF] | Mains filter        | EMC limit value class to be achieved<br>(IEC / EN 61800-3) |
| 4; 8                                                                                                        | < 70                                        | FN3258H (Schaffner) | C2                                                         |
| 4; 8                                                                                                        | 70 < ... < 100                              |                     | C3                                                         |
| 12; 16                                                                                                      | < 20                                        |                     | C2                                                         |
| 12; 16                                                                                                      | 20 < ... < 50                               |                     | C3                                                         |

Tab.4-37: Mains filter; 3 × 400 ... 500 V

| HCS01.1E-W0003, -W0006, -W0009, -W0013, -W0018-A-02<br>Nominal voltage of mains filter: 1 × 230 V |                                             |                                            |                                                            |
|---------------------------------------------------------------------------------------------------|---------------------------------------------|--------------------------------------------|------------------------------------------------------------|
| Clock frequency<br>[kHz]                                                                          | Leakage capacitance (motor + cable)<br>[nF] | Mains filter                               | EMC limit value class to be achieved<br>(IEC / EN 61800-3) |
| 4; 8                                                                                              | < 90                                        | NFE02.1 <sup>1)</sup><br>FN350 (Schaffner) | C2                                                         |
| 4; 8                                                                                              | 90 < ... < 120                              |                                            | C3                                                         |
| 12                                                                                                | < 20                                        |                                            | C2                                                         |
| 12                                                                                                | 20 < ... < 40                               |                                            | C3                                                         |

1) Only allow up to a nominal current of 8 A

Tab.4-38: Mains Filter; 1 × 230 V

| HCS01.1E-W0005, -W0008, -W0018-A-03, -W00028, -W00054, (mains voltage: 3 × 400 V, L1-L2-L3)<br>can be combined with <sup>1)</sup><br>HCS01.1E-W0003, -W0006, -W0009, -W0013, -W0018-A-02, (mains voltage: 1 × 230 V, L-N)<br>Nominal voltage of mains filter: 3 × 400 V + N |                                             |                     |                                                            |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------|---------------------|------------------------------------------------------------|
| Clock frequency<br>[kHz]                                                                                                                                                                                                                                                    | Leakage capacitance (motor + cable)<br>[nF] | Mains filter        | EMC limit value class to be achieved<br>(IEC / EN 61800-3) |
| 4                                                                                                                                                                                                                                                                           | < 70                                        | FN3280H (Schaffner) | C2                                                         |
| 4                                                                                                                                                                                                                                                                           | 70 < ... < 120                              |                     | C3                                                         |
| 4                                                                                                                                                                                                                                                                           | < 70                                        | FN3256H (Schaffner) | C3                                                         |
| 8                                                                                                                                                                                                                                                                           | < 40                                        | FN3280H (Schaffner) | C2                                                         |
| 8                                                                                                                                                                                                                                                                           | 40 < ... < 70                               |                     | C3                                                         |
| 8                                                                                                                                                                                                                                                                           | < 40                                        | FN3256H (Schaffner) | C3                                                         |
| 12                                                                                                                                                                                                                                                                          | < 20                                        | FN3280H (Schaffner) | C2                                                         |

1) This combination allows interconnecting 3-phase and 1-phase HCS01 devices at one common 4-phase mains filter. Thereby, the nominal current of the mains filter and the maximum allowed leakage capacitance are taken into account.

Tab.4-39: Mains Filter; 3 × 400 V + N




## Combining the Individual Components

## Limit Value Classes

| IEC / EN<br>61800-3                                                       | CISPR 11<br>(EN55011)                | Explanation                                                                                                                                                                                                                                                                                  | Curves of<br>limit value<br>character-<br>istic |
|---------------------------------------------------------------------------|--------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------|
| Category C4,<br>2nd environ-<br>ment                                      | None                                 | One of the following 3 requirements must have been fulfilled: Mains connection current >400 A, IT mains or required dynamic drive behavior not reached by means of EMC filter. Adjust limit values to use and operation on site. User has to carry out and provide evidence of EMC planning. | -                                               |
| Category C3,<br>2nd environ-<br>ment                                      | Class A; Group<br>2<br><br>I > 100 A | Limit value in industrial areas to be complied with for applications operated at supply mains with nominal currents > 100 A.                                                                                                                                                                 | 1.1<br>1.2                                      |
| Category C3,<br>2nd environ-<br>ment                                      | Class A; Group<br>2<br><br>I < 100 A | Limit value in industrial areas to be complied with for applications operated at supply mains with nominal currents < 100 A.                                                                                                                                                                 | 2.1<br>2.2                                      |
| Category C2,<br>1st environ-<br>ment;<br><br>Restricted dis-<br>tribution | Class A;<br><br>Group 1              | Limit value in residential area or at facilities at low-voltage mains supplying buildings in residential areas. To be complied with for applications with restricted distribution.                                                                                                           | 3.1<br>3.2                                      |
| Category C1,<br>1st environ-<br>ment;<br><br>Unrestricted<br>distribution | Class B;<br><br>Group 1              | Limit value in residential areas to be complied with for applications with unrestricted distribution.                                                                                                                                                                                        | 4.1<br>4.2                                      |

Tab.4-40: Limit Value Classes

Combining the Individual Components

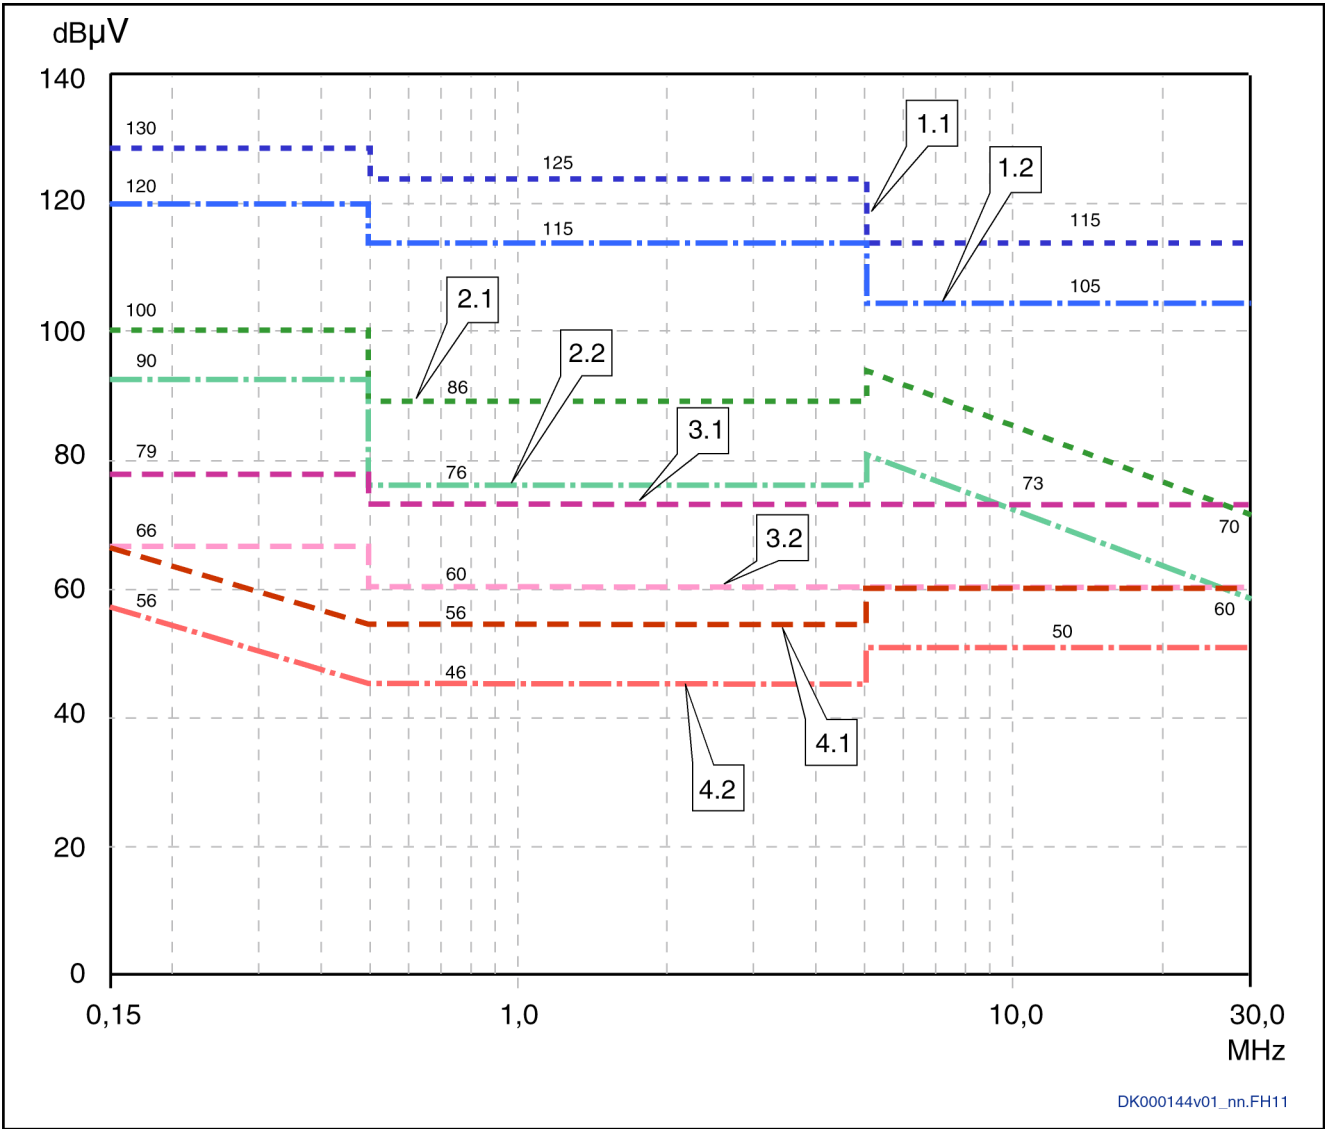

- 1.1 Category C3: Second environment, QSP, I > 100 A (class A, group 2, I > 100 A)
- 1.2 Category C3: Second environment, AV, I > 100 A (class A, group 2, I > 100 A)
- 2.1 Category C3: Second environment, QSP, I < 100 A (class A, group 2, I < 100 A)
- 2.2 Category C3: Second environment, AV, I < 100 A (class A, group 2, I < 100 A)
- 3.1 Category C2: First environment, restricted distribution, QSP (first environment, even if source of interference in second environment) (class A, group 1)
- 3.2 Category C2: First environment, restricted distribution, AV (first environment, even if source of interference in second environment) (class A, group 1)
- 4.1 Category C1: First environment, unrestricted distribution, QSP (first environment, even if source of interference in second environment) (class B, group 1)
- 4.2 Category C1: First environment, unrestricted distribution, AV (first environment, even if source of interference in second environment) (class B, group 1)
- Notes (1) Limit value for first environment is also relevant, if source of interference of second environment affects first environment  
(2) Designations "class" and "group" according to IEC CISPR 11

## Combining the Individual Components

QSP: Measuring method quasi peak measurement; AV: Measuring method arithmetic averaging

Fig. 4-28: *Limit Values for Line-Based Disturbances (IEC 61800-3); Limit Value Characteristic through Frequency Range*

## Determining the Mains Choke

When using mains chokes, take their effect on the connected drive controllers into account. Due to their inductance, mains chokes have a smoothing effect on the current and thereby reduce harmonics.

Take the nominal current of the mains choke into account to have the inductance of the mains choke available.

Some mains chokes are assigned to certain drive controllers (see technical data of the drive controller "Data for mains voltage supply → Assigned type of mains choke").

## Dimensioning the Mains Contactor

Required data:

- Nominal current  $I_{LN}$  of the drive controller (see [chapter 7.3.2 "Mains Voltage" on page 211](#))
- Number of drive controllers connected to the mains contactor

If you use mains contactors of utilization category AC-1, observe the conventional thermal continuous current  $I_{th}$  (see data sheet of mains contactor) when dimensioning the mains contactor.

The minimum required conventional thermal continuous current  $I_{th}$  results from the sum of nominal currents  $\Sigma I_{LN}$  of all connected drive controllers.

## Combining Transformer, Mains Filter and Mains Choke

| HCS01.1E                                       | Transformer       |                   | Mains filter |          |                     | Mains choke     |
|------------------------------------------------|-------------------|-------------------|--------------|----------|---------------------|-----------------|
|                                                | DST <sup>3)</sup> | DLT <sup>4)</sup> | NFE 02.1     | NFD 03.1 | HNF01.1*-****-E**** | HNL01.1E        |
| W0003<br>W0006<br>W0009<br>W0013<br>W0018-A-02 | ■                 | ■                 | ■            | ■        | 1)                  | -               |
| W0005<br>W0008<br>W0018-A-03<br>W0028<br>W0054 | ■                 | ■                 | -            | ■        | 1)                  | ■ <sup>2)</sup> |

■ Allowed

- Not allowed

1) We are currently checking whether it is possible to combine HNF mains filters and several HCS01 components.

2) Only possible with -W0028 and -W0054 components


3) DST = Autotransformer

4) DLT = Isolating transformer

Tab. 4-41: *Additional Components in the Mains Connection of HCS01 Components*

## Combining the Individual Components

### Control Circuit for the Mains Connection

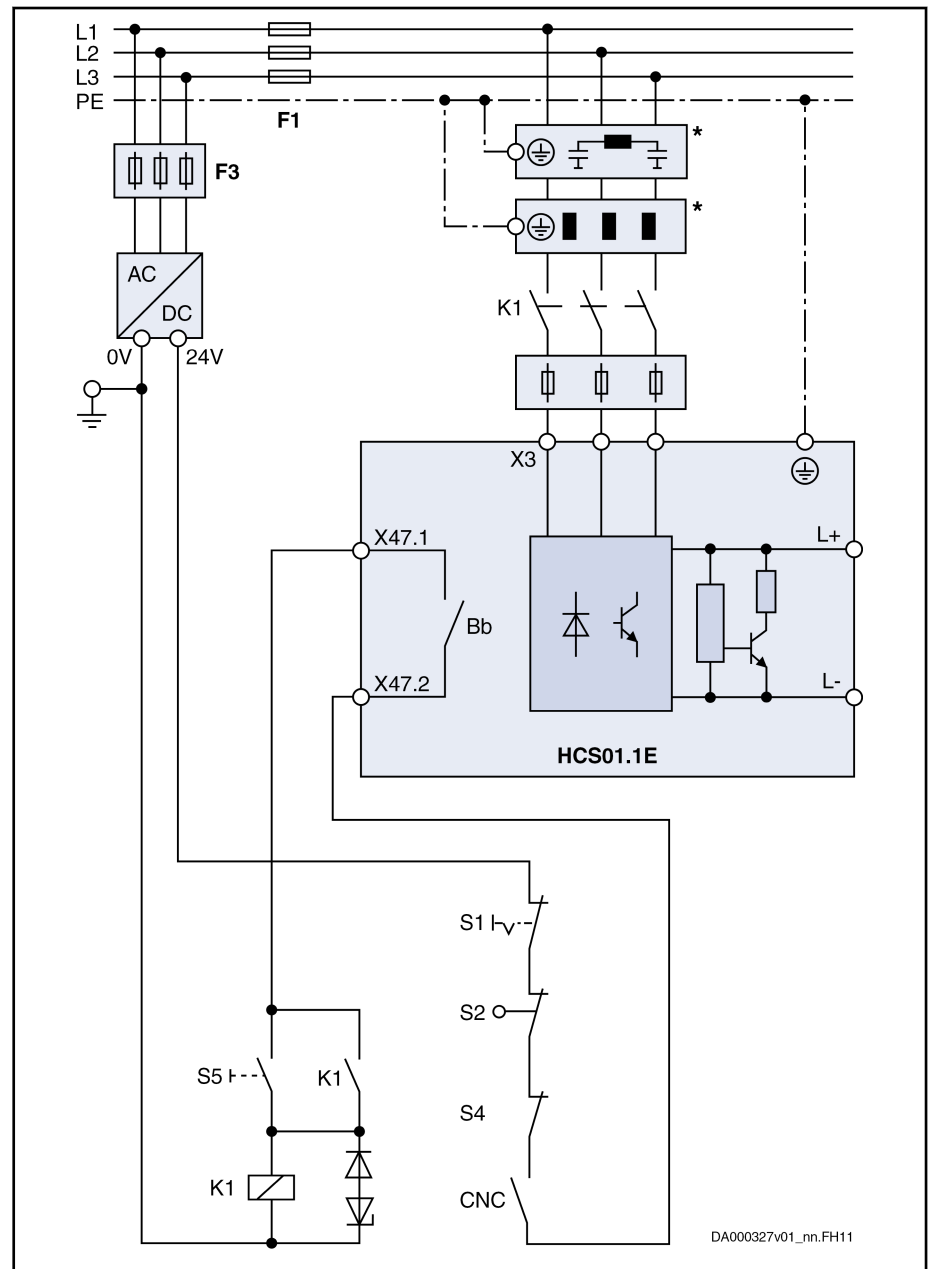

- \* Optional
- Bb Bb relay contact (see [chapter "X47, Bb Relay Contact, Module Bus" on page 134](#))
- CNC Lag error message of control unit
- F1 Fuse of power supply
- F3 Fuse of 24V power supply unit
- K1 External mains contactor
- S1 Emergency stop
- S2 Axis end position
- S4 Power Off
- S5 Power On

Fig.4-29: Control Circuit for the Mains Connection

## Combining the Individual Components

## 4.6.4 DC Bus Coupling

## Requirements for DC Bus Coupling

**Device Types** Only devices of the "HCS01.1E-W00\*\*-\*.03" type are suited for DC bus coupling. DC bus coupling takes place via the optionally available DC bus connector at the connection point X77.



**Parameterization:** For all devices which are only supplied via the DC bus, "DC bus → inverter mode" must be set as the source of power supply in parameter "P-0-0860, Converter configuration" (see also Parameter Description of the firmware used).

**Number** A **maximum of 8** devices can be coupled at a common DC bus.

**Mains Connection** DC bus coupling is possible for the following types of mains connection:

- **Central Supply**
- **Group Supply**

DC bus coupling requires:

- That the Bb contacts of all devices connected to the mains be wired
- That the module bus be wired via all devices at the common DC bus

## Central Supply and DC Bus Coupling


Use this type of DC bus coupling, when the DC bus continuous power of the infeeding device makes available sufficient power reserves to supply other HCS01 devices. The devices in the group can be of different types. For the project planning of the application, observe that the supplying devices can only make available the DC bus power for other devices which they do not consume themselves.

With central supply, **one** HCS01 **device** charges the DC bus and the other devices are supplied via DC bus coupling.

*Features*

- The supplying device must be of the **HCS01.1E-W0028 or -W0054** type
  - Energy compensation between the devices is possible (the DC bus capacitors of the devices are connected in parallel)
  - Balancing of the integrated braking resistors exists (equal load of all braking resistors integrated in the devices)
  - No balancing measures required in the supply feeder
  - To increase the DC bus power, a mains choke can be optionally used
  - It is possible to connect DC bus capacitor units; DC bus capacitor units should always be placed directly next to the most powerful device
- A DC bus capacitor unit HLC requires a mains choke to be installed
- Small wiring effort for the mains connection
  - DC bus short circuit functionality must be realized externally, if required

## Combining the Individual Components

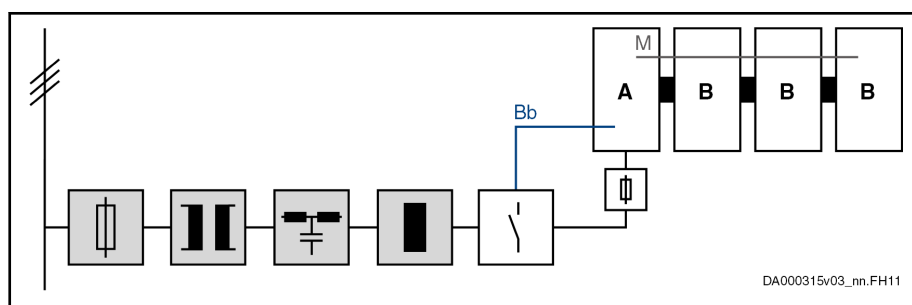

Components marked with gray background color: Optional, depending on the application

- A Component HCS01 (more powerful than component B); connected to other components via DC bus
- B Component HCS01 (less powerful than component A); connected to other components via DC bus
- Bb Bb relay contact wiring
- M Module bus

Fig. 4-30: Central Supply

## Group Supply and DC Bus Coupling

### Possibilities of DC Bus Coupling

For group supply with DC bus coupling, there are **two options**:

1. **At least two devices** supply the DC bus and other devices are supplied via the common DC bus connection
2. **All devices** with common DC bus connection supply the DC bus



When sizing the devices for group supply, observe the **balancing factor**:

- 0.8 (when balancing is used)
- 0.5 (when balancing is not used)

With group supply, the **Bb relay contacts of all supplying devices** must be connected **in series**. This guarantees that the mains contactor is switched off in the case of error in a device.

The **lines** of DC bus coupling mustn't be run outside of the control cabinet. The maximum line length of a DC bus coupling is 2 m. See also description of the connection point X77 for more information ([see page 136](#)).

**Balancing:** To distribute the charging process of the DC bus equally over all supplying devices, balancing chokes or balancing resistors must be installed in the supply feeder.

### Balancing Choke

- HCS01.1E-W0028: Mains choke HNL01.1E-1000-N0012-A-500-NNNN
- HCS01.1E-W0054: Mains choke HNL01.1E-0600-N0032-A-500-NNNN

The firmware provides for the balancing of the power over all braking resistors. See also the documentation of the firmware used (parameter "P-0-0860, Converter configuration").


## Combining the Individual Components



The parallel connection of the braking resistors causes **derating/reduction of power** of the continuous braking resistor power to the factor 0.8.

## Supply via at Least Two Devices

Use this type of DC bus coupling if you use **different HCS01 device types** in your application.

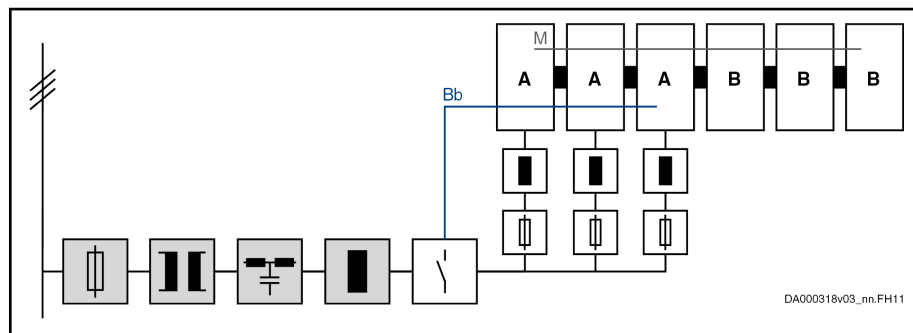

Components marked with gray background color: Optional, depending on the application; the choke is used to reduce current harmonics

- A Component HCS01 (more powerful than component B; all components A identical); connected to supply mains via balancing chokes; connected to other components via DC bus
- B Component HCS01 (less powerful than component A); connected to other components via DC bus
- Bb Bb relay contact wiring
- M Module bus

Fig.4-31: Group Supply; Several HCS01 Components Connected to Supply Mains

## Features

- The supplying devices<sup>1) 2)</sup> must be of the same type. The following devices are suited as supplying devices:
  - HCS01.1E-W0028
  - HCS01.1E-W0054
- DC bus continuous power of the supplying devices reduced by parallel operation
- Energy compensation between the devices is possible (the DC bus capacitors of the devices are connected in parallel)
- Balancing of the integrated braking resistors exists (equal load of all braking resistors integrated in the devices)
- Balancing chokes or balancing resistors required in supply feeder
- It is possible to connect DC bus capacitor units
- Wiring effort for the mains connection relatively small
- It is possible to use a common mains contactor, as well as a common mains filter
- DC bus short circuit functionality must be realized externally, if required


<sup>1)</sup> **Supplying** devices are devices connected to the mains which supply power to other devices via a DC bus connection

<sup>2)</sup> **Supplied** devices are devices not connected to the mains which are supplied with power by the supplying devices via a DC bus connection

## Combining the Individual Components

### Supply via all Devices

Use this type of DC bus coupling if you exclusively use **one HCS01 device type** in your application.

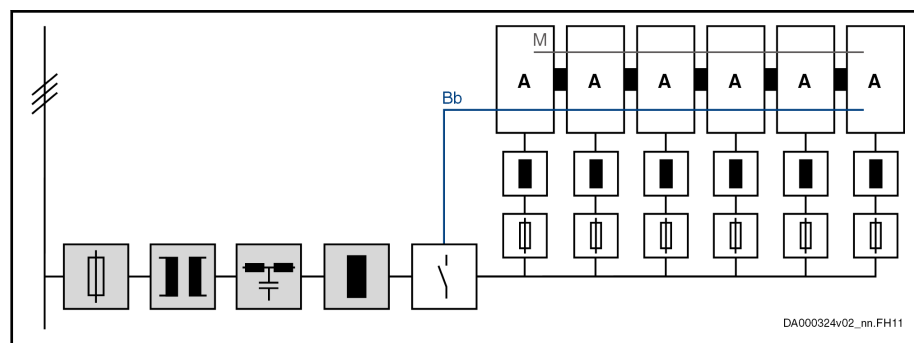

Components marked with gray background color: Optional, depending on the application; the choke is used to reduce current harmonics  
A Component HCS01 (all components A identical); connected to supply mains via balancing chokes; interconnected via DC bus  
Bb Bb relay contact wiring  
M Module bus (not obligatory)

Fig. 4-32: Group Supply; all HCS01 Components Connected to Supply Mains

### Features

- All devices must be of the **same type**
- DC bus continuous power of the supplying devices reduced by parallel operation
- Energy compensation between the devices is possible (the DC bus capacitors of the devices are connected in parallel)
- Balancing of the integrated braking resistors exists (equal load of all braking resistors integrated in the devices)
- Balancing chokes or balancing resistors required in supply feeder
- It is possible to connect DC bus capacitor units
- Wiring effort for the mains connection of all devices relatively big
- DC bus short circuit functionality must be realized externally, if required

## Implementation of DC Bus Coupling

### Maximum Number of Devices

A **maximum of 8** devices can be coupled at a common DC bus.


The maximum number of devices which can be interconnected via DC bus coupling depends on

- the power reserves of the supplying devices  
(The power reserve ( $P_{\text{reserve}}$ ) results from the difference between the possible DC bus continuous power of the device and the power consumed by the motor connected to the device.)
- the type of DC bus connection:
  - Connection looped through via DC bus connector X77
  - DC bus connecting bar with spur lines to the individual devices
- the sum of DC bus continuous powers of all supplied devices
- the mains voltage value
- the maximum continuous power which can be looped through via the DC bus connector X77  
(The continuous power results from the current carrying capacity of the DC bus connector X77 and the mains voltage value.)



Combining the Individual Components

Load of DC Bus Connector at I = 25 A:

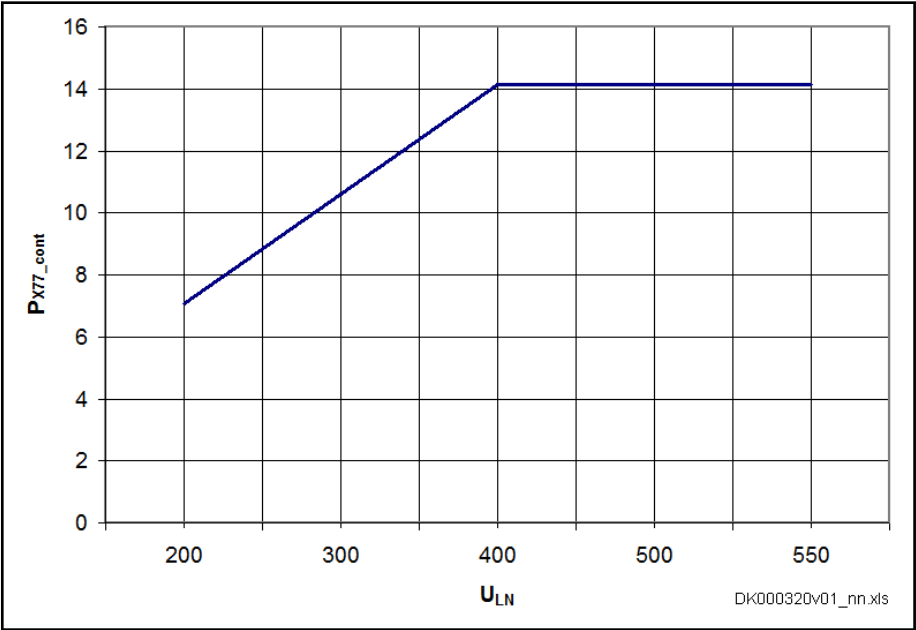

U<sub>LN</sub>

Mains voltage

P<sub>X77\_cont</sub>

Continuous power at DC bus connector X77

Fig.4-33:

Load of DC Bus Connector

| U <sub>LN</sub> | P <sub>X77_cont</sub> |
|-----------------|-----------------------|
| 200 V AC        | 7 kW                  |
| 400 V AC        | 14 kW                 |
| 500 V AC        | 14 kW                 |

Tab.4-42: Selected Values of Continuous Power via DC Bus Connector X77 (P<sub>X77\_cont</sub>) Depending on Mains Voltage

Number of supplied devices:

If the sum of power reserves (P<sub>reserve</sub>) of the supplying devices is **greater** then the continuous power of X77 (P<sub>X77\_cont</sub>), the maximum number of supplied devices results from P<sub>X77\_cont</sub> minus the respective DC bus continuous power of the individual devices at average speed.

If the sum of power reserves (P<sub>reserve</sub>) of the supplying devices is **smaller** than the continuous power of X77 (P<sub>X77\_cont</sub>), the maximum number of supplied devices results from P<sub>reserve</sub> minus the respective DC bus continuous power of the individual devices at average speed.

## Combining the Individual Components

### Looping Through the DC Bus Connection via DC Bus Connector X77

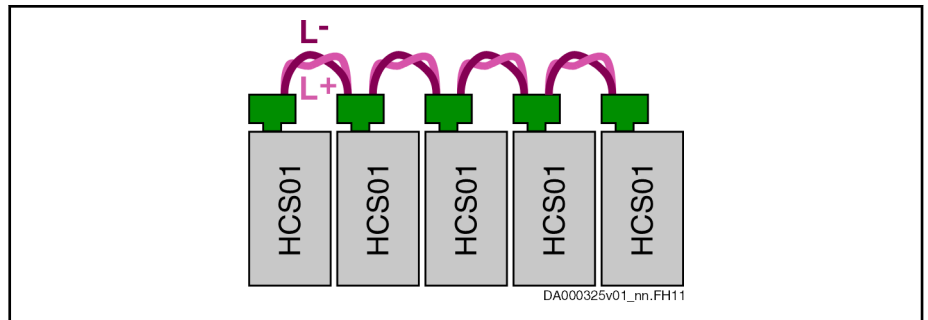


Fig.4-34: Looping Through via DC Bus Connector


The DC buses of the individual devices are connected via the DC bus connectors X77.

When the devices are supplied via group supply, the DC bus connector X77 of the last infeeding device is the limiting factor in the DC bus group.



**Arrangement of the devices:** The higher the power consumption of a device, the nearer to the supplying devices it must be arranged.

### Example:

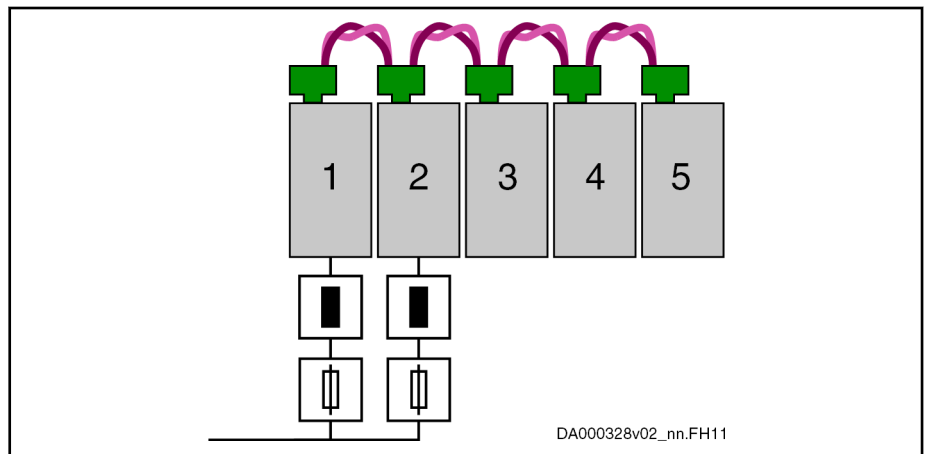

1, 2 HCS01.1E-W0028 (supplying devices)  
3, 4, 5 HCS01.1E-W0018 (supplied devices)

Fig.4-35: Looping Through

On the left, the two supplying HCS01.1E-W0028 devices have been arranged; to their right the three supplied HCS01.1E-W0018 devices.

The DC bus connector of the second device from the left (2) limits the possible number of devices at the common DC bus.

Combining the Individual Components

DC Bus Connecting Bar

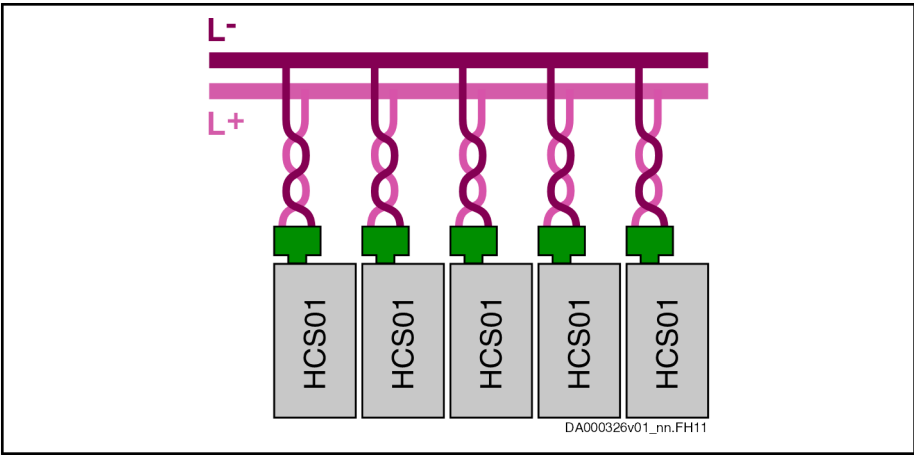


Fig.4-36: DC Bus Connection via Connecting Bar

Via a "spur line", the DC buses of the individual devices are connected to the DC bus connecting bar.

The power reserve of the supplying devices limits the number of devices at the common DC bus.

DC Bus Capacitor Unit

|             |                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Function    | DC bus capacitor units are optional additional components and increase <ul style="list-style-type: none"><li>the DC bus continuous power</li><li>the available DC bus energy</li></ul>                                                                                                                                                                                                                                                      |
| Mains Choke | Always operate the DC bus capacitor units together with the mains choke assigned to the drive controller (see chapter 7.3.2 "Mains Voltage" on page 211).                                                                                                                                                                                                                                                                                   |
|             | Special case "HCS01.1E-W0018-_-03" (in the technical data, no mains choke has been assigned to this drive controller):<br>Use the mains choke "HNL01.1E-1000-N0012-A-500-NNNN".                                                                                                                                                                                                                                                             |
| Connection  | The maximum allowed capacitance of a DC bus capacitor unit depends on the device which assumes the DC bus supply.                                                                                                                                                                                                                                                                                                                           |
|             | <div> Even if several devices supply the DC bus, the specific external DC bus capacitance of the biggest supplying device may only be connected <b>once</b> for the entire DC bus group!</div> <div>For the maximum allowed external DC bus capacitance at <math>U_{LN\_nenn}</math>, see the technical data (chapter 7.3.3 "DC Bus" on page 218).</div> |

Maximum Allowed External DC Bus Capacitance [mF] vs. Mains Voltage

| HCS01.1E-  | Mains voltage |       |       |       |
|------------|---------------|-------|-------|-------|
|            | 400 V         | 440 V | 480 V | 500 V |
| W0018-A-03 | 3             | 2     | 1     | -     |
| W0028-A-03 | 4             | 3     | 1     | -     |
| W0054-A-03 | 13            | 9     | 6     | 5     |

Tab.4-43: Maximum Allowed External DC Bus Capacitance (in mF)

## Combining the Individual Components

If possible, place the DC bus capacitor unit directly next to the drive controller to be supplied or the most powerful drive controller. Connect the DC bus capacitor unit to the drive controller via the DC bus connection X77.

See also [chapter 8.3.5 "DC Bus Capacitor Units HLC" on page 277](#)

## Module Bus and Parameterization

**Module Bus** The module bus is an internal system connection. To ensure the coordinated behavior of all devices of a drive system, the devices must exchange information via the module bus.

With the parameter "P-0-0118, Power supply, configuration", you can parameterize both a common error reaction for all axes and power off in the case of error.



When several devices are coupled via the DC bus, it is obligatory to loop through the module bus.

Use **shielded lines** to loop through the module bus, when the length of all module bus connections is **greater than 3 m**.

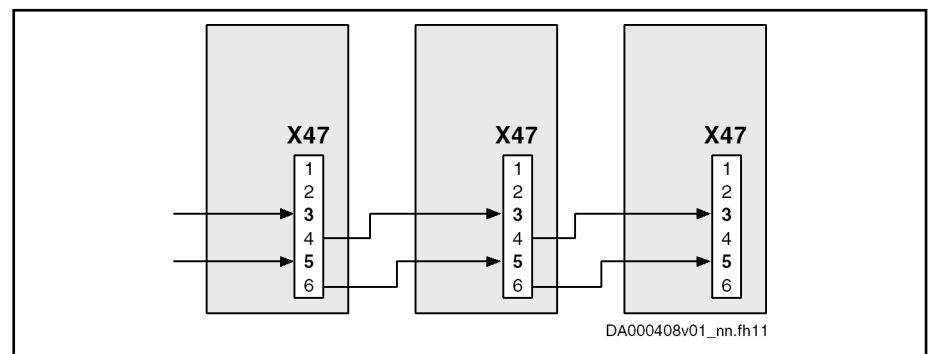


Fig.4-37: Looping through the Module Bus

**Parameterization** For all devices which are only supplied via the DC bus, "DC bus → inverter mode" must be set as the source of power supply in parameter "P-0-0860, Converter configuration".

For detailed information, see the documentation of the firmware used:

- Parameter Description:
  - P-0-0860, Converter configuration
  - P-0-0118, Power supply, configuration
- Functional Description: "Power Supply"

## Bb Relay Contact

Generally, the following applies: Include the Bb contact in the mains contactor circuit at all devices connected to the mains. (See also index entry "Mains connection → Control circuit".)

When several devices assume the DC bus supply (group supply), connect the Bb relay contacts (X47) of all **supplying** devices in series. This guarantees that the mains contactor is switched off in the case of error in a device.

For devices which are only supplied via the DC bus, it is sufficient that you establish the module bus connection. You do not need to connect the Bb relay contacts of these devices in series.

Combining the Individual Components

**NOTICE**

**Risk of fire in the case of error caused by missing mains contactor control!**

Include the Bb relay contact in the switch-off chain of the mains contactor so that the power supply is interrupted in the case of error.

## 4.7 Acceptance Tests and Approvals

**Declaration of Conformity**      Declarations of conformity confirm that the components comply with the valid EN standards and EC directives. If required, our sales representative can provide you with the declarations of conformity for components.

|                                                                                                                         |                                            |                                                      |
|-------------------------------------------------------------------------------------------------------------------------|--------------------------------------------|------------------------------------------------------|
| <br><small>DX000011v01_en.FH11</small> | <b>Drive controllers,<br/>Supply units</b> | <b>Motors</b>                                        |
| CE conformity regarding Low-Voltage Directive                                                                           | EN 61000-5-1:2007                          | EN 60034-1:2010+Cor.:2010<br>EN 60034-5:2001+A1:2007 |
| CE conformity regarding EMC product standard                                                                            | EN 61800-3:2004                            |                                                      |

Tab.4-44:      CE - Applied Standards

**C-UL-US Listing**      The components are listed by UL (Underwriters Laboratories Inc.®). You can find the evidence of certification on the Internet under <http://www.ul.com> under "Certifications" by entering the file number or the "Company Name: Rexroth".

|                                                                                                                         |                                                                                                                                        |
|-------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------|
| <br><small>DX000000v01_en.EF</small> | <ul style="list-style-type: none"><li>UL standard: UL 508 C</li><li>CSA standard: Canadian National Standard C22.2 No. 14-10</li></ul> |
|                                                                                                                         | <b>Company Name</b><br>BOSCH REXROTH ELECTRIC DRIVES & CONTROLS GMBH<br><b>Category Name:</b><br>Power Conversion Equipment            |
|                                                                                                                         | <b>File numbers</b><br>Rexroth IndraDrive Cs components: <ul style="list-style-type: none"><li>E134201</li><li>E227957</li></ul>       |

Tab.4-45:      C-UL Listing



**UL ratings**

For using the component in the scope of CSA / UL, take the UL ratings of the individual components into account.

Make sure that the indicated **short circuit current rating SCCR** is not exceeded, e.g. by appropriate fuses in the mains supply of the supply unit.

Combining the Individual Components



Wiring material UL

In the scope of CSA / UL, use copper 60/75 °C only; class 1 or equivalent only.



Allowed pollution degree

Comply with the allowed pollution degree of the components (see "Ambient and Operating Conditions").

C-UR-US Listing

The motors are listed by UL ("Underwriters Laboratories Inc.®"). You can find the evidence of certification on the Internet under <http://www.ul.com> under "Certifications" by entering the file number or the "Company Name: Rexroth".

|                                                                                                       |                                                                                                                                       |
|-------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------|
| <br>CUR_Zeichen.fh11 | <ul style="list-style-type: none"><li>UL standard: UL 1004-1</li><li>CSA standard: Canadian National Standard C22.2 No. 100</li></ul> |
|                                                                                                       | <b>Company Name</b><br>BOSCH REXROTH ELECTRIC DRIVES & CONTROLS GMBH                                                                  |
|                                                                                                       | <b>Category Name:</b><br>Servo and Stepper Motors - Component                                                                         |
|                                                                                                       | <b>File numbers</b><br>MSK, MSM motors: E335445                                                                                       |

Tab.4-46: C-UR Listing



Wiring material UL (ready-made cables by Rexroth)

In the scope of CSA / UL, use copper 60/75 °C only; class 6 or equivalent only.



Allowed pollution degree

Comply with the allowed pollution degree of the components (see "Ambient and Operating Conditions").

CCC (China Compulsory Certification)

The CCC test symbol comprises a compulsory certification of safety and quality for certain products mentioned in the product catalog "First Catalogue of Products Subject to Compulsory Certification" and in the CNCA document "Application Scope for Compulsory Certification of Products acc. first Catalogue" and put in circulation in China. This compulsory certification has been existing since 2003.

CNCA is the Chinese authority responsible for certification directives. When a product is imported in China, the certification will be checked at the customs by means of entries in a database. For the requirement of certification three criteria are normally relevant:

1. Customs tariff number (HS code) according to CNCA document "Application Scope for Compulsory Certification of Products acc. first Catalogue".
2. Scope of application according to CNCA document "Application Scope for Compulsory Certification of Products acc. first Catalogue".

## Combining the Individual Components

3. For the IEC product standard used, the corresponding Chinese GB standard must exist.

For the drive components by Rexroth described in this documentation, **certification is not required at present**, thus they are not CCC certified. Negative certifications will not be issued.

Condition as Supplied, Identification, Transport and Storage

## 5 Condition as Supplied, Identification, Transport and Storage

### 5.1 Condition as Supplied

#### 5.1.1 Factory-Side Test

##### Voltage Test and Insulation Resistance Test

According to standard, the **components** of the Rexroth IndraDrive Cs range are tested with voltage.

| Test                       | Test rate           |
|----------------------------|---------------------|
| Voltage test               | 100% (EN 61800-5-1) |
| Insulation resistance test | 100% (EN 60204-1)   |

Tab.5-1: Applied Standards

#### 5.1.2 Customer-Side Test

##### **NOTICE**

**Risk of damage to the installed Rexroth components by customer-side test of the machine or installation!**

Before making a voltage test or an insulation resistance test for an **installation or machine** in which these components are used:

Disconnect all connections to the Rexroth components or disconnect the plug-in connections to protect the electronic components.




Condition as Supplied, Identification, Transport and Storage

5.2 Identification

5.2.1 Type Plates


Arrangement

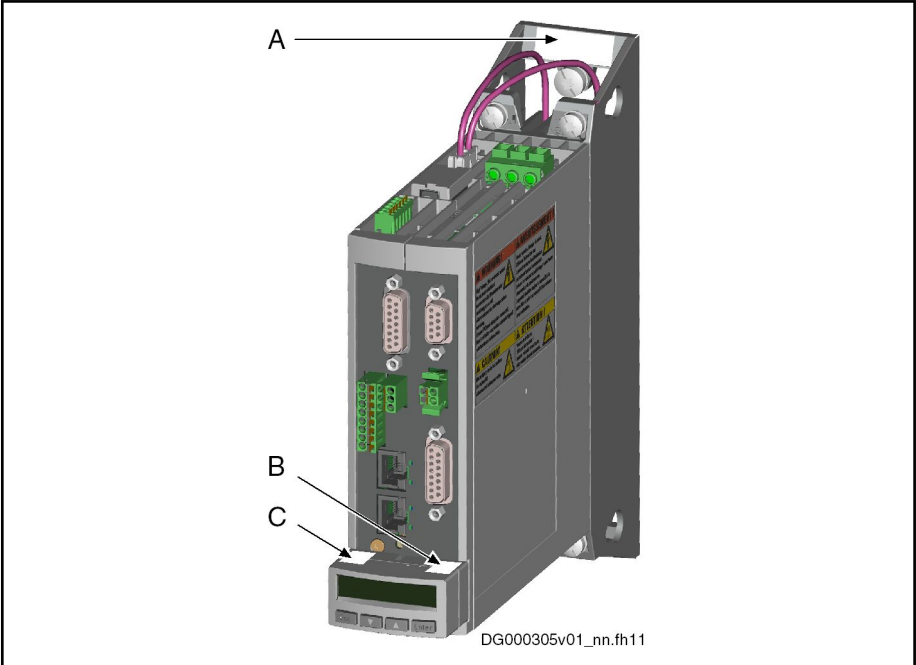

A      Type plate device  
B      Type plate firmware  
C      Type plate control panel  
*Fig.5-1:      Type Plate Arrangement*

Design


Type Plate (Device)

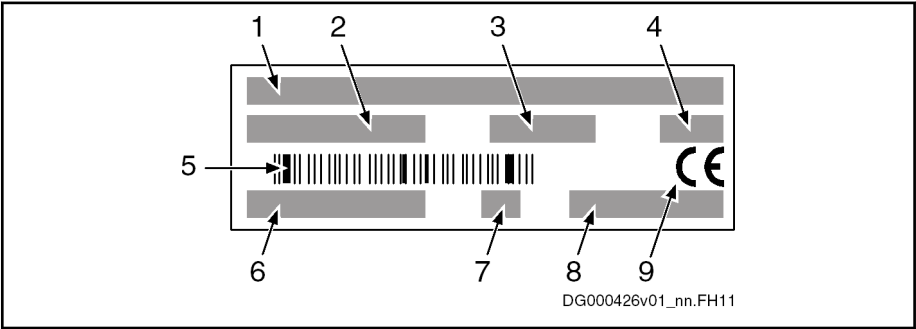

1      Device type  
2      Part number  
3      Production week; 11W36, for example, means year 2011, week 36  
4      Factory identifier  
5      Bar code  
6      Serial number  
7      Hardware index  
8      Country of manufacture  
9      Identification  
*Fig.5-2:      Type Plate (Device)*

## Condition as Supplied, Identification, Transport and Storage


Type Plate (Firmware)

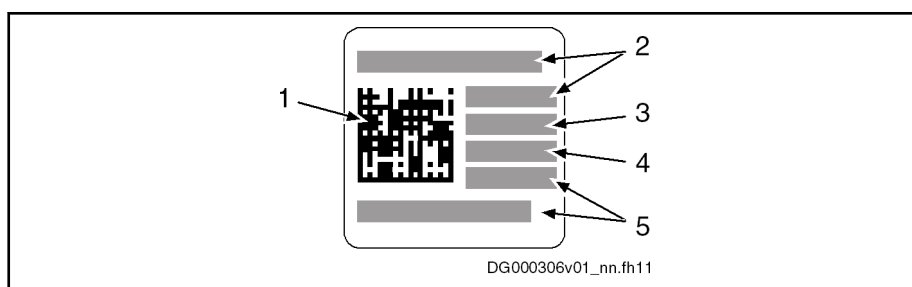

- 1 Bar code
- 2 Type
- 3 Factory identifier
- 4 Production week (example: 11W36 means: year 2011, week 36)
- 5 Part number

Fig. 5-3: Type Plate (Firmware)

Type Plate (Control Panel)

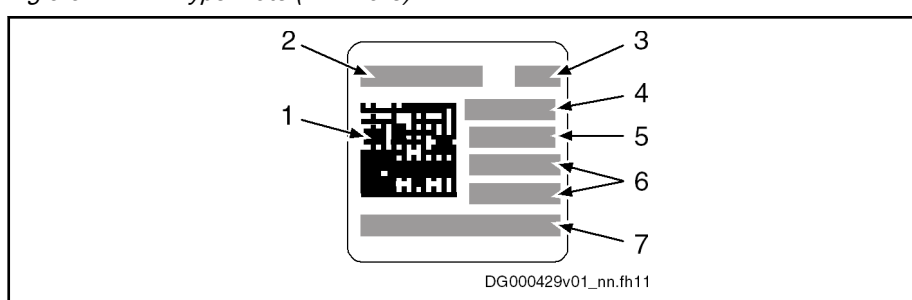

- 1 Bar code
- 2 Type
- 3 Hardware index
- 4 Factory identifier
- 5 Production week (example: 11W36 means: year 2011, week 36)
- 6 Part number
- 7 Serial number

Fig. 5-4: Type Plate (Control Panel)

## 5.2.2 Scope of Supply

| Standard                                                                     | To be ordered separately                                                                                                                                                                                                                                                             |
|------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Drive controller HCS01                                                       | DC bus connector X77 (DC bus connection; for HCS01.1E-W00xx-x- <b>03</b> devices)<br>Order code: RLS0778/K06                                                                                                                                                                         |
| Mounting and connection accessories HAS09                                    | microSD memory card: <ul style="list-style-type: none"> <li>Only for HCS01.1E-W00**-A-0*-<b>A-CC</b> (ADVANCED) devices</li> <li>Order code: <ul style="list-style-type: none"> <li>PFM04.1-512-FW (with firmware)</li> <li>PFM04.1-512-NW (without firmware)</li> </ul> </li> </ul> |
| Connectors X3, X5, X6, X13, X31, X32, X47                                    | Other accessories, such as SUP-E01-MSM-BATTERYBOX                                                                                                                                                                                                                                    |
| Touch guard X77 (DC bus connection; for HCS01.1E-W00xx-x- <b>03</b> devices) |                                                                                                                                                                                                                                                                                      |
| Documentation                                                                |                                                                                                                                                                                                                                                                                      |

Tab. 5-2: Scope of Supply HCS01

Condition as Supplied, Identification, Transport and Storage

## 5.3 Transport of the Components

Ambient and Operating Conditions - Transport

| Description                 | Symbol              | Unit             | Value                                              |                        |
|-----------------------------|---------------------|------------------|----------------------------------------------------|------------------------|
| Temperature range           | T <sub>a_tran</sub> | °C               | Supply units and drive controllers:<br>-25 ... +70 | Motors:<br>-20 ... +80 |
| Relative humidity           |                     | %                | 5 ... 95                                           |                        |
| Absolute humidity           |                     | g/m <sup>3</sup> | 1 ... 60                                           |                        |
| Climatic category (IEC 721) |                     |                  | 2K3                                                |                        |
| Moisture condensation       |                     |                  | Not allowed                                        |                        |
| Icing                       |                     |                  | Not allowed                                        |                        |

Tab.5-3:      Ambient and Operating Conditions - Transport

## 5.4 Storage of the Components

NOTICE

Damage to the component caused by long storage periods!

Some components contain electrolytic capacitors which may deteriorate during storage.

When storing the following components for a longer period of time, operate them **once a year for at least 1 hour**:

- Converters and supply units: Operation with mains voltage U<sub>LN</sub>
- Inverters and DC bus capacitor units: Operation with DC bus voltage U<sub>DC</sub>


Ambient and Operating Conditions - Storage

| Description                | Symbol               | Unit             | Value                                             |                        |
|----------------------------|----------------------|------------------|---------------------------------------------------|------------------------|
| Temperature range          | T <sub>a_store</sub> | °C               | Supply units and drive controllers:<br>-25 ... 55 | Motors:<br>-20 ... +60 |
| Relative humidity          |                      | %                | 5 ... 95                                          |                        |
| Absolute humidity          |                      | g/m <sup>3</sup> | 1 ... 29                                          |                        |
| Climatic category (IEC721) |                      |                  | 1K3                                               |                        |
| Moisture condensation      |                      |                  | Not allowed                                       |                        |
| Icing                      |                      |                  | Not allowed                                       |                        |

Tab.5-4:      Ambient and Operating Conditions - Storage

## 6 Mounting and Installation

### 6.1 Mounting HCS01 Devices in the Control Cabinet

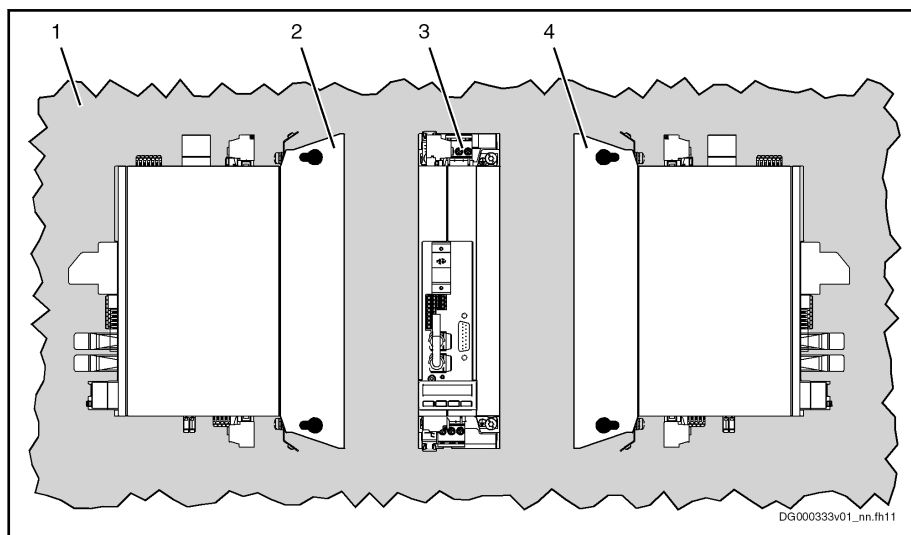

- 1 Mounting surface in control cabinet
- 2 Left-hand mounting
- 3 Back-side mounting (standard mounting)
- 4 Right-hand mounting

Fig. 6-1: Options for Mounting

#### Notes on Mounting

- Observe the **minimum distances** to be complied with for mounting (see technical data or dimensional drawings).

The specified horizontal minimum distance refers to the distance to neighboring devices or equipment installed in the control cabinet (such as cable ducts) and not to the distance to the control cabinet wall.

- The **back-side mounting** (back of device directly mounted to mounting surface in control cabinet) is the standard and should be used, if possible.
- The **left-hand or right-hand mounting** (left or right side of device directly mounted to mounting surface in control cabinet) can be used, if the mounting clearance between control cabinet wall and control cabinet front is not sufficient for back-side mounting.

**NOTICE!** Risk of damage by high temperatures! At the **back of the HCS01 devices**, there are **braking resistors** which can become very hot during operation. When arranging the devices in the control cabinet, make sure there aren't any heat-sensitive materials close to the braking resistors.

In the case of left-hand or right-hand mounting, you **must not pile the devices**. Each device must have immediate contact to the control cabinet wall.

- Tightening torque** of the mounting screws: 6 Nm
- On the sides of the devices, there are **adhesive labels with notes on safety**. The supplied accessory HAS09 additionally contains these adhesive labels. If the adhesive labels at the devices are no longer visible after mounting, place the adhesive labels from the HAS09 accessory clearly visibly at the device or in the immediate vicinity of the device.

Mounting and Installation


**Required Steps to Follow**      HCS01 drive controllers were designed for control cabinet mounting. They are mounted with two screws (M6×20; contained in the supplied accessory HAS09).

**Mounting the drive controller**

- 1.    Fix screws to the back panel of the control cabinet.
- 2.    Attach the drive controller to the screws.
- 3.    Fix the screws with 6 Nm.

6.2      Electrical Connection

6.2.1    Overall Connection Diagram

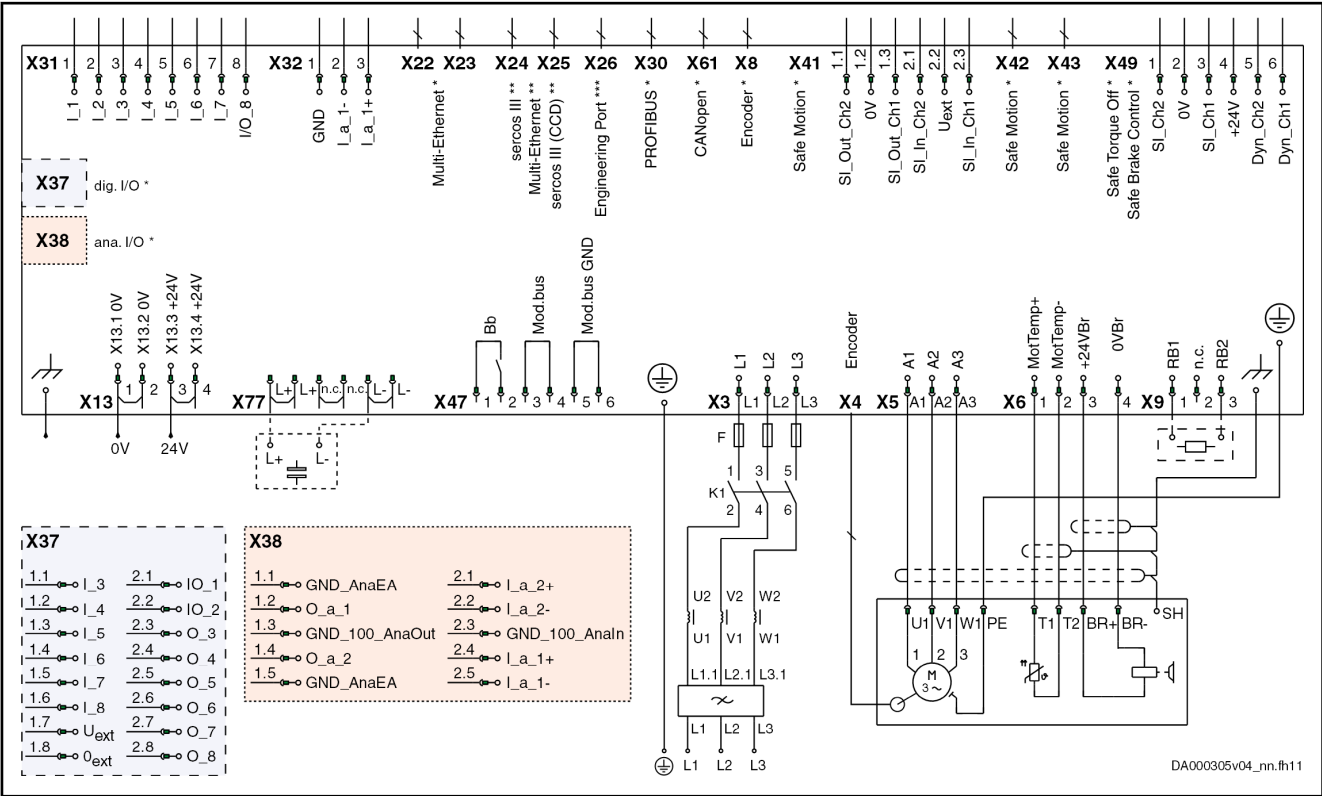

\*      Optional

\*\*      **ECONOMY** = sercos III; **BASIC** = Multi-Ethernet; **ADVANCED** = sercos III cross communication (CCD)

\*\*\*      Only available at HCS01.1E-W00\*\*-A-0\*-A-CC (ADVANCED) devices

X6.1, X6.2      T1 and T2 are not available at MSM motors. In order that the temperature control of the motor works correctly, the motor temperature sensor must be connected as specified in the wiring diagram; otherwise, motor overtemperature detection in the drive is impossible. For Rexroth motors, such as MSK, the motor overload protection level is automatically set when the motor is connected to the drive. It is not necessary to make any adjustment. Apart from that, please refer to the Rexroth firmware documentation.

X31      No standard assignment preset; make the assignment by means of firmware documentation (see Functional Description, index entry "Digital inputs/outputs")

X47.1, X47.2      For the "ready for operation" message of the device, the Bb relay contact (X47.1, X47.2) must be wired

X47.3...6      Module bus only available at HCS01.1E-W00xx-x-03 devices


X77      DC bus connection (L+, L-) only available at HCS01.1E-W00xx-x-03 devices

Fig.6-2:      Connection Diagram

## 6.2.2 Connection Points

### Arrangement of the Connection Points HCS01

Connection Points HCS01 (ECONOMY, BASIC)

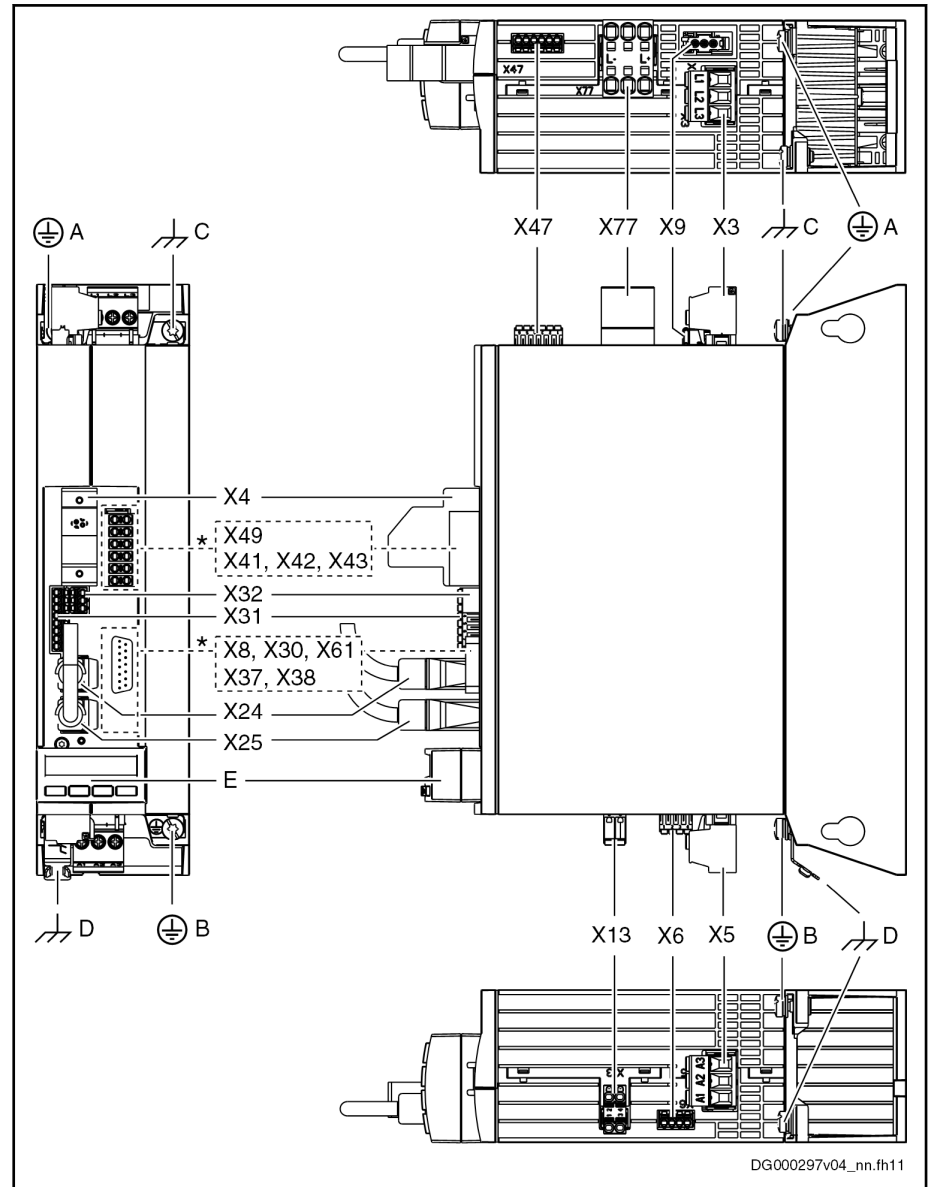

DG000297v04\_nn.fh11

- \* Optional connection point
- A Connection point of equipment grounding conductor, mains
- B Connection point of equipment grounding conductor, motor
- C Shield connection control lines
- D Shield Connection Motor Cable
- E Control Panel
- X3 Mains Connection
- X4 Motor encoder
- X5 Motor connection
- X6 Motor temperature monitoring, motor holding brake
- X8 Encoder evaluation (option EC); encoder emulation (option EM)
- X9 Integrated/external braking resistor
- X13 24V supply (control voltage)
- X24 / X25 **ECONOMY:** Communication sercos III; **BASIC:** Communication Multi-Ethernet


## Mounting and Installation

|                  |                                                                                                                                                                                                           |
|------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| X30              | Communication PROFIBUS (option PB)                                                                                                                                                                        |
| X31              | Digital inputs, digital output                                                                                                                                                                            |
| X32              | Analog input                                                                                                                                                                                              |
| X37              | Digital inputs/outputs (option DA)                                                                                                                                                                        |
| X38              | Analog inputs/outputs (option DA)                                                                                                                                                                         |
| X41, X42,<br>X43 | Safety technology (option S4: Safe Motion)                                                                                                                                                                |
| X47              | Bb relay contact, module bus (module bus only at HCS01.1E-W00xx-x-03 devices)                                                                                                                             |
| X49              | Safety technology (option L3: Safe Torque Off; option L4: Safe Torque Off, Safe Brake Control)                                                                                                            |
| X61              | Communication CANopen (option CN)                                                                                                                                                                         |
| X77              | DC bus connection (only at HCS01.1E-W00xx-x-03 devices); DC bus connector optionally available (if the DC bus connector is not used, the DC bus connection must be covered with the supplied touch guard) |

*Fig. 6-3: Connection Points HCS01*

# Mounting and Installation

## Connection Points HCS01 (ADVANCED)

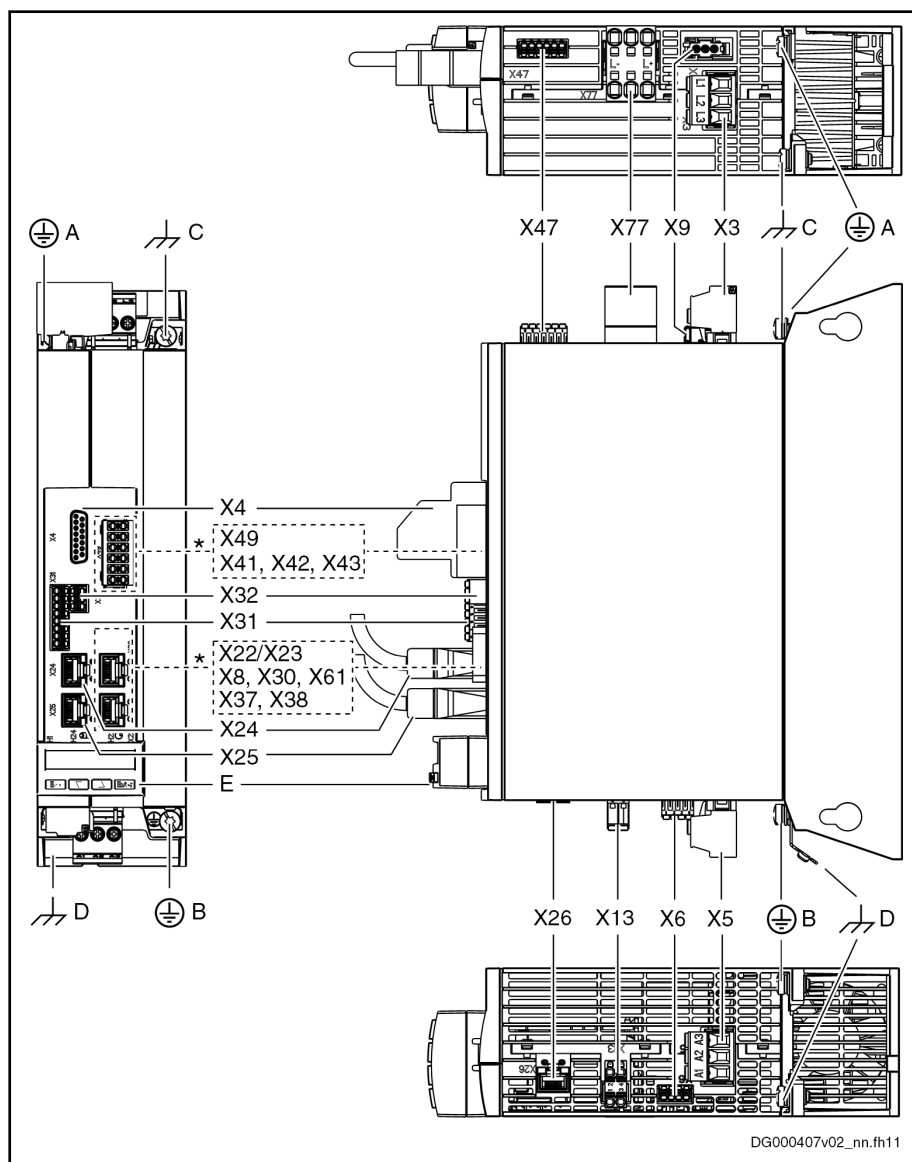

- \* Optional connection point
- A Connection point of equipment grounding conductor, mains
- B Connection point of equipment grounding conductor, motor
- C Shield connection control lines
- D Shield Connection Motor Cable
- E Control Panel
- X3 Mains Connection
- X4 Motor encoder
- X5 Motor connection
- X6 Motor temperature monitoring, motor holding brake
- X8 Encoder evaluation (option EC); encoder emulation (option EM)
- X9 Integrated/external braking resistor
- X13 24V supply (control voltage)
- X22 / X23 Communication Multi-Ethernet (option ET)
- X24 / X25 sercos III master
- X26 Engineering interface
- X30 Communication PROFIBUS (option PB)
- X31 Digital inputs, digital output
- X32 Analog input



## Mounting and Installation

|                  |                                                                                                                                                                                                           |
|------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| X37              | Digital inputs/outputs (option DA)                                                                                                                                                                        |
| X38              | Analog inputs/outputs (option DA)                                                                                                                                                                         |
| X41, X42,<br>X43 | Safety technology (option S4: Safe Motion)                                                                                                                                                                |
| X47              | Bb relay contact, module bus (module bus only at HCS01.1E-W00xx-x-03 devices)                                                                                                                             |
| X49              | Safety technology (option L3: Safe Torque Off; option L4: Safe Torque Off, Safe Brake Control)                                                                                                            |
| X61              | Communication CANopen (option CN)                                                                                                                                                                         |
| X77              | DC bus connection (only at HCS01.1E-W00xx-x-03 devices); DC bus connector optionally available (if the DC bus connector is not used, the DC bus connection must be covered with the supplied touch guard) |

Fig.6-4: Connection Points HCS01

## 6.2.3 On-Board Connection Points

### Connection of Equipment Grounding Conductor

#### WARNING

**High housing voltage and high leakage current! Danger to life, risk of injury by electric shock!**

- Before switching on and before commissioning, ground or connect the components of the electric drive and control system to the equipment grounding conductor at the grounding points.
- Connect the equipment grounding conductor of the components of the electric drive and control system permanently to the main power supply at all times. The leakage current is greater than 3.5 mA.
- Establish an equipment grounding connection with a copper wire of a cross section of at least 10 mm<sup>2</sup> (8 AWG) or additionally run a second equipment grounding conductor of the same cross section as the original equipment grounding conductor.

#### WARNING

**Lethal electric shock by live parts with more than 50 V!**

Exclusively operate the device

- with plugged on connectors (even if there haven't been any lines connected to the connectors) and
- with connected equipment grounding conductor!



### Equipment grounding conductor: Material and cross section

For the equipment grounding conductor, use the same metal (e.g. copper) as for the outer conductors.

For the connections from the equipment grounding conductor connection of the device to the equipment grounding conductor system in the control cabinet, make sure the cross sections of the lines are sufficient.


Cross sections of the equipment grounding connections:

For **HCS01** drive controllers, **at least 10 mm<sup>2</sup>**, but not smaller than the cross sections of the outer conductors of the mains supply feeder.

Additionally, mount the housing to a bare metal mounting plate. Connect the mounting plate, too, with at least the same cross section to the equipment grounding conductor system in the control cabinet.

### Installation

Connect the equipment grounding conductor of the mains or motor cable via thread **M5** to the housing of the device (identification mark ; tightening torque: **5 Nm**). The screws **M5×12** required for this purpose are part of the supplied accessory HAS09.

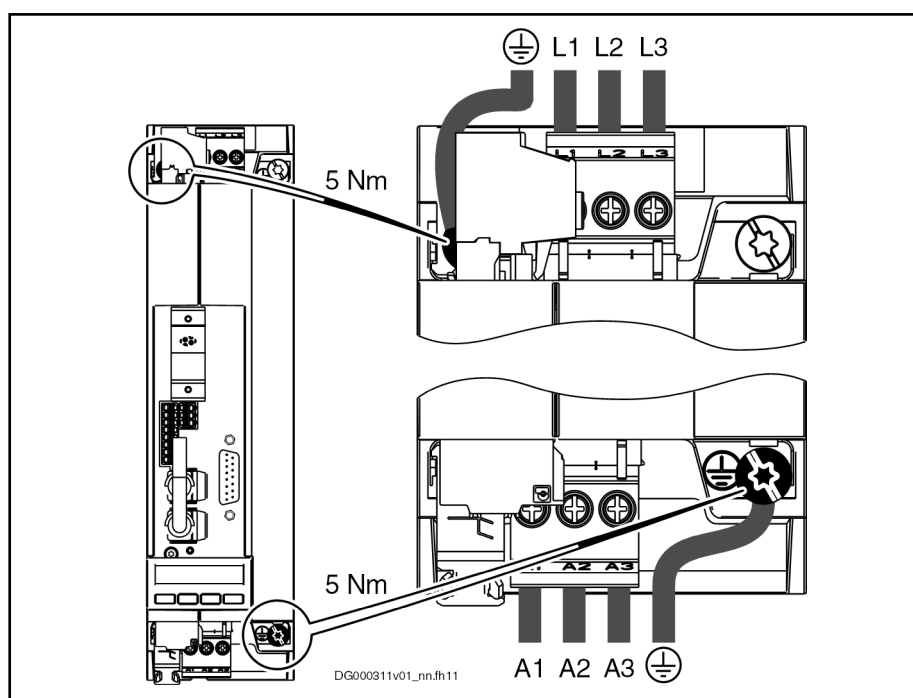

L1, L2, L3  
A1, A2, A3

Mains connection  
Motor connection

Fig. 6-5:

Connection Point of Equipment Grounding Conductor

## Mounting and Installation

## X3, Mains Connection

## Important Notes

**⚠ WARNING**

Lethal electric shock by live parts with more than 50 V!

Exclusively operate the device

- with plugged on connectors (even if there haven't been any lines connected to the connectors) and
- with connected equipment grounding conductor!

## Notes on Installation

- The **equipment grounding conductor is connected** directly to the device and not via the connection point X3 (see [chapter "Connection of Equipment Grounding Conductor" on page 112](#)).
- Dimension the **required cross section** of the connection cables according to the determined phase current  $I_{LN}$  and the mains fuse.
- **Single-phase mains connection** (outer conductor and neutral conductor): Connection to X3 can be made via L1, L2 or L3.


**NOTICE**

**Risk of damage to the device!**

Provide strain relief for the terminal connectors of the device in the control cabinet.


Mounting and Installation

**X3, Mains Connection HCS01.1E-W0003...W0013-x-02, -W0005-x-03, -W0008-x-03**

| View                                                                              | Identification | Function                                                         |      |
|-----------------------------------------------------------------------------------|----------------|------------------------------------------------------------------|------|
|  | L1             | Connection to supply mains (L1)                                  |      |
|                                                                                   | L2             | Connection to supply mains (L2)                                  |      |
|                                                                                   | L3             | Connection to supply mains (L3)                                  |      |
|                                                                                   |                |                                                                  |      |
| Terminal block                                                                    | Unit           | Min.                                                             | Max. |
| Connection cable                                                                  | mm²            | 0,25                                                             | 2,5  |
| Stranded wire                                                                     | AWG            | 24                                                               | 12   |
| Stripped length                                                                   | mm             | 8                                                                |      |
| Tightening torque                                                                 | Nm             | 0,5                                                              | 0,6  |
| Occurring current load and minimum required connection cross section              |                | See technical data of device used ( $I_{LN}$ and $A_{LN}$ )      |      |
| Occurring voltage load                                                            |                | See technical data of device used ( $U_{LN}$ or $U_{LN\_nenn}$ ) |      |

Tab.6-1: Function, Pin Assignment, Properties


**X3, Mains Connection HCS01.1E-W0018-x-02, -W0018-x-03, -W0028-x-03**

| View                                                                                | Identification | Function                                                         |      |
|-------------------------------------------------------------------------------------|----------------|------------------------------------------------------------------|------|
|  | L1             | Connection to supply mains (L1)                                  |      |
|                                                                                     | L2             | Connection to supply mains (L2)                                  |      |
|                                                                                     | L3             | Connection to supply mains (L3)                                  |      |
|                                                                                     |                |                                                                  |      |
| Terminal block                                                                      | Unit           | Min.                                                             | Max. |
| Connection cable                                                                    | mm²            | 0,25                                                             | 6,0  |
| Stranded wire                                                                       | AWG            | 24                                                               | 10   |
| Stripped length                                                                     | mm             | 10                                                               |      |
| Tightening torque                                                                   | Nm             | 0,5                                                              | 0,8  |
| Occurring current load and minimum required connection cross section                |                | See technical data of device used ( $I_{LN}$ and $A_{LN}$ )      |      |
| Occurring voltage load                                                              |                | See technical data of device used ( $U_{LN}$ or $U_{LN\_nenn}$ ) |      |

Tab.6-2: Function, Pin Assignment, Properties


Mounting and Installation

X3, Mains Connection HCS01.1E-W0054-x-03

| View                                                                              | Identification  | Function                                                                     |      |
|-----------------------------------------------------------------------------------|-----------------|------------------------------------------------------------------------------|------|
|  | L1              | Connection to supply mains (L1)                                              |      |
|                                                                                   | L2              | Connection to supply mains (L2)                                              |      |
|                                                                                   | L3              | Connection to supply mains (L3)                                              |      |
|                                                                                   |                 |                                                                              |      |
| Terminal block                                                                    | Unit            | Min.                                                                         | Max. |
| Connection cable                                                                  | mm <sup>2</sup> | 0,75                                                                         | 10,0 |
| Stranded wire                                                                     | AWG             | 18                                                                           | 8    |
| Stripped length                                                                   | mm              | 14                                                                           |      |
| Tightening torque                                                                 | Nm              | 1,5                                                                          | 1,7  |
| Occurring current load and minimum required connection cross section              |                 | See technical data of device used (I <sub>LN</sub> and A <sub>LN</sub> )     |      |
| Occurring voltage load                                                            |                 | See technical data of device used (U <sub>LN</sub> or U <sub>LN_nenn</sub> ) |      |

Tab.6-3:      Function, Pin Assignment, Properties

X4, Motor Encoder Connection

| View                                                                                                    | Identifica-<br>tion | Function                 |      |
|---------------------------------------------------------------------------------------------------------|---------------------|--------------------------|------|
| <br>DA000053v01_nn.FH9 | X4                  | Motor encoder connection |      |
| D-Sub, 15-pin, female                                                                                   | Unit                | Min.                     | Max. |
| Connection cable<br>Stranded wire                                                                       | mm <sup>2</sup>     | 0,25                     | 0,5  |
| Kind of encoder evaluation                                                                              |                     | EC                       |      |

Tab.6-4: Function, Properties

Technical Data [chapter 7.1.1 "EC - Standard Encoder Evaluation" on page 165](#)

|                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|---------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Supported Encoder Systems | Encoder systems with a supply voltage of <b>5 and 12 volt</b> : <ul style="list-style-type: none"><li>• MSM motor encoder</li><li>• MSK motor encoder</li><li>• Sin-cos encoder 1V<sub>pp</sub>; HIPERFACE®</li><li>• Sin-cos encoder 1V<sub>pp</sub>; EnDat 2.1; (EnDat 2.2 in preparation)</li><li>• Sin-cos encoder 1V<sub>pp</sub>; with reference track</li><li>• 5V-TTL square-wave encoder; with reference track</li><li>• SSI</li><li>• Combined encoder for SSI (combination of SSI and sin-cos encoder 1V<sub>pp</sub>)</li><li>• Resolver (resolvers are <b>not</b> supported if an optional "Safe Motion" safety technology is available at the same time.)</li><li>• Hall sensor box SHL02.1</li><li>• Digital Hall sensor in conjunction with Hall sensor adapter box SHL03.1</li></ul> |
|---------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

## Mounting and Installation

## Pin Assignment

| Connection        | Signal       | Function                                     |
|-------------------|--------------|----------------------------------------------|
| 1                 | GND_shld     | Connection signal shields (internal shields) |
| 2                 | A+           | Track A analog positive                      |
| 3                 | A-           | Track A analog negative                      |
| 4                 | GND_Encoder  | Reference potential power supplies           |
| 5                 | B+           | Track B analog positive                      |
| 6                 | B-           | Track B analog negative                      |
| 7                 | EncData+     | Data transmission positive                   |
|                   | A+TTL        | Track A TTL positive                         |
| 8                 | EncData-     | Data transmission negative                   |
|                   | A-TTL        | Track A TTL negative                         |
| 9                 | R+           | Reference track positive                     |
| 10                | R-           | Reference track negative                     |
| 11                | +12V         | Encoder supply 12V                           |
| 12                | +5V          | Encoder supply 5V                            |
| 13                | EncCLK+      | Clock positive                               |
|                   | B+TTL        | Track B TTL positive                         |
| 14                | EncCLK-      | Clock negative                               |
|                   | B-TTL        | Track B TTL negative                         |
| 15                | Sense-       | Return of reference potential (Sense line)   |
|                   | VCC_Resolver | Resolver supply                              |
| Connector housing |              | Overall shield                               |

Tab.6-5: Pin Assignment

## X5, Motor Connection

### Important Notes

#### **WARNING**

**Lethal electric shock by live parts with more than 50 V!**

Exclusively operate the device

- with plugged on connectors (even if there haven't been any lines connected to the connectors) and
- with connected equipment grounding conductor!

#### **NOTICE**

**Risk of damage to the device!**

Provide strain relief for the terminal connectors of the device in the control cabinet.

### Notes on Installation

The equipment grounding conductor is connected directly to the device and not via the connection point X5.

The indicated connection cross sections are the cross sections which can be connected. Dimension the **required cross section** of the connection lines according to the occurring current load.




- For optimum shield contact of the motor power cable, use the supplied accessory HAS09.
- For the connection between drive controller and motor, use our ready-made motor power cables, where possible.
- When using NFD03.1 mains filters, the maximum allowed conductor cross section is limited to 4 mm<sup>2</sup>.



## Mounting and Installation


## X5, Motor Connection HCS01.1E-W0003...W0013-x-02, -W0005-x-03, -W0008-x-03

| View                                                                              | Identification  | Function                                                                                                                                                                                                                |      |
|-----------------------------------------------------------------------------------|-----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|
|  | A1              | For power connection U1 at motor                                                                                                                                                                                        |      |
|                                                                                   | A2              | For power connection V1 at motor                                                                                                                                                                                        |      |
|                                                                                   | A3              | For power connection W1 at motor                                                                                                                                                                                        |      |
|                                                                                   |                 |                                                                                                                                                                                                                         |      |
| Screw connection at connector                                                     | Unit            | Min.                                                                                                                                                                                                                    | Max. |
| Connection cable                                                                  | mm <sup>2</sup> | 0,25                                                                                                                                                                                                                    | 2,5  |
| Stranded wire                                                                     | AWG             | 24                                                                                                                                                                                                                      | 12   |
| Stripped length                                                                   | mm              | 8                                                                                                                                                                                                                       |      |
| Tightening torque                                                                 | Nm              | 0,5                                                                                                                                                                                                                     | 0,6  |
| Occurring current load and minimum required connection cross section              | A               | See technical data of device used ( <i>I<sub>out</sub></i> )                                                                                                                                                            |      |
| Occurring voltage load                                                            | V               | See technical data of device used ( <i>U<sub>out</sub></i> )                                                                                                                                                            |      |
| Short circuit protection                                                          |                 | A1, A2, A3 against each other and each of them against ground                                                                                                                                                           |      |
| Connection of equipment grounding conductor                                       |                 | Via connection point of equipment grounding conductor <br>at device (see index entry "Connection → Equipment grounding conductor") |      |

Tab.6-6: Function, Pin Assignment, Properties

Mounting and Installation


**X5, Motor Connection HCS01.1E-W0018-x-02, -W0018-x-03, -W0028-x-03**

| View                                                                              | Identification  | Function                                                                                                                                              |      |
|-----------------------------------------------------------------------------------|-----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|------|
|  | A1              | For power connection U1 at motor                                                                                                                      |      |
|                                                                                   | A2              | For power connection V1 at motor                                                                                                                      |      |
|                                                                                   | A3              | For power connection W1 at motor                                                                                                                      |      |
|                                                                                   |                 |                                                                                                                                                       |      |
| Screw connection at connector                                                     | Unit            | Min.                                                                                                                                                  | Max. |
| Connection cable                                                                  | mm <sup>2</sup> | 0,25                                                                                                                                                  | 6,0  |
| Stranded wire                                                                     | AWG             | 24                                                                                                                                                    | 10   |
| Stripped length                                                                   | mm              | 10                                                                                                                                                    |      |
| Tightening torque                                                                 | Nm              | 0,5                                                                                                                                                   | 0,8  |
| Occurring current load and minimum required connection cross section              | A               | See technical data of device used ( $I_{out}$ )                                                                                                       |      |
| Occurring voltage load                                                            | V               | See technical data of device used ( $U_{out}$ )                                                                                                       |      |
| Short circuit protection                                                          |                 | A1, A2, A3 against each other and each of them against ground                                                                                         |      |
| Connection of equipment grounding conductor                                       |                 | Via connection point of equipment grounding conductor  at device |      |

Tab.6-7: Function, Pin Assignment, Properties

## Mounting and Installation

## X5, Motor Connection HCS01.1E-W0054-x-03

| View                                                                              | Identification  | Function                                                                                                                                              |      |
|-----------------------------------------------------------------------------------|-----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|------|
|  | A1              | For power connection U1 at motor                                                                                                                      |      |
|                                                                                   | A2              | For power connection V1 at motor                                                                                                                      |      |
|                                                                                   | A3              | For power connection W1 at motor                                                                                                                      |      |
|                                                                                   |                 |                                                                                                                                                       |      |
| Screw connection at connector                                                     | Unit            | Min.                                                                                                                                                  | Max. |
| Connection cable                                                                  | mm <sup>2</sup> | 0,75                                                                                                                                                  | 10,0 |
| Stranded wire                                                                     | AWG             | 18                                                                                                                                                    | 8    |
| Stripped length                                                                   | mm              | 14                                                                                                                                                    |      |
| Tightening torque                                                                 | Nm              | 1,5                                                                                                                                                   | 1,7  |
| Occurring current load and minimum required connection cross section              | A               | See technical data of device used ( <i>I<sub>out</sub></i> )                                                                                          |      |
| Occurring voltage load                                                            | V               | See technical data of device used ( <i>U<sub>out</sub></i> )                                                                                          |      |
| Short circuit protection                                                          |                 | A1, A2, A3 against each other and each of them against ground                                                                                         |      |
| Connection of equipment grounding conductor                                       |                 | Via connection point of equipment grounding conductor  at device |      |

Tab.6-8: Function, Pin Assignment, Properties

X6, Motor Temperature Monitoring and Motor Holding Brake

 **WARNING**

Dangerous movements! Danger to persons from falling or dropping axes!

The standard motor holding brake provided or an external motor holding brake controlled directly by the drive controller are not sufficient on their own to guarantee personal safety!

Personal safety must be achieved using higher-level, fail-safe measures:

- Block off danger zones with safety fences or safety guards
- Additionally secure vertical axes against falling or dropping after switching off the motor power by, for example,
  - mechanically securing the vertical axes
  - adding external braking/arrester/clamping mechanisms
  - ensuring sufficient equilibration of the vertical axes

 **WARNING**

Lethal electric shock by live parts with more than 50 V!

The input of the motor temperature evaluation is **not** galvanically isolated from the housing. If the voltage applied to the input is impermissibly high (e.g. because of a flashover of the motor winding voltage), this voltage may come into contact with the housing. Ensure that the temperature sensor of the connected motor has a **double** isolation against the motor winding.

**NOTICE**


Excessive voltage at the input of the motor temperature evaluation may cause damage to the device!

The voltage allowed at the input of the motor temperature evaluation must correspond to the allowed control voltage of the device. If the voltage applied to the input is impermissibly high, the device may be damaged.

- Function
- Connection point X6 contains the connections for
  - monitoring the motor temperature
  - controlling the motor holding brake



Via an integrated contact element (BR), the power section switches the voltage of the **external** 24-V supply to the output for controlling the motor holding brake.

| View                                                                                                                     | Conne-<br>ction | Signal name | Function                                       |
|--------------------------------------------------------------------------------------------------------------------------|-----------------|-------------|------------------------------------------------|
| <br><small>DG000286v01_en.tif</small> | 1               | MotTemp+    | Motor temperature evaluation input             |
|                                                                                                                          | 2               | MotTemp-    |                                                |
|                                                                                                                          | 3               | +24VBr      | Output for controlling the motor holding brake |
|                                                                                                                          | 4               | 0VBr        |                                                |

Mounting and Installation

| Spring terminal (connector)                                     | Unit | Min.                                                               | Max. |
|-----------------------------------------------------------------|------|--------------------------------------------------------------------|------|
| Connection cable<br>Stranded wire                               | mm²  | 0,25                                                               | 1,5  |
|                                                                 | AWG  | 24                                                                 | 16   |
| Stripped length                                                 | mm   | 10                                                                 |      |
| Current carrying capacity of outputs X6                         | A    | -                                                                  | 1,25 |
| Time constant of load                                           | ms   | -                                                                  | 50   |
| Number of switching operations at maximum time constant of load |      | Wear-free electronic contact                                       |      |
| Switching frequency                                             | Hz   | -                                                                  | 0,5  |
| Short circuit protection                                        |      | X6.3 against X6.4 (output for controlling the motor holding brake) |      |
| Overload protection                                             |      | X6.3 against X6.4 (output for controlling the motor holding brake) |      |

Tab.6-9:      Function, pin assignment

- Motor holding brake: selection

Maximum current carrying capacity of outputs X6: 1.25 A

$\Rightarrow R_{br (min)} = U_{br (max)} / 1.25 \text{ A}$

$R_{br (min)}$ : Minimum allowed resistance of the motor holding brake

$U_{br (max)}$ : Maximum supply voltage of the motor holding brake

If  $U_{br (max)} = 24 \text{ V} + 5\% = 25.2 \text{ V}$ , this results in:

$R_{br (min)} = 20.16 \text{ }\Omega$  (applicable to all operating and ambient conditions)
- Motor holding brake: installation instructions

Make sure the **power supply** for the motor holding brake at the motor is sufficient. You have to take into account that voltage drops on the supply line. Use connection lines with the highest possible cross section of the single strands.

Use an **external contact element in accordance with the required safety category**, if you wish to supply motor holding brakes with higher currents than the allowed current load at X6. Make sure to comply with the required minimum current consumption of 100 mA when using the external contact element. Otherwise, the brake current monitoring unit signals an error.

# Mounting and Installation

## Connection diagram

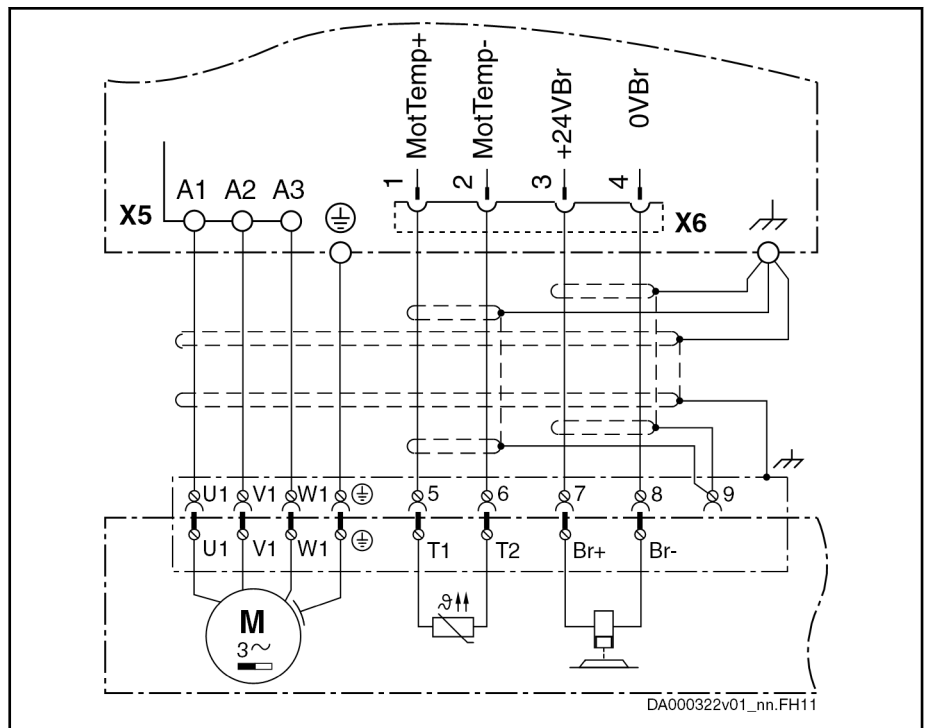


Fig. 6-6: Connection of motor temperature monitoring and motor holding brake

Mounting and Installation

X9, Integrated/External Braking Resistor

 **WARNING**

Lethal electric shock by live parts with more than 50 V!

- Exclusively operate the device
- with plugged on connectors (even if there haven't been any lines connected to the connectors) and
  - with connected equipment grounding conductor!

**Function** X9 is used to connect the integrated or external braking resistor **HLR**. By means of an internal switch, the braking resistor is connected to the DC bus.



**Parameterize** the **external braking resistor** by means of the firm-ware to protect the drive controller and the braking resistor against overload:

- P-0-0860, Converter configuration
- P-0-0858, Data of external braking resistor

Connection (HCS01.1E-W0003...  
W0028)

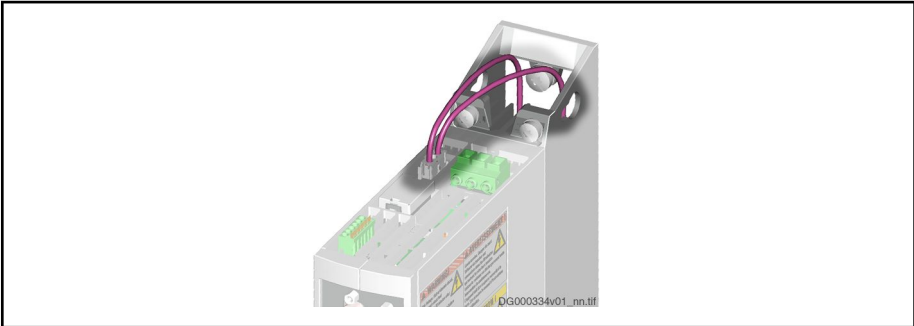


Fig.6-7: Connecting the Braking Resistor (HCS01.1E-W0003...W0028)

Connection (HCS01.1E-W0054)

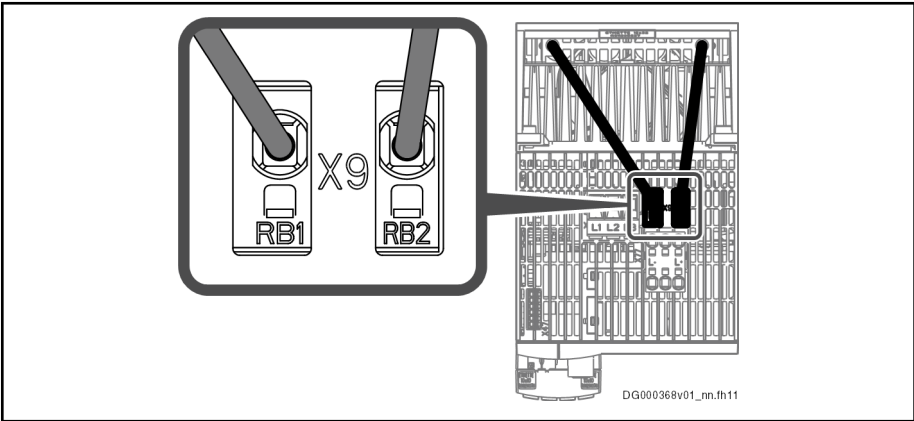


Fig.6-8: Connecting the Braking Resistor (HCS01.1E-W0054)

**Notes on Installation** Maximum allowed line length to external braking resistor: **5 m**  
**Twist** unshielded lines.

## Mounting and Installation

The accessory HAS05.1-015-NNN-NN (snap-on ferrite) ensures that Class C3 of the EMC Directive EN 61800-3 is complied with for braking resistors installed outside of the control cabinet.

The snap-on ferrite is designed for the following components:

- HCS01.1E-W0028 + HLR01.2N-01K0-N68R0-E-007
- HCS01.1E-W0054 + HLR01.2N-01K0-N28R0-E-007

### **WARNING**

**Lethal electric shock by live parts with more than 50 V!**

**Risk of burns by hot housing surfaces! Risk of fire!**

The temperature of the housing surface of an external HLR braking resistor can rise up to 150 °C. Run the connection lines with a sufficient distance (> 200 mm) to the housing of the HLR braking resistor to avoid damaging the insulation of the connection lines. Outside of the control cabinet, run the connection lines of an HLR braking resistor in a metal pipe with a wall thickness of at least 1 mm.

Do not touch hot housing surfaces! Mount the HLR braking resistor on a temperature-resistant mounting surface. Provide a sufficient distance between the HLR braking resistor and heat-sensitive materials. Make sure the cooling air supply is unrestricted. Take care that the environment can discharge the dissipation heat.

### **NOTICE**

**Danger by insufficient installation!**

Protect the lines with the appropriate fusing elements in the supply feeder.


For the connection lines at X9, use at least the cross section of the lines for mains connection at X3. If this is impossible, select the cross section of the connection line at X9 in accordance with the continuous power of the braking resistor.



Mounting and Installation

X13, 24V Supply (Control Voltage)

- Function, Pin Assignment
- The external 24V supply is applied via connection point X13 for
  - the control section and power section of the drive controller
  - brake control via X6
  - the digital inputs and the digital output to X31 / X32

| View                                                                              | Conne-<br>ction | Signal name                                                   | Function                             |
|-----------------------------------------------------------------------------------|-----------------|---------------------------------------------------------------|--------------------------------------|
|  | 1               | 0V                                                            | Reference potential for power supply |
|                                                                                   | 2               | 0V                                                            |                                      |
|                                                                                   | 3               | +24V                                                          | Power supply                         |
|                                                                                   | 4               | +24V                                                          |                                      |
|                                                                                   |                 |                                                               |                                      |
| Spring terminal (connector)                                                       | Unit            | Min.                                                          | Max.                                 |
| Connection cable                                                                  | mm <sup>2</sup> | 1,0                                                           | 2,5                                  |
| Stranded wire                                                                     | AWG             | 16                                                            | 12                                   |
| Stripped length                                                                   | mm              | 10                                                            |                                      |
| Power consumption                                                                 | W               | P <sub>N3</sub> (see data for control voltage)                |                                      |
| Voltage load capacity                                                             | V               | U <sub>N3</sub> (see data for control voltage)                |                                      |
| Current carrying capacity "looping through" from 0V to 0V, 24V to 24V             | A               | 10                                                            |                                      |
| Polarity reversal protection                                                      |                 | Within the allowed voltage range by internal protective diode |                                      |
| Insulation monitoring                                                             |                 | Possible                                                      |                                      |

Tab.6-10: Function, Pin Assignment, Properties

- Notes on Installation
- Requirements on the connection to the 24V supply:
  - Minimum cross section: 1 mm²
  - Maximum allowed inductance: 100 µH (2 twisted single strands, 75 m long)
  - Parallel line routing where possible
- Depending on the power consumption of the devices and the current carrying capacity of the connector X13, check via how many devices one line for 24V supply can be looped through. You might possibly have to connect another device directly to the 24V supply and then loop through the control voltage from this device to other devices.


X24 P2, X25 P1, Communication

Description

| Control section type | Function                                                                                                                                                                                                                                  |
|----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ECONOMY              | sercos III slave (S3)<br>Communication module for sercos III field bus systems                                                                                                                                                            |
| BASIC                | Multi-Ethernet (ET)<br>With the Multi-Ethernet communication module "ET", drive controllers can be integrated in different Ethernet field bus systems (e.g. sercos III, EtherCAT, EtherNet/IP or PROFINET).                               |
| ADVANCED             | <ul style="list-style-type: none"><li>sercos III master (CC)<br/>Is used as "master" for cross communication (CC = Cross Communication)</li><li>sercos III slave (S3)<br/>Communication module for sercos III field bus systems</li></ul> |

Tab.6-11: X24 P2, X25 P1, Communication

The connection point complies with IEEE 802.3 standard.

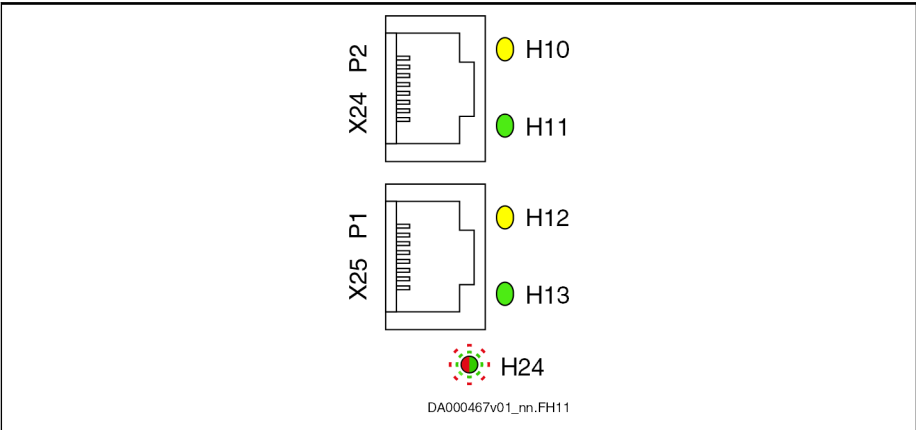


Tab.6-12: Connection Point

**P1, P2** P1 means "Port 1" and P2 means "Port 2". Thereby, the error counter of the firmware can be directly assigned to a Port.

- Connection**    *sercos III, EtherNet/IP, PROFINET:*
- Input: arbitrary
  - Output: arbitrary
- EtherCAT:*
- Input: X25 P1
  - Output: X24 P2

Mounting and Installation


| View                                                                                                   | Connection                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Signal name | Function                        |
|--------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|---------------------------------|
| <br>DA000041v01_nn.FH | 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | TD+         | Transmit, differential output A |
|                                                                                                        | 2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | TD-         | Transmit, differential output B |
|                                                                                                        | 3                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | RD+         | Receive, differential input A   |
|                                                                                                        | 4                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | n. c.       | -                               |
|                                                                                                        | 5                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | n. c.       | -                               |
|                                                                                                        | 6                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | RD-         | Receive, differential input B   |
|                                                                                                        | 7                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | n. c.       | -                               |
|                                                                                                        | 8                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | n. c.       | -                               |
|                                                                                                        | Housing                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |             | Shield connection               |
| Properties                                                                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |             |                                 |
| Standard                                                                                               | <ul style="list-style-type: none"><li>Ethernet</li><li>Type: RJ-45, 8-pin</li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |             |                                 |
| Compatibility                                                                                          | 100Base-TX according to IEEE 802.3u                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |             |                                 |
| Recommended cable type                                                                                 | <ul style="list-style-type: none"><li>According to <b>CAT5e</b>; type of shield ITP (Industrial Twisted Pair)</li><li>Ready-made cables which can be ordered:<ul style="list-style-type: none"><li><b>RKB0011</b><br/>Long cables (100 m at maximum) to connect the drive system to the higher-level control unit or remote communication nodes.<br/>Minimum bending radius:<ul style="list-style-type: none"><li>48.75 mm if laid flexibly</li><li>32.50 mm if laid permanently</li></ul>Order code for a 30 m long cable: RKB0011/030,0</li></ul></li><li><b>RKB0013</b><br/>Short cables to connect devices arranged side by side in the control cabinet.<br/>4 lengths available: 0.19 m; 0.25 m; 0.35 m; 0.55 m<br/>Order code for a 0.55 m long cable: RKB0013/00,55<br/>Minimum bending radius: 30.75 mm</li></ul> |             |                                 |

Tab.6-13:      Function, Pin Assignment, Properties

LEDs    [chapter 7.1.3 "ET - Multi-Ethernet" on page 190](#)

## X26, Engineering Interface

**Description** Exclusively available at HCS01.1E-W00\*\*-A-0\*-**A-CC** (ADVANCED).


| View                                                                                                       | Connection                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Signal name | Function                        |
|------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|---------------------------------|
|  <p>DA000041v01_nn.FH</p> | 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | TD+         | Transmit, differential output A |
|                                                                                                            | 2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | TD-         | Transmit, differential output B |
|                                                                                                            | 3                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | RD+         | Receive, differential input A   |
|                                                                                                            | 4                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | n. c.       | -                               |
|                                                                                                            | 5                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | n. c.       | -                               |
|                                                                                                            | 6                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | RD-         | Receive, differential input B   |
|                                                                                                            | 7                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | n. c.       | -                               |
|                                                                                                            | 8                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | n. c.       | -                               |
|                                                                                                            | Housing                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |             | Shield connection               |
| <b>Properties</b>                                                                                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |             |                                 |
| Standard                                                                                                   | <ul style="list-style-type: none"> <li>Ethernet</li> <li>Type: RJ-45, 8-pin</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |             |                                 |
| Compatibility                                                                                              | 100Base-TX according to IEEE 802.3u                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |             |                                 |
| Recommended cable type                                                                                     | <ul style="list-style-type: none"> <li>According to <b>CAT5e</b>; type of shield ITP (Industrial Twisted Pair)</li> <li>Ready-made cables which can be ordered: <ul style="list-style-type: none"> <li><b>RKB0011</b><br/>Long cables (100 m at maximum) to connect the drive system to the higher-level control unit or remote communication nodes.<br/>Minimum bending radius: <ul style="list-style-type: none"> <li>48.75 mm if laid flexibly</li> <li>32.50 mm if laid permanently</li> </ul> Order code for a 30 m long cable: RKB0011/030,0</li> <li><b>RKB0013</b><br/>Short cables to connect devices arranged side by side in the control cabinet.<br/>4 lengths available: 0.19 m; 0.25 m; 0.35 m; 0.55 m<br/>Order code for a 0.55 m long cable: RKB0013/00,55<br/>Minimum bending radius: 30.75 mm</li> </ul> </li> </ul> |             |                                 |

Tab.6-14: Function, Pin Assignment, Properties

**LEDs** [chapter 7.1.3 "ET - Multi-Ethernet" on page 190](#)

Mounting and Installation

X31, Digital Inputs, Digital Output

| View                                                                                                    | Connec-<br>tion | Signal<br>name | Function             | Default assignment                                 |
|---------------------------------------------------------------------------------------------------------|-----------------|----------------|----------------------|----------------------------------------------------|
| <br>DG000291v01_nn.tif | 1               | I_1            | Digital input        | Probe 1 <sup>1)</sup>                              |
|                                                                                                         | 2               | I_2            |                      | Probe 2 <sup>1)</sup>                              |
|                                                                                                         | 3               | I_3            |                      | E-Stop input <sup>2)</sup>                         |
|                                                                                                         | 4               | I_4            |                      | Travel range limit switch in-<br>put <sup>2)</sup> |
|                                                                                                         | 5               | I_5            |                      | Travel range limit switch in-<br>put <sup>2)</sup> |
|                                                                                                         | 6               | I_6            |                      | Not assigned <sup>2)</sup>                         |
|                                                                                                         | 7               | I_7            |                      | Not assigned <sup>2)</sup>                         |
|                                                                                                         | 8               | I/O_8          | Digital input/output | Not assigned                                       |
|                                                                                                         |                 |                |                      |                                                    |
| Spring terminal (connector)                                                                             | Unit            | Min.           | Max.                 |                                                    |
| Connection cable<br>Stranded wire                                                                       | mm <sup>2</sup> | 0,2            | 1,5                  |                                                    |
|                                                                                                         | AWG             | 24             | 16                   |                                                    |
| Stripped length                                                                                         | mm              | -              | 10                   |                                                    |
| Input current                                                                                           | A               | -              | 0,01                 |                                                    |
| Input voltage                                                                                           | V               | -              | 24                   |                                                    |
| Output current I/O_8                                                                                    | A               | -              | 0,5                  |                                                    |

1)  
2)

Digital Inputs Type B (Probe)  
Digital Inputs Type A (Standard)


Tab.6-15:Function, Pin Assignment, Properties



The **reference potential** for the digital inputs and the digital input/output is applied to **X13.1** and **X13.2**.

- Technical Data
- chapter "Digital Inputs Type A (Standard)" on page 196
  - chapter "Digital Inputs Type B (Probe)" on page 197
  - chapter "Digital Outputs (Standard)" on page 200

X32, Analog Input


| View                                                                              | Conne-<br>ction | Signal name | Function                                           |
|-----------------------------------------------------------------------------------|-----------------|-------------|----------------------------------------------------|
|  | 1               | GND         | GND reference<br>Connection for inner cable shield |
|                                                                                   | 2               | I_a_1-      | Analog input                                       |
|                                                                                   | 3               | I_a_1+      |                                                    |
|                                                                                   |                 |             |                                                    |
| Spring terminal (connector)                                                       | Unit            | Min.        | Max.                                               |
| Connection cable                                                                  | mm <sup>2</sup> | 0,2         | 1,5                                                |
| Stranded wire                                                                     | AWG             | 24          | 16                                                 |
| Stripped length                                                                   | mm              | 10          |                                                    |
| Input current                                                                     | A               | -           | 0,01                                               |
| Input voltage                                                                     | V               | -           | ±10                                                |

Tab.6-16: Function, Pin Assignment, Properties

- Technical Data
- chapter 7.1.8 "Analog Voltage Input" on page 204
  - chapter 7.1.9 "Analog Current Input" on page 205

Mounting and Installation

X47, Bb Relay Contact, Module Bus


| HCS01.1E-xxxx-x-02                                                                |                 |             |                                |
|-----------------------------------------------------------------------------------|-----------------|-------------|--------------------------------|
| View                                                                              | Conne-<br>ction | Signal name | Function                       |
|  | 1               | Rel1        | Bb relay contact <sup>1)</sup> |
|                                                                                   | 2               | Rel2        | Bb relay contact <sup>1)</sup> |
|                                                                                   |                 |             |                                |
| Spring terminal (connector)                                                       | Unit            | Min.        | Max.                           |
| Connection cable                                                                  | mm <sup>2</sup> | 0,2         | 1,5                            |
| Stranded wire                                                                     | AWG             | 24          | 16                             |
| Stripped length                                                                   | mm              | 10          |                                |
| Contact rating                                                                    | V               |             | 30                             |
|                                                                                   | A               | 0,01        | 1                              |

1)

Wire the Bb relay contact in the control circuit for mains connection (see [chapter "Control Circuit for the Mains Connection" on page 91](#)). When the contact opens, the mains contactor must interrupt the power supply.

Tab.6-17:      *Function, Pin Assignment, Properties*

Mounting and Installation

| HCS01.1E-xxxxx-x-03                                                               |                 |             |                                |
|-----------------------------------------------------------------------------------|-----------------|-------------|--------------------------------|
| View                                                                              | Conne-<br>ction | Signal name | Function                       |
|  | 1               | Rel1        | Bb relay contact <sup>1)</sup> |
|                                                                                   | 2               | Rel2        | Bb relay contact <sup>1)</sup> |
|                                                                                   | 3               | Mod1        | Module bus <sup>2)</sup>       |
|                                                                                   | 4               | Mod2        | Module bus <sup>2)</sup>       |
|                                                                                   | 5               | 0V_Mod      | Module bus GND <sup>2)</sup>   |
|                                                                                   | 6               | 0V_Mod      | Module bus GND <sup>2)</sup>   |
|                                                                                   |                 |             |                                |
| Spring terminal (connector)                                                       | Unit            | Min.        | Max.                           |
| Connection cable<br>Stranded wire                                                 | mm <sup>2</sup> | 0,2         | 1,5                            |
|                                                                                   | AWG             | 24          | 16                             |
| Stripped length                                                                   | mm              | 10          |                                |
| Contact rating                                                                    | V               |             | 30                             |
|                                                                                   | A               | 0,01        | 1                              |

- 1)

Wire the Bb relay contact in the control circuit for mains connection (see [chapter "Control Circuit for the Mains Connection" on page 91](#)). When the contact opens, the mains contactor must interrupt the power supply. When several devices assume the DC bus supply (group supply), connect the Bb relay contacts (X47) of all supplying devices in series.
- 2)

The pins 3, 4 and 5, 6 are jumpered. This allows looping through the module bus from one device to the next. Use **shielded lines** to loop through the module bus, when the length of all module bus connections is **greater than 3 m**.
- Tab.6-18:

Function, Pin Assignment, Properties

Technical Data [chapter "Relay Contact Type 2" on page 207](#)



## Mounting and Installation

## X77, L+ L-, DC Bus Connection

**⚠ WARNING**

**Lethal electric shock by live parts with more than 50 V!**

Before working on live parts: De-energize installation and secure power switch against unintentional or unauthorized re-energization.

Before accessing the device, wait at least **30 minutes** after switching off the supply voltages **to allow discharging**.

Check whether voltage has fallen below 50 V before touching live parts!

**Never operate the drive controller without touch guard or without DC bus connector.** Only remove the touch guard, if you want to use the DC bus connector at the drive controller. If you do not use the DC bus connector any longer, you have to cover the DC bus connection with the supplied touch guard.



Observe the information on DC bus coupling (see [chapter 4.6.4 "DC Bus Coupling" on page 92](#)).

**Function, Pin Assignment**

The DC bus connection connects


- several HCS01.1E-W00xx-x-03 to each other
- one drive controller to a DC bus capacitor unit (to backup the DC bus voltage)

**Touch Guard**

The DC bus connection has been provided with a touch guard at the factory. To plug the DC bus connector, you have to remove the touch guard.

## Mounting and Installation

### How to Remove the Touch Guard:

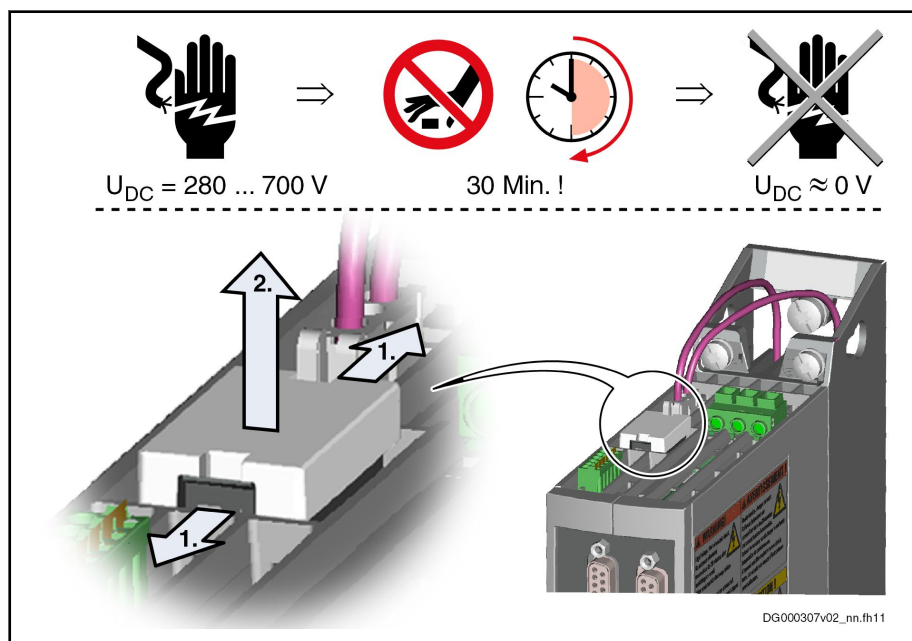

U<sub>DC</sub>

DC bus voltage

30 Min. !

Before accessing the device, wait at least 30 minutes after switching off the supply voltages to allow discharging.

1. With a small screwdriver (blade width < 3 mm), push the fixing device outwards and simultaneously lever out the touch guard.
2. Pull off touch guard.
3. Store the touch guard in a place where you can find it later on. If you want to operate the device without DC bus connector, you have to plug the touch guard on connection point X77 again.

Fig.6-9:

How to Remove the Touch Guard

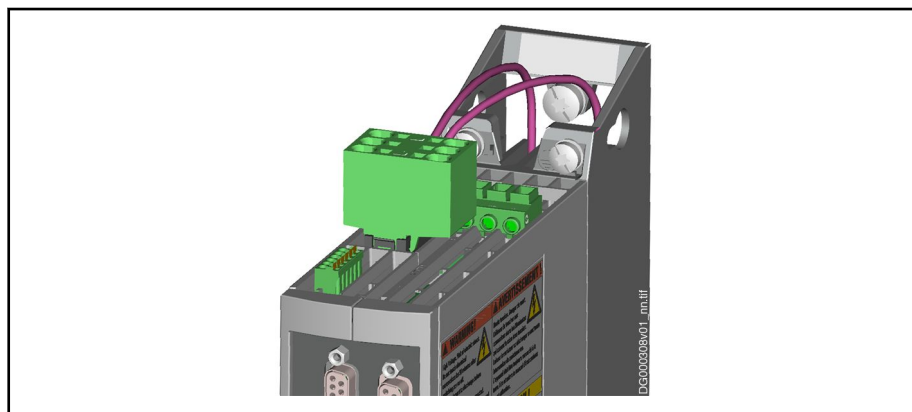



Fig.6-10:

DC bus connector at device

Mounting and Installation

| View                                                                                                    | Identifica-<br>tion | Function                                                                                                                                                                                                           |
|---------------------------------------------------------------------------------------------------------|---------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <br>DG000295v01 nn.tif | L-                  | Connection points for connecting DC bus connections of several devices<br><br>(The DC bus connector is available as an accessory; see <a href="#">chapter 8.2.2 "DC Bus Connector (RLS0778/K06)" on page 232</a> ) |
|                                                                                                         | L-                  |                                                                                                                                                                                                                    |
|                                                                                                         | n. c.               |                                                                                                                                                                                                                    |
|                                                                                                         | n. c.               |                                                                                                                                                                                                                    |
|                                                                                                         | L+                  |                                                                                                                                                                                                                    |
|                                                                                                         | L+                  |                                                                                                                                                                                                                    |
|                                                                                                         |                     |                                                                                                                                                                                                                    |
|                                                                                                         | Unit                |                                                                                                                                                                                                                    |
| Maximum connection cross section (stranded wire)                                                        | mm²                 | 6                                                                                                                                                                                                                  |
|                                                                                                         | AWG                 | 8                                                                                                                                                                                                                  |
| Stripped length                                                                                         | mm                  | 15                                                                                                                                                                                                                 |
| Short circuit protection                                                                                |                     | Via fusing elements connected in the incoming circuit to the mains connection                                                                                                                                      |
| Overload protection                                                                                     |                     | Via fusing elements connected in the incoming circuit to the mains connection                                                                                                                                      |
| Maximum <b>current carrying capacity "looping through"</b> from L+ to L+, L- to L-                      | A                   | 31                                                                                                                                                                                                                 |

Tab.6-19: Function, Pin Assignment, Properties

Notes on Installation

To wire the DC bus, use the shortest possible flexible, **twisted** wires.  
When the DC buses of several devices have been coupled, the lines **mustn't be run outside of the control cabinet**.

**NOTICE**


Risk of damage by reversing the polarity of the DC bus connections L- and L+

Make sure the polarity is correct.

|                                                     |                                                                 |
|-----------------------------------------------------|-----------------------------------------------------------------|
| Length of twisted wire                              | Max. 2 m                                                        |
| Line cross section                                  | Min. 6 mm², but not smaller than cross section of supply feeder |
| Line protection                                     | By means of fuses in the mains connection                       |
| Dielectric strength of single strand against ground | ≥ 750 V (e.g.: strand type – H07)                               |

Tab.6-20: DC Bus Line

Options for interconnecting the DC buses of several devices:

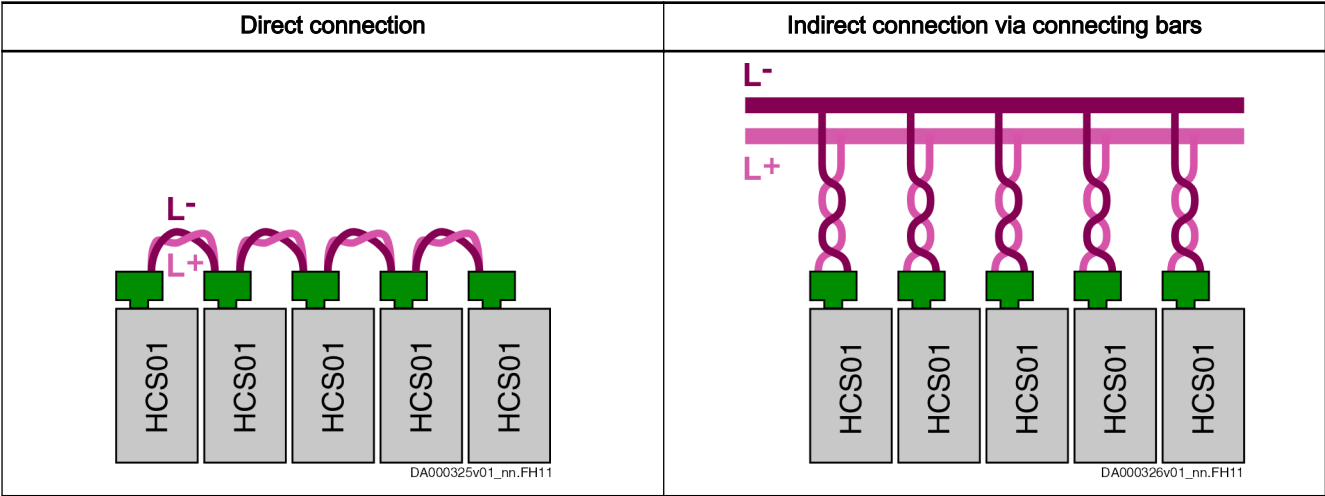


Tab.6-21: DC Bus Connection

Mounting and Installation

Shield Connection

Special plates are used for shield connection of cables which are connected to the device. The plates are part of the **HAS09** accessories and are screwed to the device.

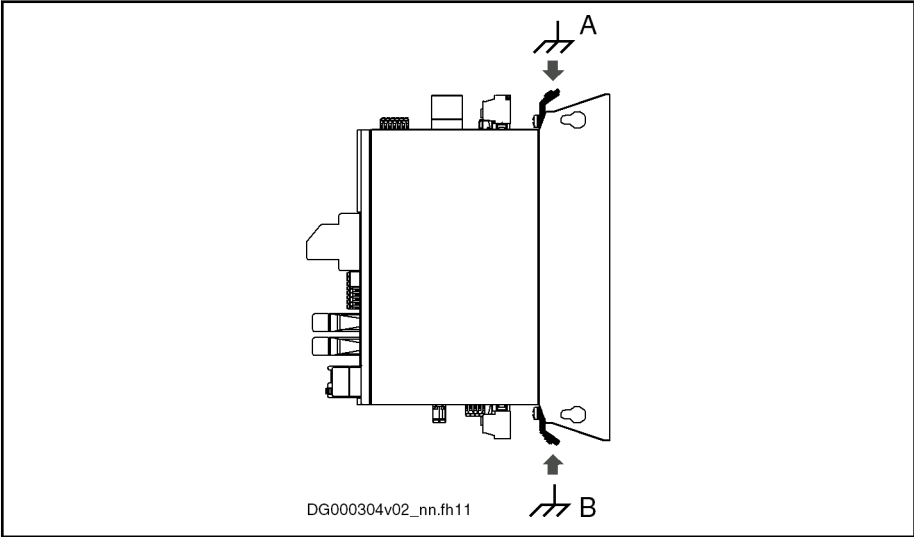


- A      Shield connection control lines
- B      Shield connection motor cable

Fig.6-11:      Shield Connection

 The shield connection mustn't be used for strain relief of the cables. Mount a separate strain relief near the drive controller.

Shield Connection Motor Cable

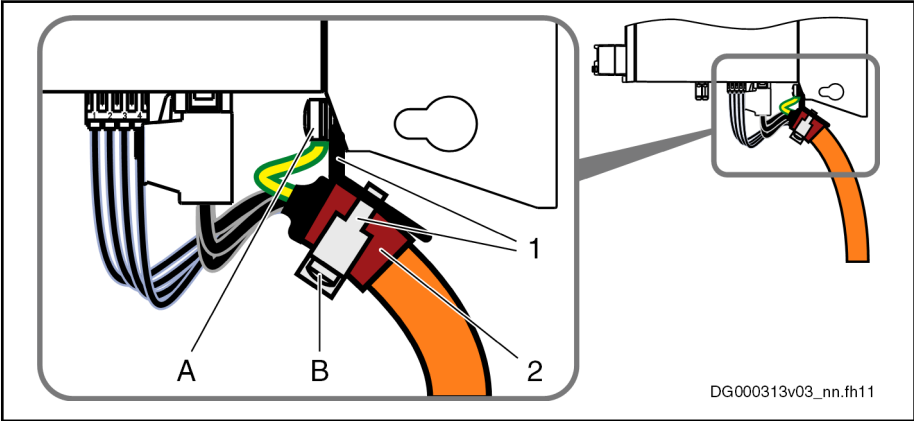

- 1      Plates
- 2      Shield of motor cable
- A      Screw (M5×12 or M5×16); tightening torque: 5 Nm
- B      Screw (M5×30); tightening torque: 1 Nm

Fig.6-12:      Shield Connection Motor Cable

Shield Connection Control Lines

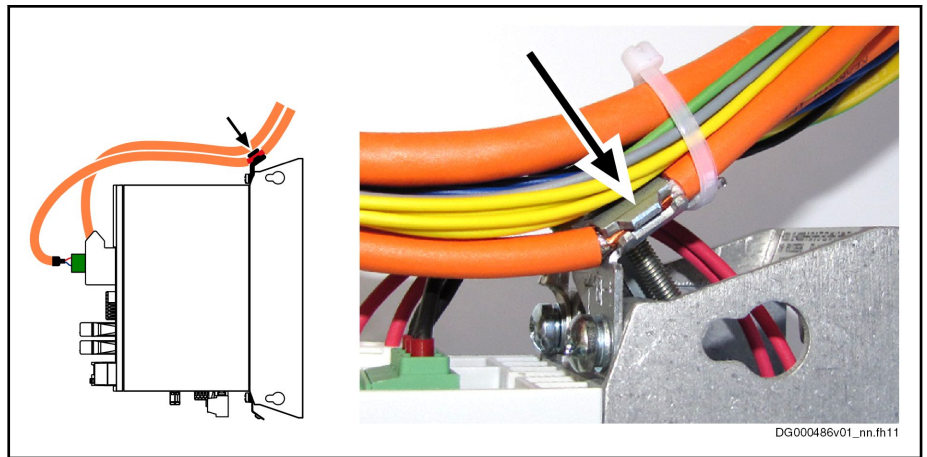


Fig. 6-13: Shield Connection of Shielded Lines at the Top of the Device

## Mounting and Installation

### Ground Connection

The ground connection of the housing is used to provide functional safety of the drive controllers and protection against contact in conjunction with the equipment grounding conductor.

Ground the housings of the drive controllers:

1. Connect the bare metal back panel of the drive controller in conductive form to the mounting surface in the control cabinet. To do this, use the supplied mounting screws.
2. Connect the mounting surface of the control cabinet in conductive form to the equipment grounding system.
3. For the ground connection, observe the maximum allowed ground resistance.

## 6.2.4 Optional Connection Points


### X8, Optional Encoder (Option EC)

You can connect an optional encoder to connection point X8.

Technical data: See description of connection point X4.

### X8, Encoder Emulation (Option EM)

**Description** Emulation of absolute value and incremental encoder signals for further evaluation by a control unit. The signals are galvanically isolated from the circuit board.

| View                                                                                                    | Identification  | Function          |             |
|---------------------------------------------------------------------------------------------------------|-----------------|-------------------|-------------|
| <br>DA000056v01_nn.FH9 | X8              | Encoder emulation |             |
| <b>D-Sub 15-pin, male</b>                                                                               | <b>Unit</b>     | <b>Min.</b>       | <b>Max.</b> |
| <b>Connection cable</b><br>Stranded wire                                                                | mm <sup>2</sup> | 0,25              | 0,5         |

Tab.6-22: Function, Pin Assignment, Properties

#### Emulated Encoder Systems

- Incremental encoder
- SSI encoder
- Incremental encoder with signal level converter

#### Pin Assignment

| Connection | Signal   | Level      | Input/Output | Function                       | Incremental encoder | SSI encoder | Incremental encoder with signal level converter |
|------------|----------|------------|--------------|--------------------------------|---------------------|-------------|-------------------------------------------------|
| 1          | n. c.    | -          | -            | Not assigned                   |                     |             |                                                 |
| 2          | UL       | 5 ... 30 V | In           | Power supply for output driver |                     |             | ✓                                               |
| 3          | SSI_CLK+ | RS422      | In           | SSI clock positive             |                     | ✓           |                                                 |
| 4          | SSI_CLK- | RS422      | In           | SSI clock negative             |                     | ✓           |                                                 |
| 5          | n. c.    | -          | -            | Not assigned                   |                     |             |                                                 |
| 6          | ULA0     | UL         | Out          | Reference track with UL level  |                     |             | ✓                                               |
| 7          | ULA1     | UL         | Out          | Track A1 with UL level         |                     |             | ✓                                               |




## Mounting and Installation

| Conne-<br>ction      | Signal    | Level | Input/<br>Output | Function                           | Incremen-<br>tal encod-<br>er | SSI en-<br>coder | Incremen-<br>tal encod-<br>er with<br>signal lev-<br>el convert-<br>er |
|----------------------|-----------|-------|------------------|------------------------------------|-------------------------------|------------------|------------------------------------------------------------------------|
| 8                    | ULA2      | UL    | Out              | Track A2 with UL level             |                               |                  | ✓                                                                      |
| 9                    | ULA0+     | RS422 | Out              | Reference track positive           | ✓                             |                  |                                                                        |
|                      | SSI_Data+ | RS422 | Out              | SSI data positive                  |                               | ✓                |                                                                        |
| 10                   | 0 V       | 0 V   | -                | Reference potential / inner shield | ✓                             | ✓                | ✓                                                                      |
| 11                   | ULA0-     | RS422 | Out              | Reference track negative           | ✓                             |                  |                                                                        |
|                      | SSI_Data- | RS422 | Out              | SSI data negative                  |                               | ✓                |                                                                        |
| 12                   | UA1+      | RS422 | Out              | Track A1 positive                  | ✓                             |                  |                                                                        |
| 13                   | UA1-      | RS422 | Out              | Track A1 negative                  | ✓                             |                  |                                                                        |
| 14                   | UA2+      | RS422 | Out              | Track A2 positive                  | ✓                             |                  |                                                                        |
| 15                   | UA2-      | RS422 | Out              | Track A2 negative                  | ✓                             |                  |                                                                        |
| Connector<br>housing | -         | -     | -                | Overall shield                     |                               |                  |                                                                        |

Tab.6-23: Pin Assignment

## X22 P2, X23 P1, Multi-Ethernet / sercos III (ET Option)

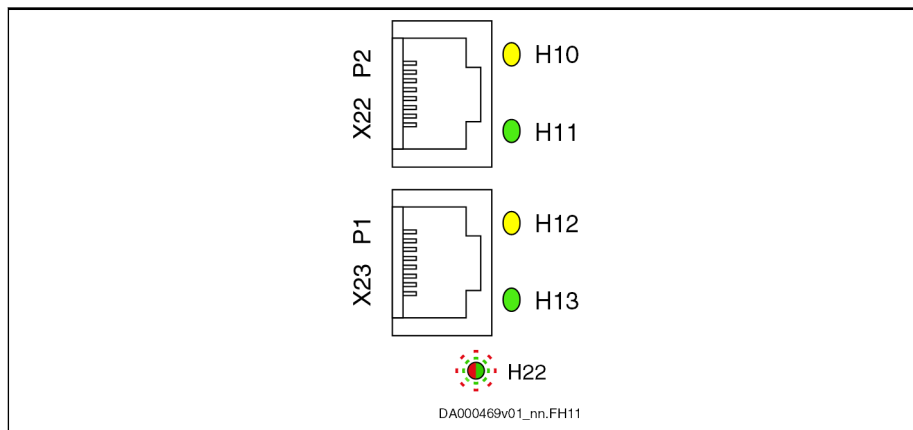

Tab.6-24: Connection Point

**Technical Data** [chapter "X24 P2, X25 P1, Communication" on page 129](#)

Mounting and Installation

X30, PROFIBUS PB

Description

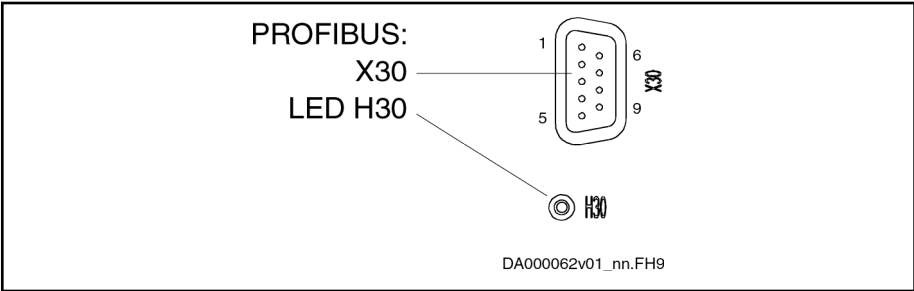



Fig.6-14: PROFIBUS Interface

| View                                                                                                        | Identification  | Function    |      |
|-------------------------------------------------------------------------------------------------------------|-----------------|-------------|------|
|  <p>DA000054v01_nn.FH9</p> | X30             | PROFIBUS PB |      |
|                                                                                                             |                 |             |      |
| D-Sub, 9-pin, female                                                                                        | Unit            | Min.        | Max. |
| Connection cable                                                                                            | mm <sup>2</sup> | 0,08        | 0,5  |
| Stranded wire                                                                                               |                 |             |      |

Tab.6-25: Function, Pin Assignment, Properties

Pin Assignment

| Pin | DIR | Signal | Function                       |
|-----|-----|--------|--------------------------------|
| 1   |     | -      | n. c.                          |
| 2   |     | -      | n. c.                          |
| 3   | I/O | RS485+ | Receive/transmit data-positive |
| 4   | O   | CNTR-P | Repeater control signal        |
| 5   |     | 0 V    | 0 V                            |
| 6   | O   | +5 V   | Repeater supply                |
| 7   |     | -      | n. c.                          |
| 8   | I/O | RS485- | Receive/transmit data-negative |
| 9   |     | 0V     | 0 V                            |

Tab.6-26: Signal Assignment

Shield Connection

Via D-sub mounting screws and metallized connector housing.

Compatibility of the Interface

According to DIN EN 50 170


Recommended Cable Type

According to DIN EN 50 170 - 2, cable type A

Bus Connectors

The PROFIBUS connectors each have a connectable terminating resistor. The terminating resistor must always be active at both the first and last bus node. Carry out the connection as shown in the figures below.

## Mounting and Installation

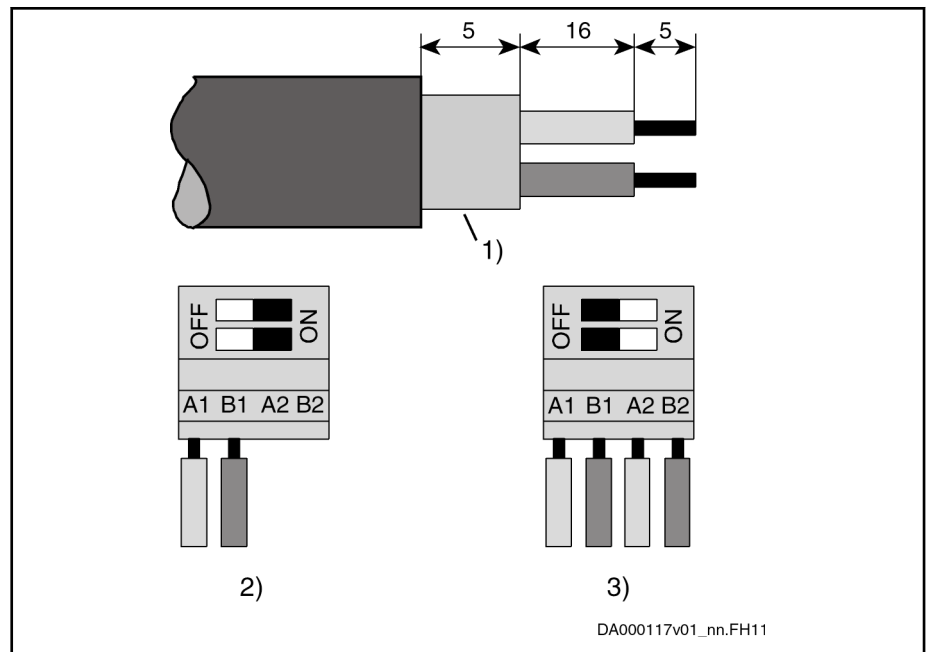

- 1) Shield  
2) Bus connection and switch position for first node and last node  
3) Bus connection and switch position for all other nodes

Fig. 6-15: Preparing a Cable for Connecting a Bus Connector


To assemble the bus cable, proceed as follows:

- Use cable according to DIN EN50170 / 2 edition 1996
- Strip cable (see figure above)
- Insert both cores into screw terminal block



Do not interchange the cores for A and B.


- Press cable sheath between both clamps
- Screw on both cores in screw terminals

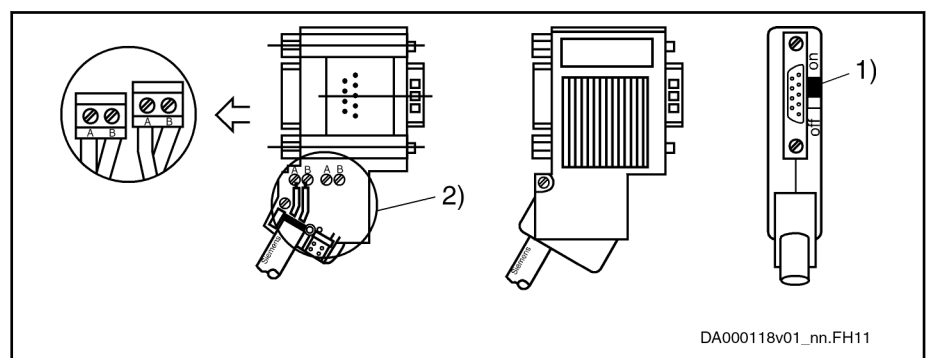


- 1) Switch position for first slave and last slave in PROFIBUS-DP  
2) Cable shield must have direct contact to metal

Fig. 6-16: Bus Connection for First and Last Slave, Bus Connector With 9-pin D-Sub Female Connector, INS0541


Mounting and Installation

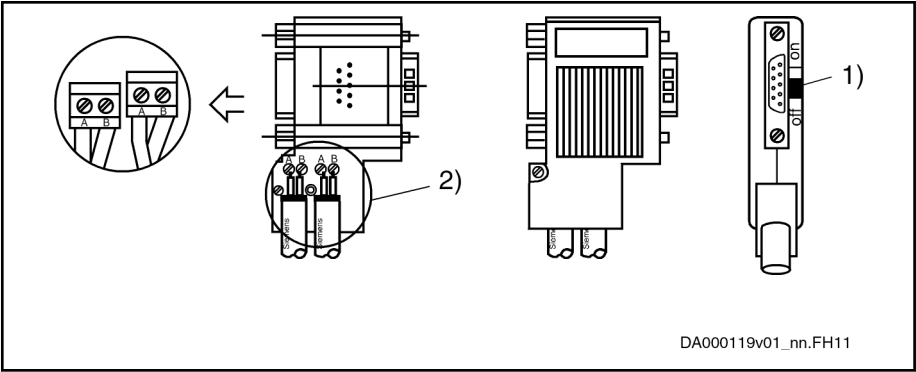

1) Terminating resistor is off  
2) Cable shield must have direct contact to metal  
*Fig.6-17: Bus Connection for all Other Slaves, Bus Connector With 9-pin D-Sub Female Connector, INS0541*

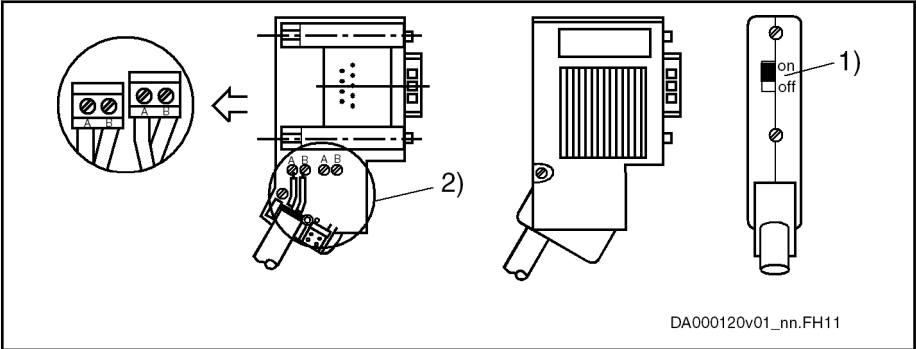


1) Switch position for first slave and last slave in PROFIBUS-DP  
2) Cable shield must have direct contact to metal  
*Fig.6-18: Bus Connection for First and Last Slave, Without 9-pin D-Sub Female Connector, INS0540*

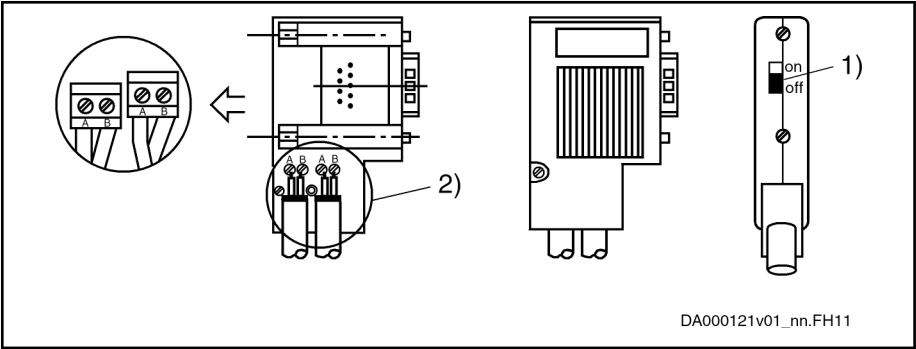

1) Terminating resistor is off  
2) Cable shield must have direct contact to metal  
*Fig.6-19: Bus Connection for all Other Slaves, Without 9-pin D-Sub Female Connector, INS0540*

Connect the drive controller to a control unit using a shielded two-wire line in accordance with DIN 19245/Part 1.

X37, Digital Inputs/Outputs (Option DA)


| View                                                                                                    | Conne-<br>ction | Signal name | Function                         | Conne-<br>ction | Signal name | Function             |
|---------------------------------------------------------------------------------------------------------|-----------------|-------------|----------------------------------|-----------------|-------------|----------------------|
| <br>DG000510v01_nn.tif | 1.1             | I_3         | Digital input                    | 2.1             | IO_1        | Digital input/output |
|                                                                                                         | 1.2             | I_4         |                                  | 2.2             | IO_2        |                      |
|                                                                                                         | 1.3             | I_5         |                                  | 2.3             | O_3         | Digital output       |
|                                                                                                         | 1.4             | I_6         |                                  | 2.4             | O_4         |                      |
|                                                                                                         | 1.5             | I_7         |                                  | 2.5             | O_5         |                      |
|                                                                                                         | 1.6             | I_8         |                                  | 2.6             | O_6         |                      |
|                                                                                                         | 1.7             | 24V_Ext     | Power supply (U <sub>ext</sub> ) | 2.7             | O_7         |                      |
|                                                                                                         | 1.8             | 0V_Ext      |                                  | 2.8             | O_8         |                      |
|                                                                                                         |                 |             |                                  |                 |             |                      |
| Spring terminal (con-<br>nector)                                                                        | Unit            | Min.        | Max.                             |                 |             |                      |
| Connection cable                                                                                        | mm <sup>2</sup> | 0,2         | 1,5                              |                 |             |                      |
| Stranded wire                                                                                           | AWG             | 24          | 16                               |                 |             |                      |
| Stripped length                                                                                         | mm              | -           | 10                               |                 |             |                      |

Tab.6-27: Function, Pin Assignment, Properties

- Technical Data
- chapter "Digital Inputs Type A (Standard)" on page 196
  - chapter "Digital Outputs (Standard)" on page 200

Mounting and Installation


X38, Analog Inputs/Outputs (Option DA)

| View                                                                             | Connec-<br>tion | Signal name        | Function                          | Connec-<br>tion | Signal name       | Function                         |
|----------------------------------------------------------------------------------|-----------------|--------------------|-----------------------------------|-----------------|-------------------|----------------------------------|
|  | 1.1             | GND_AnaEA          | GND reference                     | 2.1             | I_a_2+            | Analog input                     |
|                                                                                  | 1.2             | O_a_1              | Analog output                     | 2.2             | I_a_2-            |                                  |
|                                                                                  | 1.3             | GND_100_An<br>aOut | GND reference of<br>analog output | 2.3             | GND_100_An<br>aIn | GND reference of<br>analog input |
|                                                                                  | 1.4             | O_a_2              | Analog output                     | 2.4             | I_a_1+            | Analog input                     |
|                                                                                  | 1.5             | GND_AnaEA          | GND reference                     | 2.5             | I_a_1-            |                                  |
|                                                                                  |                 |                    |                                   |                 |                   |                                  |
| Spring terminal (con-<br>nector)                                                 | Unit            | Min.               | Max.                              |                 |                   |                                  |
| Connection cable<br>Stranded wire                                                | mm²             | 0,2                | 1,5                               |                 |                   |                                  |
|                                                                                  | AWG             | 24                 | 16                                |                 |                   |                                  |
| Stripped length                                                                  | mm              | -                  | 10                                |                 |                   |                                  |

Tab.6-28: Function, Pin Assignment, Properties

- Technical Data
- chapter 7.1.8 "Analog Voltage Input" on page 204
  - chapter 7.1.9 "Analog Current Input" on page 205
  - chapter 7.1.10 "Analog Output" on page 206

## X41, Safety Technology Safe Motion

| View                                                                              | Con-<br>nec-<br>tion | Signal name | Function                                     |
|-----------------------------------------------------------------------------------|----------------------|-------------|----------------------------------------------|
|  | 1.1                  | SI_Out_Ch2  | Safe output channel 2                        |
|                                                                                   | 1.2                  | 0V          | Power supply of inputs/outputs ( $U_{ext}$ ) |
|                                                                                   | 1.3                  | SI_Out_Ch1  | Safe output channel 1                        |
|                                                                                   | 2.1                  | SI_In_Ch2   | Input 2                                      |
|                                                                                   | 2.2                  | 24V         | Power supply of inputs/outputs ( $U_{ext}$ ) |
|                                                                                   | 2.3                  | SI_In_Ch1   | Input 1                                      |
|                                                                                   |                      |             |                                              |
| Spring terminal (connector)                                                       | Unit                 | Min.        | Max.                                         |
| Connection cable<br>Stranded wire                                                 | mm <sup>2</sup>      | 1           | 1,5                                          |
|                                                                                   | AWG                  | 16          | 16                                           |
| Stripped length                                                                   | mm                   | -           | 10                                           |
| Polarity reversal protection<br>for power supply                                  | -                    | Available   |                                              |
| Overvoltage protection                                                            | -                    | Available   |                                              |

Tab.6-29: X41, Safety Technology Safe Motion



**Technical Data** [chapter "Digital Inputs \(Safety Technology S Options\)" on page 199](#)  
[chapter "Digital Outputs \(Safety Technology S Options\)" on page 202](#)

**LEDs H25, H26** [chapter 7.1.6 "Sx - Safe Motion" on page 195](#)




Mounting and Installation

X42, X43, Safety Technology Safe Motion (Communication)

| View                                                                                                                                                                                                        | Identifica-<br>tion                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | Function                                                                                                                  |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------|
| <div>X42:<br/></div> <div>X43:<br/></div> | X42<br>X43                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Connection points for connecting the HSZ01 safety zone module and the safety zone users:<br><br>X42: Input<br>X43: Output |
| Connection cable                                                                                                                                                                                            | <ul style="list-style-type: none"><li>Maximum total length of <b>all</b> cables of a safety zone: <b>2,500 m</b></li><li>Maximum length of <b>one</b> cable between two connection points: <b>100 m</b></li><li>Number of safety zone users:<ul style="list-style-type: none"><li>Maximum: 26</li><li>Minimum: 2</li></ul></li><li>Ready-made cables which can be ordered:<ul style="list-style-type: none"><li><b>RKB0051</b><br/>Short cables to connect devices arranged side by side in the control cabinet.<br/>Available lengths: 0.19 m; 0.25 m; 0.35 m; 0.55 m<br/>Order code for a 0.55 m long cable: RKB0051/00,55</li><li><b>RKB0052</b><br/>Long cables to connect remote communication nodes, also outside of the control cabinet.<br/>Available lengths: 1 m; 2 m; 5 m<br/>Order code for a 5 m long cable: RKB0052/005,0</li></ul></li></ul> |                                                                                                                           |

Tab.6-30:     X42, X43

X49, Optional Safety Technology L3 or L4

| View                                                                                                                                                                                                  | Connec-<br>tion | Signal name | Function                         |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|-------------|----------------------------------|
| <div>SI_Ch2 1</div> <div>0V 2</div> <div>SI_Ch1 3</div> <div>+24V 4</div> <div>Dyn_Ch2 5</div> <div>Dyn_Ch1 6</div>  | 1               | SI_Ch2      | Input for selection of channel 2 |
|                                                                                                                                                                                                       | 2               | 0V          | Power supply of inputs/outputs   |
|                                                                                                                                                                                                       | 3               | SI_Ch1      | Input for selection of channel 1 |
|                                                                                                                                                                                                       | 4               | +24V        | Power supply of inputs/outputs   |
|                                                                                                                                                                                                       | 5               | Dyn_Ch2     | Dynamization output channel 2    |
|                                                                                                                                                                                                       | 6               | Dyn_Ch1     | Dynamization output channel 1    |
| Spring terminal (connector)                                                                                                                                                                           | Unit            | Min.        | Max.                             |
| Connection cable                                                                                                                                                                                      | mm <sup>2</sup> | 1           | 1,5                              |
| Stranded wire                                                                                                                                                                                         | AWG             | 16          | 16                               |
| Stripped length                                                                                                                                                                                       | mm              | -           | 8                                |

Tab.6-31: X49, Optional Safety Technology Safe Torque Off

- Technical Data
- chapter "Digital Inputs (Safety Technology L Options)" on page 198
  - chapter "Digital Outputs (Safety Technology L Options)" on page 201



When the dynamization outputs do not work, check the power supply connection. The polarity might possibly have been reversed.

Mounting and Installation

X61, CANopen (CN Option)

Description

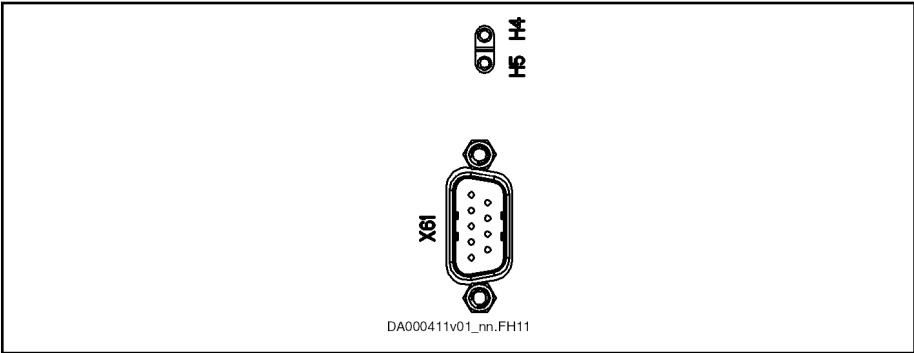


Fig.6-20:      CANopen

Connection Point

| Conne-<br>ction point | Type  | Num-<br>ber of<br>poles | Type of de-<br>sign | Stranded wire<br>[mm²] | Figure                     |
|-----------------------|-------|-------------------------|---------------------|------------------------|----------------------------|
| X61                   | D-Sub | 9                       | Pins on de-<br>vice | 0,25–0,5               | <p>DA000194v01_nn.FH11</p> |

Tab.6-32:      Connection point

Pin Assignment

| Pin | Signal       | Function                            |
|-----|--------------|-------------------------------------|
| 1   | n. c.        | -                                   |
| 2   | CAN-L        | Negated CAN signal (Dominant Low)   |
| 3   | CAN-GND      | Reference potential of CAN signals  |
| 4   | n. c.        | -                                   |
| 5   | Drain/Shield | Shield connection                   |
| 6   | GND          | Reference potential of device       |
| 7   | CAN-H        | Positive CAN signal (Dominant High) |
| 8   | n. c.        | -                                   |
| 9   | n. c.        | -                                   |

Tab.6-33:      Signal Assignment

Technical Data      [chapter 7.1.5 "CN - CANopen" on page 194](#)

## 6.2.5 EMC Measures for Design and Installation

### Rules for Design of Installations With Drive Controllers in Compliance With EMC

The following rules are the basics for designing and installing drives in compliance with EMC.

|                                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Mains filter</b>                      | Correctly use a mains filter recommended by Rexroth for radio interference suppression in the supply feeder of the drive system.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Control Cabinet Grounding</b>         | Connect all metal parts of the cabinet with one another over the largest possible surface area to establish a good electrical connection. This, too, applies to the mounting of the mains filter. If required, use serrated washers which cut through the paint surface. Connect the cabinet door to the control cabinet using the shortest possible grounding straps.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Line Routing</b>                      | <p>Avoid coupling routes between lines with high potential of noise and noise-free lines; therefore, signal, mains and motor lines and power cables have to be routed separately from another. Minimum distance: 10 cm. Provide separating sheets between power and signal lines. Ground separating sheets several times.</p> <p>The lines with high potential of noise include:</p> <ul style="list-style-type: none"> <li>• Lines at the mains connection (incl. synchronization connection)</li> <li>• Lines at the motor connection</li> <li>• Lines at the DC bus connection</li> </ul> <p>Generally, interference injections are reduced by routing cables close to grounded sheet steel plates. For this reason, cables and wires should not be routed freely in the cabinet, but close to the cabinet housing or mounting panels. Separate the incoming and outgoing cables of the radio interference suppression filter.</p> |
| <b>Interference Suppression Elements</b> | <p>Provide the following components in the control cabinet with interference suppression combinations:</p> <ul style="list-style-type: none"> <li>• Contactors</li> <li>• Relays</li> <li>• Solenoid valves</li> <li>• Electromechanical operating hours counters</li> </ul> <p>Connect these combinations directly at each coil.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| <b>Twisted Wires</b>                     | Twist unshielded wires belonging to the same circuit (feeder and return cable) or keep the surface between feeder and return cable as small as possible. Wires that are not used have to be grounded at both ends.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Lines of Measuring Systems</b>        | Lines of measuring systems must be shielded. Connect the shield to ground at both ends and over the largest possible surface area. The shield may not be interrupted, e.g. using intermediate terminals.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Digital Signal Lines</b>              | Ground the shields of digital signal lines at both ends (transmitter <b>and</b> receiver) over the largest possible surface area and with low impedance. In the case of bad ground connection between transmitter and receiver, additionally route a bonding conductor (min. 10 mm <sup>2</sup> ). Braided shields are better than foil shields.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Analog Signal Lines</b>               | Ground the shields of analog signal lines at one end (transmitter <b>or</b> receiver) over the largest possible surface area and with low impedance. This avoids low-frequency interference current (in the mains frequency range) on the shield.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Connecting the Mains Choke</b>        | Keep connection lines of the mains choke at the drive controller as short as possible and twist them.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |

## Mounting and Installation

- Installing the Motor Power Cable**
- Use shielded motor power cables or run motor power cables in a shielded duct
  - Use the shortest possible motor power cables
  - Ground shield of motor power cable at both ends over the largest possible surface area to establish a good electrical connection
  - Run motor lines in shielded form inside the control cabinet
  - Do not use any steel-shielded lines
  - The shield of the motor power cable mustn't be interrupted by mounted components, such as output chokes, sine filters or motor filters

## EMC-Optimal Installation in Facility and Control Cabinet

### General Information

For EMC-optimal installation, a spatial separation of the interference-free area (mains connection) and the interference-susceptible area (drive components) is recommended, as shown in the figures below.



Recommendation: For EMC-optimal installation in the control cabinet, use a separate control cabinet panel for the drive components.

### Division Into Areas (Zones)

Exemplary arrangements in the control cabinet: See section [Control Cabinet Design According to Interference Areas - Exemplary Arrangements, page 157](#).

We distinguish three areas:

#### 1. Interference-free area of control cabinet (**area A**):

This includes:

- Supply feeder, input terminals, fuse, main switch, mains side of mains filter for drives and corresponding connecting lines
- Control voltage or auxiliary voltage connection with power supply unit, fuse and other parts unless connection is run via the mains filter of the AC drives
- All components that are not electrically connected with the drive system

#### 2. Interference-susceptible area (**area B**):

- Mains connections between drive system and mains filter for drives, mains contactor
- Interface lines of drive controller

#### 3. Strongly interference-susceptible area (**area C**):

- Motor power cables including single cores

Never run lines of one of these areas in parallel with lines of another area so that there isn't any unwanted interference injection from one area to the other and that the filter is jumpered with regard to high frequency. Use the shortest possible connecting lines.

Recommendation for complex systems: Install drive components in one cabinet and the control units in a second, separate cabinet.

Badly grounded control cabinet doors act as antennas. Therefore, connect the control cabinet doors to the cabinet on top, in the middle and on the bot-

## Mounting and Installation

tom via short equipment grounding conductors with a cross section of at least 6 mm<sup>2</sup> or, even better, via grounding straps with the same cross section. Make sure connection points have good contact.

### Control Cabinet Design According to Interference Areas - Exemplary Arrangements




#### **Do not operate any additional loads at the mains filter!**

Do not operate any other loads at the connection from the mains filter output to the mains connection of the supply unit.

For motor fans and power supply units, for example, use separate mains filters.

Mounting and Installation

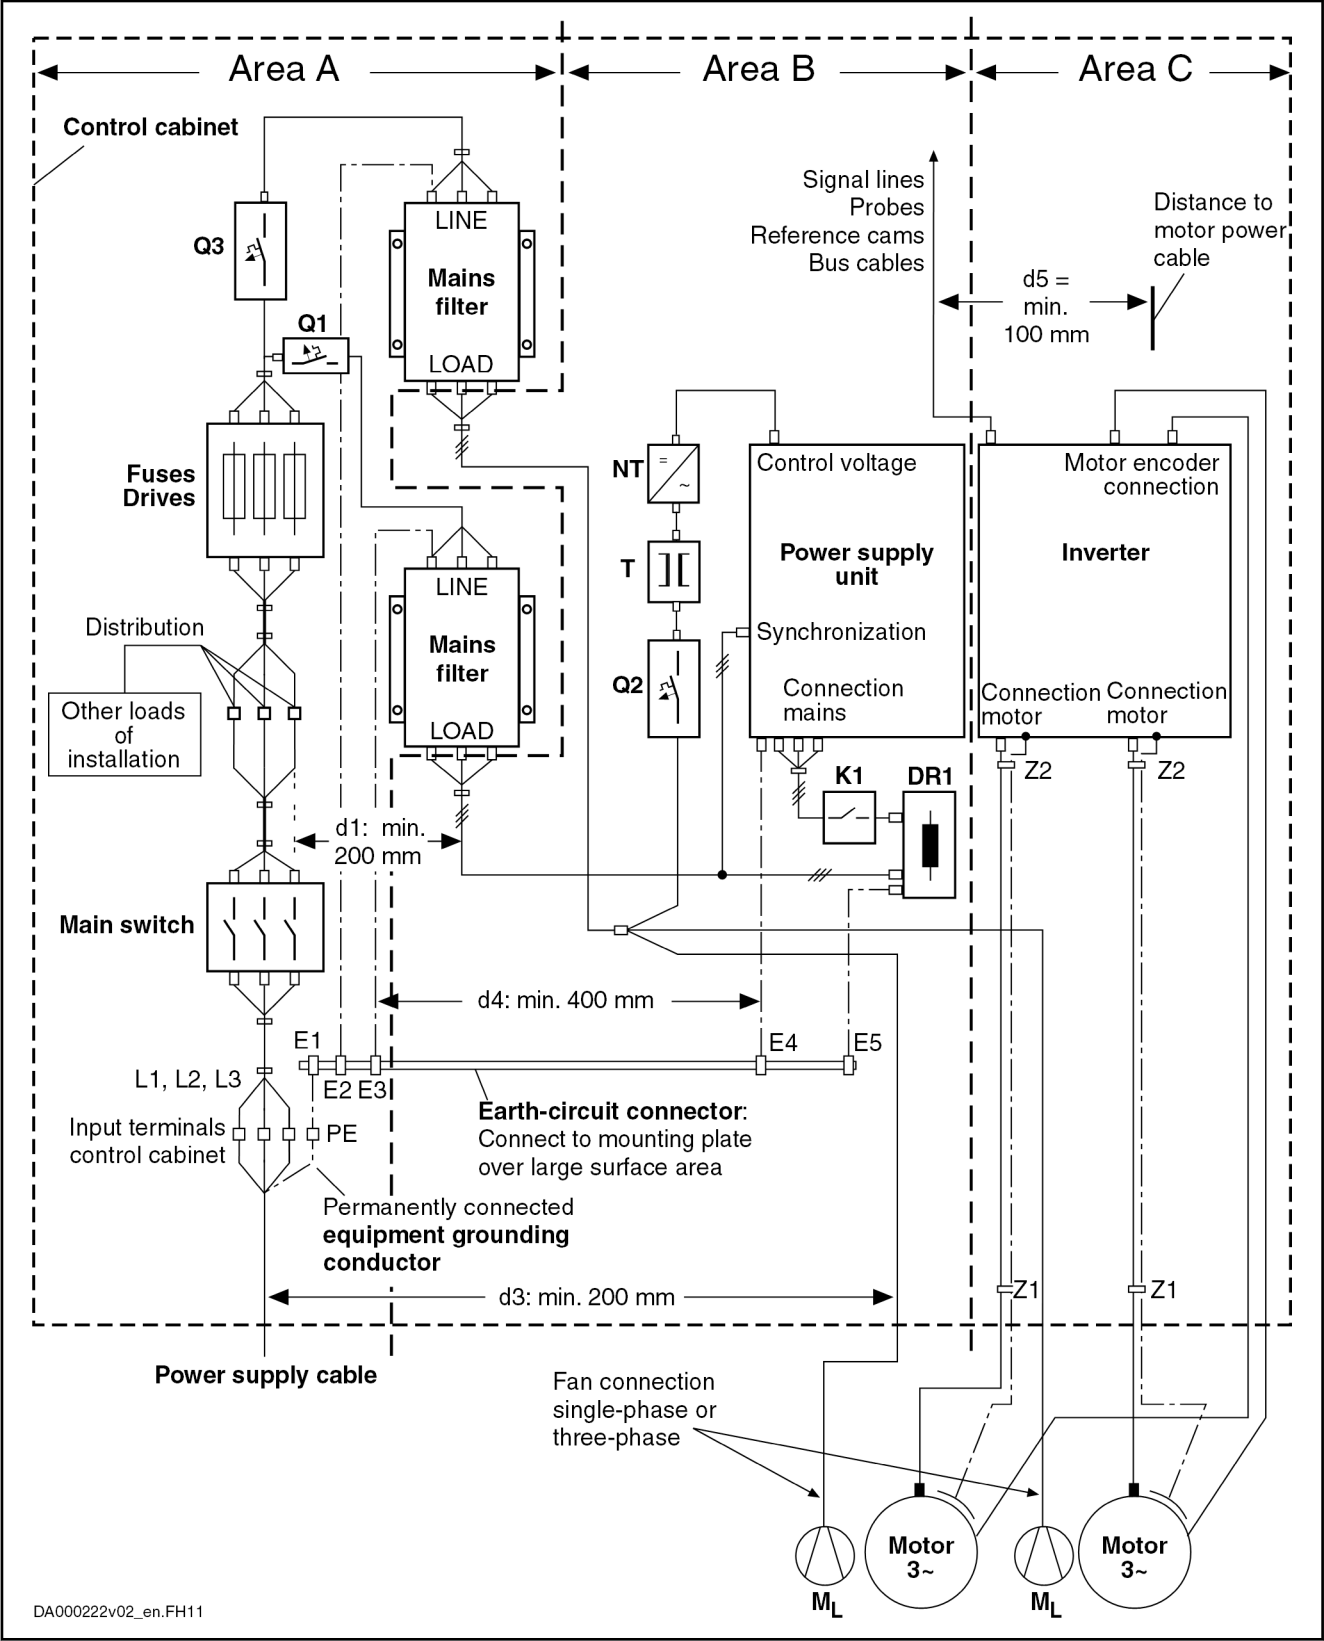

DA000222v02\_en.FH11

|                |                                     |
|----------------|-------------------------------------|
| M <sub>L</sub> | Motor fan                           |
| NT             | Power supply unit                   |
| Q1, Q2, Q3     | Fusing                              |
| T              | Transformer                         |
| Z1, Z2         | Shield connection points for cables |
| Fig. 6-21:     | EMC Areas in the Control Cabinet    |

### Design and Installation in Area A - Interference-Free Area of Control Cabinet

#### Arranging the Components in the Control Cabinet

Comply with recommended distance of at least **200 mm** (distance d1 in the figure):

- Between components and electrical elements (switches, pushbuttons, fuses, terminal connectors) in the interference-free area A and the components in the two other areas B and C

Comply with recommended distance of at least **400 mm** (distance d4 in the figure):

- Between magnetic components (such as transformers, mains chokes and DC bus chokes that are directly connected to the power connections of the drive system) and the interference-free components and lines between mains and filter including the mains filter in area A

If these distances are not kept, the magnetic leakage fields are injected to the interference-free components and lines connected to the mains and the limit values at the mains connection are exceeded in spite of the installed filter.

#### Cable Routing of the Interference-Free Lines to the Mains Connection

Comply with recommended distance of at least **200 mm** (distance d1 and d3 in the figure):

- Between supply feeder or lines between filter and exit point from the control cabinet in area A and the lines in area B and C

If this is impossible, there are two alternatives:

1. Install lines in shielded form and connect the shield at several points (at least at the beginning and at the end of the line) to the mounting plate or the control cabinet housing over a large surface area.
2. Separate lines from the other interference-susceptible lines in areas B and C by means of a grounded distance plate vertically attached to the mounting plate.

Install the shortest possible lines within the control cabinet and install them directly on the grounded metal surface of the mounting plate or of the control cabinet housing.

Mains supply lines from areas B and C must not be connected to the mains without a filter.



In case you do not observe the information on cable routing given in this section, the effect of the mains filter is totally or partly neutralized. This will cause the noise level of the interference emission to be higher within the range of 150 kHz to 40 MHz and the limit values at the connection points of the machine or installation will thereby be exceeded. Consider the specified distances to be recommended data, provided that the dimensions of the control cabinet allow installing the lines accordingly.

#### Routing and Connecting a Neutral Conductor (N)

If a neutral conductor is used together with a three-phase connection, it must not be installed unfiltered in zones B and C, in order to keep interference off the mains.



## Mounting and Installation

## Motor Fan at Mains Filter

Single-phase or three-phase supply lines of motor fans, that are usually routed in parallel with motor power cables or interference-susceptible lines, must be filtered:

- In drive systems with **regenerative supply units**, via a separate single-phase (NFE type) or three-phase filter (HNF type) near the mains connection of the control cabinet
- In drive systems with **only infeeding supply units**, via the available three-phase filter of the drive system

When switching power off, make sure the fan is not switched off.

When switching power off, make sure the fan is not switched off.

## Loads at Mains Filter of Drive System



### Only operate allowed loads at the mains filter of the drive system!

At the three-phase filter for the power connection of regenerative supply units, it is only allowed to operate the following loads:

- HMV supply unit with mains choke and, if necessary, mains contactor

Do not operate any motor fans, power supply units etc. at the mains filter of the drive system.

## Shielding Mains Supply Lines in Control Cabinet

If there is a high degree of interference injection to the mains supply line within the control cabinet, although you have observed the above instructions (to be found out by EMC measurement according to standard), proceed as follows:

- Only use shielded lines in area A
- Connect shields to the mounting plate at the beginning and the end of the line by means of clips

The same procedure may be required for long cables of more than 2 m between the point of power supply connection of the control cabinet and the filter within the control cabinet.

## Mains Filters for AC Drives

Ideally mount the mains filter on the parting line between the areas A and B. Make sure the ground connection between filter housing and housing of the drive controllers has good electrically conductive properties.

If **single-phase** loads are connected on the load side of the filter, their current may be a maximum of 10% of the three-phase operating current. A highly imbalanced load of the filter would deteriorate its interference suppression capacity.

If the mains voltage is more than 480 V, connect the filter to the output side of the transformer and not to the supply side of the transformer.

## Grounding

In the case of bad ground connections in the installation, the distance between the lines to the grounding points E1, E2 in area A and the other grounding points of the drive system should be at least  $d_4 = 400 \text{ mm}$ , in order to minimize interference injection from ground and ground cables to the power input lines.

See also [Division Into Areas \(Zones\)](#), page 156.

## Point of Connection for Equipment Grounding Conductor at Machine, Installation, Control Cabinet

The equipment grounding conductor of the power cable of the machine, installation or control cabinet has to be **permanently connected** at point PE and have a **cross section of at least  $10 \text{ mm}^2$**  or to be complemented by a second equipment grounding conductor via separate terminal connectors (according to EN 61800-5-1:2007, section 4.3.5.5.2). If the cross section of the outer conductor is bigger, the cross section of the equipment grounding conductor must be accordingly bigger.

## Design and Installation in Area B - Interference-Susceptible Area of Control Cabinet

### Arranging Components and Lines

Modules, components and lines in area B should be placed at a distance of at least **d1 = 200 mm** from modules and lines in area A.

Alternative: Shield modules, components and lines in area B by distance plates mounted vertically on the mounting plate from modules and lines in area A or use shielded lines.

Only connect power supply units for auxiliary or control voltage connections in the drive system to the mains via a mains filter. See [Division Into Areas \(Zones\)](#), page 156.

Install the shortest possible lines between drive controller and filter.

### Control Voltage or Auxiliary Voltage Connection

Only in exceptional cases should you connect power supply unit and fusing for the control voltage connection to phase and neutral conductor. In this case, mount and install these components in area A far away from the areas B and C of the drive system. For details see section [Design and Installation in Area A - Interference-Free Area of Control Cabinet](#), page 159.

Run the connection between control voltage connection of the drive system and power supply unit used through area B over the shortest distance.

### Line Routing

Run the lines along grounded metal surfaces, in order to minimize radiation of interference fields to area A (transmitting antenna effect).

## Design and Installation in Area C - Strongly Interference-Susceptible Area of Control Cabinet

Area C mainly concerns the motor power cables, especially at the connection point at the drive controller.

### Influence of the Motor Power Cable

The longer the motor power cable, the greater its leakage capacitance. To comply with a certain EMC limit value, the allowed leakage capacitance of the mains filter is limited. For the calculation of the leakage capacitance, see the documentation on the drive system of the drive controller used.



- Run the shortest possible motor power cables.
- Only use **shielded** motor power cables by Rexroth.

### Routing the Motor Power Cables and Motor Encoder Cables

Route the motor power cables and motor encoder cables along grounded metal surfaces, both inside the control cabinet and outside of it, in order to minimize radiation of interference fields. If possible, route the motor power cables and motor encoder cables in metal-grounded cable ducts.

Route the motor power cables and motor encoder cables

- with a distance of at least **d5 = 100 mm** to interference-free lines, as well as to signal cables and signal lines  
(alternatively separated by a grounded distance plate)
- in separate cable ducts, if possible



### Routing the Motor Power Cables and Mains Connection Lines

For converters (drive controllers with individual mains connection), route motor power cables and (unfiltered) mains connection lines **in parallel for a maximum distance of 300 mm**. After that distance, route motor power cables and power supply cables in opposite directions and preferably in separate **cable ducts**.

Ideally, the outlet of the motor power cables at the control cabinet should be provided in a distance of at least **d3 = 200 mm** from the (filtered) power supply cable.

Mounting and Installation

Converter - Routing the Motor Power Cables
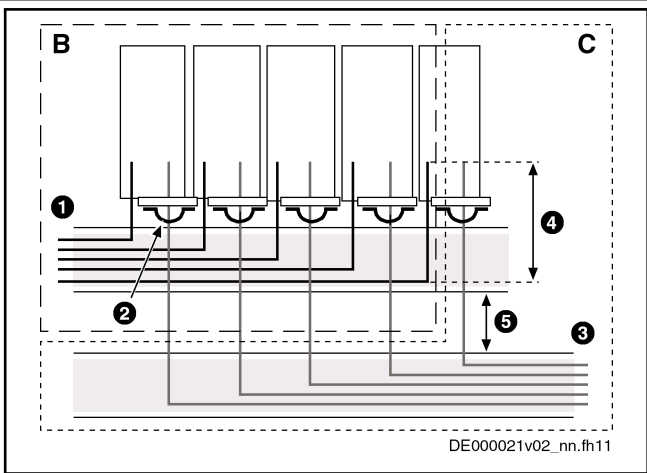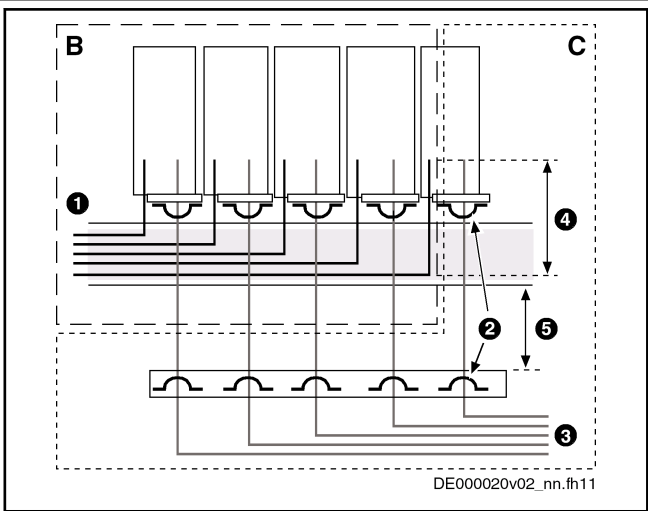
| With cable duct                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Without cable duct                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <div><p>DE000021v02_nn.fh11</p></div> <div><p>B      Area B<br/>C      Area C<br/>1      Cable duct for mains connection lines<br/>2      Shield connection of motor power cable via clips at least at one point; alternatively, at the device or on mounting plate at control cabinet<br/>3      Cable duct for motor power cables<br/>4      Parallel routing of mains connection lines and motor power cables over a maximum of 300 mm<br/>5      Distance of at least 100 mm or separated by a grounded distance plate</p><p><i>Fig. 6-22: Routing of Motor Power Cables With Cable Duct</i></p></div> | <div><p>DE000020v02_nn.fh11</p></div> <div><p>B      Area B<br/>C      Area C<br/>1      Cable duct for mains connection lines<br/>2      Shield connection of motor power cable via clips at least at one point; alternatively, at the device or on mounting plate at control cabinet<br/>3      Control cabinet outlet of motor power cables<br/>4      Parallel routing of mains connection lines and motor power cables over a maximum of 300 mm<br/>5      Distance of at least 100 mm or separated by a grounded distance plate</p><p><i>Fig. 6-23: Routing of Motor Power Cables Without Cable Duct</i></p></div> |

Tab. 6-34:      Routing of Cables for Converter

Ground Connections

Housing and Mounting Plate

By means of appropriate ground connections, it is possible to avoid the emission of interference, because interference is discharged to ground on the shortest possible way.

Ground connections of the metal housings of EMC-critical components (such as filters, devices of the drive system, connection points of the cable shields, devices with microprocessor and switching power supply units) have to be well contacted over a large surface area. This also applies to all screw connections between mounting plate and control cabinet wall and to the mounting of a ground bus to the mounting plate.

The best solution is to use a zinc-coated mounting plate. Compared to a varnished plate, the connections in this case have a good long-time stability.

Connection Elements

For varnished mounting plates, always use screw connections with tooth lock washers and zinc-coated, tinned screws as connection elements. At the connection points, remove the varnish so that there is safe electrical contact over a large surface area. You achieve contact over a large surface area by means of bare connection surfaces or several connection screws. For screw connections, you can establish the contact to varnished surfaces by using tooth lock washers.

## Mounting and Installation

|                                            |                                                                                                                                                                                                                                                                                                                                                                      |
|--------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Metal Surfaces</b>                      | <p>Always use connection elements (screws, nuts, plain washers) with good electroconductive surface.</p> <p>Bare zinc-coated or tinned metal surfaces have <b>good electroconductive properties</b>.</p> <p>Anodized, yellow chromitized, black gunmetal finish or lacquered metal surfaces have <b>bad electroconductive properties</b>.</p>                        |
| <b>Ground Wires and Shield Connections</b> | <p>For connecting ground wires and shield connections, it is not the cross section but the size of contact surface that is important, as the high-frequency interference currents mainly flow on the surface of the conductor.</p> <p>Always connect cable shields, especially shields of the motor power cables, to ground potential over a large surface area.</p> |

## Installing Signal Lines and Signal Cables

|                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|---------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Line Routing</b> | <p>For measures to prevent interference, see the Project Planning Manuals of the respective device. In addition, we recommend the following measures:</p> <ul style="list-style-type: none"><li>• Route signal and control lines separately from the power cables with a minimum distance of <b>d5 = 100 mm</b> (see <a href="#">Division Into Areas (Zones), page 156</a>) or with a grounded separating sheet. The optimum way is to route them in separate cable ducts. If possible, lead signal lines into the control cabinet at one point only.</li><li>• If signal lines are crossing power cables, route them in an angle of 90° in order to avoid interference injection.</li><li>• Ground spare cables, that are not used and have been connected, at least at both ends so that they do not have any antenna effect.</li><li>• Avoid unnecessary line lengths.</li><li>• Run cables as close as possible to grounded metal surfaces (reference potential). The ideal solution are closed, grounded cable ducts or metal pipes which, however, is only obligatory for high requirements (sensitive instrument leads).</li><li>• Avoid suspended lines or lines routed along synthetic carriers, because they are functioning like reception antennas (noise immunity) and like transmitting antennas (emission of interference). Exceptional cases are flexible cable tracks over short distances of a maximum of 5 m.</li></ul> |
| <b>Shielding</b>    | <p>Connect the cable shield immediately at the devices in the shortest and most direct possible way and over the largest possible surface area.</p> <p>Connect the shield of <b>analog signal lines</b> at one end over a large surface area, normally in the control cabinet at the analog device. Make sure the connection to ground/housing is short and over a large surface area.</p> <p>Connect the shield of <b>digital signal lines</b> at both ends over a large surface area and in short form. In the case of potential differences between beginning and end of the line, run an additional bonding conductor in parallel. This prevents compensating current from flowing via the shield. The guide value for the cross section is 10 mm<sup>2</sup>.</p> <p>You absolutely have to equip separable connections with connectors with grounded metal housing.</p> <p>In the case of non-shielded lines belonging to the same circuit, twist feeder and return cable.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                       |

## Mounting and Installation

**General Measures of Radio Interference Suppression for Relays, Contactors, Switches, Chokes and Inductive Loads**

If, in conjunction with electronic devices and components, inductive loads, such as chokes, contactors, relays are switched by contacts or semiconductors, appropriate interference suppression has to be provided for them:

- By arranging free-wheeling diodes in the case of d.c. operation
- In the case of a.c. operation, by arranging usual RC interference suppression elements depending on the contactor type, immediately at the inductance

Only the interference suppression element arranged immediately at the inductance does serve this purpose. Otherwise, the emitted noise level is too high which can affect the function of the electronic system and of the drive.

## 7 Technical Data of the Components

### 7.1 Control Section

#### 7.1.1 EC - Standard Encoder Evaluation

##### Supported Encoder Systems

**Supported Encoder Systems**

Encoder systems with a supply voltage of **5 and 12 volt**:

- MSM motor encoder
- MSK motor encoder
- Sin-cos encoder 1V<sub>pp</sub>; HIPERFACE®
- Sin-cos encoder 1V<sub>pp</sub>; EnDat 2.1; (EnDat 2.2 in preparation)
- Sin-cos encoder 1V<sub>pp</sub>; with reference track
- 5V-TTL square-wave encoder; with reference track
- SSI
- Combined encoder for SSI (combination of SSI and sin-cos encoder 1V<sub>pp</sub>)
- Resolver (resolvers are **not** supported if an optional "Safe Motion" safety technology is available at the same time.)
- Hall sensor box SHL02.1
- Digital Hall sensor in conjunction with Hall sensor adapter box SHL03.1

##### Encoder Type


##### IndraDyn S MSM Motors (5V Supply Voltage)

**Properties**

Encoder systems of the MSM motors are digital encoder systems that can be evaluated in absolute form.

The optionally available battery box (SUP-E01-MSM-BATTERYBOX) allows multi-turn functionality.

**Connection Diagram**

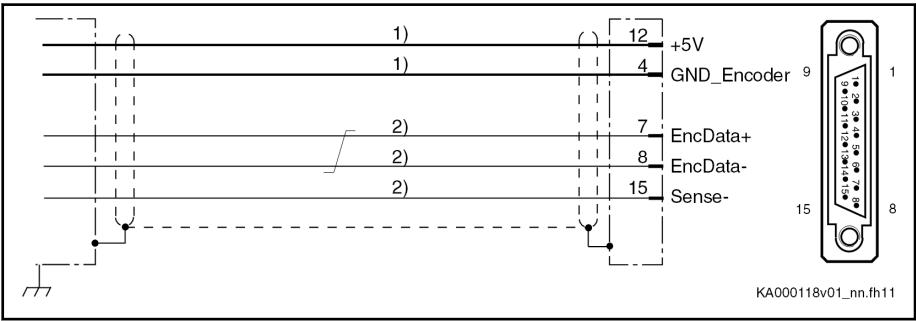

- 1) Line cross section  $\geq 0.5 \text{ mm}^2$ ; observe allowed encoder cable length  
2) Line cross section  $\geq 0.14 \text{ mm}^2$

Fig. 7-1: Connection Diagram EC with Encoder System of IndraDyn S MSM Motors



For **direct** connection to the encoder system, use our cable **RKG0033**.

**Power supply**

**5 V** (the voltage is made available via the EC interface)

Technical specification of the power supply: See [chapter "5 V Power Supply" on page 179](#)

**Cable Length**

**75 m** at most (when using the Sense function)

## Technical Data of the Components


When you do not use the Sense function, the maximum cable length is reduced (see [chapter "Encoder Cable Length" on page 179](#)).

IndraDyn S MSK/QSK Motors S1/M1, S2/M2, S3/M3, S5/M5 (12 V Supply Voltage)

**Properties** Encoder systems of the MSK/QSK motors are HIPERFACE® (S1/M1, S3/M3, S5/M5) or EnDat 2.1 (S2/M2) encoder systems.

The type code of the motor shows whether the encoder system supports the single-turn (Sx) or multi-turn (Mx) functionality. Example: The MSK050C-0600-NN-S1-UG0-NNNN motor has a single-turn HIPERFACE® encoder system.

Connection Diagram

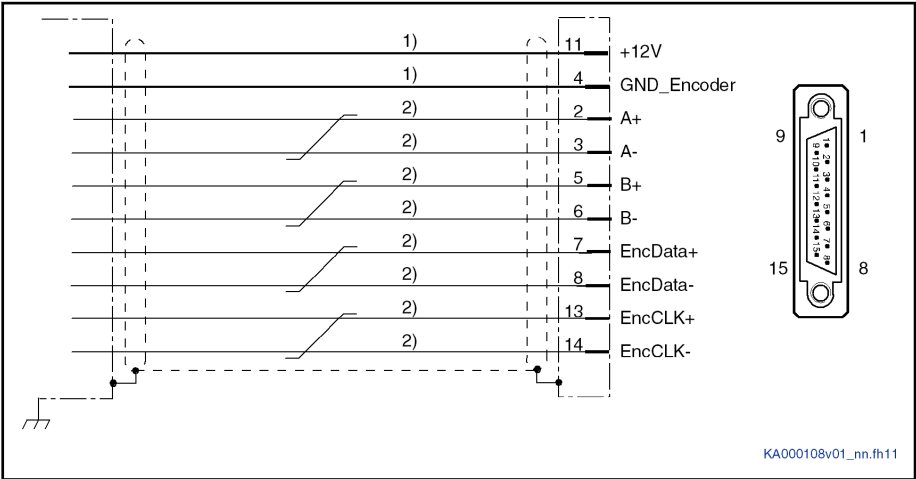

1) Line cross section  $\geq 0.5 \text{ mm}^2$ ; observe allowed encoder cable length  
2) Line cross section  $\geq 0.14 \text{ mm}^2$   
Fig. 7-2: Connection Diagram MSK/QSK Encoder Interface for S1/M1, S2/M2, S5/M5 Encoder Systems



For **direct** connection to the encoder system, use our cable RKG4200.

**Power supply** 12 V (the voltage is made available via the EC interface)  
Technical specification of the power supply: See [chapter "12 V Power Supply" on page 179](#)

**Cable Length** The maximum allowed cable length depends on several factors: See [chapter "Encoder Cable Length" on page 179](#)




Technical Data of the Components

HIPERFACE® (12 V Supply Voltage)

For how to connect the encoder system, see the connection diagram.

Connection Diagram

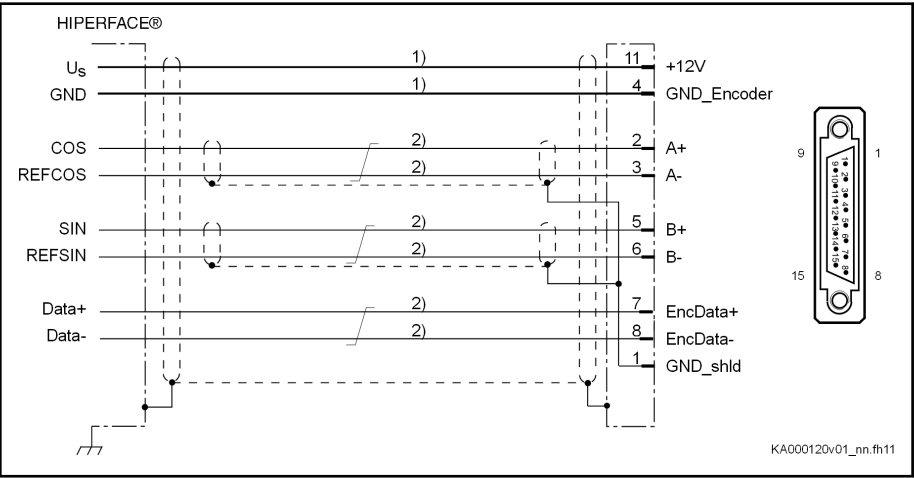

- 1) Line cross section  $\geq 0.5 \text{ mm}^2$ ; observe allowed encoder cable length
- 2) Line cross section  $\geq 0.14 \text{ mm}^2$

Fig. 7-3: Connection Diagram HIPERFACE® Encoder System

**Power supply** The HIPERFACE® encoder system needs a supply voltage of 12 V. This supply voltage is made available via the EC interface.  
Technical specification of the power supply: See [chapter "12 V Power Supply" on page 179](#)


 Observe that the third-party encoder used must be suited for the voltage available at the EC interface as voltage for encoder supply.

**Cable Length** The maximum possible cable length depends on several factors: See [chapter "Encoder Cable Length" on page 179](#)

## EnDat 2.1 according to Heidenhain Standard (5 V Supply Voltage)

For how to connect the encoder system, see the connection diagram.

### Connection Diagram

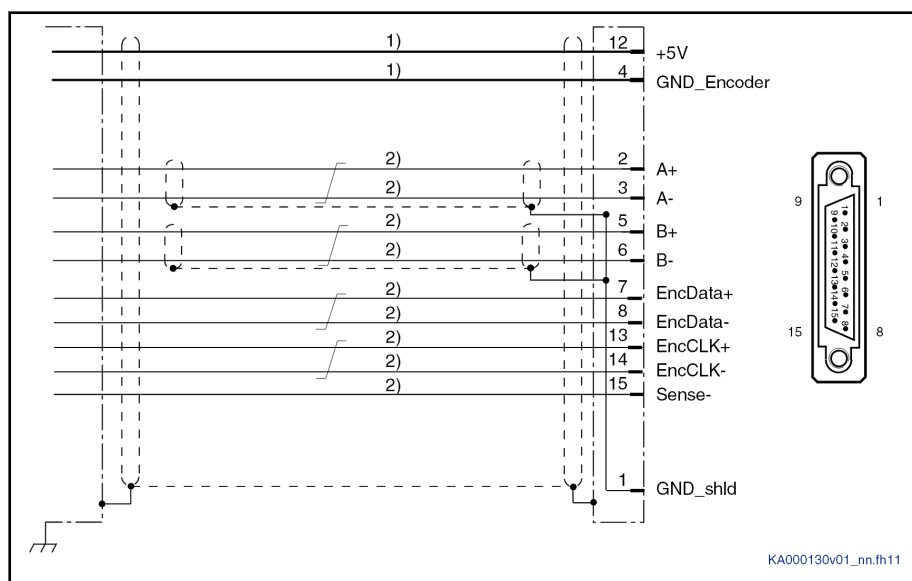

- 1) Line cross section  $\geq 0.5 \text{ mm}^2$ ; observe allowed encoder cable length  
2) Line cross section  $\geq 0.14 \text{ mm}^2$

Fig. 7-4: Connection Diagram EC with EnDat 2.1 Encoder System



For **direct** connection to the encoder system, use our cable RKG0036.

**Power supply** 5 V (the voltage is made available via the EC interface)

Technical specification of the power supply: See [chapter "5 V Power Supply" on page 179](#)

**Cable Length** 75 m at most (when using the Sense function)

When you do not use the Sense function, the maximum cable length is reduced (see [chapter "Encoder Cable Length" on page 179](#)).

### Technical Properties


To ensure stable power supply at the encoder, use the Sense function. Description of the Sense function: See [chapter "5 V Power Supply" on page 179](#)

Technical Data of the Components

1V<sub>pp</sub> according to Heidenhain Standard (5 V Supply Voltage)

For how to connect the encoder system, see the connection diagram.

Connection Diagram

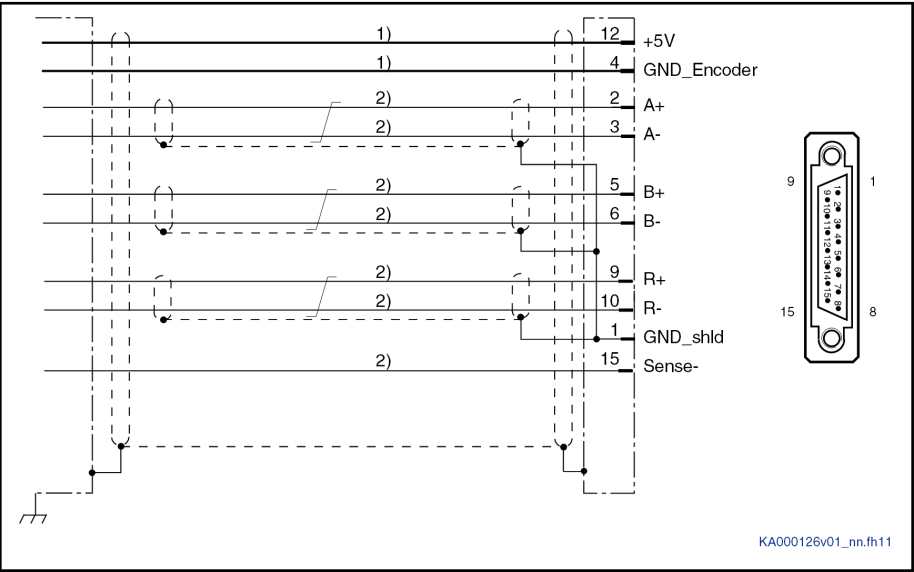

- 1) Line cross section  $\geq 0.5 \text{ mm}^2$ ; observe allowed encoder cable length  
2) Line cross section  $\geq 0.14 \text{ mm}^2$   
Fig. 7-5: Connection Diagram EC with 1V<sub>pp</sub> Encoder System

 For **direct** connection to the encoder system, use our cable **RKG0035**.


|                      |                                                                                                                                                                                                |
|----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Power supply         | 5 V (the voltage is made available via the EC interface)<br>Technical specification of the power supply: See <a href="#">chapter "5 V Power Supply" on page 179</a>                            |
| Cable Length         | 75 m at most (when using the Sense function)<br>When you do not use the Sense function, the maximum cable length is reduced (see <a href="#">chapter "Encoder Cable Length" on page 179</a> ). |
| Technical Properties | To ensure stable power supply at the encoder, use the Sense function. Description of the Sense function: See <a href="#">chapter "5 V Power Supply" on page 179</a>                            |

# Technical Data of the Components

## 1V<sub>pp</sub> (12 V Supply Voltage)

For how to connect the encoder system, see the connection diagram.

### Connection Diagram

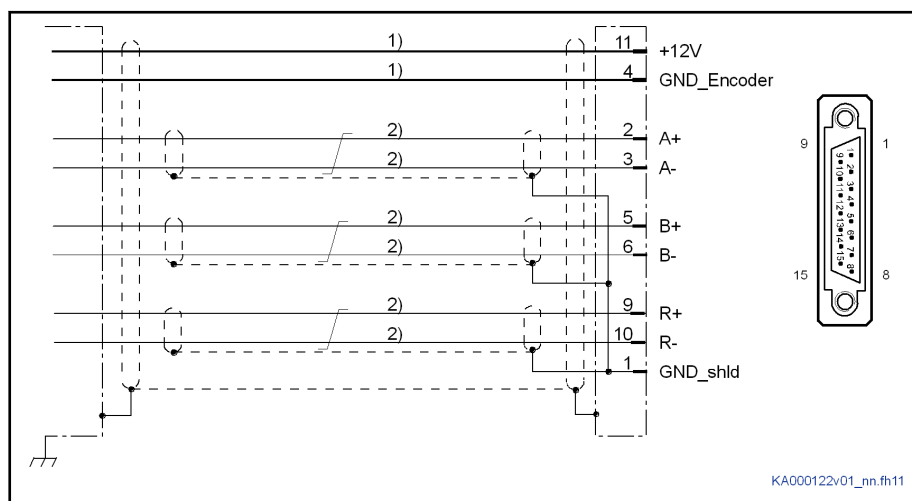

**Power supply** 12 V (the voltage is made available via the EC interface)

Technical specification of the power supply: See [chapter "12 V Power Supply" on page 179](#)


**Cable Length** The maximum allowed cable length depends on several factors: See [chapter "Encoder Cable Length" on page 179](#)

Technical Data of the Components

TTL (5 V Supply Voltage)

For how to connect the encoder system, see the connection diagram.

Connection Diagram

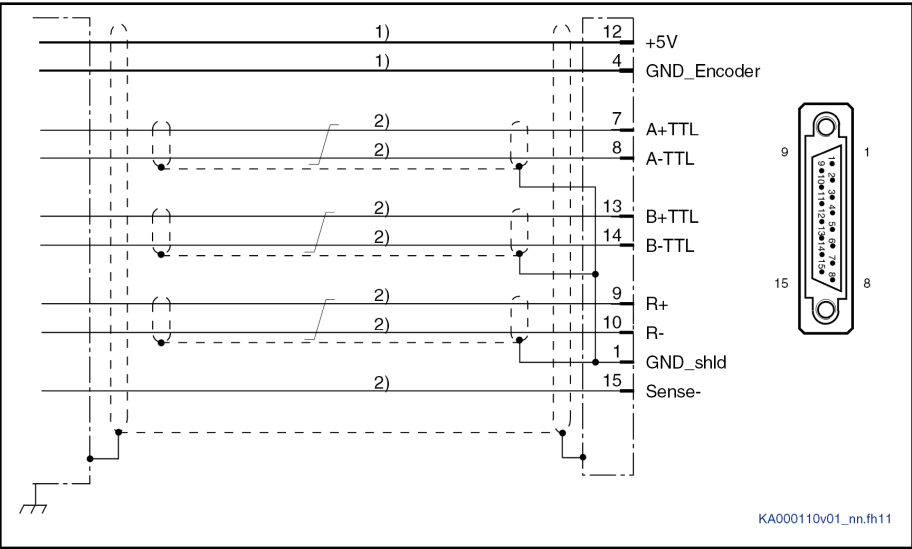

- 1) Line cross section  $\geq 0.5 \text{ mm}^2$ ; observe allowed encoder cable length  
2) Line cross section  $\geq 0.14 \text{ mm}^2$

Fig. 7-7: Connection Diagram EC with TTL Encoder System


|                      |                                                                                                                                                                                                |
|----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Power supply         | 5 V (the voltage is made available via the EC interface)<br>Technical specification of the power supply: See <a href="#">chapter "5 V Power Supply" on page 179</a>                            |
| Cable Length         | 75 m at most (when using the Sense function)<br>When you do not use the Sense function, the maximum cable length is reduced (see <a href="#">chapter "Encoder Cable Length" on page 179</a> ). |
| Technical Properties | To ensure stable power supply at the encoder, use the Sense function. Description of the Sense function: See <a href="#">chapter "5 V Power Supply" on page 179</a>                            |

## Technical Data of the Components

### TTL (12 V Supply Voltage)

For how to connect the encoder system, see the connection diagram.

#### Connection Diagram

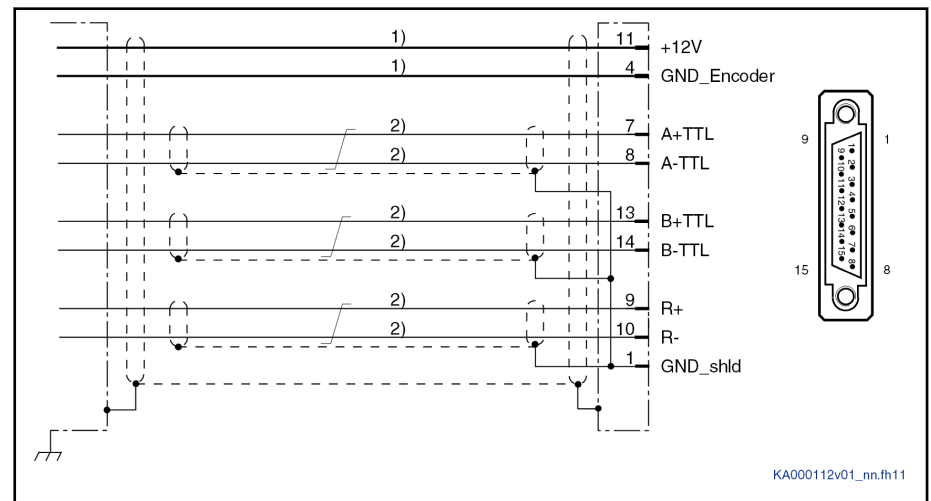

**Power supply** 12 V (the voltage is made available via the EC interface)

Technical specification of the power supply: See [chapter "12 V Power Supply" on page 179](#)


**Cable Length** The maximum allowed cable length depends on several factors: See [chapter "Encoder Cable Length" on page 179](#)

Technical Data of the Components

SSI (5 V Supply Voltage)

For how to connect the encoder system, see the connection diagram.

Connection Diagram

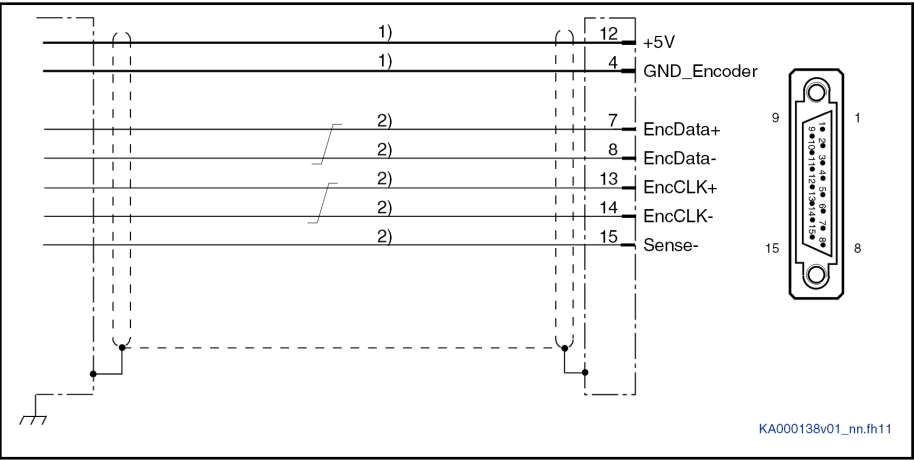

- 1)
- Line cross section  $\geq 0.5 \text{ mm}^2$ ; observe allowed encoder cable length
- 2)
- Line cross section  $\geq 0.14 \text{ mm}^2$

Fig. 7-9: Connection Diagram EC with SSI Encoder System


|                      |                                                                                                                                                                                                |
|----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Power supply         | 5 V (the voltage is made available via the EC interface)<br>Technical specification of the power supply: See <a href="#">chapter "5 V Power Supply" on page 179</a>                            |
| Cable Length         | 75 m at most (when using the Sense function)<br>When you do not use the Sense function, the maximum cable length is reduced (see <a href="#">chapter "Encoder Cable Length" on page 179</a> ). |
| Technical Properties | To ensure stable power supply at the encoder, use the Sense function. Description of the Sense function: See <a href="#">chapter "5 V Power Supply" on page 179</a>                            |

## Technical Data of the Components

### SSI (12 V Supply Voltage)

For how to connect the encoder system, see the connection diagram.

#### Connection Diagram

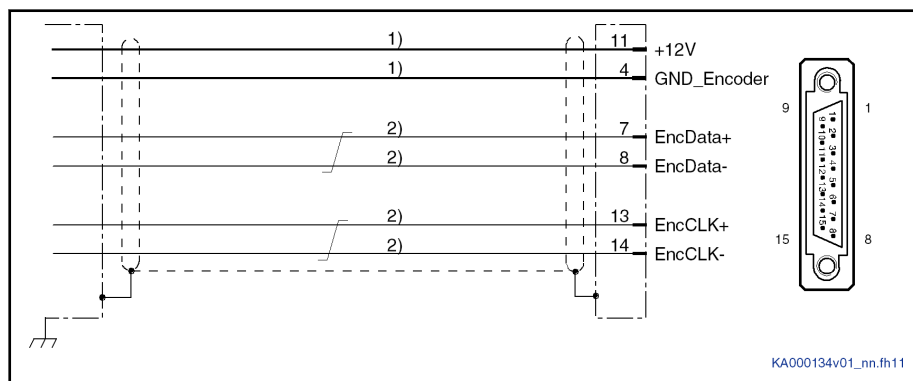

- 1) Line cross section  $\geq 0.5 \text{ mm}^2$ ; observe allowed encoder cable length  
2) Line cross section  $\geq 0.14 \text{ mm}^2$

Fig. 7-10: Connection Diagram SSI Encoder System

- Power supply** 12 V (the voltage is made available via the EC interface)  
Technical specification of the power supply: See [chapter "12 V Power Supply" on page 179](#)
- Cable Length** The maximum allowed cable length depends on several factors: See [chapter "Encoder Cable Length" on page 179](#)




Technical Data of the Components

**Combined Encoder for SSI (5 V Supply Voltage)**

The combined encoder for SSI is a combination of SSI and sin-cos encoder  $1V_{pp}$ .

For how to connect the encoder system, see the connection diagram.

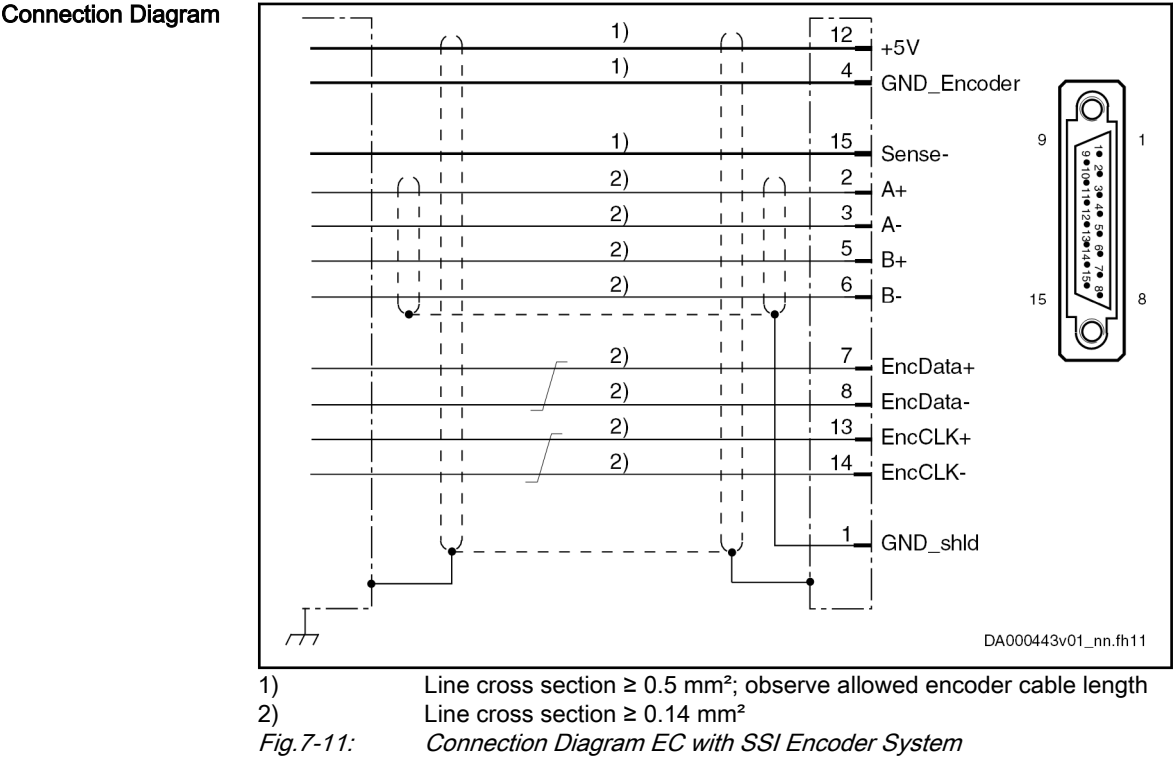


|                      |                                                                                                                                                                                                |
|----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Power supply         | 5 V (the voltage is made available via the EC interface)<br>Technical specification of the power supply: See <a href="#">chapter "5 V Power Supply" on page 179</a>                            |
| Cable Length         | 75 m at most (when using the Sense function)<br>When you do not use the Sense function, the maximum cable length is reduced (see <a href="#">chapter "Encoder Cable Length" on page 179</a> ). |
| Technical Properties | To ensure stable power supply at the encoder, use the Sense function. Description of the Sense function: See <a href="#">chapter "5 V Power Supply" on page 179</a>                            |

Technical Data of the Components

Resolver without Encoder Data Memory

For how to connect the encoder system, see the connection diagram.

Connection Diagram

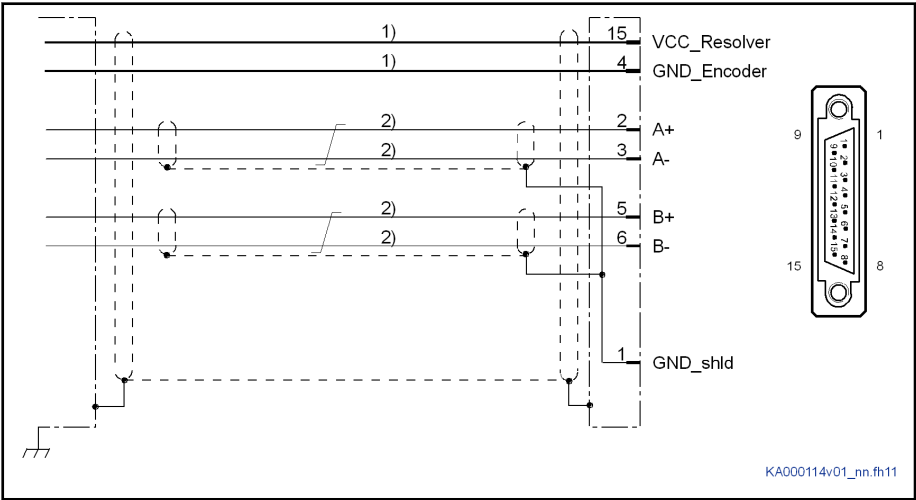

- 1) Line cross section  $\geq 0.5 \text{ mm}^2$ ; observe allowed encoder cable length
  - 2) Line cross section  $\geq 0.14 \text{ mm}^2$
- Fig. 7-12: Connection Diagram EC with Resolver Encoder System

**Power supply** The EC interface supplies the resolver encoder system with a carrier voltage amplitude of  $11 \text{ V}_{pp}$ .  
Technical specification of the power supply: See [chapter "Resolver Power Supply" on page 179](#)



Observe that the resolver encoder used must be suited for the voltage available at the EC interface as voltage for encoder supply.

**Cable Length** 75 m at most


**Specific Technical Features** The encoder evaluation has been sized for resolvers with a **transfer ratio of 0.5**.  
Resolvers are **not** supported if an optional "Safe Motion" safety technology is available at the same time.

Technical Data of the Components

Hall Sensor Box SHL02.1 (12 V Supply Voltage)

For how to connect the Hall sensor box SHL02.1, see the connection diagram.

Connection Diagram

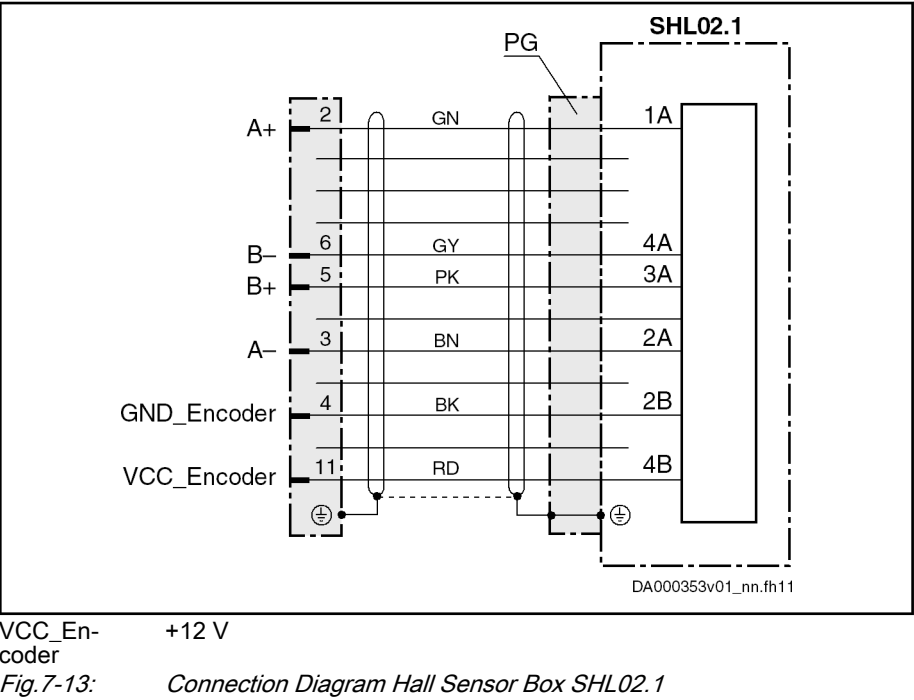

- Power supply

12 V (the voltage is made available via the EC interface)  
Technical specification of the power supply: See [chapter "12 V Power Supply" on page 179](#)
- Cable Length

The maximum allowed cable length depends on several factors: See [chapter "Encoder Cable Length" on page 179](#)
- Specific Technical Features

For detailed information on the Hall sensor box SHL02.1, see the Functional Description "Rexroth Hall Sensor Box SHL02.1" (R911292537).

## Power Supply

### 5 V Power Supply

#### 5 V Power Supply

| Data                  | Unit | Min. | Typ. | Max.              |
|-----------------------|------|------|------|-------------------|
| DC output voltage +5V | V    | 5,0  |      | 5,25              |
| Output Current        | mA   |      |      | 500 <sup>1)</sup> |

1) The sum of the power consumptions of all connected encoder systems (5 V / 12 V) must not exceed **6 W**.

Tab. 7-1: 5 V Power Supply

#### Sense Function

The EC encoder evaluation provides the option of correcting the 5 V supply voltage at the encoder. It is thereby possible, within certain limits, to compensate for voltage drops on the encoder cable.

**Functional principle:** The current consumption of the connected encoder system generates a voltage drop due to the ohmic resistance of the encoder cable (line cross section and line length). This reduces the signal at the encoder input. The actual value of the 0 V encoder potential at the encoder is measured via a separate "Sense" line (Sense-) and is fed back to the drive controller. Thus, the drive controller can influence the voltage of the encoder supply.



For correct "Sense" evaluation, the encoder supply lines "+5V" and "GND\_Encoder" must have the same line cross section..

If the encoder has a "Sense-" connection, connect the "Sense-" line at this connection. The "Sense+" connection, which might possibly exist, is not used.

If the encoder has no "Sense" connection, apply the 0 V encoder potential to the "Sense-" line on the encoder side.

### 12 V Power Supply

#### 12 V Power Supply

| Data                       | Unit | Min. | Typ. | Max.              |
|----------------------------|------|------|------|-------------------|
| Voltage for encoder supply | V    | 10,7 | 12   | 12,3              |
| Output Current             | mA   |      |      | 500 <sup>1)</sup> |

1) The sum of the power consumptions of all connected encoder systems (5 V / 12 V) must not exceed **6 W**.

Tab. 7-2: 12 V Power Supply

### Resolver Power Supply

#### Resolver Encoder System

| Data                                             | Unit | Min. | Typ. | Max. |
|--------------------------------------------------|------|------|------|------|
| AC output voltage VCC_Resolver (peak-peak value) | V    | 8,3  | 10   | 12   |
| Output frequency sine                            | kHz  |      | 8    |      |
| Output current (peak value)                      | mA   |      |      | 60   |
| Output current (rms value)                       | mA   |      |      | 40   |

Tab. 7-3: Resolver Encoder Supply

## Encoder Cable Length




For encoder supply, use lines with the same line cross section.

Technical Data of the Components

Allowed Encoder Cable Length for 5 V Encoder Systems without Sense Function

If the encoder system used does not support the Sense function, the maximum possible cable length results from the diagram below.

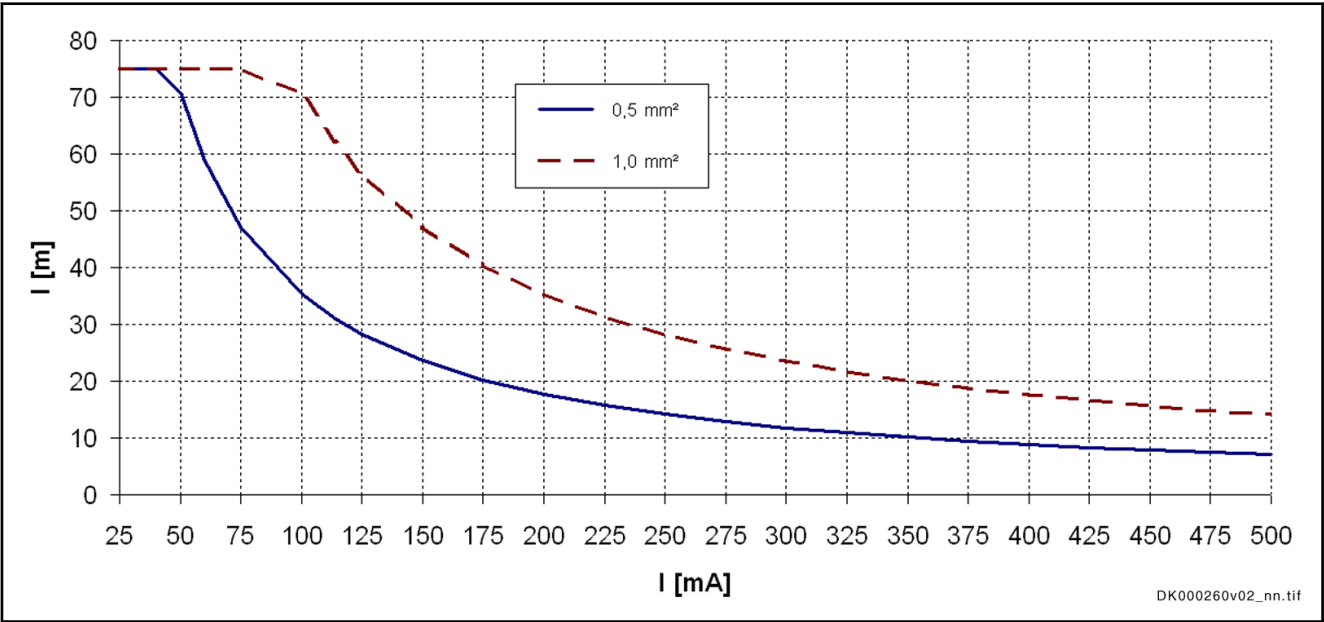

I [mA]      Encoder current consumption  
l [m]      Cable Length  
0.5 mm²;      Line Cross Sections  
1.0 mm²

Fig. 7-14: Maximum Allowed Encoder Cable Lengths for 5 V Encoder Systems without Sense Connection Depending on Line Cross Section

 Nominal current consumption of the MSM motor encoders: 75 mA


Allowed Encoder Cable Length for 5 V Encoder Systems with Sense Function

75 m at most (The cross section of the supply voltage lines must be at least 0.5 mm².)

Allowed Encoder Cable Length for 12 V Encoder Systems

- Requirements:
- The **cross section** of the supply voltage lines is at least **0.5 mm²**
  - The minimum allowed **supply voltage** at the encoder is **10 V**

Technical Data of the Components

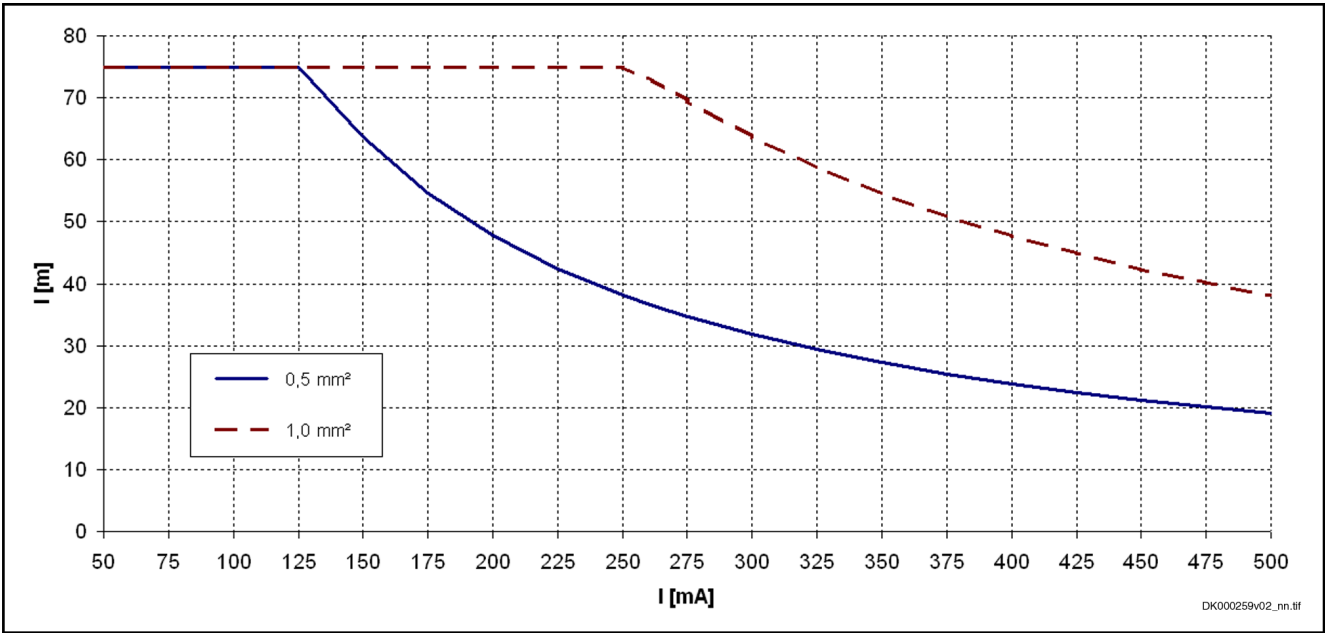

I [mA] Encoder current consumption  
l [m] Cable Length  
0.5 mm²; 1.0 mm² Line Cross Sections  
Fig. 7-15: Maximum Allowed Encoder Cable Lengths for 12 V Encoder Systems Depending on Line Cross Section at a Supply Voltage of 10 V

Nominal current consumption of the MSK motor encoders: 60 mA

Allowed Encoder Cable Length for Resolver Encoder Systems 75 m at most (The cross section of the supply voltage lines must be at least 0.5 mm².)

Technical Data of Encoder Evaluation EC

Input Circuit for Sine Signals A+, A-, B+, B-, R+, R-

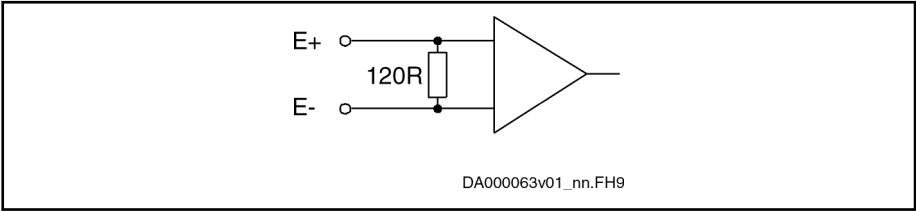


Fig. 7-16: Input Circuit for Sine Signals (Block Diagram)

Properties of Differential Input for Sine Signals

| Data                                                                  | Unit | Min. | Typ. | Max. |
|-----------------------------------------------------------------------|------|------|------|------|
| Amplitude of encoder signal peak-peak (U <sub>PPencodersignal</sub> ) | V    | 0,8  | 1,0  | 1,2  |
| Cut-off frequency (-3 dB)                                             | kHz  |      | 400  |      |
| Converter width A/D converter                                         | Bit  |      | 12   |      |
| Input resistance                                                      | ohm  |      | 120  |      |

Tab. 7-4: Differential Input Sine

Technical Data of the Components

Resolver Input Circuit for A+, A-, B+, B-

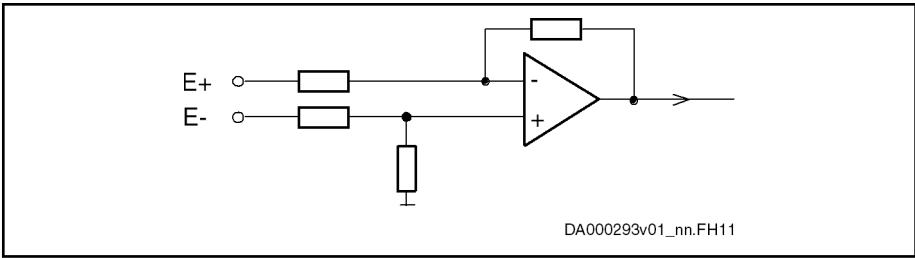


Fig. 7-17:      Input Circuit for Resolver Evaluation (Block Diagram)

Input Circuit for Square-Wave Signals

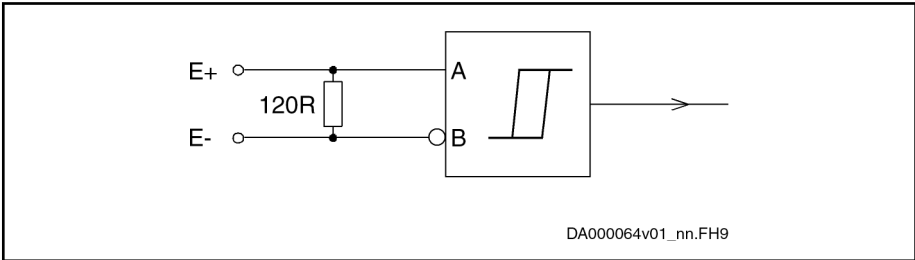


Fig. 7-18:      Input Circuit for Square-Wave Signals (Block Diagram)

Properties of Differential Input for Square-Wave Signals

| Data                 | Unit | Min. | Typ. | Max. |
|----------------------|------|------|------|------|
| Input voltage "high" | V    | 2,4  |      | 5,0  |
| Input voltage "low"  | V    | 0    |      | 0,8  |
| Input frequency      | kHz  |      |      | 1000 |
| Input resistance     | ohm  |      | 120  |      |






















Tab. 7-5:      Differential Input Square-Wave Signals

Differential Input for Resolver Operation

| Data                                             | Unit | Min. | Typ. | Max. |
|--------------------------------------------------|------|------|------|------|
| Amplitude encoder signal sine (U <sub>pp</sub> ) | V    |      | 5    | 6    |
| Input resistance                                 | kOhm |      | 12   |      |
| Converter width A/D converter                    | Bit  |      | 12   |      |

Tab. 7-6:      Input Data Resolver Operation

## Signal Assignment to the Actual Position Value
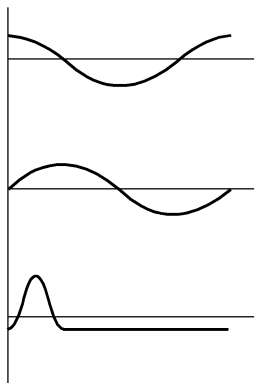
| Signal assignment <sup>1)</sup>                                                                                                                  | Signal designation                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Signal shape                                                            | Actual position value<br>(with default setting)                                                                                                                                                                                                                                           |
|--------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  <p>DK000089v01_nn.FH9</p>                                      | <p>A+ </p> <p>A- </p> <p>B+ </p> <p>B- </p> <p>R+ </p> <p>R- </p> <p>DF000381v01_nn.FH11</p>                     | <p>Sine (1 V<sub>pp</sub>)</p> <p>Without absolute value</p>            | <p><b>Rotary motor:</b></p> <p>Increasing actual position values with clockwise motor motion (when viewed from the front toward the A-side shaft end)</p> <p><b>Rexroth linear motor:</b></p> <p>Increasing actual position values with motor motion in the direction of cable outlet</p> |
|  <p>DK000090v01_nn.FH9</p>                                     | <p>A+TTL </p> <p>A-TTL </p> <p>B+TTL </p> <p>B-TTL </p> <p>R+ </p> <p>R- </p> <p>DF000380v01_nn.FH11</p> | <p>Square-wave (TTL)</p> <p>Without absolute value</p>                  |                                                                                                                                                                                                                                                                                           |
|  <p>DK000088v01_nn.FH9</p>                                    | <p>A+ </p> <p>A- </p> <p>B+ </p> <p>B- </p> <p>DF000382v01_nn.FH11</p>                                                                                                                                                                                                      | <p>Sine (1 V<sub>pp</sub>)</p> <p>With absolute value (e.g. En-Dat)</p> |                                                                                                                                                                                                                                                                                           |
|  <p>DK000365v01_nn.FH11</p> <p>Amplitude-modulated signal</p> | <p>A+ </p> <p>A- </p> <p>B+ </p> <p>B- </p> <p>DF000382v01_nn.FH11</p>                                                                                                                                                                                                      | <p>Resolver</p>                                                         |                                                                                                                                                                                                                                                                                           |

<sup>1)</sup> See following note  
Tab. 7-7: Signal Assignment to the Actual Position Value



## Technical Data of the Components



The encoder signal assignment to the inputs is based on clockwise rotation (front view toward motor shaft).

- Track A (A+, A-) advances track B (B+, B-) 90° electrically.
- The actual position value increases (prerequisite: negation of the encoder signals was not parameterized).
- If available, the reference track R (R+, R-) provides the reference mark pulse at positive signals of track A and track B (in the so-called "0-th" quadrant).



Standard setting: See Functional Description of firmware.

7.1.2 EM - Encoder Emulation

Cables

| Data                      | Symbol                | Unit | Max. |
|---------------------------|-----------------------|------|------|
| Length (shielded cable)   | $I_{\text{shield}}$   | m    | 40   |
| Length (unshielded cable) | $I_{\text{unshield}}$ | m    | 30   |
| Capacitance               | C                     | pF/m | 60   |

Tab.7-8: Cables

Incremental Encoder Emulation

Connection

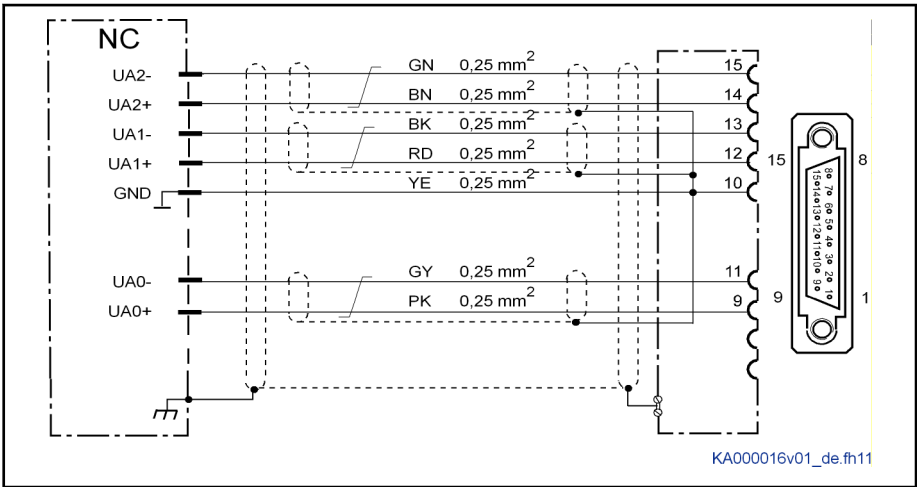


Fig.7-19: Connection of Incremental Actual Position Value Output


Differential Outputs Incremental Encoder Emulation

| Data                                    | Symbol                 | Unit | Min.                  | Typ. | Max.                           |
|-----------------------------------------|------------------------|------|-----------------------|------|--------------------------------|
| Input voltage                           | $U_{\text{ext}}$       | V    | 5                     |      | 30                             |
| Current consumption at $U_{\text{ext}}$ | $I_{\text{ext}}$       | mA   | 25                    |      | $25 + 3 \times I_{\text{out}}$ |
| Output voltage "high"                   | $U_{\text{Out\_High}}$ | V    | $U_{\text{ext}} - 2V$ |      | $U_{\text{ext}}$               |
| Output voltage "low"                    | $U_{\text{Out\_Low}}$  | V    | 0                     |      | 1,5                            |
| Output current                          | $I_{\text{Out}}$       | mA   | -                     |      | 40                             |
| Output frequency                        | f                      | MHz  | -                     |      | 1                              |
| Overload protection                     | -                      | -    | Available             |      |                                |
| Short circuit protection                | -                      | -    | Available             |      |                                |

Tab.7-9: Differential Outputs

Technical Data of the Components

Signals for Incremental Actual Position Value Output

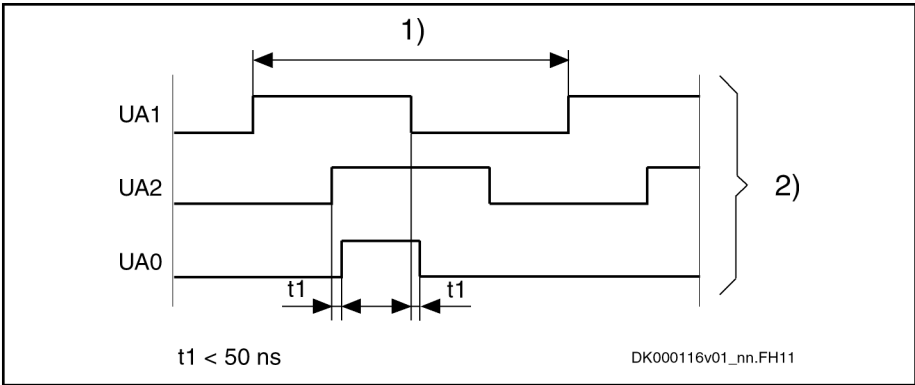

t1 < 50 ns  
1) One line  
2) Square-wave pulses with view to the motor shaft and clockwise rotation

Fig.7-20: Signals for Incremental Actual Position Value Output

Output Frequency f

$$f = \frac{S}{U} \times n$$

f Output frequency  
S Number of lines  
U Revolution  
n Speed

Fig.7-21: Calculating the Output Frequency f



The output frequency results from the respective parameter setting.  
See also Functional Description of firmware: Encoder Emulation.

Control-Side Signal Filter for UA1 and UA2



Due to the signal processing in the control section, the periodic time and duty cycle of the output signals are influenced.  
Depending on the parameterized output frequency, there are the following requirements to the signal filtering of the control unit for channels UA1 and UA2:

- With  $f_{out} \geq 500 \text{ kHz}$ :  $f_{filter} \geq 1 \text{ MHz}$
- With  $f_{out} < 500 \text{ kHz}$ :  $f_{filter} \geq 2 \times f_{out}$

Speed Measurement



Frequency measurement is **not** suited to measure the speed from the incremental emulator signals.

Incremental Encoder Emulation with Signal Level Conversion

Connection

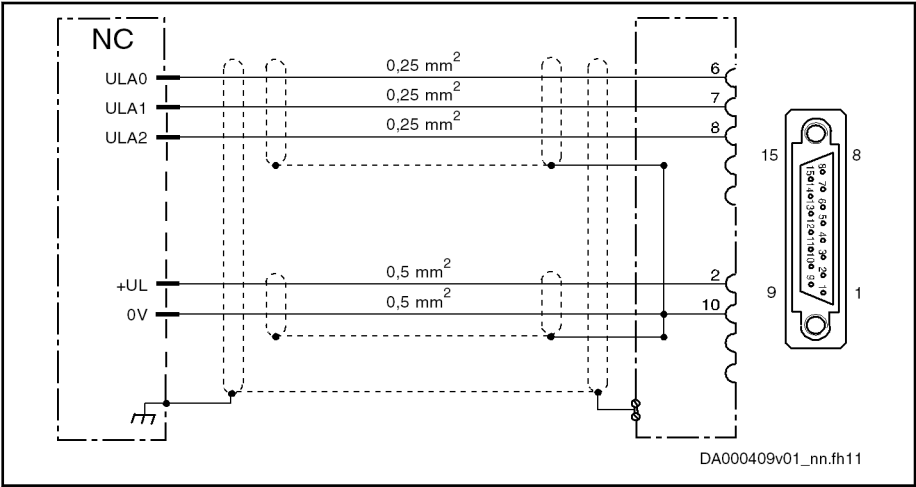


Fig. 7-22: Connection

Electrical Data

| Data                             | Symbol          | Unit | Min.                               | Typ. | Max. |
|----------------------------------|-----------------|------|------------------------------------|------|------|
| Supply voltage                   | $U_{ext}$       | V    | 5                                  |      | 30   |
| Current consumption at $U_{ext}$ | $I_{ext}$       | mA   |                                    | 16   |      |
| Output voltage "high"            | $U_{Out\_Low}$  | V    | $U_{ext} - 0.7$                    |      |      |
| Output voltage "low"             | $U_{Out\_High}$ | V    | 0                                  |      |      |
| Output Current                   | $I_{out}$       | mA   |                                    |      | 40   |
| Output frequency                 | f               | MHz  |                                    |      | 1    |
| Overload protection              | -               | -    | Present, output voltage is reduced |      |      |

Tab. 7-10: Supply and outputs

Absolute Encoder Emulation (SSI Format)

Connection Absolute Encoder Emulation

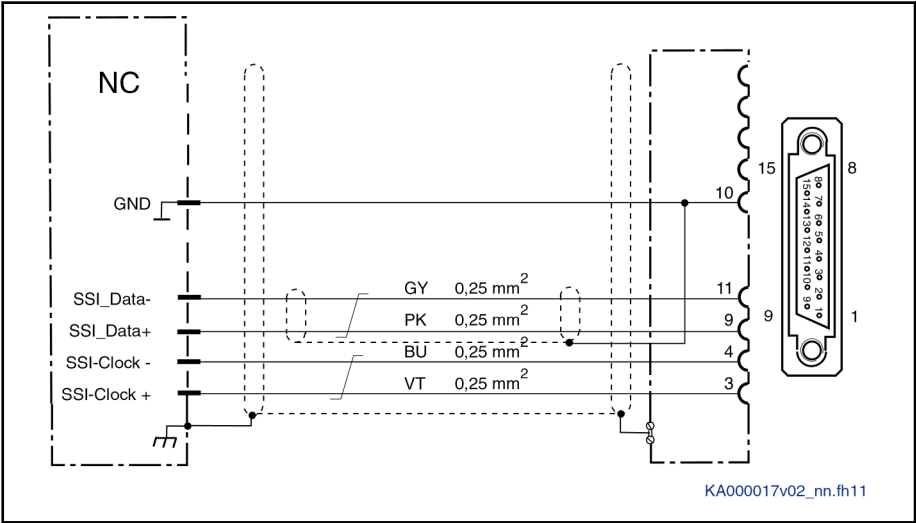


Fig. 7-23: Output of Absolute Actual Position Values According to SSI Format

Technical Data of the Components

Differential Input Circuit Absolute Encoder Emulation

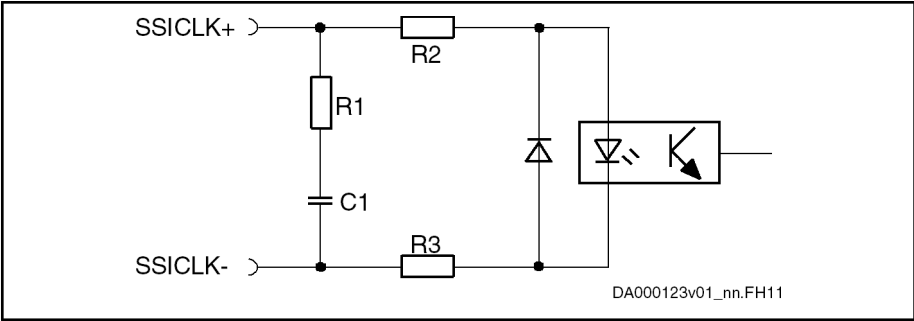


Fig.7-24:      Differential Input Circuit (Block Diagram)

Differential Inputs Absolute Encoder Emulation

| Data                          | Symbol         | Unit | Min.      | Typ. | Max. |
|-------------------------------|----------------|------|-----------|------|------|
| Input voltage "high"          | $U_{In\_High}$ | V    | 2,5       |      | 5    |
| Input voltage "low"           | $U_{In\_Low}$  | V    | 0         |      | 0,5  |
| Input resistance (difference) | $R_{In\_D}$    | ohm  | 110       |      | 130  |
| Input resistance              | $R_{In}$       | kOhm | 150       |      |      |
| Clock frequency               | f              | kHz  | 100–1000  |      |      |
| Overload protection           | -              | -    | Available |      |      |
| Short circuit protection      | -              | -    | Available |      |      |

Tab.7-11:      Differential Inputs

Differential Outputs Absolute Encoder Emulation


| Data                                    | Symbol          | Unit | Min.      | Typ. | Max. |
|-----------------------------------------|-----------------|------|-----------|------|------|
| Output voltage "high"                   | $U_{Out\_High}$ | V    | 2,5       |      | 5    |
| Output voltage "low"                    | $U_{Out\_Low}$  | V    | 0         |      | 0,5  |
| Output Current                          | $I_{Out}$       | mA   | -         |      | 20   |
| Output frequency                        | f               | MHz  |           |      | 1    |
| Load capacitance between output and 0 V |                 | nF   |           |      | 10   |
| Terminating resistor at load            | $R_{Term}$      | ohm  | 150–180   |      |      |
| Overload protection                     | -               | -    | Available |      |      |
| Short circuit protection                | -               | -    | Available |      |      |

Tab.7-12:      Differential Outputs



The differential output corresponds to the RS422 specifications. On the control side, a line terminating resistor must be available for the SSI data signal. If this resistor is not available, connect an external line terminating resistor (150–180 ohm).

Technical Data of the Components

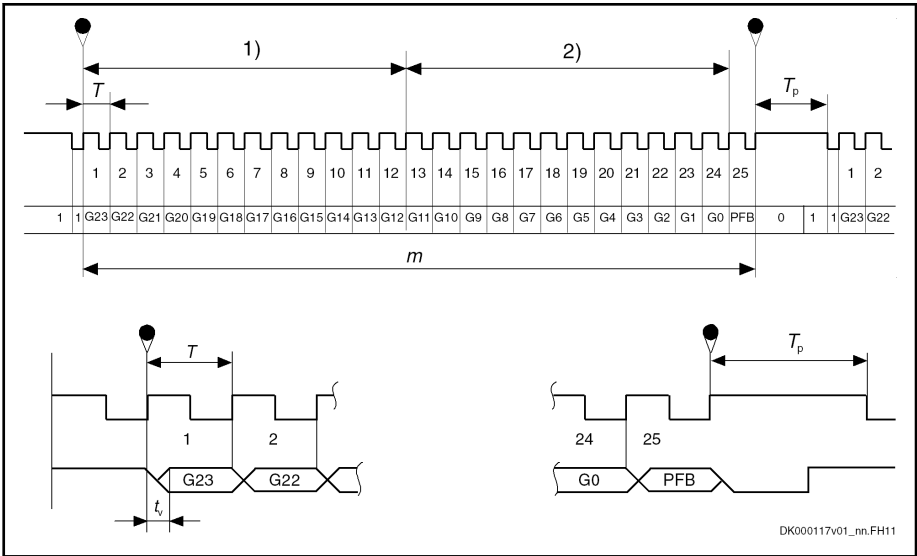

- 1) Resolution for 4096 revolutions
  - 2) Resolution for 1 revolution
  - G0 Least significant bit in Gray code
  - G23 Most significant bit in Gray code
  - m Stored parallel information
  - T Clock time
  - T<sub>p</sub> Clock break ≥ 20 μs
  - t<sub>v</sub> Delay time max. 200 ns
  - PFB Power failure bit (not used and always logically LOW)
- Fig.7-25: Pulse Diagram with Absolute Actual Position Value Output (SSI Format)

Technical Data of the Components

## 7.1.3 ET - Multi-Ethernet

### Display Elements

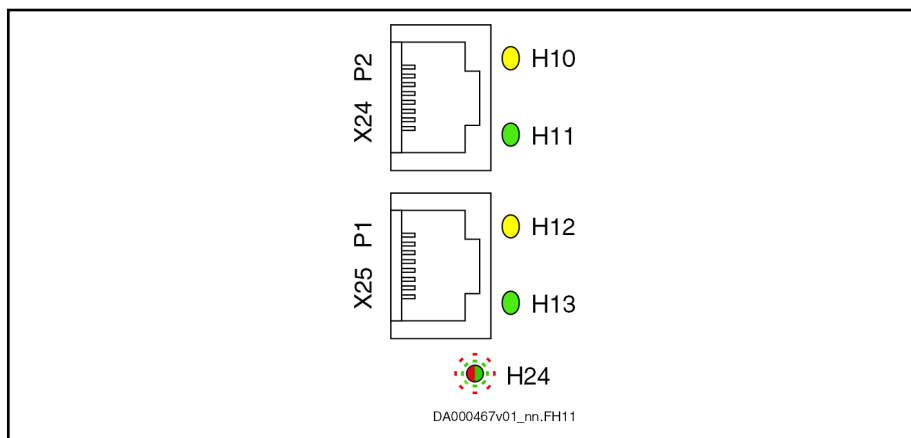


Fig. 7-26: ET, Display Elements

Display elements of optional module ET:

- Two LEDs at each connection point
- One bicolor LED (H24, for example)

The significance of the LED displays depends on the field bus system.

## Ethernet/IP

### Ethernet/IP Display Elements

| LED      | Significance       | Color                                                                                                       | Description                                                       |
|----------|--------------------|-------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------|
| H10, H12 | Status             | <br>Permanently lit yellow | Data transmission running                                         |
| H11, H13 | Link               | <br>Permanently lit green  | Connection to network available                                   |
| H*       | Not active         | <br>Off                    | Interface has been switched off (24V supply) or has no IP address |
|          | Not connected      | <br>Flashing green         | Interface has an IP address, but no connection                    |
|          | Connected          | <br>Permanently lit green  | Connection to network available, data transmission running        |
|          | Timeout            | <br>Flashing red         | Existing connection was aborted                                   |
|          | Invalid IP address | <br>Permanently lit red  | Assigned IP address is already used by another device             |
|          | Self test          | <br>Flashing red-green   | After switching on, interface carries out a self test             |

H\* H24, for example  
Tab. 7-13: Ethernet/IP Display Elements



Technical Data of the Components

EtherCAT

EtherCAT Display Elements

| LED      | Significance               | Color / flashing pattern                                                                                          | Description                                                                                                                                                               |
|----------|----------------------------|-------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| H10, H12 | None                       | -                                                                                                                 | With EtherCAT, these LEDs have no function                                                                                                                                |
| H11, H13 | Link                       | <br>Off                          | No connection to the network                                                                                                                                              |
|          |                            | <br>Permanently lit green        | Connection to network available, but no telegram exchange (EtherCAT bus inactive)                                                                                         |
|          |                            | <br>Flickering green             | Connection to network available with telegram exchange (EtherCAT bus active)                                                                                              |
| H*       | Status<br>INIT             | <br>Off                          | <ul style="list-style-type: none"><li>Cyclic process data and acyclic data channel are not transmitted</li><li>No error</li></ul>                                         |
|          | Status<br>PRE-OPERATIONAL  | <br>Flashing green               | Acyclic data channel is transmitted                                                                                                                                       |
|          | Status<br>SAFE-OPERATIONAL | <br>Green, one LED lighting up | Acyclic data channel is transmitted                                                                                                                                       |
|          | Status<br>OPERATIONAL      | <br>Permanently lit green      | Cyclic process data and acyclic data channel are transmitted                                                                                                              |
|          | Configuration error        | <br>Flashing red               | General EtherCAT configuration error                                                                                                                                      |
|          | Synchronization error      | <br>Red, one LED lighting up   | <ul style="list-style-type: none"><li>The drive controller has not been synchronized to the EtherCAT master</li><li>Communication error of the drive controller</li></ul> |
|          | Timeout - watchdog         | <br>Red, two LEDs lighting up  | <ul style="list-style-type: none"><li>Timeout during monitoring of the cyclic process data</li><li>Watchdog of the EtherCAT master</li></ul>                              |

1)  
H\*  
Tab. 7-14:

Flashing pattern: One square corresponds to a duration of 200 ms; the arrow marks the end of a cycle; abbreviations on the squares: GN = LED permanently lit green, RD = LED permanently lit red, -- = LED is off  
H24, for example  
EtherCAT Display Elements

7.1.4 PB - PROFIBUS

Signal Specification

| Signal                  | Specification                                                                                                                                                                                                                              |
|-------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| +5V<br>Repeater supply  | +5 V (±10%)<br>Max. 75 mA                                                                                                                                                                                                                  |
| Repeater control signal | TTL-compatible: <ul style="list-style-type: none"><li>1: Transmit</li><li>0: Receive</li></ul> Output resistance: 350R<br>$V_{OL} \leq 0.8\text{ V at } I_{OL} \leq 2\text{ mA}$<br>$V_{OH} \geq 3.5\text{ V at } I_{OH} \leq 1\text{ mA}$ |
| Receive/transmit data   | EIA-RS485 standard                                                                                                                                                                                                                         |

Tab. 7-15: Signal Specification

NOTICE

Danger of destroying output  
"+5V repeater supply" by overload!

Do not short-circuit the output.  
Do not exceed the maximum current.

Diagnostic Displays

For the significance of the diagnostic displays, see firmware documentation.

Technical Data of the Components

7.1.5      CN - CANopen

Display Elements CANopen

| LED | Significance | Color                                                                                      | Description                                                      |
|-----|--------------|--------------------------------------------------------------------------------------------|------------------------------------------------------------------|
| H4  | Run          | <br>Green | Signals operating states; see Functional Description of firmware |
| H5  | Error        | <br>Red   | Signals error states; see Functional Description of firmware     |

Tab.7-16:      Significance of Display Elements for CANopen

Main Features

| Feature                         | CANopen                                                               |
|---------------------------------|-----------------------------------------------------------------------|
| Compatibility                   | According to EN 50325-4                                               |
| Max. possible number of nodes   | 127 nodes                                                             |
| Bus Topology                    | Line topology                                                         |
| Bus terminator (ISO 11898)      | 124 ohm each, 1%, 200 mW; connect at both bus ends to X61.2 and X61.7 |
| Transmission medium             | 2 twisted two-wire lines (4-pin) with shield                          |
| Max. allowed bus (line) lengths | Depending on bit rate                                                 |
| Recommended connection cable    | Our RKS number or third-party type                                    |

Tab.7-17:      Main Features


Bus Lengths Depending on Bit Rates

| Bit rate<br>[kBaud] | Max. allowed network dimension<br>[m] |
|---------------------|---------------------------------------|
| 1000                | 25                                    |
| 800                 | 50                                    |
| 500                 | 100                                   |
| 250                 | 250                                   |
| 125                 | 500                                   |
| 50                  | 1000                                  |
| 20                  | 2500                                  |
| 10                  | 5000                                  |

Tab.7-18:      Network Dimension

## 7.1.6 Sx - Safe Motion

### Display Elements

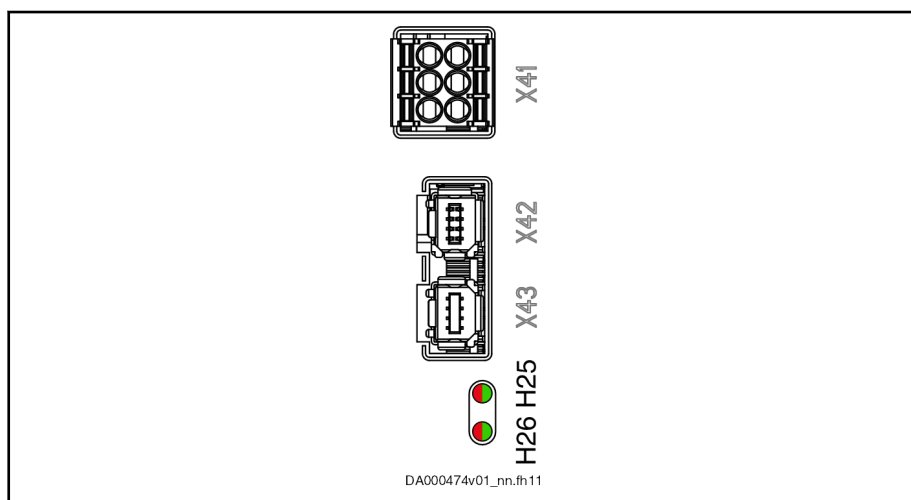

H26, H25 Bicolor LEDs  
Fig. 7-27: Safe Motion, Display Elements

| Color / flashing pattern <sup>1)</sup><br>(preliminary) |                        | H26 (status of connection)                                                                                                                                       | H25 (status of axis)<br>Safety Supervisor State / Event                                                                                                          |
|---------------------------------------------------------|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                         | Off<br>                | <ul style="list-style-type: none"> <li>Not ready</li> <li>Safety bus communication not configured</li> </ul>                                                     | <ul style="list-style-type: none"> <li>Not active</li> <li>Safety bus communication not configured</li> </ul>                                                    |
|                                                         | Flashing green<br>     | Ready and <b>no</b> active connection                                                                                                                            | Active, no connection (safety default)                                                                                                                           |
|                                                         | Green<br>              | Ready and <b>at least one</b> active connection                                                                                                                  | Executing                                                                                                                                                        |
|                                                         | Flashing red-green<br> | <ul style="list-style-type: none"> <li>Waiting for TUNID <sup>2)</sup></li> <li>Self test and initialization</li> <li>Identifying the axis identifier</li> </ul> | <ul style="list-style-type: none"> <li>Waiting for TUNID <sup>2)</sup></li> <li>Self test and initialization</li> <li>Identifying the axis identifier</li> </ul> |
|                                                         | Flashing red<br>       | Faulty abortion of at least one active connection                                                                                                                | Abortion of the connections                                                                                                                                      |
|                                                         | Red<br>                | Critical connection error                                                                                                                                        | Critical error                                                                                                                                                   |

1) Regarding the illustrations of the flashing patterns, one square corresponds to a duration of 250 ms.  
2) TUNID = Target Unique Network Identifier  
Tab. 7-19: LED Displays H26 and H25

Technical Data of the Components

7.1.7      Digital Inputs/Outputs

General Information

The digital inputs/outputs correspond to "IEC 61131".

 Do not operate digital outputs at low-resistance sources!  
In the Functional Description of the firmware, observe the Notes on Commissioning for digital inputs/outputs.

Digital Inputs

Digital Inputs Type A (Standard)

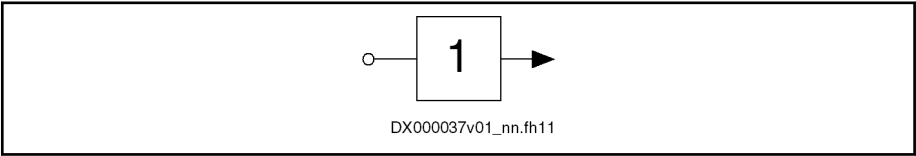


Fig. 7-28:      Symbol

| Data                  | Unit | Min. | Max.                                                                                      |
|-----------------------|------|------|-------------------------------------------------------------------------------------------|
| Allowed input voltage | V    | -3   | 30                                                                                        |
| High                  | V    | 15   | 30                                                                                        |
| Low                   | V    | -3   | 5                                                                                         |
| Current consumption   | mA   | 2    | 5                                                                                         |
| Control delay         | µs   |      | 1000 + position control-<br>ler clock<br>200 + position controller<br>clock <sup>1)</sup> |

1)      Applies to optional I/O extension DA  
Tab. 7-20:      Digital Inputs Type A

Digital Inputs Type B (Probe)

**Function** See "Probe" in the Functional Description of the firmware.  
**Technical Data**


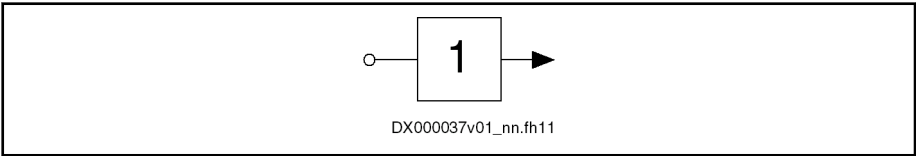


Fig. 7-29: Symbol

| Data                     | Unit    | Min. | Max. |
|--------------------------|---------|------|------|
| Allowed input voltage    | V       | -3   | 30   |
| High                     | V       | 15   | 30   |
| Low                      | V       | -3   | 5    |
| Input current            | mA      | 2    | 5    |
| Pulse width $t_{Puls}$   | $\mu s$ | 4    |      |
| Measuring accuracy $t_x$ | $\mu s$ | -1   | 1    |

Tab. 7-21: Digital Inputs Type B

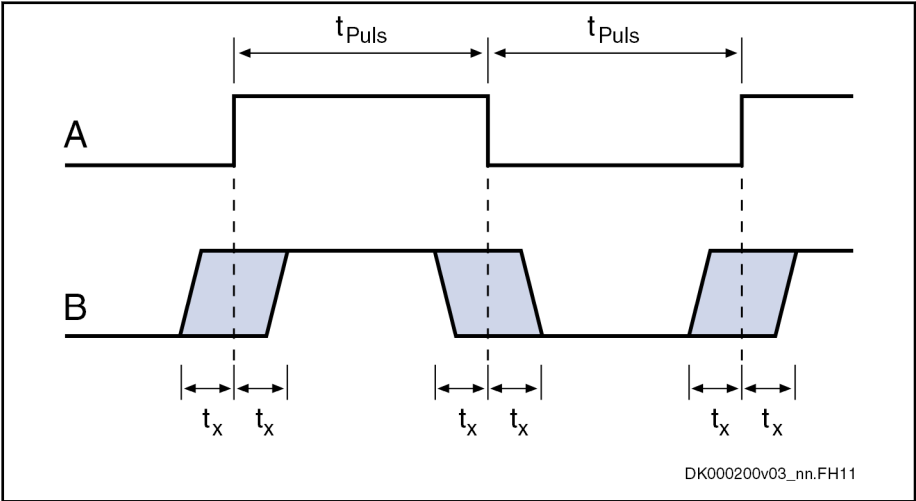

A Signal  
B Signal Detection at Probe Input  
 $t_{Puls}$  Pulse width  
 $t_x$  Measuring accuracy of the signal edges

Fig. 7-30: Signal Detection at Probe Input

**Use** To acquire fast digital input signals.



**Probe inputs** are "fast" inputs. For control use bounce-free switching elements (e.g. electronic switches) to avoid incorrect evaluation.

Technical Data of the Components

Digital Inputs (Safety Technology L Options)

The digital inputs correspond to IEC 61131, type 2.

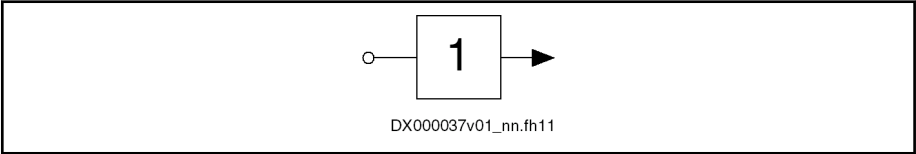


Fig. 7-31: Symbol

| Data                  | Unit | Min. | Max. |
|-----------------------|------|------|------|
| Allowed input voltage | V    | -3   | 30   |
| High                  | V    | 11   | 30   |
| Low                   | V    | -3   | 5    |
| Current consumption   | mA   | 7    | 15   |

Tab. 7-22: Digital Inputs (Safety Technology L Options)

Technical Data of the Components

**Digital Inputs (Safety Technology S Options)**

The digital inputs correspond to IEC 61131, type 1.

| Data                  | Unit | Min. | Max. |
|-----------------------|------|------|------|
| Allowed input voltage | V    | -3   | 30   |
| High                  | V    | 15   | 30   |
| Low                   | V    | -3   | 5    |
| Current consumption   | mA   | 2    | 5    |

Tab. 7-23: Digital Inputs (Safety Technology S Options)



Technical Data of the Components

Digital Outputs

Digital Outputs (Standard)

The digital outputs are compatible with digital inputs of types 1, 2 and 3 (IEC 61131).

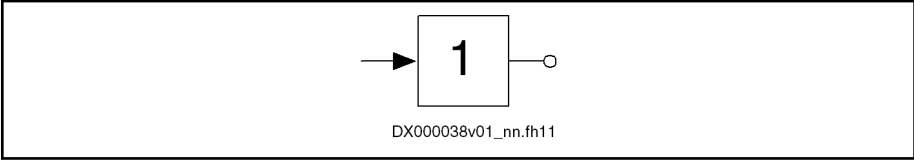


Fig.7-32:      Symbol

| Data                                                                 | Unit | Min.          | Max.                                |
|----------------------------------------------------------------------|------|---------------|-------------------------------------|
| Output voltage ON <sup>1)</sup>                                      | V    | $U_{ext} - 1$ | $U_{ext}$                           |
| Output current OFF                                                   | mA   |               | 0,05                                |
| Output current ON                                                    | mA   |               | 500                                 |
| Sum of output currents <sup>2)</sup>                                 | mA   |               | <div>■ 1000</div> <div>■ 2000</div> |
| Allowed energy content of connected inductive loads <sup>3) 4)</sup> | mJ   |               | <div>■ 500</div> <div>■ 200</div>   |
| Control delay                                                        | µs   |               | 800<br>200 <sup>5)</sup>            |
| Short circuit protection                                             |      | Present       |                                     |
| Overload protection                                                  |      | Present       |                                     |

- 1)
- $U_{ext}$ : Supply voltage
- 2)
- When several outputs supply current simultaneously, the maximum allowed total current of these outputs must be taken into account. According to the number of outputs, the total current must be related to 4 or 8 outputs.
- 3)
- In the case of inductive loads with a greater energy content, an external free-wheeling arm must be installed. The effective terminal voltage must be < 25 V.
- 4)
- The maximum energy content depends on the switching frequency f of the outputs
- 5)
- Applies to optional I/O extension DA

Tab.7-24:      Digital Outputs



- The digital outputs have been realized with high-side switches. This means that these outputs only can actively supply current.
- The energy absorption capacity of the outputs is used to limit voltage peaks caused when inductive loads are switched off.  
Limit voltage peaks by using free-wheeling diodes directly at the relay coil.

Technical Data of the Components

Digital Outputs (Safety Technology L Options)

The digital outputs are compatible with digital inputs of types 1, 2 and 3 (IEC 61131).

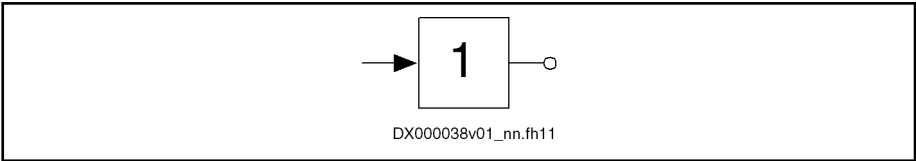


Fig.7-33: Symbol


| Data                                                                                                | Unit | Min.      | Max. |
|-----------------------------------------------------------------------------------------------------|------|-----------|------|
| Supply voltage ( $U_{ext}$ )                                                                        | V    | 19,2      | 30   |
| Current consumption ( $I_{ext}$ )                                                                   | mA   |           | 700  |
| Output voltage ON                                                                                   | V    | 18,2      | 30   |
| Output voltage OFF                                                                                  | V    |           | 5    |
| Output current ON                                                                                   | mA   |           | 350  |
| Allowed energy content of connected inductive loads, e.g. relay coils; only allowed as single pulse | mJ   |           | 400  |
| Short circuit protection                                                                            |      | Available |      |
| Overload protection                                                                                 |      | Available |      |

Tab.7-25: Digital Outputs (Safety Technology L Options)

Technical Data of the Components

Digital Outputs (Safety Technology S Options)

The digital outputs are compatible with digital inputs of types 1, 2 and 3 (IEC 61131).
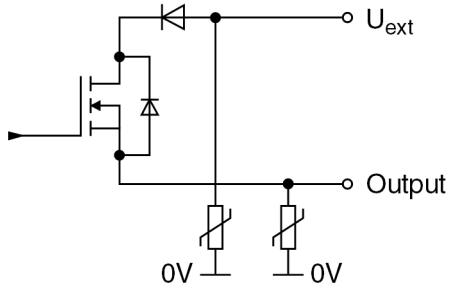
| Data                                                                                                | Unit                                                                                                                                                                                                                                                                                                                                                                             | Min.          | Max.                 |
|-----------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|----------------------|
| Output voltage ON                                                                                   | V                                                                                                                                                                                                                                                                                                                                                                                | $U_{ext} - 1$ | $U_{ext}$            |
| Output voltage OFF                                                                                  | V                                                                                                                                                                                                                                                                                                                                                                                |               | 2                    |
| Allowed output current per output                                                                   | mA                                                                                                                                                                                                                                                                                                                                                                               |               | 350                  |
| Allowed energy content of connected inductive loads, e.g. relay coils; only allowed as single pulse | mJ                                                                                                                                                                                                                                                                                                                                                                               |               | 400 <sup>1) 2)</sup> |
| Short circuit protection                                                                            |                                                                                                                                                                                                                                                                                                                                                                                  | Available     |                      |
| Overload protection                                                                                 |                                                                                                                                                                                                                                                                                                                                                                                  | Available     |                      |
| Block diagram output:                                                                               |                                                                                                                                                                                                                                                                                               |               |                      |
| Error Detection                                                                                     | <p>The following errors are detected:</p> <ul style="list-style-type: none"><li>• Wiring error with short circuit to high</li><li>• Wiring error with short circuit to low</li><li>• Wiring error with short circuit between the two channels</li><li>• Internal errors</li></ul> <p>In the case of an error, the control panel shows the corresponding error message: F83xx</p> |               |                      |

1)


2)

With a maximum switching frequency of 1 Hz  
In the case of inductive loads with currents > 200 mA or in the case of inductive loads with a greater energy content, an external free-wheeling arm must be installed. The effective terminal voltage must be < 25 V.

Tab. 7-26:      Digital Outputs

Technical Data of the Components


Time Behavior

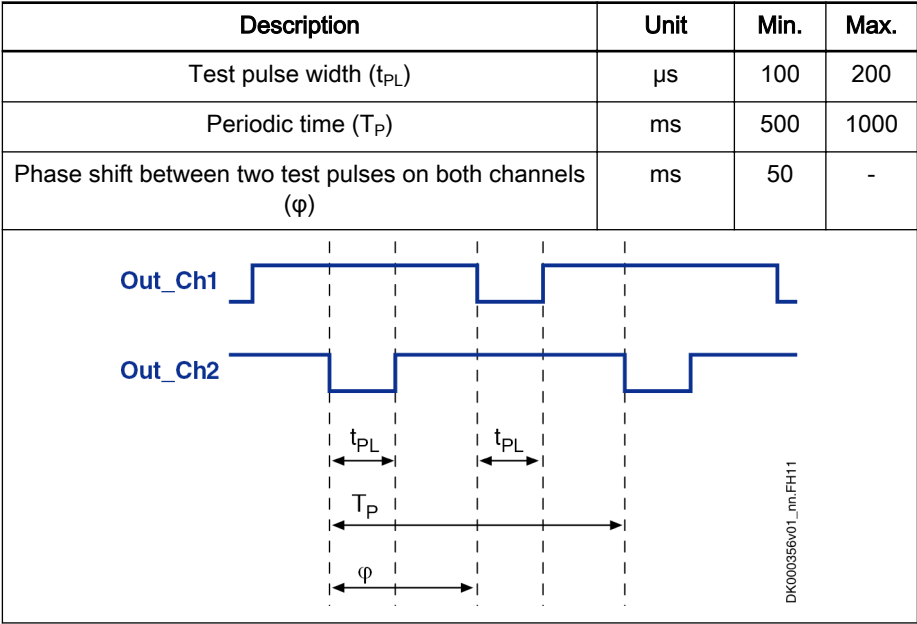

Tab.7-27: Time Behavior

Technical Data of the Components

7.1.8      Analog Voltage Input

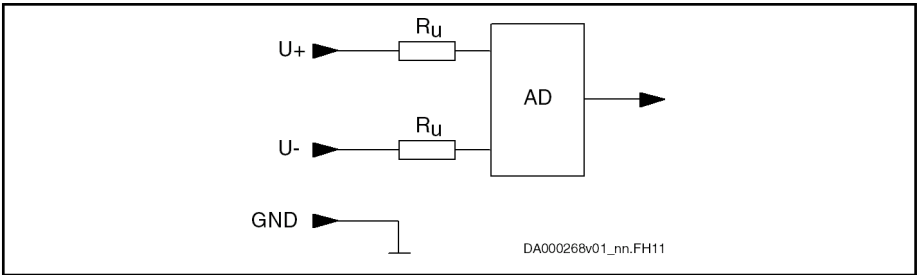


AD      Analog/digital converter  
Fig. 7-34:      Analog Voltage Input

| Data                                           | Unit | Min.                                                       | Typ.                                 | Max. |
|------------------------------------------------|------|------------------------------------------------------------|--------------------------------------|------|
| Allowed input voltage                          | V    | -30                                                        |                                      | +30  |
| Working range input voltage $U_{on\_work}$     | V    | -10                                                        |                                      | +10  |
| Input resistance $R_u$                         | kΩ   | 150                                                        |                                      | 300  |
| Input bandwidth (-3 dB)                        | kHz  |                                                            | 1,3                                  |      |
| Common-mode range                              | V    | -30                                                        |                                      | +30  |
| Common-mode rejection                          | dB   | 50                                                         |                                      |      |
| Relative measuring error at 90% $U_{on\_work}$ | %    | -1                                                         |                                      | +1   |
| Resolution                                     | Bit  |                                                            | 14 <sup>1)</sup><br>13 <sup>2)</sup> |      |
| Cables                                         |      | For cable lengths > 30 m, only use <b>shielded</b> cables. |                                      |      |

- 1)
- Applies to: Cxx02 control sections (X32), optional I/O extension DA (X38), HCS01 drive controllers (X32)
- 2)
- Applies to: Control sections with extended scope CSx02.1B (X35), CDB02.1B (X36)

Tab. 7-28:      Analog Voltage Input

7.1.9 Analog Current Input

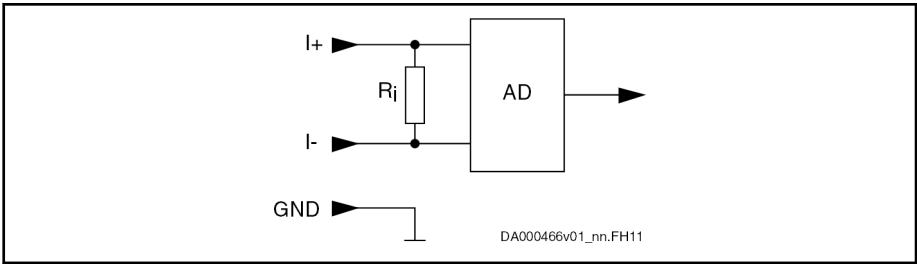

AD Analog/digital converter  
Fig. 7-35: Analog Current Input

| Data                                       | Unit     | Min.                                                | Typ.                                 | Max. |
|--------------------------------------------|----------|-----------------------------------------------------|--------------------------------------|------|
| Allowed input current                      | mA       | 0                                                   |                                      | +35  |
| Working range input current $I_{on\_work}$ | mA       | 0                                                   |                                      | +20  |
| Input resistance $R_i$                     | $\Omega$ |                                                     |                                      | 300  |
| Input bandwidth (-3 dB)                    | kHz      |                                                     | 1,3                                  |      |
| Common-mode range                          | V        | -30                                                 |                                      | +30  |
| Common-mode rejection                      | dB       | 50                                                  |                                      |      |
| Resolution                                 | Bit      |                                                     | 12 <sup>1)</sup><br>11 <sup>2)</sup> |      |
| Cables                                     |          | For cable lengths > 30 m, only use shielded cables. |                                      |      |

1) Applies to: Optional I/O extension DA (X38)  
2) Applies to: Control sections with extended scope CSx02.1B (X35), CDB02.1B (X36)  
Tab. 7-29: Analog Current Input

## Technical Data of the Components

## 7.1.10 Analog Output

| Data                                           | Unit    | min                                             | Typ. | max                      |
|------------------------------------------------|---------|-------------------------------------------------|------|--------------------------|
| Output voltage                                 | V       | -10                                             |      | +10                      |
| Output load, ohmic                             | kΩ      | 2                                               |      |                          |
| Output load, capacitive                        | nF      |                                                 |      | 100                      |
| Resolution                                     | mV/incr | 24                                              |      |                          |
| Conversion time (incl. response time)          | μs      |                                                 |      | 750<br>250 <sup>1)</sup> |
| Output clock                                   |         | Position controller clock                       |      |                          |
| Precision (in relation to the measuring range) |         | ±0.5% with load ≥ 10 kΩ<br>±1% with load ≥ 2 kΩ |      |                          |
| Short circuit protection                       |         | Present                                         |      |                          |
| Overload protection                            |         | Present                                         |      |                          |

1) Applies to optional I/O extension DA  
 Tab. 7-30: Analog Outputs

7.1.11 Relay Contacts  
Relay Contact Type 2

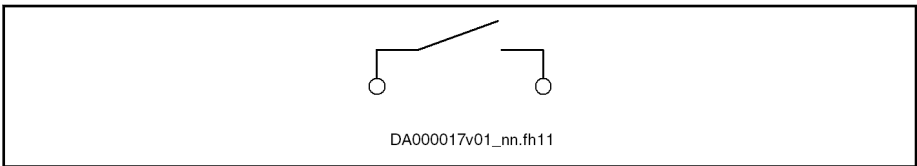


Fig.7-36: Relay contact

| Data                                            | Unit | Min.  | Typ.                | Max. |
|-------------------------------------------------|------|-------|---------------------|------|
| Current carrying capacity                       | mA   | 10    |                     | 1000 |
| Voltage load capacity                           | V    |       |                     | 30   |
| Contact resistance at minimum current           | mΩ   |       |                     | 1000 |
| Switching actions at max. time constant of load |      |       | 1 × 10 <sup>6</sup> |      |
| Number of mechanical switching cycles           |      |       | 1 × 10 <sup>8</sup> |      |
| Time constant of load                           | ms   | ohmic |                     |      |
| Pick up delay                                   | ms   |       |                     | 10   |
| Drop out delay                                  | ms   |       |                     | 10   |

Tab.7-31: Relay Contacts Type 2



## Technical Data of the Components

## 7.2 Control Panel

### 7.2.1 Design

#### Standard Control Panel HAP01.1N



For a detailed description of the control panel, see the documentation "Application Manual, Functions" of the firmware used.

In the future, the standard control panel HAP01.1N will be replaced by the standard control panel HAP01.1E.



Fig. 7-37: Standard Control Panel HAP01.1N

**Description**

The standard control panel

- has a single-line display
- must have been plugged in when the drive controller is switched on so that it can be recognized (not suited for hot plug)
- can be used as programming module
- The **display** shows operating states, command and error diagnoses and pending warnings.
- Using the four **keys**, the commissioning engineer or service technician can have extended diagnoses displayed and trigger simple commands.
- Memory
  - 400 kbytes for MLD boot program
  - 492 bytes for MLD retain variables

## ADVANCED Control Panel HAP01.1A



For a detailed description of the control panel, see the documentation "Application Manual, Functions" of the firmware used.

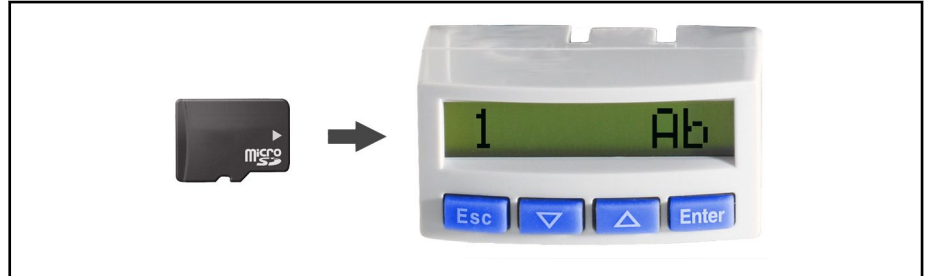


Fig. 7-38: ADVANCED Control Panel HAP01.1A

- Description** The ADVANCED control panel HAP01.1A
- has a slot for a **microSD memory card (PFM04.1)**
  - has a single-line display
  - is suited for hot plug
  - can be used as programming module
  - The **display** shows operating states, command and error diagnoses and pending warnings.
  - Using the four **keys**, the commissioning engineer or service technician can have extended diagnoses displayed and trigger simple commands.
  - Memory:
    - 2 MB (data, flash memory)
    - 16 MB (code, flash memory)
    - 32 kB (retain data, FRAM memory)

## Technical Data of the Components

## 7.3 Power Section

### 7.3.1 Control Voltage

#### Data for Control Voltage Supply

| Description                                                                                               | Symbol                | Unit | HCS01.1E<br>-W0003-<br>_02 | HCS01.1E<br>-W0006-<br>_02 | HCS01.1E<br>-W0009-<br>_02 | HCS01.1E<br>-W0013-<br>_02 | HCS01.1E<br>-W0018-<br>_02 |
|-----------------------------------------------------------------------------------------------------------|-----------------------|------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|
| Rated control voltage input <sup>1)</sup>                                                                 | U <sub>N3</sub>       | V    | 24 ± 20%                   |                            |                            |                            |                            |
| Control voltage when using motor holding brake with motor cable length < 50 m (HCS01< 40 m) <sup>2)</sup> | U <sub>N3</sub>       | V    | 24 ± 5%                    |                            |                            |                            |                            |
| Control voltage when using motor holding brake with motor cable length > 50 m <sup>3)</sup>               | U <sub>N3</sub>       | V    | 26 ± 5%                    |                            |                            |                            |                            |
| Maximum inrush current at 24V supply                                                                      | I <sub>EIN3_max</sub> | A    | 3,30                       |                            |                            |                            |                            |
| Pulse width of I <sub>EIN3</sub>                                                                          | t <sub>EIN3Lade</sub> | ms   | 2                          |                            |                            |                            |                            |
| Input capacitance                                                                                         | C <sub>N3</sub>       | mF   | 0,04                       |                            |                            |                            |                            |
| Rated power consumption control voltage input at U <sub>N3</sub> <sup>4)</sup>                            | P <sub>N3</sub>       | W    | 27                         |                            | 28                         |                            | 34                         |
| Last modification: 2012-01-23                                                                             |                       |      |                            |                            |                            |                            |                            |

1) 2) 3)  
4)

Observe supply voltage for motor holding brakes  
HMS, HMD, HCS: Plus motor holding brake and control section, plus safety option; HCS01: Including control section, plus safety option; KCU: Maximum power consumption from 24V supply; KSM/KMS: Including motor holding brake (if available), plus power consumption of externally connected inputs/outputs, plus safety option

Tab. 7-32: HCS - Data for Control Voltage Supply

#### Data for Control Voltage Supply

| Description                                                                                               | Symbol                | Unit | HCS01.1E<br>-W0005-<br>_03 | HCS01.1E<br>-W0008-<br>_03 | HCS01.1E<br>-W0018-<br>_03 | HCS01.1E<br>-W0028-<br>_03 | HCS01.1E<br>-W0054-<br>_03 |
|-----------------------------------------------------------------------------------------------------------|-----------------------|------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|
| Rated control voltage input <sup>1)</sup>                                                                 | U <sub>N3</sub>       | V    | 24 ± 20%                   |                            |                            |                            |                            |
| Control voltage when using motor holding brake with motor cable length < 50 m (HCS01< 40 m) <sup>2)</sup> | U <sub>N3</sub>       | V    | 24 ± 5%                    |                            |                            |                            |                            |
| Control voltage when using motor holding brake with motor cable length > 50 m <sup>3)</sup>               | U <sub>N3</sub>       | V    | 26 ± 5%                    |                            |                            |                            |                            |
| Maximum inrush current at 24V supply                                                                      | I <sub>EIN3_max</sub> | A    | 3,30                       |                            |                            |                            | 4,50                       |
| Pulse width of I <sub>EIN3</sub>                                                                          | t <sub>EIN3Lade</sub> | ms   | 2                          |                            |                            |                            |                            |
| Last modification: 2012-01-23                                                                             |                       |      |                            |                            |                            |                            |                            |

## Technical Data of the Components

| Description                                                                       | Symbol          | Unit | HCS01.1E<br>-W0005-<br>_03 | HCS01.1E<br>-W0008-<br>_03 | HCS01.1E<br>-W0018-<br>_03 | HCS01.1E<br>-W0028-<br>_03 | HCS01.1E<br>-W0054-<br>_03 |
|-----------------------------------------------------------------------------------|-----------------|------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|
| Input capacitance                                                                 | C <sub>N3</sub> | mF   | 0,04                       |                            |                            |                            | 0,06                       |
| Rated power consumption control<br>voltage input at U <sub>N3</sub> <sup>4)</sup> | P <sub>N3</sub> | W    | 27                         | 28                         | 34                         |                            | 45                         |
| Last modification: 2012-01-23                                                     |                 |      |                            |                            |                            |                            |                            |

1) 2) 3)  
4)

Observe supply voltage for motor holding brakes  
HMS, HMD, HCS: Plus motor holding brake and control section, plus safety option; HCS01: Including control section, plus safety option; KCU: Maximum power consumption from 24V supply; KSM/KMS: Including motor holding brake (if available), plus power consumption of externally connected inputs/outputs, plus safety option

Tab. 7-33: HCS - Data for Control Voltage Supply



### Overvoltage

Overvoltage greater than 33 V has to be discharged by means of the appropriate electrical equipment of the machine or installation.

This includes:

- 24V power supply units that reduce incoming overvoltage to the allowed value.
- Overvoltage limiters at the control cabinet input that limit existing overvoltage to the allowed value. This, too, applies to long 24V lines that have been run in parallel to power cables and mains cables and can absorb overvoltage by inductive or capacitive coupling.

## 7.3.2 Mains Voltage

### Data for Mains Voltage Supply

| Description                                         | Symbol               | Unit  | HCS01.1E<br>-W0003-<br>_02 | HCS01.1E<br>-W0006-<br>_02 | HCS01.1E<br>-W0009-<br>_02 | HCS01.1E<br>-W0013-<br>_02 | HCS01.1E<br>-W0018-<br>_02 |
|-----------------------------------------------------|----------------------|-------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|
| Mains frequency                                     | f <sub>LN</sub>      | Hz    | 50...60                    |                            |                            |                            |                            |
| Tolerance input frequency                           |                      | Hz    | ± 2                        |                            |                            |                            |                            |
| Maximum allowed mains frequency change              | Δf <sub>LN</sub> /Δt | Hz/s  | 2                          |                            |                            |                            |                            |
| Rotary field condition                              |                      |       | None                       |                            |                            |                            |                            |
| Short circuit current rating                        | SCCR                 | A rms | 42000                      |                            |                            |                            |                            |
| Nominal mains voltage                               | U <sub>LN_nenn</sub> | V     | 3 AC 230                   |                            |                            |                            |                            |
| Mains voltage single-phase                          | U <sub>LN</sub>      | V     | 110...230                  |                            |                            |                            |                            |
| Mains voltage three-phase at TN-S, TN-C, TT mains   | U <sub>LN</sub>      | V     | 110...230                  |                            |                            |                            |                            |
| Mains voltage three-phase at IT mains <sup>1)</sup> | U <sub>LN</sub>      | V     | 110...230                  |                            |                            |                            |                            |
| Last modification: 2012-06-28                       |                      |       |                            |                            |                            |                            |                            |

## Technical Data of the Components

| Description                                                                                                                              | Symbol                           | Unit | HCS01.1E<br>-W0003-<br>_02 | HCS01.1E<br>-W0006-<br>_02 | HCS01.1E<br>-W0009-<br>_02 | HCS01.1E<br>-W0013-<br>_02 | HCS01.1E<br>-W0018-<br>_02 |
|------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------|------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|
| Mains voltage three-phase at Cor-<br>ner-grounded-Delta mains <sup>2)</sup>                                                              | U <sub>LN</sub>                  | V    | 110...230                  |                            |                            |                            |                            |
| Tolerance U <sub>LN</sub>                                                                                                                |                                  | %    | ± 10                       |                            |                            |                            |                            |
| Minimum short circuit power of the<br>mains for failure-free operation                                                                   | S <sub>k_min</sub>               | MVA  | 0,02                       | 0,03                       | 0,05                       | 0,1                        | 0,2                        |
| Minimum inductance of the mains<br>supply (inductance of mains<br>phase) <sup>3)</sup>                                                   | L <sub>min</sub>                 | µH   | 40                         |                            |                            |                            |                            |
| Assigned type of mains choke                                                                                                             |                                  |      | -                          |                            |                            |                            |                            |
| Inrush current                                                                                                                           | I <sub>L_trans_max<br/>_on</sub> | A    | See figure                 |                            |                            |                            |                            |
| Maximum allowed ON-OFF cycles<br>per minute <sup>4)</sup>                                                                                |                                  |      | 1                          |                            |                            |                            |                            |
| Mains input continuous current at<br>U <sub>LN_nenn</sub> and P <sub>DC_cont</sub> (single-<br>phase, without mains choke) <sup>5)</sup> | I <sub>LN</sub>                  | A    | 1,80                       | 2,80                       | 5,00                       | 8,30                       | 12,80                      |
| Mains input continuous current at<br>U <sub>LN_nenn</sub> and P <sub>DC_cont</sub> (three-phase,<br>without mains choke) <sup>6)</sup>   | I <sub>LN</sub>                  | A    | 0,60                       | 1,20                       | 2,30                       | 4,50                       | 9,60                       |
| Mains input continuous current at<br>U <sub>LN_nenn</sub> and P <sub>DC_cont</sub> (single-<br>phase, with mains choke) <sup>7)</sup>    | I <sub>LN</sub>                  | A    | -                          |                            |                            |                            |                            |
| Mains input continuous current at<br>U <sub>LN_nenn</sub> and P <sub>DC_cont</sub> (three-phase,<br>with mains choke) <sup>8)</sup>      | I <sub>LN</sub>                  | A    | -                          |                            |                            |                            |                            |
| Nominal current AC1 for mains<br>contactor at nom. data                                                                                  |                                  |      | ILN                        |                            |                            |                            |                            |
| Mains fuse according to<br>EN 60204-1 (single-phase, with-<br>out mains choke)                                                           |                                  | A    | 4;gG                       |                            | 6;gG                       | 10;gG                      | 16;gG                      |
| Mains fuse according to<br>EN 60204-1 (three-phase, without<br>mains choke)                                                              |                                  | A    | 2;gG                       |                            | 4;gG                       | 6;gG                       | 16;gG                      |
| Mains fuse according to<br>EN 60204-1 (single-phase, with<br>mains choke)                                                                |                                  | A    | -                          |                            |                            |                            |                            |
| Mains fuse according to<br>EN 60204-1 (three-phase, with<br>mains choke)                                                                 |                                  | A    | -                          |                            |                            |                            |                            |
| Required wire size in accordance<br>with NFPA 79 and UL 508 A (in-<br>ternal wiring); <sup>9)</sup>                                      | A <sub>LN</sub>                  | AWG  | AWG 14                     |                            |                            |                            |                            |
| Last modification: 2012-06-28                                                                                                            |                                  |      |                            |                            |                            |                            |                            |

Technical Data of the Components

| Description                                                                                                              | Symbol             | Unit | HCS01.1E<br>-W0003-<br>_02 | HCS01.1E<br>-W0006-<br>_02 | HCS01.1E<br>-W0009-<br>_02 | HCS01.1E<br>-W0013-<br>_02 | HCS01.1E<br>-W0018-<br>_02 |
|--------------------------------------------------------------------------------------------------------------------------|--------------------|------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|
| Mains connection power at $U_{LN\_nenn}$ and $P_{DC\_cont}$ (three-phase, without mains choke)                           | $S_{LN}$           | kVA  | 0,30                       | 0,53                       | 0,92                       | 1,55                       | 3,52                       |
| Mains connection power at $U_{LN\_nenn}$ and $P_{DC\_cont}$ (three-phase, with mains choke)                              | $S_{LN}$           | kVA  | -                          |                            |                            |                            |                            |
| Mains connection power at $U_{LN\_nenn}$ and $P_{DC\_cont}$ (single-phase, without mains choke)                          | $S_{LN}$           | kVA  | tbd                        |                            |                            |                            |                            |
| Mains connection power at $U_{LN\_nenn}$ and $P_{DC\_cont}$ (single-phase, with mains choke)                             | $S_{LN}$           | kVA  | -                          |                            |                            |                            |                            |
| Power factor TPF ( $\lambda_L$ ) at $U_{LN\_nenn}$ and $P_{DC\_cont}$ (single-phase, without mains choke) <sup>10)</sup> | TPF                |      | 0,29                       | 0,32                       | 0,35                       | 0,37                       | 0,49                       |
| Power factor TPF ( $\lambda_L$ ) at $U_{LN\_nenn}$ and $P_{DC\_cont}$ (three-phase, without mains choke) <sup>11)</sup>  | TPF                |      | 0,47                       |                            | 0,52                       | 0,56                       | 0,52                       |
| Power factor TPF ( $\lambda_L$ ) at $U_{LN\_nenn}$ and $P_{DC\_cont}$ (single-phase, with mains choke) <sup>12)</sup>    | TPF                |      | -                          |                            |                            |                            |                            |
| Power factor TPF ( $\lambda_L$ ) at $U_{LN\_nenn}$ and $P_{DC\_cont}$ (three-phase, with mains choke) <sup>13)</sup>     | TPF                |      | -                          |                            |                            |                            |                            |
| Power factor TPF ( $\lambda_L$ ) at $U_{LN\_nenn}$ and 10% $P_{DC\_cont}$ (single-phase, without mains choke)            | TPF <sub>10%</sub> |      | tbd                        |                            |                            |                            |                            |
| Power factor TPF ( $\lambda_L$ ) at $U_{LN\_nenn}$ and 10% $P_{DC\_cont}$ (three-phase, without mains choke)             | TPF <sub>10%</sub> |      | 0,28                       | 0,33                       | 0,38                       | 0,40                       | 0,37                       |
| Power factor TPF ( $\lambda_L$ ) at $U_{LN\_nenn}$ and 10% $P_{DC\_cont}$ (single-phase, with mains choke)               | TPF <sub>10%</sub> |      | -                          |                            |                            |                            |                            |
| Power factor TPF ( $\lambda_L$ ) at $U_{LN\_nenn}$ and 10% $P_{DC\_cont}$ (three-phase, with mains choke)                | TPF <sub>10%</sub> |      | -                          |                            |                            |                            |                            |
| Power factor of fundamental component DPF at $P_{DC\_cont}$ (single-phase, without mains choke)                          | $\cos\varphi^{h1}$ |      | tbd                        |                            |                            |                            |                            |
| Power factor of fundamental component DPF at $P_{DC\_cont}$ (three-phase, without mains choke)                           | $\cos\varphi^{h1}$ |      | 0,99                       |                            |                            |                            |                            |
| Last modification: 2012-06-28                                                                                            |                    |      |                            |                            |                            |                            |                            |

## Technical Data of the Components

| Description                                                                                        | Symbol             | Unit | HCS01.1E<br>-W0003-<br>_02 | HCS01.1E<br>-W0006-<br>_02 | HCS01.1E<br>-W0009-<br>_02 | HCS01.1E<br>-W0013-<br>_02 | HCS01.1E<br>-W0018-<br>_02 |
|----------------------------------------------------------------------------------------------------|--------------------|------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|
| Power factor of fundamental component DPF at P <sub>DC_cont</sub> (single-phase, with mains choke) | cosφ <sup>h1</sup> |      | -                          |                            |                            |                            |                            |
| Power factor of fundamental component DPF at P <sub>DC_cont</sub> (three-phase, with mains choke)  | cosφ <sup>h1</sup> |      | -                          |                            |                            |                            |                            |
| Last modification: 2012-06-28                                                                      |                    |      |                            |                            |                            |                            |                            |

- 1) 2) Mains voltage >  $U_{LN}$ : Use a transformer with grounded neutral point, don't use autotransformers!  
 3) Otherwise use mains choke HNL  
 4) Observe allowed number of switch-on processes; without external capacitors at the DC bus  
 5) 6) 7) 8) 10) Find interim values by interpolation  
 11) 12) 13)  
 9) Copper wire; PVC-insulation (conductor temperature 90 °C;  $T_a \leq 40$  °C) in accordance with NFPA 79 chapter 12 and UL 508A chapter 28

Tab. 7-34: HCS - Data for Mains Voltage Supply

## Data for Mains Voltage Supply

| Description                                                                      | Symbol               | Unit  | HCS01.1E<br>-W0005-<br>_03 | HCS01.1E<br>-W0008-<br>_03 | HCS01.1E<br>-W0018-<br>_03 | HCS01.1E<br>-W0028-<br>_03 | HCS01.1E<br>-W0054-<br>_03 |
|----------------------------------------------------------------------------------|----------------------|-------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|
| Mains frequency                                                                  | f <sub>LN</sub>      | Hz    | 50...60                    |                            |                            |                            |                            |
| Tolerance input frequency                                                        |                      | Hz    | ± 2                        |                            |                            |                            |                            |
| Maximum allowed mains frequency change                                           | Δf <sub>LN</sub> /Δt | Hz/s  | 2                          |                            |                            |                            |                            |
| Rotary field condition                                                           |                      |       | None                       |                            |                            |                            |                            |
| Short circuit current rating                                                     | SCCR                 | A rms | 42000                      |                            |                            |                            |                            |
| Nominal mains voltage                                                            | U <sub>LN_nenn</sub> | V     | 3 AC 400                   |                            |                            |                            |                            |
| Mains voltage single-phase                                                       | U <sub>LN</sub>      | V     | Not allowed                |                            |                            |                            |                            |
| Mains voltage three-phase at TN-S, TN-C, TT mains                                | U <sub>LN</sub>      | V     | 200...500                  |                            |                            |                            |                            |
| Mains voltage three-phase at IT mains <sup>1)</sup>                              | U <sub>LN</sub>      | V     | 200...230                  |                            |                            |                            |                            |
| Mains voltage three-phase at Corner-grounded-Delta mains <sup>2)</sup>           | U <sub>LN</sub>      | V     | 200...230                  |                            |                            |                            |                            |
| Tolerance U <sub>LN</sub>                                                        |                      | %     | ± 10                       |                            |                            |                            |                            |
| Minimum short circuit power of the mains for failure-free operation              | S <sub>k_min</sub>   | MVA   | 0,05                       | 0,1                        | 0,2                        | 0,3                        | 0,9                        |
| Minimum inductance of the mains supply (inductance of mains phase) <sup>3)</sup> | L <sub>min</sub>     | μH    | 40                         |                            |                            |                            |                            |
| Last modification: 2012-06-28                                                    |                      |       |                            |                            |                            |                            |                            |

Technical Data of the Components

| Description                                                                                                           | Symbol                  | Unit | HCS01.1E<br>-W0005-<br>_03 | HCS01.1E<br>-W0008-<br>_03 | HCS01.1E<br>-W0018-<br>_03 | HCS01.1E<br>-W0028-<br>_03                     | HCS01.1E<br>-W0054-<br>_03                     |
|-----------------------------------------------------------------------------------------------------------------------|-------------------------|------|----------------------------|----------------------------|----------------------------|------------------------------------------------|------------------------------------------------|
| Assigned type of mains choke                                                                                          |                         |      | -                          |                            |                            | HNL01.1E<br>-1000-<br>N0012-<br>A-500-<br>NNNN | HNL01.1E<br>-0600-<br>N0032-<br>A-500-<br>NNNN |
| Inrush current                                                                                                        | $I_{L\_trans\_max\_on}$ | A    | See figure                 |                            |                            |                                                |                                                |
| Maximum allowed ON-OFF cycles per minute <sup>4)</sup>                                                                |                         |      | 1                          |                            |                            |                                                |                                                |
| Mains input continuous current at $U_{LN\_nenn}$ and $P_{DC\_cont}$ (single-phase, without mains choke) <sup>5)</sup> | $I_{LN}$                | A    | -                          |                            |                            |                                                |                                                |
| Mains input continuous current at $U_{LN\_nenn}$ and $P_{DC\_cont}$ (three-phase, without mains choke) <sup>6)</sup>  | $I_{LN}$                | A    | 1,50                       | 2,50                       | 5,00                       | 8,00                                           | 25,00                                          |
| Mains input continuous current at $U_{LN\_nenn}$ and $P_{DC\_cont}$ (single-phase, with mains choke) <sup>7)</sup>    | $I_{LN}$                | A    | -                          |                            |                            |                                                |                                                |
| Mains input continuous current at $U_{LN\_nenn}$ and $P_{DC\_cont}$ (three-phase, with mains choke) <sup>8)</sup>     | $I_{LN}$                | A    | -                          |                            | tbd                        | 10,00                                          | 28,00                                          |
| Nominal current AC1 for mains contactor at nom. data                                                                  |                         |      | ILN                        |                            |                            |                                                |                                                |
| Mains fuse according to EN 60204-1 (single-phase, without mains choke)                                                |                         | A    | -                          |                            |                            |                                                |                                                |
| Mains fuse according to EN 60204-1 (three-phase, without mains choke)                                                 |                         | A    | 2;gG                       | 4;gG                       | 6;gG                       | 10;gG                                          | 32;gG                                          |
| Mains fuse according to EN 60204-1 (single-phase, with mains choke)                                                   |                         | A    | -                          |                            |                            |                                                |                                                |
| Mains fuse according to EN 60204-1 (three-phase, with mains choke)                                                    |                         | A    | -                          |                            | tbd                        | 16;gG                                          | 32;gG                                          |
| Required wire size in accordance with NFPA 79 and UL 508 A (internal wiring), <sup>9)</sup>                           | $A_{LN}$                | AWG  | AWG 14                     |                            |                            |                                                | AWG 10                                         |
| Mains connection power at $U_{LN\_nenn}$ and $P_{DC\_cont}$ (three-phase, without mains choke)                        | $S_{LN}$                | kVA  | 1,00                       | 1,54                       | 3,50                       | 4,90                                           | 16,00                                          |

Last modification: 2012-06-28



## Technical Data of the Components

| Description                                                                                                              | Symbol             | Unit | HCS01.1E<br>-W0005-<br>_03 | HCS01.1E<br>-W0008-<br>_03 | HCS01.1E<br>-W0018-<br>_03 | HCS01.1E<br>-W0028-<br>_03 | HCS01.1E<br>-W0054-<br>_03 |
|--------------------------------------------------------------------------------------------------------------------------|--------------------|------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|
| Mains connection power at $U_{LN\_nenn}$ and $P_{DC\_cont}$ (three-phase, with mains choke)                              | $S_{LN}$           | kVA  | -                          |                            | tbd                        | 5,50                       | 18,00                      |
| Mains connection power at $U_{LN\_nenn}$ and $P_{DC\_cont}$ (single-phase, without mains choke)                          | $S_{LN}$           | kVA  | -                          |                            |                            |                            |                            |
| Mains connection power at $U_{LN\_nenn}$ and $P_{DC\_cont}$ (single-phase, with mains choke)                             | $S_{LN}$           | kVA  | -                          |                            |                            |                            |                            |
| Power factor TPF ( $\lambda_L$ ) at $U_{LN\_nenn}$ and $P_{DC\_cont}$ (single-phase, without mains choke) <sup>10)</sup> | TPF                |      | -                          |                            |                            |                            |                            |
| Power factor TPF ( $\lambda_L$ ) at $U_{LN\_nenn}$ and $P_{DC\_cont}$ (three-phase, without mains choke) <sup>11)</sup>  | TPF                |      | 0,49                       | 0,56                       | 0,52                       | 0,53                       | 0,56                       |
| Power factor TPF ( $\lambda_L$ ) at $U_{LN\_nenn}$ and $P_{DC\_cont}$ (single-phase, with mains choke) <sup>12)</sup>    | TPF                |      | -                          |                            |                            |                            |                            |
| Power factor TPF ( $\lambda_L$ ) at $U_{LN\_nenn}$ and $P_{DC\_cont}$ (three-phase, with mains choke) <sup>13)</sup>     | TPF                |      | -                          |                            | tbd                        | 0,72                       | 0,78                       |
| Power factor TPF ( $\lambda_L$ ) at $U_{LN\_nenn}$ and 10% $P_{DC\_cont}$ (single-phase, without mains choke)            | TPF <sub>10%</sub> |      | -                          |                            |                            |                            |                            |
| Power factor TPF ( $\lambda_L$ ) at $U_{LN\_nenn}$ and 10% $P_{DC\_cont}$ (three-phase, without mains choke)             | TPF <sub>10%</sub> |      | 0,30                       | 0,35                       | 0,38                       | 0,40                       | 0,45                       |
| Power factor TPF ( $\lambda_L$ ) at $U_{LN\_nenn}$ and 10% $P_{DC\_cont}$ (single-phase, with mains choke)               | TPF <sub>10%</sub> |      | -                          |                            |                            |                            |                            |
| Power factor TPF ( $\lambda_L$ ) at $U_{LN\_nenn}$ and 10% $P_{DC\_cont}$ (three-phase, with mains choke)                | TPF <sub>10%</sub> |      | -                          |                            | tbd                        |                            |                            |
| Power factor of fundamental component DPF at $P_{DC\_cont}$ (single-phase, without mains choke)                          | $\cos\varphi^{h1}$ |      | -                          |                            |                            |                            |                            |
| Power factor of fundamental component DPF at $P_{DC\_cont}$ (three-phase, without mains choke)                           | $\cos\varphi^{h1}$ |      | 0,99                       | 0,98                       | 0,99                       | 0,98                       | 0,97                       |
| Last modification: 2012-06-28                                                                                            |                    |      |                            |                            |                            |                            |                            |


Last modification: 2012-06-28

Technical Data of the Components

| Description                                                                                        | Symbol             | Unit | HCS01.1E<br>-W0005-<br>_03 | HCS01.1E<br>-W0008-<br>_03 | HCS01.1E<br>-W0018-<br>_03 | HCS01.1E<br>-W0028-<br>_03 | HCS01.1E<br>-W0054-<br>_03 |
|----------------------------------------------------------------------------------------------------|--------------------|------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|
| Power factor of fundamental component DPF at P <sub>DC_cont</sub> (single-phase, with mains choke) | cosφ <sup>h1</sup> |      | -                          |                            |                            |                            |                            |
| Power factor of fundamental component DPF at P <sub>DC_cont</sub> (three-phase, with mains choke)  | cosφ <sup>h1</sup> |      | -                          |                            | tbd                        | 0,99                       | 0,95                       |
| Last modification: 2012-06-28                                                                      |                    |      |                            |                            |                            |                            |                            |

- 1) 2) Mains voltage >  $U_{LN}$ : Use a transformer with grounded neutral point, don't use autotransformers!
- 3) Otherwise use mains choke HNL
- 4) Observe allowed number of switch-on processes; without external capacitors at the DC bus
- 5) 6) 7) 8) 10) Find interim values by interpolation
- 11) 12) 13)
- 9) Copper wire; PVC-insulation (conductor temperature 90 °C;  $T_a \leq 40$  °C) in accordance with NFPA 79 chapter 12 and UL 508A chapter 28

Tab.7-35: HCS - Data for Mains Voltage Supply

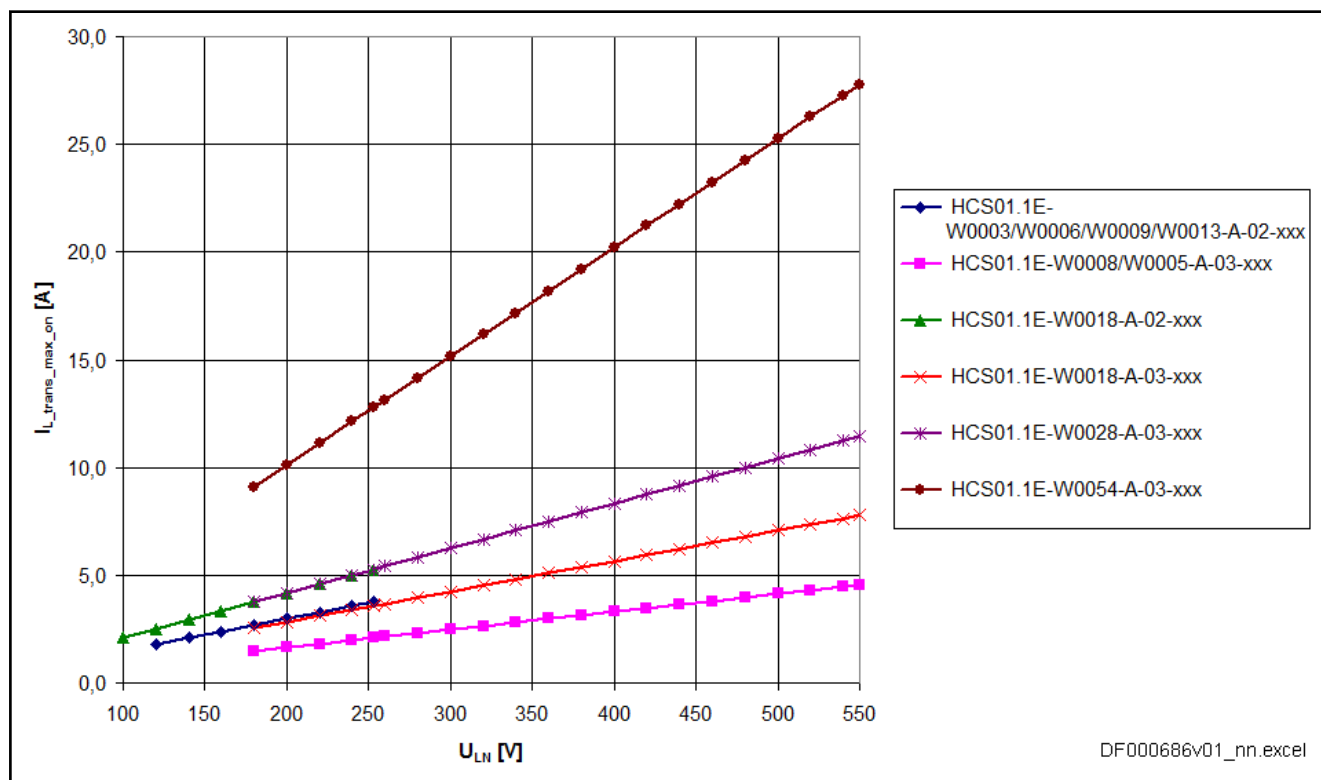

$I_{L\_trans\_max\_on}$  Maximum inrush current  
 $U_{LN}$  Mains Voltage  
 Fig.7-39: Maximum Inrush Current vs. Mains Voltage

## Technical Data of the Components

## 7.3.3 DC Bus

## Data of Power Section - DC Bus

| Description                                                                                                                         | Symbol                     | Unit | HCS01.1E<br>-W0003-<br>_02                                                 | HCS01.1E<br>-W0006-<br>_02 | HCS01.1E<br>-W0009-<br>_02 | HCS01.1E<br>-W0013-<br>_02 | HCS01.1E<br>-W0018-<br>_02 |       |
|-------------------------------------------------------------------------------------------------------------------------------------|----------------------------|------|----------------------------------------------------------------------------|----------------------------|----------------------------|----------------------------|----------------------------|-------|
| DC bus voltage                                                                                                                      | U <sub>DC</sub>            | V    | ULN x 1,41                                                                 |                            |                            |                            |                            |       |
| Capacitance in DC bus                                                                                                               | C <sub>DC</sub>            | mF   | 0,44                                                                       |                            | 0,78                       |                            | 1,20                       |       |
| DC resistance in DC bus (L+ to L-)                                                                                                  | R <sub>DC</sub>            | kOhm | 663,00                                                                     |                            |                            |                            |                            | 61,20 |
| Rated power (t > 10 min) at f <sub>s</sub> = 4 kHz; U <sub>LN_nenn</sub> ; control factor a <sub>0</sub> > 0.8; with mains choke    | P <sub>DC_cont</sub>       | kW   | -                                                                          |                            |                            |                            |                            |       |
| Rated power (t > 10 min) at f <sub>s</sub> = 4 kHz; U <sub>LN_nenn</sub> ; control factor a <sub>0</sub> > 0.8; without mains choke | P <sub>DC_cont</sub>       | kW   | 0,15                                                                       | 0,25                       | 0,46                       | 0,80                       | 1,80                       |       |
| Factor to reduce P <sub>DC_cont</sub> at single-phase mains voltage                                                                 | f <sub>1_3ph</sub>         |      | 1,00                                                                       |                            |                            | 0,80                       | 0,70                       |       |
| P <sub>DC_cont</sub> and P <sub>DC_max</sub> vs. mains input voltage; U <sub>LN</sub> ≤ U <sub>LN_nenn</sub>                        |                            | %/V  | PDC_cont (ULN) = PDC_cont x [1 - (230-ULN) x 0,0025]                       |                            |                            |                            |                            |       |
| P <sub>DC_cont</sub> and P <sub>DC_max</sub> vs. mains input voltage; U <sub>LN</sub> > U <sub>LN_nenn</sub>                        |                            | %/V  | No power increase                                                          |                            |                            |                            |                            |       |
| Maximum allowed DC bus power at U <sub>LN_nenn</sub> ; with mains choke                                                             | P <sub>DC_max</sub>        | kW   | -                                                                          |                            |                            |                            |                            |       |
| Maximum allowed DC bus power at U <sub>LN_nenn</sub> ; without mains choke                                                          | P <sub>DC_max</sub>        | kW   | 0,45                                                                       | 0,75                       | 1,38                       | 2,40                       | 4,80                       |       |
| Balancing factor for P <sub>DC_cont</sub> (for parallel operation at common DC bus) with mains choke                                |                            |      | -                                                                          |                            |                            |                            |                            |       |
| Balancing factor for P <sub>DC_cont</sub> (for parallel operation at common DC bus) without mains choke                             |                            |      | -                                                                          |                            |                            |                            |                            |       |
| Monitoring value maximum DC bus voltage, switch-off threshold                                                                       | U <sub>DC_lim-it_max</sub> | V    | 420                                                                        |                            |                            |                            |                            |       |
| Monitoring value minimum DC bus voltage, undervoltage threshold                                                                     | U <sub>DC_lim-it_min</sub> | V    | 0.75 x ULN or "P-0-0114, Undervoltage threshold", if P-0-0114 > 0.75 x ULN |                            |                            |                            |                            |       |
| Charging resistor continuous power                                                                                                  | P <sub>DC_Start</sub>      | kW   | 0,03                                                                       |                            |                            |                            |                            | 0,15  |
| Last modification: 2012-05-16                                                                                                       |                            |      |                                                                            |                            |                            |                            |                            |       |

Last modification: 2012-05-16

Technical Data of the Components

| Description                                                                                | Symbol               | Unit | HCS01.1E<br>-W0003-<br>_02 | HCS01.1E<br>-W0006-<br>_02 | HCS01.1E<br>-W0009-<br>_02 | HCS01.1E<br>-W0013-<br>_02 | HCS01.1E<br>-W0018-<br>_02 |
|--------------------------------------------------------------------------------------------|----------------------|------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|
| Allowed external DC bus capacitance (nom.) at $U_{LN\_nenn}^{1)}$                          | $C_{DCext}$          | mF   | -                          |                            |                            |                            |                            |
| Charging time at maximum allowed $C_{DCext}$ external DC bus capacitance at $U_{LN\_nenn}$ | $t_{lade\_DC\_Cext}$ | s    | 2,50                       |                            |                            |                            |                            |
| Last modification: 2012-05-16                                                              |                      |      |                            |                            |                            |                            |                            |

1) Use assigned type of mains choke  
Tab. 7-36: HCS - Data of Power Section - DC bus

Data of Power Section - DC Bus

| Description                                                                                                                         | Symbol                     | Unit | HCS01.1E<br>-W0005-<br>_03                           | HCS01.1E<br>-W0008-<br>_03 | HCS01.1E<br>-W0018-<br>_03 | HCS01.1E<br>-W0028-<br>_03 | HCS01.1E<br>-W0054-<br>_03 |
|-------------------------------------------------------------------------------------------------------------------------------------|----------------------------|------|------------------------------------------------------|----------------------------|----------------------------|----------------------------|----------------------------|
| DC bus voltage                                                                                                                      | U <sub>DC</sub>            | V    | ULN x 1,41                                           |                            |                            |                            |                            |
| Capacitance in DC bus                                                                                                               | C <sub>DC</sub>            | mF   | 0,11                                                 |                            | 0,39                       |                            | 0,78                       |
| DC resistance in DC bus (L+ to L-)                                                                                                  | R <sub>DC</sub>            | kOhm | 320,00                                               |                            | 230,00                     |                            | 136,00                     |
| Rated power (t > 10 min) at f <sub>s</sub> = 4 kHz; U <sub>LN_nenn</sub> ; control factor a <sub>0</sub> > 0.8; with mains choke    | P <sub>DC_cont</sub>       | kW   | -                                                    |                            | tbd                        | 4,00                       | 14,00                      |
| Rated power (t > 10 min) at f <sub>s</sub> = 4 kHz; U <sub>LN_nenn</sub> ; control factor a <sub>0</sub> > 0.8; without mains choke | P <sub>DC_cont</sub>       | kW   | 0,46                                                 | 0,86                       | 1,70                       | 2,60                       | 9,00                       |
| Factor to reduce P <sub>DC_cont</sub> at single-phase mains voltage                                                                 | f <sub>1_3ph</sub>         |      | 1-phase operation not allowed                        |                            |                            |                            |                            |
| P <sub>DC_cont</sub> and P <sub>DC_max</sub> vs. mains input voltage; U <sub>LN</sub> ≤ U <sub>LN_nenn</sub>                        |                            | %/V  | PDC_cont (ULN) = PDC_cont x [1 - (400-ULN) x 0,0025] |                            |                            |                            |                            |
| P <sub>DC_cont</sub> and P <sub>DC_max</sub> vs. mains input voltage; U <sub>LN</sub> > U <sub>LN_nenn</sub>                        |                            | %/V  | No power increase                                    |                            |                            |                            |                            |
| Maximum allowed DC bus power at U <sub>LN_nenn</sub> ; with mains choke                                                             | P <sub>DC_max</sub>        | kW   | -                                                    |                            |                            | 9,70                       | 19,00                      |
| Maximum allowed DC bus power at U <sub>LN_nenn</sub> ; without mains choke                                                          | P <sub>DC_max</sub>        | kW   | 1,38                                                 | 2,58                       | 5,10                       | 6,20                       | 14,00                      |
| Balancing factor for P <sub>DC_cont</sub> (for parallel operation at common DC bus) with mains choke                                |                            |      | -                                                    |                            |                            | 0,80                       |                            |
| Balancing factor for P <sub>DC_cont</sub> (for parallel operation at common DC bus) without mains choke                             |                            |      | -                                                    |                            |                            | 0,50                       |                            |
| Monitoring value maximum DC bus voltage, switch-off threshold                                                                       | U <sub>DC_lim-it_max</sub> | V    | 900                                                  |                            |                            |                            |                            |
| Last modification: 2013-07-18                                                                                                       |                            |      |                                                      |                            |                            |                            |                            |

## Technical Data of the Components

| Description                                                                                             | Symbol                          | Unit | HCS01.1E<br>-W0005-<br>_03                                                    | HCS01.1E<br>-W0008-<br>_03 | HCS01.1E<br>-W0018-<br>_03 | HCS01.1E<br>-W0028-<br>_03 | HCS01.1E<br>-W0054-<br>_03 |
|---------------------------------------------------------------------------------------------------------|---------------------------------|------|-------------------------------------------------------------------------------|----------------------------|----------------------------|----------------------------|----------------------------|
| Monitoring value minimum DC bus voltage, undervoltage threshold                                         | U <sub>DC_lim-it_min</sub>      | V    | 0.75 x ULN or "P-0-0114, Undervoltage threshold", if<br>P-0-0114 > 0.75 x ULN |                            |                            |                            |                            |
| Charging resistor continuous power                                                                      | P <sub>DC_Start</sub>           | kW   | 0,03                                                                          |                            | 0,05                       | 0,15                       | 0,50                       |
| Allowed external DC bus capacitance (nom.) at U <sub>LN_nenn</sub> <sup>1)</sup>                        | C <sub>DCext</sub>              | mF   | -                                                                             |                            | 3,00                       | 4,00                       | 13,00                      |
| Charging time at maximum allowed C <sub>DCext</sub> external DC bus capacitance at U <sub>LN_nenn</sub> | t <sub>lade_DC_Cext</sub><br>xt | s    | 2,50                                                                          |                            |                            |                            |                            |
| Last modification: 2013-07-18                                                                           |                                 |      |                                                                               |                            |                            |                            |                            |

1) Use assigned type of mains choke  
 Tab. 7-37: HCS - Data of Power Section - DC bus

## 7.3.4 Integrated Braking Resistor



Information on the external braking resistor: See [chapter 8.3.4 "External Braking Resistors HLR"](#) on page 274.

## Data of Integrated Braking Resistor

| Description                                                                    | Symbol                  | Unit | HCS01.1E<br>-W0003-<br>_02 | HCS01.1E<br>-W0006-<br>_02 | HCS01.1E<br>-W0009-<br>_02 | HCS01.1E<br>-W0013-<br>_02 | HCS01.1E<br>-W0018-<br>_02 |
|--------------------------------------------------------------------------------|-------------------------|------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|
| Braking Resistor Continuous Power                                              | P <sub>BD</sub>         | kW   | 0,02                       |                            |                            | 0,03                       | 0,15                       |
| Braking Resistor Peak Power                                                    | P <sub>BS</sub>         | kW   | 1,68                       |                            |                            |                            | 2,24                       |
| Nominal braking resistance                                                     | R <sub>DC_Bleeder</sub> | ohm  | 100                        |                            |                            |                            | 68                         |
| Braking resistor switch-on threshold - mains voltage independent <sup>1)</sup> | U <sub>R_DC_On_f</sub>  | V    | 390                        |                            |                            |                            |                            |
| Braking resistor switch-on threshold - mains voltage dependent <sup>2)</sup>   | U <sub>R_DC_On_v</sub>  |      | -                          |                            |                            |                            |                            |
| Maximum allowed on-time duty                                                   | t <sub>on_max</sub>     | s    | 0,20                       |                            |                            |                            | 1,34                       |
| Minimum allowed cycle time                                                     | T <sub>cycl</sub>       | s    | 16,80                      |                            | 11,20                      |                            | 20,00                      |
| Regenerative power to be absorbed                                              | W <sub>R_max</sub>      | kWs  | 0,40                       |                            |                            |                            | 3,00                       |
| Balancing factor for P <sub>BD</sub> (for parallel operation at common DC bus) | f                       |      | -                          |                            |                            |                            |                            |
| Cooling of integrated braking resistor                                         |                         |      | Natural convection         |                            |                            | Forced ventilation         |                            |
| Last modification: 2012-05-16                                                  |                         |      |                            |                            |                            |                            |                            |

1) 2) Factory setting  
 Tab. 7-38: HCS - Data of Integrated Braking Resistor

Technical Data of the Components

Data of Integrated Braking Resistor

| Description                                                                    | Symbol                  | Unit | HCS01.1E<br>-W0005-<br>_03            | HCS01.1E<br>-W0008-<br>_03 | HCS01.1E<br>-W0018-<br>_03 | HCS01.1E<br>-W0028-<br>_03 | HCS01.1E<br>-W0054-<br>_03 |
|--------------------------------------------------------------------------------|-------------------------|------|---------------------------------------|----------------------------|----------------------------|----------------------------|----------------------------|
| Braking Resistor Continuous Power                                              | P <sub>BD</sub>         | kW   | 0,02                                  | 0,03                       | 0,05                       | 0,15                       | 0,50                       |
| Braking Resistor Peak Power                                                    | P <sub>BS</sub>         | kW   | 4,00                                  |                            | 7,20                       | 10,60                      | 25,80                      |
| Nominal braking resistance                                                     | R <sub>DC_Bleeder</sub> | ohm  | 180                                   |                            | 100                        | 68                         | 28                         |
| Braking resistor switch-on threshold - mains voltage independent <sup>1)</sup> | U <sub>R_DC_On_f</sub>  | V    | 820                                   |                            |                            |                            |                            |
| Braking resistor switch-on threshold - mains voltage dependent <sup>2)</sup>   | U <sub>R_DC_On_v</sub>  |      | 130% of parameter P-0-0815, max. 820V |                            |                            |                            |                            |
| Maximum allowed on-time duty                                                   | t <sub>on_max</sub>     | s    | 0,20                                  |                            | 0,32                       | 0,28                       | 0,50                       |
| Minimum allowed cycle time                                                     | T <sub>cycl</sub>       | s    | 40,00                                 | 26,70                      | 45,40                      | 20,00                      | 26,00                      |
| Regenerative power to be absorbed                                              | W <sub>R_max</sub>      | kWs  | 0,80                                  |                            | 2,25                       | 3,00                       | 13,00                      |
| Balancing factor for P <sub>BD</sub> (for parallel operation at common DC bus) | f                       |      | 0,80                                  |                            |                            |                            |                            |
| Cooling of integrated braking resistor                                         |                         |      | Forced ventilation                    |                            |                            |                            |                            |
| Last modification: 2012-05-16                                                  |                         |      |                                       |                            |                            |                            |                            |

1) 2) Factory setting  
Tab. 7-39: HCS - Data of Integrated Braking Resistor

## 7.3.5 Inverter

Data of Power Section - Inverter

| Description                                                                                                         | Symbol               | Unit  | HCS01.1E<br>-W0003-<br>_02 | HCS01.1E<br>-W0006-<br>_02 | HCS01.1E<br>-W0009-<br>_02 | HCS01.1E<br>-W0013-<br>_02 | HCS01.1E<br>-W0018-<br>_02 |
|---------------------------------------------------------------------------------------------------------------------|----------------------|-------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|
| Allowed switching frequencies <sup>1)</sup>                                                                         | f <sub>s</sub>       | kHz   | 4, 8, 12, 16               |                            |                            |                            |                            |
| Output voltage, fundamental wave with open-loop operation                                                           | U <sub>out_eff</sub> | V     | ~ UDC x 0.71               |                            |                            |                            |                            |
| Output voltage, fundamental wave with closed-loop operation                                                         | U <sub>out_eff</sub> | V     | ~ UDC x 0.71               |                            |                            |                            |                            |
| Rise of voltage at output with U <sub>LN_nenn</sub> and 15 m motor cable length phase-phase (10-90%) <sup>2)</sup>  | dv/dt                | kV/μs | 5,00                       |                            |                            |                            |                            |
| Rise of voltage at output with U <sub>LN_nenn</sub> and 15 m motor cable length phase-ground (10-90%) <sup>3)</sup> | dv/dt                | kV/μs | 5,00                       |                            |                            |                            |                            |
| Last modification: 2012-01-23                                                                                       |                      |       |                            |                            |                            |                            |                            |

## Technical Data of the Components

| Description                                                                                            | Symbol                 | Unit | HCS01.1E<br>-W0003-<br>_02 | HCS01.1E<br>-W0006-<br>_02 | HCS01.1E<br>-W0009-<br>_02 | HCS01.1E<br>-W0013-<br>_02 | HCS01.1E<br>-W0018-<br>_02 |
|--------------------------------------------------------------------------------------------------------|------------------------|------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|
| Output frequency range at $f_s = 4$ kHz                                                                | $f_{out\_4k}$          | Hz   | 0...400                    |                            |                            |                            |                            |
| Output frequency range at $f_s = 8$ kHz                                                                | $f_{out\_8k}$          | Hz   | 0...800                    |                            |                            |                            |                            |
| Output frequency range at $f_s = 12$ kHz                                                               | $f_{out\_12k}$         | Hz   | 0...1200                   |                            |                            |                            |                            |
| Output frequency range at $f_s = 16$ kHz                                                               | $f_{out\_16k}$         | Hz   | 0...1600                   |                            |                            |                            |                            |
| Output frequency threshold to detect motor standstill <sup>4)</sup>                                    | $f_{out\_still}$       | Hz   | 4                          |                            |                            |                            |                            |
| Maximum output current at $f_s = 4$ kHz                                                                | $I_{out\_max4}$        | A    | 3,3                        | 6,0                        | 9,0                        | 13,0                       | 18,0                       |
| Maximum output current at $f_s = 8$ kHz                                                                | $I_{out\_max8}$        | A    | 3,3                        | 6,0                        | 9,0                        | 13,0                       | 18,0                       |
| Maximum output current at $f_s = 12$ kHz                                                               | $I_{out\_max12}$       | A    | 3,3                        | 6,0                        | 9,0                        | 13,0                       | 18,0                       |
| Maximum output current at $f_s = 16$ kHz                                                               | $I_{out\_max16}$       | A    | 3,3                        | 6,0                        | 9,0                        | 13,0                       | 16,5                       |
| Continuous output current at $f_s = 4$ kHz                                                             | $I_{out\_cont4}$       | A    | 1,4                        | 2,4                        | 3,0                        | 4,4                        | 7,6                        |
| Continuous output current at $f_s = 8$ kHz                                                             | $I_{out\_cont8}$       | A    | 1,0                        | 1,8                        | 2,6                        | 4,2                        | 6,1                        |
| Continuous output current at $f_s = 12$ kHz <sup>5)</sup>                                              | $I_{out\_cont12}$      | A    | 0,6                        | 1,2                        | 1,7                        | 2,7                        | 4,1                        |
| Continuous output current at $f_s = 16$ kHz <sup>6)</sup>                                              | $I_{out\_cont16}$      | A    | 0,5                        | 0,8                        | 1,1                        | 1,9                        | 2,5                        |
| Continuous output current at $f_s = 4$ kHz; output frequency $f_{out} < f_{out\_still}$                | $I_{out\_cont0Hz\_4}$  | A    | 1,1                        | 2,1                        | 3,0                        | 4,4                        | 7,0                        |
| Continuous output current at $f_s = 8$ kHz; output frequency $f_{out} < f_{out\_still}$                | $I_{out\_cont0Hz\_8}$  | A    | 0,9                        | 1,6                        | 2,3                        | 3,1                        | 2,3                        |
| Continuous output current at $f_s = 12$ kHz; output frequency $f_{out} < f_{out\_still}$ <sup>7)</sup> | $I_{out\_cont0Hz\_12}$ | A    | 0,5                        | 1,0                        | 1,4                        | 2,0                        | 1,4                        |
| Continuous output current at $f_s = 16$ kHz; output frequency $f_{out} < f_{out\_still}$ <sup>8)</sup> | $I_{out\_cont0Hz\_16}$ | A    | 0,4                        | 0,7                        | 0,9                        | 1,3                        | 0,4                        |
| Assigned output filters at nom. data; $f_s = 4$ kHz                                                    |                        |      | tbd                        |                            |                            |                            |                            |
| Last modification: 2012-01-23                                                                          |                        |      |                            |                            |                            |                            |                            |

1)

Also depending on firmware and control section; see parameter description "P-0-0001, Switching frequency of the power output stage"; see "P-0-4058, Amplifier type data"

Technical Data of the Components

- 2) 3) Guide value, see following note  
4) See following note regarding reduction output current  
5) 6) 7) 8) See parameter description "P-0-0556, Config word of axis controller",  
load-dependent reduction of switching frequency  $f_s$   
*Tab. 7-40: HCS - Data of Power Section - Inverter*

Data of Power Section - Inverter

| Description                                                                                                         | Symbol                  | Unit  | HCS01.1E<br>-W0005-<br>_03 | HCS01.1E<br>-W0008-<br>_03 | HCS01.1E<br>-W0018-<br>_03 | HCS01.1E<br>-W0028-<br>_03 | HCS01.1E<br>-W0054-<br>_03 |
|---------------------------------------------------------------------------------------------------------------------|-------------------------|-------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|
| Allowed switching frequencies <sup>1)</sup>                                                                         | f <sub>s</sub>          | kHz   | 4, 8, 12, 16               |                            |                            |                            | 4, 8, 12                   |
| Output voltage, fundamental wave with open-loop operation                                                           | U <sub>out_eff</sub>    | V     | ~ UDC x 0.71               |                            |                            |                            |                            |
| Output voltage, fundamental wave with closed-loop operation                                                         | U <sub>out_eff</sub>    | V     | ~ UDC x 0.71               |                            |                            |                            |                            |
| Rise of voltage at output with U <sub>LN_nenn</sub> and 15 m motor cable length phase-phase (10-90%) <sup>2)</sup>  | dv/dt                   | kV/μs | 5,00                       |                            |                            |                            |                            |
| Rise of voltage at output with U <sub>LN_nenn</sub> and 15 m motor cable length phase-ground (10-90%) <sup>3)</sup> | dv/dt                   | kV/μs | 5,00                       |                            |                            |                            |                            |
| Output frequency range at f <sub>s</sub> = 4 kHz                                                                    | f <sub>out_4k</sub>     | Hz    | 0...400                    |                            |                            |                            |                            |
| Output frequency range at f <sub>s</sub> = 8 kHz                                                                    | f <sub>out_8k</sub>     | Hz    | 0...800                    |                            |                            |                            |                            |
| Output frequency range at f <sub>s</sub> = 12 kHz                                                                   | f <sub>out_12k</sub>    | Hz    | 0...1200                   |                            |                            |                            |                            |
| Output frequency range at f <sub>s</sub> = 16 kHz                                                                   | f <sub>out_16k</sub>    | Hz    | 0...1600                   |                            |                            |                            | -                          |
| Output frequency threshold to detect motor standstill <sup>4)</sup>                                                 | f <sub>out_still</sub>  | Hz    | 4                          |                            |                            |                            |                            |
| Maximum output current at f <sub>s</sub> = 4 kHz                                                                    | I <sub>out_max4</sub>   | A     | 5,0                        | 8,0                        | 18,0                       | 28,5                       | 54,0                       |
| Maximum output current at f <sub>s</sub> = 8 kHz                                                                    | I <sub>out_max8</sub>   | A     | 5,0                        | 8,0                        | 18,0                       | 28,5                       | 40,0                       |
| Maximum output current at f <sub>s</sub> = 12 kHz                                                                   | I <sub>out_max12</sub>  | A     | 5,0                        | 8,0                        | 18,0                       | 21,9                       | 30,4                       |
| Maximum output current at f <sub>s</sub> = 16 kHz                                                                   | I <sub>out_max16</sub>  | A     | 5,0                        | 8,0                        | 16,5                       | 17,6                       | -                          |
| Continuous output current at f <sub>s</sub> = 4 kHz                                                                 | I <sub>out_cont4</sub>  | A     | 2,0                        | 2,7                        | 7,6                        | 11,5                       | 21,0                       |
| Continuous output current at f <sub>s</sub> = 8 kHz                                                                 | I <sub>out_cont8</sub>  | A     | 1,6                        | 2,3                        | 6,1                        | 7,9                        | 21,0                       |
| Continuous output current at f <sub>s</sub> = 12 kHz <sup>5)</sup>                                                  | I <sub>out_cont12</sub> | A     | 1,0                        | 1,5                        | 4,1                        | 4,6                        | 15,5                       |
| Last modification: 2012-05-16                                                                                       |                         |       |                            |                            |                            |                            |                            |



## Technical Data of the Components

| Description                                                                                                                   | Symbol                        | Unit | HCS01.1E<br>-W0005-<br>_03 | HCS01.1E<br>-W0008-<br>_03 | HCS01.1E<br>-W0018-<br>_03 | HCS01.1E<br>-W0028-<br>_03 | HCS01.1E<br>-W0054-<br>_03 |
|-------------------------------------------------------------------------------------------------------------------------------|-------------------------------|------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|
| Continuous output current at $f_s = 16 \text{ kHz}$ <sup>6)</sup>                                                             | $I_{\text{out\_cont16}}$      | A    | 0,7                        | 1,0                        | 2,5                        | 3,1                        | -                          |
| Continuous output current at $f_s = 4 \text{ kHz}$ ; output frequency $f_{\text{out}} < f_{\text{out\_still}}$                | $I_{\text{out\_cont0Hz\_4}}$  | A    | 1,8                        | 2,7                        | 7,0                        | 11,5                       | 21,0                       |
| Continuous output current at $f_s = 8 \text{ kHz}$ ; output frequency $f_{\text{out}} < f_{\text{out\_still}}$                | $I_{\text{out\_cont0Hz\_8}}$  | A    | 1,3                        | 1,9                        | 2,3                        | 4,7                        | 12,0                       |
| Continuous output current at $f_s = 12 \text{ kHz}$ ; output frequency $f_{\text{out}} < f_{\text{out\_still}}$ <sup>7)</sup> | $I_{\text{out\_cont0Hz\_12}}$ | A    | 0,8                        | 1,2                        | 1,4                        | 2,2                        | 7,5                        |
| Continuous output current at $f_s = 16 \text{ kHz}$ ; output frequency $f_{\text{out}} < f_{\text{out\_still}}$ <sup>8)</sup> | $I_{\text{out\_cont0Hz\_16}}$ | A    | 0,6                        | 0,8                        | 0,4                        | 1,2                        | -                          |
| Assigned output filters at nom. data; $f_s = 4 \text{ kHz}$                                                                   |                               |      | tbd                        |                            |                            |                            |                            |
| Last modification: 2012-05-16                                                                                                 |                               |      |                            |                            |                            |                            |                            |

- 1) Also depending on firmware and control section; see parameter description "P-0-0001, Switching frequency of the power output stage"; see "P-0-4058, Amplifier type data"
- 2) 3) Guide value, see following note
- 4) See following note regarding reduction output current
- 5) 6) 7) 8) See parameter description "P-0-0556, Config word of axis controller", load-dependent reduction of switching frequency  $f_s$
- Tab. 7-41: HCS - Data of Power Section - Inverter

**Guide value "Rise of voltage at output"**

Observe that the voltage load at the motor is almost independent of the power section used.

Especially when using **standard motors**, make sure that they comply with the occurring voltage load.

**Reduced output current at motor standstill**

Depending on the electric output frequency, the output current is reduced for thermal protection of the power section.

The output current is reduced, when the electric output frequency has fallen below the threshold to detect motor standstill.

## 8 Cables, Accessories, Additional Components

### 8.1 Overview

#### 8.1.1 Cables

|                       |                                                                                                                                                                                                                                                                                                                                                                                                            |
|-----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Motor power cables    | See documentation "Rexroth IndraDyn S Synchronous Motors MSM" (R911329338)<br>See documentation "Rexroth Connection Cables IndraDrive and IndraDyn" (R911322949)                                                                                                                                                                                                                                           |
| Encoder cables        | <ul style="list-style-type: none"> <li>• RKG0033 (MSM motor)</li> <li>• RKG0034 (MSM motor, extension)</li> <li>• RKG0035 (1V<sub>pp</sub> Heidenhain standard)</li> <li>• RKG0036 (EnDat, SSI)</li> <li>• RKG0041 (incl. D-Sub connector RGS0001/K01; MSM motor)</li> <li>• RKG4200 (HIPERFACE®)</li> </ul> See <a href="#">tab. 4-12 "Encoder Cables for HCS01 Converters and MSM Motors"</a> on page 46 |
| Multi-Ethernet cables | <ul style="list-style-type: none"> <li>• RKB0011<br/>(To connect the drive system to the higher-level control unit)</li> <li>• RKB0013<br/>(To connect devices arranged side by side)</li> </ul>                                                                                                                                                                                                           |

Tab.8-1: Cables - Overview

#### 8.1.2 Accessories

| Accessories                                                                                                                                                                                                                                                                                                                                                                                | Note                     |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------|
| <b>Mounting and connection accessories (HAS09)</b> <ul style="list-style-type: none"> <li>• Screws for mounting the component</li> <li>• Screws for connecting the equipment grounding conductor</li> <li>• Parts for shield connection and strain relief of cables (plates, screws, clips)</li> <li>• Adhesive labels with notes on safety in the English and French languages</li> </ul> | Standard supply          |
| <b>DC bus connector (RLS0778/K06)</b><br>Connector for connecting <ul style="list-style-type: none"> <li>• the DC buses of several HCS01.1E-W00xx-x-03 drive controllers</li> <li>• an HCS01.1E-W00xx-x-03 drive controller to an HLC01.2 DC bus capacitor unit</li> </ul>                                                                                                                 | To be ordered separately |
| <b>Battery box (SUP-E01-MSM-BATTERYBOX)</b><br>Accessory for operating MSM motors with absolute value encoder                                                                                                                                                                                                                                                                              | To be ordered separately |
| <b>Replacement battery (SUP-E03-DKC*CS-BATTERY)</b><br>Replacement battery for SUP-E01-MSM-BATTERYBOX                                                                                                                                                                                                                                                                                      | To be ordered separately |
| <b>Encoder cable (RKG0041)</b><br>Accessory for operating MSM motors with absolute value encoder                                                                                                                                                                                                                                                                                           | To be ordered separately |
| <b>D-Sub connector (RGS0001/K01)</b><br>Accessory for assembling an encoder cable for MSM motors with absolute value encoder                                                                                                                                                                                                                                                               | To be ordered separately |

Cables, Accessories, Additional Components

| Accessories                                                                                         | Note                     |
|-----------------------------------------------------------------------------------------------------|--------------------------|
| <b>Hall sensor adapter box (SHL03.1-NNN-S-NNN)</b><br>Accessory for connecting digital Hall sensors | To be ordered separately |
| <b>Snap-on ferrite (HAS05.1-015-NNN-NN)</b><br>Accessory for external HLR braking resistors         | To be ordered separately |

Tab.8-2: Accessories - Overview

8.1.3 Additional Components

| Additional component  | Type                  |
|-----------------------|-----------------------|
| Transformer           | DST (autotransformer) |
| Mains filter          | NFE<br>NFD            |
| Mains choke           | HNL01.1E              |
| Braking resistor      | HLR01.2               |
| DC bus capacitor unit | HLC01.2               |

Tab.8-3: Additional Components - Overview

8.2 Accessories

8.2.1 Mounting and Connection Accessories (HAS09)

- Use The accessories contain:
- Screws for mounting the component
  - Screws for connecting the equipment grounding conductor
  - Parts for shield connection of cables (plates, screws)
  - Adhesive labels with notes on safety in the English and French languages. Place the adhesive labels clearly visibly at the component or in the immediate vicinity of the component, if the adhesive labels existing at the component are hidden by neighboring components.

Assignment

| Accessories        | Component                |
|--------------------|--------------------------|
| HAS09.1-001-NNN-NN | HCS01.1E-W0003 ... W0028 |
| HAS09.1-003-NNN-NN | HCS01.1E-W0054           |
| HAS09.1-004-NNN-NN | HLC01.2; HLR01.2N        |

Tab.8-4: HAS09 and HCS01

Cables, Accessories, Additional Components

Product Insert    HAS09.1-001-NNN-NN

Made in Germany  
109-1304-4825-AD


**HAS09.1-001-NNN-NN**



R911332680

|   |                                          |            |
|---|------------------------------------------|------------|
| 1 | SCHILD-KLEBE UL-CSA WARNHINWEIS EN/FR 30 | R911326524 |
| 2 | KOMBI-SCHRAUBE ZISO10644-M6X20-8.8 &     | R911296992 |
| 2 | KOMBI-SCHRAUBE ZISO10644-M5X30-8.8 &     | R911334423 |
| 4 | KOMBI-SCHRAUBE ZISO10644-M5X12-8.8 &     | R911294126 |
| 1 | BLECH HCS01.1 SCHIRM KLEMMBUEGEL 08-19   | R911330442 |
| 1 | BLECH HCS01.1 SCHIRM KLEMMBUEGEL 04-13   | R911333478 |
| 2 | BLECH HCS01.1 SCHIRM KLEMMAUFLAGE 04-19  | R911330441 |

| Stck | Benennung | MN |
|------|-----------|----|
|------|-----------|----|

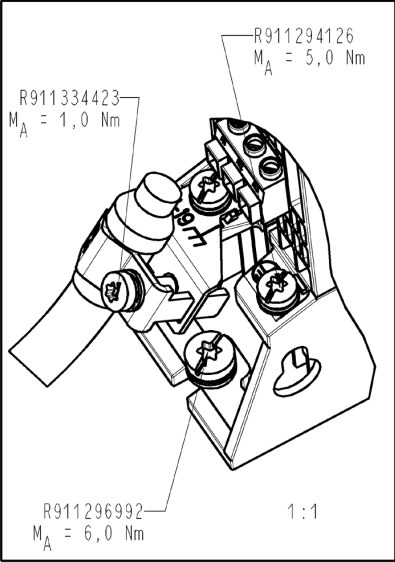

**BEIPACKZETTEL HAS09.1-001-NNN-NN**

| Stck | Benennung                                | MN         |
|------|------------------------------------------|------------|
| 2    | BLECH HCS01.1 SCHIRM KLEMMAUFLAGE 04-19  | R911330441 |
| 1    | BLECH HCS01.1 SCHIRM KLEMMBUEGEL 04-13   | R911333478 |
| 1    | BLECH HCS01.1 SCHIRM KLEMMBUEGEL 08-19   | R911330442 |
| 4    | KOMBI-SCHRAUBE ZISO10644-M5X12-8.8 &     | R911294126 |
| 2    | KOMBI-SCHRAUBE ZISO10644-M5X30-8.8 &     | R911334423 |
| 2    | KOMBI-SCHRAUBE ZISO10644-M6X20-8.8 &     | R911296992 |
| 1    | SCHILD-KLEBE UL-CSA WARNHINWEIS EN/FR 30 | R911326524 |

|              |            |                                              |
|--------------|------------|----------------------------------------------|
| Datum        | 2010-07-06 | Benennung                                    |
| Name         | roinhirt   | BEIPACKZETTEL HAS09.1-001-NNN-NN             |
| Material-Nr. | R911332680 | Zeich-Nr. 109-1304-4233-AF                   |
| Detail       | 08262192   | Erstellt 109-1304-4233-AE    ABM-Nr. 5-71736 |

Fig.8-1:      Product Insert HAS09.1-001-NNN-NN

HAS09.1-003-NNN-NN

Made in Germany  
109-1304-4824-AE


**HAS09.1-003-NNN-NN**



R911331869

|   |                                         |            |
|---|-----------------------------------------|------------|
| 1 | SCHILD-KLEBE UL-CSA WARHINWEIS EN/FR 30 | R911326524 |
| 4 | KOMBI-SCHRAUBE ZISO10644-M6X20-8.8 &    | R911296992 |
| 2 | KOMBI-SCHRAUBE ZISO10644-M5X30-8.8 &    | R911334423 |
| 4 | KOMBI-SCHRAUBE ZISO10644-M5X16-8.8 &    | R911294127 |
| 1 | BLECH HCS01.1 SCHIRM KLEMMBUEGEL 09-28  | R911330693 |
| 1 | BLECH HCS01.1 SCHIRM KLEMMBUEGEL 08-19  | R911330442 |
| 1 | BLECH HCS01.1 SCHIRM KLEMMBUEGEL 09-28  | R911330692 |
| 1 | BLECH HCS01.1 SCHIRM KLEMMAUFLAGE 04-19 | R911330441 |

| Stck | Benennung | MN |
|------|-----------|----|
|------|-----------|----|

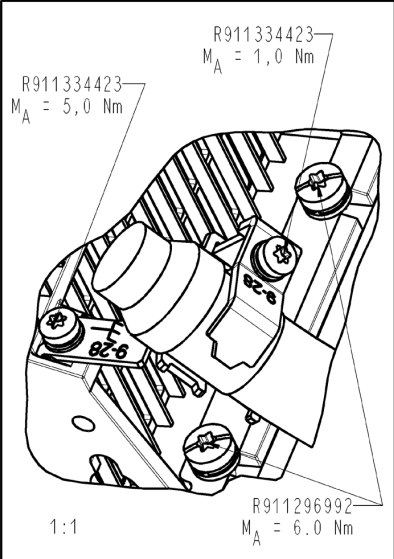

**BEIPACKZETTEL HAS09.1-003-NNN-NN**


| Stck | Benennung                               | MN         |
|------|-----------------------------------------|------------|
| 1    | BLECH HCS01.1 SCHIRM KLEMMAUFLAGE 04-19 | R911330441 |
| 1    | BLECH HCS01.1 SCHIRM KLEMMAUFLAGE 09-28 | R911330692 |
| 1    | BLECH HCS01.1 SCHIRM KLEMMBUEGEL 08-19  | R911330442 |
| 1    | BLECH HCS01.1 SCHIRM KLEMMBUEGEL 09-28  | R911330693 |
| 4    | KOMBI-SCHRAUBE ZISO10644-M5X16-8.8 &    | R911294127 |
| 2    | KOMBI-SCHRAUBE ZISO10644-M5X30-8.8 &    | R911334423 |
| 4    | KOMBI-SCHRAUBE ZISO10644-M6X20-8.8 &    | R911296992 |
| 1    | SCHILD-KLEBE UL-CSA WARHINWEIS EN/FR 30 | R911326524 |

|              |            |                                           |
|--------------|------------|-------------------------------------------|
| Datum        | 2010-03-31 | Benennung                                 |
| Name         | rainbird   | BEIPACKZETTEL HAS09.1-003-NNN-NN          |
| Material-Nr. | R911331870 | Zeich-Nr. 109-1304-4232-AE                |
| Detail       | 08238426   | Erzeuger 109-1304-4232-AD ABM-Nr. 5-71738 |

Fig.8-2: Product Insert HAS09.1-003-NNN-NN

## Cables, Accessories, Additional Components

## Plates for Shield Connection of Cables

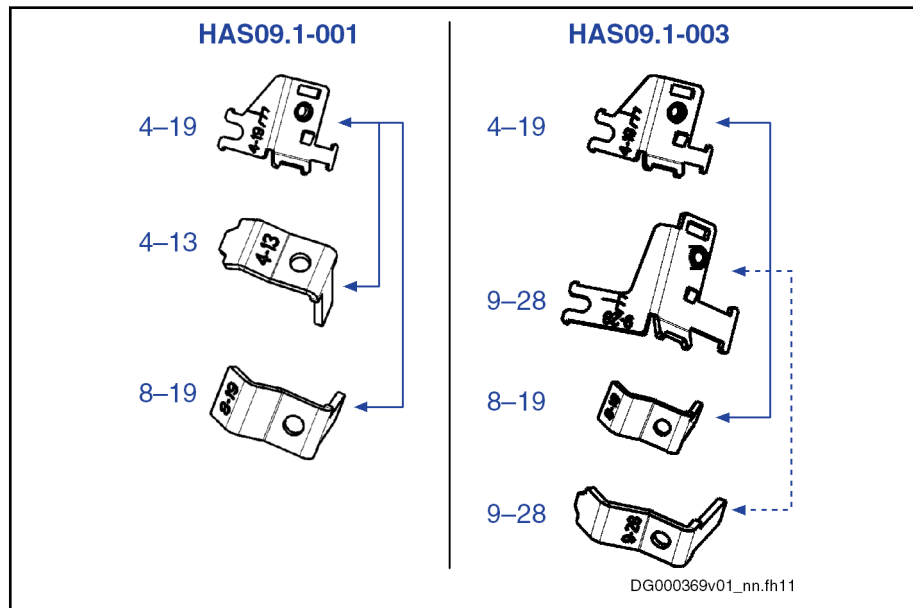

HAS09.1-0 01 Plates for cable diameters 4–13 mm and 8–19 mm

HAS09.1-0 03 Plates for cable diameters 8–19 mm and 9–28 mm

Fig. 8-3: HAS09; Plates

Cables, Accessories, Additional Components

HAS09.1-004-NNN-NN

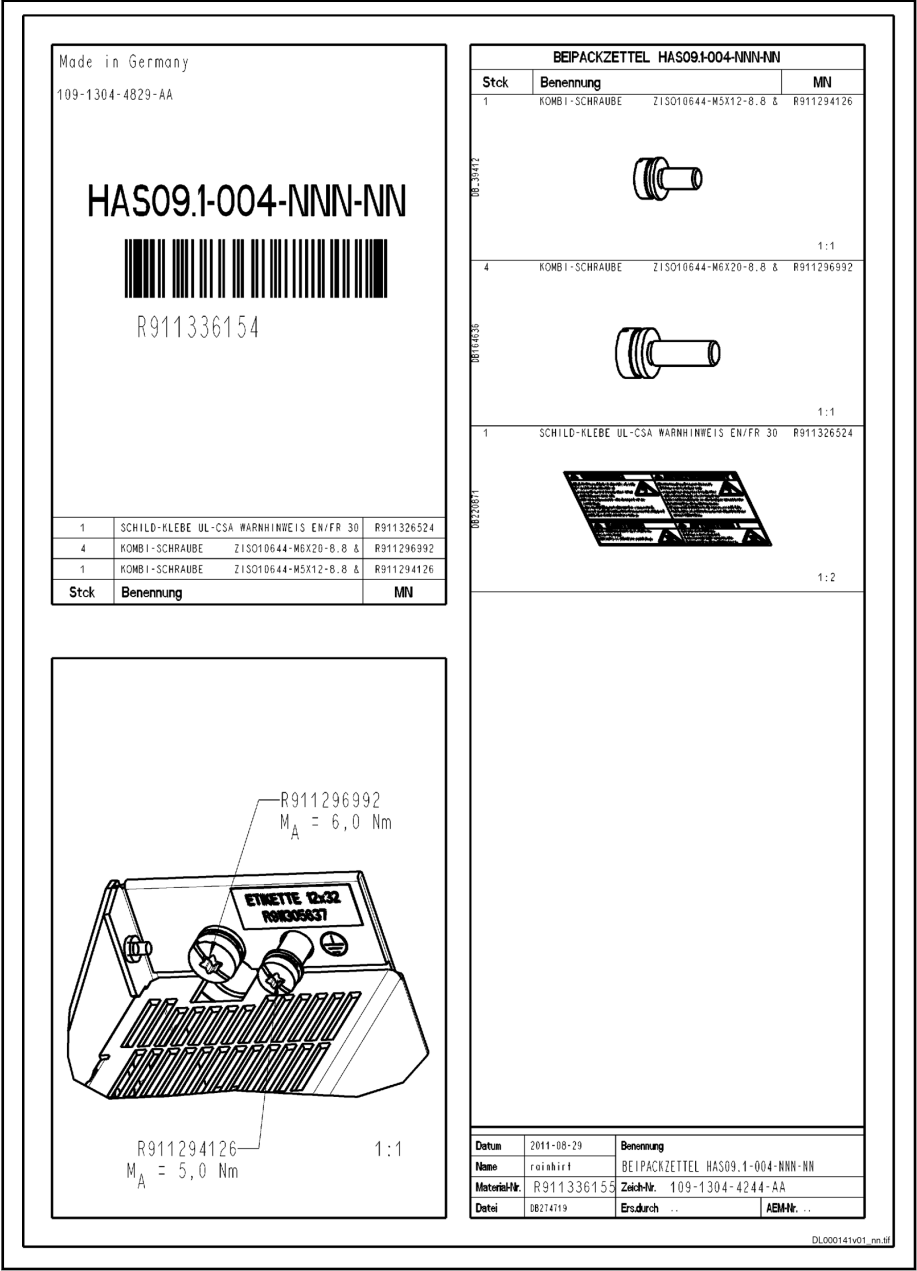


Fig.8-4: Product Insert HAS09.1-004-NNN-NN



### 8.2.2 DC Bus Connector (RLS0778/K06)

- Use Connector for connecting
- the DC buses of several HCS01.1E-W00xx-x-03 drive controllers
  - an HCS01.1E-W00xx-x-03 drive controller to a DC bus capacitor unit

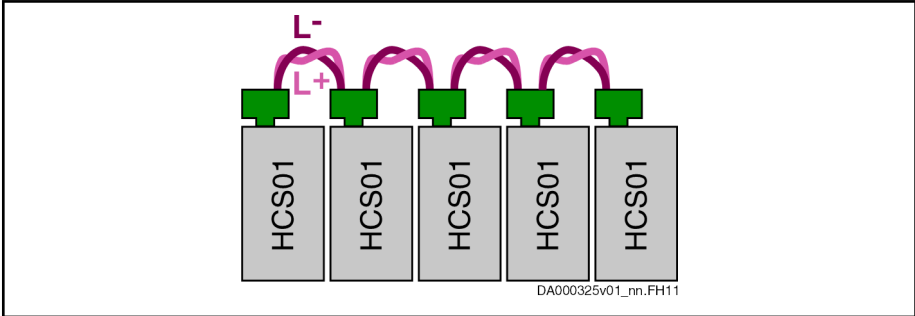


Fig.8-5: Connecting the DC Buses via DC Bus Connectors

| DC bus connector                                                    | DC bus connector at device<br>(connection point X77) |
|---------------------------------------------------------------------|------------------------------------------------------|
| <p>DG000295v01_nn.tif</p> <p>Order code:<br/><b>RLS0778/K06</b></p> | <p>DG000295v01_nn.tif</p>                            |

Tab.8-5: DC Bus Connector

## 8.2.3 Battery Box for MSM Motors (SUP-E01-MSM-BATTERYBOX)

**Use** The battery box "SUP-E01-MSM-BATTERYBOX" is a set of accessories used to operate MSM motors with absolute value encoder and to backup the encoder data in case voltage is switched off.

### Scope of Supply

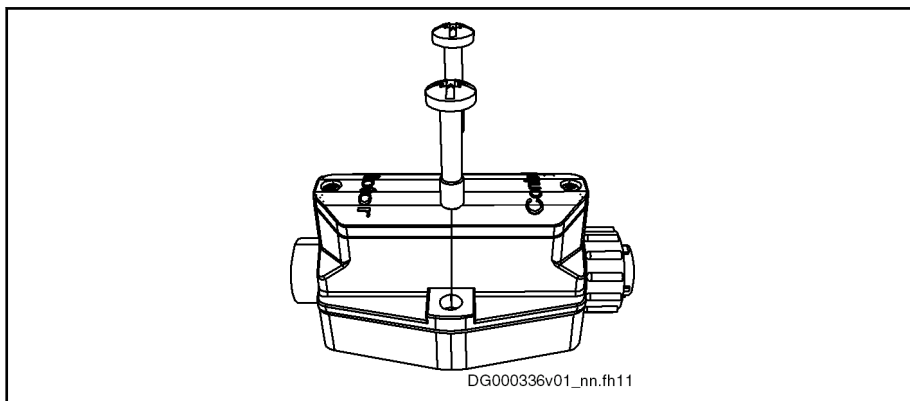



Fig. 8-6: Battery Box

**Battery box** complete with

- **Battery:** Type: ER6C, 3.6 V; 1800 mA, lithium; Service life: Up to 10 years, according to load and ambient temperature
- **Mounting screws:** M6×30; Screw head: Torx and slot

The battery box "SUP-E01-MSM-BATTERYBOX" is supplied in ready-for-operation status with battery.

### Parts:

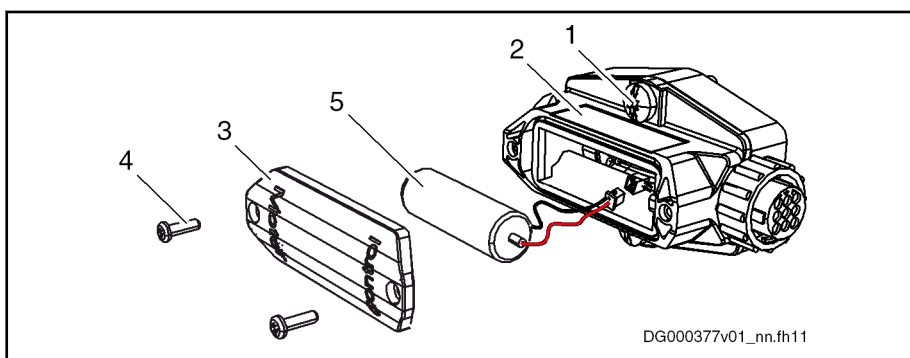

- |   |                                                                          |
|---|--------------------------------------------------------------------------|
| 1 | Mounting screw                                                           |
| 2 | Housing                                                                  |
| 3 | Housing cover                                                            |
| 4 | Housing cover screw (self-shaping screw 30×10; tightening torque 0.8 Nm) |
| 5 | Battery                                                                  |

Fig. 8-7: Parts of the Battery Box

## Cables, Accessories, Additional Components

## Dimensions

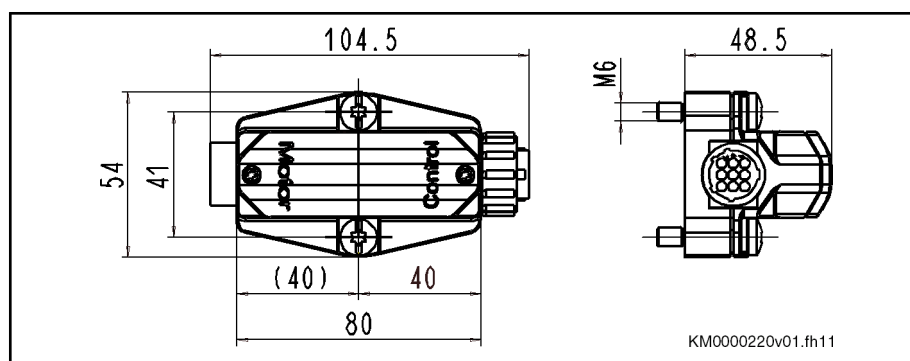


Fig. 8-8: Dimensions

Weight 120 g

## Mounting



Mount the battery box as near as possible to the motor (maximum distance: 2 m).


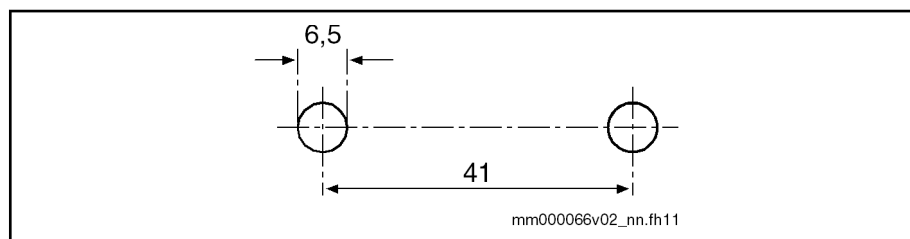


Fig. 8-9: Boring Diagram for Battery Box

- Mounting screws: M6×30
- Tightening torque  $M_A$ : 3 Nm

## Cabling

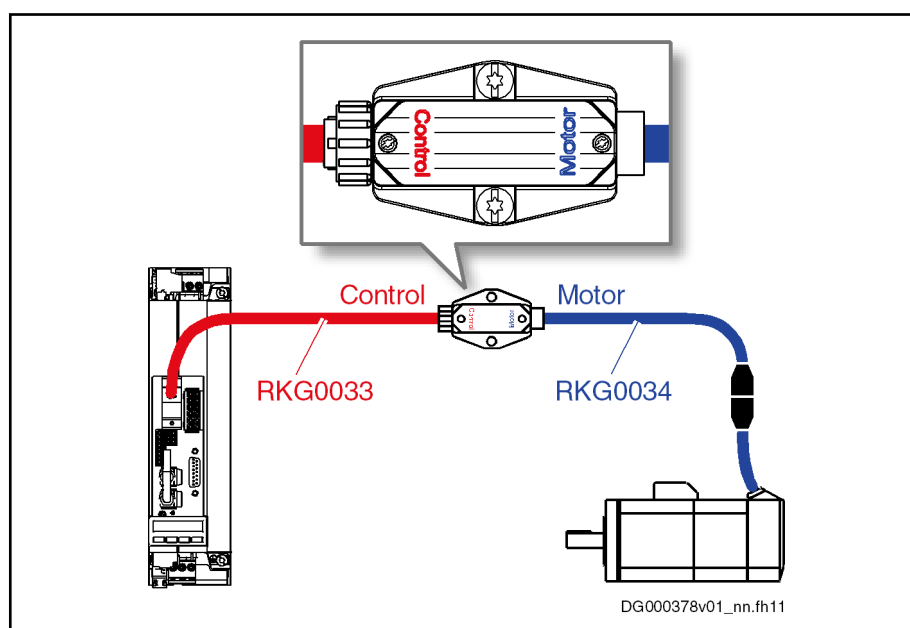

RKG0033 Encoder cable  
RKG0034 Extension cable (optional)

Fig. 8-10: Cabling of the Battery Box

8.2.4 Battery and Refresh Resistor (SUP-E03-DKC\*CS-BATTERY)

**Use** The **battery** is used as a replacement battery for the battery box "SUP-E01-MSM-BATTERYBOX".  
The **refresh resistor** is used to prepare the battery before the battery is used in the battery box "SUP-E01-MSM-BATTERYBOX".

Content

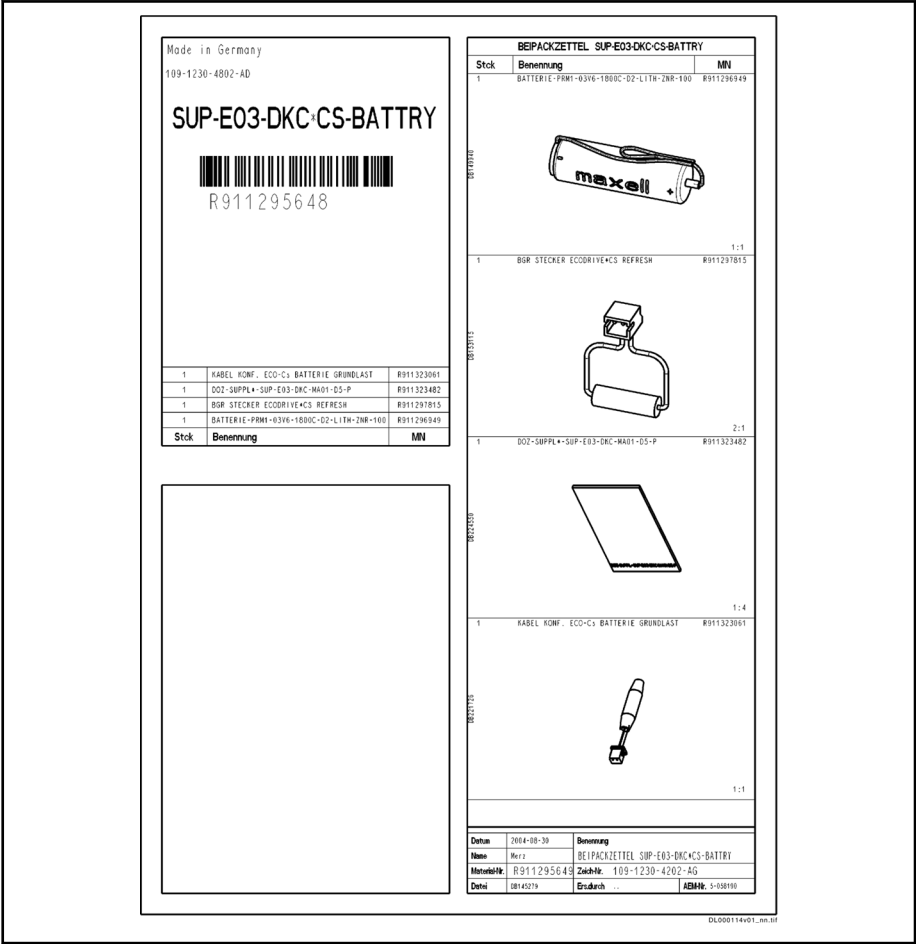



Fig.8-11: SUP-E03-DKC\*CS-BATTERY - Product Insert

|                                                     |                                                                                                                                                              |
|-----------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Battery                                             | Type: ER6C, 3.6 V; 1800 mA, lithium; Service life: Up to 10 years, according to load and ambient temperature                                                 |
| Refresh resistor                                    | 10 ohm; the refresh resistor is used to prepare the battery before the battery is used in the battery box "SUP-E01-MSM-BATTERYBOX".                          |
| Documentation<br>(DOZ-SUPPL*-SUP-E03-DKC-MA01-D5-P) | Information in 5 languages on the refresh procedure of the battery and on how to connect the battery and the base load resistor.                             |
| Base load resistor                                  | The base load resistor (500 kOhm) is only relevant to EcoDrive Cs drive controllers (when they are operated without the SUP-E01-MSM-BATTERYBOX battery box). |

Tab.8-6: SUP-E03-DKC\*CS-BATTERY - Content

## Cables, Accessories, Additional Components

**Refresh** Before using a new battery, you must always carry out the so-called "refresh" procedure:

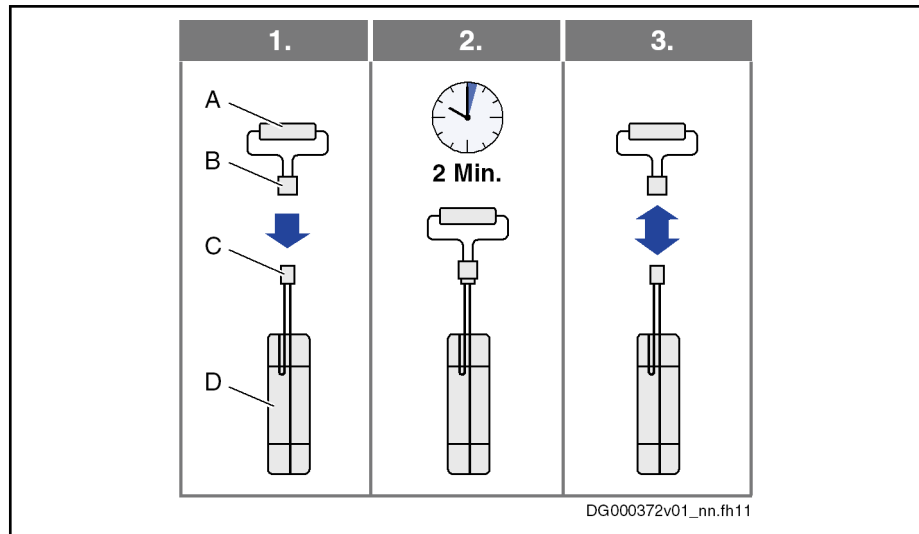

- A Refresh resistor  
B Mating connector  
C Connector  
D Battery

Fig. 8-12: Refresh Procedure of the Battery

1. Connect connector of battery to mating connector at refresh resistor.
2. Wait **2 minutes**.
3. Disconnect connector from mating connector.

### Replacing the Battery

In order to maintain the **absolute value encoder position** when the battery is replaced, the following requirements must be fulfilled:

- The **control voltage** at the drive controller has been switched on
- The **encoder** has been connected to the drive controller via the encoder cable

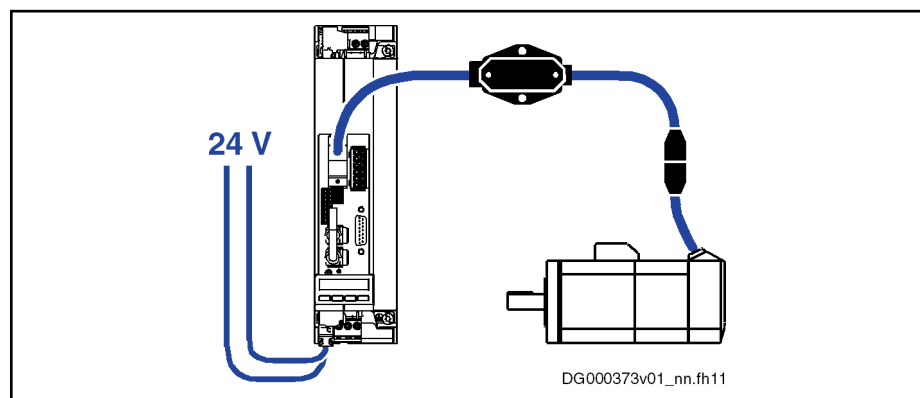




Fig. 8-13: Control Voltage Switched On and Encoder Connected

Cables, Accessories, Additional Components






When you replace the battery with the control voltage switched off, the absolute value encoder position and thereby the position data reference of the axis are lost.

Reestablishing the position data reference: See firmware function "Establishing Position Data Reference for Absolute Measuring Systems → "Set Absolute Position" Command"
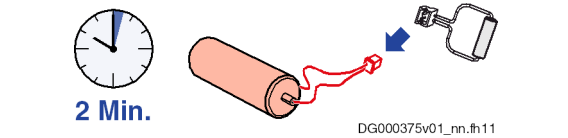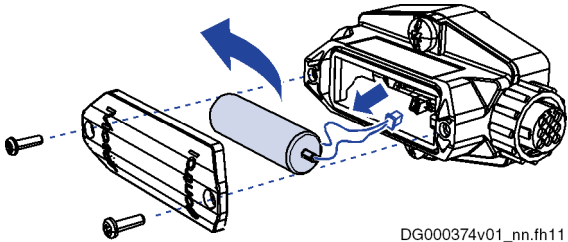
|    |                                                                                                              |                                                                                                                                                                               |
|----|--------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1. |  <p>DG000375v01_nn.fh11</p> | <ul style="list-style-type: none"><li>• If not yet done, carry out refresh procedure with the new battery.</li></ul>                                                          |
| 2. |  <p>DG000374v01_nn.fh11</p> | <ul style="list-style-type: none"><li>• Unscrew cover of battery box.</li><li>• Remove old battery and dispose of it according to directives valid in your country.</li></ul> |

Cables, Accessories, Additional Components
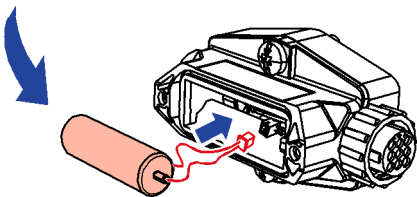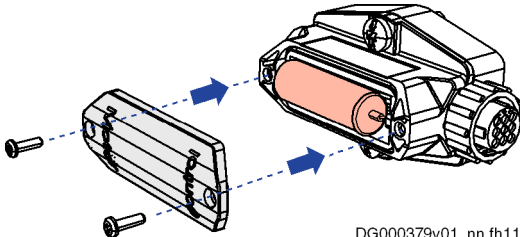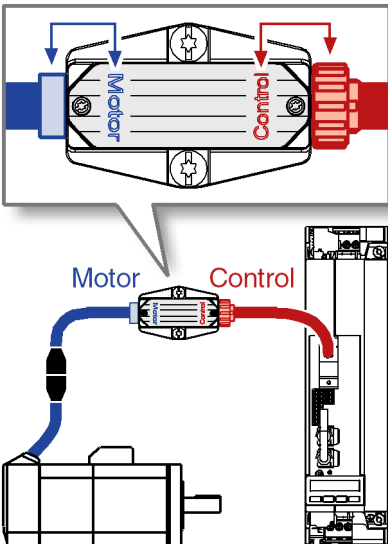
|    |                                                                                                                                                                                                                            |                                                                                                                                                                                                                                                                                                                     |
|----|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 3. |  <p>DG000376v01_nn.fh11</p>                                                                                                               | <ul style="list-style-type: none"><li>• Insert new battery into battery compartment.</li><li>• Connect connector of battery to mating connector in battery compartment.</li><li>• Place cable in battery compartment in such a way that cover is flush with battery box when screwed on in the next step.</li></ul> |
| 4. |  <p>DG000379v01_nn.fh11</p>  <p>DG000380v01_nn.fh11</p> | <ul style="list-style-type: none"><li>• Screw on cover in correct orientation (tightening torque: 0.8 Nm).</li><li>• Check whether cover fits correctly. Cable in battery compartment mustn't get stuck between cover and battery box. Cover must be flush with battery box at all points.</li></ul>                |


Tab.8-7: Replacing the Battery

## 8.2.5 Encoder Cable for MSM Motors with Absolute Value Encoder (RKG0041)

### Use

The encoder cable **RKG0041** (part no.: R911335747) is used to operate MSM motors with absolute value encoder. The encoder cable is connected to the encoder evaluation of the drive controller via a D-Sub connector with integrated 4-pin spring terminal (RGS0001/K01).

A battery or a UPS is connected to the spring terminal so that the encoder data are buffered and the position of the absolute value encoder is retained in case voltage is switched off. For drive controllers arranged side by side, the voltage can be looped through via the spring terminal to the neighboring drive controllers.

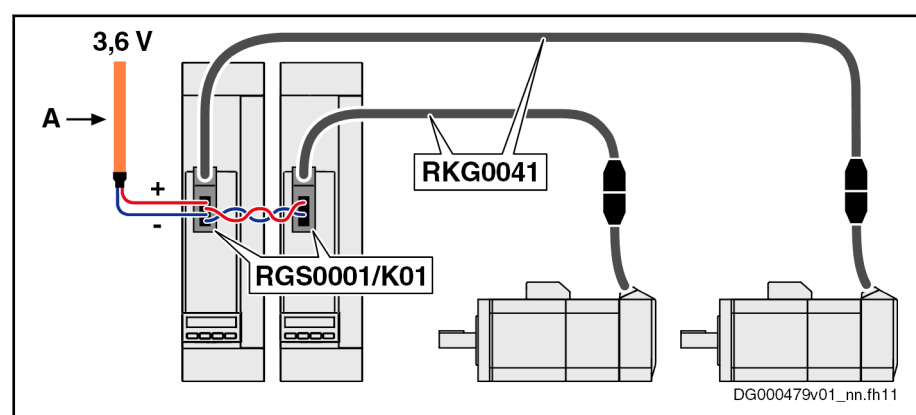


|             |                                                       |
|-------------|-------------------------------------------------------|
| 3.6 V       | Direct voltage source (battery or UPS)                |
| A           | Shielded lines; e.g. (2x0.5)C                         |
| RKG0041     | Encoder cable                                         |
| RGS0001/K01 | D-Sub connector with integrated 4-pin spring terminal |
| 1           |                                                       |

Fig. 8-14: RKG0041 with D-Sub Connector RGS0001/K01



Cables, Accessories, Additional Components


Properties

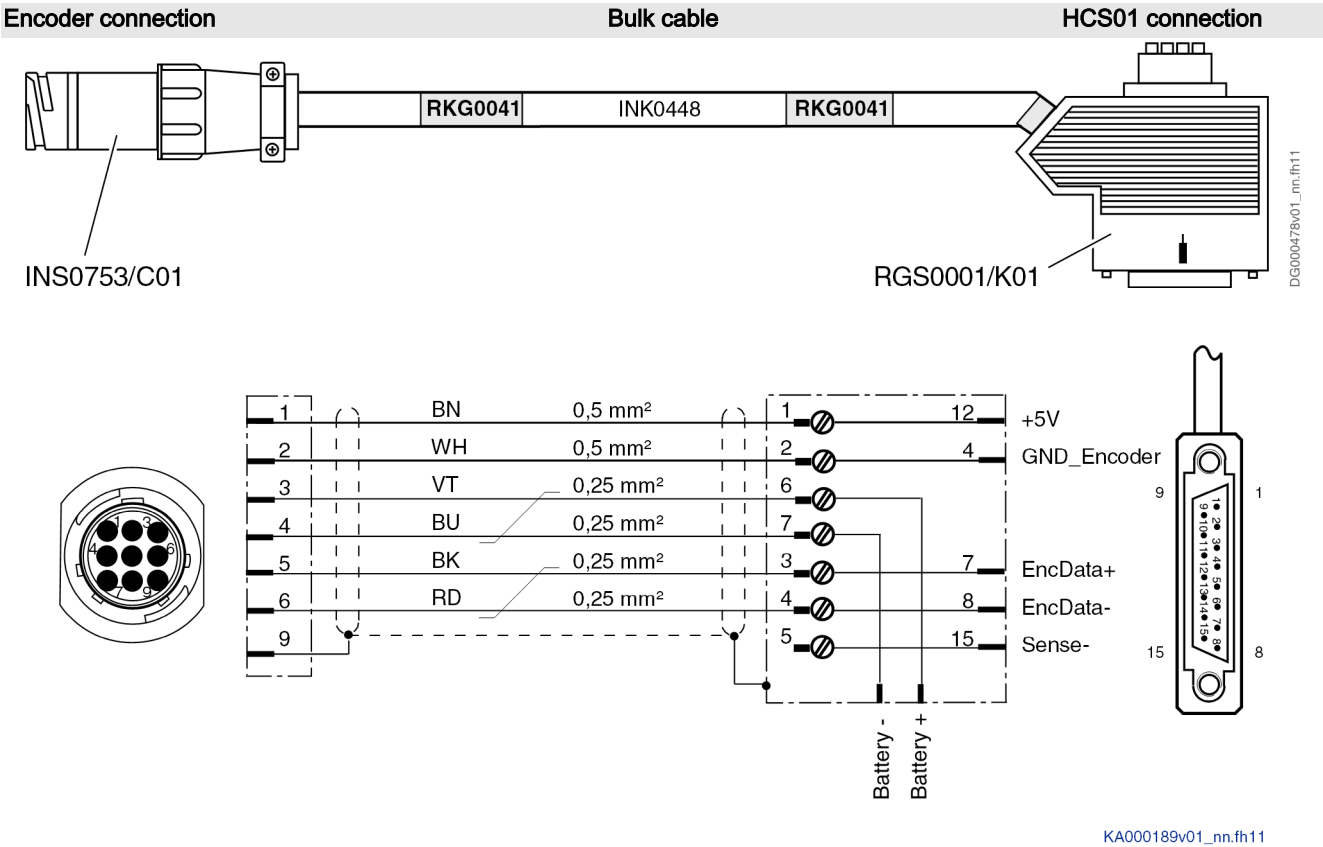

Tab.8-8: RKG0041

**Length** 40 m at most (reason: no Sense line active).  
If you need longer encoder cables, use the accessory SUP-E01-MSM-BAT-TERYBOX.

Spring Terminal

| View                                                                                | Con-<br>nection | Signal name | Function            |
|-------------------------------------------------------------------------------------|-----------------|-------------|---------------------|
|  | +               | +3.6V       | Voltage input       |
|                                                                                     | +               |             |                     |
|                                                                                     | -               | 0V          | Reference potential |
|                                                                                     | -               |             |                     |
|                                                                                     |                 |             |                     |
| Spring terminal (connector)                                                         | Unit            | Min.        | Max.                |
| Connection cable                                                                    | mm <sup>2</sup> | 0,25        | 1,5                 |
| Stranded wire                                                                       | AWG             | 24          | 16                  |
| Stripped length                                                                     | mm              | 10          |                     |

Tab.8-9: Spring Terminal

## Project Planning

**UPS** DC 3.6 V  $\pm 10\%$ ; 1 mA

**Battery** 3.6 V; lithium

Lithium batteries are long-life batteries and can be stored for a long time. The required capacity depends on the desired service life of the battery and the number of connected motors. The battery is not included in the scope of supply and must be ordered separately.

- Recommended battery type:  
maxell ER6C; 3.6 V / 1.8 Ah  
(The accessory SUP-E03-DKC\*CS-BATTERY (part no.: R911295648) contains this battery.)
- Alternative battery types:
  - TADIRAN SL760, 3.6 V / 2.1 Ah
  - JAUCH ER17505, 3.6 V / 3.6 Ah
  - JAUCH ER34615 3.6 V / 19 Ah



To be observed for transport:

The alternative battery types have a relatively high content of lithium and are hazardous material Class 9.

**Selecting the Battery Capacity** 1.8 Ah per drive

The base load resistance in the D-Sub connector has been adjusted to this battery capacity. The service life of the battery depends on the switch-on and switch-off times of the drive and with a battery capacity of 1.8 Ah it is approx. 2 to 10 years.

Battery current per drive (encoder current + base load current):

- Drive Off: Approx. 70  $\mu$ A
- Drive On: Approx. 10  $\mu$ A

**Battery Base Load and Battery Capacity**

The D-Sub connector contains a base load resistance of 499 k $\Omega$ . The base load resistance causes a standby current of 7  $\mu$ A which must flow with 3.6 V / 1.8 Ah for a lithium battery. This avoids premature aging of the battery and a relatively long service life.

If you use a bigger battery (> 1.8 Ah) at one D-Sub connector only, connect an external resistor at the 4-pin spring terminal so that a higher standby current flows.

How to calculate the external resistance ( $R_{\text{ext}}$ ):

$$R_{\text{ext}} = 3.6 \text{ V} / I_{\text{ext}}$$

$$I_{\text{ext}} = [\text{battery capacity} / 1.8 \text{ Ah}] \times 7 \mu\text{A} - (7 \mu\text{A} \times \text{number\_connectors})$$

*Examples*

- 1 D-Sub connector + battery 1.8 Ah  $\Rightarrow$   
No additional base load resistance required

## Cables, Accessories, Additional Components

- 1 D-Sub connector + battery 3.6 Ah  $\Rightarrow$   
Additional base load resistance of 499 k $\Omega$  required
- 2 D-Sub connectors + battery 3.6 Ah  $\Rightarrow$   
No additional base load resistance required
- 5 D-Sub connectors + battery 36 Ah  $\Rightarrow$   
Additional base load resistance of 34 k $\Omega$  required

*Calculation*

- $I_{\text{ext}} = [36 \text{ Ah} / 1.8 \text{ Ah}] \times 7 \text{ }\mu\text{A} - (7 \text{ }\mu\text{A} \times 5) = 105 \text{ }\mu\text{A}$
- $R_{\text{ext}} = 3.6 \text{ V} / 105 \text{ }\mu\text{A} = 3.6 \text{ V} / 0.000105 \text{ A} = 34 \text{ k}\Omega$



The examples contain guide values for the base load resistance. The required base load resistance cannot be calculated by means of the capacity for every lithium battery.

A lithium battery with a 5-fold higher capacity might possibly require not more than a 3-fold higher base load current. If you use other batteries than ER6C (1800 mAh), ask the battery manufacturer for the required base load current.

## Installation


## Connecting the Battery / UPS

**⚠ WARNING**

**Risk of injury by exploding batteries!**

Pay attention to

- the correct polarity when connecting the battery
- the correct dimensioning of the external resistor
- the safety instructions of the battery manufacturer

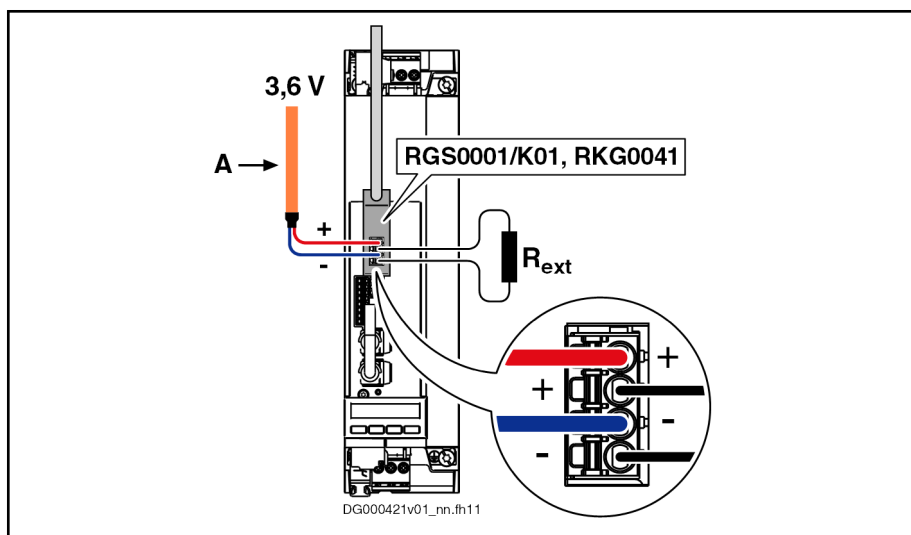

3.6 V

Direct voltage source (battery or UPS)

A

Shielded lines, e.g. (2x0.5)C; connect shield of cable to the shield connection at the top of the device

$R_{\text{ext}}$

External resistor: If you use a bigger battery (> 1.8 Ah) at one RGS0001/K01 D-Sub connector only, connect an additional external resistor (value of  $R_{\text{ext}}$ : See "Battery Base Load and Battery Capacity").

Fig. 8-15:

Connecting the Battery / UPS

Cables, Accessories, Additional Components

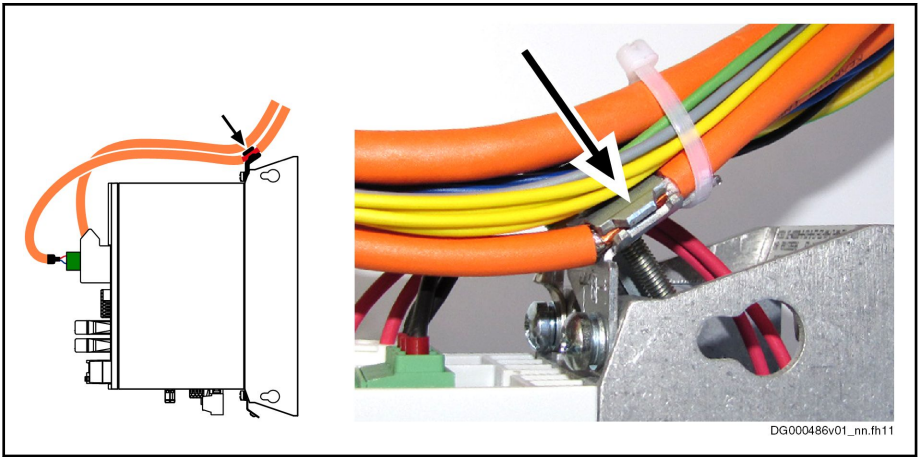


Fig. 8-16: Shield Connection of Shielded Lines at the Top of the Device


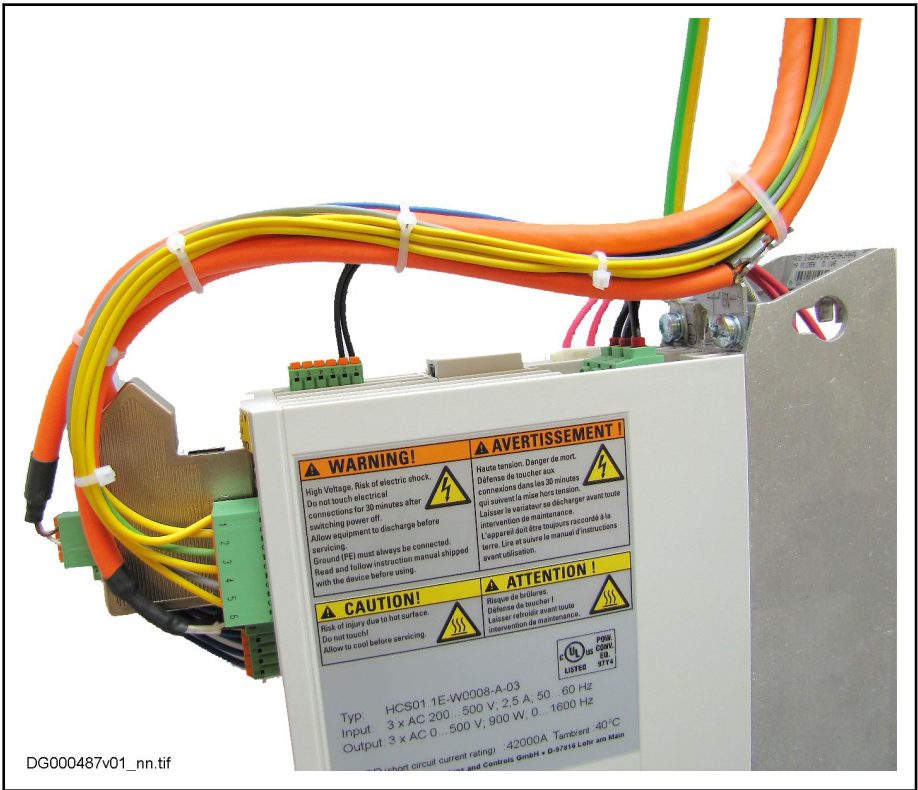


Fig. 8-17: Example of a Complete Wiring

**Fixing the Battery** You can fix the battery to the encoder cable with a cable tie, for example.

## Cables, Accessories, Additional Components

## Looping Through the Voltage

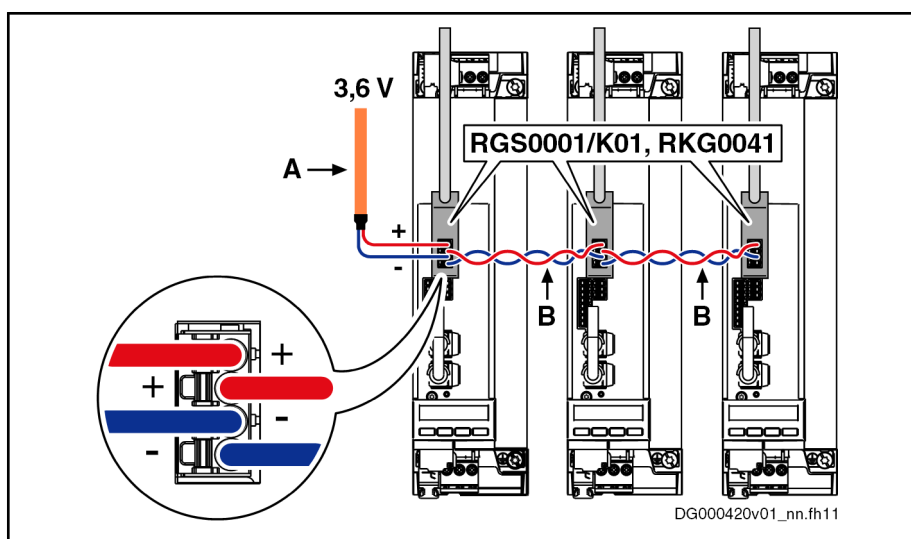

3.6 V

Direct voltage source (battery or UPS)

A

Shielded lines, e.g. (2x0.5)C; connect shield of cable to the shield connection at the top of the device

B

Twisted single wires

Fig. 8-18:

Looping Through the Voltage

## Replacing the Device

When replacing an HCS01, observe the following aspect:

Leave the 4-pin spring terminal with the connected battery/UPS at the D-Sub connector so that voltage is still applied and the encoder position is retained.

8.2.6 D-Sub Connector for Encoder Cable and Battery Connection (RGS0001/K01)




Using our **ready-made encoder cable RKG0041** (part no. R911335747) saves you the time-consuming and error-prone work of assembling your encoder cable.

The RKG0041 encoder cable comes with an RGS0001/K01 D-Sub connector and a correctly wired motor-side encoder connection.


**Use** The accessory **RGS0001/K01** (part no. R911335738) is used to operate MSM motors with absolute value encoders. RGS0001/K01 is a D-Sub connector with an integrated 4-pin spring terminal and an internal terminal connector for encoder cables.

A battery or a UPS is connected to the spring terminal so that the encoder data are buffered and the position of the absolute value encoder is retained in case voltage is switched off.

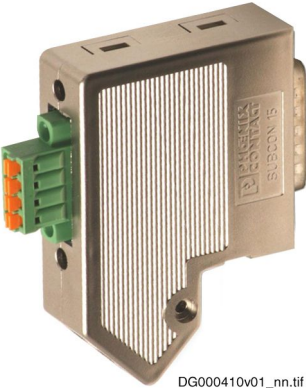

DG000410v01\_nn.tif

**RGS0001/K01**

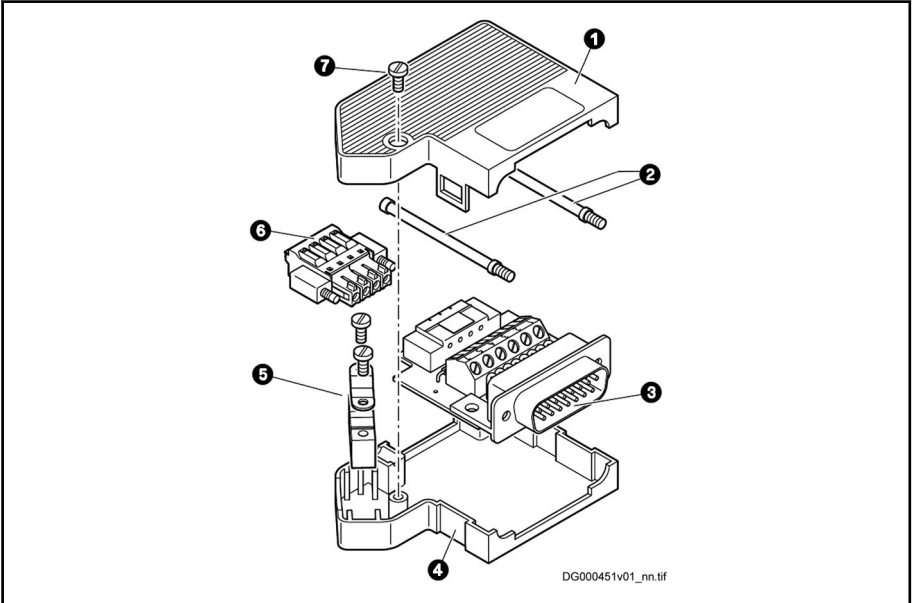

DG000451v01\_nn.tif

|   |                                                                                                                                                                                                      |
|---|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1 | Top shell of housing                                                                                                                                                                                 |
| 2 | Mounting screws                                                                                                                                                                                      |
| 3 | Circuit board with terminal connector for the encoder cable, female connector (6), base load resistance (to avoid premature aging of a connected 3.6 V lithium battery) and D-Sub connector (15-pin) |
| 4 | Bottom shell of housing                                                                                                                                                                              |
| 5 | Strain relief and shield connection of encoder cable                                                                                                                                                 |
| 6 | 4-pin spring terminal for connecting a 3.6 V lithium battery or the corresponding UPS; via the spring terminal, the voltage can be looped through to other drive controllers                         |
| 7 | Housing screw                                                                                                                                                                                        |

Fig.8-19: Parts

Tab.8-10: RGS0001/K01

## Cables, Accessories, Additional Components



When you connect the RGS0001/K01 connector to an encoder cable, you must assemble the encoder cable accordingly on the motor side:

In accordance with the interconnection diagram, connect the battery wires for motor-side encoder connection in the connector (INS0753/C01).

## Scope of Supply

- RGS0001/K01
- Product insert with information on assembly

## Dimensions

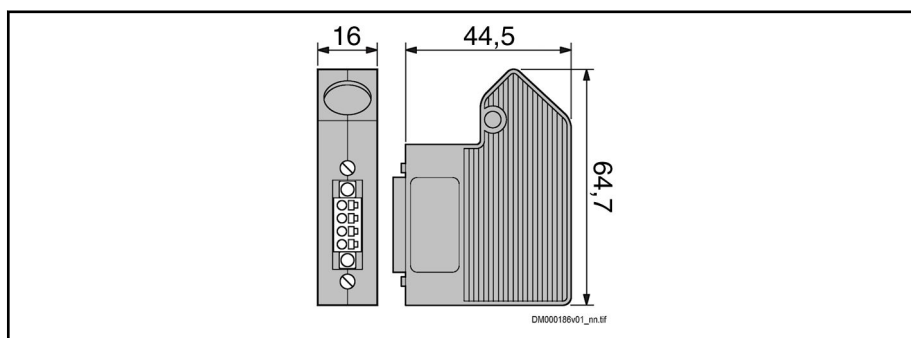


Fig. 8-20: Dimensions

## Interconnection Diagram


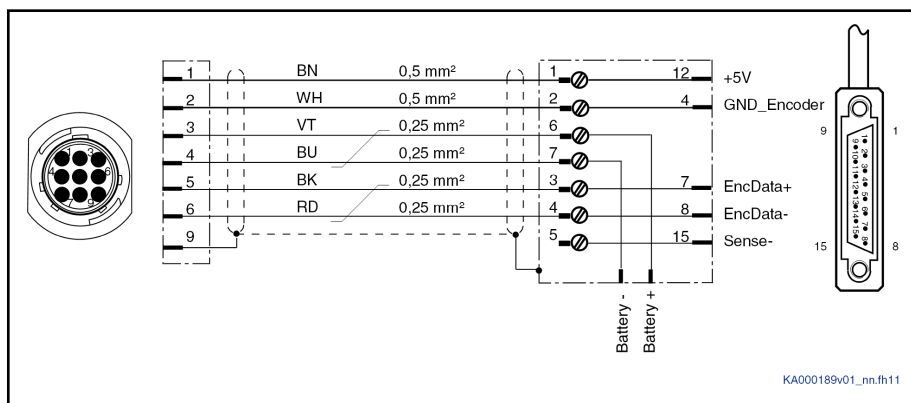


Fig. 8-21: Interconnection Diagram

## Assembly in Conjunction with Cable INK0448

## 1. Assemble cable:

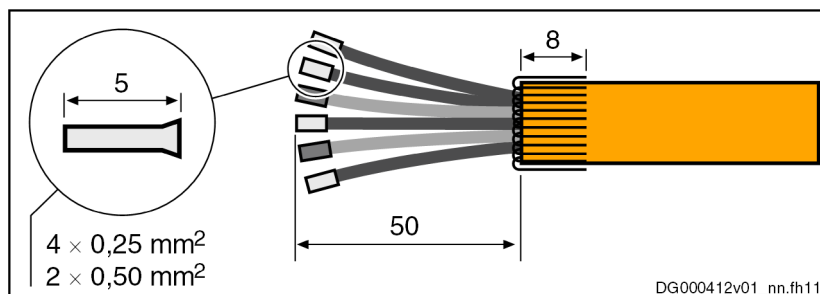

## Required ferrules:

- 4 x 0,25 mm<sup>2</sup>

DG000412v01\_nn.fh11


## Cables, Accessories, Additional Components

- $2 \times 0.50 \text{ mm}^2$
- Length: 5 mm
- Without plastic collar


Length of inner wires incl. ferrules starting at cable jacket: 50 mm

Fold back shield braid over outer cable jacket, comb it out and cut it to 8 mm.

### 2. Open housing:

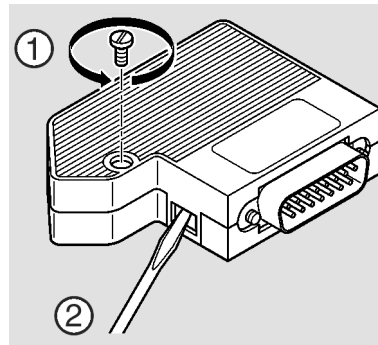


- Unscrew housing screw ①.
  - Unlock top shell of housing with screwdriver and open housing ②.
3. Connect cable according to interconnection diagram.
  4. Insert circuit board into housing in accordance with desired outgoing direction of encoder cable.

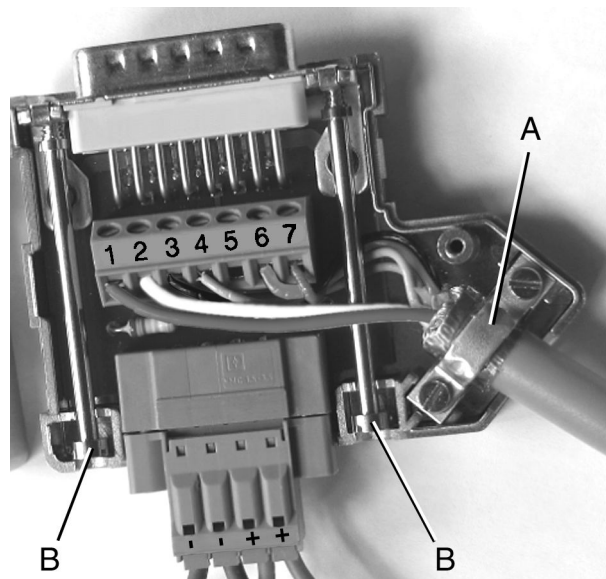

- Put shield braid under clip (A) of strain relief and screw on clip (A).
  - Insert mounting screws (B) and tuck wires away.
5. Close housing:  
Put top shell of housing onto bottom shell of housing, engage it in bottom shell and screw housing screw down.
  6. Unless already done:
    - By means of appropriate crimping tool, add the two contacts for battery connection.



## Cables, Accessories, Additional Components

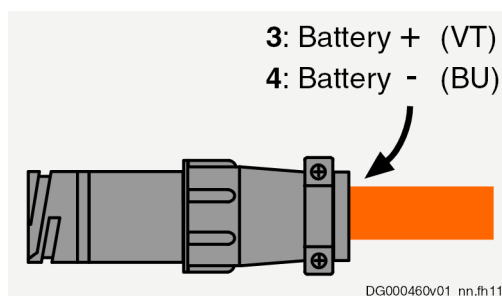

8.2.7 RKB0011, Multi-Ethernet Cable

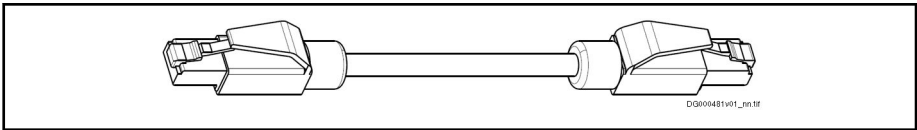


Fig.8-22: RKB0011

**Use** The cable connects the drive system to the higher-level control.

**Length That Can Be Ordered, Order Code**

| Length                            | Order code                                                                  | Parts number |
|-----------------------------------|-----------------------------------------------------------------------------|--------------|
| Select as desired<br>(max. 100 m) | RKB0011/xxx,x (xxx,x = length in meters)<br>Example: 13.5 m ⇒ RKB0011/013,5 | R911316888   |
| 5 m                               | RKB0011/005,0                                                               | R911321548   |




Tab.8-11: RKB0033

**RKB0011**

**Plug-in connector bus**  
RBS0016/S01 (RJ-45,  
4-pin)

**Bulk cable**  
REB0400

**Plug-in connector bus**  
RBS0016/S01 (RJ-45,  
4-pin)

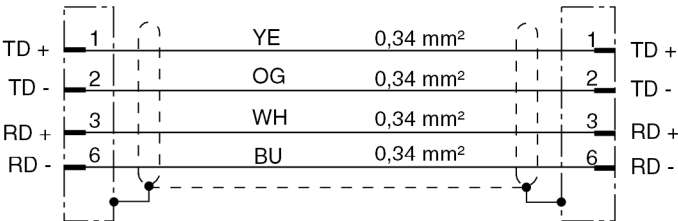

KA000170v02\_nn.fh11

Tab.8-12: Interconnection Diagram RKB0011

Cables, Accessories, Additional Components

8.2.8    RKB0013, Multi-Ethernet Cable

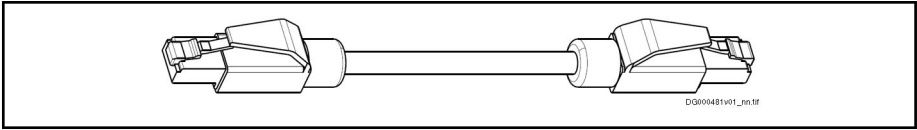


Fig.8-23:    RKB0013




**Use**    Short cable for connecting an electronic control system KCU to a neighboring device in the control cabinet.  
Minimum bending radius: 30.75 mm

Length That Can Be Ordered, Or-  
der Code

| Length | Order code    | Parts number |
|--------|---------------|--------------|
| 0.55 m | RKB0013/00,55 | R911317801   |

Tab.8-13:    RKB0013

|                              |                                               |                              |
|------------------------------|-----------------------------------------------|------------------------------|
| <b>RKB0013</b>               |                                               |                              |
| <b>Plug-in connector bus</b> | <b>Bulk cable</b>                             | <b>Plug-in connector bus</b> |
| RJ-45, 8-pin                 | sercos III cable, 100-Base-T, CAT5E, shielded | RJ-45, 8-pin                 |

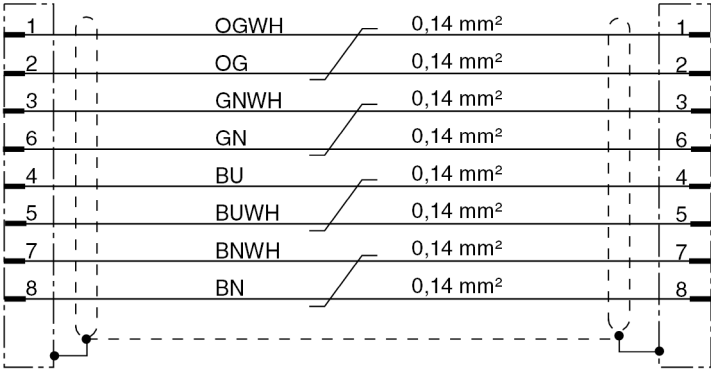

KA000190v02\_nn.th11

**Use instruction:** only fixed lengths

Tab.8-14:    Interconnection Diagram RKB0013

## 8.2.9 Hall Sensor Adapter Box (SHL03.1-NNN-S-NNN)

**Use** The Hall sensor adapter box "SHL03.1-NNN-S-NNN" (material number: R911335257) is used to operate linear MCL motors. The Hall sensor adapter box processes signals of the following systems:

- Digital Hall sensor
- Length measuring system

The Hall sensor adapter box transmits the signals for encoder evaluation to the drive controller.

The housing is made of sheet steel and has the degree of protection IP20.

 For detailed information on linear MCL motors, see the documentation "Rexroth IndraDyn L, Ironless Linear Motors MCL" (R911330592).

### Dimensions

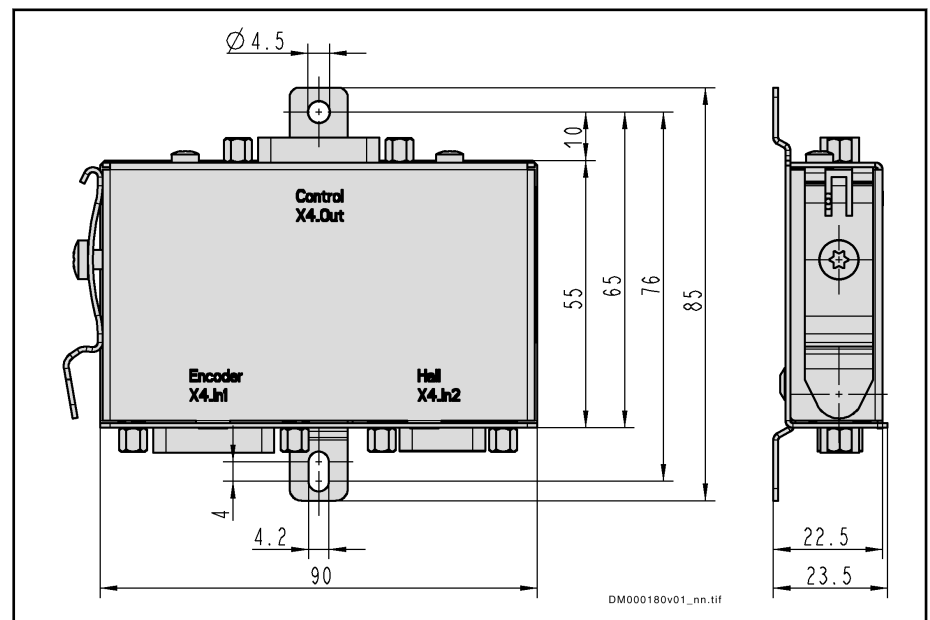


Fig. 8-24: Dimensions

**Mounting** Options for mounting:

- Top-hat rail (TH 35-7.5 according to EN 60715)
- With 2 screws (M4) to the mounting surface; select the appropriate screw type and length for the mounting surface

The mounting position can be selected as desired.

Cables, Accessories, Additional Components

Connection Points

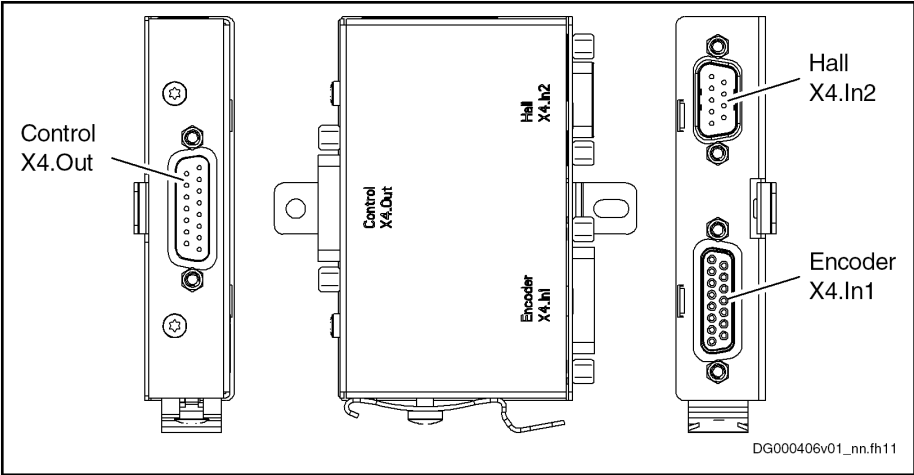


Fig.8-25: Connection Points

Encoder X4.In1

| View                              | Identification    | Function           |      |
|-----------------------------------|-------------------|--------------------|------|
| <br>DA000053v01_nn.FH9            | Encoder<br>X4.In1 | Encoder connection |      |
| D-Sub, 15-pin, female             | Unit              | Min.               | Max. |
| Connection cable<br>Stranded wire | mm²               | 0,25               | 0,5  |

Tab.8-15: Function, Pin Assignment, Properties


| Connection | Signal      | Function                                  |
|------------|-------------|-------------------------------------------|
| 1          | GND_shld    | Connection signal shields (inner shields) |
| 2          | A+          | Track A positive                          |
| 3          | A-          | Track A negative                          |
| 4          | GND_Encoder | Reference potential for power supplies    |
| 5          | B+          | Track B positive                          |
| 6          | B-          | Track B negative                          |
| 7          | n. c.       |                                           |
| 8          | n. c.       |                                           |
| 9          | R+          | Reference track positive                  |
| 10         | R-          | Reference track negative                  |
| 11         | +12V        | Encoder supply 12 V                       |

Cables, Accessories, Additional Components

| Connection        | Signal | Function                                   |
|-------------------|--------|--------------------------------------------|
| 12                | +5V    | Encoder supply 5V                          |
| 13                | n. c.  |                                            |
| 14                | n. c.  |                                            |
| 15                | Sense  | Return of reference potential (Sense line) |
| Connector housing |        | Overall shield                             |

Tab.8-16: Pin Assignment

Hall X4.In2

| View                                                                              | Identification  | Function               |      |
|-----------------------------------------------------------------------------------|-----------------|------------------------|------|
|  | Hall<br>X4.In2  | Hall sensor connection |      |
|                                                                                   |                 |                        |      |
|                                                                                   |                 |                        |      |
| D-Sub 9-pin, male                                                                 | Unit            | Min.                   | Max. |
| Connection cable                                                                  | mm <sup>2</sup> | 0,25                   | 0,5  |
| Stranded wire                                                                     |                 |                        |      |


Tab.8-17: Function, Pin Assignment, Properties

| Connection        | Signal | Function                             |
|-------------------|--------|--------------------------------------|
| 1                 | +12 V  | Power supply                         |
| 2                 | S1     | Hall sensor signal 1                 |
| 3                 | GND    | Reference potential for power supply |
| 4                 | S2     | Hall sensor signal 2                 |
| 5                 | GND    | Reference potential for power supply |
| 6                 | GND    | Reference potential for power supply |
| 7                 | GND    | Reference potential for power supply |
| 8                 | S3     | Hall sensor signal 3                 |
| 9                 | GND    | Reference potential for power supply |
| Connector housing |        | Overall shield                       |

Tab.8-18: Pin Assignment

Cables, Accessories, Additional Components

Control X4.Out

| View                                                                                                        | Identification  | Function                                              |             |
|-------------------------------------------------------------------------------------------------------------|-----------------|-------------------------------------------------------|-------------|
|  <p>DA000056v01_nn.FH9</p> | Control X4.Out  | Connection for encoder evaluation of drive controller |             |
| <b>D-Sub 15-pin, male</b>                                                                                   | <b>Unit</b>     | <b>Min.</b>                                           | <b>Max.</b> |
| <b>Connection cable</b><br>Stranded wire                                                                    | mm <sup>2</sup> | 0,25                                                  | 0,5         |


Tab.8-19: Function, Pin Assignment, Properties

| Connection        | Signal      | Function                                      |
|-------------------|-------------|-----------------------------------------------|
| 1                 | GND_shld    | Connection signal shields (inner shields)     |
| 2                 | A+          | Track A analog positive                       |
| 3                 | A-          | Track A analog negative                       |
| 4                 | GND_Encoder | Reference potential for power supplies        |
| 5                 | B+          | Track B analog positive                       |
| 6                 | B-          | Track B analog negative                       |
| 7                 | Data_Hall+  | Data transmission Hall sensor signal positive |
| 8                 | Data_Hall-  | Data transmission Hall sensor signal negative |
| 9                 | R+          | Reference track positive                      |
| 10                | R-          | Reference track negative                      |
| 11                | +12V        | Encoder supply 12 V                           |
| 12                | +5V         | Encoder supply 5V                             |
| 13                | CLK_Hall+   | Clock Hall sensor signal positive             |
| 14                | CLK_Hall-   | Clock Hall sensor signal negative             |
| 15                | Sense-      | Return of reference potential (Sense line)    |
| Connector housing |             | Overall shield                                |

Tab.8-20: Pin Assignment

Cables, Accessories, Additional Components

Cables

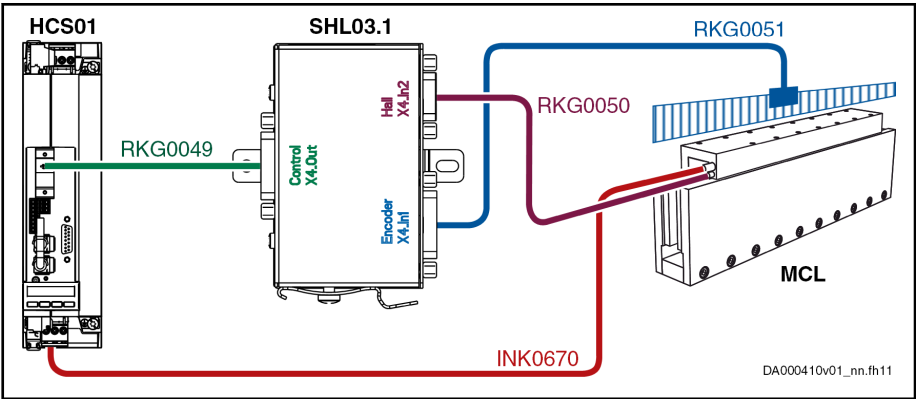

- INK0670 Motor power cable; length: max. 75 m
- RKG0049 Hall sensor adapter box (Control X4.Out) ↔ Encoder evaluation at drive controller (X4, X8); length: max. 75 m
- RKG0050 Digital Hall sensor ↔ Hall sensor adapter box (Hall X4.In2); length: max. 30 m
- RKG0051 Length measuring system ↔ Hall sensor adapter box (Encoder X4.In1); length: max. 30 m
- Fig. 8-26: Cables

Interconnection Diagram  
RKG0049

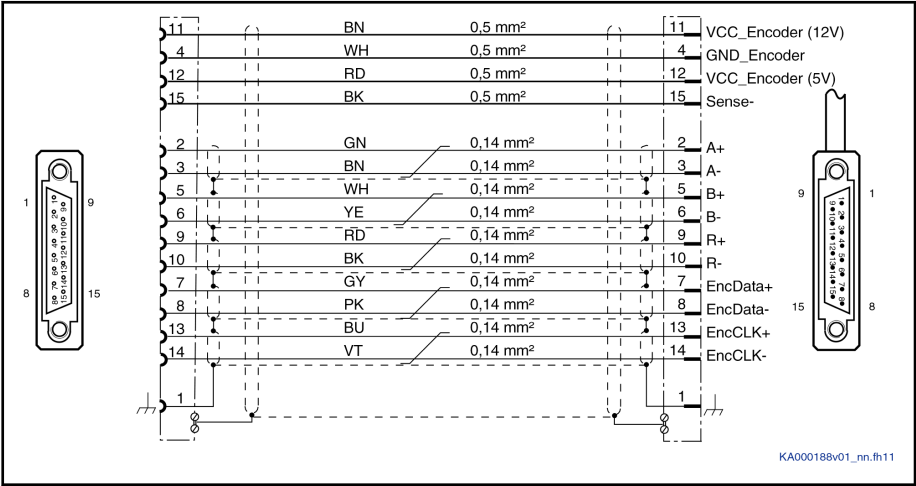


Fig. 8-27: RKG0049

Interconnection Diagram  
RKG0050

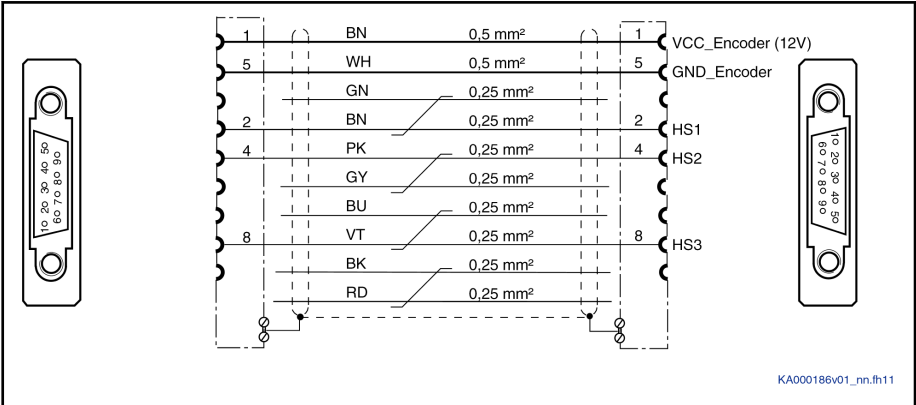


Fig. 8-28: RKG0050



Cables, Accessories, Additional Components

Interconnection Diagram  
RKG0051

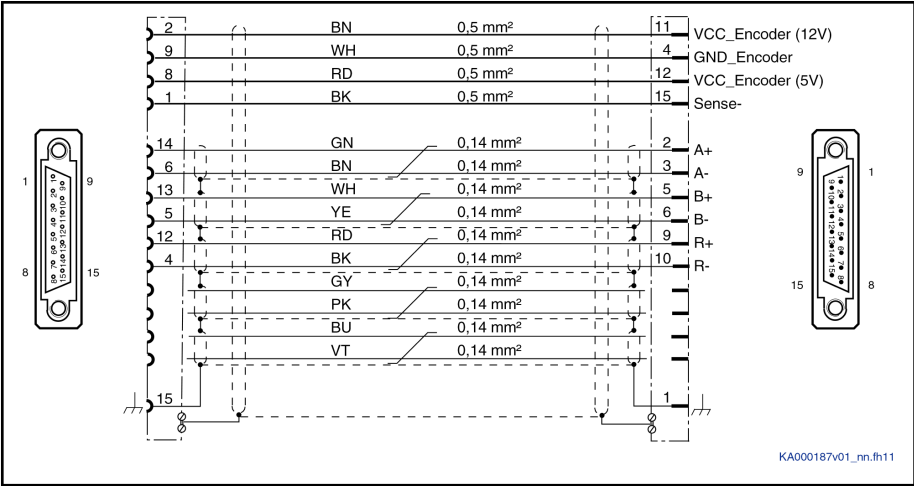


Fig. 8-29: RKG0051

8.2.10 Snap-On Ferrite (HAS05.1-015)

**Use** The accessory HAS05.1-015-NNN-NN (snap-on ferrite) ensures that Class C3 of the EMC Directive EN 61800-3 is complied with for braking resistors installed outside of the control cabinet.

The snap-on ferrite is designed for the following components:

- HCS01.1E-W0028 + HLR01.2N-01K0-N68R0-E-007
- HCS01.1E-W0054 + HLR01.2N-01K0-N28R0-E-007

Product Insert


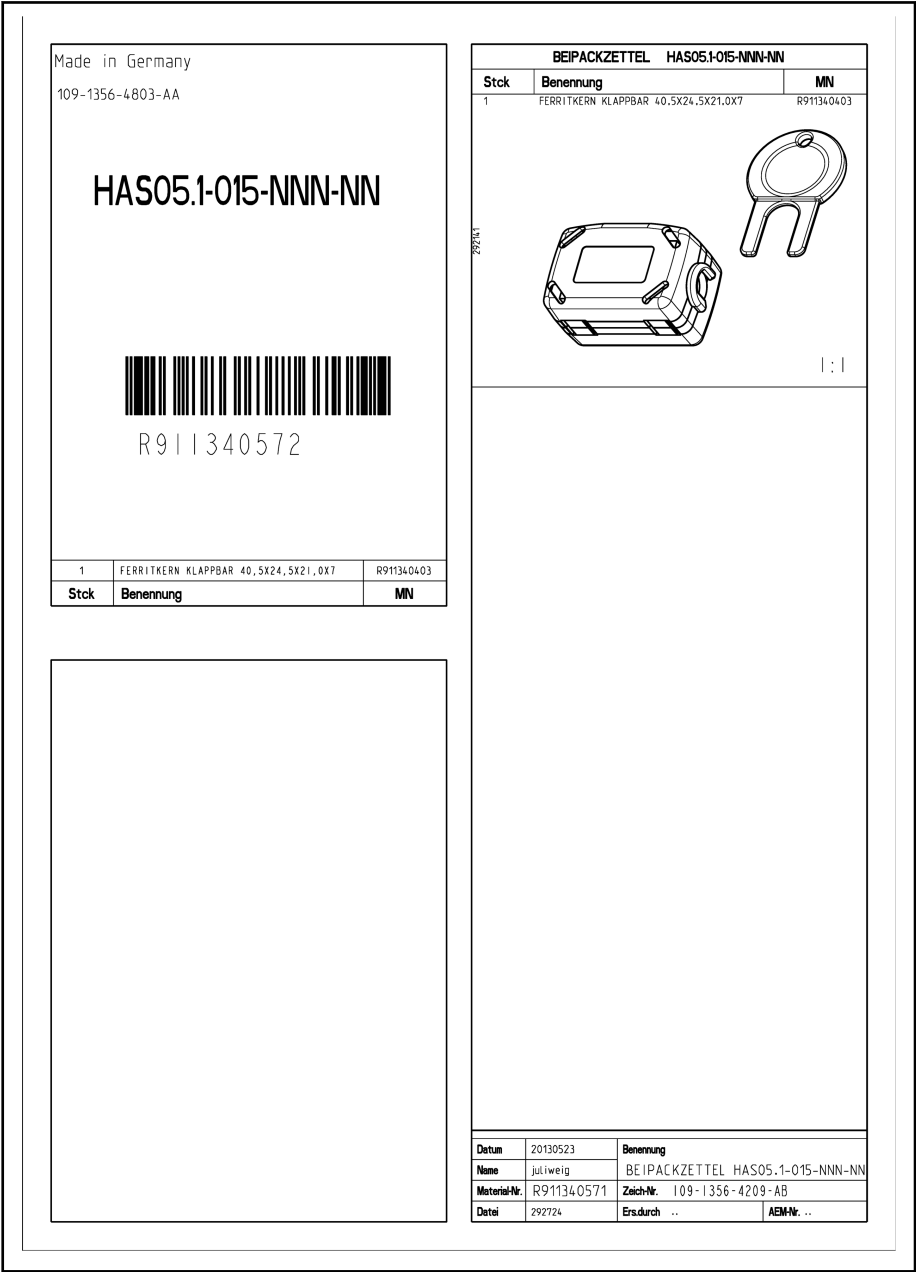


Fig. 8-30: Product Insert

## Cables, Accessories, Additional Components

## Mounting

- Before mounting the snap-on ferrite, store it for at least 1 hour at a temperature of 15 ... 25 °C.
- When mounting the snap-on ferrite, avoid putting it under mechanical stress. The housing or the ferrite core might brake.
- Do not mount the snap-on ferrite in the immediate vicinity of strong heat sources. The maximum allowed ambient temperature of the snap-on ferrite is 105 °C.
- Fix the snap-on ferrite within the control cabinet to the cable jacket of the connection line of the braking resistor (see picture). The snap-on ferrite is designed for cable diameters of 6.5 ... 7 mm.

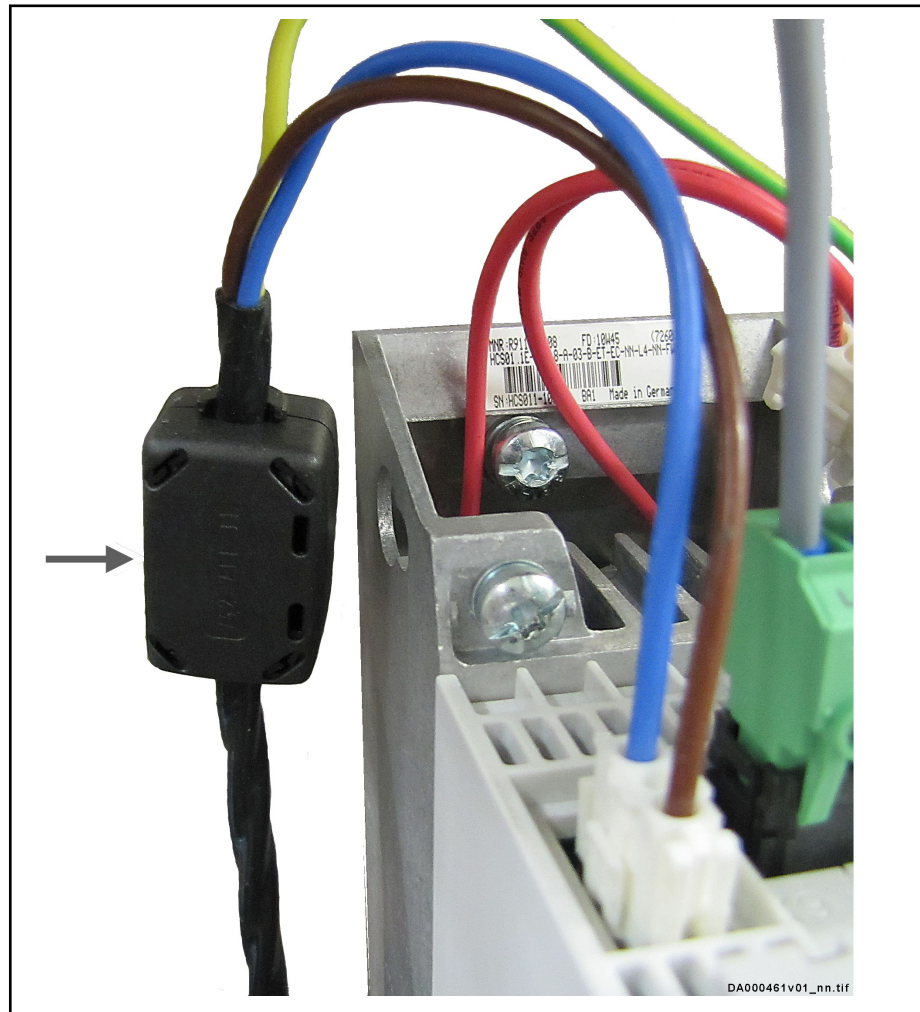

*Fig.8-31: Snap-On Ferrite at Connection Line of External Braking Resistor*

Cables, Accessories, Additional Components

To open the snap-on ferrite, use the proper tool:



Fig. 8-32: Opening the Snap-On Ferrite

Cables, Accessories, Additional Components

## 8.3 Additional Components

### 8.3.1 Transformers

#### General Information

Transformers are only needed when the mains voltage is outside of the allowed nominal voltage of the drive controller.

#### Grounded Mains

For grounded mains, the mains voltage is adjusted to the nominal voltage of the device by means of **autotransformers** which have been sized for **a specific output voltage range**.

#### Ungrounded Mains

For voltage adjustment of ungrounded mains, always connect **isolating transformers** to prevent overvoltages between outer conductor and ground.

## Autotransformers for Drive Controllers


## Types

| Abbrev.<br>Column                                                            | 1                                                                                                 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 1 | 2 | 3 | 4              | 5 | 6 | 7 | 8 | 9 | 2 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 3 | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 4 | 0 |   |  |
|------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|---|---|---|---|---|---|---|---|---|---|---|----------------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|--|
| Example:                                                                     | T                                                                                                 | R | A | F | O | D | S | T | • | 4 | , | 0 | 0              | / | L | / | 3 | 8 | 0 | , | 4 | 1 | 5 | , | 4 | 4 | 0 | - | 2 | 2 | 0 |   |   |   |   |   |   |   |   | 1 | 0 | M | M |  |
| <b>1. Object</b>                                                             |                                                                                                   |   |   |   |   |   |   |   |   |   |   |   |                |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |  |
| 1.1 Transformer .... = TRAFO                                                 |                                                                                                   |   |   |   |   |   |   |   |   |   |   |   |                |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |  |
| <b>2. Product</b>                                                            |                                                                                                   |   |   |   |   |   |   |   |   |   |   |   |                |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |  |
| 2.1 DST ..... = DST                                                          |                                                                                                   |   |   |   |   |   |   |   |   |   |   |   |                |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |  |
| <b>3. Nominal power</b>                                                      |                                                                                                   |   |   |   |   |   |   |   |   |   |   |   |                |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |  |
| 3.1 2.0 kVA ..... = •2,00                                                    |                                                                                                   |   |   |   |   |   |   |   |   |   |   |   |                |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |  |
| 3.2 2.5 kVA ..... = •2,50                                                    |                                                                                                   |   |   |   |   |   |   |   |   |   |   |   |                |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |  |
| 3.3 4.0 kVA ..... = •4,00                                                    |                                                                                                   |   |   |   |   |   |   |   |   |   |   |   |                |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |  |
| 3.4 5.0 kVA ..... = •5,00                                                    |                                                                                                   |   |   |   |   |   |   |   |   |   |   |   |                |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |  |
| 3.5 7.5 kVA ..... = •7,50                                                    |                                                                                                   |   |   |   |   |   |   |   |   |   |   |   |                |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |  |
| 3.6 10.0 kVA ..... = 10,00                                                   |                                                                                                   |   |   |   |   |   |   |   |   |   |   |   |                |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |  |
| 3.7 12.5 kVA ..... = 12,50                                                   |                                                                                                   |   |   |   |   |   |   |   |   |   |   |   |                |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |  |
| 3.8 15.0 kVA ..... = 15,00                                                   |                                                                                                   |   |   |   |   |   |   |   |   |   |   |   |                |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |  |
| 3.9 18.0 kVA ..... = 18,00                                                   |                                                                                                   |   |   |   |   |   |   |   |   |   |   |   |                |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |  |
| 3.10 20.0 kVA ..... = 20,00                                                  |                                                                                                   |   |   |   |   |   |   |   |   |   |   |   |                |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |  |
| 3.11 25.0 kVA (for vertical mounting <b>only</b> ) ..... = 25,00             |                                                                                                   |   |   |   |   |   |   |   |   |   |   |   |                |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |  |
| 3.12 35.0 kVA (for vertical mounting <b>only</b> ) ..... = 35,00             |                                                                                                   |   |   |   |   |   |   |   |   |   |   |   |                |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |  |
| 3.13 50.0 kVA (for vertical mounting <b>only</b> ) ..... = 50,00             |                                                                                                   |   |   |   |   |   |   |   |   |   |   |   |                |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |  |
| <b>4. Construction (design)</b>                                              |                                                                                                   |   |   |   |   |   |   |   |   |   |   |   |                |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |  |
| 4.1 Suitable for mounting into IP55 housing ..... = G                        |                                                                                                   |   |   |   |   |   |   |   |   |   |   |   |                |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |  |
| 4.2 Horizontal mounting ..... = L                                            |                                                                                                   |   |   |   |   |   |   |   |   |   |   |   |                |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |  |
| 4.3 Vertical mounting ..... = S                                              |                                                                                                   |   |   |   |   |   |   |   |   |   |   |   |                |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |  |
| <b>5. Nominal input voltage (phase-phase)</b>                                |                                                                                                   |   |   |   |   |   |   |   |   |   |   |   |                |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |  |
| 5.1 e.g., AC 380 V, AC 415 V, AC 440 V ..... = 380, 415, 440                 |                                                                                                   |   |   |   |   |   |   |   |   |   |   |   |                |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |  |
| <b>6. Nominal output voltage (phase-phase)</b>                               |                                                                                                   |   |   |   |   |   |   |   |   |   |   |   |                |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |  |
| 6.1 e.g., AC 230 V ..... = 220                                               |                                                                                                   |   |   |   |   |   |   |   |   |   |   |   |                |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |  |
| <b>7. Special design</b>                                                     |                                                                                                   |   |   |   |   |   |   |   |   |   |   |   |                |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |  |
| 7.1 Does not apply to standard transformers.                                 |                                                                                                   |   |   |   |   |   |   |   |   |   |   |   |                |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |  |
| 7.2 Frequency: e.g., 100 Hz ..... = 100HZ                                    |                                                                                                   |   |   |   |   |   |   |   |   |   |   |   |                |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |  |
| 7.3 Max. line diameter: e.g., 10 mm <sup>2</sup> ..... = 10MM                |                                                                                                   |   |   |   |   |   |   |   |   |   |   |   |                |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |  |
| 7.4 Degree of protection: e.g., IP23, in protective housing ST0 ..... = IP23 |                                                                                                   |   |   |   |   |   |   |   |   |   |   |   |                |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |  |
| 7.5 Nema type ..... = NEMA                                                   |                                                                                                   |   |   |   |   |   |   |   |   |   |   |   |                |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |  |
| 7.6 UL standard ..... = UL-N                                                 |                                                                                                   |   |   |   |   |   |   |   |   |   |   |   |                |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |  |
| <b>8. Standard reference</b>                                                 |                                                                                                   |   |   |   |   |   |   |   |   |   |   |   |                |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |  |
| <b>Standard</b>                                                              | <b>Title</b>                                                                                      |   |   |   |   |   |   |   |   |   |   |   | <b>Edition</b> |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |  |
| DIN EN 60529                                                                 | Degrees of protection provided by enclosures (IP code) (IEC 60529:1989 + A1:1999); German version |   |   |   |   |   |   |   |   |   |   |   | 2000-09        |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |  |
|                                                                              | EN 60529:1991 + A1:2000                                                                           |   |   |   |   |   |   |   |   |   |   |   |                |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |  |

**Note:**

• = Field does not apply

**Illustration example: DST**



*Fig.8-33: Type Code DST*

Cables, Accessories, Additional Components

Selected Transformers  
Degree of protection IP00

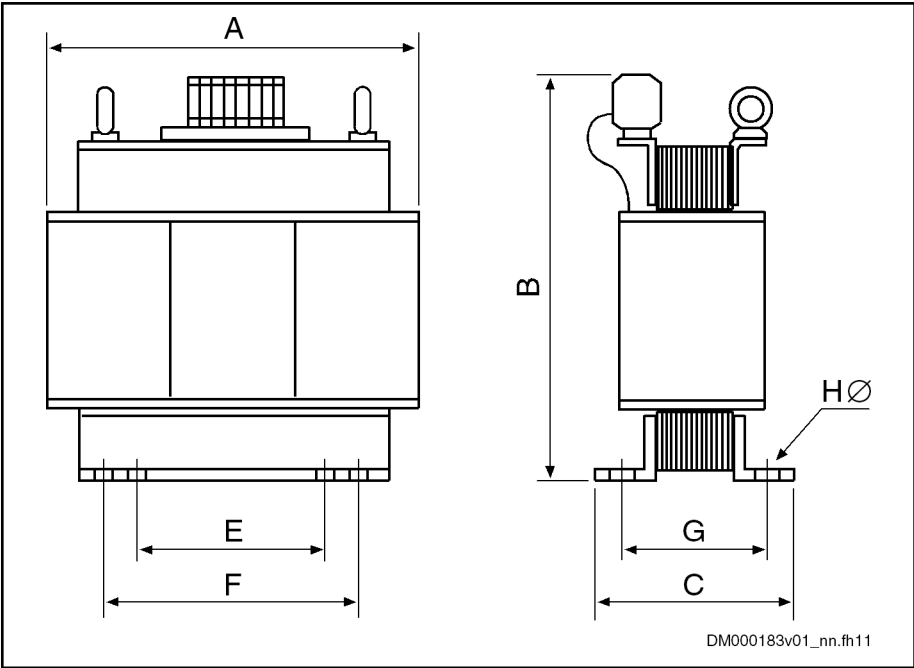


Fig.8-34:      Dimensional Drawing

| kVA / type of construction / nominal input voltage - nominal output voltage<br>(Part number) | A   | B   | C   | E   | F   | V   | HØ    | Terminal connector<br>[mm²] | Weight<br>[kg] |
|----------------------------------------------------------------------------------------------|-----|-----|-----|-----|-----|-----|-------|-----------------------------|----------------|
| 2.00 / S / 380,400,415,440 - 220<br>(R911226187)                                             | 205 | 210 | 120 | 95  | 145 | 85  | 7×15  | 4                           | 12             |
| 15.00 / S / 400,460 - 220<br>(R911255074)                                                    | 360 | 395 | 190 | 170 | 250 | 160 | 11×18 | 16                          | 62             |
| 35.00 / S / 380,415 - 220<br>(R911226907)                                                    | 420 | 450 | 245 | 190 | 280 | 200 | 14×26 | 35                          | 125            |
| 50.00 / S / 380,415 - 220<br>(R911236960)                                                    | 420 | 450 | 275 | 190 | 280 | 225 | 14×26 | 70                          | 157            |

Tab.8-21:      Data

Degree of Protection IP55  
2.5...5.0 kVA

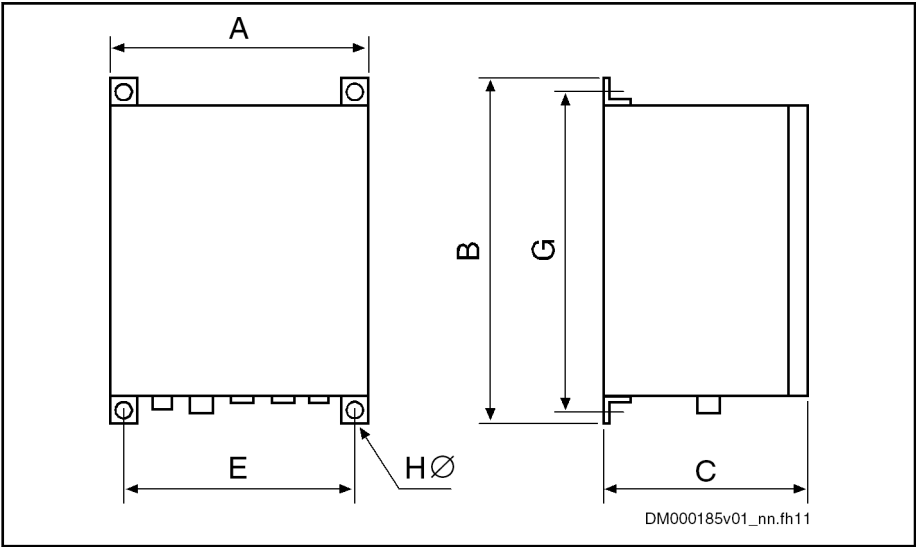


Fig.8-35: Dimensional Drawing

| kVA / type of construction / nominal input voltage - nominal output voltage (Part number) | A   | B   | C   | E   | V   | HØ | Terminal connector [mm²] | Weight [kg] |
|-------------------------------------------------------------------------------------------|-----|-----|-----|-----|-----|----|--------------------------|-------------|
| 2.50 / G / 400,415,440,460 - 230 (R911264345)                                             | 300 | 445 | 235 | 250 | 415 | 12 | 4                        | 31          |
| 3.00 / G / 400,480,500,525 - 230 (R911269274)                                             | 300 | 445 | 235 | 250 | 415 | 12 | 4                        | 31          |
| 5.00 / G / 400,415,440,460 - 230 (R911264346)                                             | 375 | 570 | 235 | 300 | 540 | 12 | 6                        | 51          |

Tab.8-22: Data



Cables, Accessories, Additional Components

10...25 kVA

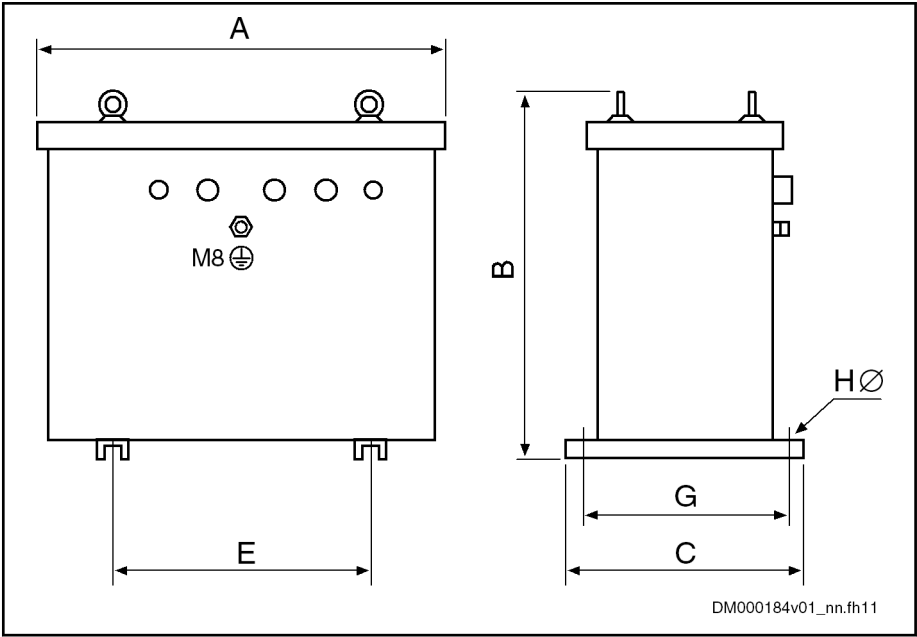


Fig.8-36:      Dimensional Drawing

| kVA / type of construction / nominal input voltage - nominal output voltage (Part number) | A   | B   | C   | E   | V   | HØ | Terminal connector [mm²] | Weight [kg] |
|-------------------------------------------------------------------------------------------|-----|-----|-----|-----|-----|----|--------------------------|-------------|
| 10.00 / G / 400,415,440,460 - 230 (R911267133)                                            | 490 | 500 | 400 | 250 | 370 | 16 | 6                        | 90          |
| 10.00 / G / 400,480,500,525 - 230 (R911264347)                                            | 490 | 500 | 400 | 250 | 370 | 16 | 6                        | 90          |
| 10.00 / G / 400,500,525 - 230 (R911260301)                                                | 490 | 500 | 400 | 250 | 370 | 16 | 6                        | 88          |
| 15.00 / G / 400,500,525 - 230 (R911260303)                                                | 595 | 600 | 480 | 280 | 440 | 16 | 16                       | 143         |
| 25.00 / G / 400,415,440,460 - 230 (R911269581)                                            | 595 | 600 | 480 | 280 | 440 | 16 | 35                       | 165         |

Tab.8-23:      Data

8.3.2 Mains Filters NFD / NFE

Type Code NFE / NFD

NFE02.1 - Mains Filter, Single-Phase

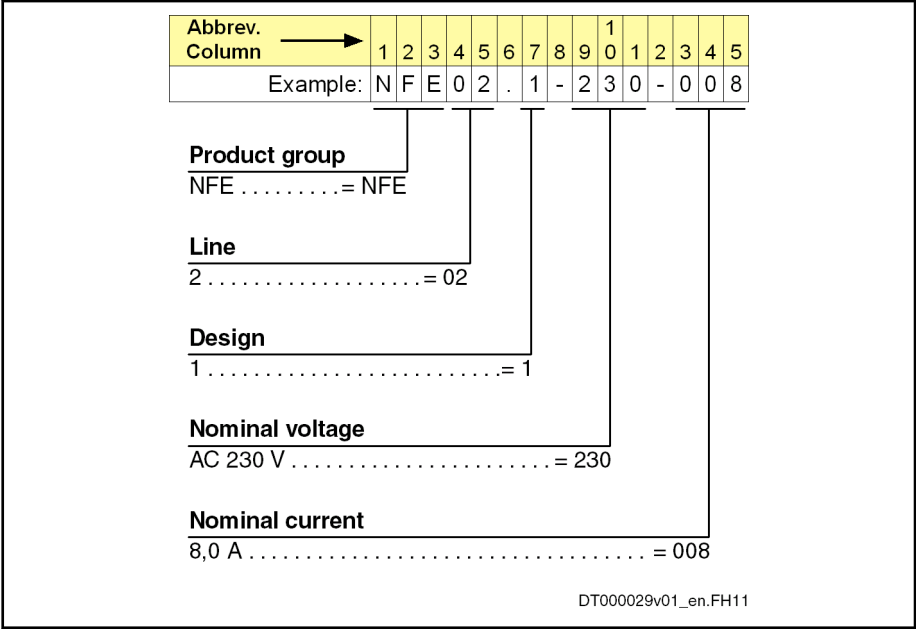


Fig. 8-37: Type Code NFE02.1

NFD03.1 - Mains Filter, Three-Phase


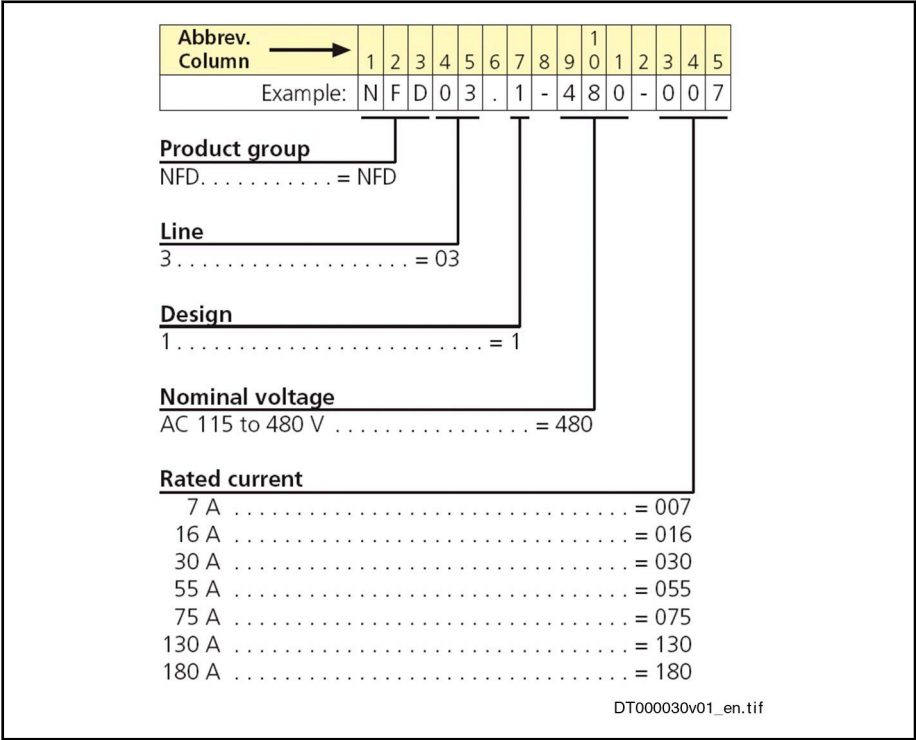


Fig. 8-38: Type Code NFD03.1

Cables, Accessories, Additional Components

Mechanical Data NFE / NFD

NFE02.1

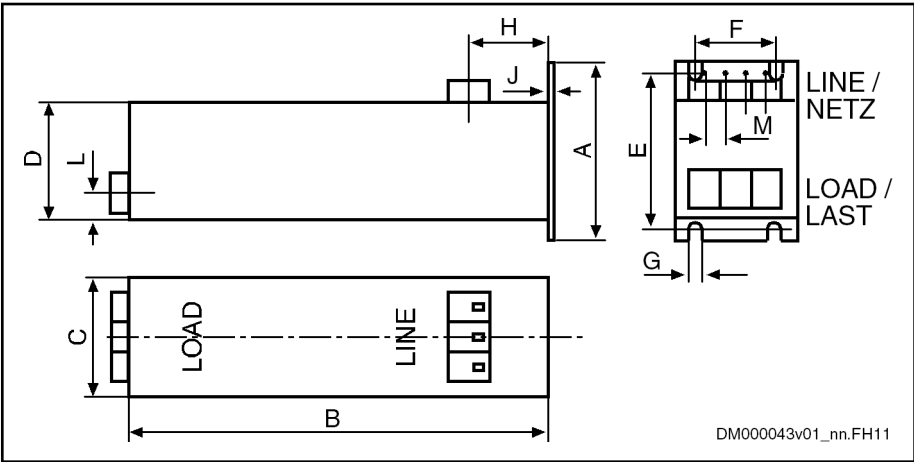

Type                      NFE02.1-230-008 (with 3 terminal connectors)  
Fig. 8-39:              Single-Phase Filter NFE02.1 for Drives

Allowed Mounting Positions      Every mounting position is allowed.

NFD03.1

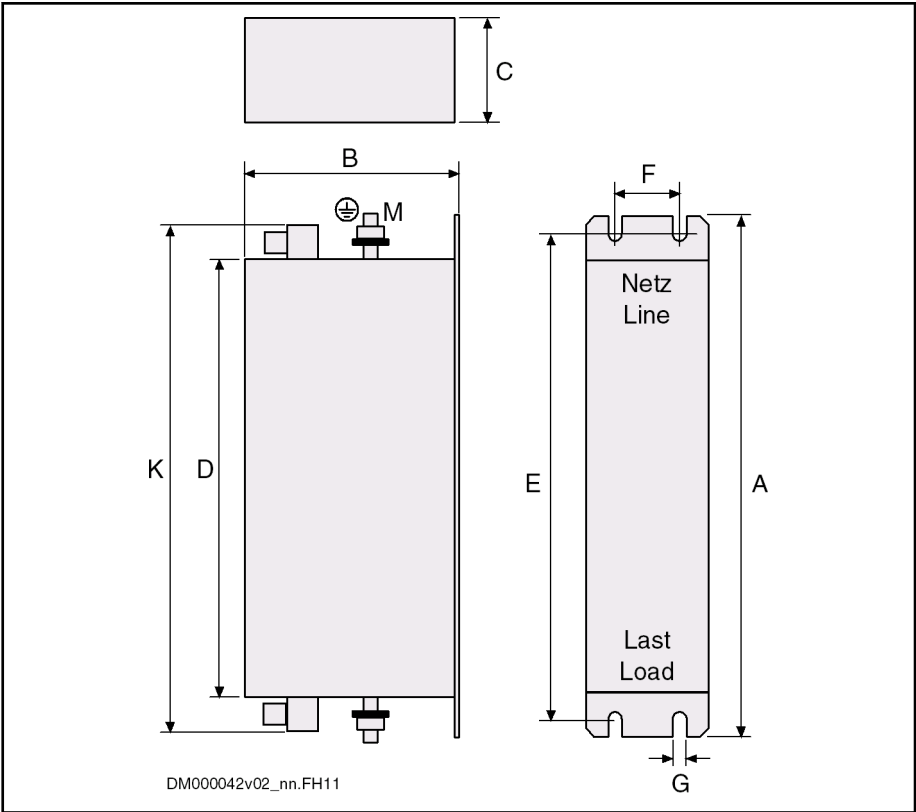


Fig.8-40: Three-Phase Current Filter NFD03.1 for Drives

Tolerance limits for NFD03.1:

- The dimensions B, C, D, K are maximum values. They can be reduced up to 15 mm.
- The ground studs M can also be arranged horizontally (protruding from the mounting flange), instead of vertically (as illustrated above).

| Mains filter type | A   | B   | C   | D   | E   | F   | G   | H  | J    | K   | L  | M   | M <sub>AE</sub> | M <sub>AKI</sub> |
|-------------------|-----|-----|-----|-----|-----|-----|-----|----|------|-----|----|-----|-----------------|------------------|
| NFD 03.1-480-007  | 190 | 90  | 50  | 160 | 180 | 20  | 5,4 | –  | –    | 190 | –  | M5  | 2,2             | 0,8              |
| NFD 03.1-480-016  | 250 | 90  | 55  | 220 | 235 | 25  | 5,4 | –  | –    | 250 | –  | M5  | 2,2             | 0,8              |
| NFD 03.1-480-030  | 270 | 100 | 60  | 240 | 255 | 30  | 5,4 | –  | –    | 270 | –  | M5  | 2,2             | 2                |
| NFD 03.1-480-055  | 250 | 105 | 90  | 220 | 235 | 60  | 5,4 | –  | –    | 260 | –  | M6  | 4               | 2,2              |
| NFD 03.1-480-075  | 270 | 145 | 90  | 240 | 255 | 60  | 6,5 | –  | –    | 280 | –  | M6  | 4               | 4,5              |
| NFD 03.1-480-130  | 270 | 160 | 100 | 240 | 255 | 65  | 6,5 | –  | –    | 330 | –  | M10 | 18              | 8                |
| NFD 03.1-480-180  | 380 | 180 | 130 | 350 | 365 | 102 | 6,5 | –  | –    | 455 | –  | M10 | 18              | 20               |
| NFE 02.1-230-008  | 90  | 210 | 60  | 60  | 80  | 40  | 5,3 | 40 | 0,75 | –   | 15 | 10  | 0,8             | 0,8              |

M<sub>AE</sub> Maximum tightening torque of the ground stud in Nm  
M<sub>AKI</sub> Maximum tightening torque of the terminal in Nm

Tab.8-24: Dimensions of the Mains Filters NFD/NFE

## Cables, Accessories, Additional Components

## Allowed Mounting Positions

| Mounting position | Note                                                                               |
|-------------------|------------------------------------------------------------------------------------|
| G1                | Allowed without restrictions                                                       |
| G2                | Allowed without restrictions                                                       |
| G3                | Mains filter may only be loaded with 80% of the maximum allowed continuous current |
| G4                | Allowed without restrictions                                                       |
| G5                | Mains filter may only be loaded with 80% of the maximum allowed continuous current |

Tab.8-25: Allowed Mounting Positions

## Electrical Data NFE / NFD



## Using mains filters in mains grounded via outer conductor

When using mains filters NFD03 in **mains grounded via outer conductor**, use an isolating transformer between mains and mains filter.

| Maximum mains connection voltage of mains 50...60 Hz<br>$U_N$ | Nominal mains current<br>$I_{nenn}$ (1) | Number of phases | Mains filter type   | Terminal connectors (3)        |                             |         | Power dissipation approx. | Weight | Type of construction |
|---------------------------------------------------------------|-----------------------------------------|------------------|---------------------|--------------------------------|-----------------------------|---------|---------------------------|--------|----------------------|
| In V                                                          | In A                                    |                  |                     | Flexible<br>[mm <sup>2</sup> ] | Rigid<br>[mm <sup>2</sup> ] | AWG     | W                         | kg     |                      |
| AC 480V +10%                                                  | 7                                       | 3                | NFD<br>03.1-480-007 | 4 (3)                          | 6 (3)                       | AWG 12  | 3,9                       | 0,7    | Vertical             |
| AC 480V +10%                                                  | 16                                      | 3                | NFD<br>03.1-480-016 | 4 (3)                          | 6 (3)                       | AWG 12  | 6,4                       | 1,0    | Vertical             |
| AC 480V +10%                                                  | 30                                      | 3                | NFD<br>03.1-480-030 | 10                             | 16                          | AWG 6   | 11,9                      | 1,4    | Vertical             |
| AC 480V +10%                                                  | 55                                      | 3                | NFD<br>03.1-480-055 | 16                             | 25                          | AWG 4   | 25,9                      | 2,0    | Vertical             |
| AC 480V +10%                                                  | 75                                      | 3                | NFD<br>03.1-480-075 | 25                             | 35                          | AWG 3   | 30,4                      | 3,5    | Vertical             |
| AC 480V +10%                                                  | 130                                     | 3                | NFD<br>03.1-480-130 | 50                             | 50                          | AWG 1/0 | 38                        | 4,7    | Vertical             |
| AC 480V +10%                                                  | 180                                     | 3                | NFD<br>03.1-480-180 | 95                             | 95                          | AWG 4/0 | 61                        | 10     | Vertical             |

Cables, Accessories, Additional Components

| Maximum mains connection voltage of mains 50...60 Hz<br>$U_N$ | Nominal mains current<br>$I_{Nenn}$ (1) | Number of phases | Mains filter type   | Terminal connectors (3) |       |        | Power dissipation approx. | Weight | Type of construction |
|---------------------------------------------------------------|-----------------------------------------|------------------|---------------------|-------------------------|-------|--------|---------------------------|--------|----------------------|
| AC 230V +10%                                                  | 7,5                                     | 1                | NFE<br>02.1-230-008 | 4 (3)                   | 6 (3) | AWG 10 | 7,2                       | 1,1    | Vertical             |
|                                                               |                                         |                  |                     |                         |       |        |                           |        |                      |

- NFD Three-phase filter  
NFE Single-phase filter  
(1) Mains-side maximum continuous current at 45 °C ambient temperature  
(2) Only use for interference suppression of the power supply unit NTM  
(3) For the equipment grounding conductor, connect a conductor cross section of 10 mm<sup>2</sup> by means of terminal pin or ring cable lug

Tab.8-26: Technical data

|                                                  |                                                                                                                                         |
|--------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|
| Operating frequency                              | From 0–60 Hz at 45 °C                                                                                                                   |
| Power dissipation                                | Measured 2 or 3 × $RI^2_{Nenn DC}$                                                                                                      |
| Temperature range                                | -25 ... +85 °C                                                                                                                          |
| Overload                                         | 1.5 × $I_{Nenn}$ 1 minute per hour or 4 × $I_{Nenn}$ for 10 s                                                                           |
| Effective attenuation                            | Frequency range 0.15–30 MHz                                                                                                             |
| Saturation behavior                              | Reduction of filter attenuation by 6 dB at 2.5-fold to 3-fold nominal current                                                           |
| Test voltage                                     | L/N → PE or L → PE: 2000 V, 50 Hz, 2 s at 25 °C<br>L/ N → L: DC 1,100 V, 2 s at 25 °C                                                   |
| Current reduction in the case of overtemperature | See formula for reduction in chapter "Calculations"                                                                                     |
| Leakage current at 50 Hz                         | Symmetrical three-phase operation: Typ. 30 mA<br>Single-phase operation or in the case of tripped fuses of a phase: Typ. 175 ... 190 mA |
| Degree of protection                             | IP 20                                                                                                                                   |

Tab.8-27: Technical Data

Cables, Accessories, Additional Components

### 8.3.3 Mains Chokes

#### Type Code

Short text  
column

1234567890123456789012345678901234567890

Example:

HNL011E-0980-N0026-A-480-NNNN

Product

HNL ..... = HNL

Line

1..... = 01

Design

1..... = 1

Supply system

Feeding ..... = E  
Regenerative ..... = R  
Feeding and regenerative .... = D

Nominal inductance

e.g. 980 µH ..... = 0980

Additional option

With capacitors ..... = C  
Current-compensated ..... = S  
None. .... = N

Nominal current

e.g. 26 A ..... = 0026

Degree of protection

IP10 ..... = A  
IP00 ..... = N

Mains connection voltage

3 x AC 400...480V -15+10%, 50/60 Hz. .... = 480  
3 x AC 400...500V -15+10%, 50/60 Hz. .... = 500  
3 x AC 380V -15%...3 x 690V +10%. .... = 690

Other design

None. .... = NNNN  
Reduced height with lateral connection. .... = NNNA  
With damping by means of thyristor circuit. .... = NNND  
Liquid cooling ..... = NNNF

Standard reference

Standard

DIN EN 60529

Title

Degrees of protection provided by enclosures (IP code)


Edition

2000-09

Fig.8-41: Type Code

DT000031v04\_en.FH11

## Type Plate

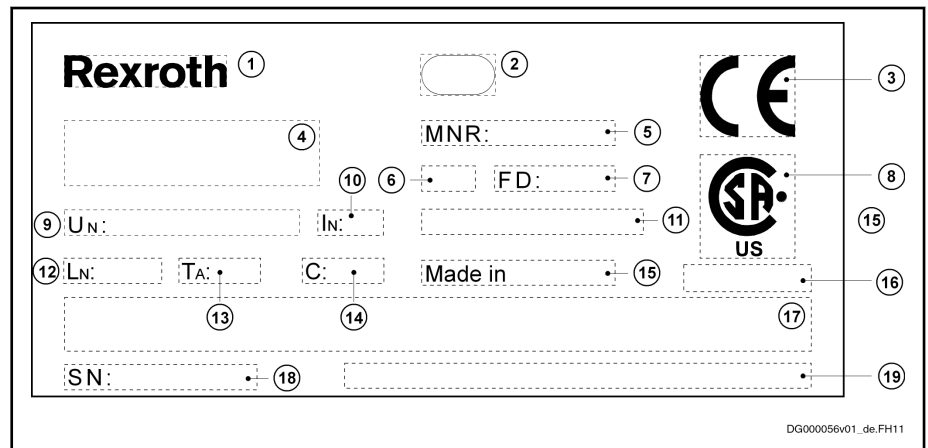

- |    |                                                  |
|----|--------------------------------------------------|
| 1  | Word mark                                        |
| 2  | Business facility number                         |
| 3  | CE label                                         |
| 4  | Type designation (two lines, 20 characters each) |
| 5  | Part number                                      |
| 6  | Change release                                   |
| 7  | Production date (YYWww)                          |
| 8  | Certification label                              |
| 9  | Nominal voltage / frequency                      |
| 10 | Nominal current                                  |
| 11 | Number of design specification                   |
| 12 | Nominal inductance                               |
| 13 | Temperature                                      |
| 14 | Number and value of additional capacitors        |
| 15 | Designation of origin                            |
| 16 | Approval number                                  |
| 17 | Bar code (39 or 93)                              |
| 18 | Serial number                                    |
| 19 | Company address                                  |

Fig. 8-42: Type Plate



Cables, Accessories, Additional Components

HNL01.1E - Mains Chokes, Feeding

Technical Data  
Mechanical System and Mounting

Dimensions Type 1:

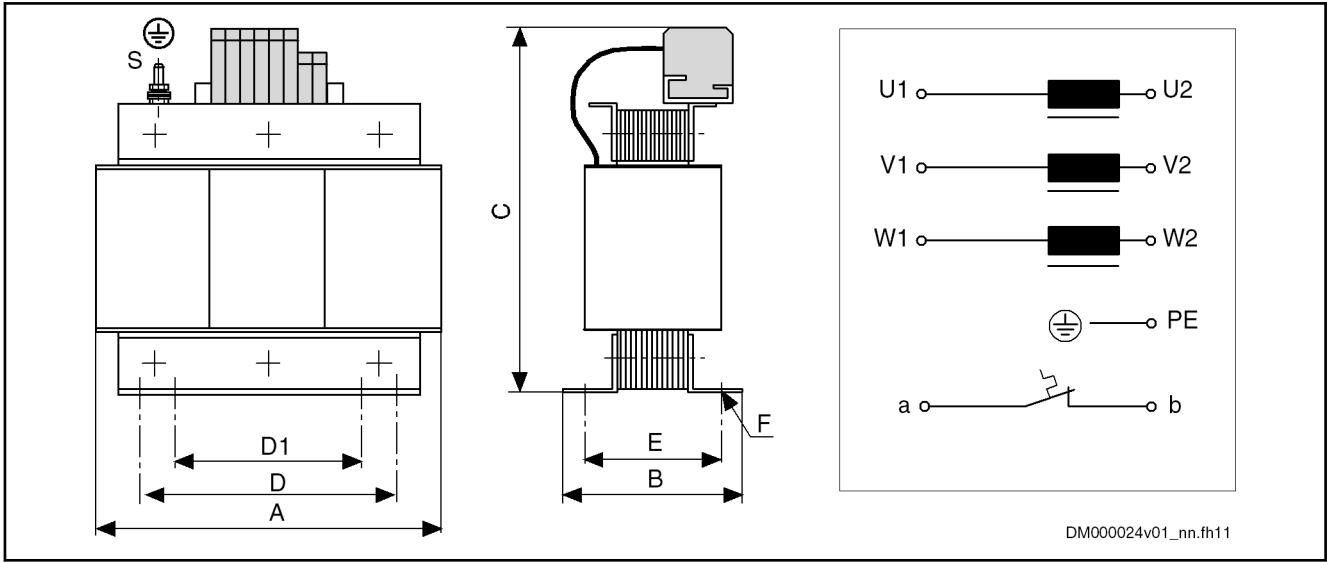


Fig.8-43: Dimensions Type 1

| Mains Choke                    | Type | Dimensions [mm] |      |     |     |    |      |          |   |   |    | Weight [kg] |
|--------------------------------|------|-----------------|------|-----|-----|----|------|----------|---|---|----|-------------|
|                                |      | A               | B    | C   | D   | D1 | E    | F 1)     | G | H | S  |             |
| HNL01.1E-1000-N0012-A-500-NNNN | 1    | 120             | 61   | 164 | 81  | -  | 44   | 6,4 × 11 | - | - | M5 | 2,7         |
| HNL01.1E-0600-N0032-A-500-NNNN | 1    | 150             | 66,5 | 185 | 113 | -  | 49,5 | 6,4 × 11 | - | - | M5 | 4,5         |

1) Long hole in "B" direction  
Tab.8-28: Dimensions, Weight

| Mains Choke                    | Connection cross section<br>mm² /AWG |      | Tightening torque<br>Nm                      |      |
|--------------------------------|--------------------------------------|------|----------------------------------------------|------|
|                                | U1, V1, W1<br>U2, V2, W2             | a, b | U1, V1, W1<br>U2, V2, W2                     | a, b |
| HNL01.1E-1000-N0012-A-500-NNNN | 4                                    | 4    | Observe the data imprinted on the component. |      |
| HNL01.1E-0600-N0032-A-500-NNNN | 10                                   | 4    |                                              |      |

Tab.8-29: Connection Cross Section, Tightening Torque

Basic Data

| Mains Choke                    | U <sub>N</sub><br>[V] | I <sub>N</sub><br>[A] | L <sub>N</sub><br>[μH] | P <sub>V</sub><br>[W] | I <sub>max</sub><br>[A] | L <sub>min</sub><br>At I <sub>max</sub> |
|--------------------------------|-----------------------|-----------------------|------------------------|-----------------------|-------------------------|-----------------------------------------|
| HNL01.1E-1000-N0012-A-500-NNNN | 500                   | 12                    | 3 × 1000               | 40                    | 25                      | 50% of L <sub>N</sub>                   |
| HNL01.1E-0600-N0032-A-500-NNNN | 500                   | 32                    | 3 × 600                | 75                    | 80                      | 50% of L <sub>N</sub>                   |

Tab.8-30: Electrical Data

Cables, Accessories, Additional Components

Temperature Contact a, b

| Switching capacity        | Switching temperature                                                                                               |
|---------------------------|---------------------------------------------------------------------------------------------------------------------|
| 1 A / AC 250 V<br>DC 24 V | 125 °C<br>HNL01.1E mains chokes of type 1 are equipped with a temperature contact (a, b), types 2, 3 and 4 are not. |

Tab.8-31: Temperature Contact

Cables, Accessories, Additional Components

### 8.3.4 External Braking Resistors HLR

#### Types

Abbrev. column →

|                                                                      |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|----------------------------------------------------------------------|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 1                                                                    | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 |
| Example: H L R 0 1 . 2 N - 0 1 K 0 - N 6 8 R 0 - E - 0 0 7 - N N N N |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

Product

HLR ..... = HLR

Line

1..... = 01

Design

2 ..... = 2

Type of construction

Version for device mounting ... = A

Version for free assembly ..... = N

Continuous power

e.g. 1 kW ..... = 01K0

Additional option

None. .... = N

Resistance value

e.g. 68 ohm ..... = 68R0

Degree of protection

IP54 ..... = E

Nominal DC bus voltage

DC 300 V ..... = 003

DC 700 V ..... = 007

Other design

None ..... = NNNN

Standard reference

|              |                                                       |         |
|--------------|-------------------------------------------------------|---------|
| Standard     | Title                                                 | Edition |
| DIN EN 60529 | Degree of protection provided by enclosures (IP code) | 2000-09 |

DT000077v02\_en.fh11

Fig.8-44: Type Code

| Braking resistor<br>HLR01.2N-... | Drive controller<br>HCS01.1E-W00... | Continuous power<br>[W] | Peak power<br>[kW] | Resistance<br>[Ω] | Energy absorption<br>[kWs] | Weight<br>[kg] |
|----------------------------------|-------------------------------------|-------------------------|--------------------|-------------------|----------------------------|----------------|
| 0100-N100R-E-003                 | 03, 06, 09, 13                      | 100                     | 1,6                | 100               | 1                          | tbd            |
| 0100-N180R-E-007                 | 05, 08                              | 100                     | 4                  | 180               | 2,4                        | tbd            |
| 01K0-N68R0-E-007                 | 18-02                               | 1000                    | 2,2                | 68                | 10                         | 4,2            |
|                                  | 18-03, 28                           |                         | 10                 |                   |                            |                |
| 01K0-N28R0-E-007                 | 54                                  | 1000                    | 25                 | 28                | 30                         |                |

Tab.8-32: External Braking Resistors HLR

Dimensions

HLR01.2N-01K0-N28R0, ...-N68R0

Boring Dimensions


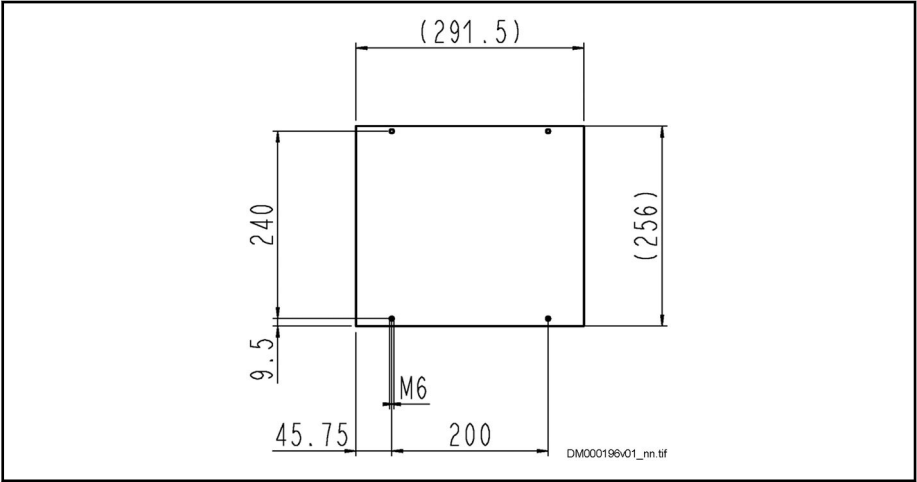


Fig. 8-45: Boring Dimensions


Dimensions (with Suspended Mounting)

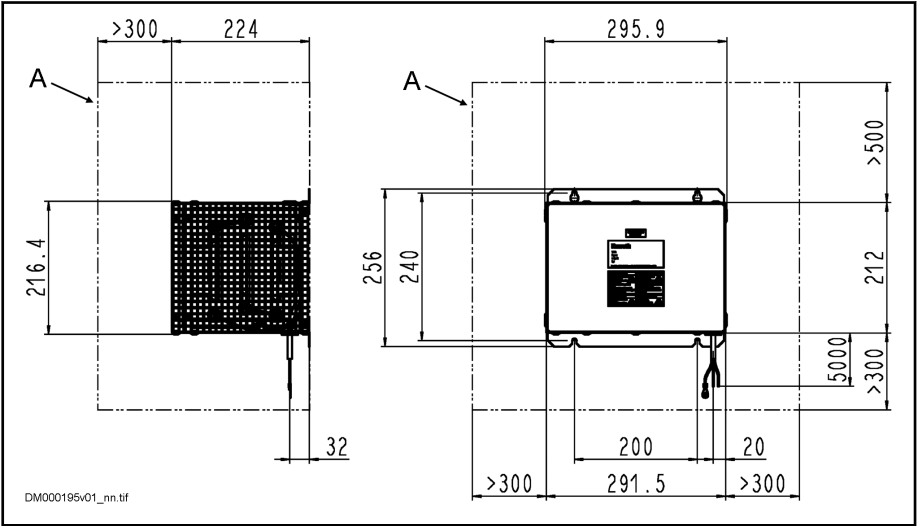

A Minimum mounting clearance  
Fig. 8-46: Dimensions (with Suspended Mounting on the Wall)

## Cables, Accessories, Additional Components

## Dimensions (with Upright Mounting)

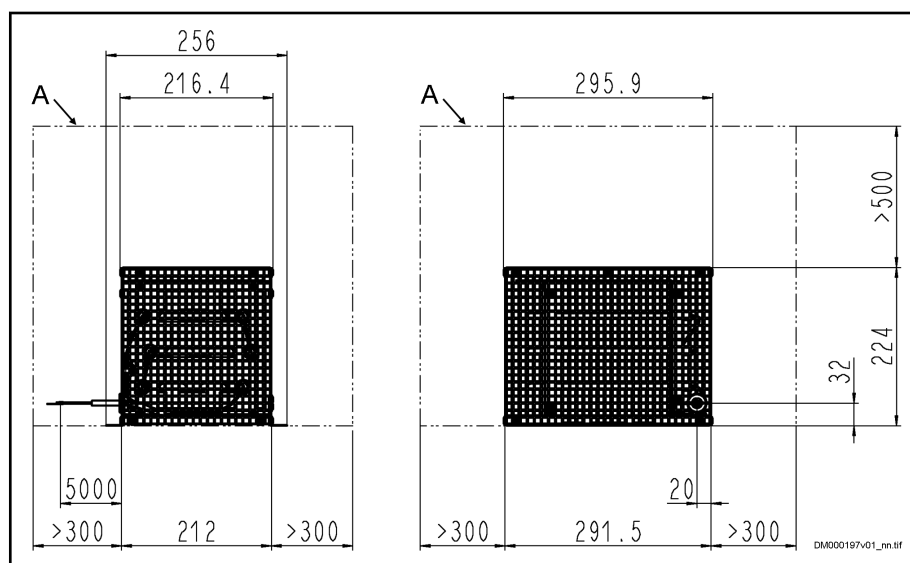

A Minimum mounting clearance

Fig. 8-47: Dimensions (with Upright Mounting on the Floor)

## Installation

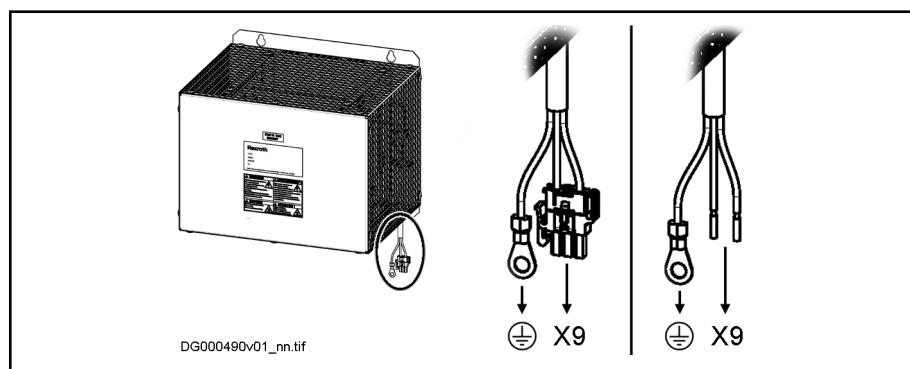


Fig. 8-48: Connection

When installing the braking resistor, observe the instructions given in the description of connection point X9.

The accessory HAS05.1-015-NNN-NN (snap-on ferrite) ensures that Class C3 of the EMC Directive EN 61800-3 is complied with for braking resistors installed outside of the control cabinet.

The snap-on ferrite is designed for the following components:

- HCS01.1E-W0028 + HLR01.2N-01K0-N68R0-E-007
- HCS01.1E-W0054 + HLR01.2N-01K0-N28R0-E-007

8.3.5 DC Bus Capacitor Units HLC

Type Code

| Abbrev. column         | 1                                                      | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 | 32 |
|------------------------|--------------------------------------------------------|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| Example:               | H                                                      | L | C | 0 | 1 | . | 2 | C | - | 0  | 1  | M  | 0  | -  | A  | -  | 0  | 0  | 7  | -  | N  | N  | N  | N  |    |    |    |    |    |    |    |    |
| Product                | HLC..... = HLC                                         |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| Line                   | 1..... = 01                                            |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| Design                 | 2..... = 2                                             |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| Mounting depth         | 300 mm..... = C                                        |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| Nominal capacitance    | 1.0 mF..... = 01M0                                     |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|                        | 2.0 mF..... = 02M0                                     |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|                        | 5.0 mF..... = 05M0                                     |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| Degree of protection   | IP 20..... = A                                         |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| Nominal DC bus voltage | DC 700 V..... = 007                                    |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| Other design           | None..... = NNNN                                       |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| Standard reference     |                                                        |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| Standard               | DIN EN 60529                                           |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| Title                  | Degrees of protection provided by enclosures (IP code) |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
| Edition                | 2000-09                                                |   |   |   |   |   |   |   |   |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |

DT000076v01\_en.FH11

Fig.8-49: Type Code

Cables, Accessories, Additional Components


Technical Data

Technical Data

| Description                                                                           | Symbol           | Unit | HLC01.2C-01M0      | HLC01.2C-02M0 | HLC01.2C-05M0 |
|---------------------------------------------------------------------------------------|------------------|------|--------------------|---------------|---------------|
| Allowed mounting position                                                             |                  |      | G1                 |               |               |
| Mass                                                                                  | m                | kg   | 2,2                | 2,7           | tbd           |
| Allowed input voltage                                                                 | $U_{DC}$         | V    | DC 254...750       |               |               |
| DC bus capacitance                                                                    | $C_{DC}$         | mF   | 1 ±20%             | 2 ±20%        | 5 ±20%        |
| Power dissipation at continuous current and continuous DC bus power respectively (UL) | $P_{Diss\_cont}$ | W    | 4,10               | 5,28          | tbd           |
| Maximum discharge time from $U_{R\_DC\_On}$ to DC 50 V                                | $t_{entl\_ZK}$   | s    | 238                | 378           | tbd           |
| Allowed input current at L+ L-                                                        | $I_{max(rms)}$   | A    | 15                 | 30            | tbd           |
| Insulation resistance (at DC 500 V)                                                   | $R_{is}$         | Mohm | > 10               | > 10          | tbd           |
| Cooling                                                                               |                  |      | Natural convection |               |               |

Tab.8-33:      HLC - Technical Data

Dimensions

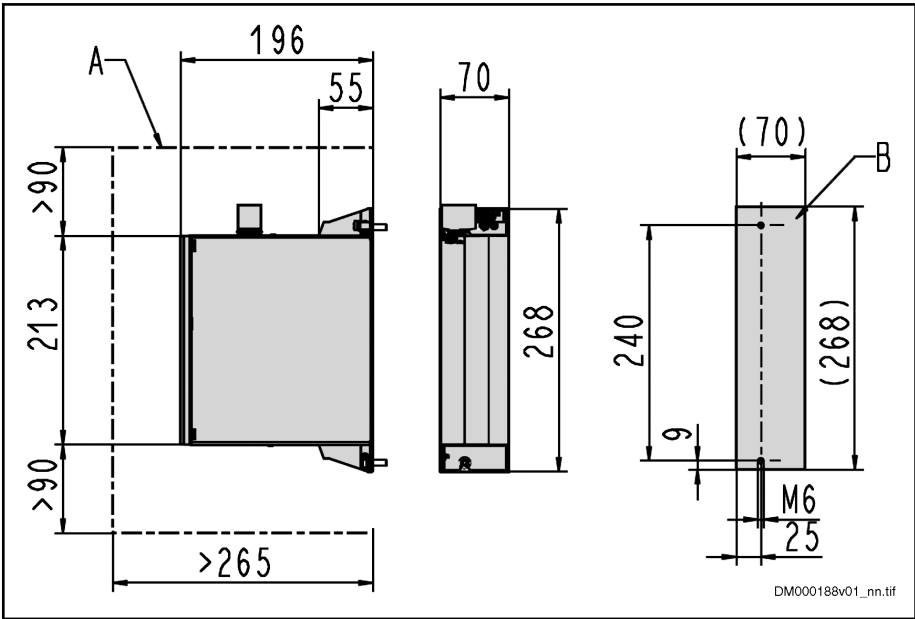

A      Minimum mounting clearance  
B      Boring Dimensions  
Fig.8-50:      Dimensions

## Connection

### ⚠ WARNING

**Lethal electric shock by live parts with more than 50 V!**

Before working on live parts: De-energize installation and secure power switch against unintentional or unauthorized re-energization.

Wait at least **30 minutes** after switching off the supply voltages to allow **discharging**.

Check whether voltage has fallen below 50 V before touching live parts!

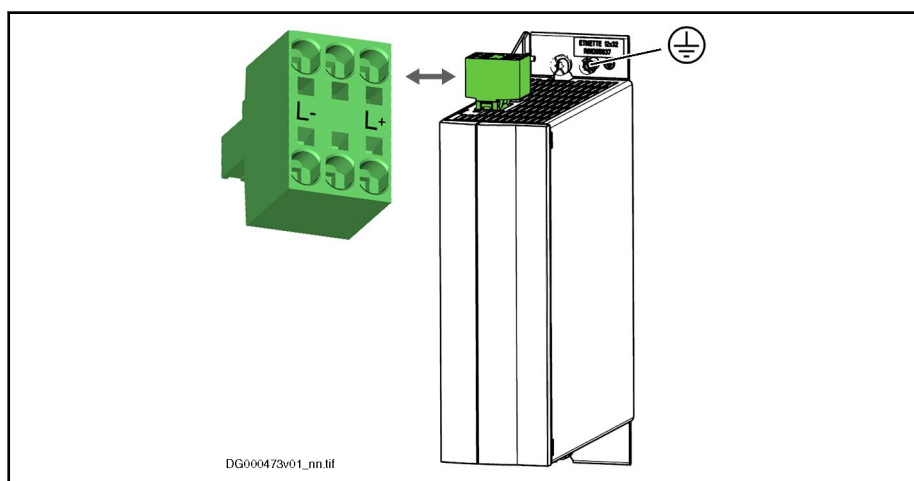


Fig. 8-51: Connection Points (DC Bus (L+ L-), Equipment Grounding Conductor)

**Equipment Grounding Conductor** Connect the equipment grounding conductor via thread **M5** to the housing of the device (identification mark  $\oplus$ ; tightening torque: **5 Nm**). The **M5×12** screw required for this purpose is part of the supplied accessory HAS09.

**DC Bus** Connect HLC01 to HCS01 with twisted lines: L+ to L+; L- to L-  
Technical data of the connection point: See description of connection point X77.

**Arrangement** Place the HLC next to the most powerful drive controller of a drive system.

## Operation

**Mains Choke** Always operate the DC bus capacitor units together with the mains choke assigned to the drive controller (see [chapter 7.3.2 "Mains Voltage" on page 211](#)).

Special case "HCS01.1E-W0018-\_-03" (in the technical data, no mains choke has been assigned to this drive controller):

Use the mains choke "HNL01.1E-1000-N0012-A-500-NNNN".

**DC Bus Coupling** Information on DC bus coupling: See [chapter "DC Bus Capacitor Unit" on page 98](#)





## 9 Environmental Protection and Disposal

### 9.1 Environmental Protection

|                                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                           |               |         |         |            |            |          |          |                       |         |                                     |                      |  |                                     |
|-------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------|---------------|---------|---------|------------|------------|----------|----------|-----------------------|---------|-------------------------------------|----------------------|--|-------------------------------------|
| <b>Production Processes</b>               | The products are made with energy- and resource-optimized production processes which allow re-using and recycling the resulting waste. We regularly try to replace pollutant-loaded raw materials and supplies by more environment-friendly alternatives.                                                                                                                                                                                                                                                      |                           |               |         |         |            |            |          |          |                       |         |                                     |                      |  |                                     |
| <b>No Release of Hazardous Substances</b> | Our products do not contain any hazardous substances which may be released in the case of appropriate use. Normally, our products will not have any negativ influences on the environment.                                                                                                                                                                                                                                                                                                                     |                           |               |         |         |            |            |          |          |                       |         |                                     |                      |  |                                     |
| <b>Significant Components</b>             | Basically, our products contain the following components: <table border="0"> <tr> <td><b>Electronic devices</b></td><td><b>Motors</b></td></tr> <tr> <td>• steel</td><td>• steel</td></tr> <tr> <td>• aluminum</td><td>• aluminum</td></tr> <tr> <td>• copper</td><td>• copper</td></tr> <tr> <td>• synthetic materials</td><td>• brass</td></tr> <tr> <td>• electronic components and modules</td><td>• magnetic materials</td></tr> <tr> <td></td><td>• electronic components and modules</td></tr> </table> | <b>Electronic devices</b> | <b>Motors</b> | • steel | • steel | • aluminum | • aluminum | • copper | • copper | • synthetic materials | • brass | • electronic components and modules | • magnetic materials |  | • electronic components and modules |
| <b>Electronic devices</b>                 | <b>Motors</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                           |               |         |         |            |            |          |          |                       |         |                                     |                      |  |                                     |
| • steel                                   | • steel                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                           |               |         |         |            |            |          |          |                       |         |                                     |                      |  |                                     |
| • aluminum                                | • aluminum                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                           |               |         |         |            |            |          |          |                       |         |                                     |                      |  |                                     |
| • copper                                  | • copper                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                           |               |         |         |            |            |          |          |                       |         |                                     |                      |  |                                     |
| • synthetic materials                     | • brass                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                           |               |         |         |            |            |          |          |                       |         |                                     |                      |  |                                     |
| • electronic components and modules       | • magnetic materials                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                           |               |         |         |            |            |          |          |                       |         |                                     |                      |  |                                     |
|                                           | • electronic components and modules                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                           |               |         |         |            |            |          |          |                       |         |                                     |                      |  |                                     |

### 9.2 Disposal

|                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|-----------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Return of Products</b>         | <p>Our products can be returned to our premises free of charge for disposal. It is a precondition, however, that the products are free of oil, grease or other dirt. Furthermore, the products returned for disposal must not contain any undue foreign material or foreign components.</p> <p>Send the products "free domicile" to the following address:</p> <p style="text-align: center;">Bosch Rexroth AG<br/>Electric Drives and Controls<br/>Buergermeister-Dr.-Nebel-Strasse 2<br/>97816 Lohr am Main, Germany</p>                                                                                                                                                                                                                                                                                  |
| <b>Packaging</b>                  | <p>The packaging materials consist of cardboard, wood and polystyrene. These materials can be recycled anywhere without any problem.</p> <p>For ecological reasons, please refrain from returning the empty packages to us.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Batteries and Accumulators</b> | <p>Batteries and accumulators can be labeled with this symbol.</p> <div style="text-align: center;">  </div> <p>The symbol indicating "separate collection" for all batteries and accumulators is the crossed-out wheeled bin.</p> <p>The end user within the EU is legally obligated to return used batteries. Outside the validity of the EU Directive 2006/66/EC keep the stipulated directives.</p> <p>Used batteries can contain hazardous substances, which can harm the environment or the people's health when they are improper stored or disposed of. After use, the batteries or accumulators contained in Rexroth products have to be properly disposed of according to the country-specific collection.</p> |
| <b>Recycling</b>                  | <p>Most of the products can be recycled due to their high content of metal. In order to recycle the metal in the best possible way, the products must be disassembled into individual modules.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |

## Environmental Protection and Disposal

Metals contained in electric and electronic modules can also be recycled by means of special separation processes.

Products made of plastics can contain flame retardants. These plastic parts are labeled according to EN ISO 1043. They have to be recycled separately or disposed of according to the valid legal requirements.

## 10 Service and Support

Our worldwide service network provides an optimized and efficient support. Our experts offer you advice and assistance should you have any queries. You can contact us **24/7**.

### Service Germany

Our technology-oriented Competence Center in Lohr, Germany, is responsible for all your service-related queries for electric drive and controls.

Contact the **Service Helpdesk & Hotline** under:

Phone: **+49 9352 40 5060**  
Fax: **+49 9352 18 4941**  
E-mail: [service.svc@boschrexroth.de](mailto:service.svc@boschrexroth.de)  
Internet: <http://www.boschrexroth.com>

Additional information on service, repair (e.g. delivery addresses) and training can be found on our internet sites.

### Service worldwide

Outside Germany, please contact your local service office first. For hotline numbers, refer to the sales office addresses on the internet.

### Preparing information

To be able to help you more quickly and efficiently, please have the following information ready:

- Detailed description of malfunction and circumstances resulting in the malfunction
- Type plate name of the affected products, in particular type codes and serial numbers
- Your contact data (phone and fax number as well as your email address)



# 11 Appendix

## 11.1 Dimensioning the Line Cross Sections and Fuses

**Dimensioning the line cross sections and fuses in the supply feeder and branches to the drive system:**

1. Determine current in supply feeder of drive system and correct it with correction factors for [ambient temperature](#) and [bundling](#).  
(In the technical data of the components in section "Data for Mains Voltage Supply", you can find standardized data for connection cross section and mains circuit breaker at operation under rated conditions.)
2. Determine country of use ("international except for USA/Canada" or "USA/Canada")
3. Determine installation type (e.g. B1 or B2)
4. In table row "Current I", select value immediately above the value determined in the first step
5. In table row "Nominal current fuse", read corresponding fuse
6. In table row "Cross section A ...", read corresponding required cross section

| Country of use: International except for USA/Canada |                      |                                                                                                                                                                                          |
|-----------------------------------------------------|----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Current I                                           | Nominal current fuse | Cross section A<br>for installation type B1                                                                                                                                              |
| A                                                   | A                    | mm <sup>2</sup>                                                                                                                                                                          |
| 1,6                                                 | 2                    | 1,5                                                                                                                                                                                      |
| 3,3                                                 | 4                    | Minimum cross section acc. to<br>EN 60204-1:2006, table 5<br>(Main circuits; outside of hous-<br>ings; permanently installed; sin-<br>gle-core lines; stranded wire de-<br>sign class 2) |
| 5,0                                                 | 6                    |                                                                                                                                                                                          |
| 8,6                                                 | 10                   |                                                                                                                                                                                          |
| 10,3                                                | 16                   |                                                                                                                                                                                          |
| 13,5                                                | 16                   |                                                                                                                                                                                          |
| 18,3                                                | 20                   | 2,5                                                                                                                                                                                      |
| 22                                                  | 25                   | 4                                                                                                                                                                                        |
| 28                                                  | 32                   | 6                                                                                                                                                                                        |
| 31                                                  | 40                   | 6                                                                                                                                                                                        |
| 35                                                  | 40                   | 10                                                                                                                                                                                       |
| 44                                                  | 50                   | 10                                                                                                                                                                                       |
| 59                                                  | 63                   | 16                                                                                                                                                                                       |
| 77                                                  | 80                   | 25                                                                                                                                                                                       |
| 96                                                  | 100                  | 35                                                                                                                                                                                       |
| 117                                                 | 125                  | 50                                                                                                                                                                                       |
| 149                                                 | 160                  | 70                                                                                                                                                                                       |
| 180                                                 | 200                  | 95                                                                                                                                                                                       |

## Appendix

| Country of use: International except for USA/Canada |                      |                                             |
|-----------------------------------------------------|----------------------|---------------------------------------------|
| Current I                                           | Nominal current fuse | Cross section A<br>for installation type B1 |
| A                                                   | A                    | mm <sup>2</sup>                             |
| 208                                                 | 250                  | 120                                         |
| 227                                                 | 250                  | 150                                         |
| 257                                                 | 315                  | 185                                         |
| 301                                                 | 355                  | 240                                         |
| 342                                                 | 400                  | 300                                         |

Tab. 11-1: Line Cross Sections and Fuses, B1 According to EN 60204-1:2006, Table 6, as of 150mm<sup>2</sup> DIN IEC 60364-5-52:2004, Table B.52-4

| Country of use: International except for USA/Canada |                      |                                                                                                                                                                  |
|-----------------------------------------------------|----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Current I                                           | Nominal current fuse | Cross section A<br>for installation type B2                                                                                                                      |
| A                                                   | A                    | mm <sup>2</sup>                                                                                                                                                  |
| 1,6                                                 | 2                    | 0,75<br><br>Minimum cross section acc. to<br>EN 60204-1:2006, table 5<br>(Main circuits; outside of hous-<br>ings; permanently installed; mul-<br>ti-core lines) |
| 3,3                                                 | 4                    |                                                                                                                                                                  |
| 5,0                                                 | 6                    |                                                                                                                                                                  |
| 8,5                                                 | 10                   |                                                                                                                                                                  |
| 10,1                                                | 16                   | 1,0                                                                                                                                                              |
| 13,1                                                | 16                   | 1,5                                                                                                                                                              |
| 17,4                                                | 20                   | 2,5                                                                                                                                                              |
| 23                                                  | 25                   | 4                                                                                                                                                                |
| 28                                                  | 32                   | 6                                                                                                                                                                |
| 30                                                  | 40                   | 6                                                                                                                                                                |
| 35                                                  | 40                   | 10                                                                                                                                                               |
| 40                                                  | 50                   | 10                                                                                                                                                               |
| 54                                                  | 63                   | 16                                                                                                                                                               |
| 70                                                  | 80                   | 25                                                                                                                                                               |
| 86                                                  | 100                  | 35                                                                                                                                                               |
| 103                                                 | 125                  | 50                                                                                                                                                               |
| 130                                                 | 160                  | 70                                                                                                                                                               |
| 156                                                 | 200                  | 95                                                                                                                                                               |
| 179                                                 | 200                  | 120                                                                                                                                                              |
| 195                                                 | 224                  | 150                                                                                                                                                              |
| 221                                                 | 250                  | 185                                                                                                                                                              |

| Country of use: International except for USA/Canada |                      |                                             |
|-----------------------------------------------------|----------------------|---------------------------------------------|
| Current I                                           | Nominal current fuse | Cross section A<br>for installation type B2 |
| A                                                   | A                    | mm <sup>2</sup>                             |
| 258                                                 | 315                  | 240                                         |
| 294                                                 | 355                  | 300                                         |

Tab. 11-2: Line Cross Sections and Fuses, B2 According to EN 60204-1:2006, Table 6, as of 150mm<sup>2</sup> DIN IEC 60364-5-52:2004, Table B.52-4

| Country of use: International except for USA/Canada |                      |                                                                                                                                     |
|-----------------------------------------------------|----------------------|-------------------------------------------------------------------------------------------------------------------------------------|
| Current I                                           | Nominal current fuse | Cross section A<br>for installation type E                                                                                          |
| A                                                   | A                    | mm <sup>2</sup>                                                                                                                     |
| 1,6                                                 | 2                    | 0,75<br>Minimum cross section acc. to<br>EN 60204-1:2006, table 5<br>(outside of housings; permanently installed; multi-core lines) |
| 3,3                                                 | 4                    |                                                                                                                                     |
| 5,0                                                 | 6                    |                                                                                                                                     |
| 8,3                                                 | 10                   |                                                                                                                                     |
| 10,4                                                | 16                   |                                                                                                                                     |
| 12,4                                                | 16                   | 1                                                                                                                                   |
| 16,1                                                | 20                   | 1,5                                                                                                                                 |
| 22                                                  | 25                   | 2,5                                                                                                                                 |
| 28                                                  | 32                   | 4                                                                                                                                   |
| 30                                                  | 40                   | 4                                                                                                                                   |
| 37                                                  | 40                   | 6                                                                                                                                   |
| 44                                                  | 50                   | 10                                                                                                                                  |
| 52                                                  | 63                   | 10                                                                                                                                  |
| 70                                                  | 80                   | 16                                                                                                                                  |
| 88                                                  | 100                  | 25                                                                                                                                  |
| 110                                                 | 125                  | 35                                                                                                                                  |
| 133                                                 | 160                  | 50                                                                                                                                  |
| 171                                                 | 200                  | 70                                                                                                                                  |
| 207                                                 | 250                  | 95                                                                                                                                  |
| 240                                                 | 315                  | 120                                                                                                                                 |
| 277                                                 | 355                  | 150                                                                                                                                 |
| 316                                                 | 400                  | 185                                                                                                                                 |



## Appendix

| Country of use: International except for USA/Canada |                      |                                            |
|-----------------------------------------------------|----------------------|--------------------------------------------|
| Current I                                           | Nominal current fuse | Cross section A<br>for installation type E |
| A                                                   | A                    | mm <sup>2</sup>                            |
| 374                                                 | 425                  | 240                                        |
| 432                                                 | 500                  | 300                                        |

Tab. 11-3: Line Cross Sections and Fuses, E According to EN 60204-1:2006, Table 6, as of 150mm<sup>2</sup> DIN IEC 60364-5-52:2004, Table B.52-10

| Country of use: USA/Canada |                      |                                                                    |
|----------------------------|----------------------|--------------------------------------------------------------------|
| Current I                  | Nominal current fuse | Cross section A                                                    |
| A                          | A                    | AWG                                                                |
| 1,6                        | 2                    | 14<br>Minimum cross section acc. to<br>UL 508 A:2007, chapter 29.6 |
| 3,3                        | 4                    | 14                                                                 |
| 5,0                        | 6                    | 14                                                                 |
| 8,3                        | 10                   | 14                                                                 |
| 13                         | 15                   | 14                                                                 |
| 15                         | 20                   | 14                                                                 |
| 20                         | 25                   | 12                                                                 |
| 30                         | 40                   | 10                                                                 |
| 50                         | 70                   | 8                                                                  |
| 65                         | 80                   | 6                                                                  |
| 85                         | 100                  | 4                                                                  |
| 100                        | 110                  | 3                                                                  |
| 115                        | 125                  | 2                                                                  |
| 130                        | 150                  | 1                                                                  |
| 150                        | 175                  | 1/0                                                                |
| 175                        | 200                  | 2/0                                                                |
| 200                        | 225                  | 3/0                                                                |
| 230                        | 250                  | 4/0                                                                |
| 255                        | 300                  | 250 kcmil                                                          |
| 285                        | 300                  | 300 kcmil                                                          |
| 310                        | 350                  | 350 kcmil                                                          |
| 335                        | 350                  | 400 kcmil                                                          |

| Country of use: USA/Canada |                      |                 |
|----------------------------|----------------------|-----------------|
| Current I                  | Nominal current fuse | Cross section A |
| A                          | A                    | AWG             |
| 380                        | 400                  | 500 kcmil       |
| 420                        | 450                  | 600 kcmil       |

Tab. 11-4: Line Cross Sections and Fuses According to UL508A:2007, Table 28.1

*Dimensioning variables of the table values*

1. Ambient temperature  $T_A$  of routed lines  $\leq 40^\circ\text{C}$
2. Temperature  $T_L$  at conductor at nominal current:  $90^\circ\text{C}$  for UL-listed lines (USA/Canada) or  $70^\circ\text{C}$  for PVC lines
3. The nominal current of the fuse is approx. 10-20% above the nominal current  $I_{LN}$  of the converter/supply unit or the determined current of the drive system.
4. Installation types:
  - B1 in accordance with IEC 60364-5-52, e.g. stranded wires routed in cable duct
  - B2 in accordance with IEC 60364-5-52, e.g. multi-core line routed in cable duct
  - E in accordance with EN 60204-1, e.g. multi-core line routed on open cable tray
  - In accordance with NFPA 79 (external wiring), UL508A (internal wiring), NEC, NFPA 70:
    - 1 cable with 3 conductors, 1 neutral conductor and 1 equipment grounding conductor
    - Routed in pipe on the wall

Internal wiring: Routing inside of control cabinet or inside of devices

External wiring: Routing outside of control cabinet

Field wiring: Data of cross sections of terminal connectors wired by the user (in the field)
5. Recommendation for design of the fuses:
  - **International except for USA/Canada:**
    - Fuse-link in accordance with IEC 60269-1, characteristic gG (fuses)
    - Circuit breakers in accordance with IEC 60898-1/2, type B or C
    - Circuit breakers in accordance with IEC 60947-2/6-2
  - **USA / Canada:**
    - Class J; 600 V

## Appendix

**Correction factors**

For deviating dimensioning variables, the corresponding standards specify correction factors.

Below you can find the correction factors for ambient temperature and numbers of routed lines and circuits. If necessary, multiply the determined current in the supply feeder with these factors.

**Correction Factor Ambient Temperature**

| Ambient temperature $T_A$ / °C                               | 30   | 35   | 40   | 45  | 50   | 55   | 60   |
|--------------------------------------------------------------|------|------|------|-----|------|------|------|
| Correction factor according to EN 60204-1:2006, table D.1    | 0,87 | 0,93 | 1,00 | 1,1 | 1,22 | 1,41 | 1,73 |
| Correction factor according to NFPA 79:2007, table 12.5.5(a) | 0,88 | 0,94 | 1,00 | 1,1 | 1,18 | 1,32 | 1,52 |


Tab. 11-5: Correction Factor Ambient Temperature in Accordance with EN 60204-1:2006 and NFPA 79:2007

**Correction Factor for Bundling of Lines (Installation Methods B2 and E) and Circuits (Installation Method B1<sup>1)</sup>)**

| Number of lines                                              | 1 | 2    | 3    | 4    | 5    |
|--------------------------------------------------------------|---|------|------|------|------|
| Correction factor according to EN 60204-1:2006, table D.2    | 1 | 1,25 | 1,43 | 1,54 | 1,67 |
| Correction factor according to NFPA 79:2007, table 12.5.5(b) | 1 | 1,25 |      |      |      |

- 1) Three single cores (L1, L2, L3) for mains supply of a device are to be considered as one circuit.

Tab. 11-6: Correction Factor for Bundling of Lines and Circuits in Accordance with EN 60204-1:2006 and NFPA 79:2007

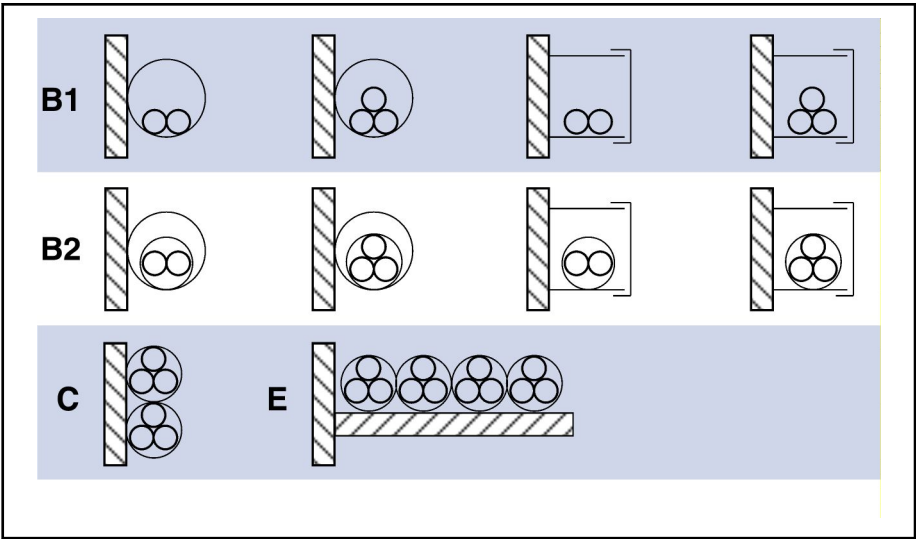

B1 Conductor in installation pipes and in installation channels to be opened  
B2 Cables or lines in installation pipes and in installation channels to be opened  
C Cables or lines on walls  
E Cables or lines on open cable trays.  
*Fig. 11-1: Installation methods (compare IEC 60364-5-52; VDE0298-7; EN 60204-1)*

## 11.2 Determining the Leakage Capacitance

The capacitances which generate so-called leakage currents against ground at the outputs of inverters are regarded as leakage capacitance  $C_{ab}$ . The decisive values for the total value  $C_{ab\_g}$  of the leakage capacitance are:

- Capacitances of output filters
- Capacitances of power cables (capacitance per unit length against shield and ground wire)
- Capacitances of motors (winding capacitance against housing)

The leakage capacitance consists of the values of power cable and motor of all individual drives operated at the mains filter.

Calculation:

$$C_{ab\_g} = C_{ab\_Mg} + C_{ab\_Kg}$$

$C_{ab\_g}$  Total value of leakage capacitance  
 $C_{ab\_Mg}$  Total value of leakage capacitance of motor  
 $C_{ab\_Kg}$  Total value of leakage capacitance of cable

*Fig. 11-2: Total Leakage Capacitance*

The total capacitance  $C_{ab\_Mg}$  results from the sum of capacitances of the individual motors. For these individual capacitances, see documentation of the motor. For a list of selected values, see Appendix of this documentation under [chapter 11.3 "Leakage Capacitances" on page 292](#).

$$C_{ab\_Mg} = C_{ab(Motor\_1)} + C_{ab(Motor\_2)} \dots + C_{ab(Motor\_n)}$$

$C_{ab(motor)}$  Leakage capacitance of a motor  
*Fig. 11-3: Total Leakage Capacitance of Motor*

## Appendix

$$C_{ab\_Kg} = C_{Y\_K\ typ\ (K1)} \times l_{(K1)} + C_{Y\_K\ typ\ (K2)} \times l_{(K2)} \dots + C_{Y\_K\ typ\ (Kn)} \times l_{(Kn)}$$

$C_{Y\_K\ typ}$  Capacitance per unit length of cables

$C_{ab\_Kg}$  Total leakage capacitance of cables

Fig. 11-4: Total leakage capacitance of cables

The total capacitance  $C_{ab\_Kg}$  consists of the sum of capacitances of the individual power cables. For the individual capacitances per unit length, see the technical data of the power cables. For a list of selected values, see Appendix of this documentation under [chapter 11.3 "Leakage Capacitances" on page 292](#).

## 11.3 Leakage Capacitances

### 11.3.1 Leakage Capacitance of Motors

The data of the typical leakage capacitance refer to the total capacitance of the power connections U, V, W against the motor housing. The tables below contain excerpts from the technical data of motors:

#### Leakage capacitance

| Type                          | Leakage capacitance of the component |
|-------------------------------|--------------------------------------|
|                               | $C_{ab}$<br>nF                       |
| MSM019A-0300-NN-__-__         | 0,3                                  |
| MSM019B-0300-NN-__-__         | 0,7                                  |
| MSM031B-0300-NN-__-__         | 0,7                                  |
| MSM031C-0300-NN-__-__         | 1,4                                  |
| MSM041B-0300-NN-__-__         | 1,3                                  |
| Last modification: 2008-11-20 |                                      |

Tab. 11-7: MSM019A-0300-NN, MSM019B-0300-NN

| Type                          | Leakage capacitance of the component |
|-------------------------------|--------------------------------------|
|                               | $C_{ab}$<br>nF                       |
| MSK030B-0900-NN-__-__-__      | 0,7                                  |
| MSK030C-0900-NN-__-__-__      | 1,3                                  |
| MSK040B-0450-NN-__-__-__      | 1,3                                  |
| MSK040C-0450-NN-__-__-__      | 2,0                                  |
| MSK043C-0600-NN-__-__-__      | 2,1                                  |
| Last modification: 2012-09-17 |                                      |

Appendix

| Type                           | Leakage capacitance of the component |
|--------------------------------|--------------------------------------|
|                                | $C_{ab}$<br>nF                       |
| MSK050B-0300-NN-__-__-<br>____ | 2,1                                  |
| MSK050C-0300-NN-__-__-<br>____ | 2,6                                  |
| MSK060B-0300-NN-__-__-<br>____ | 2,1                                  |
| MSK060C-0300-NN-__-__-<br>____ | 2,1                                  |
| MSK061B-0300-NN-__-__-<br>____ | 1,8                                  |
| MSK061C-0300-NN-__-__-<br>____ | 2,4                                  |
| MSK070C-0150-NN-__-__-<br>____ | 3,8                                  |
| MSK070D-0150-NN-__-__-<br>____ | 5,0                                  |
| MSK070E-0150-NN-__-__-<br>____ | 6,3                                  |
| MSK071C-0200-FN-__-__-<br>____ | 4,6                                  |
| MSK071D-0200-FN-__-__-<br>____ | 6,9                                  |
| MSK071E-0200-FN-__-__-<br>____ | 8,9                                  |
| MSK075C-0200-NN-__-__-<br>____ | 3,8                                  |
| MSK075D-0200-NN-__-__-<br>____ | 4,6                                  |
| MSK075E-0200-NN-__-__-<br>____ | 5,8                                  |
| MSK076C-0300-NN-__-__-<br>____ | 6,5                                  |
| MSK100A-0200-NN-__-__-<br>____ | 4,8                                  |
| MSK100B-0200-NN-__-__-<br>____ | 10,3                                 |
| MSK100C-0200-NN-__-__-<br>____ | 12,8                                 |
| MSK100D-0200-NN-__-__-<br>____ | 17,6                                 |
| Last modification: 2012-09-17  |                                      |

## Appendix

| Type                          | Leakage capacitance of the component |
|-------------------------------|--------------------------------------|
|                               | $C_{ab}$<br>nF                       |
| MSK101C-0200-FN-__-__-<br>__  | 6,2                                  |
| MSK101D-0200-FN-__-__-<br>__  | 13,2                                 |
| MSK101E-0200-FN-__-__-<br>__  | 15,2                                 |
| MSK103A-0300-NN-__-__-<br>__  | 1,5                                  |
| MSK103B-0300-NN-__-__-<br>__  | 2,1                                  |
| MSK103D-0300-NN-__-__-<br>__  | 6,0                                  |
| MSK131B-0200-NN-__-__-<br>__  | 14,3                                 |
| MSK131D-0200-NN-__-__-<br>__  | 27,7                                 |
| Last modification: 2012-09-17 |                                      |

Tab. 11-8: MSK - Leakage Capacitance (Excerpt)

See also Rexroth IndraDyn - Technical Data.

### 11.3.2 Leakage Capacitance of Power Cables

The power cables (bulk cables) of the "RKL" line by Rexroth have the capacitances per unit length listed below. The values refer to the sum of the single capacitances of power cores 1, 2 and 3 against the overall shield.

See also Rexroth Connection Cables - Data Sheet Bulk Cables.

#### Data Sheet Excerpt- Bulk Cables

| Type                          | Cross section of power core | Leakage capacitance    |
|-------------------------------|-----------------------------|------------------------|
|                               | mm <sup>2</sup>             | $C_{Y_K, typ}$<br>nF/m |
| INK0653                       | 1,0                         | 0,6                    |
| INK0650                       | 1,5                         | 0,8                    |
| INK0602                       | 2,5                         | 0,7                    |
| INK0603                       | 4,0                         | 0,8                    |
| INK0604                       | 6,0                         | 0,8                    |
| INK0605                       | 10,0                        | 1,0                    |
| INK0606                       | 16,0                        | 1,2                    |
| INK0607                       | 25,0                        | 1,1                    |
| Last modification: 2007-11-08 |                             |                        |

| Type                          | Cross section of power core | Leakage capacitance          |
|-------------------------------|-----------------------------|------------------------------|
|                               | mm <sup>2</sup>             | C <sub>Y_K.typ</sub><br>nF/m |
| INK0667                       | 35,0                        | 1,2                          |
| INK0668                       | 50,0                        | 1,3                          |
| Last modification: 2007-11-08 |                             |                              |

Tab. 11-9: INK - Technical Data (Excerpt)

#### Data Sheet Excerpt- Bulk Cables

| Type    | Cross section of power core | Leakage capacitance<br>C <sub>Y_K.typ</sub> |
|---------|-----------------------------|---------------------------------------------|
|         | mm <sup>2</sup>             | nF/m                                        |
| REH0800 | 2,5                         | 0,2                                         |

Tab. 11-10: REH - Technical Data (Excerpt)



Approximate calculation is allowed with the following values:

- Cross section 1 ... 6 mm<sup>2</sup>: 1 nF/m
- Cross section 10 ... 50 mm<sup>2</sup>: 1.2 nF/m





# Index

## 0 ... 9

|                                   |     |
|-----------------------------------|-----|
| 1Vpp                              |     |
| Encoder, 5 V supply voltage.....  | 170 |
| Encoder, 12 V supply voltage..... | 171 |
| 24V supply                        |     |
| Connection point.....             | 128 |
| Continuous power.....             | 64  |
| Installation.....                 | 64  |
| Peak current.....                 | 64  |
| Project planning.....             | 60  |

## A

|                                                  |        |
|--------------------------------------------------|--------|
| Acceptance tests.....                            | 100    |
| Accessories                                      |        |
| Battery.....                                     | 235    |
| Battery box, SUP-E01-MSM-BATTERY-BOX.....        | 233    |
| Cable, RKB0011.....                              | 249    |
| Cable, RKB0013.....                              | 250    |
| DC bus connector.....                            | 232    |
| HAS09.....                                       | 227    |
| Mounting and connection accessories (HAS09)..... | 227    |
| Overview.....                                    | 225    |
| Replacement battery.....                         | 235    |
| Snap-on ferrite, HAS05.1-015-NNN-NN.....         | 257    |
| SUP-E03-DKC*CS-BATTERY.....                      | 235    |
| X77, DC bus connector.....                       | 232    |
| Accumulators.....                                | 281    |
| Additional components.....                       | 260    |
| Overview.....                                    | 226    |
| Additional documentations.....                   | 21     |
| ADVANCED                                         |        |
| Control panel.....                               | 209    |
| HCS01.....                                       | 10, 37 |
| Ambient conditions.....                          | 47     |
| Analog inputs                                    |        |
| Connection point X32.....                        | 133    |
| Connection point X38.....                        | 150    |
| Current, technical data.....                     | 205    |
| Voltage, technical data.....                     | 204    |
| Analog outputs                                   |        |
| Connection point X38.....                        | 150    |
| Technical data.....                              | 206    |
| Appropriate use.....                             | 23     |
| Applications.....                                | 23     |
| Approvals.....                                   | 100    |
| Autotransformers.....                            | 261    |
| Axis coupling.....                               | 92     |

## B

|                |        |
|----------------|--------|
| BASIC          |        |
| HCS01.....     | 10, 37 |
| Batteries..... | 281    |
| Battery        |        |

|                                                                |     |
|----------------------------------------------------------------|-----|
| Battery box.....                                               | 233 |
| Buffer battery for absolute value encoder of an MSM motor..... | 241 |
| Refresh.....                                                   | 236 |
| Replace.....                                                   | 236 |
| Replacement battery.....                                       | 235 |
| SUP-E03-DKC*CS-BATTERY.....                                    | 235 |
| Bb relay contact                                               |     |
| Connection point X47.....                                      | 134 |
| Control circuit for the mains connection.....                  | 91  |
| DC bus coupling.....                                           | 99  |
| Technical data.....                                            | 207 |
| Braking resistor                                               |     |
| External, connection.....                                      | 126 |
| External, data.....                                            | 274 |
| HLR, data.....                                                 | 274 |
| Integrated, connection.....                                    | 126 |
| Integrated, data.....                                          | 220 |
| Parameterization.....                                          | 126 |
| Brief description                                              |     |
| HCS01.....                                                     | 35  |

## C

|                                                                         |               |
|-------------------------------------------------------------------------|---------------|
| C-UL-US listing.....                                                    | 100           |
| C-UR-US listing.....                                                    | 101           |
| Cables                                                                  |               |
| Capacitance.....                                                        | 294           |
| Documentation.....                                                      | 21            |
| Encoder cable for MSM motors with absolute value encoder (RKG0041)..... | 239           |
| Encoder cables, selection table.....                                    | 46            |
| Leakage capacitance.....                                                | 294           |
| Motor power cables, allowed cable lengths... ..                         | 46            |
| Motor power cables, selection.....                                      | 45            |
| Overview.....                                                           | 225           |
| RKB0011.....                                                            | 130, 131, 249 |
| RKB0013.....                                                            | 130, 131, 250 |
| RKB0051.....                                                            | 152           |
| RKB0052.....                                                            | 152           |
| RKG0033.....                                                            | 165           |
| RKG0035.....                                                            | 170           |
| RKG0036.....                                                            | 169           |
| RKG0041.....                                                            | 239           |
| RKG4200.....                                                            | 167           |
| Shield connection.....                                                  | 140           |
| Calculations                                                            |               |
| Leakage capacitance.....                                                | 291           |
| Mains choke HNL.....                                                    | 90            |
| Mains-side phase current.....                                           | 76            |
| Phase current.....                                                      | 76            |
| CANopen                                                                 |               |
| Bus length.....                                                         | 194           |
| Connection point X61.....                                               | 154           |
| Display elements.....                                                   | 194           |
| Main features.....                                                      | 194           |

|                                                     |         |
|-----------------------------------------------------|---------|
| Index                                               |         |
| Network dimension.....                              | 194     |
| Capacitance                                         |         |
| Additional capacitance (DC bus capacitor unit)..... | 277     |
| Motors.....                                         | 292     |
| Power cables.....                                   | 294     |
| CC                                                  |         |
| sercos III master.....                              | 129     |
| CCC, China Compulsory Certification.....            | 101     |
| CE label.....                                       | 100     |
| Central supply.....                                 | 73      |
| Certifications.....                                 | 100     |
| Characteristic                                      |         |
| Fuses.....                                          | 82, 289 |
| China Compulsory Certification (CCC).....           | 101     |
| CN                                                  |         |
| CANopen.....                                        | 154     |
| Combined encoder for SSI                            |         |
| Encoder, 5 V supply voltage.....                    | 176     |
| Communication module                                |         |
| CANopen - CN.....                                   | 154     |
| Multi-Ethernet - ET.....                            | 129     |
| Multi-Ethernet / sercos III - ET.....               | 145     |
| PROFIBUS PB, interface.....                         | 146     |
| PROFIBUS PB, signal specification.....              | 193     |
| sercos III master.....                              | 129     |
| sercos III slave.....                               | 129     |
| Compatibility                                       |         |
| With foreign matters.....                           | 51      |
| Components                                          |         |
| Combining.....                                      | 35      |
| Mounting positions.....                             | 59      |
| Supplied.....                                       | 94      |
| Supplying.....                                      | 94      |
| Condition as supplied.....                          | 103     |
| Conditions                                          |         |
| Ambient and operating conditions.....               | 47      |
| Configuration                                       |         |
| Drive system.....                                   | 35      |
| Connection                                          |         |
| 24V supply (X13).....                               | 128     |
| Analog input (X32).....                             | 133     |
| Analog inputs/outputs (X38).....                    | 150     |
| Bb relay contact (X47).....                         | 134     |
| Braking resistor (X9).....                          | 126     |
| Connection diagram.....                             | 108     |
| Connection points, overview.....                    | 109     |
| Control voltage (X13).....                          | 128     |
| DC bus (X77).....                                   | 136     |
| Digital inputs, digital output (X31).....           | 132     |
| Digital inputs/outputs (X37).....                   | 149     |
| Electrical.....                                     | 108     |
| Encoder emulation (X8).....                         | 143     |
| Equipment grounding conductor.....                  | 112     |
| Ground.....                                         | 142     |
| Mains.....                                          | 66      |
| Mains (X3).....                                     | 114     |
| Module bus (X47).....                               | 134     |
| Motor (X5).....                                     | 119     |
| Motor encoder (X4).....                             | 117     |
| Motor holding brake (X6).....                       | 123     |
| Motor temperature monitoring (X6).....              | 123     |
| Optional encoder (X8).....                          | 143     |
| Probe.....                                          | 132     |
| PROFIBUS (X30).....                                 | 146     |
| Shield.....                                         | 140     |
| Connection diagram.....                             | 108     |
| Connection points                                   |         |
| HCS01, overview.....                                | 109     |
| On-board.....                                       | 112     |
| Optional.....                                       | 143     |
| Contained substances                                |         |
| see "Significant components".....                   | 281     |
| Control cabinet                                     |         |
| Area A, interference-free.....                      | 159     |
| Area B, interference-susceptible.....               | 161     |
| Area C, strongly interference-susceptible....       | 161     |
| Cooling.....                                        | 49      |
| Design.....                                         | 49      |
| Interference areas.....                             | 157     |
| Control circuit                                     |         |
| For the mains connection.....                       | 91      |
| HCS01.....                                          | 91      |
| Control lines                                       |         |
| Cable, shield connection.....                       | 141     |
| Control panel                                       |         |
| ADVANCED control panel.....                         | 209     |
| HAP01.....                                          | 16      |
| HAP01.1A.....                                       | 209     |
| HAP01.1N.....                                       | 208     |
| Standard control panel.....                         | 208     |
| Type code.....                                      | 16      |
| Type plate.....                                     | 105     |
| Control voltage                                     |         |
| Connection point X13.....                           | 128     |
| Continuous power.....                               | 64      |
| Data.....                                           | 210     |
| Determining the power requirement.....              | 61      |
| For drive systems.....                              | 60      |
| HCS01.....                                          | 210     |
| Installation.....                                   | 64      |
| Loop-through contacts (X13).....                    | 128     |
| Looping through.....                                | 66      |
| Peak current.....                                   | 64      |
| Project planning.....                               | 60      |
| Requirements to the power supply unit.....          | 64      |
| Supply with control voltage 24 V.....               | 60      |
| Converter HCS01.....                                | 7       |
| Cooling                                             |         |
| HCS01.....                                          | 55      |
| Corner-grounded delta mains.....                    | 72      |
| Coupling                                            |         |
| Axis coupling.....                                  | 92      |
| DC bus coupling.....                                | 92      |

## D

### DA

Optional module, analog/digital I/O extension..... 149, 150

### Data

Ambient conditions..... 47  
HCS01, braking resistor (external)..... 274  
HCS01, braking resistor (integrated)..... 220  
HCS01, control voltage..... 210  
HCS01, cooling..... 55  
HCS01, DC bus..... 218  
HCS01, dimensional drawings..... 51  
HCS01, dimensions..... 51  
HCS01, distances..... 55  
HCS01, housing dimensions..... 54  
HCS01, insulation..... 54  
HCS01, inverter..... 221  
HCS01, mains voltage..... 211  
HCS01, mass..... 54  
HCS01, power dissipation..... 55  
HCS01, temperatures..... 55  
HCS01, UL ratings..... 50  
Operating conditions..... 47

### DC bus

Connection point X77..... 136  
Connector, accessories..... 232  
Coupling..... 92  
Coupling, DC bus capacitor unit..... 98  
Data, HCS01..... 218  
DC bus capacitor unit, HLC..... 277  
Group..... 92

Declaration of conformity..... 100

### Derating vs. installation altitude

Overvoltage limiter..... 48

### Design

HCS01..... 35

### Devices

Mounting positions..... 59  
Supplied..... 94  
Supplying..... 94

### Digital inputs

Connection point X31..... 132  
Connection point X37..... 149  
Probe..... 132  
Technical data, safety technology L options 198  
Technical data, safety technology S options 199  
Technical data, type A (standard input)..... 196  
Technical data, type B (probe)..... 197

### Digital outputs

Connection point X31..... 132  
Connection point X37..... 149  
Technical data, safety technology L options 201  
Technical data, safety technology S options 202  
Technical data, standard output..... 200

### Dimensional drawing

HCS01.1E-W0003/5/6/8/9/13..... 52  
HCS01.1E-W0018/28..... 53

HCS01.1E-W0054..... 54

### Dimensional drawings

HCS01..... 51

### Dimensioning

Line cross sections and fuses..... 77, 285

### Dimensions

HCS01.1E-W0003/5/6/8/9/13..... 52  
HCS01.1E-W0018/28..... 53  
HCS01.1E-W0054..... 54

### Display elements

Multi-Ethernet, LEDs..... 190

Disposal..... 281

### Distances

HCS01..... 55

### Documentation

Additional documentations..... 21  
Cables..... 21  
Changes..... 19  
Drive systems..... 21  
Editions..... 19  
Firmware..... 21  
Motors..... 21  
Overview..... 21  
Purpose..... 18  
Reference documentations..... 21  
System components..... 21

### Drive range

Rexroth IndraDrive Cs..... 7

Drive system..... 25

Configuring..... 35

System structure..... 14

### DST

Autotransformers..... 261

## E

### EC

Standard encoder evaluation..... 165

### ECONOMY

HCS01..... 10, 37

### Editions

Documentation..... 19

Electric drive system..... 25

Electrical connection..... 108

Electrical project planning..... 60

### EM

Encoder emulation..... 143

Encoder emulation, data..... 185

### EMC

Limit value classes..... 88

Measures for design and installation..... 155

### Encoder

1Vpp, 5 V supply voltage..... 170

1Vpp, 12 V supply voltage..... 171

5 V power supply..... 179

12 V power supply..... 179

Cable length..... 179

## Index

|                                                                            |              |
|----------------------------------------------------------------------------|--------------|
| Combined encoder for SSI, 5 V supply voltage.....                          | 176          |
| Connection, X4.....                                                        | 117          |
| Connection, X8, encoder emulation.....                                     | 143          |
| EC, Standard encoder evaluation.....                                       | 165          |
| Emulated encoder systems.....                                              | 143          |
| EnDat 2.1, 5 V supply voltage.....                                         | 169          |
| HIPERFACE®, 12 V supply voltage.....                                       | 168          |
| Input circuit, resolver.....                                               | 182          |
| Input circuit, sine signals.....                                           | 181          |
| Input circuit, square-wave signals.....                                    | 182          |
| MSK/QSK encoder interface.....                                             | 167          |
| MSM, 5V supply voltage.....                                                | 165          |
| Optional, X8.....                                                          | 143          |
| Power supply.....                                                          | 179          |
| Resolver encoder system without encoder data memory.....                   | 177          |
| Resolver power supply.....                                                 | 179          |
| RGS0001/K01, D-Sub connector for encoder cable and battery connection..... | 245          |
| Signal assignment to actual position value..                               | 183          |
| SSI, 5 V supply voltage.....                                               | 174          |
| SSI, 12 V supply voltage.....                                              | 175          |
| Standard encoder evaluation EC.....                                        | 165          |
| Supported encoder systems.....                                             | 12, 117, 165 |
| TTL, 5 V supply voltage.....                                               | 172          |
| TTL, 12 V supply voltage.....                                              | 173          |
| Encoder cable length.....                                                  | 179          |
| Encoder emulation                                                          |              |
| EM.....                                                                    | 143          |
| EM, data.....                                                              | 185          |
| EnDat 2.1                                                                  |              |
| Encoder, 5 V supply voltage.....                                           | 169          |
| Environmental protection.....                                              | 281          |
| Equipment grounding conductor                                              |              |
| Connection.....                                                            | 112          |
| ET                                                                         |              |
| Multi-Ethernet, connection point.....                                      | 129          |
| Multi-Ethernet, LEDs.....                                                  | 190          |
| EtherCAT                                                                   |              |
| Multi-Ethernet, interface.....                                             | 129          |
| External braking resistor                                                  |              |
| Data.....                                                                  | 274          |
| External wiring.....                                                       | 82, 289      |
| <b>F</b>                                                                   |              |
| Field wiring.....                                                          | 82, 289      |
| File numbers                                                               |              |
| UL.....                                                                    | 100          |
| Firmware                                                                   |              |
| Assigned HCS01 device types.....                                           | 38           |
| Documentation.....                                                         | 21           |
| MPB-16VRS.....                                                             | 38           |
| MPB-17VRS.....                                                             | 38           |
| MPB-18VRS.....                                                             | 38           |
| MPC-17VRS.....                                                             | 38           |
| MPC-18VRS.....                                                             | 38           |

|                      |         |
|----------------------|---------|
| MPE-16VRS.....       | 38      |
| MPE-17VRS.....       | 38      |
| MPE-18VRS.....       | 38      |
| Type plate.....      | 105     |
| Types.....           | 38      |
| Variants.....        | 39      |
| Foreign matters      |         |
| Compatibility.....   | 51      |
| Functional equipment |         |
| HCS01.....           | 10, 37  |
| Functional features  |         |
| HCS01.....           | 9       |
| Fuses                |         |
| Characteristic.....  | 82, 289 |
| Circuit breaker..... | 82, 289 |
| Design.....          | 82, 289 |
| Dimensioning.....    | 77, 285 |

**G**

|                         |     |
|-------------------------|-----|
| G1, G2, G3, G4, G5      |     |
| Mounting positions..... | 59  |
| Ground                  |     |
| Connection.....         | 142 |
| Ground connection.....  | 142 |
| Ground connections..... | 162 |
| Group supply.....       | 74  |

**H**

|                                                  |          |
|--------------------------------------------------|----------|
| H4, H5                                           |          |
| LED (CANopen).....                               | 194      |
| H10, H11, H12, H13                               |          |
| LEDs.....                                        | 190, 192 |
| H22                                              |          |
| LED.....                                         | 190, 192 |
| H24                                              |          |
| LED.....                                         | 190, 192 |
| H25, H26                                         |          |
| LED (Safe Motion).....                           | 195      |
| Hall sensor adapter box                          |          |
| SHL03.1-NNN-S-NNN.....                           | 251      |
| Hall sensor box                                  |          |
| SHL02.1.....                                     | 178      |
| HAP01                                            |          |
| Control panel.....                               | 16       |
| HAP01.1A                                         |          |
| Control panel.....                               | 209      |
| HAP01.1N                                         |          |
| Control panel.....                               | 208      |
| HAS05.1-                                         |          |
| 015, snap-on ferrite.....                        | 257      |
| HAS09                                            |          |
| Accessories (for mounting and installation). 227 |          |
| Hazardous substances.....                        | 281      |
| HCS01                                            |          |
| ADVANCED.....                                    | 10, 37   |
| BASIC.....                                       | 10, 37   |
| Block diagram.....                               | 35       |

|                                           |        |                                          |                  |
|-------------------------------------------|--------|------------------------------------------|------------------|
| Braking resistor (external), data.....    | 274    | IndraDrive Cs                            |                  |
| Braking resistor (integrated), data.....  | 220    | Overview.....                            | 7                |
| Brief description.....                    | 35     | Target applications.....                 | 8                |
| Combination with MSM.....                 | 40     | Input                                    |                  |
| Connection points, overview.....          | 109    | Analog, X32.....                         | 133              |
| Control voltage, data.....                | 210    | Digital, X31.....                        | 132              |
| DC bus, data.....                         | 218    | Probe.....                               | 132              |
| Design (block diagram).....               | 35     | Installation                             |                  |
| Dimensional drawings.....                 | 51     | 24V supply.....                          | 64               |
| Dimensions.....                           | 51     | Connection points.....                   | 108              |
| Distances.....                            | 55     | Control voltage supply.....              | 64               |
| ECONOMY.....                              | 10, 37 | Electrical connection.....               | 108              |
| Emulated encoder systems.....             | 143    | EMC measures.....                        | 155              |
| Firmware.....                             | 38     | Ground connections.....                  | 162              |
| Functional equipment.....                 | 10, 37 | Signal lines.....                        | 163              |
| Functional features.....                  | 9      | Installation conditions.....             | 47               |
| Housing dimensions.....                   | 54     | Installation methods.....                | 83, 291          |
| Insulation.....                           | 54     | Installation type                        |                  |
| Inverter, data.....                       | 221    | B1.....                                  | 78, 81, 285, 289 |
| Mains voltage, data.....                  | 211    | B2.....                                  | 79, 81, 286, 289 |
| Mass.....                                 | 54     | E.....                                   | 80, 81, 287, 289 |
| Mounting in the control cabinet.....      | 107    | NFPA.....                                | 81, 289          |
| MSM, selection table.....                 | 40     | UL508A.....                              | 81, 289          |
| On-board connection points.....           | 112    | Insulation                               |                  |
| Optional connection points.....           | 143    | HCS01.....                               | 54               |
| Performance features.....                 | 11     | Insulation resistance test.....          | 103              |
| Power dissipation.....                    | 55     | Integrated braking resistor              |                  |
| Scope of supply.....                      | 105    | Data.....                                | 220              |
| Select appropriate converter.....         | 35     | Internal wiring.....                     | 82, 289          |
| Sound pressure level.....                 | 54     | Inverter, data                           |                  |
| Temperatures.....                         | 55     | HCS01.....                               | 221              |
| Type code.....                            | 15     | IT mains type.....                       | 70               |
| UL ratings.....                           | 50     |                                          |                  |
| HIPERFACE®.....                           | 168    | <b>L</b>                                 |                  |
| HLC                                       |        | L+, L-                                   |                  |
| DC bus capacitor unit.....                | 277    | DC bus.....                              | 136              |
| Type code.....                            | 277    | L3                                       |                  |
| HLR                                       |        | Safe Torque Off.....                     | 153              |
| Braking resistor (external).....          | 274    | L4                                       |                  |
| Snap-on ferrite, HAS05.1-015-NNN-NN.....  | 257    | Safe Torque Off, Safe Brake Control..... | 153              |
| Type code.....                            | 274    | Leakage capacitance                      |                  |
| HNL                                       |        | Calculations.....                        | 291              |
| Type code.....                            | 270    | Determining.....                         | 291              |
| Type plate.....                           | 271    | Motors.....                              | 292              |
| HNL01.1E.....                             | 272    | Power cables.....                        | 294              |
| Technical data.....                       | 272    | Leakage currents                         |                  |
| Housing dimensions                        |        | Cause.....                               | 67               |
| HCS01.....                                | 54     | LED                                      |                  |
| <b>I</b>                                  |        | H4, H5 (CANopen).....                    | 194              |
| Identification                            |        | H10, H11, H12, H13.....                  | 190, 192         |
| Of the components.....                    | 104    | H22.....                                 | 190, 192         |
| Inappropriate use.....                    | 24     | H24.....                                 | 190, 192         |
| Consequences, exclusion of liability..... | 23     | H25, H26 (Safe Motion).....              | 195              |
| Individual components                     |        | Limit value classes                      |                  |
| Combining.....                            | 35     | EMC (table).....                         | 88               |
| Individual supply.....                    | 73     | Line                                     |                  |
|                                           |        | Correction factor.....                   | 82, 290          |

## Index

|                                                                |         |
|----------------------------------------------------------------|---------|
| Cross sections, dimensioning.....                              | 77, 285 |
| Fuses, dimensioning.....                                       | 77, 285 |
| <b>Listing</b>                                                 |         |
| C-UL-US.....                                                   | 100     |
| C-UR-US.....                                                   | 101     |
| <b>M</b>                                                       |         |
| <b>Mains</b>                                                   |         |
| Grounded via outer conductor.....                              | 72      |
| <b>Mains choke</b>                                             |         |
| Combining with mains filter.....                               | 90      |
| Determining.....                                               | 90      |
| Feeding.....                                                   | 272     |
| HNL01.1E.....                                                  | 272     |
| Selection.....                                                 | 90      |
| Types.....                                                     | 270     |
| <b>Mains connection</b>                                        |         |
| Central supply.....                                            | 73      |
| Circuit.....                                                   | 91      |
| Control circuit.....                                           | 91      |
| Group supply.....                                              | 74      |
| Individual supply.....                                         | 73      |
| Mains current.....                                             | 76      |
| Parallel operation.....                                        | 75      |
| Power.....                                                     | 76      |
| Project planning.....                                          | 66      |
| Transformer, mains filter, mains choke.....                    | 90      |
| Types.....                                                     | 72      |
| X3.....                                                        | 114     |
| <b>Mains contactor</b>                                         |         |
| Dimensioning.....                                              | 90      |
| <b>Mains current</b> .....                                     | 76      |
| <b>Mains filter</b>                                            |         |
| Combining with mains choke.....                                | 90      |
| Dimensioning.....                                              | 84      |
| Motor fan.....                                                 | 160     |
| NFD, NFE.....                                                  | 265     |
| Other loads.....                                               | 160     |
| <b>Mains transformer</b>                                       |         |
| Dimensioning.....                                              | 83      |
| Selecting.....                                                 | 83      |
| <b>Mains types</b> .....                                       | 69      |
| <b>Mains voltage</b>                                           |         |
| HCS01.....                                                     | 211     |
| <b>Mains-side phase current</b>                                |         |
| Calculating.....                                               | 76      |
| <b>Mass</b>                                                    |         |
| HCS01.....                                                     | 54      |
| <b>Measures of radio interference suppression</b>              |         |
| For relays, contactors, switches, chokes, inductive loads..... | 164     |
| <b>Mechanical project planning</b> .....                       | 51      |
| <b>microSD memory card</b>                                     |         |
| ADVANCED control panel.....                                    | 209     |
| PFM04.1.....                                                   | 105     |
| <b>Module bus</b>                                              |         |
| Connection point X47.....                                      | 134     |

|                                                     |     |
|-----------------------------------------------------|-----|
| Parameterization.....                               | 99  |
| <b>Motor</b>                                        |     |
| Cable lengths.....                                  | 46  |
| Cable, shield connection.....                       | 140 |
| Capacitance.....                                    | 292 |
| Connection (X5).....                                | 119 |
| Connection motor encoder (X4).....                  | 117 |
| Connection motor holding brake (X6).....            | 123 |
| Connection motor temperature monitoring (X6).....   | 123 |
| Documentation.....                                  | 21  |
| Leakage capacitance.....                            | 292 |
| Motor holding brake.....                            | 123 |
| Motor output (X5).....                              | 119 |
| Motor temperature monitoring.....                   | 123 |
| MSM, supported MSM motors.....                      | 40  |
| Supported motors.....                               | 40  |
| Third-party motors.....                             | 40  |
| <b>Motor fan</b>                                    |     |
| Mains filter.....                                   | 160 |
| <b>Mounting</b>                                     |     |
| HCS01 in the control cabinet.....                   | 107 |
| <b>Mounting positions</b>                           |     |
| Definitions.....                                    | 59  |
| MPB-16VRS.....                                      | 38  |
| MPB-17VRS.....                                      | 38  |
| MPB-18VRS.....                                      | 38  |
| MPC-17VRS.....                                      | 38  |
| MPC-18VRS.....                                      | 38  |
| MPE-16VRS.....                                      | 38  |
| MPE-17VRS.....                                      | 38  |
| MPE-18VRS.....                                      | 38  |
| <b>MSK/QSK encoder interface</b>                    |     |
| For S1/M1, S2/M2, S3/M3, S5/M5 encoder systems..... | 167 |
| <b>MSM</b>                                          |     |
| Combination with HCS01.....                         | 40  |
| Encoder, 5V supply voltage.....                     | 165 |
| <b>Multi-Ethernet</b>                               |     |
| Display elements (LEDs).....                        | 190 |
| ET.....                                             | 129 |
| Optional.....                                       | 145 |
| X24 P2, X25 P1.....                                 | 129 |
| <b>N</b>                                            |     |
| <b>NFD</b>                                          |     |
| Data, electrical.....                               | 268 |
| Data, mechanical.....                               | 266 |
| Mains filter.....                                   | 265 |
| <b>NFE</b>                                          |     |
| Data, electrical.....                               | 268 |
| Data, mechanical.....                               | 266 |
| Mains filter.....                                   | 265 |
| <b>O</b>                                            |     |
| <b>On-board connection points</b>                   |     |
| HCS01.....                                          | 112 |

|                                              |          |
|----------------------------------------------|----------|
| Operating conditions.....                    | 47       |
| Operation at partial load.....               | 76       |
| Optional connection points.....              | 143      |
| Optional encoder                             |          |
| X8.....                                      | 143      |
| Optional module                              |          |
| CN, CANopen.....                             | 154      |
| DA, analog/digital I/O extension.....        | 149, 150 |
| EC, Standard encoder evaluation.....         | 165      |
| EM, encoder emulation.....                   | 143      |
| ET, Multi-Ethernet / sercos III.....         | 145      |
| L3, Safe Torque Off.....                     | 153      |
| L4, Safe Torque Off, Safe Brake Control..... | 153      |
| PB, PROFIBUS, interface.....                 | 146      |
| PB, PROFIBUS, signal specification.....      | 193      |
| S, standard control panel.....               | 208      |
| S4, Safe Motion.....                         | 151      |
| Output, digital                              |          |
| X31.....                                     | 132      |
| Overall connection diagram.....              | 108      |
| Overview                                     |          |
| Accessories.....                             | 225      |
| Additional components.....                   | 226      |
| Cables.....                                  | 225      |
| Overvoltage limiter                          |          |
| Derating vs. installation altitude.....      | 48       |
| <b>P</b>                                     |          |
| P1, P2                                       |          |
| Communication.....                           | 129      |
| Packaging.....                               | 281      |
| Parallel operation.....                      | 75       |
| PB                                           |          |
| Optional module, interface.....              | 146      |
| Optional module, signal specification.....   | 193      |
| PELV.....                                    | 29       |
| Performance features                         |          |
| HCS01.....                                   | 11       |
| PFM04.1                                      |          |
| microSD memory card.....                     | 105      |
| Phase current                                |          |
| Calculating.....                             | 76       |
| Probe                                        |          |
| Technical data.....                          | 197      |
| Probe input (X31).....                       | 132      |
| Production processes.....                    | 281      |
| PROFIBUS                                     |          |
| Interface.....                               | 146      |
| Signal specification.....                    | 193      |
| PROFINET                                     |          |
| Multi-Ethernet, interface.....               | 129      |
| Project planning                             |          |
| Electrical project planning.....             | 60       |
| Mechanical project planning.....             | 51       |
| Protective extra-low voltage.....            | 29       |

|                                                 |          |
|-------------------------------------------------|----------|
| <b>R</b>                                        |          |
| RCCB.....                                       | 66       |
| RCD.....                                        | 66       |
| Recycling.....                                  | 281      |
| Reference documentations.....                   | 21       |
| Refresh                                         |          |
| Battery (SUP-E03-DKC*CS-BATTERY).....           | 236      |
| Relay contact                                   |          |
| Connection point X47.....                       | 134      |
| Control circuit for the mains connection.....   | 91       |
| Technical data.....                             | 207      |
| Type 2.....                                     | 207      |
| Residual-current-operated circuit breakers..... | 66       |
| Resolver                                        |          |
| Encoder system without encoder data             |          |
| memory.....                                     | 177      |
| Encoder, input circuit.....                     | 182      |
| Return of products.....                         | 281      |
| Rexroth IndraDrive Cs                           |          |
| Drive range.....                                | 7        |
| Overview.....                                   | 7        |
| System presentation.....                        | 7        |
| Target applications.....                        | 8        |
| RGS0001/K01                                     |          |
| D-Sub connector for encoder cable and           |          |
| battery connection.....                         | 245      |
| RKB0011.....                                    | 130, 131 |
| Cables.....                                     | 249      |
| RKB0013.....                                    | 130, 131 |
| Cables.....                                     | 250      |
| RKB0051.....                                    | 152      |
| RKB0052.....                                    | 152      |
| RKG0033.....                                    | 165, 234 |
| RKG0034.....                                    | 234      |
| RKG0035.....                                    | 170      |
| RKG0036.....                                    | 169      |
| RKG0041                                         |          |
| Encoder cable for MSM motors with ab-           |          |
| solute value encoder.....                       | 239      |
| RKG4200.....                                    | 167      |
| RLS0778/K06                                     |          |
| DC bus connector.....                           | 232      |
| <b>S</b>                                        |          |
| S                                               |          |
| Optional module, standard control panel.....    | 208      |
| S4                                              |          |
| Safe Motion.....                                | 151      |
| Safe Brake Control                              |          |
| X49.....                                        | 153      |
| Safe Motion                                     |          |
| LEDs (H25, H26) ( ).....                        | 195      |
| S4.....                                         | 151      |
| X41.....                                        | 151      |
| Safe Torque Off                                 |          |
| L3.....                                         | 153      |
| X49.....                                        | 153      |



## Index

|                                                           |     |
|-----------------------------------------------------------|-----|
| Safe Torque Off, Safe Brake Control                       |     |
| L4.....                                                   | 153 |
| Safety instructions for electric drives and controls..... | 25  |
| Safety technology                                         |     |
| L3 (Safe Torque Off).....                                 | 153 |
| L4 (Safe Torque Off, Safe Brake Control)....              | 153 |
| S4 (Safe Motion).....                                     | 151 |
| Scope of supply                                           |     |
| HCS01.....                                                | 105 |
| sercos III                                                |     |
| Optional.....                                             | 145 |
| sercos III master                                         |     |
| CC.....                                                   | 129 |
| sercos III slave                                          |     |
| S3.....                                                   | 129 |
| Shield                                                    |     |
| Connection.....                                           | 140 |
| Control lines.....                                        | 141 |
| Motor cable.....                                          | 140 |
| SHL02.1                                                   |     |
| Hall sensor box.....                                      | 178 |
| SHL03.1-NNN-S-NNN                                         |     |
| Hall sensor adapter box.....                              | 251 |
| Signal lines                                              |     |
| Installation.....                                         | 163 |
| Significant components.....                               | 281 |
| Sine signals                                              |     |
| Encoder, input circuit.....                               | 181 |
| Snap-on ferrite                                           |     |
| HAS05.1-015-NNN-NN.....                                   | 257 |
| Sound pressure level                                      |     |
| HCS01.....                                                | 54  |
| Square-wave signals                                       |     |
| Encoder, input circuit.....                               | 182 |
| SSI                                                       |     |
| Encoder, 5 V supply voltage.....                          | 174 |
| Encoder, 12 V supply voltage.....                         | 175 |
| Standard control panel.....                               | 208 |
| Standard encoder evaluation EC.....                       | 165 |
| Standard motors                                           |     |
| Voltage load.....                                         | 224 |
| State-of-the-art.....                                     | 23  |
| Storage                                                   |     |
| Of the components.....                                    | 106 |
| SUP-E01-MSM-BATTERYBOX                                    |     |
| Battery box.....                                          | 233 |
| SUP-E03-DKC*CS-BATTERY.....                               | 235 |
| Supplied components.....                                  | 94  |
| Supplied devices.....                                     | 94  |
| Supply                                                    |     |
| With control voltage 24 V.....                            | 60  |
| With mains voltage.....                                   | 66  |
| Supplying components.....                                 | 94  |
| Supplying devices.....                                    | 94  |
| Support                                                   |     |
| See service hotline.....                                  | 283 |
| System structure.....                                     | 14  |

## T

|                                                |     |
|------------------------------------------------|-----|
| Target applications                            |     |
| IndraDrive Cs.....                             | 8   |
| Technical data                                 |     |
| Analog inputs, current.....                    | 205 |
| Analog inputs, voltage.....                    | 204 |
| Analog outputs.....                            | 206 |
| Digital inputs, safety technology L options... | 198 |
| Digital inputs, safety technology S options. . | 199 |
| Digital inputs, type A (standard input).....   | 196 |
| Digital inputs, type B (probe).....            | 197 |
| Digital outputs, safety technology L options.  | 201 |
| Digital outputs, safety technology S options   | 202 |
| Digital outputs, standard output.....          | 200 |
| HCS01, power section.....                      | 210 |
| Relay contact.....                             | 207 |
| See also index entry Data.....                 | 165 |
| Test                                           |     |
| Customer-side.....                             | 103 |
| Factory-side.....                              | 103 |
| Insulation resistance.....                     | 103 |
| Voltage test.....                              | 103 |
| Third-party motors                             |     |
| At drive controllers.....                      | 40  |
| TN-C mains type.....                           | 70  |
| TN-S mains type.....                           | 69  |
| Transformers.....                              | 260 |
| Transport                                      |     |
| Of the components.....                         | 106 |
| TT system.....                                 | 71  |
| TTL                                            |     |
| Encoder, 5 V supply voltage.....               | 172 |
| Encoder, 12 V supply voltage.....              | 173 |
| Type code                                      |     |
| HAP01.....                                     | 16  |
| HCS01.....                                     | 15  |
| HLC.....                                       | 277 |
| HLR.....                                       | 274 |
| HNL.....                                       | 270 |
| Type plate                                     |     |
| Arrangement at the device.....                 | 104 |
| Control panel.....                             | 105 |
| Device.....                                    | 104 |
| Firmware.....                                  | 105 |
| HNL.....                                       | 271 |

## U

|                        |          |
|------------------------|----------|
| UL                     |          |
| File numbers.....      | 100      |
| Listing.....           | 100, 101 |
| Ratings, HCS01.....    | 50       |
| Ungrounded mains.....  | 70       |
| Use                    |          |
| Appropriate use.....   | 23       |
| Inappropriate use..... | 24       |

## V

Voltage test..... 103

## X

### X3

Mains connection..... 114

### X4

Motor encoder..... 117

### X5

Motor output..... 119

### X6

Motor temperature monitoring and motor  
holding brake..... 123

### X8

Encoder emulation..... 143

Optional encoder..... 143

### X9

Braking resistor..... 126

### X13

Control voltage (24 V)..... 128

### X22 P2, X23 P1

Multi-Ethernet / sercos III..... 145

### X24 P2, X25 P1

Communication..... 129

### X30

PROFIBUS PB..... 146

### X31

Digital inputs, digital output..... 132

### X32

Analog input..... 133

### X37

Digital inputs/outputs..... 149

### X38

Analog inputs/outputs..... 150

### X41

Optional safety technology Safe Motion..... 151

### X42, X43

Optional safety technology Safe Motion  
(communication)..... 152

### X47

Bb relay contact, module bus..... 134

### X49

Safe Torque Off, Safe Brake Control..... 153

### X61

CANopen..... 154

### X77

DC bus connection..... 136

DC bus connector..... 232



## Notes

Bosch Rexroth AG  
Electric Drives and Controls  
P.O. Box 13 57  
97803 Lohr, Germany  
Bgm.-Dr.-Nebel-Str. 2  
97816 Lohr, Germany  
Tel. +49 9352 18 0  
Fax +49 9352 18 8400  
[www.boschrexroth.com/electrics](http://www.boschrexroth.com/electrics)



R911322210

DOK-INDRV\*-HCS01\*\*\*\*\*-PR03-EN-P