## CASTLOADERS








## 800 SERIES



## DIMENSIONS AND LOADING DIAGRAMS\*

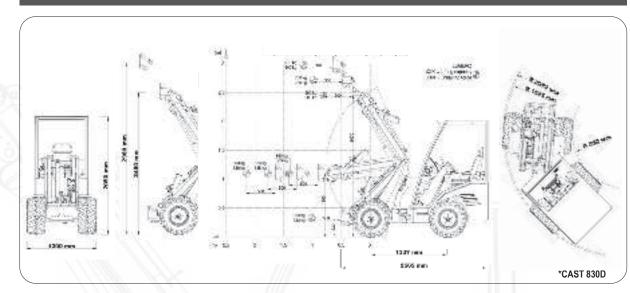

## WHEELS

23X8.50-12 23X10.50-12 26X12.00-12













## 800 SERIES MODELS

	LIFTING CAPACITY	ENGINE POWER	HYDRAULIC SYSTEM	BOOM HEIGHT
CAST 820D	750 Kg (with counterweights)	20 Hp / 14,9 kw	30 l/min	2980 mm
CAST 825D	850 Kg (with counterweights)	25 Hp / 18,6 kw	42 l/min	2980 mm
CAST 830D CARBON	950 Kg (with counterweights)	25 Hp / 18,6 kw	46 l/min	2980 mm



CAST GROUP SRL Via A. Meucci,18 I-30035 MIRANO VE ph. +39041 5701827 fx +39041 5726786 info@cast-group.it








## 800 SERIES

strong personality. Thanks to its low structure center of gravity the vehicle remains stable on all types of ground and offers the operator excellent visibility and maneuverability.











Compactness and solidity.

Lifting capacity 850 Kg Engine power 25 Hp Hydraulic system 42 I / min Telescopic boom height 2980 mm Cast 825D features a Kubota D1105 diesel engine, liquid cooled.

The transmission is 4WD hydrostatic and its speed reaches 12 km / h. It is equipped with an electric differential lock, double cylinder selflevelling system. Standard features include the 5-function joystick, adjustable steering column, 12V auxiliary socket, led work lights, comfortable and adjustable seat with safety belt, metal hoods, silent block, tractor tires 23x10.50-12.



Lifting capacity 750 Kg Engine power 20 Hp Hydraulic system 30 I / min Telescopic boom height 2980 mm Cast 820D is equipped with a Kubota D722 diesel engine, liquid cooled, 4WD hydrostatic transmission and 10km / h speed. Electric differential lock, 5-function joystick, silent block, tractor tires 23x8.50-12.













Agriculture Breeding Green maintenance Building Road maintenance

# CARBON

Lifting capacity 950 Kg Engine power 25 Hp Hydraulic system 46 I / min Telescopic boom height 2980 mm

## The uniqueness of a machine built for demanding professionals.

Cast 830D is equipped with a liquid-cooled Kubota D1305 diesel engine. 4WD hydrostatic transmission and speed of 16 km / h. It is equipped with an electric differential lock and a double cylinder selflevelling system. Standard equipment includes the ergonomic 10-function joystick, adjustable steering column, 12V auxiliary socket, front led work lights, comfortable heated seat with safety belt, metal hoods, silent block, minimum size in width 920 mm, tractor tires 26x12.00-12.