

Trove2AM2 (Enclosure & Backplane) / TAM2 (Backplane)

Access & Power Integration Solution for AMAG

Altronix Trove™ enclosures and backplanes let you easily integrate Altronix power with AMAG Symmetry access controllers and accessories. Trove simplifies board layout and wire management, reduces installation time and labor costs.



TROVE™



Trove2AM2

Altronix / AMAG boards are not included

Trove2AM2 (Trove2 Enclosure + TAG2 Backplane) TAM2 (Backplane) Features

- Accommodates the following AMAG Symmetry controllers with or without Altronix power/accessories:
 - M2150 2DC, M2150 4DC or M2150 AC24/4
 - M2150 2DBC, M2150 4DBC or M2150 8DBC
 - Altronix Power Supplies
 - Altronix Sub-Assemblies
- Includes Altronix Trove2 enclosure and one (1) removable TAM2 backplane

Features

- Simplifies board layout and wire management
- Convenient knockout configuration:
- Convenient knockout configuration:
 - One (1) single knockout 2.415" (2" Conduit)
 - Sixteen (16) double knockouts 1.362" (1" Conduit) / 1.115" (3/4" Conduit)
- Accommodates up to four (4) 12VDC/12AH batteries
- 16 Gauge powder coated steel
- Includes cam lock, tamper switch and mounting hardware

Agency Listings

- UL: UL294 - Access Control System
- cUL: CAN/ULC - s319-05 - Electronic Access Control Systems
- CE European Conformity

Physical and Environmental

Trove2AM2 - Dimensions (H x W x D):

- Enclosure: 27.25" x 21.5" x 6.5" (692mm x 546mm x 165mm)
- Shipping: 32.5" x 26.5" x 11.125" (826mm x 673mm x 283mm)

Trove2AM2 - Weights (approx.):

- Product: 37.1 lb. (16.83 kg)
- Shipping: 40.85 lb. (18.53 kg)

TAM2 - Dimensions (H x W x D):

- Backplane: 25.375" x 19.375" x 0.3125" (645mm x 492mm x 8mm)
- Shipping: 26.5" x 20.5" x 1.25" (673mm x 521mm x 32mm)


TAM2 - Weights (approx.):

- Product: 8.0 lb. (3.63 kg)
- Shipping: 10.0 lb. (4.53 kg)

All registered trademarks are property of their respective owners.

Access Controller Position Chart for the Following Models:

Altronix/AMAG M2150	Pem Mounting
AL400ULXB2, AL400ULXB2V, AL600ULXB, AL600XB220, AL1012ULXB, AL1012XB220, AL1024ULXB2, AL1024XB2V, eFlow4NB, eFlow4NBV, eFlow6NB, eFlow6NBV, eFlow102NB, eFlow102NBV, eFlow104NB, eFlow104NBV, Tango1B, ACM8, ACM8CB, ACMS8, ACMS8CB, ACMS12CB, LINQ8ACM, LINQ8ACM, LINQ8ACMCB	(A)
ACM4, ACM4CB, LINQ8PD, LINQ8PDCB, MOM5, PD4UL, PD4ULCB, PD8UL, PD8ULCB, PDS8, PDS8CB, VR6, VR10	(B)
M2150 2DC	(C)
M2150 4DC	(D)
M2150 AC24/4	(E)
M2150 2DBC	(F)
M2150 4DBC, M2150 8DBC	(G)

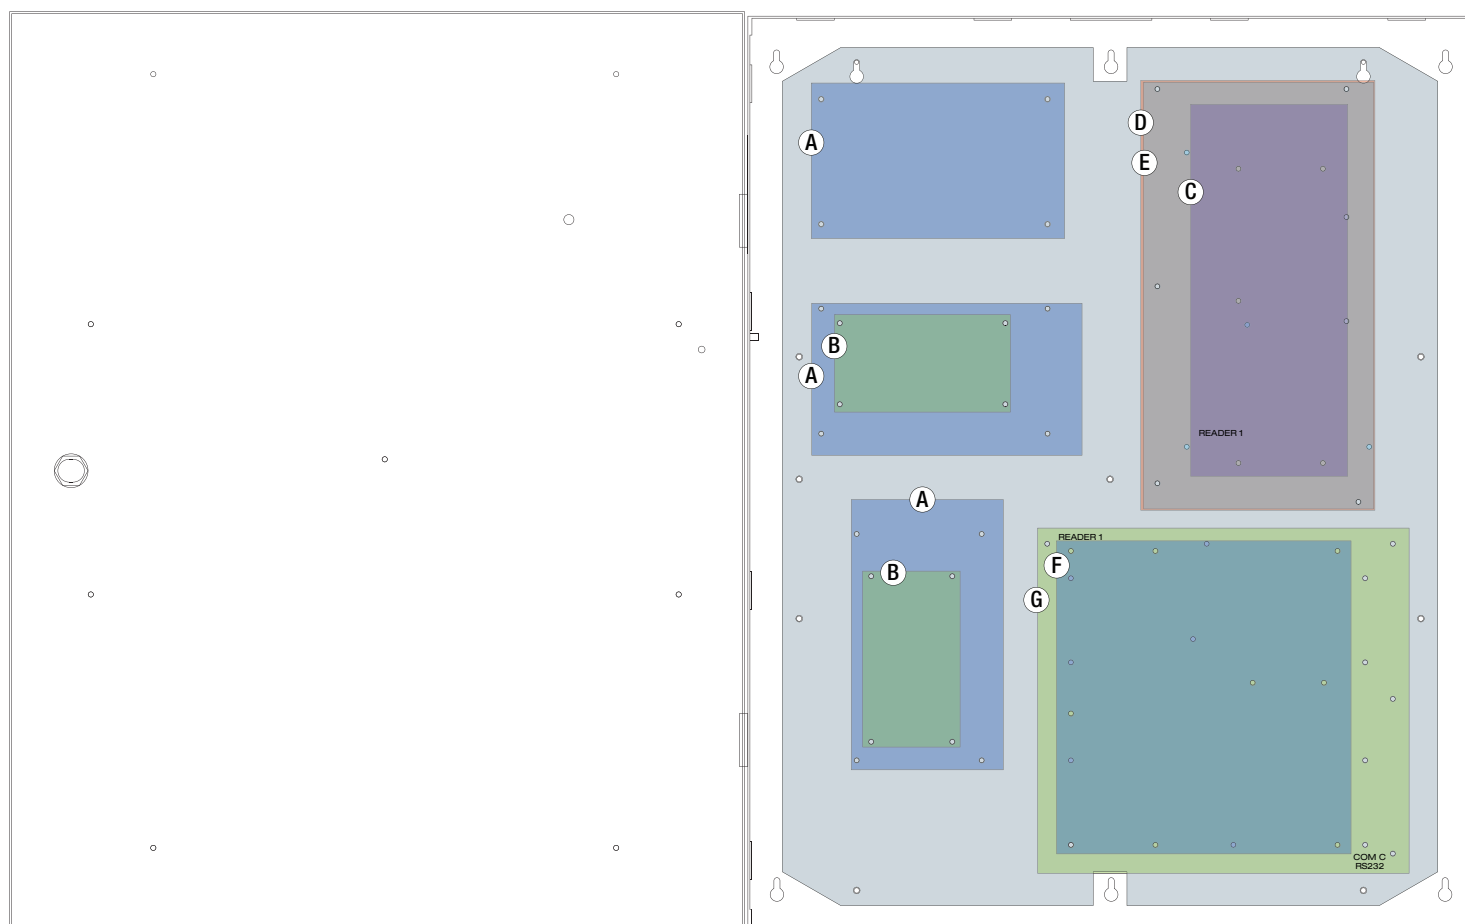

Accessories (order separately)



WM5

WM5, WM25, WM100 - Magnetic Cable Tie Mounts

Altronix WM5, WM25, and WM100 are packs of 5, 25 or 100 magnetic cable tie mounts respectively. They accommodate standard zip ties or velcro straps. These are ideal for wire management in our Trove series.



Mounting Magnet

MM4, MM8, MM12, MM24 - Magnetic Mounting Solution

Altronix mounting magnets accommodate screws and nylon standoffs to allow for mounting various boards/ accessories in any metal enclosure or backplane.



BR1

BR1 - Sub-Assembly Mounting Bracket

Altronix BR1 mounting bracket is compatible with Altronix Maximal and Trove enclosures. It allows to mount one (1) PD4UL(CB), PD8UL(CB), ACM4(CB), MOM5, VR6, PDS8, NetWay5B or LINQ8PD(CB) sub-assembly on the enclosure's inside wall, saving valuable space.

Trove2BWC
with
batteries



Trove2BWC
with
wires



TROVE2BWC - Battery/Wire Trough Enclosure

Altronix Trove2BWC is a dual-purpose enclosure that can be used as wiring trough or battery cabinet when mounted above or below of the Trove2 integrated power and access solution. The knockouts on the Trove2BWC have been strategically placed to line up with the Trove2 allowing for easy conduit connections between cabinets. Trove2BWC includes cam locks and 2 tamper switches to ensure access to wiring and batteries is secure.

Dimensions and Drawing

Dimensions (H x W x D approximate)

27.25" x 21.5" x 6.5" (692.2mm x 546.1mm x 165.1mm)

