


C-Line: Eco Linear Fixtures

5-CCT & 3-Power Selectable

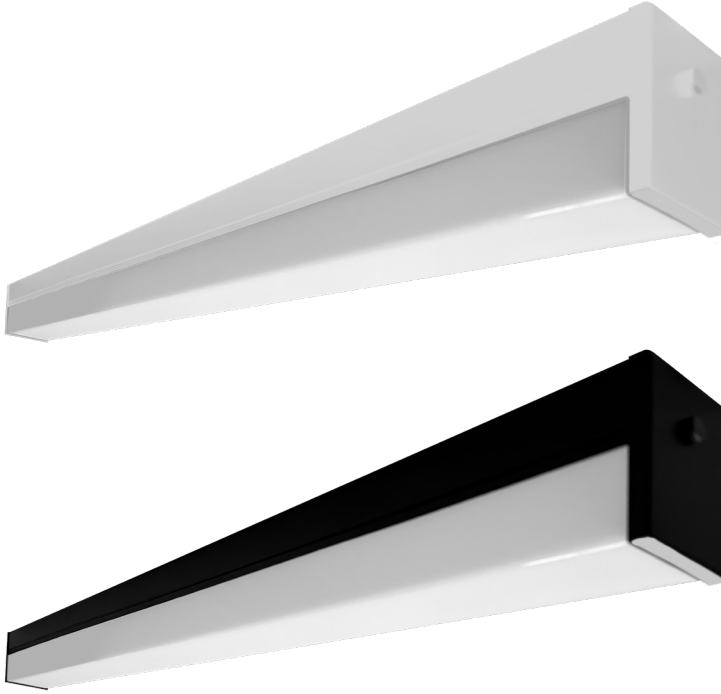

Strips

Detail Specification:

- Finish: White or Black, custom available
- IP Rating: Damp Location
- Beam Angle: 100°
- Chip: SMD 2835, R9 >50, CRI >90
- Operating Temperature: -4° - 122° F
- Lens: Acrylic Frosted Lens Standard: efficiently emits the light through a high-quality acrylic lens, spreading it evenly and without causing glare
- Average life (L70) of 50,000 hours

Applications:

- Stairwell & Hallways
- Utility & Storage
- Garage Structures
- Office and Meeting Rooms
- Retail
- Commercial and Industrial

Product Information:

- Construction: aluminum housing with frosted lens
- Finished with corrosion free powder coat
- 6' cable and suspension kit included
- Select-n-Switch Technology: 5-CCT + 3-Power Selectable

Driver Options:

- Max Run: 600W off one power feed
- UNV: 100-277V, 0-10V Dimmable
- THD: <20% (+/-5% tolerance), PF >0.9, 50/60Hz
- 3-Power Selectable
- Flicker Free

Mounting & Installation

- 5-wire 6' power cord is included. 6-wire power cord is included with emergency models
- 6' Canopy suspension kit (1 power feed) included

Certifications

- UL Listed for USA and CA
- DLC Premium Listed
- Approved for CA T24
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

LUMENS/FT

POWER SETTING	DOWNLIGHT
Lowest	975
Middle	1,300
Highest	1,625

LUMENS/WATTAGE

WATTAGE	DOWNLIGHT
30W	3,900
40W	5,200
50W	6,500

LUMEN BASES OFF 4000K. Other CCT: +/- 5%

Series

LED-ELIN - 4FT-3P50 - 5CCT -
Eco Linear 50/40/30W 50/40/35
30/27K

Finish ²

WH
White
BL
Black

Emergency

(blank)
White
EMB
Emergency
Backup

1. BMS: Microwave Sensor: Areas made of full metal and high vibration settings may trigger false motion.

2. Standard quick ship finish is white. Other colors are custom finishes.

Accessories (Order Separately)

Suspension Canopy Kits

SK-CPR-20FT-1WR-WH


20' Single Wire White Finish

SK-CPR-20FT-1WR-BL


20' Single Wire Black Finish

Specs and model numbers are subject to change with or without notice.

FEATURES

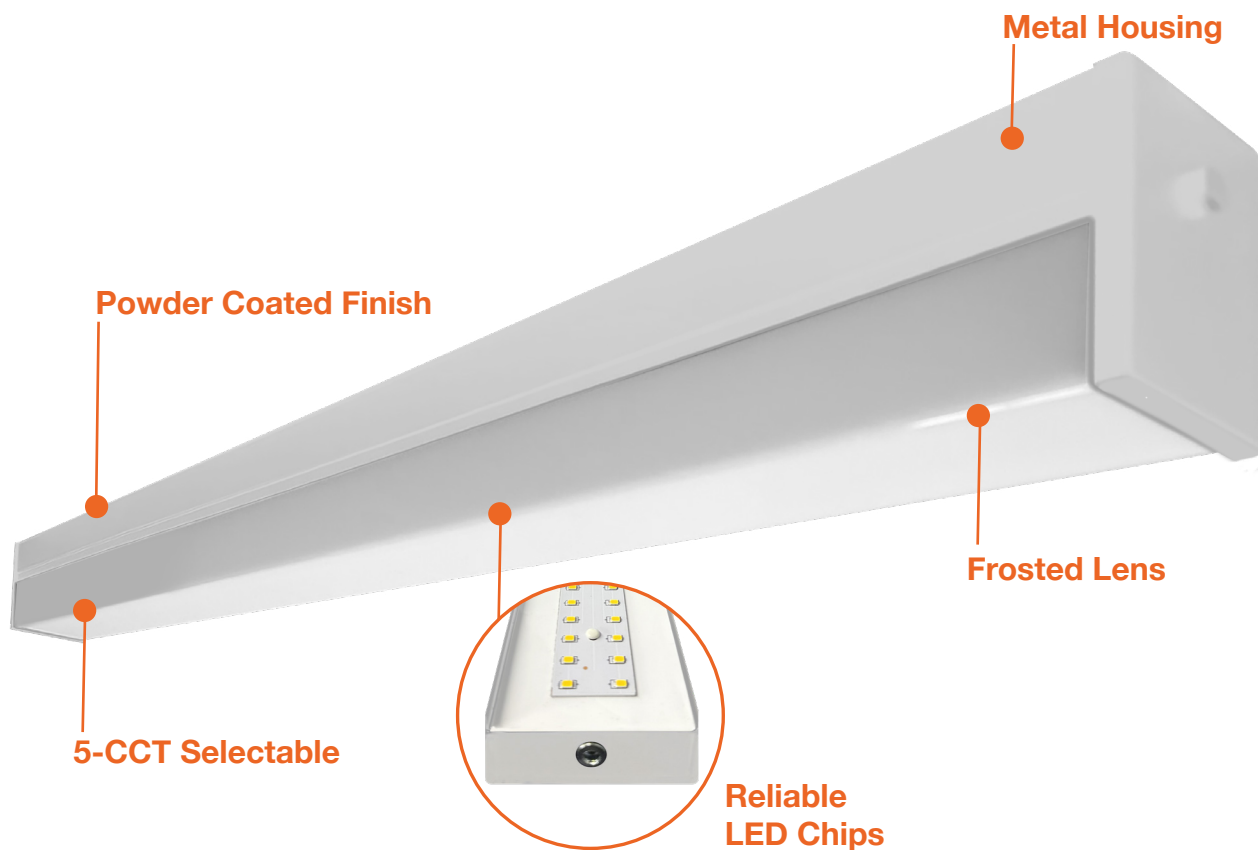

DIMENSIONS

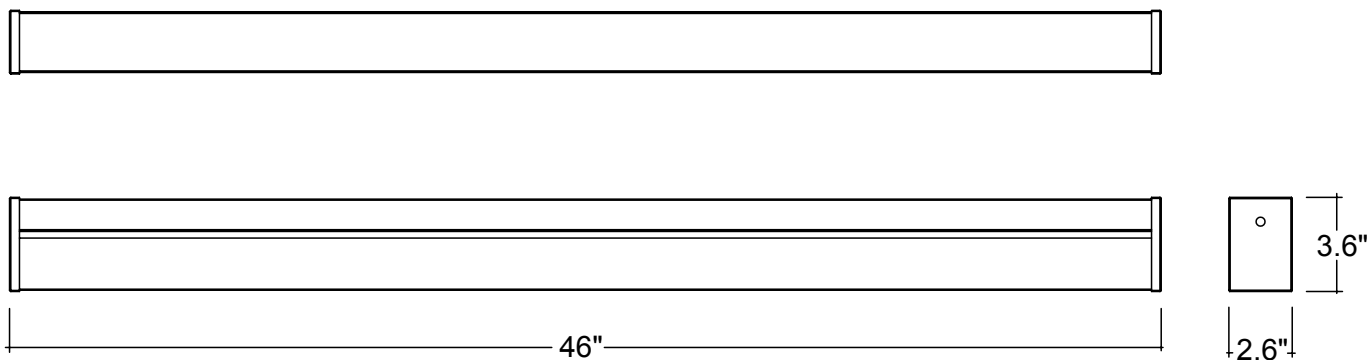

Specs and model numbers are subject to change with or without notice.

C-Line: Eco Linear Fixtures

5-CCT & 3-Power Selectable

ACCESSORIES



SK-CPR-20FT-1WR-WH
SK-CPR-20FT-1WR-BL

Model	Voltage	Watts	Lumens	Color	CRI
LED-ELIN-4FT-3P50-5CCT-WH	120-277V	50/40/30w	6,500/5,200/3,900	50/40/35/30/27k	>90
LED-ELIN-4FT-3P50-5CCT-BL	120-277V	50/40/30w	6,500/5,200/3,900	50/40/35/30/27k	>90

SUSPENSION

Accessory Model	Description
SK-CPR-20FT-1WR-WH	20' Single Wire White Finish
SK-CPR-20FT-1WR-BL	20' Single Wire Black Finish

Specs and model numbers are subject to change with or without notice.