

HEATED GRIPS

Accessory Name	Parts Number	Application Model	Issue Date	Publication No.
HEATED GRIPS	08T70-MJN-A02	CRF300LR/ CRF300LRA	April 2021	MII 17703
HEATED GRIPS SUB HARNESS	08T70-K1T-J10			

Introduction

ALL INFORMATION, ILLUSTRATIONS, DIRECTIONS AND SPECIFICATIONS INCLUDED IN THIS PUBLICATION ARE BASED ON THE LATEST PRODUCT INFORMATION AVAILABLE AT THE TIME OF APPROVAL FOR PRINTING. Honda Motor Co., Ltd. RESERVES THE RIGHT TO MAKE CHANGES AT ANY TIME WITHOUT NOTICE AND WITHOUT INCURRING ANY OBLIGATION WHATSOEVER. NO PART OF THIS PUBLICATION MAY BE REPRODUCED WITHOUT WRITTEN PERMISSION. THIS MANUAL IS WRITTEN FOR PERSONS WHO HAVE ACQUIRED BASIC KNOWLEDGE OF MAINTENANCE ON Honda MOTORCYCLES, MOTOR SCOOTERS OR ATVS.

Honda Dealer:







Please give a copy of these instructions to your customer.

Customer:

To install this accessory requires specialized knowledge, special tools and equipment. It is recommended to have a Honda dealer install this accessory.

How To Read These Symbols

Your safety, and the safety of others, is very important. To help you make informed decisions we have provided safety messages and other information throughout this manual.

-  **WARNING** You CAN be KILLED or SERIOUSLY HURT if you don't follow instructions.
-  **CAUTION** You CAN be HURT if you don't follow instructions.
-  **NOTICE** The purpose of this message is to help prevent damage to your vehicle, other property, or the environment.
-  **NOTE** Things you want to know, things that are useful to know.
-  Follow the instructions of the Service Manual.
-  Follow the other symbol instructions of the "Installation Instructions BASIC".

Instruction Other Symbols

The symbols used throughout this instructions show specific service procedures. Refer to "Installation Instructions BASIC" for description of each symbol.


INFORMATION

⚠ CAUTION


- To prevent burns, allow the engine, exhaust system, radiator, etc., to cool before installing the accessory.

NOTICE

- **Be sure to observe the following when installing the Left Heated Grip.**
 - Do not tap on the grip end with a hammer and do not twist the grip to install the left heated grip onto the handlebar, as it can damage the element.

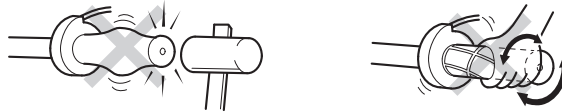

- Avoid putting pressure on the switch part when inserting the left grip heater. There is a possibility that the switch part will break.

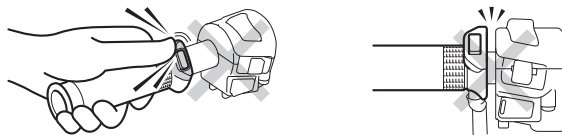

- If the grip gets stuck halfway during installation, apply isopropyl alcohol to the gap between the heated grip. Do not try to remove the heated grip using force or a screwdriver, etc. Damage to the heated grip wire can result.


NOTE:

- Disconnect the throttle cables from the right grip as instructed in the motorcycle's Service Manual.
- For secure adhesion of the heated grips use the recommended adhesive agent (Honda Bond A) or equivalent.
- Be sure to open and close the throttle to check for smooth operation after installation of the right heated grip.
- Take care not to damage the painted surfaces of the motorcycle.
- Save all removed parts unless otherwise indicated.
- Reinstall the removed parts on the motorcycle and make sure that the wires and harnesses are not pinched.
- After reconnecting the battery, refer to the motorcycle Owner's Manual and set the clock.
- Trim the excess ends off the wire ties after attaching them to the wire harness. Do not allow the cut part of the wire tie to interfere with another harness or brake hose.
- Move the handlebar right to left and check that the harnesses are not pinched by the any components and that they are not too tight.
- After installing the heated grips, check the lights (e.g. right / left turn signal lights and brake lights) for proper operation.


PARTS LIST

When the instruction manual and installation instructions are included in this kit, be sure to give them to the customer.


<HEATED GRIP ATTACHMENT>

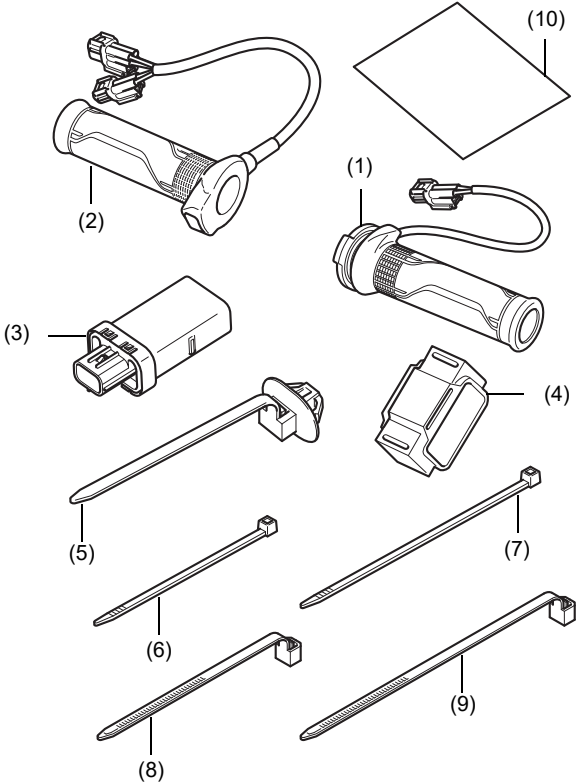Component	No.	Parts Name	Qty	Parts No.
	(1)	Right heated grip	1	08T00-MJN-A01
	(2)	Left heated grip	1	08T00-MJN-317
	(3)	Controller	1	35530-MJN-D12
	(4)	Controller holder	1	35535-MJN-D11
	(5)	Clip band [Not used]	6	91541-S0A-003
	(6)	Wire tie (4.4 x 100* mm)	6	83645-GG0-000
	(7)	Wire tie (3.55 x 140* mm)	6	35701-MG9-950
	(8)	Wire tie (7 x 125 mm)	6	90652-KT1-771
	(9)	Wire tie (7 x 235 mm)	3	90620-SB2-003
	(10)	Installation Instructions URL	1	-
*: Includes band tie length				

<HEATED GRIP ATTACHMENT>

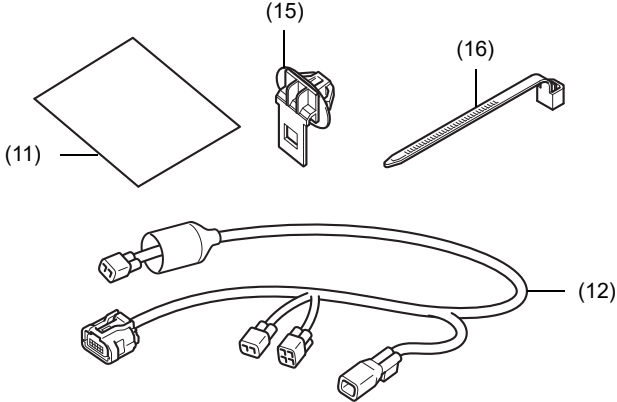Component	No.	Parts Name	Qty	Parts No.
	(11)	Installation Instructions URL	1	-
	(12)	Heated grip sub harness	1	-
	(15)	Connector clip	1	91565-SEL-003
	(16)	Wire tie	1	90651-KV6-003

SYSTEM DIAGRAM

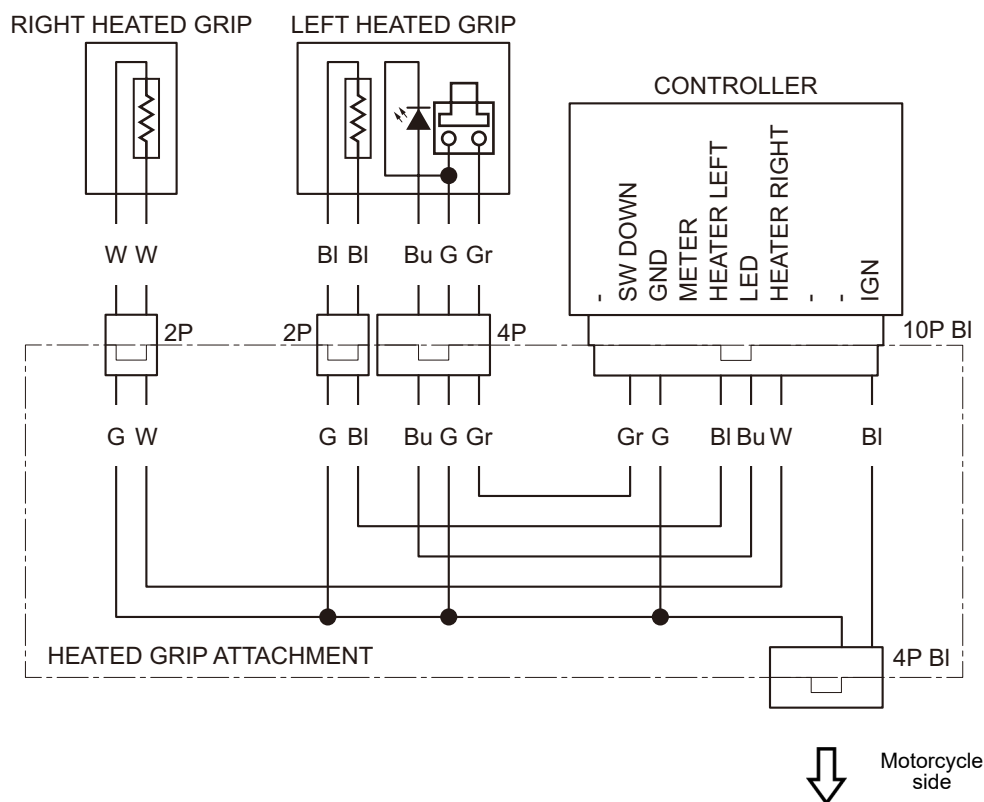

Identify wire colors:
 BI: Black
 Bu: Blue
 G: Green
 Gr: Gray
 W: White


TORQUE INFORMATION

Refer to the Service Manual for the torque values including standard torque of the removed parts. (🔧)


INSTALLATION

1. Refer to the Service Manual for the motorcycle, remove the motorcycle parts as shown, and disconnect the negative (-) cable from the battery. (📖)


RALLY type shown:

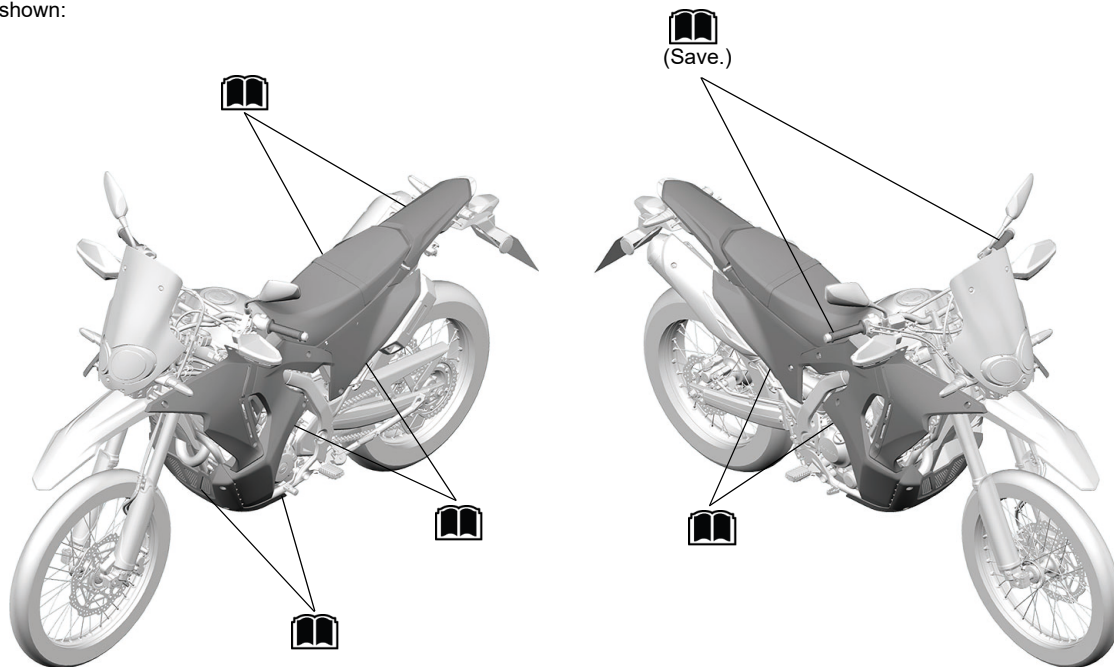


INSTALLATION IMAGE

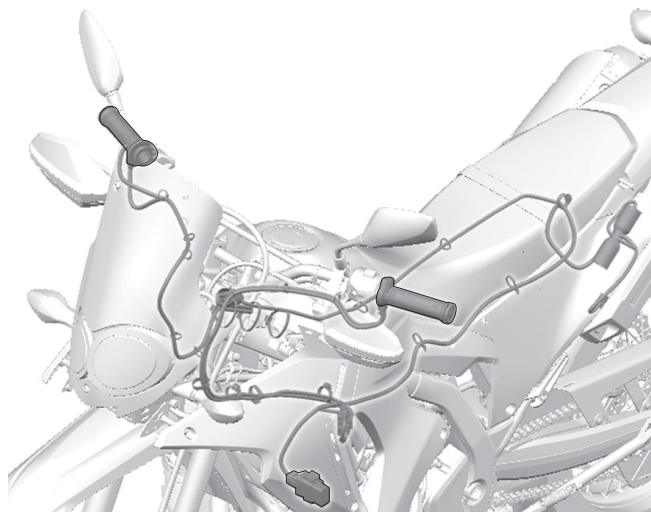

2. Mark in the position shown.

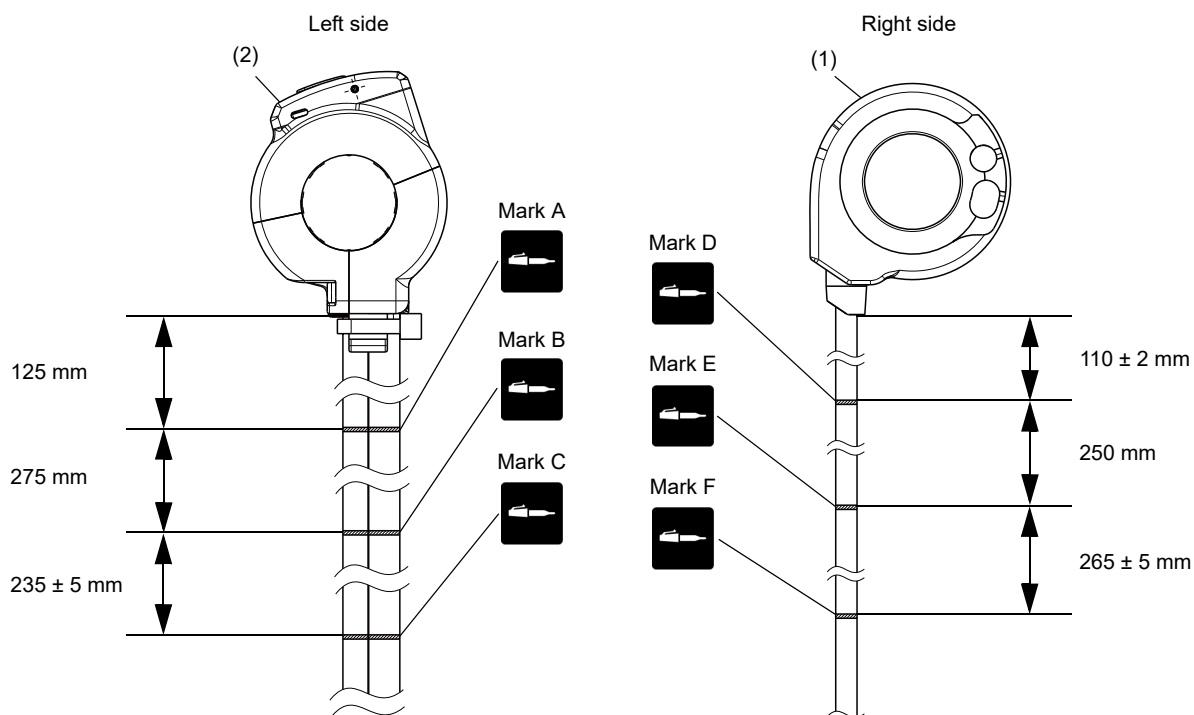


3. Install as shown.
- Be sure to check the content of the notice (page 2).

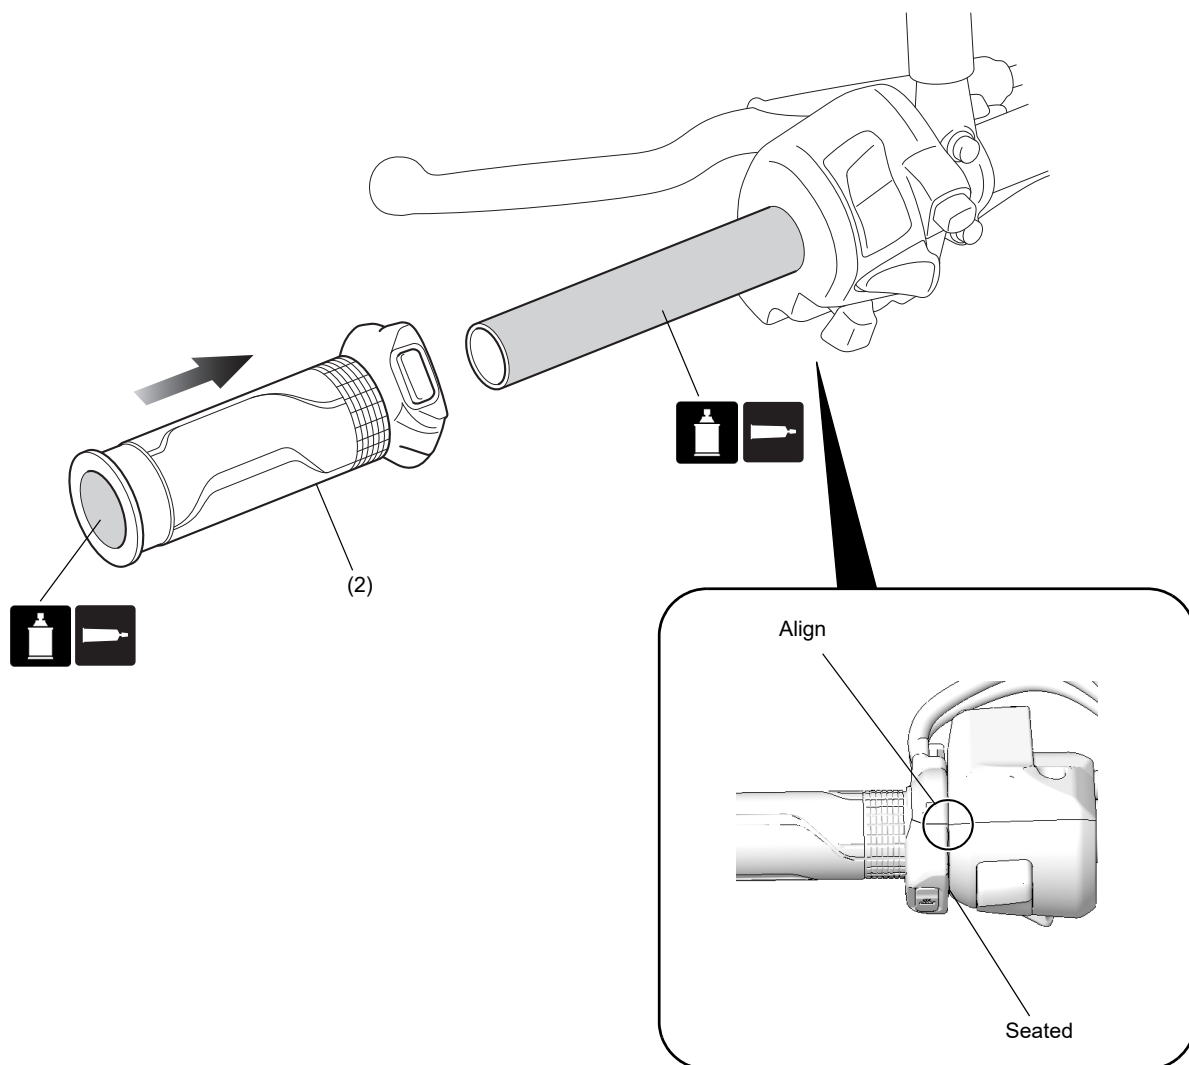


4. Install as shown.


Rally type:

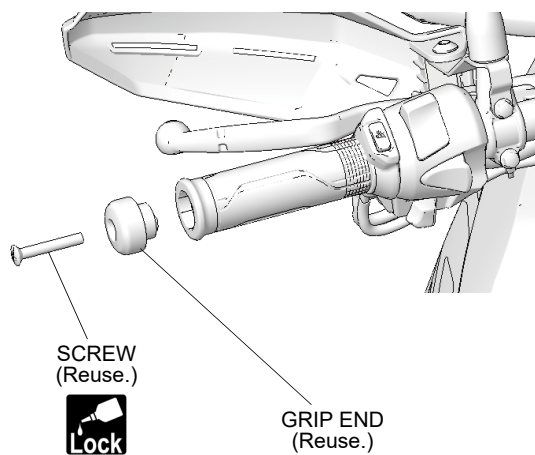



5. Route the harness as shown.

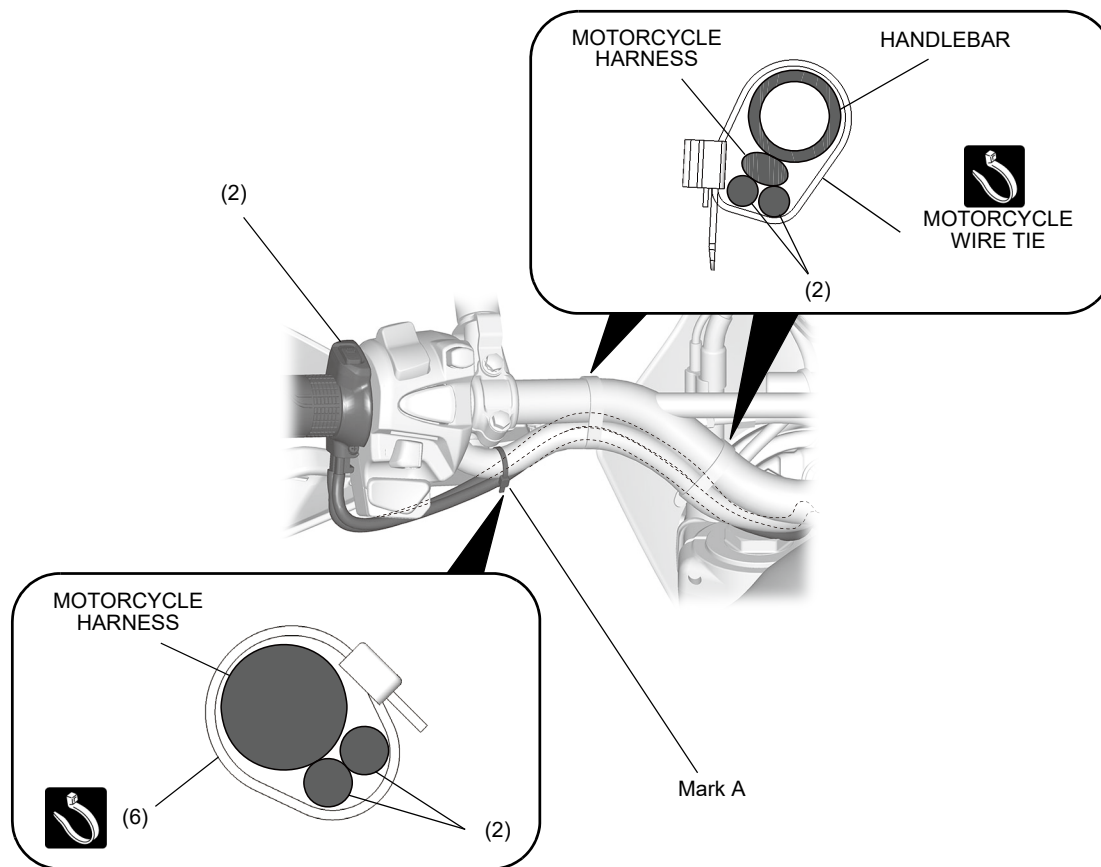


6. Route the harness as shown.

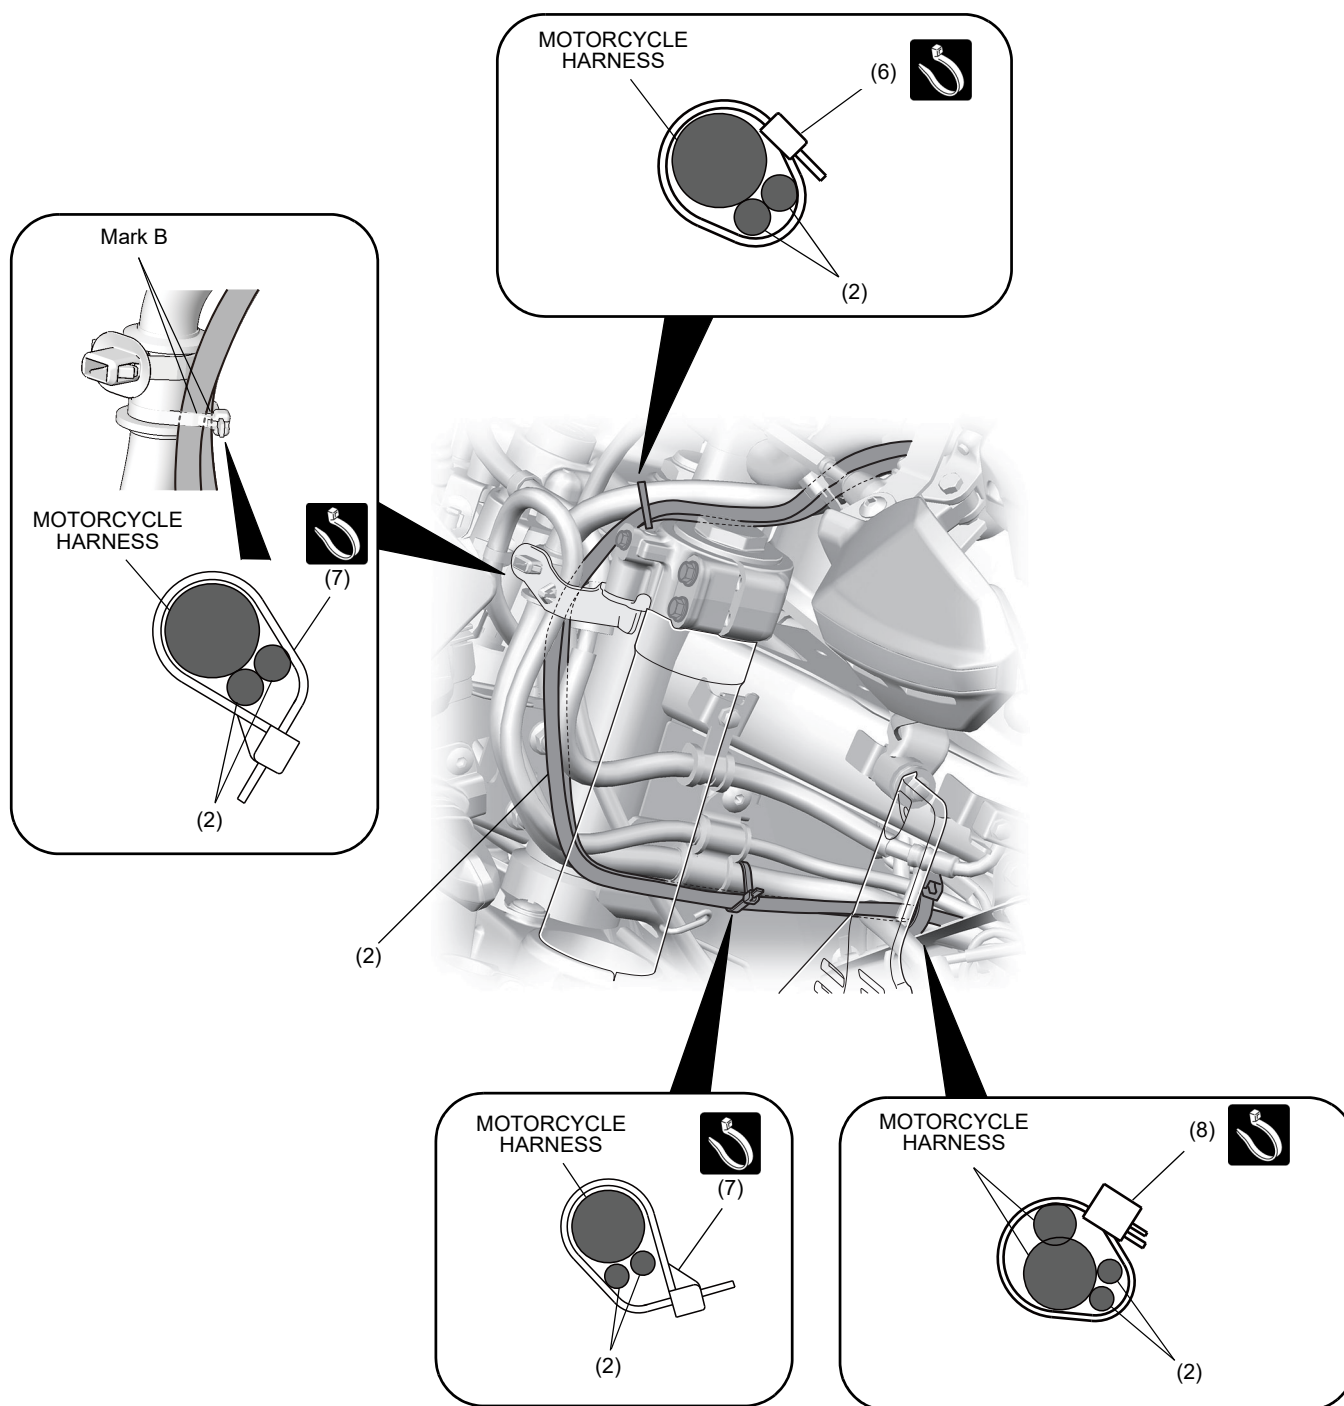


7. Apply grease and install the parts as shown.
- After installation, refer to the Service Manual and adjust the throttle freeplay.

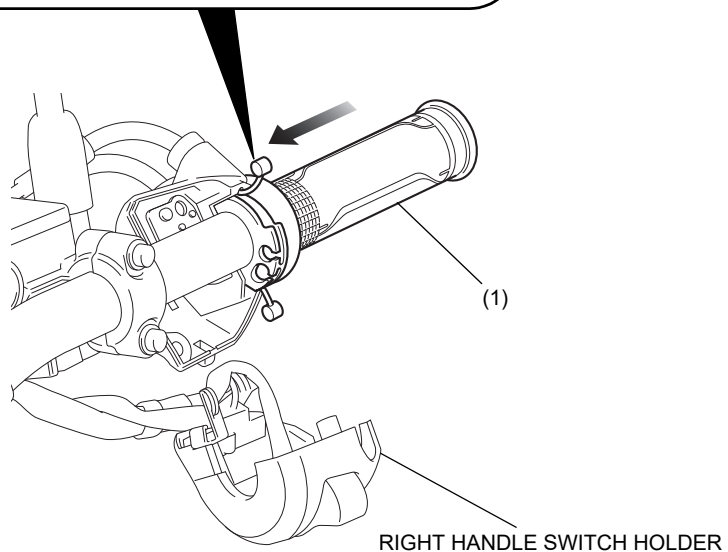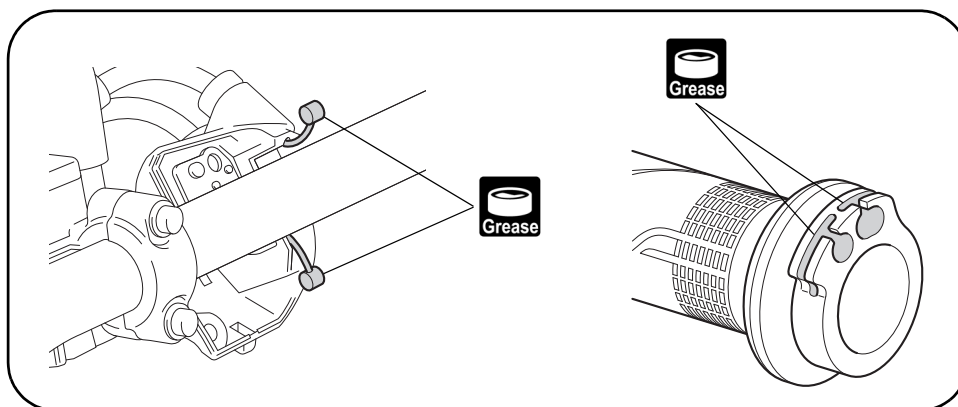


8. Install as shown.

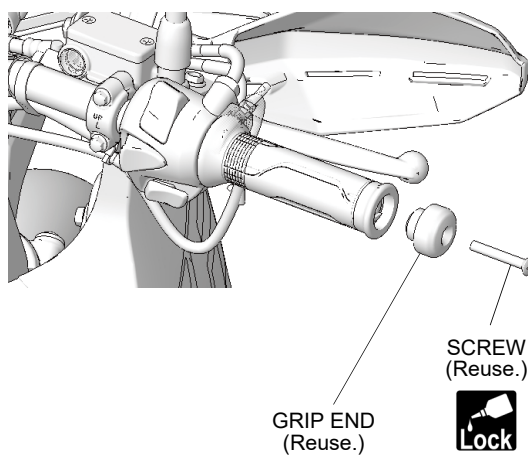


9. Route the harness as shown.
- Open and close the throttle and check that the heated grip harness is not pulled or caught on any component.

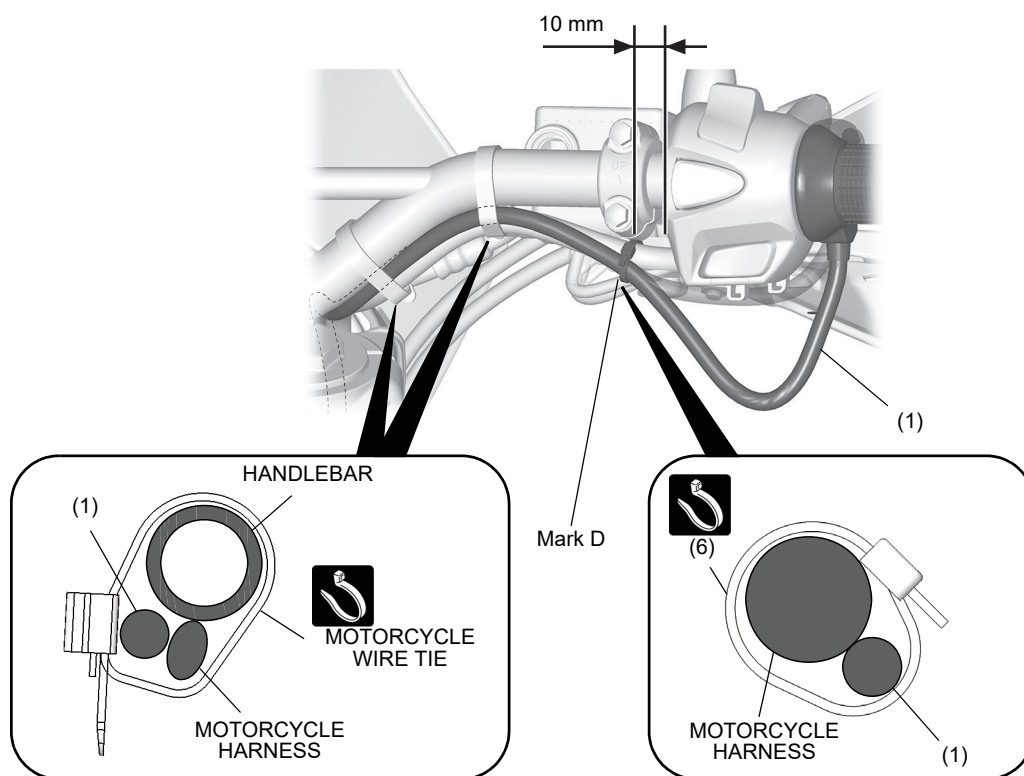


10. Route the harness as shown.

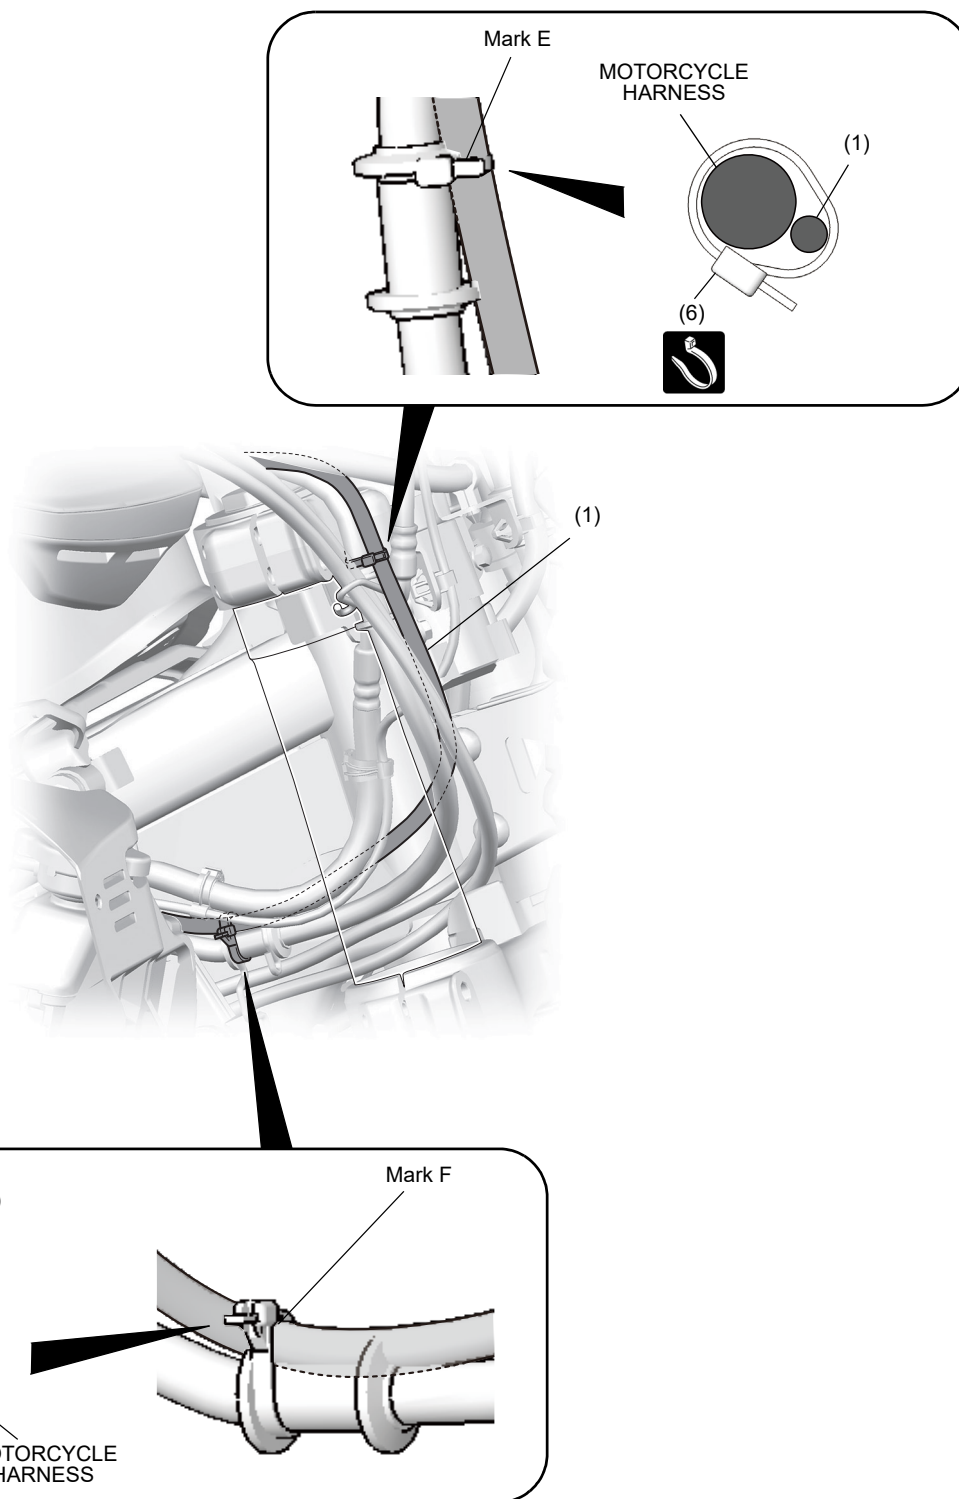


11. Route the harness as shown.

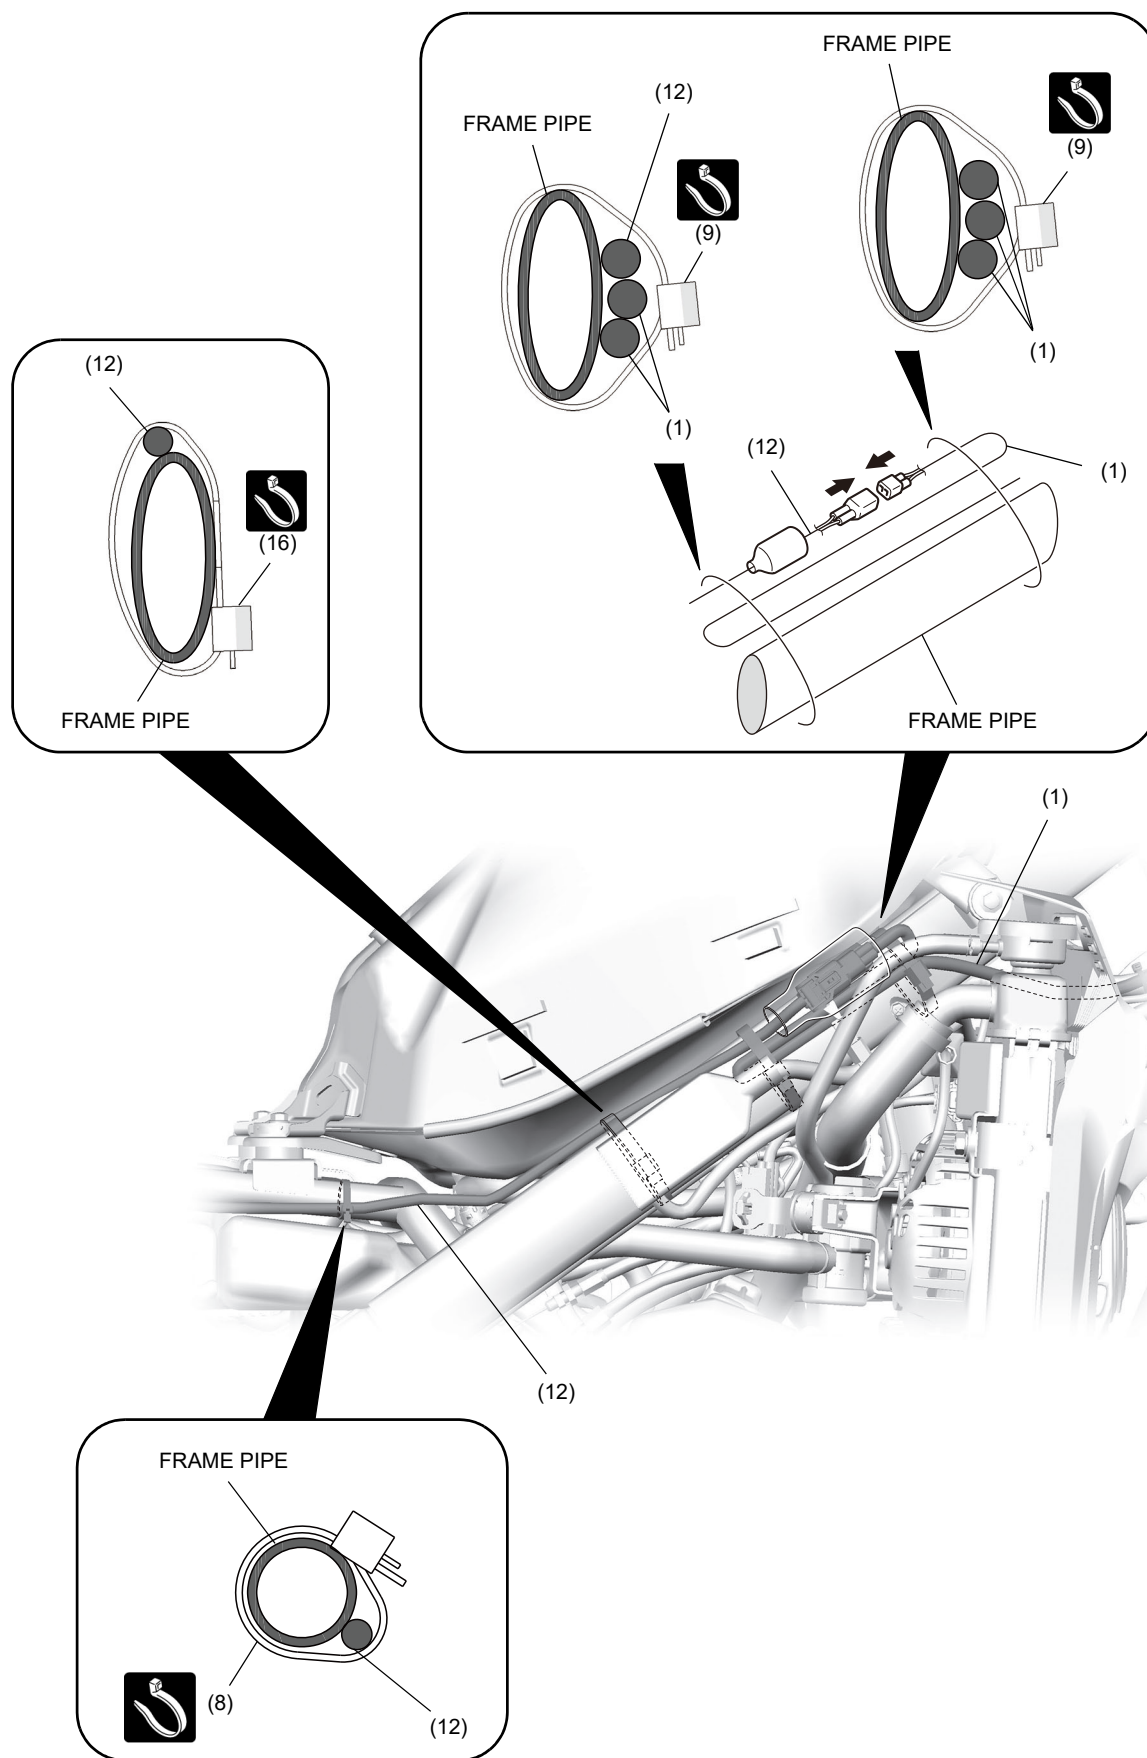



12. Route the harness as shown.

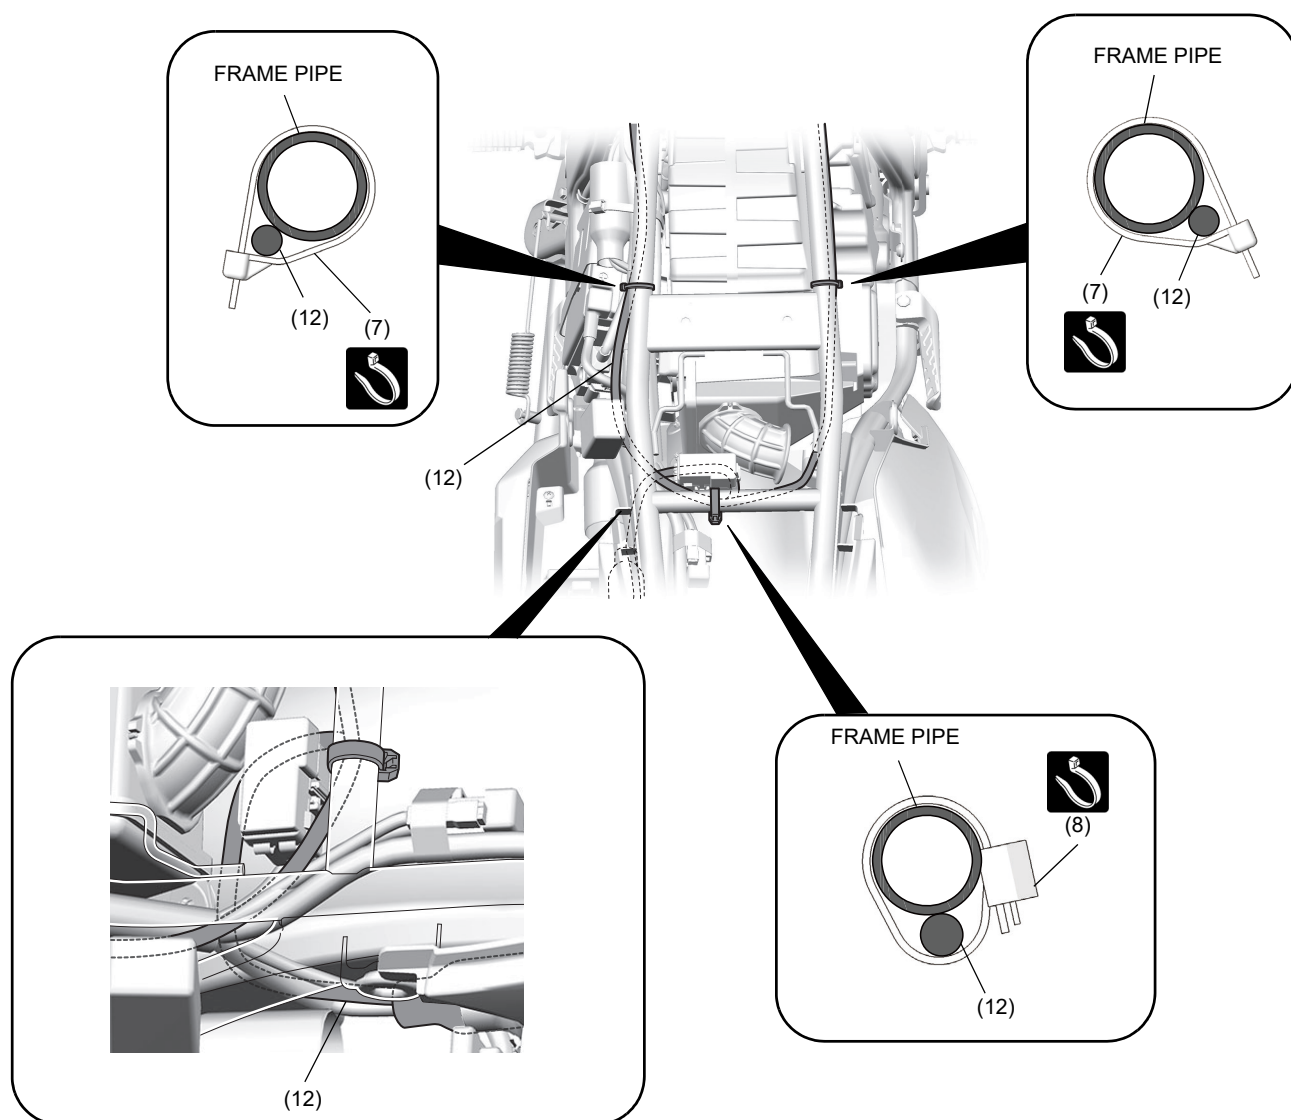


13. Route the harness as shown.

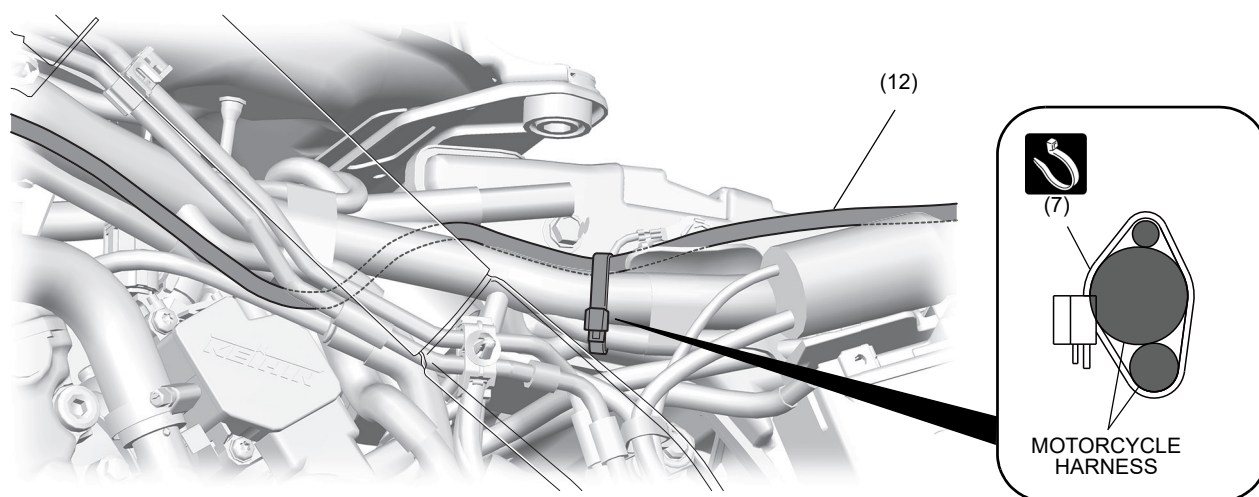


14. Route the harness as shown.

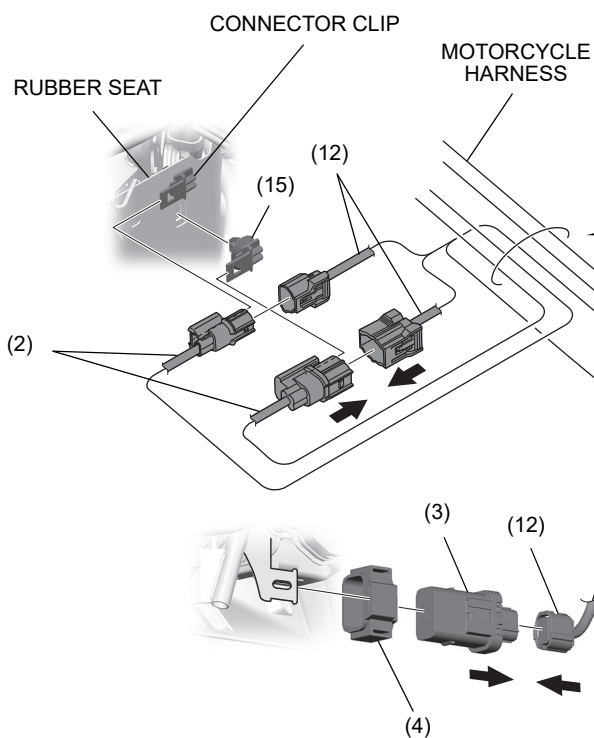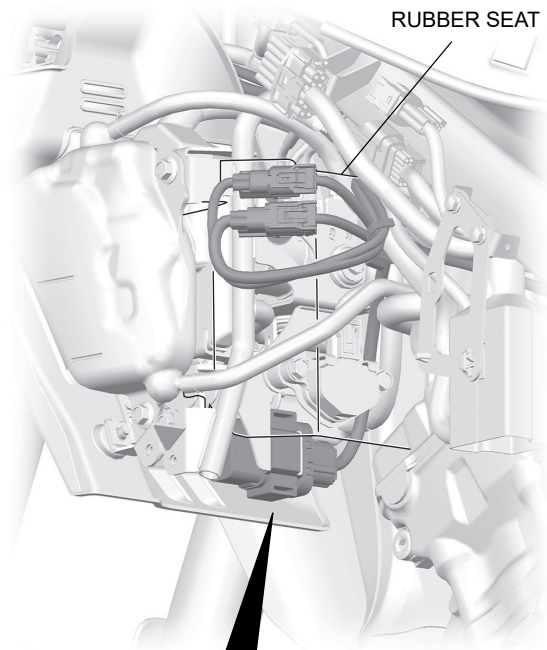

L type:


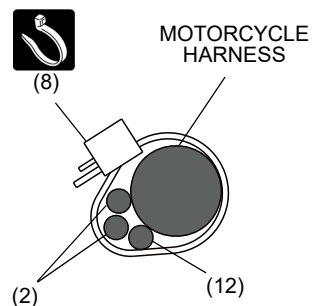


Rally type:

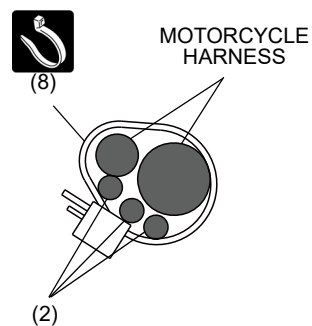

MOTORCYCLE HARNESS (Rally type)




15. Route the harness as shown.

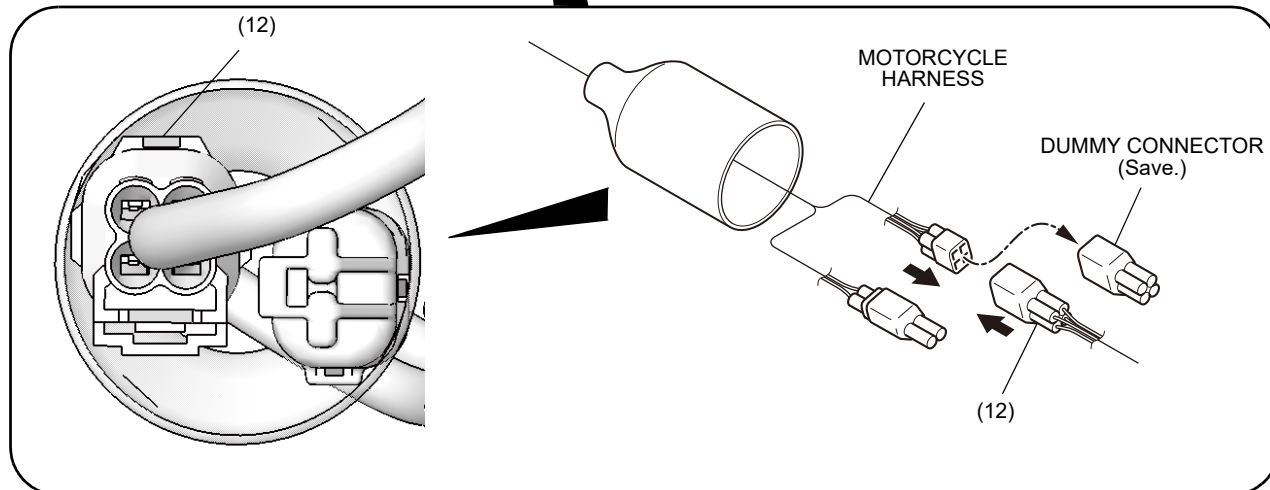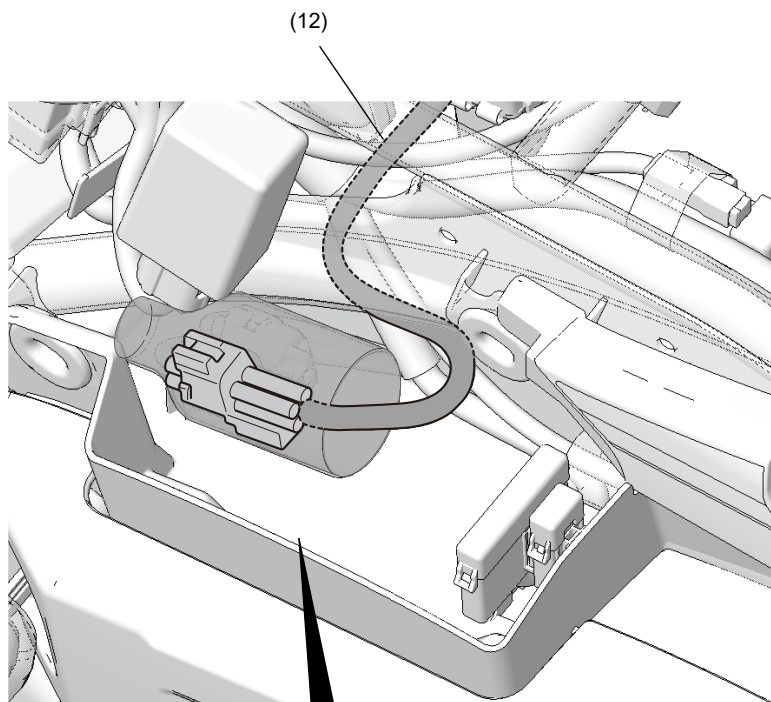

16. Install the motorcycle's parts in the reverse order of removal.
 • Confirm that the harness is not caught or too tight.

DEALER TROUBLESHOOTING

- When the grip heater has abnormalities, the grip heater status icon on the combination meter and the heated grip switch indicator show following displays. Follow each instruction to perform inspection.

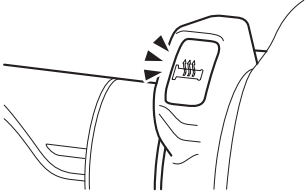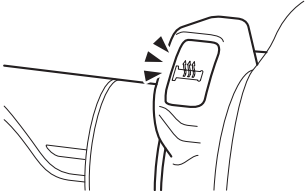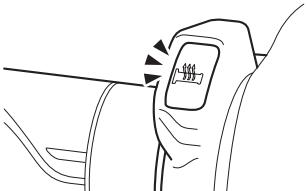Heated Grip switch indicator	Check
<p>Blink once.</p> 	1
<p>Blinks twice.</p> 	2, 3, 4, 5
<p>Blinks 3 times.</p> 	
<p>Indicator does not light on.</p>	

- Battery inspection:
Refer to the Service Manual and inspect the battery.
 - Check that the wires and cables (terminals and connectors) are connected securely.
 - Heated grip inspection:
Check for resistance between the terminals.
⇒ Standard:
 Right : 8.2 ohms +/- 10%
 Left : 8.2 ohms +/- 10%
 - Heater harness inspection:
Check for continuity.
 - If no abnormality is found after the above checks 2, 3, and 4, but the heated grip still does not operate properly, replace the heated grip with a new one.
- It is hard to check the switch with ordinary inspection methods (for continuity, voltage, etc.) because it contains an integrated circuit.