



Warehouse



Logistics



Retail



Manufacturing

Accessories



Protective Boot

- 2-meter Drop Protection
- PC/TPU Material
- 54.2 g



Pistol Grip

- Mechanical Trigger Button
- PC Material
- 132.5 g



Spare Battery

- 3.85 V
- 4000 mAh/15.40 Wh
- 72 g
- Rechargeable Li-Polymer Battery Pack



Power Adapter

- Input: 100-240 Vac
- Output: 5 V/3 A; 9 V/2 A; 12 V/1.5 A



USB Cable

- Type C to USB 3.0



Screen Protector

- 0.45 mm thinness
- Anti-fingerprint
- 9H tempered glass



Hand Strap with Protective Boot

- 2 m drop protection
- With adjustable strap
- PC/TPU material
- 63 g



Cradle

- IO Port: USB 2.0 Type C and Ethernet. (Priority : Type C > Ethernet)
- Charging Slots: Support Terminal*1+Battery*1 charging at the same time
- Battery voltage: 4.4 V
- RIO Connector: Type C(24pins)+2 charging pins



TC601 Cradle/ TC601 Ethernet Cradle

TC601 Charging/Communication Cradle

User Instructions

The Charging/Communication Cradle is a ruggedized snap-in cradle for the TC601 Mobile Computer. This cradle lets you connect your TC601 to a USB port for transferring data, or to a power outlet for standalone charging. The cradle has an external battery slot for keeping an extra battery charged at all times. An optional Ethernet connector also provides network and internet capabilities. The cradle offers added convenience with easier and more stable connections for commercial and industrial applications.


- Operation Temperature : -20°C~50°C
- Rating Voltage: DC 19V, 2.37A

Package Contents

- TC601 Charging/Communication Cradle
- Power Adapter
- Cradle Linking Accessory and Thumbscrew
- User Instructions


Features

Front View




- ① TC601 Cradle Connector

Back View



- ① Power Adapter Connector
② USB 2.0 Type C Connector 480Mbit/s
③ Ethernet Connector 10Mbps/100Mbps (Only Ethernet Model)

Top View



- ① External Battery Charging Slot
② Battery Connector
③ LED (Dual Color)
④ TC601 Cradle Connector

Connecting Cables

1. Connect the USB cable to the cradle's USB Type C connector and connect it to your PC for USB communication.
2. Connect the provided power adapter from the cradle to a power outlet for standalone charging.

Charging an External Battery

To charge an external battery:

1. Make sure the cradle's Power Adapter is connected to the cradle and a power source.
2. Align the External Battery with the connector in the Battery Charging Slot and slide into the slot.
3. The LED next to the slot will glow Red while charging. When the external battery is fully charged, the LED will glow Green. If the charging has failed, the LED will blink Green/Red.

Connecting the TC601

Inserting the TC601 Mobile Computer


To insert your TC601 into the Cradle:

1. Insert the bottom of the TC601 into the Cradle Connector. It will fit in only one direction.
2. Press the TC601 into the Cradle Connector until it clicks.

Removing the TC601 Mobile Computer

To remove the TC601 from the Cradle:


1. Grasp and hold down the cradle connector with one hand.
2. Grip and pull the TC601 with your other hand.

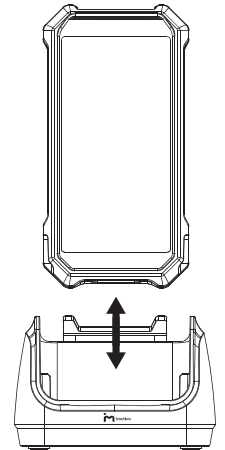

Linking Cradles

A cradle linking accessory is included for linking several cradles together. You can attach the cradle link to either the left or right side of the cradle bottom.

1. Align one end of the cradle link to a bottom slot and use the thumbscrew to fasten it.
2. Align the other end of the cradle link to another cradle and use a thumbscrew to fasten the cradles together.

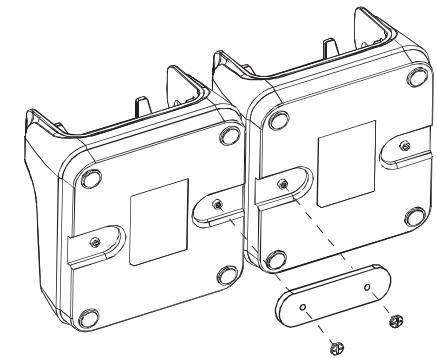



TC601 Cradle/ TC601 Ethernet Cradle

TC601 充電/通訊座

使用說明

充電/通訊座是一款堅固耐用的卡式機座，且適用於TC601手持行動電腦。

這款機座可以讓您將TC601連接至USB連接埠進行資料傳輸，或連接至電源插座進行獨立充電。

機座有一個外置電池插槽，可讓您隨時為額外的電池充電。您也可以選購乙太網路連接器來提供網路連接和網際網路功能。該機座為商業和工業應用提供了更多的便利，並使連接更簡單、更穩定。


- 操作溫度範圍:-20℃~50℃
- 額定電壓: DC 19V, 2.37A

包裝內容

- TC601充電/通訊座
- 電源供應器
- 機座連接配件和旋鈕
- 使用說明


產品特點

前視圖




- ① TC601 機座連接器

後視圖



- ① 電源供應器連接器
② USB 2.0 Type C 連接器
480Mbit/s
③ 乙太網路連接器
10 Mbps/100 Mbps (僅限乙太網路型號)

俯視圖



- ① 外置電池充電插槽
② 電池連接器
③ LED（雙色）
④ TC601 機座連接器

連接 USB 傳輸線

1. 將USB傳輸線連接到機座的USB Type C接口，並將其連接到您的電腦進行USB通訊。
2. 將隨附的電源供應器從機座連接到電源插座以進行獨立充電。

外置電池充電

若要為外置電池充電，請執行以下操作：


1. 確保機座的電源供應器連接至機座和電源。
2. 將外置電池與電池充電槽中的連接器對準，然後滑入插槽之中。
3. 充電時，插槽旁邊的LED燈會亮起紅色。當外置電池充滿電後，LED燈會亮起綠色。如果充電失敗，LED燈將閃爍綠色/紅色

連接 TC601

插入 TC601 手持行動電腦

若要將TC601插入機座，請執行以下操作：

1. 將TC601的底部插入機座連接器。其只能朝單一方向進行安裝。
2. 將TC601壓入機座連接器，直至其發出喀嗒聲為止。

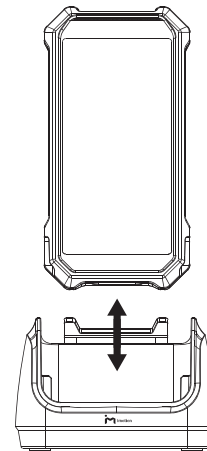

卸下 TC601 手持行動電腦


若要將TC601從機座上移除，請執行以下操作：

1. 一隻手抓住並按住機座連接器。
2. 另一隻手抓住並拉動TC601

連接機座

其中包含一個機座連接配件，可將多個機座連接在一起。您可以將機座連接配件連接到機座底部的左側或右側。

1. 將底座連接配件的一端對準底部插槽，然後使用指旋螺釘將其固定。
2. 將底座連接配件的另一端對準另一個機座，然後使用指旋螺釘將機座固定在一起。

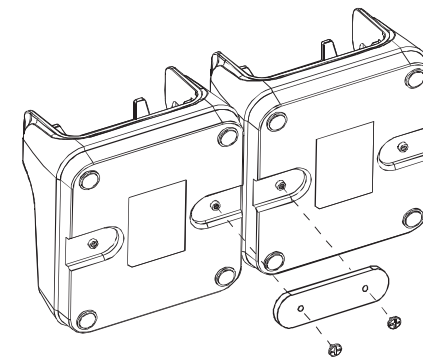

設備名稱: TC601充電/通訊座(TC601 Charging/Communication Cradle) 型號(型式): TC601 Ethernet Cradle(主型號) / TC601 Cradle

單元 Unit	限用物質及其化學符號					
	鉛 Lead (Pb)	汞 Mercury (Hg)	鎘 Cadmium (Cd)	六價鉻 Hexavalent chromium (Cr ⁶⁺)	多溴聯苯 Polybrominated biphenyls (PBB)	多溴二苯醚 Polybrominated diphenyl ethers(PBDE)
電路板組件	○	○	○	○	○	○
I/O組件	—	○	○	○	○	○
外殼組件	○	○	○	○	○	○
蓄電組件	○	○	○	○	○	○

備考1. “超出0.1 wt %”及“超出0.01 wt %”係指限用物質之百分比含量超出百分比含量基準值。

備考2. “○”係指該項限用物質之百分比含量未超出百分比含量基準值。

備考3. “—”係指該項限用物質為排除項目。



TC601 Pistol Grip

Quick Start Guide

Package Contents


- TC601 Pistol Grip
- Quick Start Guide



After unpacking, please inspect package contents. If any item is damaged or missing, please contact your customer support representative immediately.

Features


Side View




- ① Clips Clamp the TC601 with clips and make sure that the device is set safely.
- ② Trigger After the TC601 is assembled, you can press the trigger to scan barcodes.

Assemble


1. Place the TC601 into the top part of the Pistol Grip according to the image.



2. Press down the bottom part of the TC601 into the Pistol Grip.




3. Ensure that the top corners and the two clips are well fixed.




Disassemble

1. Release the two clips of the Pistol Grip by pushing them outwards.



2. Lift the bottom of the device to remove it from the Pistol Grip.





TC601 手持式握把

TC601 Pistol Grip

快速入門指南

包裝內容


- TC601 專用手持式握把
- 快速入門指南



打開包裝後，請檢查內裝內容。若有任何品項損壞或丟失，請立即聯絡您的客戶支援代表。

產品特點


側視圖




- ① 安全扣夾 將 TC601 用安全扣夾扣住，確保裝置穩固的安裝於槍把上。
- ② 按鍵 正確安裝 TC601 後，按下按鍵即可觸發裝置掃碼。

安裝方法


1. 按照圖示方向，將 TC601 放入槍把上方的凹槽。



2. 將 TC601 機身尾端壓入凹槽。




3. 確保機身完全放入槍把凹槽，即完成安裝。




拆卸方法

1. 將槍把兩側的安全扣夾向外推，使其鬆開機身。



2. 推出 TC601 的機身尾端，將其從槍把凹槽中取出。



創威智聯股份有限公司

110 台北市信義區市民大道六段 288 號 6 樓

<https://www.iwaypro.com>